




WIRE ROPE



6x19 Class
6x36 Class
8x19 Non-Rotation
19x7 Non-Rotation
Dypac 18

CoreLifting.com






AMERICANTM

WIRE ROPE




**Domestic
Wire Rope
and Cable®**

Stranded and Closed
In the USA




American Wire Rope®


Red and Yellow Strand is a Registered Trademark of Kulkoni, Inc.



**6 x 19 SEALE
WITH IWRC**



**6 x 26 WARRINGTON
SEALE WITH IWRC**




**6 x 25 FILLER
WIRE WITH IWRC**

Domestic Bright Wire Rope 6 X 19 Class

FIBER CORE (EIPS)			
Diameter in Inches	Approx. Weight per foot in Pounds	Breaking Strength in Tons*	Price Per Foot **
1/4	0.105	3.01	2.37
5/16	0.164	4.69	2.77
3/8	0.236	6.71	3.05
7/16	0.320	9.10	3.55
1/2	0.420	11.80	3.54
9/16	0.530	14.90	3.97
5/8	0.660	18.40	4.57
3/4	0.950	26.20	6.39
7/8	1.290	35.40	8.34
1	1.680	46.00	10.27
1.1/8	2.130	57.90	12.37
1.1/4	2.630	71.10	14.61

IWRC (EIPS)			
Diameter in Inches	Approx. Weight per foot in Pounds	Breaking Strength in Tons*	Price Per Foot **
1/4	0.116	3.40	2.37
5/16	0.180	5.27	2.77
3/8	0.260	7.55	3.05
7/16	0.350	10.20	3.55
1/2	0.460	13.30	3.54
9/16	0.590	16.80	3.97
5/8	0.720	20.60	4.57
3/4	1.040	29.40	6.39
7/8	1.420	39.80	8.34
1	1.850	51.70	10.27
1.1/8	2.340	65.00	12.37
1.1/4	2.890	79.90	14.61
1.3/8	3.500	96.00	17.62
1.1/2	4.160	114.00	20.86
1.5/8	4.880	132.00	25.10
1.3/4	5.670	153.00	29.46
2	7.390	198.00	45.22

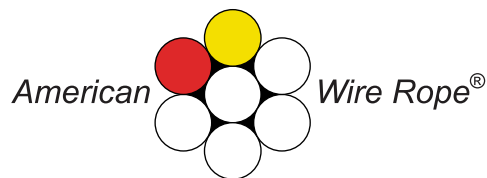


According to A.S.T.M. A1023/1023M Wire Rope for General Purposes and Federal Specification RR-W-410, current revision, as applicable. Meets the performance requirements of API-9A. Preformed, right regular lay. Other lays are available for certain sizes and constructions, such as RAL, LAL, LRL, and Lang lay. EEIPS grade ropes are also available upon request and stocked on several items.

**Add 7.5% for EEIPS grade.


* Listed for comparison only. Actual operating loads should never exceed the recommended design factor or 20% of catalog Breaking Strength.

1/4" & 5/16" produced by domestic manufacturers other than American Wire Rope Company.





**6 x 31 WARRINGTON
SEAL WITH IWRC**



**6 x 36 WARRINGTON
SEAL WITH IWRC**

Domestic Bright Wire Rope 6 X 36 Class

FIBER CORE (EIPS)			
Diameter in Inches	Approx. Weight per foot in Pounds	Breaking Strength in Tons*	Price Per Foot **
1/4	0.105	3.01	3.13
5/16	0.164	4.69	3.65
3/8	0.236	6.71	4.19
7/16	0.320	9.10	4.50
1/2	0.420	11.80	4.75
9/16	0.530	14.90	5.20
5/8	0.660	18.40	5.82
3/4	0.950	26.20	7.55
7/8	1.290	35.40	9.52
1	1.680	46.00	11.87
1.1/8	2.130	57.90	14.49
1.1/4	2.630	71.10	17.18

IWRC (EIPS)			
Diameter in Inches	Approx. Weight per foot in Pounds	Breaking Strength in Tons*	Price Per Foot **
1/4	0.11	3.40	3.13
5/16	0.18	5.27	3.65
3/8	0.26	7.55	4.19
7/16	0.35	10.20	4.50
1/2	0.46	13.30	4.75
9/16	0.59	16.80	5.20
5/8	0.72	20.60	5.82
3/4	1.04	29.40	7.55
7/8	1.42	39.80	9.52
1	1.85	51.70	11.87
1.1/8	2.34	65.00	14.49
1.1/4	2.89	79.90	17.18
1.3/8	3.50	96.00	20.08
1.1/2	4.16	114.00	23.90
1.5/8	4.88	132.00	28.74
1.3/4	5.67	153.00	34.06
2	7.39	198.00	45.22
2.1/4	9.36	247.00	70.05



According to A.S.T.M. A1023/1023M Wire Rope for General Purposes and Federal Specification RR-W-410, current revision, as applicable. Meets the performance requirements of API-9A. Preformed, right regular lay.


Other lays are available for certain sizes and constructions, such as RAL, LAL, LRL, and Lang lay. EEIPS grade ropes are also available upon request and stocked on several items.

**Add 7.5% for EEIPS grade.


* Listed for comparison only. Actual operating loads should never exceed the recommended design factor or 20% of catalog Breaking Strength.

1/4" & 5/16" produced by domestic manufacturers other than American Wire Rope Company.






**6 x 19 SEALE
WITH IWRC**



**6 x 26 WARRINGTON
SEALE WITH IWRC**




**6 x 25 FILLER
WIRE WITH IWRC**

Domestic Galvanized Wire Rope 6 X 19 Class

Drawn Galvanized FIBER CORE (EIPS)*			
Diameter in Inches	Approx. Weight per Foot in Pounds	Breaking Strength in Tons*	Price Per Foot
3/8	0.236	6.71	3.69
7/16	0.320	9.10	4.31
1/2	0.420	11.80	4.54
9/16	0.530	14.90	5.08
5/8	0.660	18.40	5.84
3/4	0.950	26.20	8.19
7/8	1.290	35.40	10.67
1	1.680	46.00	13.15
1.1/8	2.130	57.90	15.83
1.1/4	2.630	71.10	18.70


Drawn Galvanized IWRC (EIPS)*			
Diameter in Inches	Approx. Weight per foot in Pounds	Breaking Strength in Tons*	Price Per Foot
3/8	0.26	7.55	3.69
7/16	0.35	10.20	4.31
1/2	0.46	13.30	4.54
9/16	0.59	16.80	5.08
5/8	0.72	20.60	5.84
3/4	1.04	29.40	8.19
7/8	1.42	39.80	10.67
1	1.85	51.70	13.15
1.1/8	2.34	65.00	15.83
1.1/4	2.89	79.90	18.70
1.3/8	3.50	96.00	P.O.A.
1.1/2	4.16	114.00	P.O.A.
1.5/8	4.88	132.00	P.O.A.
1.3/4	5.67	153.00	P.O.A.

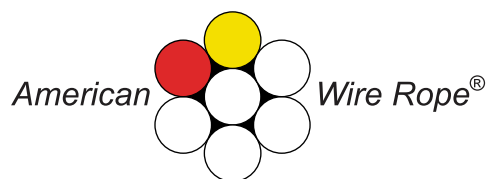


According to A.S.T.M. A1023/1023M Wire Rope for General Purposes and Federal Specification RR-W-410, current revision, as applicable. Meets the performance requirements of API-9A. Preformed, right regular lay.

* Listed for comparison only. Actual operating loads should never exceed the recommended design factor or 20% of catalog Breaking Strength.





**6 x 31 WARRINGTON
SEALE WITH IWRC**




**6 x 36 WARRINGTON
SEALE WITH IWRC**

Domestic Galvanized Wire Rope 6 X 36 Class

Drawn Galvanized FIBER CORE (EIPS)*			
Diameter in Inches	Approx. Weight per foot in Pounds	Breaking Strength in Tons*	Price Per Foot
3/8	0.236	6.71	5.08
7/16	0.320	9.10	5.46
1/2	0.420	11.80	6.07
9/16	0.530	14.90	6.65
5/8	0.660	18.40	7.44
3/4	0.950	26.20	9.66
7/8	1.290	35.40	12.19
1	1.680	46.00	15.19
1.1/8	2.130	57.90	18.54
1.1/4	2.630	71.10	21.99


Drawn Galvanized IWRC (EIPS)*			
Diameter in Inches	Approx. Weight per foot in Pounds	Breaking Strength in Tons*	Price Per Foot
3/8	0.26	7.55	5.08
7/16	0.35	10.20	5.46
1/2	0.46	13.30	6.07
9/16	0.59	16.80	6.65
5/8	0.72	20.60	7.44
3/4	1.04	29.40	9.66
7/8	1.42	39.80	12.19
1	1.85	51.70	15.19
1.1/8	2.34	65.00	18.54
1.1/4	2.89	79.90	21.99
1.3/8	3.50	96.00	25.69
1.1/2	4.16	114.00	P.O.A.
1.5/8	4.88	132.00	P.O.A.
1.3/4	5.67	153.00	P.O.A.

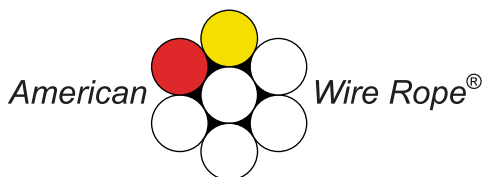


According to A.S.T.M. A1023/1023M Wire Rope for General Purposes and Federal Specification RR-W-410, current revision, as applicable. Meets the performance requirements of API-9A. Preformed, right regular lay.

* Listed for comparison only. Actual operating loads should never exceed the recommended design factor or 20% of catalog Breaking Strength.






**8 x 25 SPIN
RESISTANT
WITH IWRC**



**19 x 7 ROTATION
RESISTANT WITH
WIRE STRAND CORE**



DYPAC 18

Domestic 8 x 19 CLASS - BRIGHT, EIPS, ROTATION RESISTANT, STEEL CORE (IWRC)

Diameter in Inches	Approx. Weight per Foot in Pounds	Breaking Strength in Tons*	Price per Foot
1/2	0.47	11.6	5.79
9/16	0.60	14.7	6.10
5/8	0.73	18.1	7.26
3/4	1.02	25.9	9.44
7/8	1.06	35.0	12.77

According to A.S.T.M. A1023/1023M Wire Rope for General Purposes, current revision. Meets the performance requirements of API-9A, and Federal Specification RR-W-410, as applicable. IWRC, bright, preformed, EIPS.

These wire ropes are specially designed for use when rotation must be kept to a minimum. Strict adherence to breaking-in procedures and proper handling during use are extremely important with these ropes.

Domestic 19 x 7 CLASS - BRIGHT, EIPS, ROTATION RESISTANT

Diameter in Inches	Approx. Weight per Foot in Pounds	Breaking Strength in Tons*	Price per Foot
3/8	0.25	6.15	4.35
7/16	0.35	8.33	4.64
1/2	0.45	10.80	5.17
9/16	0.58	13.60	5.66
5/8	0.71	16.80	6.45
3/4	1.02	24.00	9.26
7/8	1.39	32.50	11.79
1	1.82	42.20	14.49
1.1/8	2.30	53.10	17.45
1.1/4	2.84	65.10	20.79

According to A.S.T.M. A1023/1023M Wire Rope for General Purposes, current revision. Meets the performance requirements of API-9A, and Federal Specification RR-W-410, as applicable. WSC, EIPS

* These strengths apply only when a test is conducted with both ends fixed. When in use, these ropes' strengths will be reduced if one end is free to rotate.

Actual operating loads should never exceed the recommended design factor or 20% of catalog Breaking Strength.

Note: Rotation resistant ropes shown on this page have been produced by domestic manufacturers other than American Wire Rope Company.

DYPAC 18 - BRIGHT, EEIPS, ROTATION RESISTANT

Diameter in Inches	Approx. Weight per Foot in Pounds	Breaking Strength in Tons*	Price per Foot
1/2**	0.54	14.6	7.36
9/16**	0.686	19.3	8.18
5/8**	0.847	22.7	9.42
3/4	1.22	32.4	13.99
7/8	1.66	43.8	17.82
1	2.17	57.5	22.30

* On DYPAC 18, the minimum breaking force applies only when a test is conducted with both ends fixed. When in use, the minimum breaking force of these ropes may be significantly reduced if one end is free to rotate.

** 5/8" and smaller sizes are made in 18 x 7 construction.

