





SPELTER SOCKETS & ACCESSORIES



CoreLifting.com

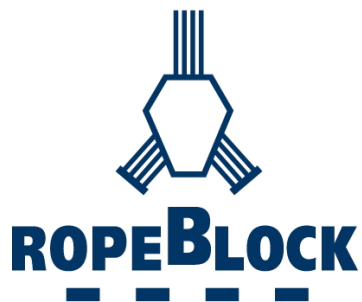

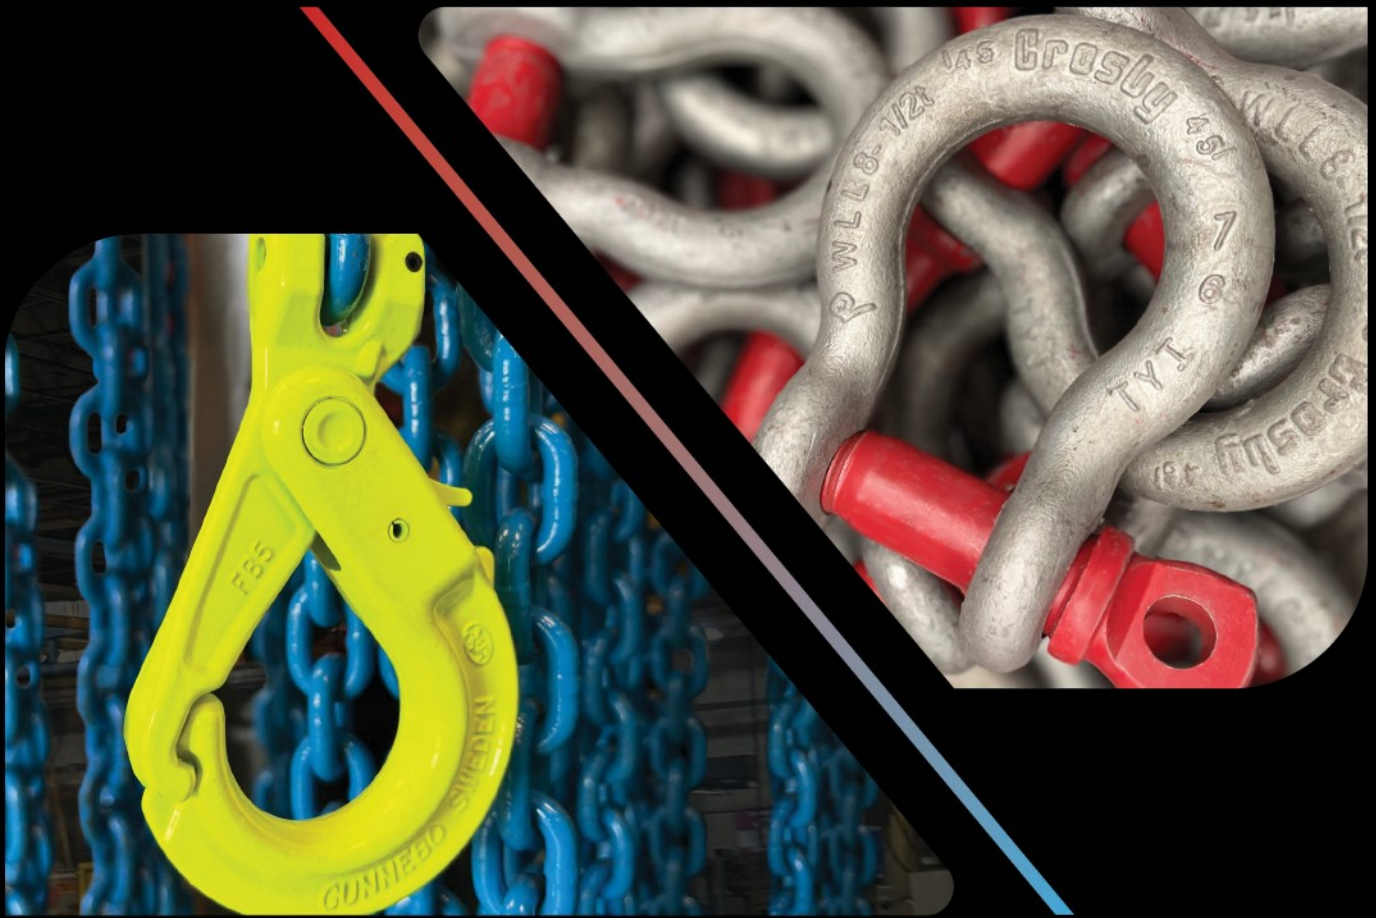

Crosby®



GUNNEBO®
Industries

PRODUCT CATALOG


with application & warning information

Imperial

G-416 / S-416



- Forged steel sockets through 1-1/2", cast alloy steel 1-5/8" through 4".
- Spelter socket terminations have an efficiency rating of 100%, based on the catalog strength of wire rope.
- Ratings are based on recommended use with 6 x 7, 6 x 19 or 6 x 37, IPS or XIP (EIP), XXIP (EEIP), RRL, FC or IWRC wire rope.
- Strand constructed with minimal number of wires (e.g. 1 x 7) requires special consideration that socket basket length be five (5) times the strand diameter or fifty (50) times the wire diameter, whichever is the greater.
- All cast steel sockets 1-5/8" and larger are magnetic particle inspected and ultrasonic inspected. Proof testing available on special order.
- Available with bolt nut and cotter: G-416B.
- Open Grooved Sockets meet the performance requirements of Federal Specification RR-S-550F, Type A, except for those provisions required of the contractor.

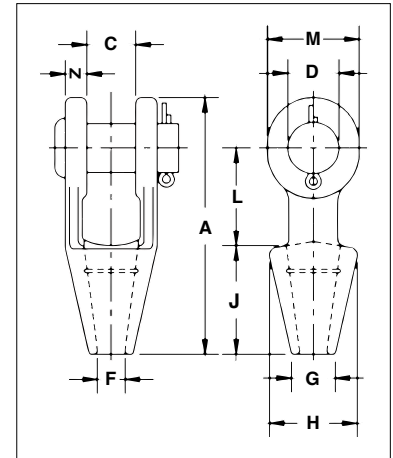

G-416 / S-416 Open Spelter Sockets

Rope Diameter		Structural Strand Dia. (in)	Ultimate Load (t)	Assembly w/Round Pin Stock No.		Assembly w/Bolt/Nut/Cotter Stock No.		Weight Each (lb)	Replacement Round Pin Kit Stock No.		Replacement Bolt/Nut/cotter Kit Stock No.	
(in)	(mm)			G-416 Galv.	S-416 S.C.	G-416B Galv.	S-416B S.C.		G-4080	S-4080	G-4082	
5/16-3/8	8-10	—	12	1039637	1039646	1044818	1042009	1.30	1085723	1083142	2038971	
7/16-1/2	11-13	—	20	1039655	1039664	1044827	1042018	2.25	1085724	1083160	2038972	
9/16-5/8	14-16	1/2	27	1039673	1039682	1044836	1042027	3.60	1085725	1083188	2038975	
3/4	18	9/16-5/8	43	1039691	1039708	1044845	1042036	5.83	1085726	1083204	2038976	
7/8	20-22	11/16-3/4	55	1039717	1039726	1044854	1042045	9.65	1085727	1083222	2039086	
1	24-26	13/16-7/8	78	1039735	1039744	1044863	1042054	15.50	1085728	1083240	2038980	
1-1/8	28-30	15/16-1	92	1039753	1039762	1044872	1042063	21.50	1085729	1083268	2038982	
1-1/4 - 1-3/8	32-35	1-1/16 - 1-1/8	136	1039771	1039780	1044881	1042065	31.00	1085730	1083286	2038984	
1-1/2	38	1-3/16 - 1-1/4	170	1039799	1039806	1044890	1042074	47.25	1085731	1083302	2038987	
* 1-5/8	* 40-42	1-5/16 - 1-3/8	188	1039815	1039824	1044906	1042083	55.00	1085756	1085765	2039087	
* 1-3/4 - 1-7/8	* 44-48	1-7/16 - 1-5/8	268	1039833	1039842	1044915	1042092	82.00	1085774	1085783	2038989	
* 2 - 2-1/8	* 50-54	1-11/16 - 1-3/4	291	1039851	1039860	1044924	1042101	129.00	1085792	1085809	2038990	
* 2-1/4 - 2-3/8	* 56-60	1-13/16 - 1-7/8	360	1039879	1039888	1044933	1042110	167.00	1085818	1085827	2038992	
* 2-1/2 - 2-5/8	* 64-67	1-15/16 - 2-1/8	424	1041633	1041642	1044942	1042120	252.00	1085736	1085845	2038993	
* 2-3/4 - 2-7/8	* 70-73	2-3/16 - 2-7/16	511	1041651	1041660	1044951	1042129	315.00	1085854	1085863	2038994	
* 3 - 3-1/8	* 75-80	2-1/2 - 2-5/8	563	1041679	1041688	1044960	1042138	380.00	1085872	1085881	2038995	
* 3-1/4 - 3-3/8	* 82-86	2-3/4 - 2-7/8	722	1041697	1041704	1044969	1042147	434.00	1085890	1085907	2038996	
* 3-1/2 - 3-5/8	* 88-92	3 - 3-1/8	779	1041713	1041722	1044978	1042156	563.00	1085916	1085925	2038997	
* 3-3/4 - 4	* 94-102	—	875	1041731	1041740	1044997	1042165	783.00	1085934	1085943	2038998	


Rope Diameter		Stock No.	Dimensions (in)										
(in)	(mm)		A	C	Tolerance C ±	D	F	G	H	J	L	M	N
5/16-3/8	8-10	1039637	4.84	.81	.06	.81	.50	.81	1.69	2.25	1.75	1.50	.44
7/16-1/2	11-13	1039655	5.56	1.00	.06	1.00	.56	.94	1.88	2.50	2.00	1.88	.50
9/16-5/8	14-16	1039673	6.75	1.25	.06	1.19	.69	1.13	2.25	3.00	2.50	2.25	.64
3/4	18	1039691	7.94	1.50	.06	1.38	.81	1.25	2.62	3.50	3.00	2.62	.62
7/8	20-22	1039717	9.25	1.75	.06	1.63	.94	1.50	3.25	4.00	3.50	3.13	.80
1	24-26	1039735	10.56	2.00	.06	2.00	1.13	1.75	3.75	4.50	4.00	3.75	.88
1-1/8	28-30	1039753	11.81	2.25	.12	2.25	1.25	2.00	4.12	5.00	4.62	4.12	1.00
1-1/4 - 1-3/8	32-35	1039771	13.19	2.50	.12	2.50	1.50	2.25	4.75	5.50	5.00	4.75	1.13
1-1/2	38	1039799	15.12	3.00	.12	2.75	1.63	2.75	5.25	6.00	6.00	5.38	1.19
* 1-5/8	* 40-42	1039815	16.25	3.00	.12	3.00	1.75	3.00	5.50	6.50	6.50	5.75	1.31
* 1-3/4 - 1-7/8	* 44-48	1039833	18.25	3.50	.12	3.50	2.00	3.13	6.38	7.50	7.00	6.50	1.56
* 2 - 2-1/8	* 50-54	1039851	21.50	4.00	.12	3.75	2.25	3.75	7.38	8.50	9.00	7.00	1.81
* 2-1/4 - 2-3/8	* 56-60	1039879	23.50	4.50	.12	4.25	2.50	4.00	8.25	9.00	10.00	7.75	2.13
* 2-1/2 - 2-5/8	* 64-67	1041633	25.50	5.00	.12	4.75	2.88	4.50	9.25	9.75	10.75	8.50	2.38
* 2-3/4 - 2-7/8	* 70-73	1041651	27.25	5.25	.25	5.00	3.12	4.88	10.50	11.00	11.00	9.00	2.88
* 3 - 3-1/8	* 75-80	1041679	29.00	5.75	.25	5.25	3.38	5.25	11.12	12.00	11.25	9.50	3.00
* 3-1/4 - 3-3/8	* 82-86	1041697	30.88	6.25	.25	5.50	3.62	5.75	11.88	13.00	11.75	10.00	3.12
* 3-1/2 - 3-5/8	* 88-92	1041713	33.25	6.75	.25	6.00	3.88	6.50	12.38	14.00	12.50	10.75	3.25
* 3-3/4 - 4	* 94-102	1041731	36.25	7.50	.25	7.00	4.25	7.25	13.62	15.00	13.50	12.50	3.50

*Cast alloy steel.

G-417 / S-417



- Forged steel sockets through 1-1/2", cast alloy steel 1-5/8" through 4".
- Spelter socket terminations have an efficiency rating of 100%, based on the catalog strength of wire rope.
- Ratings are based on recommended use with 6 x 7, 6 x 19, or 6 x 37, IPS or XIP (EIP), XXIP (EEIP), RRL, FC, or IWRC wire rope.
- Strand constructed with minimal number of wires (e.g. 1 x 7) requires special consideration that socket basket length be five (5) times the strand diameter or fifty (50) times the wire diameter, whichever is the greater.
- All cast steel sockets 1-5/8" and larger are magnetic particle inspected and ultrasonic inspected. Proof testing available on special order.
- Closed Grooved Sockets meet the performance requirements of Federal Specification RR-S-550F, Type B, except for those provisions required of the contractor.

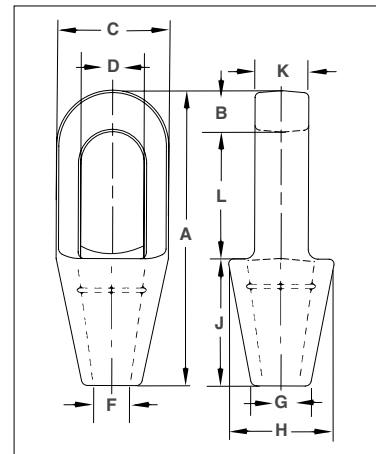

G-417 / S-417 Closed Spelter Sockets

Rope Dia.		Structural Strand Dia. (in)	Ultimate Load (t)	Stock No.		Weight Each (lb)	Dimensions (in)									
(in)	(mm)			G-417 Galv.	S-417 S.C.		A	B	C	D*	F	G	H	J	K	L
5/16 - 3/8	8-10	—	12.0	1039913	1039922	.75	4.94	.62	1.69	.97	.50	.81	1.69	2.25	.69	2.06
7/16 - 1/2	11-13	—	20.0	1039931	1039940	1.50	5.50	.69	2.00	1.16	.56	.94	2.00	2.50	.88	2.31
9/16 - 5/8	14-16	1/2	30.8	1039959	1039968	2.50	6.31	.81	2.63	1.41	.69	1.12	2.38	3.00	1.00	2.50
3/4	18	9/16 - 5/8	43.5	1039977	1039986	4.25	7.62	1.06	3.00	1.66	.88	1.25	2.75	3.50	1.25	3.06
7/8	20-22	11/16 - 3/4	65.3	1039995	1040000	7.25	8.75	1.25	3.63	1.94	1.00	1.50	3.25	4.00	1.50	3.50
1	24-26	13/16 - 7/8	81.6	1040019	1040028	10.50	9.91	1.41	4.13	2.30	1.13	1.75	3.75	4.50	1.75	4.00
1-1/8	28-30	15/16 - 1	100	1040037	1040046	14.25	11.00	1.50	4.50	2.56	1.25	2.00	4.13	5.00	2.00	4.50
1-1/4 - 1-3/8	32-35	1-1/16 - 1-1/8	136	1040055	1040064	19.75	12.12	1.63	5.00	2.81	1.50	2.25	4.75	5.50	2.25	5.00
1-1/2	38	1-3/16 - 1-1/4	170	1040073	1040082	29.20	13.94	1.94	5.38	3.19	1.63	2.75	5.25	6.00	2.50	6.00
† 1-5/8	† 40-42	1-5/16 - 1-3/8	188	1040091	1040108	36.00	15.13	2.13	5.75	3.25	1.75	3.00	5.50	6.50	2.75	6.50
† 1-3/4 - 1-7/8	† 44-48	1-7/16 - 1-5/8	268	1040117	1040126	57.25	17.25	2.19	6.75	3.75	2.00	3.13	6.38	7.50	3.00	7.56
† 2 - 2-1/8	† 50-54	1-11/16 - 1-3/4	309	1040135	1040144	79.00	19.87	2.44	7.63	4.38	2.25	3.75	7.38	8.50	3.25	8.81
† 2-1/4 - 2-3/8	† 56-60	1-13/16 - 1-7/8	360	1040153	1040162	105.00	21.50	2.75	8.50	5.00	2.63	4.13	8.25	9.00	3.63	9.75
† 2-1/2 - 2-5/8	† 64-67	1-15/16 - 2-1/8	424	1041759	1041768	140.00	23.50	3.12	9.50	5.50	2.88	4.50	9.25	9.75	4.00	10.62
† 2-3/4 - 2-7/8	† 70-73	2-3/16 - 2-7/16	549	1041777	1041786	220.00	25.38	3.12	10.75	6.25	3.12	4.88	10.19	11.00	4.88	11.25
† 3 - 3-1/8	† 75-80	2-1/2 - 2-5/8	656	1041795	1041802	276.00	27.12	3.37	11.50	6.75	3.38	5.25	11.50	12.00	5.25	11.75
† 3-1/4 - 3-3/8	† 82-86	2-3/4 - 2-7/8	750	1041811	1041820	313.00	29.25	4.00	12.25	7.25	3.62	5.75	12.25	13.00	5.75	12.25
† 3-1/2 - 3-5/8	† 88-92	3 - 3-1/8	820	1041839	1041848	400.00	31.00	4.00	13.00	7.75	3.88	6.31	13.00	14.00	6.25	13.00
† 3-3/4 - 4	† 94 - 102	—	1005	1041857	1041866	542.00	33.25	4.25	14.25	8.50	4.25	7.25	14.25	15.00	7.00	14.00

* Diameter of pin must not exceed pin used on companion 416 socket. Reference adjacent page "D" dimension. † Cast alloy steel.

RESIN FOR SPELTER SOCKETS

Note: For use on 416, 417, 427 and 517 spelter sockets only.



WIRELOCK®
Socketing Compound

- 100% termination efficiency.
- Temperature operating range is -65° F to +240° F (-54°C to +116°C).
- Ideal for on-site applications.
- No hazardous molten metal.
- Improved fatigue life.
- Pouring temperature without booster pack is 48° F to 110° F (6.67°C to 43.3°C).
- One booster pack if pouring temperature is 35° F to 48° F (1.67°C to 8.89°C).
- Two booster packs if pouring temperature is 27° F to 35° F (-2.78°C to +1.67°C).
- Refer to Crosby® Wire Rope End Terminations Manual for more information.
- Storage temperature is 68° F (20°C) max. Store in well ventilated area away from sunlight and sources of ignition.



7

APPROVALS:

Lloyds Register of Shipping

Det Norske Veritas (DNV)

United States Coast Guard

Registro Italiano Navale

Germanischer Lloyd

United States Navy

American Bureau of Shipping

ISO 17.558

DNV-OS-E304



U.S. Department of Transportation
United States Coast Guard



NATO Numbers:

100cc	8030-21-902-1823
250cc	8030-21-902-1824
500cc	8030-21-902-1825
1000cc	8030-21-902-1826

Witnessed and tested by American Bureau of Shipping. (ABS)

Approximate U.S. Measurements:
250cc's Kit 1 Cup

WIRELOCK® W416-7 Socket Compound

W416-7 Kits				Booster Pak Stock No.
Kit Size	Kit Per Case	Stock No.	Weight Each (lb)	
100	20	1039602	.62	1039603
250	12	1039604	1.25	1039605
500	12	1039606	2.54	1039607
1000	12	1039608	4.59	1039609
2000	6	1039610	9.00	1039611

Guide to amount WIRELOCK® Required

Wire Rope Size		WIRELOCK Required (cc)	Wire Rope Size		WIRELOCK Required (cc)
(in)	(mm)		(in)	(mm)	
1/4	6-7	9	1-3/4	44	700
5/16	8	17	1-7/8	48	700
3/8	9-10	17	2	51	1265
7/16	11	35	2-1/8	54	1265
1/2	13	35	2-1/4	56	1410
9/16	14	52	2-3/8	60	1410
5/8	16	52	2-1/2	64	1830
3/4	20	86	2-5/8	67	1830
7/8	22	125	2-3/4	70	2250
1	26	160	3	76	3160
1-1/8	28	210	3-1/4	82	3795
1-1/4	32	350	3-1/2	88	4920
1-3/8	36	350	3-3/4	94	5980
1-1/2	40	420	4	102	7730
1-5/8	42	495	—	—	—

Wirelock is a hazardous material regulated by US DOT, ICAO/IATA and IMO for transportation.

APPLICATION AND WARNING INFORMATION
SECTION 17

GREEN PIN[®]

PRODUCT CATALOGUE

IMPERIAL





LIFTING SLING FITTINGS FOR WIRE ROPE

SOCKETS



Applications

Sockets are used as a connection to attach steel wire rope to a fixed point. This may be an anchoring system for tubes or pipes, anchor wires for dredging materials, anchor cables for oil platforms, fastening points for towing cables or for fastening cables in constructions such as bridges, roofs etc. Sockets are designed for in-line use only.

Sockets are the strongest steel wire rope end fittings available.

If they are assembled in the proper way they meet or exceed the breaking strength of the steel wire rope.

Design

Green Pin® open- and closed spelter sockets and Green Pin® open wedge sockets are made from cast high tensile steel.

These sockets are generally marked with:

- manufacturer's symbol - e.g. GP
- wire rope diameter in mm and inches - e.g. 20-22 and 7/8"
- traceability code - e.g. A01
- socket number - e.g. 104

Swage sockets are drop forged from special bar quality carbon steel C-1035 and spheroidized annealed to make them suitable for cold swaging.

Socket Lock Socketing Resin

To offer a complete assortment, Green Pin®'s parent company, Royal Van Beest, is the distributor of Socket Lock Socketing Resin. Socket Lock Socketing Resin is designed for speltering wire rope. Socket Lock is developed with a unique formula that uses polyester fibres to thicken the resin and provide a homogenous (consistent) resin cone throughout. Unlike traditional products, which use large grain silica to thicken the resin, the fibres of the innovative Socket Lock Socketing Resin will suspend within the mixed resin and provide a consistent resin cone from top to bottom. The consistency of the resin cone prevents the formation of surface cracking once the resin is hardened. The formula is developed to ensure the resin flows easily and can optimally penetrate the bottom of the socket. This will result in an excellent resin cone, providing the end user with a high-quality socket termination. Socket Lock Socketing Resin kits are now available from stock at Green Pin® and can be ordered in kit sizes of 250, 500, 1000 and 2000 cc.

Additionally, Green Pin® also has the Socket Lock Socketing Booster Pack available. The booster packs are used for cold temperature socketing and are required when ambient temperatures are below +60 °F (+16 °C). For instructions for use, please consult the Green Pin® website: www.greenpin.com/socketlock.

Instructions for use

1) Open spelter sockets – closed spelter sockets

In the past melted zinc was poured into the sockets to fix the steel wire rope; nowadays resins are used for this purpose.

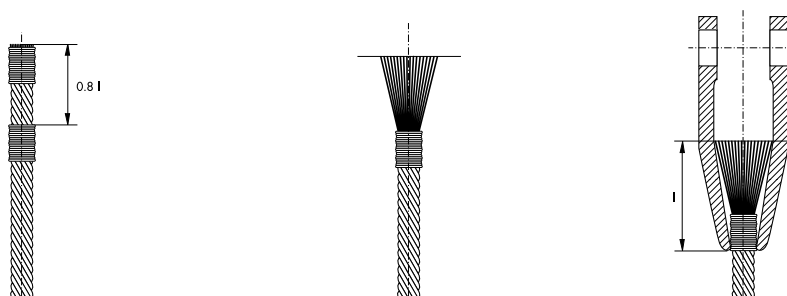


Figure 1

- brooming is done after the wire rope has been placed into the socket;
- when using resins always exactly follow the instructions given by the manufacturer carefully;
- socketing must be done by specialists in a certified sling shop.

2) Open wedge sockets

The wedge and body act as a vice which grips the wire rope and locks it in place. Green Pin® wedge sockets may be used within the range of wire rope diameters as shown in the table further on in the catalogue.

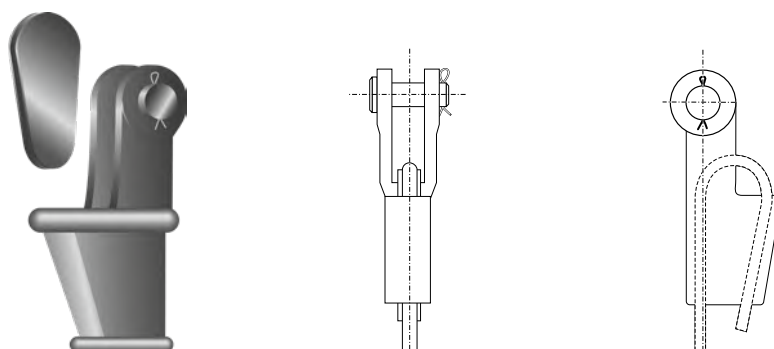




Figure 2

When using open wedge sockets the following precautions should be taken:

- before use always inspect the socket, the wedge and the pin;
- use only with standard 6-8 strand wire rope;
- in case of use with non-rotating wire rope there is a risk of core slippage or loss of rope lay. Instruction from the wire rope manufacturer must be followed to prevent this by; for example welding, brazing or seizing the dead end before introduction in the socket. The minimum tail length is 20 times the wire rope diameter. Furthermore, the wire rope construction must be checked for suitability of bending around the radius of the wedge. Additional measures might be necessary to prevent distortion;
- always be sure that socket and wedge have the correct size for the wire rope diameter;
- the loaded part of the steel wire rope should be mounted in the centre line of the pin;
- when installing the wire rope, always pre-load the wedge with the wire rope in place;
- never weld the tail; the tail should have a length of at least 6 times the wire rope diameter with a minimum of $5 \frac{29}{32}$ inch. Secure the dead end of the rope with a wire rope clip as shown in figure 3;
- before applying the first load always use a hammer to seat the wedge and rope into the socket as deep as possible;
- check the assembly regularly; re-tighten or re-position if necessary;
- never side load a wedge socket as it has not been designed for that purpose;
- load may slip if the connection is not properly installed;
- the efficiency of a wire rope - wedge socket connection is 80 % of the minimum breaking load of the wire, but is limited to the minimum breaking load of the socket;
- only use the original wedge supplied by the manufacturer of the socket and be sure it is suitable for the diameter of the rope used;
- never use a wedge from any other supplier than the original socket supplier as the dimensions will not match.



G-6411



Green Pin® Closed Spelter Socket

- **Material:** high tensile steel, quenched and tempered
- **Finish:** hot dipped galvanized
- **Temperature range:** -4 °F up to +392 °F
- **Certification:** 2.1 2.2 3.1 CE IIA
- **Article code:** scan QR code to see article codes

Scan for additional product details



number	minimum breaking load	diameter wire rope	length	width	width inside bow	length inside bow	thickness bow	thickness bow	opening	weight each
	metric t	inch	a inch	b inch	c inch	d inch	e inch	f inch	g inch	lbs
296	8	1/4	3 31/32	1 15/32	7/8	1 9/16	7/16	1/2	11/32	0.6
297	12	3/8	4 11/16	1 11/16	31/32	1 7/8	9/16	11/16	15/32	0.95
298	20	7/16 - 1/2	5 1/2	2 1/16	1 3/16	2 9/32	23/32	15/16	19/32	1.68
299	25	9/16 - 5/8	6 3/8	2 11/16	1 15/32	2 19/32	13/16	1 1/32	11/16	3.35
200	45	3/4	7 5/8	3	1 21/32	3 1/16	1 1/16	1 1/4	27/32	5.09
201	70	7/8	8 13/16	3 5/8	1 27/32	3 17/32	1 5/16	1 1/2	15/16	9.5
204	85	1	9 31/32	4 3/32	2 1/4	4 1/16	1 13/32	1 23/32	1 3/32	13.29
207	105	1 1/8	11 3/32	4 1/2	2 15/32	4 9/16	1 17/32	2	1 1/4	17.61
212	136	1 1/4 - 1 3/8	12 9/32	5	2 3/4	5 1/8	1 11/16	2 1/4	1 1/2	24
215	150	1 1/2	14 3/32	5 11/32	3 1/8	6 3/32	2	2 15/32	1 5/8	30.4
217	170	1 5/8	15 11/32	5 3/4	3 9/32	6 23/32	2 1/8	2 3/4	1 23/32	38.4
219	225	1 3/4 - 1 7/8	17 7/16	6 23/32	3 21/32	7 25/32	2 5/32	3	2	59
222	280	2 - 2 1/8	19 3/4	7 19/32	3 15/16	8 13/16	2 7/16	3 7/32	2 1/4	86
224	360	2 1/4 - 2 3/8	21 9/16	8 1/2	4 13/32	9 23/32	2 7/8	3 5/8	2 15/32	121
226	425	2 1/2 - 2 5/8	23 1/2	9 1/2	5 1/2	10 5/8	3 1/8	4 1/32	2 7/8	156
227	460	2 3/4 - 2 7/8	25 11/32	10 3/4	6 1/4	11 1/4	3 1/8	4 7/8	3 1/8	225
228	560	3 - 3 1/8	27	11 1/2	6 23/32	11 23/32	3 9/32	5 1/4	3 3/8	271
229	625	3 1/4 - 3 3/8	29 1/4	12 1/4	7 1/4	12 1/4	4 1/32	5 3/4	3 5/8	335
230	720	3 1/2 - 3 5/8	31 1/32	13	7 3/4	13	4 1/32	6 1/4	3 29/32	392
231	875	3 3/4 - 4	33 9/32	14 1/4	8 1/2	14 1/32	4 1/4	7	4 1/4	514
233	1200	4 1/4 - 4 1/2	39 3/8	15 15/16	9 1/4	16 23/32	4 29/32	7 15/32	4 29/32	725
240	1300	4 3/4 - 5	45 9/32	17 23/32	10 1/4	20 21/32	4 29/32	7 7/8	5 5/8	999

CAD

Socket Lock Socketing Resin




It is advised to use the Socket Lock Socketing Resin in combination with the Green Pin® Spelter Sockets. Go to www.greenpin.com/socketlock for more information about the Socket Lock Socketing Resin. To offer a complete assortment, Green Pin®'s parent company, Royal Van Beest, is the official distributor of Socket Lock Socketing Resin. Green Pin® can supply the Socket Lock resin kit sizes 250, 500, 1000 and 2000 cc from stock.





Green Pin® Open Spelter Socket CP

Open spelter socket with cotter pin

Scan for
additional
product
details

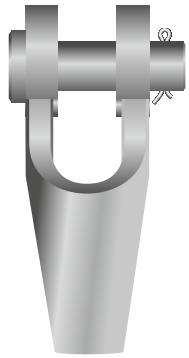

G-6412

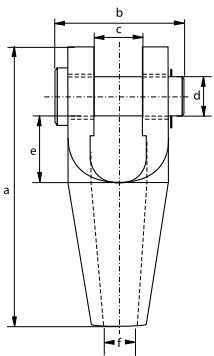

- **Material:** high tensile steel, quenched and tempered
- **Finish:** hot dipped galvanized
- **Temperature range:** -4 °F up to +392 °F
- **Certification:** 2.1 2.2 3.1 CE IIA
- **Article code:** scan QR code to see article codes


number	minimum breaking load	diameter wire rope	length	width	width inside	diameter pin	length inside	opening	weight pin	weight each
	metric t	inch	a inch	b inch	c inch	d inch	e inch	f inch	lbs	lbs
196	8	1/4	4 9/32	2	3/4	5/8	1 5/16	11/32	1.98	1.04
197	12	3/8	4 7/8	2 7/16	13/16	13/16	1 11/32	15/32	0.37	1.57
198	20	7/16 - 1/2	5 5/8	2 19/32	1 1/32	31/32	1 15/32	19/32	0.57	2.29
199	25	9/16 - 5/8	6 25/32	3 7/32	1 5/16	1 3/16	1 15/16	23/32	1.04	4.03
100	45	3/4	8 1/16	3 3/4	1 1/2	1 3/8	2 9/32	13/16	1.63	6.81
104	60	7/8	9 1/4	4 11/32	1 23/32	1 5/8	2 11/16	15/16	2.62	10.32
108	85	1	10 13/16	5 1/8	2	2	2 15/16	1 3/32	4.74	18.41
111	105	1 1/8	12 1/16	5 21/32	2 1/4	2 1/4	3 11/32	1 1/2	6.50	25.1
115	136	1 1/4 - 1 3/8	13 5/16	6 3/32	2 15/32	2 17/32	3 3/4	1 1/2	8.86	34.2
118	150	1 1/2	15 1/2	7	3	2 3/4	5	1 5/8	12.21	51
120	170	1 5/8	16 15/32	7 3/8	3	3	5	1 23/32	15.19	60
125	225	1 3/4 - 1 7/8	18 7/16	8 3/8	3 1/2	3 1/2	5 1/4	2	23.37	93
128	280	2 - 2 1/8	21 23/32	9 7/16	3 31/32	3 3/4	7 3/32	2 1/4	30.20	141
130	360	2 1/4 - 2 3/8	23 17/32	10 5/8	4 7/16	4 1/4	7 23/32	2 15/32	43.87	201
132	425	2 1/2 - 2 5/8	25 3/4	11 15/16	5	4 3/4	8 11/32	2 7/8	62	280
135	460	2 3/4 - 2 7/8	27 13/32	13 3/4	5 1/4	5	8 15/32	3 1/8	78	362
138	560	3 - 3 1/8	29 1/32	14 19/32	5 3/4	5 1/4	8 5/8	3 3/8	91	439
140	625	3 1/4 - 3 3/8	31 1/32	15 13/32	6 1/4	5 1/2	8 31/32	3 5/8	107	518
142	720	3 1/2 - 3 5/8	33 17/32	16 3/16	6 23/32	5 31/32	9 17/32	3 29/32	132	648
144	875	3 3/4 - 4	35 31/32	17 19/32	7 17/32	7	10	4 1/4	196	866
146	1200	4 1/4 - 4 1/2	45 21/32	19 1/4	8 1/8	7 19/32	14 1/2	4 29/32	251	1415

CAD



Socket Lock Socketing Resin



It is advised to use the Socket Lock Socketing Resin in combination with the Green Pin® Spelter Sockets. Go to www.greenpin.com/socketlock for more information about the Socket Lock Socketing Resin. To offer a complete assortment, Green Pin®'s parent company, Royal Van Beest, is the official distributor of Socket Lock Socketing Resin. Green Pin® can supply the Socket Lock resin kit sizes 250, 500, 1000 and 2000 cc from stock.

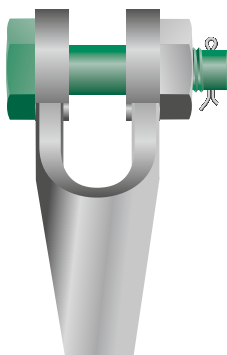

G-6422

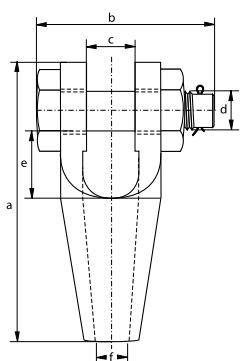

Green Pin® Open Spelter Socket BN

Open spelter socket with safety bolt

- **Material:** high tensile steel, quenched and tempered
- **Finish:** hot dipped galvanized
- **Temperature range:** -4 °F up to +392 °F
- **Certification:** 2.1 2.2 3.1 CE IIA
- **Article code:** scan QR code to see article codes

Scan for additional product details



number	minimum breaking load	diameter wire rope	length	width	width inside	diameter pin	length inside	opening	weight pin	weight each
	metric t	inch	a inch	b inch	c inch	d inch	e inch	f inch	lbs	lbs
196	8	1/4	4 9/32	2 23/32	3/4	5/8	1 5/16	11/32	0.33	1.17
197	12	3/8	4 7/8	3 9/32	13/16	25/32	1 3/8	15/32	0.71	1.9
198	20	7/16 - 1/2	5 5/8	3 31/32	1 1/32	31/32	1 15/32	19/32	1.34	3.09
199	25	9/16 - 5/8	6 25/32	4 7/8	1 5/16	1 3/16	1 15/16	23/32	2.38	5.36
100	45	3/4	8 1/16	5 7/16	1 1/2	1 3/8	2 9/32	13/16	3.51	8.66
104	60	7/8	9 1/4	5 13/16	1 23/32	1 5/8	2 11/16	15/16	5.07	12.65
108	85	1	10 13/16	6 15/16	2	1 31/32	3	1 3/32	8.95	22.7
111	105	1 1/8	12 1/16	7 19/32	2 1/4	2 1/4	3 11/32	1 1/4	12.15	30.9
115	136	1 1/4 - 1 3/8	13 5/16	8 9/32	2 15/32	2 15/32	3 3/4	1 1/2	16.40	41.7
118	150	1 1/2	15 1/2	9 1/16	3	2 3/4	5	1 5/8	20.72	60
120	170	1 5/8	16 15/32	9 19/32	3	3 1/32	4 31/32	1 23/32	26.68	72

CAD



Socket Lock Socketing Resin



It is advised to use the Socket Lock Socketing Resin in combination with the Green Pin® Spelter Sockets. Go to www.greenpin.com/socketlock for more information about the Socket Lock Socketing Resin. To offer a complete assortment, Green Pin®'s parent company, Royal Van Beest, is the official distributor of Socket Lock Socketing Resin. Green Pin® can supply the Socket Lock resin kit sizes 250, 500, 1000 and 2000 cc from stock.

ROPEBLOCK

CATALOG

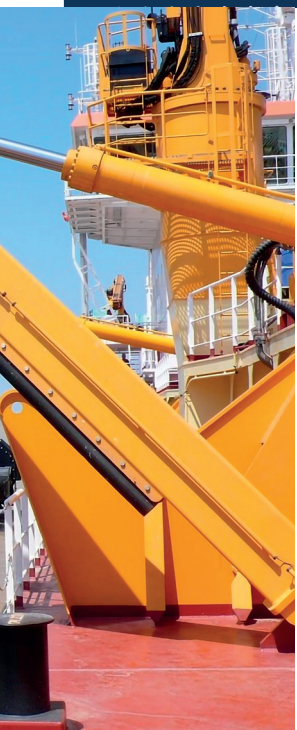

SOCKETS OVERVIEW



**OPEN SPELTER
SOCKETS**

Quenched and tempered cast steel range with mechanical values (Charpy-V > 42 Joule / -20°C) for tough and low temperature use. For wire rope diameter 6 - 204 mm (1/4" - 8"). Pin secured by cotter pin or bolt, nut and cotter. Optional is a flange connection for use with a bend stiffener. All spelter sockets have a 100% efficiency on wire rope MBL.

PAGES 88 - 89



**CLOSED SPELTER
SOCKETS**

Quenched and tempered cast steel range with mechanical values (Charpy-V > 42 Joule / -20°C) for tough and low temperature use. For wire rope diameter 6 - 204 mm (1/4" - 8"). All spelter sockets have a 100% efficiency on wire rope MBL.

PAGE 90



**SHORT BOW
SOCKETS**

The 'ultimate' socket for dynamic loads. Towing lines, anchor lines and chain-rope connections used by major offshore contractors. Quenched and tempered cast steel with extremely high mechanical values for an unmatched weight to MBL ratio. All spelter sockets have a 100% efficiency on wire rope MBL.

PAGE 91



**FAST CONNECTOR
SOCKETS**

Specifically designed for mobile and crawler cranes as an alternative to wedge sockets, but with the benefit of 100% efficiency on the wire rope MBL. This socket meets the respective EN standards.

PAGES 92 - 93



**SUPER REEVE
CONNECTOR SOCKETS**


A revolutionary evolution of the Fast Connector Socket. This socket line has the smallest connector diameter available in the market today, and still meets the respective EN standards. It has been designed to go through the smallest spaces in a crane reeving system. This unique patented design allows refitting by pouring in the field, saving valuable down time compared to swaging techniques.

PAGES 94 - 95



OPEN SPELTER SOCKETS WITH PIN

QUENCHED AND
TEMPERED CAST STEEL

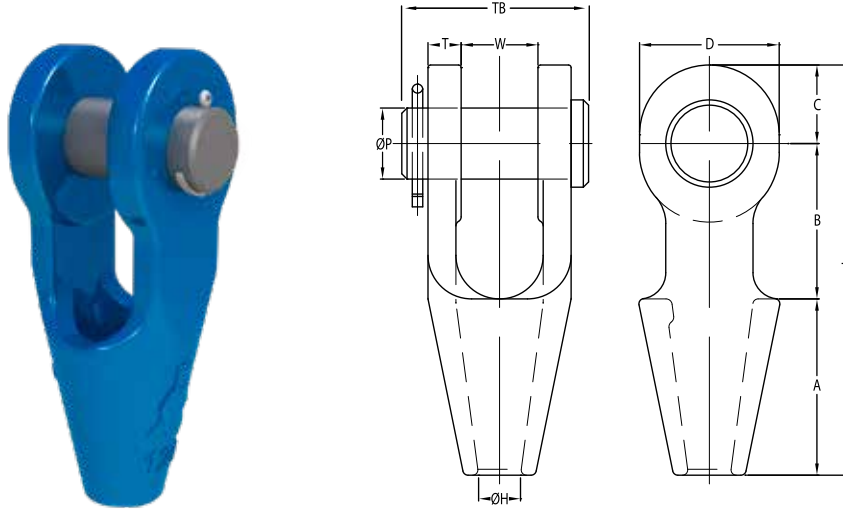

Model No.	MBL (USTons)	for wire ø		Strand ø		Dimensions (inch)										Weight (lbs)
		(mm)	(inch)	(mm)	(inch)	A	B	C	D	øH	øP	T	TL	TB	W	
OSS 196 P	9	6-7	¼	-	-	1.97	1.57	0.75	1.34	0.36	0.63	0.35	4.29	2.01	0.75	0.9
OSS 197 P	13	8-10	⅜	-	-	2.24	1.77	0.87	1.65	0.49	0.79	0.43	4.88	2.48	0.83	1.5
OSS 198 P	22	11-13	7/16 - ½	-	-	2.50	2.01	1.06	1.97	0.57	0.98	0.46	5.57	2.64	1.00	2.2
OSS 199 P	28	14-16	9/16 - 5/8	13	½	2.99	2.48	1.26	2.28	0.71	1.18	0.55	6.73	3.35	1.26	4.0
OSS 100 P	44	18-19	¾	14 - 16	9/16 - 5/8	3.50	2.99	1.57	2.76	0.86	1.38	0.63	8.07	3.74	1.50	7
OSS 104 P	61	20-22	7/8	18 - 19	¾	3.98	3.50	1.77	3.15	0.98	1.61	0.75	9.25	4.33	1.73	10
OSS 108 P	83	23-26	1	20 - 22	7/8	4.49	3.98	2.36	4.09	1.13	2.01	0.87	10.83	5.04	2.01	18
OSS 111 P	99	27-30	1 1/8	23 - 26	1	5.00	4.49	2.56	4.49	1.29	2.24	0.98	12.05	5.59	2.24	24
OSS 115 P	138	31-36	1 1/4 - 1 3/8	27 - 28	1 1/16 - 1 1/8	5.47	5.00	2.83	4.96	1.54	2.48	1.10	13.31	6.10	2.48	34
OSS 118 P	165	37-39	1 1/2	30 - 32	1 3/16 - 1 1/4	5.98	6.38	3.15	5.59	1.67	2.76	1.18	15.51	6.97	2.99	48
OSS 120 P	187	40-42	1 5/8	33 - 35	1 5/16 - 1 3/8	6.50	6.50	3.46	6.14	1.79	2.99	1.30	16.46	7.36	2.99	60
OSS 125 P	248	43-48	1 3/4 - 1 7/8	36 - 40	1 7/16 - 1 5/8	7.52	7.01	3.94	6.93	2.06	3.50	1.54	18.46	8.46	3.50	90
OSS 128 P	309	49-54	2 - 2 1/8	42 - 45	1 5/8 - 1 3/4	8.50	8.98	4.25	7.64	2.32	3.74	1.77	21.73	9.61	3.98	132
OSS 130 P	397	55-60	2 1/4 - 2 3/8	46 - 48	1 13/16 - 1 7/8	9.02	10.00	4.72	8.27	2.54	4.25	2.09	23.74	10.83	4.45	194
OSS 132 P	468	61-68	2 1/2 - 2 5/8	50 - 54	2 - 2 1/8	9.76	10.75	5.24	9.29	2.96	4.76	2.36	25.75	11.81	5.00	261
OSS 135 P	507	69-75	2 3/4 - 2 7/8	56 - 62	2 1/4 - 2 1/2	10.98	10.98	5.43	9.45	3.20	5.00	2.87	27.40	13.19	5.24	342
OSS 138 P	617	76-80	3 - 3 1/8	64 - 67	2 1/2 - 2 5/8	12.01	11.26	5.75	9.92	3.47	5.24	2.99	29.02	13.98	5.75	410
OSS 140 P	689	81-86	3 1/4 - 3 3/8	69 - 76	2 3/4 - 3	12.99	11.73	6.30	11.42	3.63	5.51	3.11	31.02	14.76	6.26	499
OSS 142 P	794	87-93	3 1/2 - 3 5/8	78 - 86	3 1/16 - 3 3/8	14.02	12.52	6.99	12.60	3.91	5.98	3.27	33.52	15.75	6.73	624
OSS 144 P	965	94-102	3 3/4 - 4	88 - 96	3 7/16 - 3 3/4	15.00	13.50	7.48	13.78	4.24	7.01	3.50	35.98	17.13	7.52	825
OSS 146 P	1323	108-115	4 1/4 - 4 1/2	98 - 110	3 7/8 - 4 1/16	17.72	18.90	8.46	15.75	5.09	7.68	3.94	45.08	18.31	8.07	1188
OSS 150 P	1543	120-130	4 3/4 - 5	112 - 124	4 7/16 - 4 7/8	19.69	19.69	9.84	17.72	5.78	8.66	4.33	49.21	20.67	8.86	1678
OSS 155 P	1764	135-140	5 1/4 - 5 1/2	125 - 132	4 15/16 - 5 1/16	21.26	19.57	10.35	18.90	6.06	9.45	5.51	51.18	23.23	9.06	2352
OSS 160 P	2205	142-153	5 3/4 - 6	133 - 143	5 1/4 - 5 5/8	23.03	19.88	10.83	19.69	6.73	10.04	5.51	53.74	24.02	9.84	2584
OSS 165 P	2447	154-165	6 1/4 - 6 1/2	144 - 154	5 11/16 - 6 1/4	24.80	20.87	11.81	21.65	7.28	10.83	5.91	57.48	25.20	10.24	3177
OSS 170 P	2756	166-178	6 3/4 - 7	155 - 166	6 1/4 - 6 3/4	26.77	22.44	12.20	22.44	7.83	11.61	5.91	61.42	25.98	11.02	3560
OSS 175 P	3086	180-191	7 1/4 - 7 1/2	167 - 179	6 9/16 - 7 1/16	28.54	23.62	12.80	23.62	8.39	12.20	6.10	64.96	27.13	11.81	4204
OSS 180 P	3527	192-204	7 3/4 - 8	180 - 191	7 1/4 - 7 1/2	30.51	24.41	13.58	25.20	9.02	12.99	6.30	68.50	28.35	12.60	4936

MBL = Minimum Breaking Load

- The standard finish of our sockets is blue. Hot dipped galvanized is also available.
- Socket range OSS 196 until OSS 100 is delivered with galvanized finish, other finishes are available upon request.
- All sockets are provided with an EN 10204-2.1 declaration of conformity, EN 10204-3.1 material certificate and can be provided with a 2006/42/EC declaration where applicable.
- Dimensional tolerances depend on the manufacturing techniques applied and are different between machined components (pins) and cast components (socket bodies and wedges).
- Also surface finish e.g. hot dip galvanizing or even paint may add to the overall thickness and fork distance.
- Please contact Ropeblock for further guidance and a detailed dimensional tolerance sheet.




SEE OUR WARNING
& SAFETY INFORMATION
ON PAGES 134 - 146



OPEN SPELTER SOCKETS WITH BOLT AND NUT

**QUENCHED AND
TEMPERED CAST STEEL**

SOCKETS

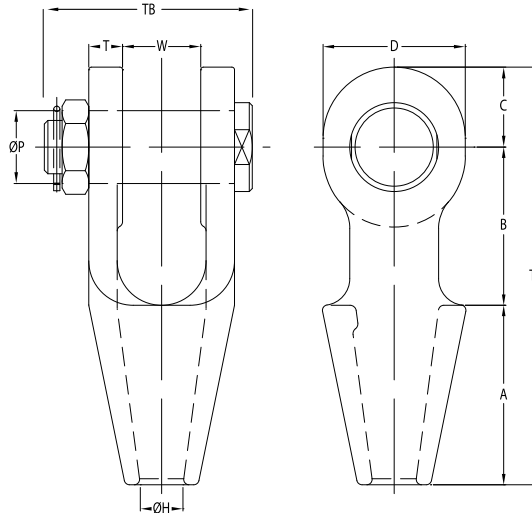

Model No.	MBL (UStons)	for wire ø		Strand ø		Dimensions (inch)										Weight (lbs)
		(mm)	(inch)	(mm)	(inch)	A	B	C	D	øH	øP	T	TL	TB	W	
OSS 196 B	9	6-7	¼	-	-	1.97	1.57	0.75	1.34	0.36	0.63	0.35	4.29	2.44	0.75	1.1
OSS 197 B	13	8-10	⅜	-	-	2.24	1.77	0.87	1.65	0.49	0.79	0.43	4.88	2.95	0.83	1.7
OSS 198 B	22	11-13	7/16 - ½	-	-	2.50	2.01	1.06	1.97	0.57	0.98	0.46	5.57	3.15	1.00	2.4
OSS 199 B	28	14-16	9/16 - 5/8	13	½	2.99	2.48	1.26	2.28	0.71	1.18	0.55	6.73	3.78	1.26	4.2
OSS 100 B	44	18-19	¾	14 - 16	9/16 - 5/8	3.50	2.99	1.57	2.76	0.86	1.38	0.63	8.07	4.21	1.50	7
OSS 104 B	61	20-22	7/8	18 - 19	¾	3.98	3.50	1.77	3.15	0.98	1.61	0.75	9.25	4.84	1.73	10
OSS 108 B	83	23-26	1	20 - 22	7/8	4.49	3.98	2.36	4.09	1.13	2.01	0.87	10.83	5.43	2.01	18
OSS 111 B	99	27-30	1 1/8	23 - 26	1	5.00	4.49	2.56	4.49	1.29	2.24	0.98	12.05	6.30	2.24	26
OSS 115 B	138	31-36	1 1/4 - 1 3/8	27 - 28	1 1/16 - 1 1/8	5.47	5.00	2.83	4.96	1.54	2.48	1.10	13.31	6.50	2.48	35
OSS 118 B	165	37-39	1 1/2	30 - 32	1 3/16 - 1 1/4	5.98	6.38	3.15	5.59	1.67	2.76	1.18	15.51	7.83	2.99	50
OSS 120 B	187	40-42	1 5/8	33 - 35	1 1/2 - 1 5/8	6.50	6.50	3.46	6.14	1.79	2.99	1.30	16.46	8.23	2.99	62
OSS 125 B	248	43-48	1 3/4 - 1 7/8	36 - 40	1 7/16 - 1 5/8	7.52	7.01	3.94	6.93	2.06	3.50	1.54	18.46	9.33	3.50	95
OSS 128 B	309	49-54	2 - 2 1/8	42 - 45	1 5/8 - 1 3/4	8.50	8.98	4.25	7.64	2.32	3.74	1.77	21.73	10.35	3.98	136
OSS 130 B	397	55-60	2 1/4 - 2 3/8	46 - 48	1 13/16 - 1 7/8	9.02	10.00	4.72	8.27	2.54	4.25	2.09	23.74	11.73	4.45	199
OSS 132 B	468	61-68	2 1/2 - 2 5/8	50 - 54	2 - 2 1/8	9.76	10.75	5.24	9.29	2.96	4.76	2.36	25.75	12.99	5.00	270
OSS 135 B	507	69-75	2 3/4 - 2 7/8	56 - 62	2 1/4 - 2 1/2	10.98	10.98	5.43	9.45	3.20	5.00	2.87	27.40	14.13	5.24	350
OSS 138 B	617	76-80	3 - 3 1/8	64 - 67	2 1/2 - 2 5/8	12.01	11.26	5.75	9.92	3.47	5.24	2.99	29.02	14.96	5.75	419
OSS 140 B	689	81-86	3 1/4 - 3 3/8	69 - 76	2 3/4 - 3	12.99	11.73	6.30	11.42	3.63	5.51	3.11	31.02	15.63	6.26	507
OSS 142 B	794	87-93	3 1/2 - 3 5/8	78 - 86	3 1/16 - 3 3/8	14.02	12.52	6.99	12.60	3.91	5.98	3.27	33.52	16.50	6.73	632
OSS 144 B	965	94-102	3 3/4 - 4	88 - 96	3 1/8 - 3 3/4	15.00	13.50	7.48	13.78	4.24	7.01	3.50	35.98	17.76	7.52	831
OSS 146 B	1323	108-115	4 1/4 - 4 1/2	98 - 110	3 7/8 - 4 5/16	17.72	18.90	8.46	15.75	5.09	7.68	3.94	45.08	19.92	8.07	1207
OSS 150 B	1543	120-130	4 3/4 - 5	112 - 124	4 1/16 - 4 7/8	19.69	19.69	9.84	17.72	5.78	8.66	4.33	49.21	21.50	8.86	1688
OSS 155 B	1764	135-140	5 1/4 - 5 1/2	125 - 132	4 15/16 - 5 1/16	21.26	19.57	10.35	18.90	6.06	9.45	5.51	51.18	24.53	9.06	2383
OSS 160 B	2205	142-153	5 3/4 - 6	133 - 143	5 1/4 - 5 5/8	23.03	19.88	10.83	19.69	6.73	10.04	5.51	53.74	25.79	9.84	2646
OSS 165 B	2447	154-165	6 1/4 - 6 1/2	144 - 154	5 11/16 - 6 1/4	24.80	20.87	11.81	21.65	7.28	10.83	5.91	57.48	26.97	10.24	3250
OSS 170 B	2756	166-178	6 3/4 - 7	155 - 166	6 1/4 - 6 3/4	26.77	22.44	12.20	22.44	7.83	11.61	5.91	61.42	28.15	11.02	3649
OSS 175 B	3086	180-191	7 1/4 - 7 1/2	167 - 179	6 9/16 - 7 1/16	28.54	23.62	12.80	23.62	8.39	12.20	6.10	64.96	29.53	11.81	4312
OSS 180 B	3527	192-204	7 3/4 - 8	180 - 191	7 1/4 - 7 1/2	30.51	24.41	13.58	25.20	9.02	12.99	6.30	68.50	31.10	12.60	5077

MBL = Minimum Breaking Load

- The standard finish of our sockets is blue. Hot dipped galvanized is also available.
- Socket range OSS 196 until OSS 100 is delivered with galvanized finish, other finishes are available upon request.
- All sockets are provided with an EN 10204-2.1 declaration of conformity, EN 10204-3.1 material certificate and can be provided with a 2006/42/EC declaration where applicable.
- Dimensional tolerances depend on the manufacturing techniques applied and are different between machined components (pins) and cast components (socket bodies and wedges).
- Also surface finish e.g. hot dip galvanizing or even paint may add to the overall thickness and fork distance.
- Please contact Ropeblock for further guidance and a detailed dimensional tolerance sheet.





**SEE OUR WARNING
& SAFETY INFORMATION
ON PAGES 134 - 146**

SEE OUR WARNING AND SAFETY INFORMATION ON PAGE 134



CLOSED SPELTER SOCKETS

QUENCHED AND
TEMPERED CAST STEEL

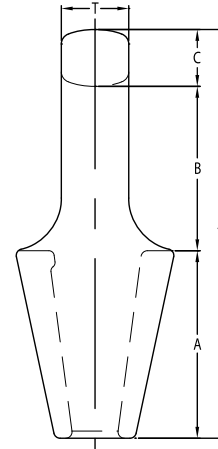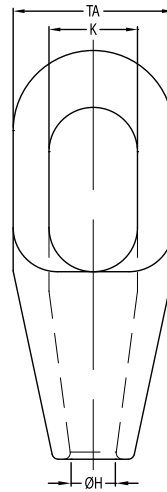

Model No.	MBL (UStons)	for wire ø		Strand ø		Dimensions (inch)								Weight (lbs)
		(mm)	(inch)	(mm)	(inch)	A	B	C	øH	K	T	TA	TL	
CSS 296	9	6-7	¼	-	-	1.97	1.57	0.43	0.36	0.87	0.51	1.46	3.98	1
CSS 297	13	8-10	⅜	-	-	2.24	1.89	0.55	0.50	0.98	0.69	1.69	4.69	1
CSS 298	22	11-13	7/16 - ½	-	-	2.50	2.32	0.69	0.57	1.18	0.89	2.01	5.51	2
CSS 299	28	14-16	9/16 - 5/8	13	½	2.99	2.56	0.83	0.71	1.42	1.02	2.64	6.38	3
CSS 200	44	18-19	¾	14 - 16	⅝ - ⅝	3.50	3.07	1.06	0.86	1.65	1.26	2.99	7.64	5
CSS 201	61	20-22	7/8	18 - 19	¾	3.98	3.54	1.30	0.98	1.85	1.50	3.62	8.82	8
CSS 204	83	23-26	1	20 - 22	7/8	4.49	4.06	1.42	1.13	2.24	1.73	4.09	9.96	12
CSS 207	99	27-30	1⅝	23 - 26	1	5.00	4.57	1.54	1.30	2.56	2.01	4.49	11.10	16
CSS 212	138	31-36	1¼ - 1⅜	27 - 28	1⅝ - 1⅝	5.47	5.12	1.69	1.54	2.80	2.24	4.96	12.28	22
CSS 215	165	37-39	1½	30 - 32	1⅝ - 1¼	5.98	6.10	2.01	1.67	3.19	2.48	5.35	14.09	29
CSS 217	187	40-42	1⅝	33 - 35	1⅝ - 1⅝	6.50	6.73	2.13	1.79	3.27	2.76	5.75	15.35	37
CSS 219	248	43-48	1¾ - 1⅞	36 - 40	1⅝ - 1⅝	7.48	7.80	2.17	2.07	3.66	2.99	6.73	17.44	56
CSS 222	309	49-54	2 - 2⅝	42 - 45	1⅝ - 1¾	8.50	8.82	2.44	2.33	3.94	3.23	7.60	19.76	81
CSS 224	397	55-60	2¼ - 2⅜	46 - 48	1⅝ - 1⅝	8.98	9.72	2.87	2.56	4.41	3.62	8.50	21.57	111
CSS 226	468	61-68	2½ - 2⅝	50 - 54	2 - 2⅝	9.76	10.63	3.11	2.95	5.51	4.02	9.49	23.50	144
CSS 227	507	69-75	2¾ - 2⅞	56 - 62	2¼ - 2½	10.98	11.26	3.11	3.13	6.26	4.88	10.75	25.35	201
CSS 228	617	76-80	3 - 3⅝	64 - 67	2½ - 2⅝	12.40	11.73	3.27	3.47	6.73	5.24	11.50	27.40	257
CSS 229	689	81-86	3¼ - 3⅝	69 - 76	2¾ - 3	12.99	12.24	4.02	3.64	7.24	5.75	12.24	29.25	274
CSS 230	794	87-93	3½ - 3⅝	78 - 86	3⅝ - 3⅝	14.02	12.99	4.02	3.89	7.76	6.26	12.99	31.02	388
CSS 231	965	94-102	3¾ - 4	88 - 96	3⅝ - 3¾	15.00	14.02	4.25	4.24	8.50	7.01	14.25	33.27	502
CSS 233	1323	108-115	4¼ - 4½	98 - 110	3⅝ - 4⅝	17.72	16.73	4.92	5.10	9.25	7.48	15.94	39.37	712
CSS 240	1543	120-130	4¾ - 5	112 - 124	4⅝ - 4⅝	19.69	20.67	4.92	5.79	10.24	7.87	17.72	45.28	986
CSS 245	1764	135-140	5¼ - 5½	125 - 132	4⅝ - 5⅝	21.26	19.49	5.91	6.07	11.42	8.66	20.47	46.65	1422
CSS 250	2205	142-153	5¾ - 6	133 - 143	5¼ - 5⅝	23.03	20.87	6.69	6.74	12.01	9.45	21.46	50.59	1634
CSS 255	2447	154-165	6½ - 6¼	144 - 154	5⅝ - 6¼	24.80	22.24	6.89	7.29	12.99	9.84	22.64	53.94	1896
CSS 260	2756	166-178	6¾ - 7	155 - 166	6¼ - 6¾	26.77	23.23	7.09	7.84	12.99	10.63	23.43	57.09	2172
CSS 265	3086	180-191	7¼ - 7½	167 - 179	6⅝ - 7⅝	28.54	24.41	7.48	8.39	13.78	11.42	24.61	60.43	2608
CSS 270	3527	192-204	7¾ - 8	180 - 191	7¼ - 7½	30.51	25.59	8.27	9.00	15.55	12.01	27.17	64.37	3278


MBL = Minimum Breaking Load

- The standard finish of our sockets is blue. Hot dipped galvanized is also available.
- Socket range CSS 296 until CSS 200 is delivered with galvanized finish, other finishes are available upon request.
- All sockets are provided with an EN 10204-2.1 declaration of conformity, EN 10204-3.1 material certificate and can be provided with a 2006/42/EC declaration where applicable.
- Dimensional tolerances depend on the manufacturing techniques applied and are different between machined components (pins) and cast components (socket bodies and wedges).
- Also surface finish e.g. hot dip galvanizing or even paint may add to the overall thickness and fork distance.
- Please contact Ropeblock for further guidance and a detailed dimensional tolerance sheet.



SEE OUR WARNING
& SAFETY INFORMATION
ON PAGES 134 - 146



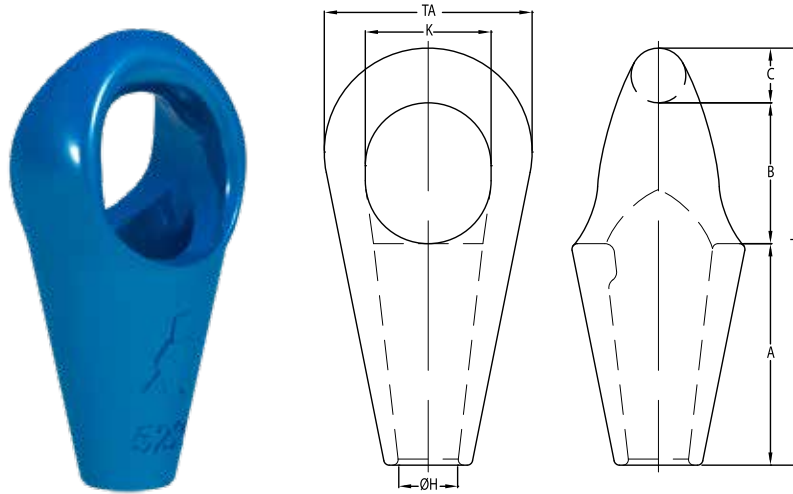

Model No.	MBL (UStons)	for wire ø		Dimensions (inch)							Weight (lbs)
		(mm)	(inch)	A	B	C	øH	K	TA	TL	
SBS 512	154	31-36	1¼ - 1⅜	5.55	3.27	1.50	1.52	2.95	5.20	10.31	15
SBS 517	176	37-42	1½ - 1⅝	6.38	4.06	1.57	1.74	3.62	5.98	12.01	22
SBS 519	220	43-48	1¾ - 1⅞	7.40	4.72	1.89	2.01	4.41	7.01	14.02	34
SBS 522	276	49-54	2 - 2⅛	8.03	5.20	2.13	2.32	4.72	7.87	15.35	46
SBS 524	353	55-60	2¼ - 2⅜	9.06	5.83	2.44	2.52	5.31	8.66	17.32	62
SBS 526	441	61-68	2½ - 2⅝	10.43	6.50	2.68	2.95	5.91	9.84	19.61	96
SBS 527	551	69-75	2¾ - 2⅞	11.30	7.01	2.95	3.11	6.46	10.79	21.26	118
SBS 528	661	76-80	3 - 3⅛	12.36	7.68	2.99	3.50	6.89	11.61	23.03	155
SBS 529	772	81-86	3¼ - 3⅝	12.87	8.50	3.23	3.63	7.64	12.60	24.61	179
SBS 530	882	87-93	3½ - 3⅞	14.09	8.66	3.62	3.90	7.95	13.78	26.38	246
SBS 531	992	94-102	3¾ - 4	14.37	9.25	3.94	4.24	8.46	14.76	27.56	287
SBS 533	1102	108-115	4¼ - 4½	16.54	10.63	4.33	4.72	9.45	16.14	31.50	401

MBL = Minimum Breaking Load

- The standard finish of our sockets is blue. Hot dipped galvanized is also available.
- All sockets are provided with an EN 10204-2.1 declaration of conformity, EN 10204-3.1 material certificate and can be provided with a 2006/42/EC declaration where applicable.
- Dimensional tolerances depend on the manufacturing techniques applied and are different between machined components (pins) and cast components (socket bodies and wedges).
- Also surface finish e.g. hot dip galvanizing or even paint may add to the overall thickness and fork distance.
- Please contact Ropeblock for further guidance and a detailed dimensional tolerance sheet.



SEE OUR WARNING
& SAFETY INFORMATION
ON PAGES 134 - 146





2013 EDITION

MUNCY™ INDUSTRIES

*Catalog
&
User's Manual*



Inspiring Confidence



Sockets Cautions



Sockets Installation

The following socketing methods are general in nature and have been proven over years of use. Procedures for zinc and resin differ significantly, but will achieve the same result. Slight variations to these procedures have been used with acceptable results, however the effectiveness of any change cannot be predetermined without destructive tests.

There are many ways to go **wrong** in socketing procedures. Some of the more common pitfalls that should be guarded against include:

1. Turning the strands back, inward or outward, before the "boom" is inserted into the socket;
2. Turning back the strands and seizing them to the body of the rope;
3. Turning back the strands and tucking them into the body of the rope;
4. Tying a knot in the rope;
5. Wedging nails, spikes, bolts, etc. into the socket after the rope is inserted in an attempt to secure a tight fit. This is a particularly dangerous practice.

Socket Reuse

All warranties from Muncy are voided if spelter sockets are reused. If spelter sockets are to be reused, wire rope manufacturers recommend certain procedures to be followed. Contact Muncy for any assistance on dimensional, chemical or physical properties. All sockets that are to be reused should be:

1. Magnetic particle inspected (100% of fitting) to locate any cracks (surface defects) that may have developed over the use of the fitting. Discard the socket if any cracks are found.
2. Dimensionally checked. The pin hole should not be elongated more than 5% of the original dimension.
3. Thermally stress relieved.

Spelter Socketing - Zinc Poured

When using Zinc socketing media, be sure to have adequate ventilation. The Zinc used should meet ASTM specifications designation B6-49 Grade (1) Prime Western or better. SDS sheets are available from Muncy.

The following steps give a general outline to follow for socketing with Zinc.

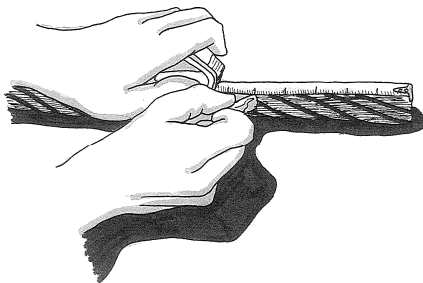


Fig. 1

1. *Measure the Rope Ends to be socketed*
The rope should be of sufficient length so that the ends of the unlaid wires from the strands will be at the top of the socket basket. (Fig. 1)
2. *Apply Serving at Base of Socket*
Apply a tight serving band for the length of two rope diameters, at the point where the socket base will be to eliminate any distortion the band of the wires and strands.



Sockets Cautions



Fig. 6

Another method of placing the socket onto the rope is to first cover the end of the rope with a wrapping or split tubing; then slide the socket onto this section of the covered rope, this will prevent contamination of the inner surface of the socket by the wire rope lubricant. Once the end of the wire rope is cleaned and broomed, the socket can be slid into position and the wrapping or split tubing can be removed.

CAUTION: Never heat a socket after it has been placed on the rope. This could cause damage to the rope.

After the socket is on the rope, the wires should be distributed evenly in the socket basket so the zinc can surround each wire. Use extreme care in aligning the socket with the rope's center line, and in making certain there is a minimum vertical length of rope extending from the socket equal to about 30 rope diameters. This vertical length is necessary for rope balance. Premature wire breaks at the socket can occur if the rope is not balanced at pouring.

Seal the socket base with fire clay or putty but make certain the material does not penetrate into the socket base. Should this occur, it could prevent the zinc from penetrating the full length of the socket basket thereby creating a void (fig 6).

Insert Lube Tube in the middle of the basket, if required.

Pour the Zinc

7. Pour the zinc at a temperature between 925 degrees and 975 degrees F (Fig. 7).

CAUTION: Do not heat zinc above 1000 degrees F. Overheating of zinc may affect its bonding properties. The zinc temperatures may be measured with a portable pyrometer or thermocouple. Remove all dross from the top of the zinc pool before pouring. Pour the zinc in one continuous stream until it reaches the top of the basket and all wire ends are covered. There should be no "capping" of the socket, unless the customer requires a smooth surface with no shrinkage on the top of the basket. The use of a pinhole in the basket may be employed to allow air and voids within the zinc.

Remove Serving

8. After the zinc and socket have cooled, remove the fire clay or putty and the serving band from the socket base, and check to make certain that the zinc has penetrated to the socket base.

Lubricate the Rope

9. Apply the wire rope lubricant to the rope at the base of the socket and on any rope section where the original lubricant may have been removed.



Fig. 7



Sockets Cautions



Spelter Socketing - Resin Poured

Before proceeding with a resin socketing procedure, check the resin manufacturer's instructions carefully. Each resin system has specific procedures and steps which must be followed in the order specified for the system to give the desired results. Since any resin system depends upon a chemical reaction, the procedure becomes critically important. Give particular attention to selecting sockets designed for resin socketing. Stainless steel spelter sockets and stainless steel rope or strand should not be used with resin socketing media. All properties and precautions of resins should be obtained from the resin manufacturers. Take special note of the "shelf life" of the resin being used.

The following steps give a general outline to follow for resin socketing; they should not be used as a substitute for detailed instructions supplied by the resin manufacturer.




Fig. 8




Fig. 9



Fig. 10

1. *Measure the Rope Ends to be Socketed*

The rope end should be of sufficient length so the ends of unlay wires (from the strands) will be at the top of the socket basket. (Fig. 8)

2. *Apply Serving at Base of Socket*

Apply a tight serving band for the length of two rope diameters at the point where the socket base will be. This will eliminate any distortion below the band of the wires and strands.

3. *Broom Out Strand Wires*

Unlay and straighten the individual rope strands and spread them evenly so that they form an included angle of approximately 60 degrees. Unlay the wires of each individual strand for the full length of the rope end - being careful not to disturb or change the lay of the wires and strands under the serving band. Unlay the wire of the independent wire rope core (IWRC) in the same manner. A fiber core should be cut out and removed as close to the serving band as possible. (Fig. 9)

4. *Clean the Broomed-Out Ends*

A suggested cleaning solvent for this step is Bromothene R or equivalent solvent (Fig. 10). It is also known under the names N-Propyl Bromide or Normal Propyl Bromide (nPB), Perchorthane, and Perchlorethylene. Other proven cleaning methods may be used, such as hot detergents. The continued availability of current cleaning solvents is uncertain due to federal regulations concerning ozone depleting substances. For information on available solvents, consult the solvent supplier.

CAUTION: Breathing the vapor of this solvent is harmful; it should be used in a well-ventilated area. Be sure to follow the solvent manufacturer's instructions, and carefully observe all instructions printed on the label. Note that vapor densities may vary, some solvent vapors do not rise but may stay close to the ground. Refer to solvent SDS sheets.



Fig. 11

5. *Close Rope Ends and Place Socket*

Place rope in a vertical position with the broom end up. Close and compact the broom to permit insertion of the broomed end into the base of the socketing (Fig. 11). Slip the socketing on, removing any temporary banding or seizing as required. Make certain the broomed wires are uniformly spaced in the basket, with the wire ends slightly below the top edge of the basket, and the axis of the rope and the fitting are aligned. For sockets with grooves it is recommended to fill the grooves with clay or putty. Seal the ring-like space between the base of the socket and the rope to prevent leakage of the resin from the basket.



Sockets Cautions



Fig. 12

In addition to normal sealing materials, non-hardening butyl rubber-base sealant or latex glazing compounds are satisfactory for this purpose. Make sure the sealant does not enter the base of the socket, so the resin will be able to fill the complete depth of the socket basket (Fig. 12).

6. *Pouring the Resin*

Mix and pour the resin in strict accordance with resin manufacturer's instructions (Fig. 13).



Fig. 13

7. *Lubrication After Socket Attachment*



After the resin has cured, re-lubricate the wire rope at the base of the socket to replace any lubricant that may have been removed during the cleaning operation.

8. *Resin Properties*

All properties and precautions of resins should be obtained from the resin manufacturers. Take special note of the "shelf life" of the resin being used.



Open Rope Spelter Sockets

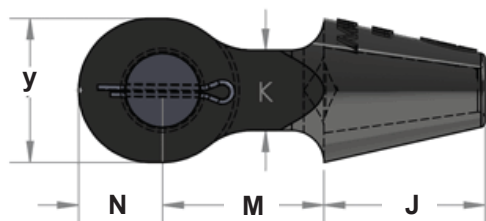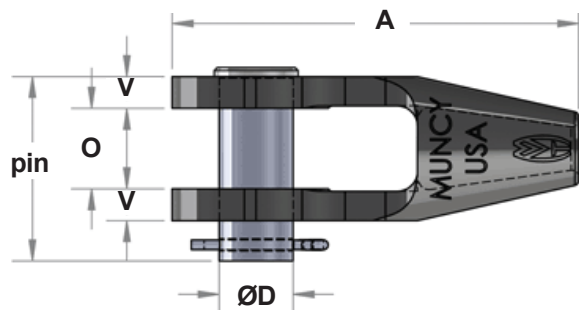

- Muncy™ 1-1/2" and smaller Rope Sockets have a grooveless basket design for use with resin or zinc socketing media.
- Muncy™ 1-5/8" and larger Rope Sockets have a grooved basket design that meet the requirements of Federal Specifications RR-S-550D.
- Specially designed retaining segments preventing rotation and pop-out of socketing compound. 1-1/2" and smaller Muncy™ Rope Sockets and all Muncy™ Strand Sockets feature these retaining segments.
- Engineered and designed for the most extreme applications. We use high grade steel for strength and durability.

ZINC OR RESIN POURED

Stock No.	Rope Size	Strand Size	Dimensions											Weight lbs. Each
			A	J	K	M	N	O	Q	V	Y	Pin		
												Length	Dia.	
R-101	5/16 - 3/8	-	4.88	2.25	0.81	1.75	.875	0.81	0.50	0.44	1.50	2.06	0.81	1.4
R-102	7/16 - 1/2	-	5.56	2.50	1.00	2.00	1.06	1.00	0.56	0.50	1.88	2.62	1.00	2.5
R-103	9/16 - 5/8	1/2	6.75	3.00	1.25	2.50	1.25	1.25	0.69	0.56	2.25	2.88	1.19	3.5
R-104	3/4	9/16 - 5/8	7.94	3.50	1.50	3.00	1.44	1.50	0.81	0.63	2.63	3.25	1.38	6.0
R-105	7/8	11/16 - 3/4	9.22	4.00	1.75	3.50	1.75	1.75	0.94	0.75	3.13	3.88	1.63	10.0
R-106	1	13/16 - 7/8	10.56	4.50	2.00	4.00	2.06	2.00	1.13	0.88	3.75	4.50	2.00	15.5
R-107	1-1/8	15/16 - 1	11.81	5.00	2.38	4.49	2.31	2.25	1.25	1.00	4.13	5.00	2.25	22.0
R-108	1-1/4 - 1-3/8	1-1/16 - 1-1/8	13.19	5.50	2.75	5.00	2.69	2.50	1.50	1.13	4.75	5.63	2.50	32.0
R-109	1-1/2	1-3/16 - 1-1/4	15.13	6.00	3.00	6.00	3.13	3.00	1.63	1.19	5.38	6.38	2.75	46.0
R-110	1-5/8	1-5/16 - 1-3/8	16.25	6.50	3.25	6.50	3.25	3.00	1.75	1.31	5.75	6.63	3.00	55.0
R-111	1-3/4 - 1-7/8	1-7/16 - 1-5/8	18.25	7.50	3.88	7.00	3.75	3.50	2.00	1.56	6.50	7.63	3.50	85.0
R-112	2 - 2-1/8	1-13/16 - 1-7/8	21.50	8.50	4.25	9.00	4.00	4.00	2.25	1.81	7.00	8.75	3.75	96.0
R-113	2-1/4 - 2-3/8	1-15/16 - 2	23.50	9.00	4.38	10.00	4.50	4.50	2.50	2.13	7.75	10.00	4.25	165.0
R-114	2-1/2 - 2-5/8	2-3/16 - 2-1/4	25.50	9.75	4.63	10.75	5.00	5.00	3.00	2.38	8.50	11.00	4.75	252.0
R-115	2-3/4 - 2-7/8	2-5/16 - 2-3/8	28.75	11.50	5.25	11.50	5.75	5.38	3.00	2.38	10.00	11.38	5.00	305.0
R-116	3 - 3-1/8	2-5/8 - 2-3/4	30.56	12.50	5.50	12.00	6.06	5.75	3.25	2.50	10.50	12.25	5.25	370.0
R-117	3-1/4 - 3-3/8	2-5/8 - 2-3/4	34.75	14.00	7.00	14.00	6.75	6.25	3.563	2.75	11.50	13.25	5.50	510.0
R-118	3-1/2 - 3-5/8	2-7/8 - 3	36.50	15.00	8.00	14.50	7.00	7.50	3.813	3.25	12.50	15.50	6.00	760.0
R-119	3-3/4 - 4	3-5/8 - 3-3/4	38.75	16.00	8.25	15.00	7.75	7.75	4.13	3.38	14.00	16.00	7.00	808.0


CAUTION

Open Rope Spelter sockets are recommended for use on 6x7, 6x19, and 6x37, IPS, XIP (EIP), XXIP (EEIP), RRL, FCI WRC regular lay ropes. They are also approved for use on bridge ropes and structural strand. Before using open rope spelter sockets with other type, lay, construction, or grade of wire rope, it is recommended that a test assembly be destructively tested to prove the adequacy of the assembly.



Closed Rope Spelter Sockets

- Muncy™ 1-1/2" and smaller Rope Sockets have a grooveless basket design for use with resin or zinc socketing media.
- Muncy™ 1-5/8" and larger Rope Sockets have a grooved basket design that meet the requirements of Federal Specifications RR-S-550D.
- Specially designed retaining segments preventing rotation and pop-out of socketing compound. 1-1/2" and smaller Muncy™ Rope Sockets and all Muncy™ Strand Sockets feature these retaining segments.

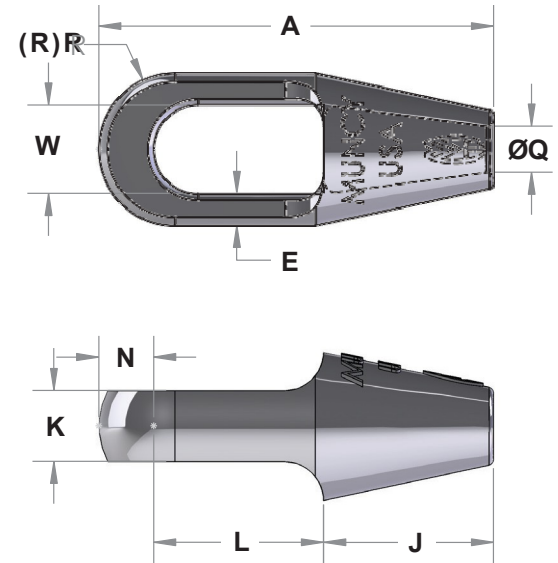

ZINC OR RESIN POURED


Stock No.	Rope Size	Strand Size	Dimensions								Weight lbs. Each
			A	E	J	K	L	N	Q	W	
R-201	5/16 - 3/8	-	4.88	0.38	2.25	0.69	2.00	0.63	0.50	0.94	1.0
R-202	7/16 - 1/2	-	5.44	0.44	2.50	0.88	2.25	0.69	0.56	1.13	1.4
R-203	9/16 - 5/8	1/2	6.31	0.63	3.00	1.00	2.50	0.81	0.69	1.38	3.0
R-204	3/4	9/16 - 5/8	7.56	0.69	3.50	1.25	3.00	1.06	0.81	1.63	4.5
R-205	7/8	11/16 - 3/4	8.75	0.88	4.00	1.50	3.50	1.25	0.94	1.88	7.0
R-206	1	13/16 - 7/8	9.87	0.94	4.50	1.75	4.00	1.38	1.13	2.25	11.0
R-207	1-1/8	15/16 - 1	11.01	1.00	5.00	2.00	4.50	1.50	1.25	2.50	16.0
R-208	1-1/4 - 1-3/8	1-1/16 - 1-1/8	12.13	1.13	5.50	2.25	5.00	1.63	1.50	2.75	22.0
R-209	1-1/2	1-3/16 - 1-1/4	13.94	1.13	6.00	2.50	6.00	1.94	1.63	3.13	28.0
R-210	1-5/8	1-5/16 - 1-3/8	15.13	1.25	6.50	2.75	6.50	2.13	1.75	3.25	36.0
R-211	1-3/4 - 1-7/8	1-7/16 - 1-5/8	17.25	1.61	7.50	3.00	7.56	2.19	2.00	3.53	58.0
R-212	2 - 2-1/8	1-13/16 - 1-7/8	19.50	1.94	8.50	3.25	8.56	2.44	2.25	3.75	80.0
R-213	2-1/4 - 2-3/8	1-15/16 - 2	21.63	2.11	9.50	3.63	9.50	2.63	2.50	4.28	105.0
R-214	2-1/2 - 2-5/8	2-3/16 - 2-1/4	24.25	2.13	10.50	4.00	10.62	3.13	2.88	5.50	140.0
R-215	2-3/4 - 2-7/8	2-5/16 - 2-3/8	27.00	2.13	11.50	5.00	11.50	4.00	3.00	6.00	200.0
R-216	3 - 3-1/8	2-5/8 - 2-3/4	29.00	2.44	12.50	5.00	12.00	4.50	3.25	6.50	240.0
R-217	3-1/4 - 3-3/8	2-5/8 - 2-3/4	33.50	2.75	14.00	6.00	14.00	5.50	3.563	7.00	330.0
R-218	3-1/2 - 3-5/8	2-7/8 - 3	35.50	3.13	15.00	7.00	14.50	6.00	3.813	7.63	465.0
R-219	3-3/4 - 4	3-5/8 - 3-3/4	37.50	3.25	16.00	7.25	15.00	6.50	4.219	8.00	570.0

CAUTION

Closed Rope Spelter sockets are recommended for use on 6x7, 6x19, and 6x37, IPS, XIP (EIP), XXIP (EEIP), RRL, FCI WRC regular lay ropes. They are also approved for use on bridge ropes and structural strand. Before using closed rope spelter sockets with other type, lay, construction, or grade of wire rope or strand, it is recommended that a test assembly be destructively tested to prove the adequacy of the assembly.



Stainless Steel Open Rope Spelter Sockets

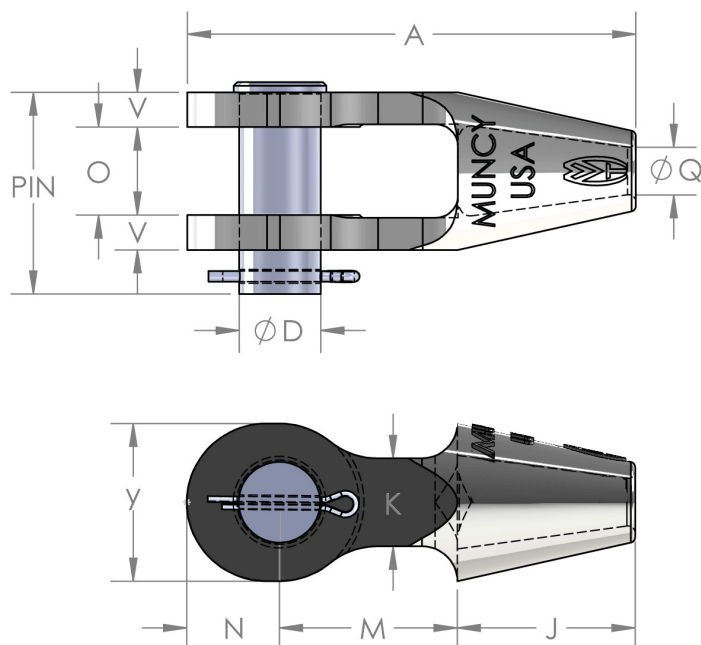

- ☑ Quality stainless steel casting.
- ☑ Grooveless with a retaining segment.
- ☑ Material grade 316.
- ☑ For use with zinc socketing media ONLY.


Stock No.	Rope Size	Strand Size	Dimensions											Weight lbs Each
			A	J	K	M	N	O	Q	V	Y	Pin		
												Length	Dia.	
R-101SS	5/16 - 3/8	-	4.88	2.25	0.81	1.75	.875	0.81	0.50	0.44	1.50	2.06	0.80	1.5
R-102SS	7/16 - 1/2	-	5.56	2.50	1.00	2.00	1.06	1.00	0.56	0.50	1.88	1.00	2.62	2.5
R-103SS	9/16 - 5/8	1/2	6.75	3.00	1.25	2.50	1.25	1.25	0.69	0.56	2.25	2.88	1.19	3.5
R-104SS	3/4	9/16 - 5/8	7.94	3.50	1.50	3.00	1.44	1.50	0.81	0.63	2.63	3.25	1.38	6.0
R-105SS	7/8	11/16 - 3/4	9.22	4.00	1.75	3.50	1.75	1.75	0.94	0.75	3.13	3.88	1.63	10.0
R-106SS	1	13/16 - 7/8	10.56	4.50	2.00	4.00	2.06	2.00	1.13	0.88	3.75	4.50	2.00	15.5
R-107SS	1-1/8	15/16 - 1	11.81	5.00	2.38	4.49	2.31	2.25	1.25	1.00	4.13	5.00	2.25	22.0
R-108SS	1-1/4 - 1-3/8	1-1/16 - 1-1/8	13.19	5.50	2.75	5.00	2.69	2.50	1.50	1.13	4.75	5.63	2.50	32.0
R-109SS	1-1/2	1-3/16 - 1-1/4	15.13	6.00	3.00	6.00	3.13	3.00	1.63	1.19	5.38	6.38	2.75	46.0
R-110SS	1-5/8	1-5/16 - 1-3/8	16.25	6.50	3.25	6.50	3.25	3.00	1.75	1.31	5.75	6.63	3.00	55.0

CAUTION

Stainless Steel Open Rope Spelter Sockets are recommended for use on 6x7, 6x19, and 6x37 stainless steel wire rope, RRL, FC, IWRC regular lay ropes. Before using stainless steel spelter sockets with other type, lay, construction, or grade of wire rope or strand, it is recommended that a test assembly be destructively tested to prove the adequacy of the assembly. For use with zinc socketing media only.



Stainless Steel Closed Rope Spelter Sockets

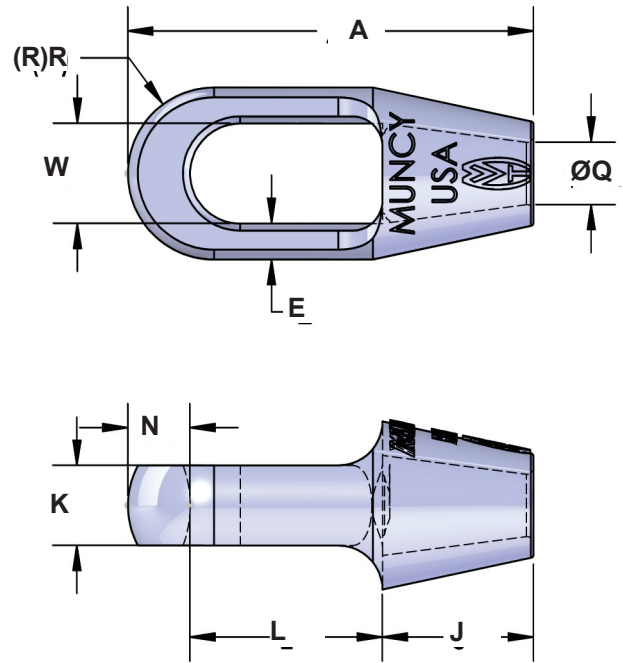

- ☞ Quality stainless steel casting.
- ☞ Grooveless with a retaining segment
- ☞ Material grade 316.
- ☞ For use with zinc socketing media ONLY.

Stock No.	Rope Size	Strand Size	Dimensions								Weight lbs. Each
			A	E	J	K	L	N	Q	W	
R-201SS	5/16 - 3/8	-	4.88	0.38	2.25	0.69	2.00	0.63	0.50	0.94	1.0
R-202SS	7/16 - 1/2	-	5.44	0.44	2.50	0.88	2.25	0.69	0.56	1.13	1.4
R-203SS	9/16 - 5/8	1/2	6.31	0.63	3.00	1.00	2.50	0.81	0.69	1.38	3.0
R-204SS	3/4	9/16 - 5/8	7.56	0.69	3.50	1.25	3.00	1.06	0.81	1.63	4.5
R-205SS	7/8	11/16 - 3/4	8.75	0.88	4.00	1.50	3.50	1.25	0.94	1.88	7.0
R-206SS	1	13/16 - 7/8	9.87	0.94	4.50	1.75	4.00	1.38	1.13	2.25	11.0
R-207SS	1-1/8	15/16 - 1	11.01	1.00	5.00	2.00	4.50	1.50	1.25	2.50	16.0
R-208SS	1-1/4 - 1-3/8	1-1/16 - 1-1/8	12.13	1.13	5.50	2.25	5.00	1.63	1.50	2.75	22.0
R-209SS	1-1/2	1-3/16 - 1-1/4	13.94	1.13	6.00	2.50	6.00	1.94	1.63	3.13	28.0
R-210SS	1-5/8	1-5/16 - 1-3/8	15.13	1.25	6.50	2.75	6.50	2.13	1.75	3.25	36.0


CAUTION

Stainless Steel Closed Rope Spelter sockets are recommended for use on 6x7, 6x19, and 6x37, stainless steel wire rope, RRL, FC, IWRC regular lay ropes. Before using stainless steel spelter sockets with other type, lay, construction, or grade of wire rope or strand, it is recommended that a test assembly be destructively tested to prove the adequacy of the assembly. For use with zinc socketing media only.


USA



Open Strand Spelter Sockets

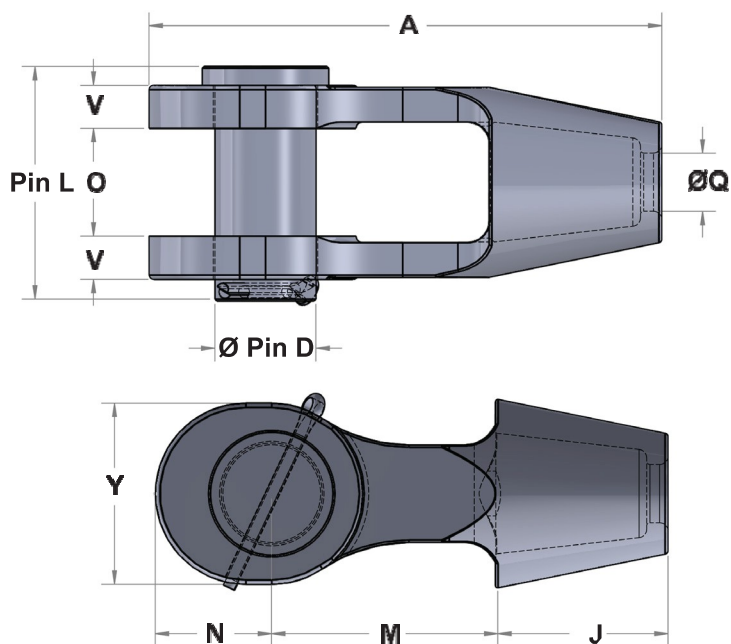

- ☞ Specially designed retaining segments prevent rotation and pop-out of socketing compound.
- ☞ 1-1/2" and smaller Muncy™ Rope Sockets and all Muncy™ Strand Sockets feature these retaining segments.
- ☞ Engineered and designed for the most extreme applications. We use high grade steel for strength and durability.
- ☞ Not all sizes regularly stocked. Call for availability.

ZINC POURED

Stock No.	Rope Size	Strand Size	Dimensions											Weight lbs. Each
			A	J	K	M	N	O	Q	V	Y	Pin		
												Length	Dia.	
F-4374	1-3/4 - 1-7/8	1-7/16 - 1-5/8	16.63	6.13	3.50	6.50	4.00	3.50	2.00	1.25	6.25	7.00	3.50	71.0
F-4375	-	1-11/16 - 1-3/4	17.50	6.50	3.63	7.00	4.00	4.00	2.25	1.63	6.25	8.38	3.75	92.0
F-4376	2 - 2-1/8	1-13/16 - 1-7/8	19.25	6.75	3.75	8.00	4.50	4.25	2.19	1.63	6.88	8.63	4.00	111.0
F-4377	2-1/4 - 2-3/8	1-15/16 - 2	21.38	7.00	3.88	9.50	4.88	4.50	2.31	1.63	7.50	8.88	4.25	138.0
F-4362	-	2-1/16 - 2-1/8	22.50	7.75	3.88	10.00	4.75	4.50	2.50	2.00	7.50	9.63	4.50	161.0
F-4398	2-1/2 - 2-5/8	2-3/16 - 2-1/4	24.13	7.88	4.00	11.00	5.25	5.00	2.63	2.00	8.00	10.25	4.75	196.0
F-4399	2-3/4 - 2-7/8	2-5/16 - 2-3/8	24.75	8.25	4.50	11.00	5.50	5.25	2.75	2.13	8.50	10.75	5.00	231.0
F-4400	-	2-7/16 - 2-9/16	26.56	8.50	5.00	12.00	5.75	5.50	3.00	2.25	9.00	11.25	5.25	261.0
F-3438	3 - 3-1/8	2-5/8 - 2-3/4	27.34	8.75	5.00	12.25	6.38	6.00	3.13	2.50	9.75	12.25	5.75	320.0
F-3421	3-1/4 - 3-3/8	2-7/8 - 3	29.75	10.00	6.63	13.00	6.75	6.25	3.38	2.50	10.50	12.50	6.00	392.0
F-3471	3-1/2 - 3-5/8	3-1/8 - 3-1/4	31.50	10.50	6.13	13.25	7.75	6.75	3.75	2.75	11.25	13.50	6.50	433.0
F-3478	-	3-3/8 - 3-1/2	32.75	10.75	6.38	13.75	8.25	7.25	4.00	3.00	11.75	14.63	6.75	582.0
F-3479	3-3/4 - 4	3-5/8 - 3-3/4	33.50	11.00	6.74	14.00	8.50	7.50	4.25	3.38	12.25	15.50	7.00	677.0
F-3480	-	3-7/8 - 4	34.50	11.25	7.00	14.25	9.00	8.00	4.50	3.50	12.75	16.38	7.25	754.0
F-3557	4-1/2 - 4-3/4	4-1/8 - 4-3/8	35.00	11.75	7.00	14.75	8.50	8.25	5.25	2.75	12.75	15.13	7.25	659.0
F-3558	-	4-1/2 - 4-3/4	37.00	12.50	8.00	15.50	9.00	8.50	5.75	3.00	13.50	15.88	7.50	778.0
F-3559	5-1/2 - 5-3/4	4-7/8 - 5-1/8	40.25	13.75	9.00	16.50	9.00	8.75	6.25	3.00	14.75	16.13	8.00	947.0
F-3560	6	5-1/4 - 5-1/2	43.50	15.00	10.00	17.25	11.25	9.00	6.50	3.00	16.50	16.38	8.50	1130.0

CAUTION


Open Strand spelter sockets are recommended for use on 6x7, 6x19, and 6x37, IPS, XIP (EIP), XXIP (EEIP), RRL, FC IWRC regular lay ropes. They are also approved for use on bridge ropes and structural strand. Before using strand spelter sockets with other type, lay, construction, or grade of wire rope or strand, it is recommended that a test assembly be destructively tested to prove the adequacy of the assembly.





Closed Strand Spelter Sockets

- ✓ Specially designed retaining segments prevent rotation and pop-out of socketing compound.
- ✓ 1-1/2" and smaller Muncy™ Rope Sockets and all Muncy™ Strand Sockets feature these retaining segments.
- ✓ For use on structural strand and rope.
- ✓ Not all sizes regularly stocked. Call for availability.

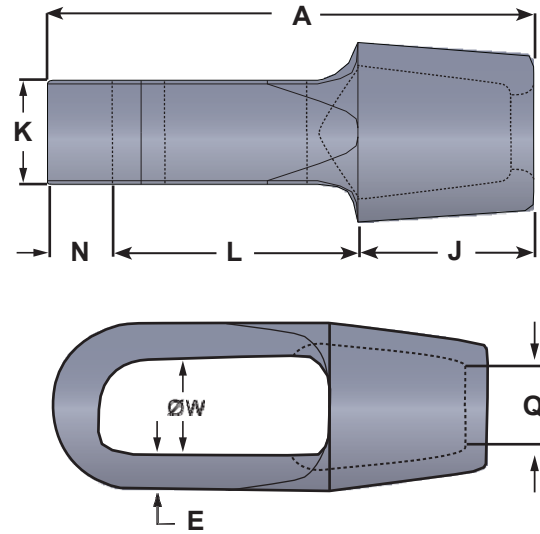

ZINC POURED

Stock No.	Rope Size	Strand Size	Dimensions							Weight lbs. Each
			A	J	K	L	N	Q	W	
F-3439	1-3/4 - 1-7/8	1-7/16 - 1-5/8	15.63	6.13	3.25	7.50	2.00	2.00	3.88	46.0
F-3457	-	1-11/16 - 1-3/4	16.75	6.50	3.75	8.00	2.25	2.25	4.25	56.0
F-3459	2 - 2-1/8	1-13/16 - 1-7/8	17.88	6.75	4.00	8.75	2.38	2.25	4.38	78.0
F-4454	2-1/4 - 2-3/8	1-15/16 - 2	18.88	7.00	4.25	9.50	2.38	2.31	4.75	78.0
F-4455	-	2-1/16 - 2-1/8	20.25	7.75	4.50	10.00	2.50	2.50	5.00	96.0
F-4456	2-1/2 - 2-5/8	2-3/16 - 2-1/4	21.13	7.88	4.75	10.50	2.75	2.63	5.25	114.0
F-4459	2-3/4 - 2-7/8	2-5/16 - 2-3/8	22.13	8.25	5.00	11.00	2.88	2.75	5.50	134.0
F-4463	-	2-7/16 - 2-9/16	23.25	8.50	5.25	11.50	3.25	2.94	5.75	167.0
F-3472	3 - 3-1/8	2-5/8 - 2-3/4	24.00	8.75	5.75	12.00	3.25	3.13	6.50	182.0
F-3473	3-1/4 - 3-3/8	2-7/8 - 3	26.00	10.00	6.00	12.25	3.75	3.38	6.25	242.0
F-3474	3-1/2 - 3-5/8	3-1/8 - 3-1/4	26.75	10.50	6.50	12.50	3.75	3.75	7.00	282.0
F-3494	-	3-3/8 - 3-1/2	27.75	10.75	7.00	13.00	4.00	4.00	7.25	343.0
F-3495	3-3/4 - 4	3-5/8 - 3-3/4	28.75	11.00	7.25	13.50	4.25	4.25	7.50	391.0
F-3496	-	3-7/8 - 4	29.75	11.25	7.75	14.00	4.50	4.50	7.75	465.0
F-3561	4-1/4 - 4-1/2	4-1/8 - 4-3/8	32.50	11.75	7.88	17.13	3.63	5.25	7.75	459.0
F-3562	-	4-1/2 - 4-3/4	34.63	12.50	8.13	17.75	4.38	5.75	8.00	547.0
F-3563	5-1/2 - 5-3/4	4-7/8 - 5-1/8	38.13	13.75	8.38	19.50	4.88	6.25	8.50	671.0
F-3564	6	5-1/4 - 5-1/2	41.50	15.00	8.63	21.00	5.50	6.50	9.00	910.0

CAUTION

Closed Strand spelter sockets are recommended for use on 6x7, 6x19, and 6x37, IPS, XIP (EIP), XXIP (EEIP), RRL, FC IWRC regular lay ropes. They are also approved for use on bridge ropes and structural strand. Before using strand spelter sockets with other type, lay, construction, or grade of wire rope or strand, it is recommended that a test assembly be destructively tested to prove the adequacy of the assembly.



USA