




HOIST RINGS & LIFTING POINTS



CoreLifting.com



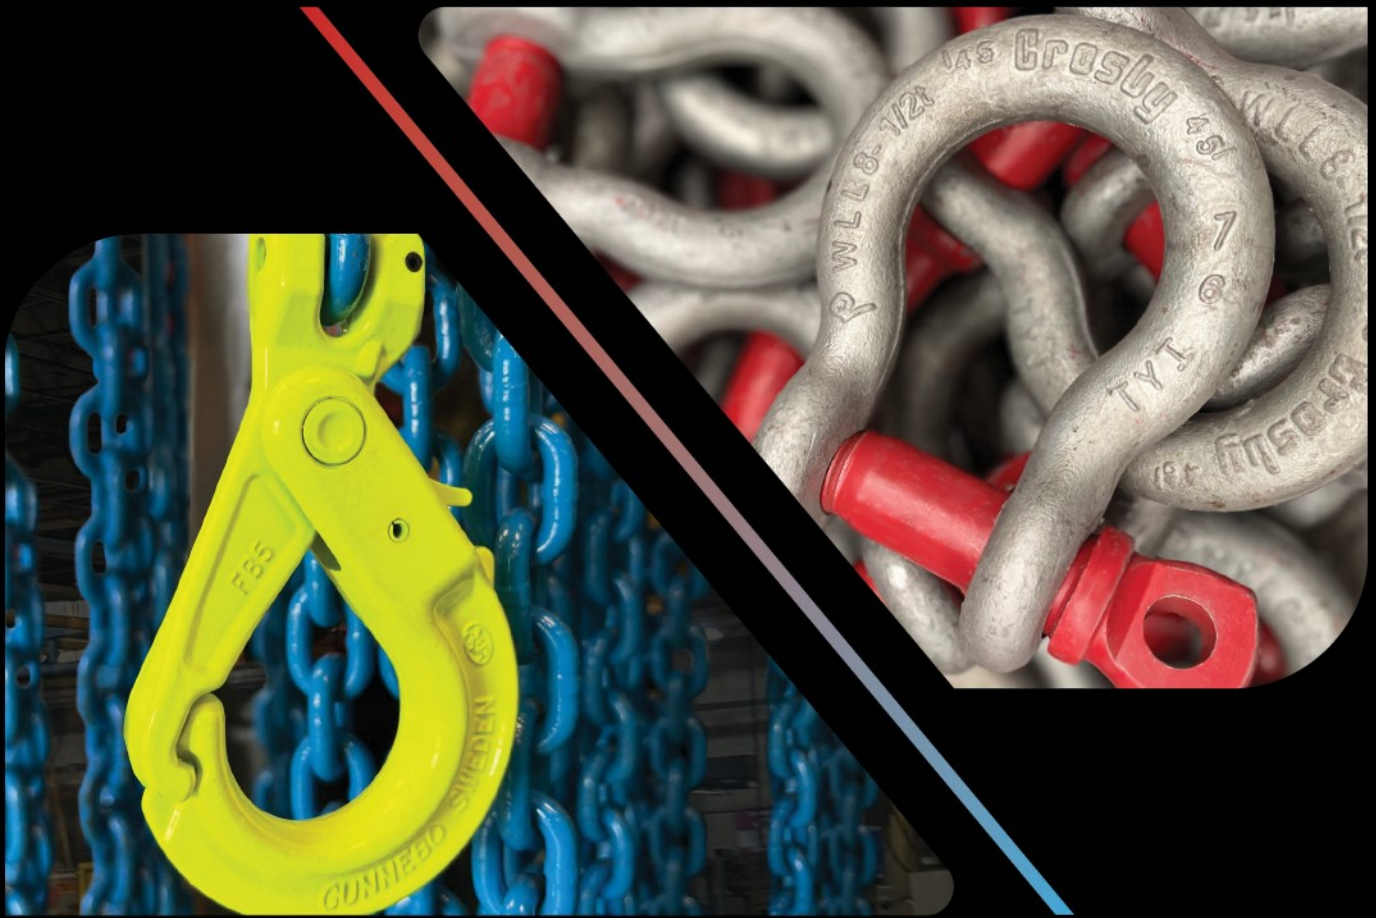

Crosby®




GUNNEBO®
Industries

PRODUCT CATALOG

with application & warning information


Imperial

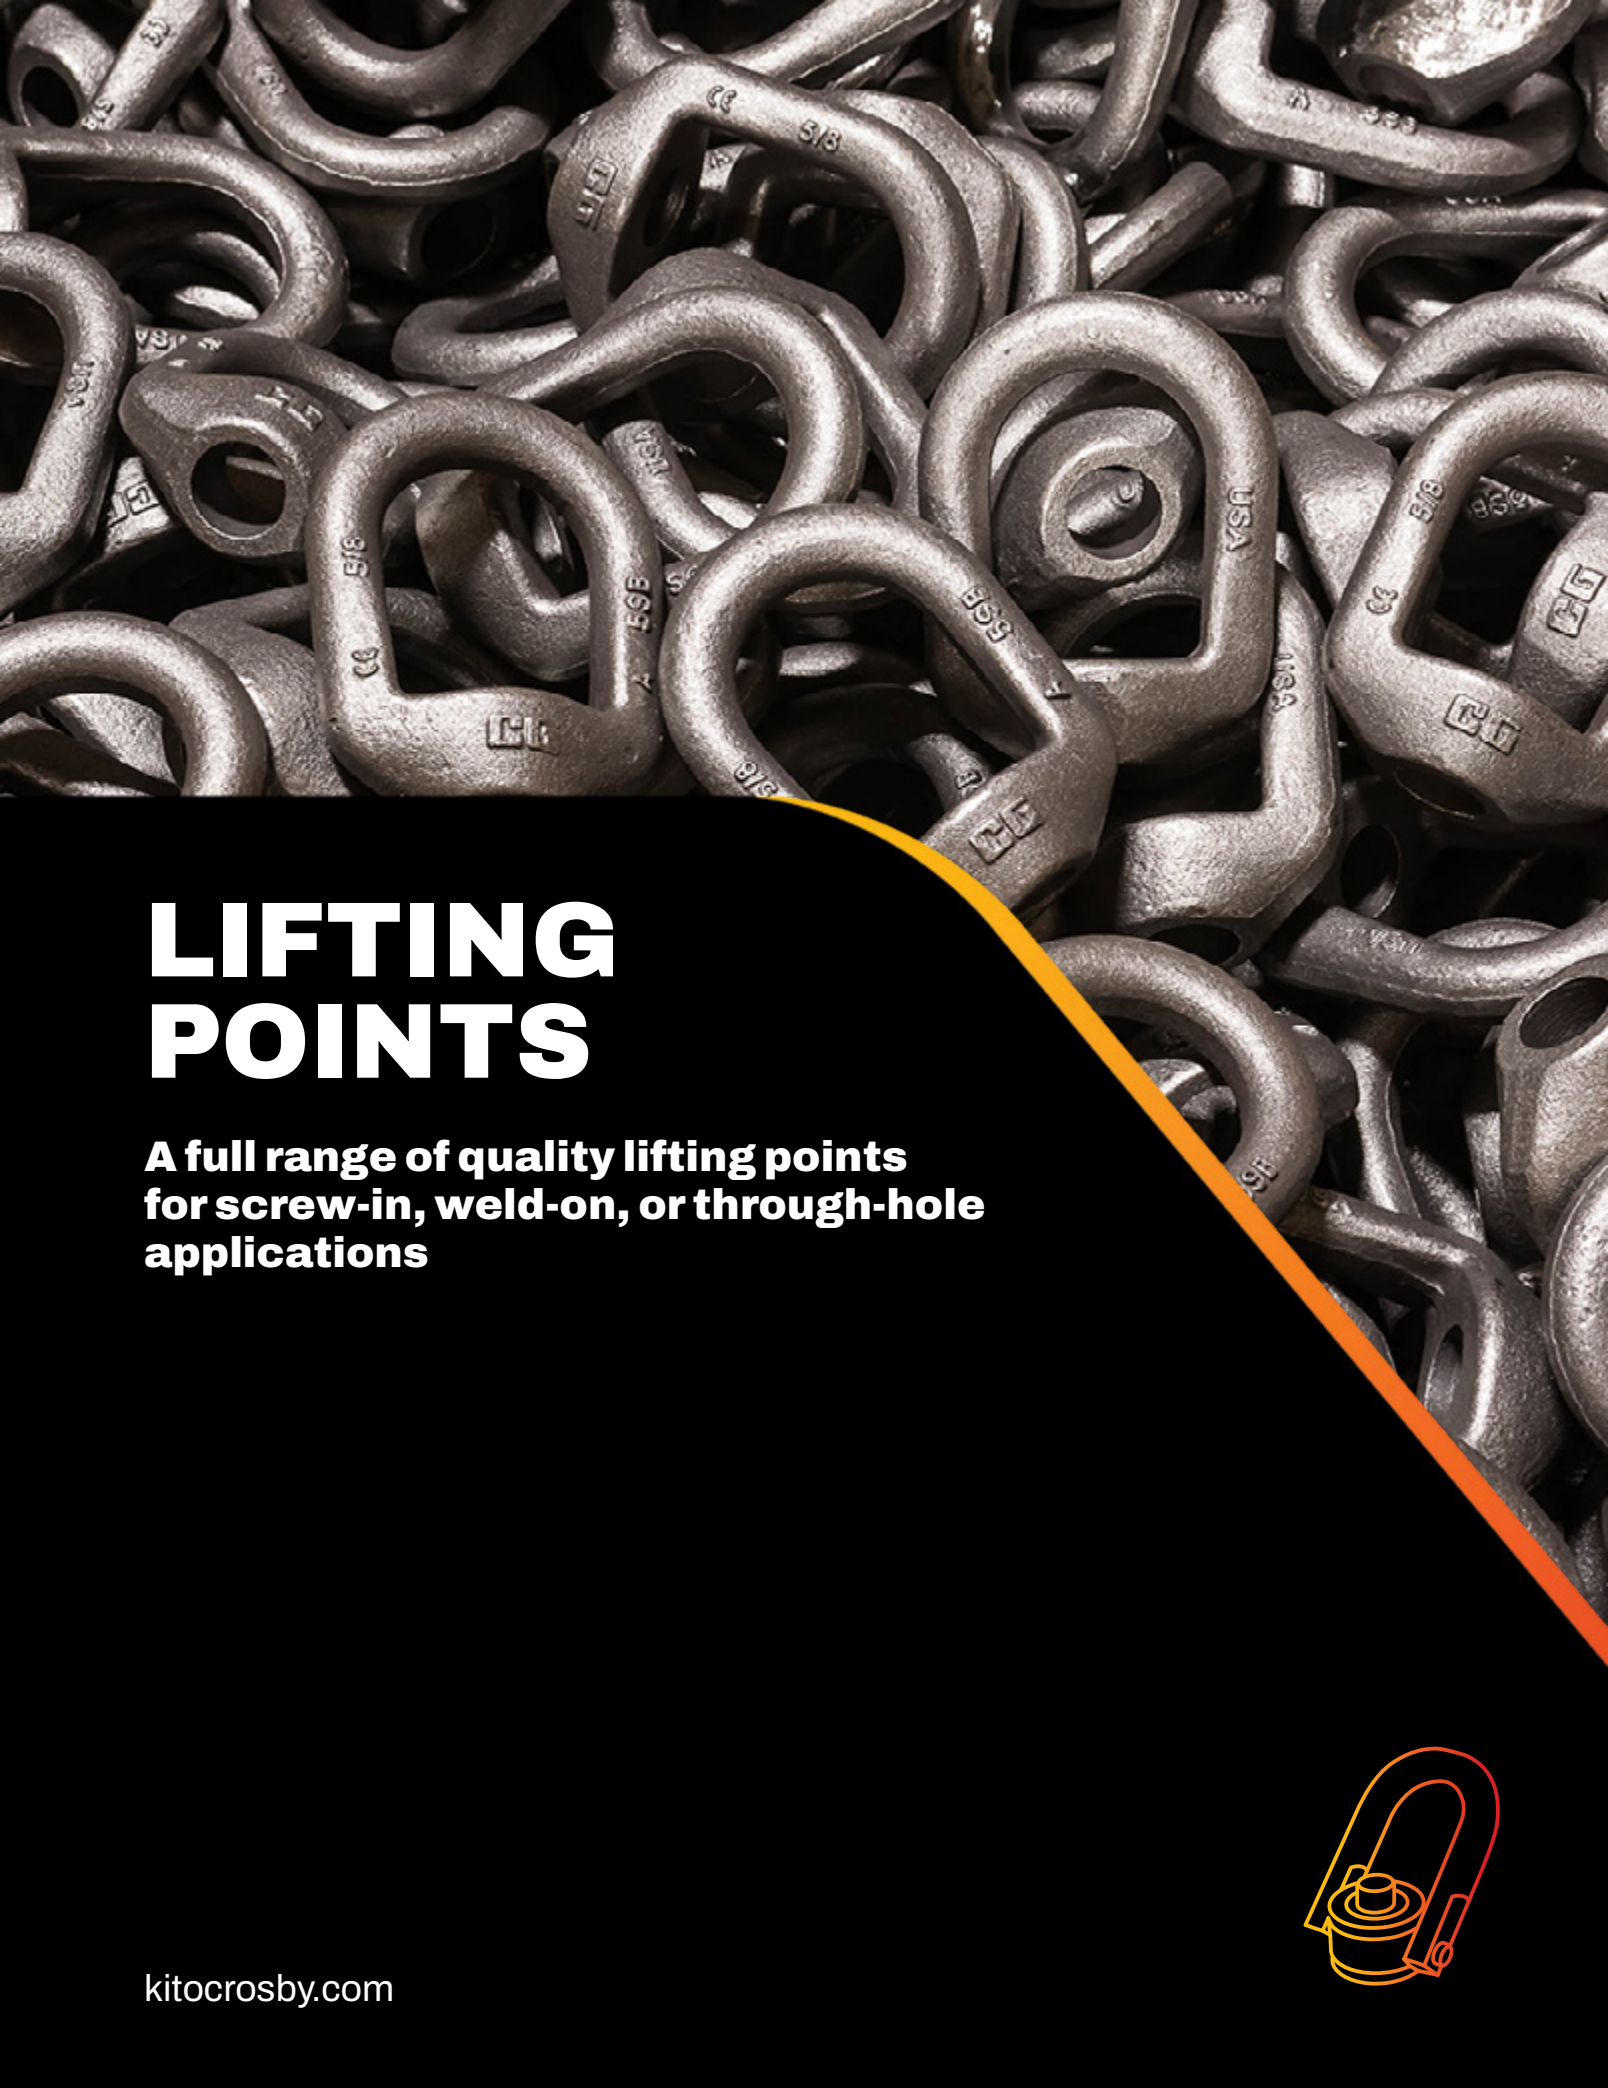

LIFTING POINTS

**A full range of quality lifting points
for screw-in, weld-on, or through-hole
applications**

kitocrosby.com






G-277



- Forged steel, Quenched & Tempered.
- Fatigue rated at 1-1/2 times the Working Load Limit at 20,000 cycles.
- Working Load Limits shown are for in-line pull. For angle loading, see applications and warning section.
- Meets or exceeds all requirements of ASME B30.26, including identification, ductility, design factor, proof load, and temperature requirements. Importantly, these bolts meet other critical performance requirements, including fatigue life, impact properties, and material traceability not addressed by ASME B30.26.
- All bolts hot-dip galvanized after threading (UNC).
- Furnished with standard hot-dip galvanized, heavy hex nuts.

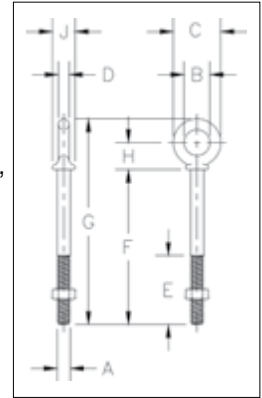

G-277 Shoulder Nut Eye Bolts

Shank Diameter & Length (in)	Stock No.	Working Load Limit (lb)	Weight Each (lb)	Dimensions (in)									
				A	B	C	D	E	F	G	H	J	
3/8 x 2-1/2	1045096	1550	0.21	.38	.75	1.38	.31	1.50	2.50	3.97	.78	.66	
3/8 x 4-1/2	1045112	1550	0.25	.38	.75	1.38	.31	2.50	4.50	5.97	.78	.66	
1/2 x 3-1/4	1045130	2600	0.43	.50	1.00	1.75	.38	1.50	3.25	5.12	1.00	.91	
1/2 x 6	1045158	2600	0.57	.50	1.00	1.75	.38	3.00	6.00	7.88	1.00	.91	
5/8 x 4	1045176	5200	0.69	.62	1.25	2.25	.50	2.00	4.00	6.44	1.31	1.12	
5/8 x 6	1045194	5200	1.02	.62	1.25	2.25	.50	3.00	6.00	8.44	1.31	1.12	
3/4 x 4-1/2	1045210	7200	1.45	.75	1.50	2.75	.62	2.00	4.50	7.44	1.56	1.38	
3/4 x 6	1045238	7200	1.68	.75	1.50	2.75	.62	3.00	6.00	8.94	1.56	1.38	
7/8 x 5	1045256	10600	2.25	.88	1.75	3.25	.75	2.50	5.00	8.46	1.84	1.56	
1 x 6	1045292	13300	3.66	1.00	2.00	3.75	.88	3.00	6.00	9.97	2.09	1.81	
1 x 9	1045318	13300	4.23	1.00	2.00	3.75	.88	4.00	9.00	12.97	2.09	1.81	
1-1/4 x 8	1045336	21000	6.50	1.25	2.50	4.50	1.00	4.00	8.00	12.72	2.47	2.28	
1-1/4 x 12	1045354	21000	7.95	1.25	2.50	4.50	1.00	4.00	12.00	16.72	2.47	2.28	
1-1/2 x 15	1045372	24000	14.25	1.50	3.00	5.50	1.25	6.00	15.00	20.75	3.00	2.75	

5:1 Design Factor. Maximum Proof Load is 2 times the Working Load Limit.




APPLICATION AND WARNING INFORMATION
SECTION 17

S-279 / M-279




- Forged steel - Quenched & Tempered.
- Working Load Limits shown are for in-line pull. For angle loading, see Warnings & Applications.
- Fatigue rated at 1-1/2 times the Working Load Limit at 20,000 cycles.
- Recommended for in-line pull.
- S-279 threaded UNC.
- M-279 metric threaded.
- Meets or exceeds all requirements of ASME B30.26 including identification, ductility, design factor, proof load and temperature requirements. Importantly, these bolts meet other critical performance requirements including fatigue life, impact properties and material traceability, not addressed by ASME B30.26.

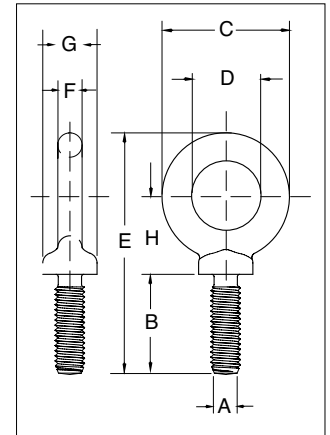

S-279 UNC Shoulder Type Machinery Eye Bolts

Size (in)	Stock No.	Working Load Limit (lb)	Weight Per 100 (lb)	Dimensions (in)							
				A* Thread	B	C	D	E	F	G	H
3/8 x 1-1/4	9900208	1550	15.00	3/8 - 16	127	162	1.00	3.07	.31	.69	1.05
1/2 x 1-1/2	9900217	2600	28.00	1/2 - 13	153	195	1.19	3.70	.38	.91	1.27
5/8 x 1-3/4	9900226	5200	55.00	5/8 - 11	179	238	1.38	4.45	.50	1.13	1.53
3/4 x 2	9900235	7200	96.00	3/4 - 10	205	276	1.50	5.07	.63	1.38	1.71
7/8 x 2-1/4	9900244	10600	154.00	7/8 - 9	231	325	1.75	5.87	.75	1.56	2.00
1 x 2-1/2	9900253	13300	238.00	1 - 8	257	376	2.00	6.66	.88	1.81	2.30
1-1/8 x 2-3/4	9900257	15000	320.00	1-1/8 - 7	275	419	2.25	7.20	.97	2.06	2.35
1-1/4 x 3	9900262	21000	399.00	1-1/4 - 7	309	450	2.50	7.95	1.00	2.28	2.73
1-1/2 x 3-1/2	9900271	24000	720.00	1-1/2 - 6	360	550	3.00	9.49	1.25	2.75	3.28
1-3/4 x 3-3/4	9900280	34000	1040.00	1-3/4 - 5	375	626	3.50	10.48	1.38	3.00	3.60
2 x 4	9900289	42000	1880.00	2 - 4-1/2	400	762	4.00	12.31	1.81	3.38	4.50
2-1/2 x 5	9900298	65000	3250.00	2-1/2 - 4	500	876	4.50	14.88	2.12	4.25	5.50

5:1 Design Factor. Maximum Proof Load is 2 times the Working Load Limit. *All bolts threaded UNC.



11

M-279 Metric Shoulder Type Machinery Eye Bolts

Size (mm)	Stock No.	Working Load Limit (kg)	Weight Each (kg)	Dimensions (mm)							
				A* Thread	B	C	D	E	F	G	H
M6 x 13	1045753	200	.03	M6 x 1.0	13.0	28.7	19.1	47.0	4.9	13.5	19.6
M8 x 13	1045789	400	.05	M8 x 1.25	13.0	35.1	22.4	54.6	6.4	15.0	24.1
M10 x 17	1045833	640	.07	M10 x 1.5	170	41.1	25.4	64.3	7.9	17.5	26.5
M12 x 20.5	1045869	1000	.11	M12 x 1.75	20.5	49.5	30.2	77.7	9.7	23.1	32.8
M16 x 27	1045913	1800	.25	M16 x 2.0	270	60.5	35.1	96.0	12.7	28.7	38.9
M20 x 30	1045995	2500	.42	M20 x 2.5	30.0	70.0	38.1	108	16.0	35.1	43.4
M24 x 36	1046029	4000	1.05	M24 x 3.0	36.0	95.5	51.0	142	22.4	46.0	58.4
M27 x 69.8	1046038	5000	1.42	M27 x 3.0	69.8	107	57.1	183	24.6	52.3	59.7
M30 x 45	1046075	6000	1.77	M30 x 3.5	45.0	114	63.5	171	25.4	58.0	69.3
M36 x 54	1046109	8500	3.12	M36 x 4.0	54.0	140	76.0	207	31.8	70.0	83.3
M42 x 95.2	1046118	14000	4.58	M42 x 4.5	95.2	159	88.9	266	35.0	76.2	91.4
M48 x 102	1046127	17300	8.71	M48 x 5.0	102	194	101	313	46.0	85.9	114
M64 x 127	1046136	29500	14.74	M64 x 6.0	127	223	114	378	53.8	108	140


5:1 Design Factor. Maximum Proof Load is 2 times the Working Load Limit.



S-264



- Forged steel - Quenched & Tempered.
- Forged from 1035 carbon steel.
- Excellent welding qualities.
- Widely used on farm machinery, trucks, steel hulled marine vessels and material handling equipment.
- Reference American Welding Society specifications for proper welding procedures.



S-264 Pad Eyes


Size No.	Stock No.	Weight Per 100 (lb)	Dimensions (in)						
			B	C	D	E	G	H	L
* 0	1090722	2.80	.25	.19	.63	.31	.63	.09	.75
* 1	1090740	6.50	.38	.25	.88	.41	.88	.13	1.03
* 1-1/2	1090768	10.40	.63	.25	1.00	.44	1.13	.16	1.31
2	1090786	21.10	.75	.38	1.06	.50	1.50	.19	1.63
4	1090802	52.20	1.00	.56	1.44	.78	2.13	.22	2.34
5	1090820	82.50	1.25	.69	1.75	.81	2.63	.25	2.75

*Meets the requirements of Military Specification MS-51930A.

G-400



- Forged steel - Quenched & Tempered.
- Hot-dip galvanized
- Tapped with standard UNC class 2 threads after galvanizing.
- Also available in blank (as forged) item (S-4028).
- Meets or exceeds all requirements of ASME B30.26.

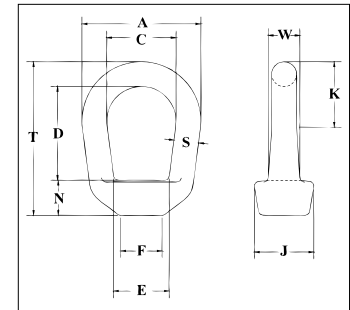

G-400 Eye Nuts

Size No.	"S" Stock Size (in)	Stock No	Std. Tap Size (in)	Working Load Limit (lb)	Weight Each (lb)	Dimensions (in)									
						A	C	D	E	F	J	K	N	T	W
1	.25	1090438	1/4	520	.09	1.25	.75	1.00	.75	.50	.69	.63	.38	1.72	.31
2	.31	1090474	3/8	1250	.17	1.62	1.00	1.20	.83	.56	.81	.89	.50	2.09	.41
3A	.38	1090517	1/2	2250	.28	2.00	1.25	1.44	1.08	.81	1.00	1.09	.62	2.55	.50
4	.50	1090535	5/8	3600	.60	2.50	1.50	1.92	1.35	1.00	1.31	1.31	.69	3.25	.69
5	.63	1090553	3/4	5200	1.00	3.00	1.75	2.38	1.59	1.12	1.50	1.57	.88	3.89	.84
6	.75	1090571	7/8	7200	1.65	3.50	2.00	2.63	1.96	1.38	1.88	1.77	.94	4.32	1.00
7	.88	1090599	1	10000	2.69	4.00	2.25	3.06	2.21	1.56	2.13	2.02	1.07	5.01	1.19
8	1.00	1090633	1-1/4	15500	4.38	4.50	2.50	3.50	2.46	1.88	2.38	2.27	1.25	5.78	1.38
9	1.13	1090651	1-3/8	18500	5.00	5.00	2.75	4.00	2.69	2.00	2.56	2.53	1.38	6.51	1.50
10	1.25	1090679	1-1/2	22500	6.78	5.62	3.12	4.31	3.09	2.25	3.00	2.82	1.50	7.06	1.66
11	1.50	1090697	2	40000	14.60	7.12	4.10	6.20	4.09	3.13	3.75	3.68	2.06	9.91	1.94

5:1 Design Factor. Working Load Limit shown is for In-Line pull. Rating based on standard tap size.

Swivel Hoist Ring



HR-125M
Swivel Hoist Ring

Color coded to distinguish between UNC (Red) and Metric (Silver) thread types.




HR-125
Swivel Hoist Ring

- Available in UNC and Metric thread sizes.
- UNC threads available in sizes from 800 pounds to 100,000 pounds Working Load Limit, with a design factor of 5 to 1.
- Metric threads available in sizes from 400kg to 16,900kg and dual rated in both a 4 to 1 and 5 to 1 design factor.
- All components are alloy steel - Quenched & Tempered.
- Designed to be used at full WLL within angular loading range.
- 100% individually proof tested to 2-1/2 times the Working Load Limit with certification and Statistically Magnetic Particle inspected. (Can be furnished 100% Magnetic Particle inspected when requested at time of order.)
- Each product has a Product Identification Code (PIC) for material traceability along with a Working Load Limit and the name Crosby or "CG" stamped into it.
- 360° swivel and 180° pivot action.
- Fatigue rated to 20,000 cycles at 1-1/2 times the Working Load Limit.
- Individually packaged along with proper application instructions and warning information.
- Bolt is secured with E-clip, threads are grooved. This method allows for easy disassembly and assembly of hoist ring for thorough examination of all components. Replacement kits are available.
- Bolts are individually Proof Tested.
- Multiple bolt length available to meet specific application requirements.
- Zinc plated (yellow chromate) finish for increased corrosion protection.
- Meets or exceeds all the requirements of ASME B30.26 including identification, ductility, design factor, proof load and temperature requirements. Importantly, these hoist rings meet other critical performance requirements including fatigue life, impact properties and material traceability, not addressed by ASME B30.26.



HR-125

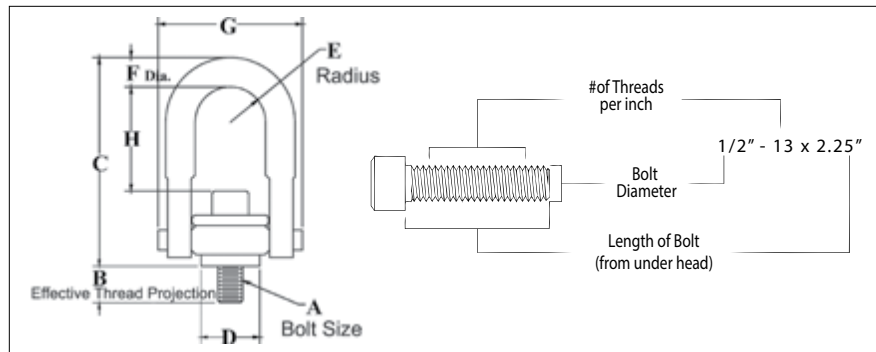

- Top washer has the following features:
 - The Working Load Limit and recommended torque value are permanently stamped into each washer.
 - Washer is color-coded for easy identification: Red - UNC thread.
- Individually Proof Tested to 2-1/2 times Working Load Limit.
- Bolt specification is an alloy socket head cap screw to ASTM A 574.
- All threads listed are UNC.
- BOLT SIZE IDENTIFICATION: The size of the bolt will be stated as in the drawing above. Illustration shows meaning of each dimension given.

HR-125 UNC Threads

Frame Size No.	Stock No.	Working Load Limit (lb)	Torque in ft-lb	Dimensions (in)								Weight Each (lb)	Replacement Bolt Kit Stock No.
				Bolt Size A	Effective Thread Projection Length B	C	D	Radius E	Diameter F	G	H		
1 †	1016887	800	7	5/16 - 18 x 1.50	.58	2.72	.97	.46	.34	1.87	1.12	.37	1015502
1 †	1016898	1000	12	3/8 - 16 x 1.50	.58	2.72	.97	.46	.34	1.87	1.05	.39	1015533
2	1016909	2500	28	1/2 - 13 x 2.00	.70	4.85	1.96	.87	.75	3.35	2.29	2.33	1015566
2 †	1016912	2500	28	1/2 - 13 x 2.50	1.20	4.85	1.96	.87	.75	3.35	2.29	2.36	1015575
2	1016920	4000	60	5/8 - 11 x 2.00	.70	4.85	1.96	.87	.75	3.35	2.16	2.41	1015599
2 †	1016924	4000	60	5/8 - 11 x 2.75	1.45	4.85	1.96	.87	.75	3.35	2.16	2.47	1015610
2	1016931	5000	100	3/4 - 10 x 2.25	.95	4.85	1.96	.87	.75	3.35	2.04	2.52	1015632
2 †	1016935	5000	100	3/4 - 10 x 2.75	1.45	4.85	1.96	.87	.75	3.35	2.04	2.59	1015643
3	1016942	7000*	100	3/4 - 10 x 2.75	.89	6.57	2.96	1.36	.94	4.87	2.97	6.72	1015646
3 †	1016946	7000*	100	3/4 - 10 x 3.50	1.64	6.57	2.96	1.36	.94	4.87	2.97	6.81	1015676
3	1016953	8000	160	7/8 - 9 x 2.75	.89	6.57	2.96	1.36	.94	4.87	2.84	6.84	1015698
3 †	1016957	8000	160	7/8 - 9 x 3.50	1.64	6.57	2.96	1.36	.94	4.87	2.84	6.96	1015707
3	1016964	10000	230	1 - 8 x 3.00	1.14	6.57	2.96	1.36	.94	4.87	2.72	7.09	1015731
3 †	1016969	10000	230	1 - 8 x 4.00	2.14	6.57	2.96	1.36	.94	4.87	2.72	7.31	1015740
4	1016975	15000	470	1-1/4 - 7 x 4.50	2.21	8.72	3.71	1.75	1.19	6.18	3.93	14.51	1015762
5	1016986	24000	800	1-1/2 - 6 x 6.75	3.00	12.55	4.71	2.39	1.75	8.48	5.52	37.73	1015799
5	1016997	30000	1100	2 - 4-1/2 x 6.75	3.00	12.55	4.71	2.39	1.75	8.48	5.02	40.69	1015830
6	1017001	50000	2100	2-1/2 - 4 x 8.0	4.00	16.88	5.75	3.00	2.25	11.00	8.03	88.00	6607795
7	1017005	75000	4300	3 - 4 x 10.5	5.00	19.50	6.45	3.75	2.75	14.16	8.50	166.00	-
8	1017009	100000	5100	3-1/2 - 4 x 13.0 #	7.00	22.09	7.75	4.00	3.25	15.91	9.28	265.00	-


5:1 Design Factor. *4.5:1 Design Factor when tested in 90 degree orientation. †Long Bolts are designed to be used with soft metal (i.e., aluminum) workpiece. While the long bolts may also be used with ferrous metal (i.e., steel & iron) workpiece, short bolts are designed for ferrous workpieces only. Hex head bolt used on Frame 8 (100,000 lb) Hoist Ring.

Load Rated

Fatigue Rated

APPLICATION AND WARNING INFORMATION
SECTION 17

HR-125M

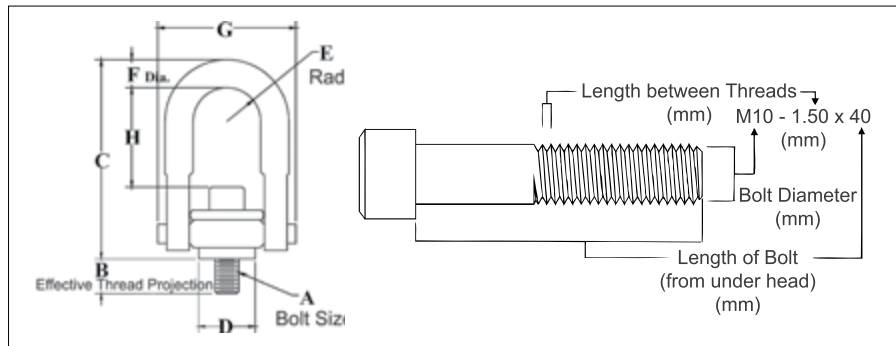


- Top washer has the following features:
 - The Working Load Limit and recommended torque value are permanently stamped into each washer.
 - Washer is color-coded for easy identification: Silver - Metric thread.
- Individually Proof Tested to 2-1/2 times Working Load Limit.
- Bolt specification is a Grade 12.9 alloy socket head cap screw to ISO 4762. All threads listed are metric (ASME B18.3.1m).
- Designed to be used with ferrous workpiece only.
- BOLT SIZE IDENTIFICATION: The size of the bolt will be stated as in the drawing above. Illustration shows meaning of each dimension given.


HR-125M Metric Threads

Frame Size No.	Stock No.	Working Load Limit (kg)		Torque in Nm	Dimensions (mm)								Weight Each (kg)	Replacement Bolt Kit Stock No.
		At a 5:1 Design Factor †	At a 4:1 Design Factor †		Bolt Size A	Effective Thread Projection Length B	C	D	Radius E	Diameter F	G	H		
1	1016602	400	500	10	M8X1.25X40	16.9	69.9	24.6	11.8	8.5	47.5	29.9	.17	1015875
1	1016613	450	550	16	M10X1.50X40	16.9	69.9	24.6	11.8	8.5	47.5	28.1	.18	1015884
2	1016624	1050	1300	38	M12X1.75X50	16.9	123	49.8	22.3	17.5	85.1	60.4	1.05	1015897
2	1016635	1900	2400	81	M16X2.00X60	26.9	123	49.8	22.3	17.5	85.1	56.3	1.11	1015906
2	1016644	2150	2700	136	M20X2.50X65	31.9	123	49.8	22.3	17.5	85.1	52.3	1.17	1015919
3	1016657	3000	3750	136	M20X2.50X75	27.8	167	75.2	34.7	25.4	124	76.6	3.09	1015930
3	1016668	4200	5250	312	M24X3.00X80	32.8	167	75.2	34.7	25.4	124	70.5	3.21	1015941
4	1016679	7000	8750	637	M30X3.50X120	61.7	222	94.2	44.5	30.5	157	102	6.53	1015952
5	1016690	11000	13750	1005	M36X4.00X150	54.0	318	120	60.7	44.5	215	142	16.8	1015963
5	1016701	12500	15600	1005	M42X4.50X160	64.0	318	120	60.7	44.5	215	136	17.4	1015974
5	1016712	13500	16900	1350	M48X5.00X160	74.0	318	120	60.7	44.5	215	130	18.0	1015986


† Individually proof loaded to 2-1/2 times the Working Load Limit based on the 4:1 design factor.



HR-1000

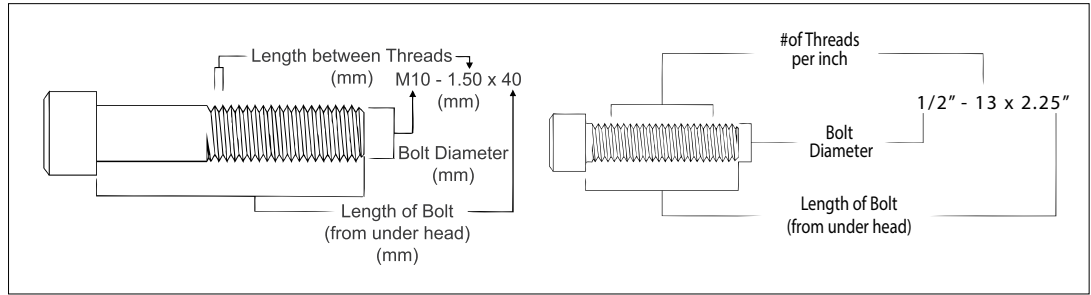

- Forged bail provides the following:
 - Easily readable raised lettering showing the name Crosby or "CG" and PIC for material traceability.
 - Greater durability providing the increased "Toughness" desired in potentially abusive field conditions.
 - Larger opening than standard hoist ring bail.
- Top washer is color-coded for easy identification (Red for UNC threads and Silver for Metric threads)
- The Working Load Limit and recommended torque value are permanently stamped into each washer.
- Individually Proof Tested to 2-1/2 times Working Load Limit.
- Available in both UNC thread and Metric thread style.
- UNC bolt specification is an alloy socket head cap screw to ASTM A 574. Metric bolt specification is a Grade 12.9 alloy socket head cap screw to ISO 4762.
- BOLT SIZE IDENTIFICATION: The size of the bolt will be stated as in the drawing. Illustration shows meaning of each dimension given.



HR-1000 UNC Threads

Frame Size No.	Stock No.	Working Load Limit (lb)	Torque in Ft. Lbs	Dimensions (in)								Weight Each (lb)	Replacement Bolt Kit Stock No.
				Bolt Size A	Eff. Thread Projection Length B	C	D	Radius E	F	G	H		
1	1068002	800	7	5/16 - 18 x 1.50	.52	3.69	.97	.62	.44	2.27	1.38	.60	1078200
1	1068006	1000	12	3/8 - 16 x 1.50	.52	3.69	.97	.62	.44	2.27	1.38	.62	1078204
2	1068010	2500	28	1/2 - 13 x 2.25	.69	6.26	1.96	1.25	.75	4.20	2.50	3.05	1078208
2 †	1068014	2500	28	1/2 - 13 x 2.75	1.19	6.26	1.96	1.25	.75	4.20	2.50	3.07	1078212
2	1068018	4000	60	5/8 - 11 x 2.25	.69	6.26	1.96	1.25	.75	4.20	2.50	3.11	1078216
2 †	1068022	4000	60	5/8 - 11 x 3.00	1.44	6.26	1.96	1.25	.75	4.20	2.50	3.18	1078220
2	1068026	5000	100	3/4 - 10 x 2.50	.94	6.26	1.96	1.25	.75	4.20	2.50	3.24	1078224
2 †	1068030	5000	100	3/4 - 10 x 3.00	1.44	6.26	1.96	1.25	.75	4.20	2.50	3.30	1078228
3	1068034	7000*	100	3/4 - 10 x 3.00	.85	8.66	2.96	1.63	1.00	6.25	3.25	10.09	1078232
3 †	1068038	7000*	100	3/4 - 10 x 3.50	1.35	8.66	2.96	1.63	1.00	6.25	3.25	10.21	1078236
3	1068042	8000	160	7/8 - 9 x 3.00	.85	8.66	2.96	1.63	1.00	6.24	3.25	10.21	1078240
3 †	1068046	8000	160	7/8 - 9 x 3.50	1.35	8.66	2.96	1.63	1.00	6.24	3.25	10.40	1078244
3	1068050	10000	230	1 - 8 x 3.50	1.35	8.66	2.96	1.63	1.00	6.24	3.25	10.50	1078248
3 †	1068054	10000	230	1 - 8 x 4.50	2.35	8.66	2.96	1.63	1.00	6.24	3.25	10.72	1078252
4	1068058	15000	470	1-1/4 - 7 x 5.00	2.09	11.21	3.71	2.00	1.25	7.82	4.00	21.90	1078256
4	1068062	24000	800	1-1/2 - 6 x 5.50	2.59	11.21	3.71	2.00	1.44	7.82	4.00	23.00	1078260

5:1 Design Factor. *4.5:1 Design Factor when tested in 90 degree orientation. †Long Bolts are designed to be used with soft metal (i.e., aluminum) workpiece.


HR-1000M Metric Threads

Frame Size No.	Stock No.	Working Load Limit (kg)		Torque in Nm	Dimensions (mm)									Weight Each (kg)	Replacement Bolt Kit Stock No.
		At a 5:1 Design Factor*	At a 4:1 Design Factor*		Bolt Size A	Eff. Thread Projection Length B	C	D	Radius E	F	G	H			
1	1068307	400	500	10	M8 x 1.25 x 40	15.2	93.7	24.6	15.7	11.2	57.7	35.1	0.3	1078401	
1	1068316	450	550	16	M10 x 1.50 x 40	15.2	93.7	24.6	15.7	11.2	57.7	35.1	0.3	1078410	
2	1068325	1050	1300	38	M12 x 1.75 x 55	15.5	162	49.8	31.8	19.1	107	63.5	1.5	1078429	
2	1068334	1900	2400	81	M16 x 2.00 x 65	25.5	162	49.8	31.8	19.1	107	63.5	1.5	1078438	
2	1068343	2150	2700	136	M20 x 2.50 x 70	30.5	162	49.8	31.8	19.1	107	63.5	1.6	1078447	
3	1068352	3000	3750	136	M20 x 2.50 x 80	25.4	220	75.2	41.4	25.4	159	82.6	4.6	1078456	
3	1068361	4200	5250	312	M24 x 3.00 x 90	35.4	220	75.2	41.4	25.4	159	82.6	4.8	1078463	
4	1068370	7000	8750	637	M30 x 3.50 x 140	66.2	285	94.2	50.8	31.8	199	102	9.7	1078472	
4	1068389	11000	13750	1005	M36 x 4.00 x 130	56.2	285	94.2	50.8	31.8	199	102	10.2	1078481	


*Individually proof loaded to 2-1/2 times the Working Load Limit based on the 4:1 Design Factor.



HR-1000CT

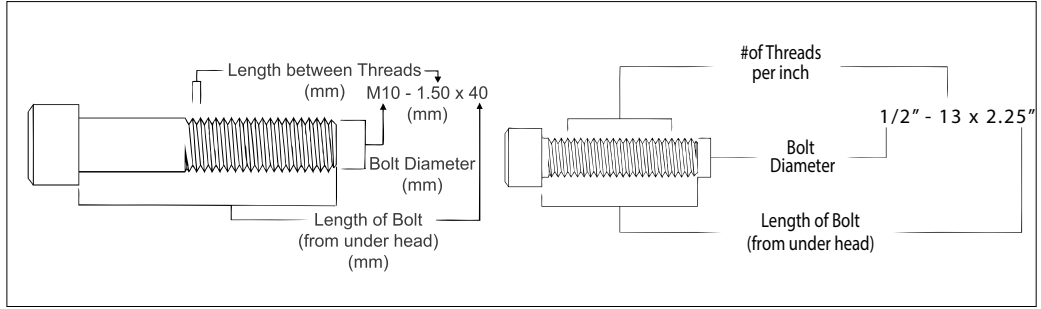

- All load bearing components are heat treated, Quenched & Tempered alloy steel.
- All components, with the exception of the retaining ring, are produced with maximum material hardness of 34 HRC.
- All primary load-bearing components have Charpy impact testing. The body, bushing, washer and bail meet impact requirements of 31 ft-lb min. avg. at -4°F. The bolt meets impact requirements of 20 ft-lb min. avg. at -150°F.
- Individually magnetic particle inspected with certification.
- Forged bail provides the following:
 - Easily readable raised lettering showing the name Crosby or "CG" and PIC for material traceability.
 - Greater durability providing the increased toughness desired in potentially abusive field conditions.
 - Larger opening than standard hoist ring bail.
- Bolt specification is an alloy socket head cap screw to ASTM A320 Grade L7 or L43.
- Top washer is color-coded for easy identification (blue for UN threads and grey for Metric threads).
- The Working Load Limit and recommended torque value are permanently stamped into each washer.
- Individually Proof Tested to 2 times Working Load Limit (90° and in-line).
- BOLT SIZE IDENTIFICATION: The size of the bolt will be stated as in the drawing above. Illustration shows meaning of each dimension given.
- Type approval and certification in accordance with DNV Offshore Standard DNV-OS-E101, Drilling Plant, Standard for Certification DNVGL-ST-0378, Lifting Appliances, and DNVGL-SI-0166.
- Individually serialized.
- 100% MPI all primary load bearing components.
- Coating: Thermo-diffusion galvanized.
- Optional bolt sizes available upon request.



HR-1000CT UNC Threads

Frame Size No.	Stock No.	Working Load Limit (lb)	Torque (ft-lb)	Dimensions (in)								Mass Each (lb)
				Bolt Size A	Effective Thread Projection Length B	C	D	Radius E	Diameter F	G	H	
2	6608103	1900	28	1/2 - 13 x 2.25	0.70	6.32	1.96	1.25	0.75	4.20	2.50	3
2	6608112	1900	28	1/2 - 13 x 2.75	1.20	6.32	1.96	1.25	0.75	4.20	2.50	3
2	6608121	3000	60	5/8 - 11 x 2.25	0.70	6.32	1.96	1.25	0.75	4.20	2.50	3
3	6608130	4800	100	3/4 - 10 x 3.00	0.85	8.59	2.96	1.63	1.00	6.25	3.25	11
3	6608139	6200	160	7/8 - 9 x 3.00	0.85	8.59	2.96	1.63	1.00	6.25	3.25	11
3	6608148	8300	230	1 - 8 x 3.50	1.35	8.59	2.96	1.63	1.00	6.25	3.25	11
4	6608149	12500	470	1-1/4 - 7 x 5.00	2.10	11.31	3.71	2.00	1.44	8.13	4.00	24
4	6607669	20000	800	1-1/2 - 6 x 5.50	2.60	11.31	3.71	2.00	1.44	8.13	4.00	27
4	6607727	20000	800	1-1/2 - 8 x 5.50	2.60	11.31	3.71	2.00	1.44	8.13	4.00	27
5	6607670	28000	1100	2 - 4.5 x 7.50	3.20	15.15	4.00	2.69	1.75	11.64	5.00	69
6	6607671	45000	2100	2 1/2 - 4 x 9.50	3.73	19.93	5.75	3.00	2.75	14.47	5.62	157


5:1 Design Factor.

Load Rated


Fatigue Rated

APPLICATION AND WARNING INFORMATION
SECTION 17

HR-1000MCT

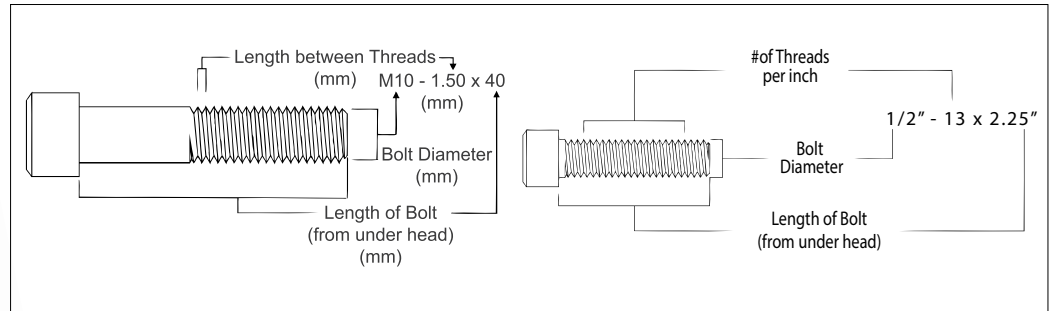

- All load bearing components are heat treated, Quenched & Tempered alloy steel.
- All components, with the exception of the retaining ring, are produced with maximum material hardness of 34 HRC.
- All primary load-bearing components have Charpy impact testing. The body, bushing, washer and bail meet impact requirements of 31 ft-lb min. avg. at -4°F. The bolt meets impact requirements of 20 ft-lb min. avg. at -150°F.
- Individually magnetic particle inspected with certification.
- Forged bail provides the following:
 - Easily readable raised lettering showing the name Crosby or "CG" and PIC Code for material traceability.
 - Greater durability providing the increased toughness desired in potentially abusive field conditions.
 - Larger opening than standard hoist ring bail.
- Bolt specification is an alloy socket head cap screw to ASTM A320 Grade L7 or L43.
- Top washer is color-coded for easy identification (blue for UN threads and grey for Metric threads).
- The Working Load Limit and recommended torque value are permanently stamped into each washer.
- Individually Proof Tested to 2 times Working Load Limit (90° and in-line).
- BOLT SIZE IDENTIFICATION: The size of the bolt will be stated as in the drawing above. Illustration shows meaning of each dimension given.
- Type approval and certification in accordance with DNV Offshore Standard DNV-OS-E101, Drilling Plant, Standard for Certification DNVGL-ST-0378, Lifting Appliances, and DNVGL-SI-0166.
- Individually serialized.
- 100% MPI all primary load bearing components.
- Coating: Thermo-diffusion galvanized.
- Optional bolt sizes available upon request.



11

HR-1000MCT Metric Threads

Frame Size No.	Stock No.	Working Load Limit (kg)		Torque (Nm)	Dimensions (mm)								Mass Each (kg)
		Design Factor 5:1	Design Factor 4:1		Bolt Size A	Eff. Thread Projection Length B	C	D	Radius E	Diameter F	G	H	
2	6630058	825	1,030	38	M12 x 1.75 x 55	15.6	160.6	49.7	31.8	19.1	106.7	63.5	1
2	6630059	1,350	1,690	81	M16 x 2.00 x 65	25.5	160.6	49.7	31.8	19.1	106.7	63.5	1
3	6630060	2,250	2,810	136	M20 x 2.50 x 80	25.3	218.2	75.1	41.4	25.4	158.8	82.6	5
3	6630061	3,175	3,970	312	M24 x 3.00 x 90	35.4	218.2	75.1	41.4	25.4	158.8	82.6	5
4	6630062	5,450	6,810	637	M30 x 3.50 x 140	65.9	287.3	94.1	50.8	36.6	206.5	101.6	11
4	6630063	7,450	9,310	1,005	M36 x 4.00 x 130	56.3	287.3	94.1	50.8	36.6	206.5	101.6	12
5	6630064	13,250	16,560	1,350	M48 x 5.00 x 180	70.7	384.9	101.6	68.3	44.5	295.6	127.0	30


5:1 Design Factor.

Load Rated

Fatigue Rated

APPLICATION AND WARNING INFORMATION
SECTION 17

SS-125UNC

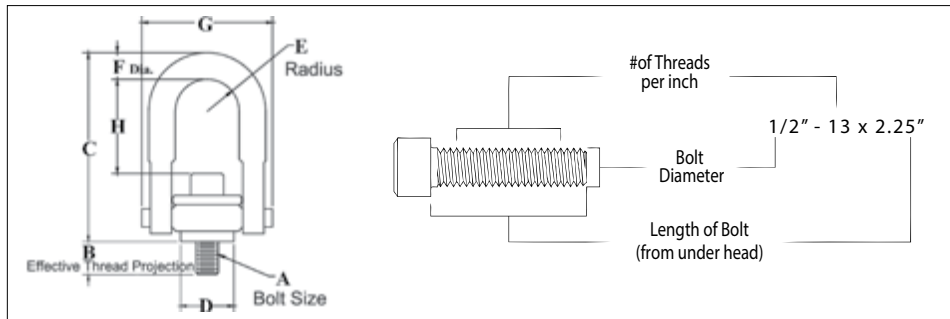

- All components are 316 stainless steel, except bolt retainers, which are made from 15-7 PH (UNS 15700) magnetic stainless steel.
- Rated at 100 percent at 90 degree angle.
- Each product has a Product Identification Code (PIC) for material traceability, along with the Working Load Limit and the name Crosby or "CG" stamped into it.
- Individually proof tested to 2 times the Working Load Limit with certification.
- Fatigue Rated to 20,000 cycles at 1-1/2 times the Working Load Limit.
- Washer is color-coded for easy identification (Red - UNC thread).
- Bolt specification is 316 stainless steel socket head cap screw to ASTM F837 Group 1 (316).
- BOLT SIZE IDENTIFICATION: The size of the bolt will be stated as in the drawing above. Illustration shows meaning of each dimension given.

SS-125UNC Threads

Frame Size No.	Stock No.	Working Load Limit (lb)	Torque (ft-lb)	Dimensions (in)								Weight Each (lb)
				Bolt Size A	Effective Thread Projection Length B	C	D	Radius E	Diameter F	G	H	
1	1065000	400	3.5	5/16 - 18 x 1.0	.29	2.67	.85	.43	.34	1.84	1.27	.30
1	1065004	400	3.5	5/16 - 18 x 1.25	.54	2.67	.85	.43	.34	1.84	1.27	.30
1	1065008	500	6	3/8 - 16 x 1.25	.54	2.67	.85	.43	.34	1.84	1.27	.30
2	1065016	1250	14	1/2 - 13 x 2.0	.78	4.78	1.45	.88	.69	3.52	2.31	2.6
2	1065020	1250	14	1/2 - 13 x 2.25	1.03	4.78	1.45	.88	.69	3.52	2.31	2.6
2	1065024	1250	14	1/2 - 13 x 2.5	1.28	4.78	1.45	.88	.69	3.52	2.31	2.6
2	1065028	2000	30	5/8 - 11 x 2.0	.78	4.78	1.45	.88	.69	3.52	2.18	2.6
2	1065032	2000	30	5/8 - 11 x 2.25	1.03	4.78	1.45	.88	.69	3.52	2.18	2.6
2	1065036	2000	30	5/8 - 11 x 2.5	1.28	4.78	1.45	.88	.69	3.52	2.18	2.6
2	1065040	2500	50	3/4 - 10 x 2.25	1.03	4.78	1.45	.88	.69	3.52	2.06	3.0
2	1065044	2500	50	3/4 - 10 x 2.75	1.53	4.78	1.45	.88	.69	3.52	2.06	3.0
3	1065048	3500	50	3/4 - 10 x 2.75	1.04	6.52	2.20	1.40	.94	5.14	3.06	7.0
3	1065052	3500	50	3/4 - 10 x 3.25	1.54	6.52	2.20	1.40	.94	5.14	3.06	7.0
3	1065056	4000	80	7/8 - 9 x 2.75	1.04	6.52	2.20	1.40	.94	5.14	2.93	7.0
3	1065060	4000	80	7/8 - 9 x 3.0	1.29	6.52	2.20	1.40	.94	5.14	2.93	7.0
3	1065064	5000	115	1 - 8 x 3.0	1.29	6.52	2.20	1.40	.94	5.14	2.81	7.5
3	1065068	5000	115	1 - 8 x 3.25	1.54	6.52	2.20	1.40	.94	5.14	2.81	7.5
3	1065072	5000	115	1 - 8 x 4.0	2.29	6.52	2.20	1.40	.94	5.14	2.81	7.5
4	1065080	7500	235	1-1/4 - 7 x 4.0	1.89	8.73	3.19	1.75	1.25	6.50	4.12	14.0
5	1065084	12000	400	1-1/2 - 6 x 5.5	2.70	12.47	4.87	2.25	1.75	8.55	6.41	34.0
5	1065088	15000	550	2 - 4.5 x 5.75	2.96	12.47	4.87	2.25	1.75	8.55	5.91	36.0
6	1065092	25000	1050	2-1/2 - 4 x 8.0	4.00	16.87	6.52	3.00	2.25	11.67	8.03	88.0
6	1065096	25000	1050	2-1/2 - 8 x 8.0	4.00	16.87	6.52	3.00	2.25	11.67	8.03	88.0
7	1065100	37500	2150	3 - 4 x 10.25	5.00	19.50	8.10	3.75	2.75	14.15	8.48	166.0
8	1065104	50000	2550	3-1/2 - 4 x 13	7.00	22.09	8.60	4.00	3.25	15.90	9.28	265.0


5:1 Design Factor.

Load Rated

Fatigue Rated

APPLICATION AND WARNING INFORMATION
SECTION 17

SS-125M

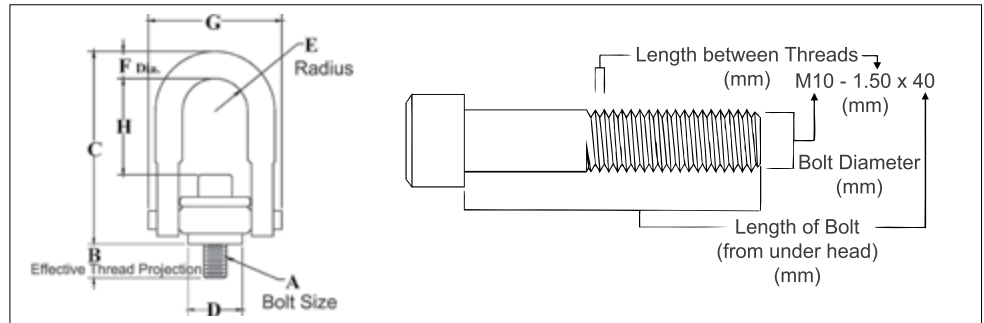

- All components are 316 stainless steel, except bolt retainers, which are made from 15-7 PH (UNS 15700) magnetic stainless steel.
- Rated at 100 percent at 90 degree angle.
- Each product has a Product Identification Code (PIC) for material traceability, along with the Working Load Limit and the name Crosby or "CG" stamped into it.
- Individually proof tested to 2 times the Working Load Limit with certification.
- Fatigue Rated to 20,000 cycles at 1-1/2 times the Working Load Limit.
- Washer is color-coded for easy identification (Silver - Metric thread)).
- Bolt specification is 316 stainless steel socket head cap screw to ASTM F 837M (316).
- BOLT SIZE IDENTIFICATION: The size of the bolt will be stated as in the drawing above. Illustration shows meaning of each dimension given.

SS-125M Metric Threads

Frame Size No.	Stock No.	Working Load Limit (kg)	Torque in Nm	Dimensions (mm)								Weight Each (kg)
				Bolt Size A	Effective Thread Projection Length B	C	D	Radius E	Diameter F	G	H	
1	1065203	200	4	M8 x 1.25	13	68	21.6	11	8.5	47	32	.17
1	1065207	250	8	M10 x 1.50	18	68	21.6	11	8.5	47	30	.17
2	1065211	525	18	M12 x 1.75	19	121	37	22	17.5	89	60	1.1
2	1065215	950	40	M16 x 2.00	29	121	37	22	17.5	89	56	1.1
2	1065219	1075	68	M20 x 2.50	34	121	37	22	17.5	89	52	1.2
3	1065223	1500	68	M20 x 2.50	32	166	56	36	25	131	78	3.0
3	1065227	2100	108	M24 x 3.00	37	166	56	36	25	131	74	3.1
3	1065231	2100	108	M30 x 3.50	58	206	56	36	25	131	108	3.1
4	1065235	3500	318	M30 x 3.50	42	222	81	45	31	165	106	6.3
4	1065239	3500	318	M30 x 3.50	62	222	81	45	31	165	106	6.4
5	1065243	5500	542	M36 x 4.00	64	317	124	57	43	217	166	15.5
5	1065247	6250	542	M42 x 4.50	82	317	124	57	43	217	160	16.0
5	1065251	6750	542	M48 x 5.00	82	317	124	57	43	217	154	16.8
6	1065255	11150	1423	M64 x 6.00	101	428	165	76	56	296	204	39.0
7	1065259	15750	2915	M72 x 6.00	132	495	206	95	69	359	220	74.0
8	1065263	22300	3459	M90 x 6.00	177	561	216	102	83	404	235	118.0

5:1 Design Factor

Load Rated

Fatigue Rated

APPLICATION AND WARNING INFORMATION
SECTION 17




S-265



- Widely used on farm machinery, trucks, steel hulled marine vessels and material handling equipment.
- Forged link and bracket — Quenched & Tempered.
- Excellent welding qualities.
- Reference American Welding Society specifications for proper welding procedures.



APPLICATION AND WARNING INFORMATION
SECTION 17

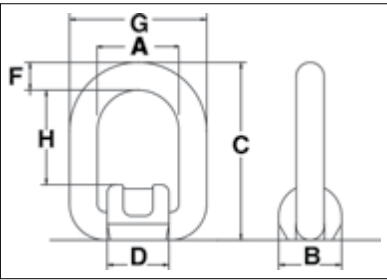

S-265 Forged Link

Working Load Limit (lb)		Stock No.	Weight Each (lb)	Dimensions (in)						
Design Factor 5:1	Design Factor 4:1			A	B	C	D	F	G	H
2200	2600	1290839	0.90	1.70	1.58	3.11	1.42	0.51	2.72	1.50
5500	7050	1290848	1.80	1.93	1.89	3.78	1.62	0.71	3.35	1.73
9250	11650	1290857	3.30	2.21	2.40	5.04	1.89	0.87	3.94	2.48
14100	17600	1290866	6.00	2.88	2.88	5.95	2.56	1.02	4.92	2.88
26450	33050	1290875	13.0	3.94	3.54	7.64	3.55	1.34	6.62	3.74




Raise your world podcast
A new podcast for lifting professionals



HR-1200



- Body components are alloy steel - Quenched & Tempered.
- Rated at 100% of Working Load Limit for angles up to 90 degrees.
- Each product is stamped with a Product Identification Code (PIC) for material traceability, along with a Working Load Limit, and the name Crosby or "CG."
- Hoist ring body is furnished with a yellow chromate finish for improved corrosion resistance.
- Utilize standard Crosby Red Pin® Shackles to connect to wire rope or synthetic slings (sold separately).
- Multiple bolt lengths available to meet specific application requirements.
- Individually Proof Tested to 2-1/2 times Working Load Limit.

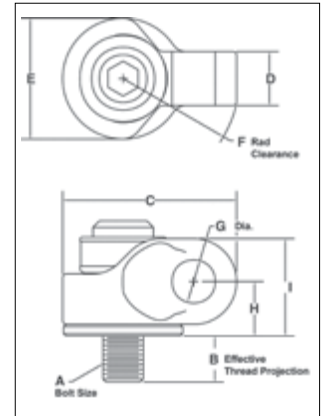

HR-1200 UNC Side Pull Hoist Rings

Weight Each (lb)	Working Load Limit (lb)	Stock No.	Hoist Ring Bolt Torque (ft-lb)	Bolt Size A	Eff. Thread Proj. (in) B	Dimensions (in)							Recommended Shackles		Replacement Bolt Kit Stock No.
						C	D	E	F	Dia. G	H	I	Shackles 209, 210, 213, 215, 2130, 2150	Web Shackles S-281	
													Nominal Size (in)	Web Size (in)	
.35	650	1067700	7	5/16-18x1.50	.59	1.93	.72	1.00	1.56	.80	.85	1.43	1/2, 5/8	2	1015502
.36	800	1067704	12	3/8-16x1.50	.59	1.93	.72	1.00	1.56	.80	.85	1.43	1/2, 5/8	2	1015533
1.4	2000	1067708	28	1/2-13x2.00	.71	2.97	.97	2.00	2.13	.93	1.07	1.79	5/8, 3/4	2, 1-1/2	1015566
1.4	2000	1067712	28	1/2-13x2.50	1.21	2.97	.97	2.00	2.13	.93	1.07	1.79	5/8, 3/4	2, 1-1/2	1015575
1.5	3000	1067716	60	5/8-11x2.00	.71	2.97	.97	2.00	2.13	.93	1.07	1.79	5/8, 3/4	2, 1-1/2	1015599
1.5	3000	1067720	60	5/8-11x2.75	1.46	2.97	.97	2.00	2.13	.93	1.07	1.79	5/8, 3/4	2, 1-1/2	1015610
4.5	5000	1067724	100	3/4-10x2.75	.90	4.32	1.34	3.00	3.00	1.07	1.35	2.42	7/8	2	1015646
4.6	5000	1067728	100	3/4-10x3.50	1.65	4.32	1.34	3.00	3.00	1.07	1.35	2.42	7/8	2	1015676
4.6	6500	1067732	160	7/8-9x2.75	.90	4.32	1.34	3.00	3.00	1.07	1.35	2.42	7/8	2	1015698
4.8	6500	1067736	160	7/8-9x3.50	1.65	4.32	1.34	3.00	3.00	1.07	1.35	2.42	7/8	2	1015707
4.8	8000	1067740	230	1-8x3.00	1.15	4.32	1.34	3.00	3.00	1.07	1.35	2.42	7/8	2	1015731
5.0	8000	1067744	230	1-8x4.00	2.15	4.32	1.34	3.00	3.00	1.07	1.35	2.42	7/8	2	1015740
10.2	14000	1067748	470	1-1/4-7x4.5	2.22	5.59	1.57	3.75	3.91	1.47	1.92	3.42	1, 1-1/8, 1-1/4	3	1015762
23.5	17200	1067756	800	1-1/2-6x6.5	2.98	7.31	2.06	4.75	5.19	2.11	2.41	4.29	1-3/8, 1-1/2, 1-3/4	-	-
25.3	29000	1067764	1100	2-4.5x6.5	2.98	7.31	2.06	4.75	5.19	2.11	2.41	4.29	1-3/8, 1-1/2, 1-3/4	-	-

5:1 Design Factor.

HR-1200M Metric Side Pull Hoist Rings

Weight Each (kg)	Working Load Limit (kg)	Stock No.	Hoist Ring Bolt Torque (Nm)	Bolt Size A	Eff. Thread Proj. (mm) B	Dimensions (mm)							Recommended Shackles		Replacement Bolt Kit Stock No.
						C	D	E	F	G	H	I	Shackles 209, 210, 213, 215, 2130, 2150	Web Shackles S-281	
													Nominal Size (in)	Web Size (in)	
.18	300	1067803	10	M8x1.25x40	16.9	49.0	18.3	25.4	39.6	20.3	21.6	36.3	1/2, 5/8	2	1015875
.18	400	1067807	16	M10x1.50x40	16.9	49.0	18.3	25.4	39.6	20.3	21.6	36.3	1/2, 5/8	2	1015884
.63	1000	1067811	38	M12x1.75x50	17.2	75.4	24.6	50.8	54.1	23.6	27.2	45.5	5/8, 3/4	2, 1-1/2	1015897
.68	1400	1067815	81	M16x2.0x60	27.2	75.4	24.6	50.8	54.1	23.6	27.2	45.5	5/8, 3/4	2, 1-1/2	1015906
2.0	2250	1067823	136	M20x2.5x75	28.1	110	34.0	76.2	76.2	27.2	34.4	61.5	7/8	2	1015930
2.2	3500	1067827	312	M24x3.0x80	33.1	110	34.0	76.2	76.2	27.2	34.4	61.5	7/8	2	1015941
4.5	6250	1067831	637	M30x3.5x120	65.1	142	39.9	95.3	99.3	37.3	48.8	86.9	1, 1-1/8, 1-1/4	3	1015952
10.4	7750	1067835	1005	M36x4.0x150	60.6	186	52.3	121	132	53.6	61.2	109	1-3/8, 1-1/2, 1-3/4	-	-
10.7	10000	1067839	1005	M42x4.5x160	70.6	186	52.3	121	132	53.6	61.2	109	1-3/8, 1-1/2, 1-3/4	-	-
11.0	13000	1067843	1350	M48x5.0x160	70.6	186	52.3	121	132	53.6	61.2	109	1-3/8, 1-1/2, 1-3/4	-	-

5:1 Design Factor.



APPLICATION AND WARNING INFORMATION
SECTION 17

The Lifting Point Family

The Gunnebo Industries range of lifting points is designed for most lifting and lashing applications. The GrabiQ line is a full system, from master link to lifting point.

Rotating Eye Lifting Point - RELP

The RELP is a compact and robust lifting point, ideal for top-mounting and when it is important to have quick and easy on-hooking. The lifting point is easy to assemble/disassemble with a standard allen key. On the bolt itself, information such as the working load limit, mounting torque, and manufacturing ID is stamped, so it is always available for the operator.

The RELP will automatically adjust to the loading direction which decreases the risk to load it incorrectly and endangering the lifting operation. For sensitive load surfaces the RELP is ideal, as the connecting sling hook will be positioned mainly parallel to the load surface, thus completely avoiding the hook causing damage on impact on the load. CE marked.



Rotating Lifting Point - RLP

The RLP has an easily dismountable D-ring to enable assembly of wiresling, master link, or hook directly onto the lifting point.

RLP has a hexagon bolt (RFID prepared) to make it easy to disassemble/assemble with a wrench. The bolt is also clearly marked with information such as working load limit, mounting torque, and manufacturer ID. The RLP rotates 360° and pivots 180°, making it strong, flexible, and reliable. CE marked.



De-centered Lifting Point - DLP

The DLP is designed to be folded over the housing when idle, allowing the lifting point to be almost completely stowed away when not in use.

The closed, oblong link is also equipped with a 'stay-up' function for easy on-hooking (for sizes up to M24), especially when there is limited space. This help prevents damage to the load due to impacts from the hook, as well as makes rigging fast and easy. The DLP is ideal in narrow spaces, such as corners or edge position, because the housing has a compact design.

DLP has a hexagon bolt (RFID prepared) to make it easy to disassemble/assemble with a wrench. The bolt is also clearly marked with information such as working load limit, mounting torque, and manufacturer ID so it is always available to the operator. CE marked.



11

Ball-bearing Lifting Point - BLP

The BLP is a versatile lifting point and can be safely used for most applications. The ball-bearings in the BLP allow the load to be rotated during the lift, which is especially good when maintenance is needed on heavy tools and other types of equipment.

If the load surface is sensitive to impacts or scratches, the BLP is a good choice because it builds out from the load, which makes it less likely that the lifting equipment will come in contact and cause damage. The housing (RFID prepared) of the BLP is in-house drop-forged for increased strength and has a hexagon shape for easy mounting and dismounting. The housing is also clearly marked with information such as working load limit, mounting torque, and manufacturer ID so it is always available to the operator. CE marked.






	RELP	RLP	DLP	BLP
Tight space	✓		✓	✓
Limited height (effective length)	✓	✓		
Vertical lift	✓	✓		✓
Angular lift		✓	✓	✓
Vertical rotation under load				✓
Tilting under load		✓	✓	✓
Sensitive load surface				✓
Single part lift	✓	✓		✓
Multiple part lift		✓	✓	✓
Integrated combination (hook or link)		✓		
RFID prepared		✓	✓	✓

This chart is intended to give guidance in choosing the right lifting point for your operation and is not rules for usage. For more information contact your closest Gunnebo Industries distributor.

Rotating Eye Lifting Point RELP

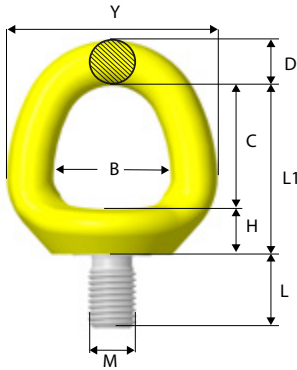

Stock No.	Code	Dimensions (in)										Weight (lb)
		B	C	D	E	H	L	L1	M	Y	Z	
Z102408	RELP-M8 x 1.25	1.1	1.10	0.43	1.57	0.55	0.59	1.65	0.31	1.96	1.14	0.44
Z102410	RELP-M10 x 1.5	1.1	1.10	0.43	1.57	0.55	0.59	1.65	0.39	1.96	1.14	0.44
Z102412	RELP-M12 x 1.75	1.26	1.29	0.51	1.81	0.51	0.78	1.85	0.47	2.28	1.49	0.66
Z102416	RELP-M16 x 2	1.54	1.61	0.59	2.09	0.62	0.94	2.24	0.62	2.75	1.57	1.10
Z102420	RELP-M20 x 2.5	1.65	1.69	0.63	2.36	0.70	1.18	2.36	0.78	3.07	1.81	1.54
Z102424	RELP-M24 x 3	1.97	2.00	0.75	2.68	0.78	1.41	2.79	0.94	3.46	1.73	2.42
Z102430	RELP-M30 x 3.5	2.36	2.44	1.02	3.35	1.10	1.77	3.54	1.18	4.40	2.51	5.29
Z102436	RELP-M36 x 4	2.83	2.83	1.26	3.82	1.25	2.12	4.09	1.41	5.35	2.91	9.03
Z102442	RELP-M42 x 4.5	3.23	3.22	1.5	4.72	1.45	2.48	4.68	1.65	6.22	3.58	14.7
Z102448	RELP-M48 x 5	3.7	3.77	1.69	5.59	1.53	2.83	5.31	1.88	7.08	4.01	21.8

Bolt according to: ISO 898-1 Class 10.9






RELP with UNC thread




Stock No.	Code	Dimensions (in)										Weight (lb)
		B	C	D	E	H	L	L1	Y	Z	M	
Z102508	RELP 5/16"-18 UNC	1.10	1.10	0.43	1.57	0.55	0.59	1.65	1.96	1.14	5/16"	0.44
Z102510	RELP 3/8"-16 UNC	1.10	1.10	0.43	1.57	0.55	0.59	1.65	1.96	1.14	3/8"	0.44
Z102512	RELP 1/2"-13 UNC	1.25	1.29	0.51	1.81	0.51	0.78	1.85	2.28	1.49	1/2"	0.66
Z102516	RELP 5/8"-11 UNC	1.53	1.61	0.59	2.08	0.62	0.94	2.24	2.75	1.57	5/8"	1.10
Z102520	RELP 3/4"-10 UNC	1.65	1.69	0.62	2.36	0.70	1.18	2.36	3.07	1.81	3/4"	1.54
Z102521	RELP 7/8"-9 UNC	1.65	1.69	0.62	2.36	0.70	1.18	2.36	3.07	1.81	7/8"	1.54
Z102524	RELP 1"-8 UNC	1.96	2.00	0.74	2.67	0.78	1.41	2.79	3.46	1.73	1"	2.42
Z102530	RELP 1 1/4"-7 UNC	2.36	2.44	1.02	3.34	1.10	1.77	3.54	4.40	2.51	1 1/4"	5.29
Z102536	RELP 1 1/2"-6 UNC	2.83	2.83	1.25	3.81	1.25	2.12	4.09	5.35	2.91	1 1/2"	9.03
Z102542	RELP 1 3/4"-5 UNC	3.22	3.22	1.49	4.72	1.45	2.48	4.68	6.22	3.58	1 3/4"	14.9
Z102548	RELP 2"-4.5 UNC	3.70	3.77	1.69	5.59	1.53	2.83	5.31	7.08	4.01	2"	22.0

Bolt according to: ISO 898-1 Class 10.9

Working Load Limits - RELP 4:1 Design Factor.

Symmetric Load (lb)										
No. of Legs	1	1	2	2	2 symmetric		3 & 4 symmetric		Tightening Torque	Allen Key
Angle β	0°	90°	0°	90°	45°	30°	45°	30°		
RELP -M8 x 1.25	1543	661	3086	1322	882	661	1322	882	10 Nm	8 mm
RELP 5/16"-18 UNC	1543	661	3086	1322	882	661	1322	882	7Ft.Lbs	5/16" UNC
RELP-M10x1,5	2645	1102	5290	2204	1543	1102	2204	1543	15 Nm	8 mm
RELP 3/8"-16 UNC	2645	1102	5290	2204	1543	1102	2204	1543	11Ft.Lbs	5/16" UNC
RELP - M12x1,75	4408	1763	8816	3526	2424	1763	3526	2645	27 Nm	8 mm
RELP 1/2"-13 UNC	4408	1763	8816	3526	2424	1763	3526	2645	20Ft.Lbs	5/16" UNC
RELP - M16x2	7714	3306	15428	6612	4628	3306	6832	4849	60 Nm	8 mm
RELP 5/8"-11 UNC	7714	3306	15428	6612	4628	3306	6832	4849	44Ft.Lbs	5/16" UNC
RELP - M20x2,5	13444	5290	26889	10579	7273	5290	11020	7934	90 Nm	19 mm
RELP 3/4"-10 UNC	11020	5069	22040	10138	6832	5069	10579	7494	66Ft.Lbs	3/4" UNC
RELP 7/8"-9 UNC	13444	6392	26889	12783	8948	6392	13422	9477	66Ft.Lbs	3/4" UNC
RELP - M24x3	17852	7273	35705	14546	10138	7273	15208	10800	135 Nm	19 mm
RELP 1"-8 UNC	17852	7273	35705	14546	10138	7273	15208	10800	100Ft.Lbs	3/4" UNC
RELP - M30x3,5	26668	10138	53337	20277	14106	10138	21158	15208	270 Nm	19 mm
RELP 1 1/4"-7 UNC	26668	10138	53337	20277	14106	10138	21158	15208	200Ft.Lbs	3/4" UNC
RELP - M36x4	35484	15648	70969	31297	21820	15648	32840	23362	320 Nm	19 mm
RELP 1 1/2"-6 UNC	35484	15648	70969	31297	21820	15648	32840	23362	236Ft.Lbs	3/4" UNC
RELP - M42x4,5	52896	20056	105792	40113	28079	20056	42118	29974	600 Nm	19 mm
RELP 1 3/4"-5 UNC	52896	20056	105792	40113	28079	20056	42118	29974	440Ft.Lbs	3/4" UNC
RELP - M48x5	70528	26668	141056	53337	37336	26668	56004	39892	800 Nm	19 mm
RELP 2"-4,5 UNC	70528	26668	141056	53337	37336	26668	56004	39892	590Ft.Lbs	3/4" UNC

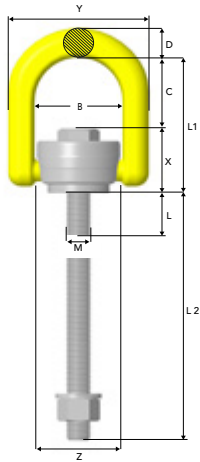

Rotating Lifting Point RLP



Stock No. Standard Bolt Length	L (in)	Stock No. Long Bolt Length**	L2 (in)	Code	Dimensions (in)								Weight (lb)***
					B	C	D	L1	M	X	Y	Z	
Z101708	0.62	Z1017080L	3.97	RLP-M8 x 1.25	1.65	1.37	0.47	2.44	0.31	1.06	2.51	Ø1.57	0.66
Z101710	0.62	Z1017100L	3.97	RLP-M10 x 1.5	1.65	1.37	0.47	2.44	0.39	1.06	2.51	Ø1.57	0.66
Z101712	0.98	Z1017120L	4.72	RLP-M12 x 1.75	2.24	1.81	0.75	3.46	0.47	1.65	3.58	Ø2.12	2.20
Z101716	0.98	Z1017160L	6.29	RLP-M16 x 2	2.24	1.81	0.75	3.46	0.62	1.65	3.58	Ø2.12	2.20
Z101720	1.41	Z1017200L	7.87	RLP-M20 x 2.5	3.27	2.16	1.1	4.33	0.78	2.16	5.23	Ø3.14	6.39
Z101724	1.41	Z1017240L	9.44	RLP-M24 x 3	3.27	2.16	1.1	4.33	0.94	2.16	5.23	Ø3.14	6.39
Z101730	2.28	Z1017300L	11.8	RLP-M30 x 3.5	4.49	2.75	1.34	5.82	1.18	3.07	7.16	Ø4.37	15.6
Z101736	2.28	Z1017360L	11.8	RLP-M36 x 4	4.49	2.75	1.34	5.82	1.41	3.07	7.16	Ø4.37	16.0
Z101742	3.18	Z1017420L	11.8	RLP-M42 x 4.5	5.87	3.58	1.57	7.48	1.65	3.89	9.01	Ø5.59	31.5
Z101748	3.18	Z1017480L	11.8	RLP-M48 x 5	5.87	3.58	1.57	7.48	1.88	3.89	9.01	Ø5.59	31.9

** Long Bolt supplied with nut and washer. *** Weight is calculated with standard bolt length.
Bolt, nut and washer according to: ISO 898-1 Class 10.9

RLP with UNC thread



Stock No. Standard Bolt Length	L (in)	Stock No. Long Bolt Length**	L2 (in)	Code	Dimensions (in)								Weight (lb)***
					B	C	D	L1	X	Y	Z	M	
Z101808	0.62	Z1018080L	3.97	RLP-5/16"-18 UNC	1.65	1.37	0.47	2.44	1.06	2.51	Ø1.57	5/16"	0.66
Z101810	0.62	Z1018100L	3.97	RLP-3/8"-16 UNC	1.65	1.37	0.47	2.44	1.06	2.51	Ø1.57	3/8"	0.66
Z101812	0.98	Z1018120L	4.72	RLP-1/2"-13 UNC	2.24	1.81	0.75	3.46	1.65	3.58	Ø2.12	1/2"	2.20
Z101816	0.98	Z1018160L	6.29	RLP-5/8"-11 UNC	2.24	1.81	0.75	3.46	1.65	3.58	Ø2.12	5/8"	2.20
Z101820	1.41	Z1018200L	7.87	RLP-3/4"-10 UNC	3.27	2.16	1.1	4.33	2.16	5.23	Ø3.14	3/4"	6.39
Z101821	1.41	Z1018210L	7.87	RLP-7/8"-9 UNC	3.27	2.16	1.1	4.33	2.16	5.23	Ø3.14	7/8"	6.39
Z101824	1.41	Z1018240L	9.44	RLP 1"-8 UNC	3.27	2.16	1.1	4.33	2.16	5.23	Ø3.14	1"	6.39
Z101830	2.28	Z1018300L	11.8	RLP 1 1/4"-7 UNC	4.49	2.75	1.34	5.82	3.07	7.16	Ø4.37	1 1/4"	15.6
Z101836	2.28	Z1018360L	11.8	RLP 1 1/2"-6 UNC	4.49	2.75	1.34	5.82	3.07	7.16	Ø4.37	1 1/2"	16.0
Z101842	3.18	Z1018420L	11.8	RLP 1 3/4"-5 UNC	5.87	3.58	1.57	7.48	3.89	9.01	Ø5.59	1 3/4"	31.7
Z101848	3.18	Z1018480L	11.8	RLP 2"-4.5 UNC	5.87	3.58	1.57	7.48	3.89	9.01	Ø5.59	2"	32.4

** Long Bolt supplied with nut and washer. *** Weight is calculated with standard bolt length.
Bolt, nut and washer according to: ISO 898-1 Class 10.9


Working Load Limits - RLP 4:1 Design Factor.

Symmetric Load (lb)										
	No. of Legs	1	1	2	2	2 Symmetric		3 & 4 Symmetric		
Angle β	0°	90°	0°	90°	45°	30°	45°	30°	Tightening Torque	Spanner Size
RLP - M8 x 1.25	1763	882	3526	1763	1102	882	1763	1322	10 Nm	13 mm
RLP 5/16"-18 UNC	1763	882	3526	1763	1102	882	1763	1322	7 Ft.lb	1/2"
RLP - M10 x 1.5	2645	1543	5290	3086	1984	1543	3086	2204	15 Nm	13 mm
RLP 3/8"-16 UNC	2645	1433	5290	2865	1984	1322	2865	1984	11 Ft.lb	1/2"
RLP - M12 x 1.75	4408	2645	8816	5290	3526	2645	5510	3967	27 Nm	24 mm
RLP 1/2"-13 UNC	4408	2645	8816	5290	3526	2645	5510	3967	20 Ft.lb	15/16"
RLP - M16 x 2	7053	4408	14106	8816	6171	4408	9257	6612	60 Nm	24 mm
RLP 5/8"-11 UNC	7053	4408	14106	8816	6171	4408	9257	6612	44 Ft.lb	15/16"
RLP - M20 x 2.5	12342	6171	24685	12342	8596	6171	12783	9257	90 Nm	32 mm
RLP 3/4"-10 UNC	11020	5510	22040	11020	7714	5510	11461	8155	66 Ft.lb	1 5/16"
RLP 7/8"-9 UNC	12342	6171	24685	12342	8596	6171	12783	9257	66 Ft.lb	1 5/16"
RLP - M24 x 3	17632	10138	35264	20277	14106	10138	21158	15208	135 Nm	32 mm
RLP 1"-8 UNC	17632	10138	35264	20277	14106	10138	21158	15208	100 Ft.lb	1 5/16"
RLP - M30 x 3.5	26448	13224	52896	26448	18514	13224	27770	19836	270 Nm	55 mm
RLP 1 1/4"-7 UNC	26448	13224	52896	26448	18514	13224	27770	19836	200 Ft.lb	2 1/4"
RLP - M36 x 4	30856	17632	61712	35264	24685	17632	37027	26448	320 Nm	55 mm
RLP 1 1/2"-6 UNC	30856	17632	61712	35264	24685	17632	37027	26448	236 Ft.lb	2 1/4"
RLP - M42 x 4.5	35264	30856	70528	61712	43198	30856	64798	46284	600 Nm	75 mm
RLP 1 3/4"-5 UNC	35264	30856	70528	61712	43198	30856	64798	46284	440 Ft.lb	3"
RLP - M48 x 5	44080	35264	88160	70528	49370	35264	74054	52896	800 Nm	75 mm
RLP 2" -4.5 UNC	44080	35264	88160	70528	49370	35264	74054	52896	590 Ft.lb	3"



Disassembly of the RLP is made easy by just folding the D-ring forward and push down.

De-centered Lifting Point DLP

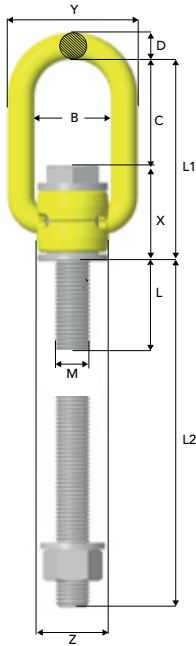

Stock No. Standard Bolt Length	L (in)	Stock No. Long Bolt Length**	L2 (in)	Code	Dimensions (in)											Weight (lb)***
					B	C	D	E	F	G	L1	M	X	Y	Z	
Z102208	0.51	Z1022080L	3.83	DLP-M8 x 1.25	1.38	1.88	0.39	1.54	0.55	0.39	3.07	0.31	1.18	2.16	1.02	0.66
Z102210	0.51	Z1022100L	3.83	DLP-M10 x 1.5	1.38	1.88	0.39	1.54	0.55	0.39	3.07	0.39	1.18	2.16	1.02	0.66
Z102212	0.90	Z1022120L	4.64	DLP-M12 x 1.75	1.38	1.88	0.47	2.01	0.79	0.55	3.58	0.47	1.73	2.32	1.25	1.10
Z102216	0.90	Z1022160L	6.22	DLP-M16 x 2	1.38	1.88	0.47	2.01	0.79	0.55	3.58	0.62	1.73	2.32	1.25	1.10
Z102220	1.33	Z1022200L	7.79	DLP-M20 x 2.5	2.13	3.46	0.70	2.8	1.1	0.70	5.70	0.78	2.28	3.54	1.88	3.52
Z102224	1.33	Z1022240L	9.37	DLP-M24 x 3	2.13	3.46	0.70	2.8	1.1	0.70	5.70	0.94	2.28	3.54	1.88	3.74
Z102230	2.08	Z1022300L	11.6	DLP-M30 x 3.5	3.23	3.70	1.02	4.09	1.54	1.06	7.16	1.18	3.46	4.80	2.95	11.0
Z102236	2.08	Z1022360L	11.6	DLP-M36 x 4	3.23	3.70	1.02	4.09	1.54	1.06	7.16	1.41	3.46	4.80	2.95	11.4
Z102242	2.87	Z1022420L	11.5	DLP-M42 x 4.5	3.94	4.09	1.41	5.35	2.13	1.33	8.50	1.65	4.44	6.14	4.33	25.5
Z102248	2.87	Z1022480L	11.5	DLP-M48 x 5	3.94	4.05	1.41	5.35	2.13	1.33	8.50	1.88	4.44	6.14	4.33	26.2

** Long Bolt supplied with nut and washer. *** Weight is calculated with standard bolt length.
Bolt, nut and washer according to: ISO 898-1 Class 10.9





DLP with UNC thread




Stock No. Standard Bolt Length	L (in)	Stock No. Long Bolt Length**	L2 (in)	Code	Dimensions (in)											Weight (lb)***
					B	C	D	E	F	G	L1	X	Y	Z	M	
Z102308	0.51	Z1023080L	3.83	DLP-5/16"-18 UNC	1.38	1.88	0.39	1.53	0.55	0.39	3.07	1.18	2.16	1.02	5/16"	0.66
Z102310	0.51	Z1023100L	3.83	DLP-3/8"-16 UNC	1.38	1.88	0.39	1.53	0.55	0.39	3.07	1.18	2.16	1.02	3/8"	0.66
Z102312	0.90	Z1023120L	4.64	DLP-1/2"-13 UNC	1.38	1.88	0.47	2.00	0.79	0.55	3.58	1.73	2.32	1.25	1/2"	1.10
Z102316	0.90	Z1023160L	6.22	DLP-5/8"-11 UNC	1.38	1.88	0.47	2.00	0.79	0.55	3.58	1.73	2.32	1.25	5/8"	1.10
Z102320	1.33	Z1023200L	7.79	DLP-3/4"-10 UNC	2.13	3.46	0.70	2.79	1.1	0.70	5.70	2.28	3.54	1.88	3/4"	3.52
Z102321	1.33	Z1023210L	7.79	DLP-7/8"-9 UNC	2.13	3.46	0.70	2.79	1.1	0.70	5.70	2.28	3.54	1.88	7/8"	3.52
Z102324	1.33	Z1023240L	9.37	DLP-1"-8 UNC	2.13	3.46	0.70	2.79	2.8	0.70	5.70	2.28	3.54	1.88	1"	3.74
Z102330	2.08	Z1023300L	11.6	DLP-1 1/4"-7 UNC	3.23	3.70	1.02	4.09	1.54	1.06	7.16	3.46	4.80	2.95	1 1/4"	12.1
Z102336	2.08	Z1023360L	11.6	DLP-1 1/2"-6 UNC	3.23	3.70	1.02	4.09	1.54	1.06	7.16	3.46	4.80	2.95	1 1/2"	12.5
Z102342	2.87	Z1023420L	11.5	DLP-1 3/4"-5 UNC	3.94	4.05	1.41	5.35	2.13	1.33	8.50	4.44	6.14	4.33	1 3/4"	25.7
Z102348	2.87	Z1023480L	11.5	DLP-2"-4.5 UNC	3.94	4.05	1.41	5.35	2.13	1.33	8.50	4.44	6.14	4.33	2"	26.6


** Long Bolt supplied with nut and washer. *** Weight is calculated with standard bolt length.
Bolt, nut and washer according to: ISO 898-1 Class 10.9

Working Load Limits - DLP 4:1 Design Factor.

Symmetric Load (lb)								
No. of Legs	1	2	2 Symmetric		3 & 4 Symmetric		Tightening Torque	Spanner Size
Angle β	0°-90°	0°-90°	45°	30°	45°	30°		
DLP-M8	771	1543	1102	771	1543	1102	10 Nm	13 mm
DLP-5/16"-18 UNC	771	1543	1102	771	1543	1102	7Ft.lb	1/2"
DLP-M10	1433	2865	1984	1433	3086	2204	15 Nm	13 mm
DLP-3/8"-16 UNC	1322	2645	1763	1322	2865	2204	11Ft.lb	1/2"
DLP-M12	2204	4408	3086	2204	4628	3306	27 Nm	24 mm
DLP-1/2"-13 UNC	2204	4408	3086	2204	4628	3306	20Ft.lb	15/16"
DLP-M16	3967	7934	5510	3967	8155	5951	60 Nm	24 mm
DLP-5/8"-11 UNC	3526	7053	4849	3526	7273	5290	44Ft.lb	15/16"
DLP - M20x2.5	5730	11461	7714	5730	11902	8596	90 Nm	32 mm
DLP 3/4"-10 UNC	4849	9698	6612	4849	10138	7273	66Ft.lb	1 5/16"
DLP 7/8"-9 UNC	5730	11461	7934	5730	11902	8596	66Ft.lb	1 5/16"
DLP - M24x3	9036	18073	12563	9036	18954	13444	135 Nm	32 mm
DLP 1"-8 UNC	9036	18073	12563	9036	18954	13444	100Ft.lb	1 5/16"
DLP - M30x3.5 (Preliminary)	11020	22040	15428	11020	23142	16530	270 Nm	55 mm
DLP 1 1/4"-7 UNC (Preliminary)	11020	22040	15428	11020	23142	16530	200Ft.lb	2 1/4"
DLP - M36x4 (Preliminary)	15428	30856	21599	15428	32399	23142	320 Nm	55 mm
DLP 1 1/2"-6 UNC (Preliminary)	15428	30856	21599	15428	32399	23142	236Ft.lb	2 1/4"
DLP - M42x4.5 (Preliminary)	33060	66120	46284	33060	69426	49590	600 Nm	75 mm
DLP 1 3/4"-5 UNC (Preliminary)	33060	66120	46284	33060	69426	49590	440Ft.lb	3"
DLP - M48x5 (Preliminary)	44080	88160	61712	44080	92568	66120	800 Nm	75 mm
DLP 2"-4.5 UNC (Preliminary)	44080	88160	61712	44080	92568	66120	590Ft.lb	3"



- The DLP can only be loaded from 0° to 110° degrees
- Rotation around screw axis when loaded at 0°-15° is not allowed.

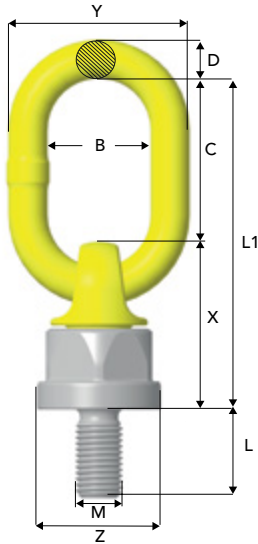

Ball-bearing lifting point BLP



Stock No.	Code	Dimensions (in)									Weight (lb)
		B	C	D	L	L1	M	X	Y	Z	
Z102008	BLP-M8 x 1.25	1.38	2.16	0.51	0.62	4.40	0.31	2.24	2.44	Ø1.65	1.32
Z102010	BLP -M10 x 1.5	1.38	2.16	0.51	0.78	4.40	0.39	2.24	2.40	Ø1.65	1.32
Z102012	BLP -M12 x 1.75	1.38	2.16	0.51	0.94	4.40	0.47	2.24	2.40	Ø1.65	1.32
Z102016	BLP-M16 x 2	1.38	2.16	0.51	1.18	4.40	0.62	2.24	2.40	Ø1.65	1.32
Z102020	BLP-M20 x 2.5	1.34	2.24	0.66	1.18	5.19	0.78	2.95	2.63	Ø2.32	2.86
Z102024	BLP-M24 x 3	1.97	2.75	0.66	1.41	5.70	0.94	2.95	3.30	Ø2.32	3.30
Z102030	BLP-M30 x 3.5	2.13	3.77	0.86	1.77	4.01	1.18	4.17	3.89	Ø2.91	7.49
Z102036	BLP-M36 x 4	2.13	3.77	0.86	2.12	4.01	1.41	4.17	3.89	Ø2.91	7.71
Z102042	BLP-M42 x 4.5	2.76	4.72	1.10	2.48	9.52	1.65	4.80	5.00	Ø3.66	14.3
Z102048	BLP-M48 x 5	2.76	4.72	1.10	2.83	9.52	1.88	4.80	5.00	Ø3.66	14.9

BLP with UNC thread




Stock No.	Code	Dimensions (in)									Weight (lb)
		B	C	D	L	L1	X	Y	Z	M	
Z102108	BLP-5/16"-18 UNC	1.38	2.16	0.51	0.62	4.40	2.24	2.40	Ø1.65	5/16"	1.32
Z102110	BLP-3/8"-16 UNC	1.38	2.16	0.51	0.78	4.40	2.24	2.40	Ø1.65	3/8"	1.32
Z102112	BLP-1/2"-13 UNC	1.38	2.16	0.51	0.94	4.40	2.24	2.40	Ø1.65	1/2"	1.32
Z102116	BLP-5/8"-11 UNC	1.38	2.16	0.51	1.18	4.40	2.24	2.40	Ø1.65	5/8"	1.32
Z102120	BLP-3/4"-10 UNC	1.34	2.24	0.66	1.18	5.19	2.95	2.63	Ø2.32	3/4"	2.86
Z102121	BLP-7/8"-9 UNC	1.97	2.24	0.66	1.18	5.19	2.95	2.63	Ø2.32	7/8"	2.86
Z102124	BLP-1"-8 UNC	2.13	2.75	0.66	1.49	5.70	2.95	3.30	Ø2.32	1"	3.30
Z102130	BLP-1 1/4"-7 UNC	2.13	3.77	0.86	1.88	7.95	4.17	3.89	Ø2.91	1 1/4"	7.49
Z102136	BLP-1 1/2"-6 UNC	2.76	3.77	0.86	2.24	7.95	4.17	3.89	Ø2.91	1 1/2"	7.93
Z102142	BLP-1 3/4"-5 UNC	2.76	4.72	1.10	2.63	9.52	4.80	5.00	Ø3.66	1 3/4"	14.5
Z102148	BLP-2"-4.5 UNC	2.76	4.72	1.10	2.99	9.52	4.80	5.00	Ø3.66	2"	15.4

Working Load Limits* - BLP

Symmetric Load (lb)	      										Tightening torque	Spanner Size
	No. of Legs	Angle β	0°*	90°	0°	0 - 45°	90°	0 - 45°	45° - 60°	0 - 45°	45° - 60°	
BLP -M8x1.25	1322		661	2645	882	1322	661	882	882	992	10 Nm	36 mm
BLP 5/16"-18 UNC	1322		661	2645	882	1322	661	882	882	992	7Ft.Lb	1 1/2" UNC
BLP -M10x1.5	2204		1102	4408	1543	2204	1102	1543	1543	1653	15 Nm	36 mm
BLP 3/8"-16 UNC	1763		882	3526	1102	1763	882	1102	1102	1322	11Ft.Lb	1 1/2" UNC
BLP -M12x1.75	3306		1653	6612	2425	3306	1653	2424	2424	2424	27 Nm	36 mm
BLP 1/2"-13 UNC	3306		1653	6612	2425	3306	1653	2424	2424	2424	20Ft.Lb	1 1/2" UNC
BLP -M16x2	6612		3306	13224	4630	6612	3306	4628	4628	4849	60 Nm	36 mm
BLP 5/8"-11 UNC	6612		3306	13224	4630	6612	3306	4628	4628	4849	44Ft.Lb	1 1/2" UNC
BLP -M20x2.5	11020		5510	22040	7716	11020	5510	7714	7714	8155	90 Nm	50 mm
BLP 3/4"-10 UNC	9918		4959	19836	6834	9918	4959	6832	6832	7273	66Ft.Lb	2" UNC
BLP 7/8"-9 UNC	13224		6612	26448	9259	13224	6612	9257	9257	9918	66Ft.Lb	2" UNC
BLP-M24x3	15428		8816	30856	12346	17632	8816	12342	12342	13224	135 Nm	50 mm
BLP-1"-8 UNC	15428		8816	30856	12346	17632	8816	12342	12342	13224	100Ft.Lb	2" UNC
BLP-M30x3.5	26448		13224	52896	18519	26448	13224	18514	18514	19836	270 Nm	65 mm
BLP-1 1/4"-7 UNC	26448		13224	52896	18519	26448	13224	18514	18514	19836	200Ft.Lb	2 5/8" UNC
BLP-M36x4	30856		17632	61712	24692	35264	17632	24685	24685	26448	320 Nm	65 mm
BLP-1 1/2"-6 UNC	30856		17632	61712	24692	35264	17632	24685	24685	26448	236Ft.Lb	2 5/8" UNC
BLP-M42x4.5	35264		22040	70528	30864	44080	22040	30856	30856	33060	600 Nm	85 mm
BLP-1 3/4"-5 UNC	35264		22040	70528	30864	44080	22040	30856	30856	33060	440Ft.Lb	3 1/8" UNC
BLP-M48x5	39672		28652	79344	40124	57304	28652	40113	40113	42978	800 Nm	85 mm
BLP-2"-4.5 UNC	39672		28652	79344	40124	57304	28652	40113	40113	42978	590Ft.Lb	3 1/8" UNC

* provided only axial loading takes place, ie no bending force applied in the direction of the thread.




Master link D



Stock No.	Code	WLL (lb)	Dimensions (in)				Weight (lb)
			E	D	L	R	
Z7008771	D-14-10	5510	2.16	0.55	2.55	0.94	0.88
Z7008781	D-17-10	8800	2.51	0.66	2.44	1.14	1.10
Z7008801	D-22-10	15428	2.99	0.86	3.54	1.29	2.20
Z7008791	D-27-10	22040	3.34	1.06	3.85	1.49	4.18
Z7008792	D-32-10	35300	4.48	1.25	5.47	1.96	7.71

4:1 Design Factor

The load bearing width must be at least 0.5 x E.



Weldable Lifting Point WLP




Stock No.	Code	WLL (lb)	Dimensions (in)				Weight (lb)
			B	G	L	X	
Z7009001	WLP-2.5T	5510	1.96	1.06	2.08	3.74	1.10
Z7009011	WLP-4T	8800	2.28	1.33	1.88	3.81	1.76
Z7009021	WLP-7T	15428	2.51	1.61	2.87	5.31	3.96
Z7009031	WLP-10T	22040	2.55	2.04	2.87	5.98	7.49
Z7009041	WLP-16T	35300	3.54	2.59	4.13	7.99	14.7

4:1 Design Factor

Supplied with spring for stay up function.

Master Link measurements, see Master Link D above.

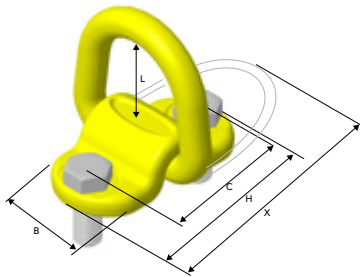

Screw-on Lifting Point SLP




Stock No.	Code	WLL (lb)	Dimensions (in)						Bolt Protrusion	Weight (lb)
			B	C	H	L	M (metric thread)	X		
Z7009881	SLP-1T	2204	1.96	2.83	3.85	2.12	M14	5.47	0.98	1.76
Z7009871	SLP-3T	6612	2.28	3.30	4.48	1.92	M16	5.66	1.10	2.86
Z7009861	SLP-5T	11020	2.51	4.56	6.29	2.79	M20	7.99	1.33	5.73

4:1 Design Factor

Supplied with bolt and spring for stay up function.

Bolt according to: ISO 898-1 Class 10.9.

Master Link measurements, see Master Link D above.



Universal Weld-On Hook - UKN



Stock No.	Code	WLL (lb)	Dimension (in)							Weight (lb)
			B	G	H	K	L	A	X	
Z1002560	UKN-0.75*	1 653	0.78	0.51	0.78	0.74	3.20	0.19	2.20	0.44
Z6511810	UKN-1*	2 204	1.06	0.66	0.98	0.98	3.74	0.23	2.83	1.32
Z7009060	UKN-2*	4 500	1.29	0.78	1.18	1.18	4.48	0.31	3.38	1.98
Z6455730	UKN-3	6 612	1.18	0.90	1.25	1.37	5.19	0.39	4.13	2.86
Z6521160	UKN-4	8 800	1.18	1.14	1.49	1.65	5.51	0.43	4.48	4.40
Z6455800	UKN-5	11 020	1.33	1.18	1.85	1.77	6.49	0.47	5.15	7.05
Z6515390	UKN-8	17 632	1.33	1.57	2.00	1.96	6.77	0.51	5.23	7.93
Z6456030	UKN-10	22 040	1.85	1.69	2.28	2.16	8.66	0.55	6.69	18.0
Z1007850	UKN-15	33 060	2.16	1.96	2.63	2.36	9.44	0.59	7.40	21.6
Z1007851	UKN-20	44080	2.55	2.36	3.34	2.36	10.8	0.59	8.14	27.3

* Welding plate slightly curved ** Safety factor 5:1 Fulfills requirements in: EN 474-1.

Gunnebo Industries LPE Lifting Point




Stock No.	Code	I (Bolt Length in)	Dimensions (in)											Weight Each (lb)
			A	B	C	D	E	F	G	H	b	c	h	
Z103408	LPE-M8x1.25 GrabiQ	0.51	1.81	1.18	0.35	1.18	1.14	0.2	1.38	2.05	0.98	0.28	1.77	0.33
Z103410	LPE-M10x1.5 GrabiQ	0.63	1.81	1.18	0.35	1.18	1.14	0.2	1.38	2.05	0.98	0.28	1.77	0.35
Z103412	LPE-M12x1.75 GrabiQ	0.75	2.13	1.46	0.51	1.42	1.38	0.31	1.65	2.44	1.14	0.35	2.09	0.6
Z103416	LPE-M16x2 GrabiQ	0.98	2.44	1.57	0.67	1.61	1.54	0.39	1.85	2.76	1.3	0.43	2.32	1.19
Z103420	LPE-M20x2.5 GrabiQ	1.18	3.07	1.85	0.87	1.97	1.93	0.47	2.28	3.5	1.61	0.55	2.95	1.98
Z103424	LPE-M24x3 GrabiQ	1.42	3.5	2.2	1.02	2.56	2.52	0.67	2.95	4.25	1.93	0.67	3.58	3.7
Z103430	LPE-M30x3.5 GrabiQ	1.77	4.45	2.76	1.26	3.15	3.07	0.75	3.62	5	2.28	0.87	4.13	6.31

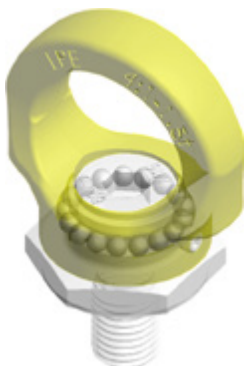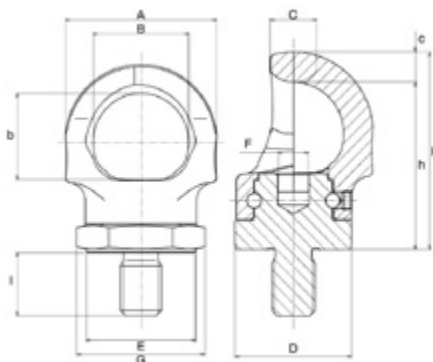

Gunnebo Industries LPV Screw Conversion Adaptor

Stock No.	Code	Bolt Thread	Dimensions (in)			Weight Each (lb)
			I (Bolt Length)	A	H	
Z103610	LPV-M10 / M20	M10 → M20	1.18	1.18	1.5	0.2
Z103612	LPV-M12 / M24	M12 → M24	1.38	1.42	1.73	0.33
Z103616	LPV-M16 / M30	M16 → M30	1.57	1.81	1.97	0.3
Z103620	LPV-M20 / M36	M20 → M36	1.97	2.17	2.44	0.99
Z103424	LPV-M24 / M42	M24 → M42	2.17	2.56	2.76	1.61
Z103430	LPV-M30 / M48	M30 → M48	2.36	2.95	2.95	2.07

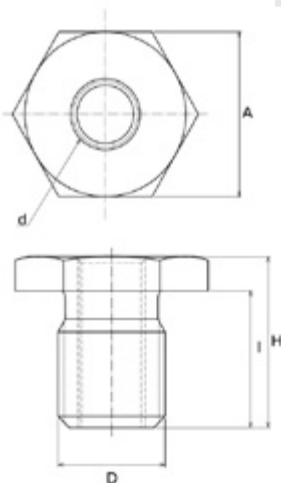

LPE (M16)



LPE (M16) + LPV(M30)



Spare Parts

Standard length bolt and long bolt for RLP and DLP are available as spare parts.

RDRLP - Metric

Standard length bolt including locking ring



Stock No.	Code
Z1017081	RDRLP-M8x1,25
Z1017101	RDRLP-M10x1,5
Z1017121	RDRLP-M12x1,75
Z1017161	RDRLP-M16x2
Z1017201	RDRLP-M20x2,5
Z1017241	RDRLP-M24x3
Z1017301	RDRLP-M30x3,5
Z1017361	RDRLP-M36x4
Z1017421	RDRLP-M42x4,5
Z1017481	RDRLP-M48x5

RDRLP - Metric

Long bolt including nut, locking ring and washer



Stock No.	Code
Z10170801L	RDRLP-M8 LB
Z10171001L	RDRLP-M10 LB
Z10171201L	RDRLP-M12 LB
Z10171601L	RDRLP-M16 LB
Z10172001L	RDRLP-M20 LB
Z10172401L	RDRLP-M24 LB
Z10173001L	RDRLP-M30 LB
Z10173601L	RDRLP-M36 LB
Z10174201L	RDRLP-M42 LB
Z10174801L	RDRLP-M48 LB

RDRLP - UNC

Standard length bolt including locking ring



Stock No.	Code
Z1018081	RDRLP-UNC 5/16"-18
Z1018101	RDRLP-UNC 3/8"-16
Z1018121	RDRLP-UNC 1/2"-13
Z1018161	RDRLP-UNC 5/8"-11
Z1018201	RDRLP-UNC 3/4"-10
Z1018211	RDRLP-UNC 7/8"-9
Z1018241	RDRLP-UNC 1"-8
Z1018301	RDRLP-UNC 1 1/4"
Z1018361	RDRLP-UNC 1 1/2"
Z1018421	RDRLP-UNC 1 3/4"
Z1018481	RDRLP-UNC 2"

RDRLP - UNC

Long bolt including nut, locking ring and washer



Stock No.	Code
Z10180801L	RDRLP-UNC 5/16" LB
Z10181001L	RDRLP-UNC 3/8" LB
Z10181201L	RDRLP-UNC 1/2" LB
Z10181601L	RDRLP-UNC 5/8" LB
Z10182001L	RDRLP-UNC 3/4" LB
Z10182101L	RDRLP-UNC 7/8" LB
Z10182401L	RDRLP-UNC 1" LB
Z10183001L	RDRLP-UNC 1 1/4" LB
Z10183601L	RDRLP-UNC 1 1/2" LB
Z10184201L	RDRLP-UNC 1 3/4" LB
Z10184801L	RDRLP-UNC 2" LB

RDDL P - Metric

Standard length bolt including locking ring



Stock No.	Code
Z1022081	RDDL P-M8x1,25
Z1022101	RDDL P-M10x1,5
Z1022121	RDDL P-M12x1,75
Z1022161	RDDL P-M16x2
Z1022201	RDDL P-M20x2,5
Z1022241	RDDL P-M24x3
Z1022301	RDDL P-M30
Z1022361	RDDL P-M36
Z1022421	RDDL P-M42
Z1022481	RDDL P-M48

RDDL P - Metric

Long bolt including nut, locking ring and washer



Stock No.	Code
Z10220801L	RDDL P M8 LB
Z10221001L	RDDL P M10 LB
Z10221201L	RDDL P M12 LB
Z10221601L	RDDL P M16 LB
Z10222001L	RDDL P M20 LB
Z10222401L	RDDL P M24 LB
Z10223001L	RDDL P M30 LB
Z10223601L	RDDL P M36 LB
Z10224201L	RDDL P M42 LB
Z10224801L	RDDL P M48 LB

RDDL P - UNC

Standard length bolt including locking ring



Stock No.	Code
Z1023081	RDDL P UNC 5/16"
Z1023101	RDDL P UNC 3/8"
Z1023121	RDDL P UNC 1/2"
Z1023161	RDDL P -UNC 5/8"
Z1023201	RDDL P -UNC 3/4"
Z1023211	RDDL P -UNC 7/8"
Z1023241	RDDL P -UNC 1"
Z1023301	RDDL P -UNC 1 1/4"
Z1023361	RDDL P UNC 1 1/2"
Z1023421	RDDL P -UNC 1 3/4"
Z1023481	RDDL P -UNC 2"

RDDL P - UNC

Long bolt including nut, locking ring and washer



Stock No.	Code
Z10230801L	RDDL P UNC 5/16" LB
Z10231001L	RDDL P UNC 3/8" LB
Z10231201L	RDDL P UNC 1/2" LB
Z10231601L	RDDL P UNC 5/8" LB
Z10232001L	RDDL P UNC 3/4" LB
Z10232101L	RDDL P UNC 7/8" LB
Z10232401L	RDDL P UNC 1" LB
Z10233001L	RDDL P UNC 1 1/4" LB
Z10233601L	RDDL P UNC 1 1/2" LB
Z10234201L	RDDL P UNC 1 3/4" LB
Z10234801L	RDDL P UNC 2" LB

Universal weld-on hook, UKN

The original excavator hook

Excavators are often used for material handling and lifting because they are available on most construction sites. However, rigging gear is often incorrectly attached, either to the teeth of the bucket or directly on the excavator arm, which is a dangerous practice that can lead to accidents.

The Gunnebo Industries UKN Hook was developed in 1975 – a solution that transformed the excavator into a lifting crane. The UKN Hook has been fitted to excavators and other applications for almost 50 years, either as an aftermarket product or directly by the manufacturer.

Today the UKN is the hook of choice for leading international excavator manufacturers.

Quality

- Forged alloy steel.
- Hardened and tempered.

100% proof-loaded

- Every hook is individually proof-loaded at 3 x WLL.

High durability

- Forged.
- Rated with a 5:1 safety factor.

Clear markings

- Country of origin.
- Traceability code.
- Model and size.

Prepared for welding


- Base plate prepared for welding.

Heavy duty latch

- Latch with handles for easy opening.
- Hardened and tempered.

Pin & spring

- Spring protection.
- Hardened and tempered hinge pin.
- Stainless steel spring.

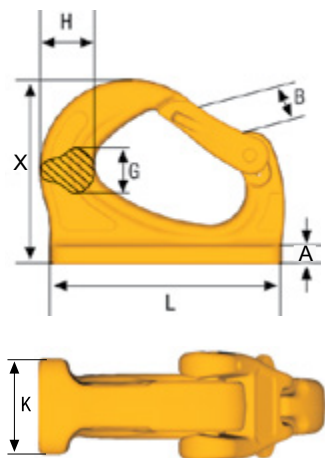

Universal Weld-On Hook - UKN

Stock No.	Code	WLL (lb)	Dimension (in)							Weight (lb)
			B	G	H	K	L	A	X	
Z1002560	UKN-0.75*	1,653	.79	.51	.79	.75	3.21	.20	2.20	.44
Z6511810	UKN-1*	2,204	1.06	0.67	0.98	0.98	3.74	.24	2.83	1.32
Z7009060	UKN-2*	4,500	1.30	.79	1.18	1.18	4.49	.31	3.39	1.98
Z6455730	UKN-3	6,612	1.18	.91	1.26	1.38	5.20	.39	4.13	2.87
Z6521160	UKN-4	8,800	1.18	1.14	1.50	1.65	5.51	.43	4.49	4.41
Z6455800	UKN-5	11,020	1.34	1.18	1.85	1.77	6.50	.47	5.16	7.05
Z6515390	UKN-8	17,632	1.34	1.57	2.01	1.97	6.77	.51	5.24	7.94
Z6456030	UKN-10	22,040	1.85	1.69	2.28	2.17	8.66	.55	6.69	18.08
Z1007850	UKN-15	33,060	2.17	1.97	2.64	2.36	9.45	.59	7.40	21.61
Z1007851	UKN-20	44,080	2.56	2.36	3.35	2.36	10.83	.59	8.15	27.34

* Welding plate slightly curved

** Safety factor 5:1

Fulfills requirements in: EN 474-1.

GREEN PIN[®]

PRODUCT CATALOGUE

IMPERIAL



LIFTING EYES



Applications

Eye bolts and eye nuts are used for lifting machines, appliances or any other objects which cannot be lifted by hand or by fork lift truck.

Range

Green Pin® offers eye bolts and nuts in grade 80 and stainless steel. To complement the Green Pin® assortment, Van Beest offers a wide range of other lifting eye bolts, eye nuts and lifting points, in metric and imperial sizes, with WLL's from 0.07 t up to 40 t.

Design

Grade 80 lifting points are made from alloy steel. The threads are standard metric and UNC. The eye bolts and eye nuts generally to DIN are drop forged from C15 steel. The ADA bolts have rolled thread bolts.

Each eye bolt and eye nut is generally marked with:

- Working Load Limit - e.g. 0.7 t, valid for in-line lifting
- manufacturer's symbol - e.g. Bs or GP
- thread diameter - e.g. M16 or $\frac{5}{8}$ "-11UNC
- traceability code - e.g. A1 or HA
- steel grade - C15 or 8 (8 only on AL, EL, ADA and PAS)
- item code - e.g. EL, AL, ADA, OL
- CE conformity code - CE

Finish

The eye bolts and eye nuts can be painted or electro-galvanized. Grade 80 lifting points are painted and supplied with a protective cover over the threads. Do not remove the cover until use.

Some products are mentioned as painted white*, but could be for some sizes delivered with a red finish.

Certification

Specific details of certificate availability can be found on each product page. Please verify your certification requirements at the time of order.

Instructions for use

Eye bolts and eye nuts should be inspected before use to ensure that:

- all markings are legible;
- an eye bolt or eye nut with the correct WLL has been selected;
- the thread is undamaged and clean;
- eye bolts and eye nuts are free from nicks, gouges and cracks;
- never grind, machine or cut an eye bolt or eye nut;
- eye bolts or eye nuts may not be heat treated as this may affect their WLL;
- never modify, repair or reshape an eye bolt or eye nut by machining, welding, heating or bending as this may affect the WLL;
- lifting points and the other components are of the same steel grade;
- always make sure that the lifting point is supporting the load correctly;
- lifting points should be seated well down in the hook;
- lifting points are not distorted or unduly worn;
- the WLL for complementary eyebolts/nuts are valid for in-line lifting only and have to be reduced for non-axial loading. For further details please refer to the standard: DIN 580 for eye bolts or DIN 582 for eye nuts;
- when used as a lifting device, the eye bolt or eye nut should always be fully screwed into the load in such a way that it fits properly against the load.

Testing

Generally load rated products are proof load and/or MPI tested.

For specific information on certificates we refer to the separate paragraph on certification.

Green Pin® eye bolts and nuts in grade 80 are proof load tested at 2.5 times the WLL.

Temperature

If extreme temperature situations occur, the following load reductions must be taken into account:

Temperature °Celsius	Temperature °Fahrenheit	Reduction for elevated temperatures New Working Load Limit
-40 °C up to 200 °C	-40 °F up to 392 °F	100 % of original WLL
200 - 300 °C	392 - 572 °F	90 % of original WLL
300 - 400 °C	572 - 752 °F	75 % of original WLL
> 400 °C	> 752 °F	not allowed

Note: ADA temperature range -4 °F up to +158 °F cannot be used above +158 °F.



Angle reduction tables for all Green Pin® eye bolts and nuts

group	number of leg(s)			1	2	1	2	2		2	3 & 4		3 & 4
													
	load direction			0°	0°	90°	90°	0-45°	45-60°	non-sym-metrical	0-45°	45-60°	non-sym-metrical
				safety factor			1	2	0.5	1	1.4	0.5	0.5
	article		diameter thread										
		AL / ALDIN (metric)	ALUNC (inch)	t	t	t	t	t	t	t	t	t	t
AL / ALDIN / ALUNC	GPAL06 / GPAL06DIN / GPAL06UNC	6	1/4	0.2	0.4	0.10	0.20	0.28	0.10	0.10	0.42	0.15	0.10
	GPAL08 / GPAL08DIN	8		0.4	0.8	0.20	0.40	0.56	0.20	0.20	0.84	0.30	0.20
	GPAL10 / GPAL10DIN / GPAL10UNC	10	3/8	0.7	1.4	0.35	0.70	0.98	0.35	0.35	1.47	0.53	0.35
	GPAL12 / GPAL12DIN / GPAL12UNC	12	1/2	1	2	0.50	1.00	1.40	0.50	0.50	2.10	0.75	0.50
	GPAL14 / GPAL14DIN	14		1.2	2.4	0.60	1.20	1.68	0.60	0.60	2.52	0.90	0.60
	GPAL16 / GPAL16DIN / GPAL16UNC	16	5/8	1.5	3	0.75	1.50	2.10	0.75	0.75	3.15	1.13	0.75
	GPAL18 / GPAL18DIN	18		2	4	1.00	2.00	2.80	1.00	1.00	4.20	1.50	1.00
	GPAL20 / GPAL20DIN / GPAL20UNC	20	3/4	2.5	5	1.25	2.50	3.50	1.25	1.25	5.25	1.88	1.25
	GPAL22 / GPAL22DIN / GPAL22UNC	22	7/8	3	6	1.50	3.00	4.20	1.50	1.50	6.30	2.25	1.50
	GPAL24 / GPAL24DIN / GPAL24UNC	24	1	4	8	2.00	4.00	5.60	2.00	2.00	8.40	3.00	2.00
	GPAL27 / GPAL27DIN / GPAL27UNC	27	1 1/8	5	10	2.50	5.00	7.00	2.50	2.50	10.50	3.75	2.50
	GPAL30 / GPAL30DIN / GPAL30UNC	30	1 1/4	6	12	3.00	6.00	8.40	3.00	3.00	12.60	4.50	3.00
	GPAL33 / GPAL33DIN	33		7	14	3.50	7.00	9.80	3.50	3.50	14.70	5.25	3.50
	GPAL36 / GPAL36DIN / GPAL36UNC	36	1 1/2	8	16	4.00	8.00	11.20	4.00	4.00	16.80	6.00	4.00
	GPAL39 / GPAL39DIN	39		9	18	4.50	9.00	12.60	4.50	4.50	18.90	6.75	4.50
	GPAL42 / GPAL42DIN / GPAL42UNC	42	1 3/4	10	20	5.00	10.00	14.00	5.00	5.00	21.00	7.50	5.00
	GPAL45 / GPAL45DIN / GPAL45UNC	45	2	15	30	7.50	15.00	21.00	7.50	7.50	31.50	11.25	7.50
	GPAL48 / GPAL48DIN	48		18	36	9.00	18.00	25.20	9.00	9.00	37.80	13.50	9.00
	GPAL52 / GPAL52DIN	52		20	40	10.00	20.00	28.00	10.00	10.00	42.00	15.00	10.00
	GPAL56 / GPAL56DIN / GPAL56UNC	56	2 1/2	25	50	12.50	25.00	35.00	12.50	12.50	52.50	18.75	12.50
GPAL60 / GPAL60DIN	60		30	60	15.00	30.00	42.00	15.00	15.00	63.00	22.50	15.00	
GPAL64* / GPAL64DIN*	64		36	72									

* GPAL64 90 % of original WLL: 5-30°



group	number of leg(s)		1	2	2	3 & 4
	load direction		0°	0°	0-30°	0-30°
	safety factor		1	2	1.4	2.1
	article	diameter thread (metric)	t	t	t	t
EL	GP EL06	6	0.2	0.4	0.28	0.42
	GP EL08	8	0.4	0.8	0.56	0.84
	GP EL10	10	0.7	1.4	0.98	1.47
	GP EL12	12	1	2	1.40	2.10
	GP EL14	14	1.2	2.4	1.68	2.52
	GP EL16	16	1.5	3	2.10	3.15
	GP EL18	18	2	4	2.80	4.20
	GP EL20	20	2.5	5	3.50	5.25
	GP EL22	22	3	6	4.20	6.30
	GP EL24	24	4	8	5.60	8.40
	GP EL27	27	5	10	7.00	10.50
	GP EL30	30	6	12	8.40	12.60
	GP EL33	33	7	14	9.80	14.70
	GP EL36	36	8	16	11.20	16.80
	GP EL39	39	9	18	12.60	18.90
	GP EL42	42	10	20	14.00	21.00
	GP EL45	45	15	30	21.00	31.50
	GP EL48	48	18	36	25.20	37.80

Note: - Never use EL with an angle less than 30° to the horizontal, as the maximum WLL increase significantly
 - WLL values only apply with thread bolts of quality class 8.8 min.



group	number of leg(s)			1	2	1	2	2		2	3 & 4	
	load direction			0°	0°	90°	90°	0-45°	45-60°	non-symmetrical	0-45°	45-60°
	safety factor			1	2	1	2	1.4	1	1	2.1	1.5
	article	diameter thread		t	t	t	t	t	t	t	t	t
ADA / ADAL / ADAUNC	GPADA08 / GPADA08L52(92) / GPADA08UNC	8	⁵ / ₁₆	0.4	0.8	0.4	0.8	0.56	0.4	0.4	0.84	0.60
	GPADA10 / GPADA10L125(62)	10		0.7	1.4	0.7	1.4	0.98	0.7	0.7	1.47	1.05
	GPADA10UNC		³ / ₈	0.6	1.2	0.6	1.2	0.84	0.6	0.6	1.26	0.90
	GPADA12 / GPADA12L125(62) / GPADA12UNC	12	¹ / ₂	1	2	1	2	1.40	1	1	2.10	1.50
	GPADA14	14		1.3	2.6	1.3	2.6	1.82	1.3	1.3	2.73	1.95
	GPADA16 / GPADA16L172(92) / GPADA16UNC	16		1.6	3.2	1.6	3.2	2.24	1.6	1.6	3.36	2.40
	GPADA18	18	⁵ / ₈	1.7	3.4	1.7	3.4	2.38	1.7	1.7	3.57	2.55
	GPADA20L112(172) / GPADA20UNC	20	³ / ₄	2.5	5	2.5	5	3.50	2.5	2.5	5.25	3.75
	GPADA22 / GPADA22UNC	22	⁷ / ₈	3	6	3	6	4.20	3	3	6.30	4.50
	GPADA24 / GPADA24L112(172) / GPADA24UNC	24		4	8	4	8	5.60	4	4	8.40	6.00
	GPADA27 / GPADA27L90	27		5	10	5	10	7.00	5	5	10.50	7.50
	GPADA30 / GPADA30L240(L90) / GPADA32UNC	30	¹ / ₄	6.8	13.6	6.8	13.6	9.52	6.8	6.8	14.28	10.20
	GPADA33	33		7	14	7	14	9.80	7	7	14.70	10.50
	GPADA36 / GPADA36L110 / GPADA38UNC	36	¹ / ₂	10.8	21.6	10.8	21.6	15.12	10.8	10.8	22.68	16.20
	GPADA39	39		10	20	10	20	14.00	10	10	21.00	15.00
	GPADA42	42		12.5	25	12.5	25	17.50	12.5	12.5	26.25	18.75
	GPADA50UNC		2	13.6	27.2	13.60	27.20	19.04	13.60	13.60	28.56	20.40

Note: WLL values only apply with nut of quality class 8.8 min. Class 10.9 and 12.9 recommended



group	number of leg(s)		1	2	2	3 & 4
	load direction		0°	0°	0-30°	0-30°
	safety factor		1	2	1.4	2.1
	article	diameter thread (metric)	t	t	t	t
OL	GPOL08	8	0.5	1	0.70	1.05
	GPOL10	10	0.9	1.8	1.26	1.89
	GPOL12	12	1.25	2.5	1.75	2.63
	GPOL14	14	1.5	3	2.10	3.15
	GPOL16	16	1.9	3.8	2.66	3.99
	GPOL18	18	2.25	4.5	3.15	4.73
	GPOL20	20	3.12	6.24	4.37	6.55
	GPOL22	22	3.8	7.6	5.32	7.98
	GPOL24	24	5	10	7.00	10.50
	GPOL27	27	6.25	12.5	8.75	13.13
	GPOL30	30	8	16	11.20	16.80
	GPOL33	33	9	18	12.60	18.90
	GPOL36	36	10	20	14.00	21.00
	GPOL39	39	12.5	25	17.50	26.25
	GPOL42	42	15	30	21.00	31.50

Note: Never use OL with an angle less than 30° to the horizontal, as the maximum WLL increase significantly



group	number of leg(s)			1	2	1	2	2		2	3 & 4		3 & 4
													
	load direction			0°	0°	90°	90°	0-45°	45-60°	non-sym-metrical	0-45°	45-60°	non-sym-metrical
	safety factor			1	2	1	2	1.4	1	1	2.1	1.5	1
	article	welding seam											
		size	length	t	t	t	t	t	t	t	t	t	t
PAS	GPPAS1	a8 z11	³ / ₃₂ x 1 ³ / ₈ inch	1.2	2.4	1.2	2.4	1.68	1.2	1.2	2.52	1.80	1.2
	GPPAS3	a9 z13	³ / ₃₂ x 1 ²¹ / ₃₂ inch	3.2	6.4	3.2	6.4	4.48	3.2	3.2	6.72	4.80	3.2
	GPPAS5	a11 z16	³ / ₃₂ x 1 ¹⁵ / ₁₆ inch	5.4	10.8	5.4	10.8	7.56	5.4	5.4	11.34	8.10	5.4
	GPPAS8	a14 z20	³ / ₃₂ x 2 ¹⁷ / ₃₂ inch	8.2	16.4	8.2	16.4	11.48	8.2	8.2	17.22	12.30	8.2
	GPPAS12	a16 z21	³ / ₃₂ x 3 ¹ / ₁₆ inch	12.8	25.6	12.8	25.6	17.92	12.8	12.8	26.88	19.20	12.8
	GPPAS15	a17 z23	³ / ₃₂ x 3 ¹⁷ / ₃₂ inch	15.5	31	15.5	31	21.70	15.5	15.5	32.55	23.25	15.5

Note: Welding must be done in accordance with DIN5817 resp. 15429, by a qualified welder according to EN 287-1

Assembly


The thread length should be adapted to the material of the load. For hard materials, the thread length must not be smaller than 1.5 times the diameter (e.g. M20, minimum length $1 \frac{3}{16}$ inch). For soft materials such as aluminium or brass, a length of 3 times the diameter is needed. For soft materials, consider using a longer length and through-hole mounting with a nut and washer on the other side.

The bolt thread and the tapped hole in the load must be compatible and both must be in a good condition. The tapping should be at least 20 % deeper than the thread length. The surface should be flat and perpendicular to the thread to enable full contact with the lifting point.

The material to which the lifting point is attached should be strong enough to withstand lifting forces without any deformation. The lifting points must fit perfectly on the material of the load to be lifted. Full contact between the lifting point and the surface is required.



1




2

1. The lifting points should match the size of the hook, so that they can be correctly positioned into the hook. The lifting point must be positioned in the saddle of the hook, not on the tip.
2. Never use a sling as a loop between two lifting points. Consider the centre of gravity of the load to position the lifting points (symmetrical to the centre). The tapping must be positioned at a distance of at least 3 times the diameter of the bolt from the edge of the load.

Fasten these lifting points by hand and without the use of any tools or leverage. The lifting point has to be tightened just deep enough so that the lower edge connects to the surface of the load.



For the ADA pivoting and rotating hoist rings, tighten the threaded bolt to the recommended torque (see the product table). Check the torque periodically, because the bolts may come loose during use. Check whether the hoist ring can pivot and rotate freely in all directions.

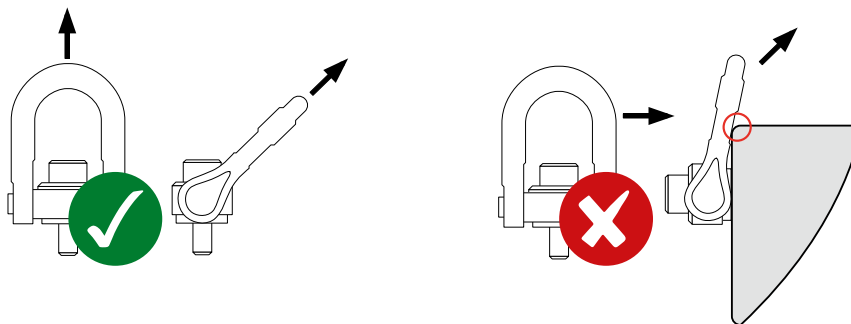

Products must be regularly inspected in accordance with the safety standards and regulations in the country of use. This is required because the products in use may be affected by issues such as wear, misuse and overloading, which may lead to deformation and alteration of the material structure. Inspection should take place at least every six months (follow the local rules in the country of use) and more frequently when the products are used in severe operating conditions.



AL



Green Pin® Lifting Eye GR8

Grade 80 lifting eye

- **Material:** alloy steel, grade 80, quenched and tempered
- **Safety factor:** MBL equals 5 x WLL
- **Standard:** EN1677-1 and ASME B30.26
- **Finish:** painted red or white
- **Temperature range:** -40 °F up to +392 °F
- **Certification:** 2.1 2.2 3.1 MTC^a MPI^b CE II A
- **Article code:** scan QR code to see article codes

Scan for
additional
product
details



working load limit	diameter thread	diameter base	diameter eye outside	diameter eye inside	length	thickness base	diameter	weight each
metric t	a mm	b inch	c inch	d inch	e inch	f inch	g inch	lbs
0.2	M6 x 1.00	$\frac{25}{32}$	$1 \frac{11}{32}$	$\frac{25}{32}$	$\frac{25}{32}$	$\frac{21}{32}$	$\frac{9}{32}$	0.11
0.4	M8 x 1.25	$\frac{25}{32}$	$1 \frac{11}{32}$	$\frac{25}{32}$	$\frac{15}{16}$	$\frac{21}{32}$	$\frac{9}{32}$	0.13
0.7	M10 x 1.50	$\frac{25}{32}$	$1 \frac{1}{2}$	$\frac{7}{8}$	$1 \frac{3}{16}$	$\frac{3}{4}$	$\frac{5}{16}$	0.18
1	M12 x 1.75	$\frac{31}{32}$	$1 \frac{27}{32}$	$1 \frac{1}{16}$	$1 \frac{13}{32}$	$\frac{29}{32}$	$\frac{13}{32}$	0.31
1.2	M14 x 2.00	$1 \frac{3}{16}$	$2 \frac{1}{4}$	$1 \frac{3}{16}$	$1 \frac{9}{16}$	$1 \frac{1}{16}$	$\frac{9}{16}$	0.55
1.5	M16 x 2.00	$1 \frac{13}{32}$	$2 \frac{15}{32}$	$1 \frac{3}{8}$	$2 \frac{5}{32}$	$1 \frac{7}{32}$	$\frac{9}{16}$	0.86
2	M18 x 2.50	$1 \frac{13}{32}$	$2 \frac{15}{32}$	$1 \frac{3}{8}$	$2 \frac{5}{32}$	$1 \frac{7}{32}$	$\frac{9}{16}$	0.88
2.5	M20 x 2.50	$1 \frac{9}{16}$	$2 \frac{27}{32}$	$1 \frac{9}{16}$	$2 \frac{5}{16}$	$1 \frac{11}{32}$	$\frac{5}{8}$	1.28
3	M22 x 2.50	$1 \frac{21}{32}$	$3 \frac{7}{32}$	$1 \frac{25}{32}$	$2 \frac{19}{32}$	$1 \frac{1}{2}$	$\frac{3}{4}$	1.7
4	M24 x 3.00	$2 \frac{5}{32}$	$3 \frac{3}{4}$	$2 \frac{5}{32}$	$3 \frac{5}{16}$	$1 \frac{9}{16}$	$\frac{25}{32}$	2.62
5	M27 x 3.00	$2 \frac{5}{32}$	$3 \frac{3}{4}$	$2 \frac{5}{32}$	$3 \frac{5}{16}$	$1 \frac{9}{16}$	$\frac{25}{32}$	2.6
6	M30 x 3.50	$2 \frac{3}{8}$	$4 \frac{1}{4}$	$2 \frac{3}{8}$	$3 \frac{29}{32}$	2	$\frac{15}{16}$	4.12
7	M33 x 3.50	$2 \frac{3}{8}$	$4 \frac{1}{4}$	$2 \frac{3}{8}$	$3 \frac{29}{32}$	2	$\frac{15}{16}$	4.32
8	M36 x 4.00	$2 \frac{9}{16}$	$4 \frac{21}{32}$	$2 \frac{11}{16}$	$4 \frac{19}{32}$	$1 \frac{7}{8}$	$\frac{31}{32}$	5.38
9	M39 x 4.00	$2 \frac{9}{16}$	$4 \frac{21}{32}$	$2 \frac{11}{16}$	$4 \frac{19}{32}$	$1 \frac{7}{8}$	$\frac{31}{32}$	5.71
10	M42 x 4.50	$2 \frac{3}{4}$	$5 \frac{19}{32}$	$3 \frac{5}{32}$	$5 \frac{5}{16}$	$2 \frac{13}{32}$	$1 \frac{7}{32}$	9.13
15	M45 x 4.50	$2 \frac{3}{4}$	$5 \frac{19}{32}$	$3 \frac{5}{32}$	$5 \frac{5}{16}$	$2 \frac{13}{32}$	$1 \frac{7}{32}$	9.15
18	M48 x 5.00	$3 \frac{3}{4}$	$7 \frac{1}{8}$	$3 \frac{13}{16}$	$5 \frac{29}{32}$	$2 \frac{23}{32}$	$1 \frac{21}{32}$	18.12
20	M52 x 5.00	$3 \frac{3}{4}$	$7 \frac{1}{8}$	$3 \frac{13}{16}$	$5 \frac{29}{32}$	$2 \frac{23}{32}$	$1 \frac{21}{32}$	18.85
25	M56 x 5.50	$3 \frac{3}{4}$	$7 \frac{1}{8}$	$3 \frac{13}{16}$	$5 \frac{29}{32}$	$2 \frac{23}{32}$	$1 \frac{21}{32}$	19.51
30	M60 x 5.50	$3 \frac{3}{4}$	$7 \frac{1}{8}$	$3 \frac{13}{16}$	$5 \frac{29}{32}$	$2 \frac{23}{32}$	$1 \frac{21}{32}$	20.2
36	M64 x 6.00	$3 \frac{3}{4}$	$7 \frac{1}{8}$	$3 \frac{13}{16}$	$5 \frac{29}{32}$	$2 \frac{23}{32}$	$1 \frac{21}{32}$	21.1


CAD INFO



- **Material:** alloy steel, grade 80, quenched and tempered
- **Safety factor:** MBL equals 5 x WLL
- **Standard:** EN1677-1 and ASME B30.26
- **Finish:** painted red or white
- **Temperature range:** -40 °F up to +392 °F
- **Certification:** 2.1 2.2 3.1 MTC^a MPI^b CE IIA
- **Article code:** scan QR code to see article codes



ALDIN





working load limit	diameter thread	diameter base	diameter eye outside	diameter eye inside	length	thickness base	diameter	weight each
metric t	a mm	b inch	c inch	d inch	e inch	f inch	g inch	lbs
0.2	M6 x 1.00	²⁵ / ₃₂	1 ¹¹ / ₃₂	²⁵ / ₃₂	¹ / ₂	²¹ / ₃₂	⁹ / ₃₂	0.11
0.4	M8 x 1.25	²⁵ / ₃₂	1 ¹¹ / ₃₂	²⁵ / ₃₂	¹ / ₂	²¹ / ₃₂	⁹ / ₃₂	0.11
0.7	M10 x 1.50	²⁵ / ₃₂	1 ¹ / ₂	⁷ / ₈	²¹ / ₃₂	³ / ₄	⁵ / ₁₆	0.18
1	M12 x 1.75	³¹ / ₃₂	1 ²⁷ / ₃₂	1 ¹ / ₁₆	¹³ / ₁₆	²⁹ / ₃₂	¹³ / ₃₂	0.29
1.2	M14 x 2.00	1 ³ / ₁₆	2 ¹ / ₄	1 ³ / ₁₆	1 ¹ / ₁₆	1 ¹ / ₁₆	⁹ / ₁₆	0.53
1.5	M16 x 2.00	1 ¹³ / ₃₂	2 ¹⁵ / ₃₂	1 ³ / ₈	1 ¹ / ₁₆	1 ⁷ / ₃₂	⁹ / ₁₆	0.75
2	M18 x 2.50	1 ¹³ / ₃₂	2 ¹⁵ / ₃₂	1 ³ / ₈	1 ³ / ₁₆	1 ⁷ / ₃₂	⁹ / ₁₆	0.79
2.5	M20 x 2.50	1 ⁹ / ₁₆	2 ²⁷ / ₃₂	1 ⁹ / ₁₆	1 ³ / ₁₆	1 ¹¹ / ₃₂	⁵ / ₈	1.15
3	M22 x 2.50	1 ²¹ / ₃₂	3 ⁷ / ₃₂	1 ²⁵ / ₃₂	1 ¹³ / ₃₂	1 ¹ / ₂	³ / ₄	1.63
4	M24 x 3.00	2 ⁵ / ₃₂	3 ³ / ₄	2 ⁵ / ₃₂	1 ¹³ / ₃₂	1 ⁹ / ₁₆	²⁵ / ₃₂	2.2
5	M27 x 3.00	2 ⁵ / ₃₂	3 ³ / ₄	2 ⁵ / ₃₂	1 ²⁵ / ₃₂	1 ⁹ / ₁₆	²⁵ / ₃₂	2.27
6	M30 x 3.50	2 ³ / ₈	4 ¹ / ₄	2 ³ / ₈	1 ²⁵ / ₃₂	2	¹⁵ / ₁₆	3.66
7	M33 x 3.50	2 ³ / ₈	4 ¹ / ₄	2 ³ / ₈	2 ¹ / ₈	2	¹⁵ / ₁₆	3.66
8	M36 x 4.00	2 ⁹ / ₁₆	4 ²¹ / ₃₂	2 ¹¹ / ₁₆	2 ¹ / ₈	1 ⁷ / ₈	³¹ / ₃₂	4.48
9	M39 x 4.00	2 ⁹ / ₁₆	4 ²¹ / ₃₂	2 ¹¹ / ₁₆	2 ¹⁵ / ₃₂	1 ⁷ / ₈	³¹ / ₃₂	4.59
10	M42 x 4.50	2 ³ / ₄	5 ¹⁹ / ₃₂	3 ⁵ / ₃₂	2 ¹⁵ / ₃₂	2 ¹³ / ₃₂	1 ⁷ / ₃₂	7.43
15	M45 x 4.50	2 ³ / ₄	5 ¹⁹ / ₃₂	3 ⁵ / ₃₂	2 ¹¹ / ₁₆	2 ¹³ / ₃₂	1 ⁷ / ₃₂	7.65
18	M48 x 5.00	3 ³ / ₄	7 ¹ / ₈	3 ¹³ / ₁₆	2 ¹¹ / ₁₆	2 ²³ / ₃₂	1 ²¹ / ₃₂	15.81
20	M52 x 5.00	3 ³ / ₄	7 ¹ / ₈	3 ¹³ / ₁₆	3 ¹ / ₁₆	2 ²³ / ₃₂	1 ²¹ / ₃₂	16.6
25	M56 x 5.50	3 ³ / ₄	7 ¹ / ₈	3 ¹³ / ₁₆	3 ¹ / ₁₆	2 ²³ / ₃₂	1 ²¹ / ₃₂	16.58
30	M60 x 5.50	3 ³ / ₄	7 ¹ / ₈	3 ¹³ / ₁₆	3 ¹⁷ / ₃₂	2 ²³ / ₃₂	1 ²¹ / ₃₂	17.15
36	M64 x 6.00	3 ³ / ₄	7 ¹ / ₈	3 ¹³ / ₁₆	3 ¹⁷ / ₃₂	2 ²³ / ₃₂	1 ²¹ / ₃₂	18.56

CAD INFO



ALUNC



Green Pin® Lifting Eye UNC GR8

Grade 80 lifting eye UNC

- **Material:** alloy steel, grade 80, quenched and tempered
- **Safety factor:** MBL equals 5 x WLL
- **Standard:** EN1677-1 and ASME B30.26
- **Finish:** painted red or white
- **Temperature range:** -40 °F up to +392 °F
- **Certification:** 2.1 2.2 3.1 MTC^a MPI^b CE IIA
- **Article code:** scan QR code to see article codes

Scan for
additional
product
details



working load limit	diameter thread	diameter base	diameter eye outside	diameter eye inside	length	thickness base	diameter	weight each
metric t	a inch	b inch	c inch	d inch	e inch	f inch	g inch	lbs
0.2	1/4 - 20UNC	25/32	1 11/32	25/32	25/32	21/32	9/32	0.11
0.7	3/8 - 16UNC	25/32	1 1/2	7/8	1 3/16	3/4	5/16	0.18
1	1/2 - 13UNC	31/32	1 27/32	1 1/32	1 13/32	29/32	13/32	0.31
1.5	5/8 - 11UNC	1 13/32	2 9/16	1 3/8	2 3/32	1 3/16	9/16	0.84
2.5	3/4 - 10UNC	1 9/16	2 7/8	1 17/32	2 9/32	1 11/32	5/8	1.21
3	7/8 - 9UNC	1 21/32	3 7/32	1 23/32	2 17/32	1 1/2	3/4	1.79
4	1 - 8UNC	2 5/32	3 3/4	2 1/8	3 5/16	1 9/16	25/32	2.51
5	1 1/8 - 7UNC	2 5/32	3 3/4	2 1/8	3 5/16	1 9/16	25/32	2.67
6	1 1/4 - 7UNC	2 3/8	4 1/4	2 5/16	3 29/32	1 15/16	15/16	4.19
8	1 1/2 - 6UNC	2 9/16	4 21/32	2 5/8	4 19/32	1 25/32	31/32	5.56
10	1 3/4 - 5UNC	2 3/4	5 19/32	3 5/32	5 5/16	2 13/32	1 7/32	9.39
15	2 - 4 1/2UNC	2 3/4	5 19/32	3 5/32	5 5/16	2 13/32	1 7/32	10.27
25	2 1/2 - 4UNC	3 3/4	7 1/8	3 13/16	5 29/32	2 23/32	1 21/32	21.1

CAD INFO

Green Pin® Eye Nut GR8

Grade 80 eye nut



Scan for
additional
product
details



- **Material:** alloy steel, grade 80, quenched and tempered
- **Safety factor:** MBL equals 5 x WLL
- **Standard:** EN1677-1 and ASME B30.26
- **Finish:** painted white
- **Temperature range:** -40 °F up to +392 °F
- **Certification:** 2.1 2.2 3.1 MTC^a MPI^b CE IIA
- **Article code:** scan QR code to see article codes



EL





working load limit	diameter thread	diameter base	width	width inside	thickness base	length inside	diameter	thickness	weight each
metric t	a mm	b inch	c inch	d inch	e inch	f inch	g inch	h inch	lbs
0.2	M6 x 1.00	1 ⁷ / ₃₂	2	1 ³ / ₁₆	⁹ / ₁₆	1 ²⁵ / ₃₂	⁷ / ₁₆	¹ / ₄	0.33
0.4	M8 x 1.25	1 ⁷ / ₃₂	2	1 ³ / ₁₆	⁹ / ₁₆	1 ²⁵ / ₃₂	⁷ / ₁₆	¹ / ₄	0.33
0.7	M10 x 1.50	1 ⁷ / ₃₂	2	1 ³ / ₁₆	⁹ / ₁₆	1 ²⁵ / ₃₂	⁷ / ₁₆	¹ / ₄	0.33
1	M12 x 1.75	1 ¹⁷ / ₃₂	2 ⁷ / ₃₂	1 ¹ / ₄	¹⁹ / ₃₂	1 ⁷ / ₈	¹⁵ / ₃₂	¹ / ₄	0.51
1.2	M14 x 2.00	1 ¹⁷ / ₃₂	2 ⁷ / ₃₂	1 ¹ / ₄	¹⁹ / ₃₂	1 ⁷ / ₈	¹⁵ / ₃₂	¹ / ₄	0.51
1.5	M16 x 2.00	1 ²³ / ₃₂	2 ⁹ / ₁₆	1 ¹⁵ / ₃₂	⁵ / ₈	2 ³ / ₈	⁹ / ₁₆	⁵ / ₁₆	0.84
2	M18 x 2.50	1 ²³ / ₃₂	2 ⁹ / ₁₆	1 ¹⁵ / ₃₂	⁵ / ₈	2 ³ / ₈	⁹ / ₁₆	¹¹ / ₃₂	0.84
2.5	M20 x 2.50	1 ²³ / ₃₂	2 ⁹ / ₁₆	1 ¹⁵ / ₃₂	⁵ / ₈	2 ³ / ₈	⁹ / ₁₆	¹¹ / ₃₂	0.82
3	M22 x 2.50	2 ¹ / ₁₆	3 ¹ / ₈	1 ¹⁵ / ₁₆	¹³ / ₁₆	2 ¹⁵ / ₁₆	⁵ / ₈	⁷ / ₁₆	1.39
4	M24 x 3.00	2 ¹ / ₁₆	3 ¹ / ₈	1 ¹⁵ / ₁₆	¹³ / ₁₆	2 ¹⁵ / ₁₆	⁵ / ₈	⁷ / ₁₆	1.39
5	M27 x 3.00	2 ¹ / ₁₆	3 ¹ / ₈	1 ¹⁵ / ₁₆	¹³ / ₁₆	2 ¹⁵ / ₁₆	⁵ / ₈	⁷ / ₁₆	1.39
6	M30 x 3.50	2 ¹⁹ / ₃₂	3 ²⁵ / ₃₂	2 ⁹ / ₃₂	¹⁵ / ₁₆	3 ¹⁵ / ₃₂	¹³ / ₁₆	⁹ / ₁₆	2.45
7	M33 x 3.50	2 ¹⁹ / ₃₂	3 ²⁵ / ₃₂	2 ⁹ / ₃₂	¹⁵ / ₁₆	3 ¹⁵ / ₃₂	¹³ / ₁₆	⁹ / ₁₆	2.45
8	M36 x 4.00	3 ⁵ / ₁₆	4 ³ / ₄	2 ⁷ / ₈	1 ¹⁷ / ₃₂	3 ¹⁵ / ₁₆	³¹ / ₃₂	²¹ / ₃₂	4.89
9	M39 x 4.00	3 ⁵ / ₁₆	4 ³ / ₄	2 ⁷ / ₈	1 ¹⁷ / ₃₂	3 ¹⁵ / ₁₆	³¹ / ₃₂	²¹ / ₃₂	4.89
10	M42 x 4.50	3 ⁵ / ₁₆	4 ³ / ₄	2 ⁷ / ₈	1 ¹⁷ / ₃₂	3 ¹⁵ / ₁₆	³¹ / ₃₂	²¹ / ₃₂	4.89
15	M45 x 4.50	3 ¹⁷ / ₃₂	5 ³ / ₁₆	3 ⁷ / ₃₂	1 ⁵ / ₈	4 ¹³ / ₁₆	³¹ / ₃₂	⁷ / ₈	7.21
18	M48 x 5.00	3 ¹⁷ / ₃₂	5 ³ / ₁₆	3 ⁷ / ₃₂	1 ⁵ / ₈	4 ¹³ / ₁₆	³¹ / ₃₂	⁷ / ₈	7.21

CAD INFO



ADA



Green Pin® Rotating Hoist Ring GR8

Grade 80 rotating hoist ring

- **Material:** alloy steel, grade 80, quenched and tempered
- **Safety factor:** MBL equals 5 x WLL
- **Standard:** EN1677-1 and generally to ASME B30.26
- **Finish:** painted white*
- **Temperature range:** -40 °F up to +392 °F
- **Certification:** 2.1 2.2 3.1 MTC^a MPI^b CE IIA
- **Article code:** scan QR code to see article codes
- **Note:** Rolled thread bolt. WLL indicated below are given in the worst conditions of use, i.e. 0° to the horizontal

Scan for additional product details



working load limit	diameter thread	width inside	length inside	diameter	length	thickness base	width outside	diameter base	diameter base	length inside	hex key	torque value	weight each
metric t	a mm	b inch	c inch	d inch	e inch	f inch	g inch	h inch	i inch	j inch	inch	Ft.Lbs	lbs
0.4	M8 x 1.25	1 13/32	1 21/32	15/32	23/32	1 3/8	2 23/32	1 11/32	1 3/8	1 11/16	1/4	4.8	0.95
0.7	M10 x 1.5	1 13/32	1 9/16	15/32	23/32	1 15/32	2 23/32	1 11/32	1 3/8	1 11/16	5/16	9.6	0.97
1	M12 x 1.75	1 13/32	1 1/2	15/32	29/32	1 17/32	2 23/32	1 11/32	1 3/8	1 11/16	13/32	16.2	1.01
1.3	M14 x 2.0	1 13/32	1 13/32	15/32	29/32	1 5/8	2 23/32	1 11/32	1 3/8	1 11/16	15/32	25.8	1.04
1.6	M16 x 2.0	1 13/32	1 11/16	15/32	1 3/32	1 11/16	2 23/32	1 11/32	1 3/8	2 1/16	9/16	40.6	1.15
2	M18 x 2.5	1 13/32	1 5/8	15/32	1 3/32	1 25/32	2 23/32	1 11/32	1 3/8	2 1/16	9/16	59.0	1.19
2.5	M20 x 2.5	1 13/32	1 17/32	15/32	1 5/16	1 27/32	2 23/32	1 11/32	1 3/8	2 1/16	21/32	81.1	1.3
3	M22 x 2.5	2 3/32	2 1/4	3/4	1 1/4	2 3/4	4 3/32	1 15/16	2 1/16	2 25/32	21/32	110.6	4.14
4	M24 x 3.0	2 3/32	2 7/32	3/4	1 15/32	2 27/32	4 3/32	1 15/16	2 1/16	2 25/32	3/4	140.1	4.25
5	M27 x 3.0	2 3/32	2 15/32	3/4	1 25/32	2 17/32	4 3/32	1 15/16	2 1/16	2 25/32	3/4	206.5	4.32
6.3	M30 x 3.5	2 3/32	2 15/32	3/4	1 25/32	2 17/32	4 3/32	1 15/16	2 1/16	2 25/32	3/4	280.2	4.48
7	M33 x 3.5	2 7/8	3 21/32	1 3/16	2 1/8	3 9/32	5 7/8	2 11/16	2 27/32	3 27/32	3/4	383.5	11.64
10	M36 x 4.0	2 7/8	3 21/32	1 3/16	2 1/8	3 9/32	5 7/8	2 11/16	2 27/32	3 27/32	3/4	442.5	11.79
10	M39 x 4.0	2 7/8	3 21/32	1 3/16	2 15/32	3 9/32	5 7/8	2 11/16	2 27/32	3 27/32	3/4	641.6	12.02
12.5	M42 x 4.5	2 25/32	3 7/16	1 3/16	2 15/32	3 5/16	5 3/4	2 11/16	3 1/32	3 27/32	3/4	737.5	12.26

CAD INFO





Green Pin® Rotating Hoist Ring UNC GR8

Grade 80 rotating hoist ring UNC

- **Material:** alloy steel, grade 80, quenched and tempered
- **Safety factor:** MBL equals 5 x WLL
- **Standard:** EN1677-1 and generally to ASME B30.26
- **Finish:** painted red or white
- **Temperature range:** -40 °F up to +392 °F
- **Certification:** 2.1 2.2 3.1 MTC^a MPI^b CE IIA
- **Article code:** scan QR code to see article codes
- **Note:** Rolled thread bolt. WLL indicated below are given in the worst conditions of use, i.e. 0° to the horizontal



ADAUNC



working load limit	diameter thread	width inside	length inside	diameter	length	thickness base	width outside	diameter base	diameter base	length inside	hex key	torque value	weight each
metric t	a inch	b inch	c inch	d inch	e inch	f inch	g inch	h inch	i inch	j inch	inch	Ft.Lbs	lbs
0.4	5/16 - 18UNC	1 13/32	1 21/32	15/32	23/32	1 3/8	2 23/32	1 11/32	1 3/8	1 11/16	1/4	4.8	0.95
0.6	3/8 - 16UNC	1 13/32	1 9/16	15/32	23/32	1 15/32	2 23/32	1 11/32	1 3/8	1 11/16	5/16	9.6	0.97
1	1/2 - 13UNC	1 13/32	1 1/2	15/32	15/16	1 17/32	2 23/32	1 11/32	1 3/8	1 11/16	13/32	16.2	1.01
1.7	5/8 - 11UNC	1 13/32	1 11/16	15/32	1 7/32	1 11/16	2 23/32	1 11/32	1 3/8	2 1/16	1/2	40.6	1.21
2.5	3/4 - 10UNC	1 13/32	1 17/32	15/32	1 7/32	1 27/32	2 23/32	1 11/32	1 3/8	2 1/16	5/8	81.1	1.21
3.5	7/8 - 9UNC	2 3/32	2 1/4	3/4	1 3/8	2 3/4	4 3/32	1 15/16	2 1/16	2 25/32	3/4	110.6	4.14
4.5	1 - 8UNC	2 3/32	2 1/8	3/4	1 5/8	2 7/8	4 3/32	1 15/16	2 1/16	2 25/32	3/4	140.1	4.25
6.8	1 1/4 - 7UNC	2 3/32	2 7/16	3/4	2 5/32	2 17/32	4 3/32	1 15/16	2 1/16	2 25/32	3/4	280.2	4.65
10.8	1 1/2 - 6UNC	2 7/8	3 5/8	1 3/16	2 15/16	3 9/32	5 3/4	2 11/16	2 27/32	3 27/32	3/4	442.5	12.24
13.6	2 - 4 1/2UNC	2 7/8	3 25/32	1 3/16	2 15/16	3 5/32	5 3/4	2 11/16	2 27/32	3 27/32	3/4	737.5	13.67



CAD INFO

* could be (for some sizes) delivered with a red finish


Green Pin® Long Rotating Hoist Ring GR8

Grade 80 rotating hoist ring longer length

Scan for
additional
product
details



ADAL





- **Material:** alloy steel, grade 80, quenched and tempered
- **Safety factor:** MBL equals 5 x WLL
- **Standard:** EN1677-1 and generally to ASME B30.26
- **Finish:** painted red or white
- **Temperature range:** -40 °F up to +392 °F
- **Certification:** 2.1 2.2 3.1 MTC^a MPI^b CE IIA
- **Article code:** scan QR code to see article codes
- **Note:** Rolled thread bolt. WLL indicated below are given in the worst conditions of use, i.e. 0° to the horizontal

working load limit	diameter thread	width inside	length inside	diameter	length	thickness base	width outside	diameter base	diameter base	length inside	hex key	torque value	weight each
metric t	a mm	b inch	c inch	d inch	e inch	f inch	g inch	h inch	i inch	j inch	inch	Ft.Lbs	lbs
0.4	M8 x 1.25	1 13/32	1 21/32	15/32	2 1/16	1 3/8	2 23/32	1 11/32	1 3/8	1 11/16	1/4	4.8	1.01
0.4	M8 x 1.25	1 13/32	1 21/32	15/32	3 5/8	1 3/8	2 23/32	1 11/32	1 3/8	1 11/16	1/4	4.8	1.04
0.7	M10 x 1.5	1 13/32	1 9/16	15/32	2 7/16	1 15/32	2 23/32	1 11/32	1 3/8	1 11/16	5/16	9.6	1.1
0.7	M10 x 1.5	1 13/32	1 9/16	15/32	4 29/32	1 15/32	2 23/32	1 11/32	1 3/8	1 11/16	5/16	9.6	1.04
1	M12 x 1.75	1 13/32	1 1/2	15/32	2 7/16	1 17/32	2 23/32	1 11/32	1 3/8	1 11/16	13/32	16.2	1.17
1	M12 x 1.75	1 13/32	1 1/2	15/32	4 29/32	1 17/32	2 23/32	1 11/32	1 3/8	1 11/16	13/32	16.2	1.08
1.6	M16 x 2.0	1 13/32	1 11/16	15/32	3 5/8	1 11/16	2 23/32	1 11/32	1 3/8	2 1/16	9/16	40.6	1.57
1.6	M16 x 2.0	1 13/32	1 11/16	15/32	6 25/32	1 11/16	2 23/32	1 11/32	1 3/8	2 1/16	9/16	40.6	1.32
2.5	M20 x 2.5	1 13/32	1 17/32	15/32	4 13/32	1 27/32	2 23/32	1 11/32	1 3/8	2 1/16	21/32	81.1	1.65
2.5	M20 x 2.5	1 3/8	1 1/2	1/2	6 25/32	1 27/32	2 11/16	1 11/32	1 1/2	2 1/16	21/32	81.1	1.92
4	M24 x 3.0	2 3/32	2 7/32	3/4	4 13/32	2 27/32	4 3/32	1 15/16	2 1/16	2 25/32	3/4	140.1	4.76
4	M24 x 3.0	2 3/32	2 7/32	3/4	6 25/32	2 27/32	4 3/32	1 15/16	2 1/16	2 25/32	3/4	140.1	5.14
5	M27 x 3.0	2 3/32	2 15/32	3/4	3 31/32	2 17/32	4 3/32	1 15/16	2 1/16	2 25/32	3/4	206.5	4.85
6.3	M30 x 3.5	2 3/32	2 15/32	3/4	3 31/32	2 17/32	4 3/32	1 15/16	2 1/16	2 25/32	3/4	280.2	6.72
6.3	M30 x 3.5	2 3/32	2 15/32	3/4	10 9/32	2 17/32	4 3/32	1 15/16	2 1/16	2 25/32	3/4	280.2	5
10	M36 x 4.0	2 7/8	3 21/32	1 3/16	4 11/32	3 9/32	5 7/8	2 11/16	2 27/32	3 27/32	3/4	442.5	12.61

CAD INFO



OL



Green Pin® Small Lifting Eye GR8

Grade 80 small lifting eye

- **Material:** alloy steel, grade 80, quenched and tempered
- **Safety factor:** MBL equals 4 x WLL
- **Standard:** EN1677-1
- **Finish:** painted red or white
- **Temperature range:** -40 °F up to +392 °F
- **Certification:** 2.1 2.2 MTC^a MPI^b CE IIA
- **Article code:** scan QR code to see article codes

Scan for
additional
product
details




working load limit	diameter thread	diameter base	diameter eye inside	length	thickness base	width	can be combined with	weight each
metric t	a mm	b inch	c inch	d inch	e inch	f inch		lbs
0.5	M8 x 1.25	1 ³ / ₃₂	⁵ / ₁₆	1 ³ / ₁₆	¹ / ₂	¹ / ₄	GPXLC05, GPXLC0, GPCO5, GPCO6, GPMP5, GPMP6, GPCSC5, GPCSC6	0.11
0.9	M10 x 1.50	1 ³ / ₃₂	⁵ / ₁₆	1 ³ / ₁₆	¹ / ₂	¹ / ₄		0.11
1.25	M12 x 1.75	1 ³ / ₃₂	⁵ / ₁₆	1 ³ / ₁₆	¹ / ₂	¹ / ₄		0.13
1.5	M14 x 2.00	1 ⁷ / ₃₂	¹¹ / ₃₂	1 ²⁵ / ₃₂	²³ / ₃₂	¹¹ / ₃₂	GPXLC1, GPCO7/8, GPMP7/8, GPCSC7/8	0.26
1.9	M16 x 2.00	1 ⁷ / ₃₂	¹¹ / ₃₂	1 ²⁵ / ₃₂	²³ / ₃₂	¹¹ / ₃₂		0.31
2.25	M18 x 2.50	1 ⁷ / ₃₂	¹¹ / ₃₂	1 ²⁵ / ₃₂	²³ / ₃₂	¹¹ / ₃₂		0.33
3.12	M20 x 2.50	1 ⁹ / ₁₆	¹ / ₂	2 ⁵ / ₃₂	²⁵ / ₃₂	¹³ / ₃₂	GPXLC2, GPCO10, GPMP10, GPCSC10	0.55
3.8	M22 x 2.50	1 ⁹ / ₁₆	¹ / ₂	2 ⁵ / ₃₂	²⁵ / ₃₂	¹³ / ₃₂		0.62
5	M24 x 3.00	2 ³ / ₃₂	⁵ / ₈	2 ¹¹ / ₁₆	1 ⁵ / ₃₂	¹⁵ / ₃₂	GPXLC3, GPCO13, GPMP13, GPCSC13	1.17
6.25	M27 x 3.00	2 ³ / ₃₂	⁵ / ₈	2 ¹¹ / ₁₆	1 ⁵ / ₃₂	¹⁵ / ₃₂		1.28
8	M30 x 3.50	2 ⁵ / ₁₆	²⁵ / ₃₂	3 ¹⁷ / ₃₂	1 ³ / ₈	¹ / ₂	GPXLC4, GPCO16, GPMP16, GPCSC16	2.07
9	M33 x 3.50	2 ⁵ / ₁₆	²⁵ / ₃₂	3 ¹⁷ / ₃₂	1 ³ / ₈	¹ / ₂		2.27
10	M36 x 4.00	2 ⁵ / ₁₆	²⁵ / ₃₂	3 ¹⁷ / ₃₂	1 ³ / ₈	¹ / ₂		2.47
12.5	M39 x 4.00	2 ¹⁵ / ₁₆	¹⁵ / ₁₆	4 ¹ / ₈	1 ⁹ / ₁₆	²³ / ₃₂	GPXLC5, GPCO18/20, GPMP18/20, GPCSC18/20	4.19
15	M42 x 4.50	2 ¹⁵ / ₁₆	¹⁵ / ₁₆	4 ¹ / ₈	1 ⁹ / ₁₆	²³ / ₃₂		4.45

CAD INFO



PAS



Green Pin® Weld-On Transport Ring GR8

Grade 80 Weld-on transport ring

- **Material:** base: mild steel, ring: alloy steel, grade 80, quenched and tempered
- **Safety factor:** MBL equals 4 x WLL
- **Finish:** painted white*
- **Temperature range:** -40 °F up to +392 °F
- **Certification:** 2.1 2.2 3.1 MTC^a MPI^b CE IIA
- **Article code:** scan QR code to see article codes
- **Note:** welding must be done in accordance with DIN 5817 resp. 15429, by a qualified welder according to EN 287-1



working load limit	diameter	width inside	length inside	length base	height base	length	weight each
metric t	a inch	b inch	c inch	d inch	e inch	f inch	lbs
1.2	¹ / ₂	1 ⁹ / ₁₆	1 ⁵ / ₈	1 ³ / ₈	1 ³ / ₃₂	3 ⁷ / ₃₂	0.88
3.2	²³ / ₃₂	1 ²⁵ / ₃₂	1 ²⁷ / ₃₂	1 ²¹ / ₃₂	1 ⁵ / ₁₆	3 ²⁷ / ₃₂	1.7
5.4	⁷ / ₈	2 ⁵ / ₃₂	2 ¹ / ₄	1 ¹⁵ / ₁₆	1 ²¹ / ₃₂	4 ³ / ₄	3.13
8.2	1 ¹ / ₃₂	2 ³ / ₄	2 ⁵ / ₈	2 ¹⁷ / ₃₂	1 ³¹ / ₃₂	5 ⁵ / ₈	5.51
12.8	1 ³ / ₃₂	3 ¹¹ / ₃₂	3 ¹⁷ / ₃₂	3 ¹ / ₁₆	2 ⁵ / ₃₂	6 ¹³ / ₁₆	8.16
15.5	1 ¹¹ / ₃₂	3 ²⁹ / ₃₂	3 ²¹ / ₃₂	3 ¹⁷ / ₃₂	2 ¹⁵ / ₃₂	7 ¹⁵ / ₃₂	12.5

CAD INFO

* could be (for some sizes) delivered with a red finish

C


Eye bolts, generally to DIN 580

Generally to DIN 580

- **Material:** carbon steel, C15
- **Safety factor:** MBL equals 6 x WLL
- **Standard:** generally to DIN 580
- **Finish:** electro-galvanized
- **Certification:** 2.1 2.2 CE IIA



E-8140

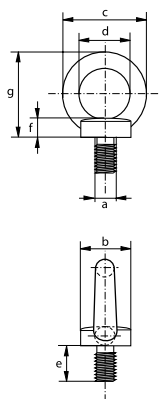


working load limit	diameter thread	diameter base	diameter eye outside	diameter eye inside	length	thickness base	height	weight per 100 pcs
metric t	a mm	b inch	c inch	d inch	e inch	f inch	g inch	lbs
0.07	M6 x 1.00	$25/32$	$1\ 13/32$	$25/32$	$1/2$	$1/4$	$1\ 13/32$	11.24
0.14	M8 x 1.25	$25/32$	$1\ 13/32$	$25/32$	$1/2$	$1/4$	$1\ 13/32$	12.13
0.23	M10 x 1.50	$31/32$	$1\ 25/32$	$31/32$	$21/32$	$5/16$	$1\ 25/32$	22.7
0.34	M12 x 1.75	$1\ 3/16$	$2\ 1/8$	$1\ 3/16$	$13/16$	$13/32$	$2\ 3/32$	37.3
0.49	M14 x 2.00	$1\ 3/8$	$2\ 15/32$	$1\ 3/8$	$1\ 1/16$	$15/32$	$2\ 3/8$	66
0.7	M16 x 2.00	$1\ 3/8$	$2\ 15/32$	$1\ 3/8$	$1\ 1/16$	$15/32$	$2\ 7/16$	68
0.9	M18 x 2.00	$1\ 9/16$	$2\ 27/32$	$1\ 9/16$	$1\ 3/16$	$9/16$	$2\ 25/32$	94
1.2	M20 x 2.50	$1\ 9/16$	$2\ 27/32$	$1\ 9/16$	$1\ 3/16$	$9/16$	$2\ 25/32$	93
1.5	M22 x 2.50	$1\ 25/32$	$3\ 3/16$	$1\ 25/32$	$1\ 13/32$	$9/16$	$3\ 5/32$	138
1.8	M24 x 3.00	$1\ 31/32$	$3\ 17/32$	$1\ 31/32$	$1\ 13/32$	$23/32$	$3\ 17/32$	200
2.5	M27 x 3.00	$1\ 31/32$	$3\ 17/32$	$1\ 31/32$	$1\ 17/32$	$23/32$	$3\ 17/32$	195
3.2	M30 x 3.50	$2\ 9/16$	$4\ 1/4$	$2\ 3/8$	$1\ 25/32$	$7/8$	$4\ 9/32$	351
4.3	M33 x 3.50	$2\ 9/16$	$4\ 1/4$	$2\ 3/8$	$1\ 25/32$	$7/8$	$4\ 11/32$	368
4.6	M36 x 4.00	$2\ 15/16$	$4\ 31/32$	$2\ 3/4$	$2\ 1/8$	$1\ 1/32$	$5\ 1/32$	518
6.1	M39 x 4.00	$2\ 15/16$	$4\ 31/32$	$2\ 3/4$	$2\ 1/8$	$1\ 1/32$	$5\ 1/8$	586
6.3	M42 x 4.50	$3\ 11/32$	$5\ 21/32$	$3\ 5/32$	$2\ 15/32$	$1\ 3/16$	$5\ 25/32$	888
8	M45 x 4.50	$3\ 11/32$	$5\ 21/32$	$3\ 5/32$	$2\ 15/32$	$1\ 3/8$	$5\ 29/32$	1149
8.6	M48 x 5.00	$3\ 15/16$	$6\ 17/32$	$3\ 17/32$	$2\ 11/16$	$1\ 3/8$	$6\ 5/8$	1393
11.5	M56 x 5.50	$4\ 11/32$	$7\ 1/4$	$3\ 15/16$	$3\ 1/16$	$1\ 1/2$	$7\ 3/8$	1938
16	M64 x 6.00	$4\ 23/32$	$8\ 1/8$	$4\ 11/32$	$3\ 17/32$	$1\ 21/32$	$8\ 3/16$	2734
20	M72 x 6.00	$5\ 29/32$	$10\ 1/4$	$5\ 1/2$	$3\ 15/16$	$1\ 31/32$	$10\ 1/4$	5055

CAD

C



E-8142

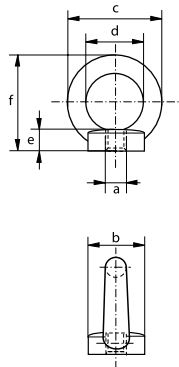

Eye nuts, generally to DIN 582

Generally to DIN 582

- **Material:** carbon steel, C15
- **Safety factor:** MBL equals 6 x WLL
- **Standard:** generally to DIN 582
- **Finish:** electro-galvanized
- **Certification:** 2.1 2.2 CE IIA

working load limit	diameter thread	diameter base	diameter eye outside	diameter eye inside	thickness base	height	weight per 100 pcs
metric t	a mm	b inch	c inch	d inch	e inch	f inch	lbs
0.07	M6 x 1.00	$\frac{25}{32}$	$1 \frac{13}{32}$	$\frac{25}{32}$	$\frac{11}{32}$	$1 \frac{13}{32}$	11.24
0.14	M8 x 1.25	$\frac{25}{32}$	$1 \frac{13}{32}$	$\frac{25}{32}$	$\frac{11}{32}$	$1 \frac{13}{32}$	11.46
0.23	M10 x 1.50	$\frac{31}{32}$	$1 \frac{25}{32}$	$\frac{31}{32}$	$\frac{13}{32}$	$1 \frac{25}{32}$	20.7
0.34	M12 x 1.75	$1 \frac{3}{16}$	$2 \frac{1}{8}$	$1 \frac{3}{16}$	$\frac{7}{16}$	$2 \frac{3}{32}$	35.3
0.49	M14 x 2.00	$1 \frac{3}{8}$	$2 \frac{15}{32}$	$1 \frac{3}{8}$	$\frac{1}{2}$	$2 \frac{3}{8}$	56
0.7	M16 x 2.00	$1 \frac{3}{8}$	$2 \frac{15}{32}$	$1 \frac{3}{8}$	$\frac{1}{2}$	$2 \frac{7}{16}$	53
0.9	M18 x 2.00	$1 \frac{9}{16}$	$2 \frac{27}{32}$	$1 \frac{9}{16}$	$\frac{5}{8}$	$2 \frac{25}{32}$	79
1.2	M20 x 2.50	$1 \frac{9}{16}$	$2 \frac{27}{32}$	$1 \frac{9}{16}$	$\frac{5}{8}$	$2 \frac{25}{32}$	78
1.5	M22 x 2.50	$1 \frac{25}{32}$	$3 \frac{3}{16}$	$1 \frac{25}{32}$	$\frac{23}{32}$	$3 \frac{5}{32}$	114
1.8	M24 x 3.00	$1 \frac{31}{32}$	$3 \frac{17}{32}$	$1 \frac{31}{32}$	$\frac{25}{32}$	$3 \frac{17}{32}$	166
2.5	M27 x 3.00	$1 \frac{31}{32}$	$3 \frac{17}{32}$	$1 \frac{31}{32}$	$\frac{25}{32}$	$3 \frac{17}{32}$	225
3.2	M30 x 3.50	$2 \frac{9}{16}$	$4 \frac{1}{4}$	$2 \frac{3}{8}$	$\frac{31}{32}$	$4 \frac{9}{32}$	276
4.3	M33 x 3.50	$2 \frac{9}{16}$	$4 \frac{1}{4}$	$2 \frac{3}{8}$	$\frac{31}{32}$	$4 \frac{9}{32}$	289
4.6	M36 x 4.00	$2 \frac{15}{16}$	$4 \frac{31}{32}$	$2 \frac{3}{4}$	$1 \frac{3}{16}$	$5 \frac{1}{32}$	459
6.1	M39 x 4.00	$2 \frac{15}{16}$	$4 \frac{31}{32}$	$2 \frac{3}{4}$	$1 \frac{3}{16}$	$5 \frac{1}{8}$	463
6.3	M42 x 4.50	$3 \frac{11}{32}$	$5 \frac{21}{32}$	$3 \frac{5}{32}$	$1 \frac{3}{8}$	$5 \frac{25}{32}$	672
8	M45 x 4.50	$3 \frac{11}{32}$	$5 \frac{21}{32}$	$3 \frac{5}{32}$	$1 \frac{3}{8}$	$5 \frac{29}{32}$	897
8.6	M48 x 5.00	$4 \frac{11}{32}$	$7 \frac{1}{4}$	$3 \frac{15}{16}$	$1 \frac{25}{32}$	$7 \frac{3}{8}$	1107
8.6	M52 x 5.00	$4 \frac{11}{32}$	$7 \frac{1}{4}$	$3 \frac{15}{16}$	$1 \frac{25}{32}$	$7 \frac{3}{8}$	1830
11.5	M56 x 5.50	$4 \frac{11}{32}$	$7 \frac{1}{4}$	$3 \frac{15}{16}$	$1 \frac{25}{32}$	$7 \frac{3}{8}$	1475
16	M64 x 6.00	$4 \frac{23}{32}$	$8 \frac{1}{8}$	$4 \frac{11}{32}$	$1 \frac{31}{32}$	$8 \frac{3}{16}$	2050
21	M72 x 6.00	$5 \frac{29}{32}$	$10 \frac{1}{4}$	$5 \frac{1}{2}$	$2 \frac{3}{8}$	$10 \frac{1}{4}$	3307

CAD




ALL MATERIAL HANDLING
Lifting Equipment

Product Catalog #20



832X Weld-On Bucket Hooks

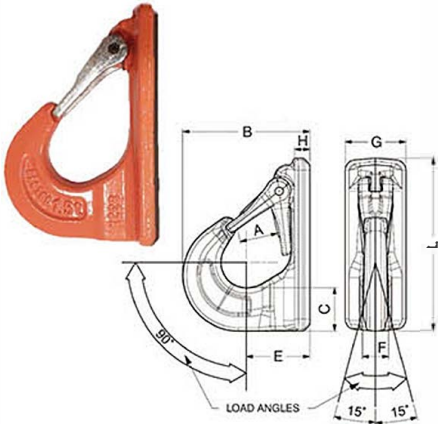


Dimensions (In)										
Part#	WLL tons	A	B	C	E	F	G	H	L	Weight lbs.
C832X015	1.5	0.98	3.11	1.10	1.57	0.59	1.58	0.39	4.61	1.54
C832X025	2.5	1.18	3.98	1.38	1.85	0.83	1.97	0.39	5.79	3.09
C832X040	4	1.46	4.96	1.69	2.48	1.02	2.36	0.59	6.73	5.95
C832X067	6.7	1.89	6.22	2.13	2.80	1.30	2.76	0.59	8.19	10.58

820X Weld-On Lifting Ring Double Base




Dimensions (In)										
Part#	WLL tons	A	B	C	D	E	F	G	H	Weight lbs.
C820X04	4	0.55	2.56	1.89	1.14	5.28	0.55	2.36	3.11	1.61
C820X067	6.7	0.79	3.27	2.36	1.54	6.65	0.63	3.46	4.06	3.97
C820X10	10	0.87	3.78	2.56	1.89	7.72	0.77	3.86	4.65	6.61
C820X16	16	1.22	4.96	3.54	2.17	10.39	1.14	5.00	6.10	12.68
C820X30	30	1.65	6.89	5.12	3.11	14.61	1.77	6.18	8.54	35.27

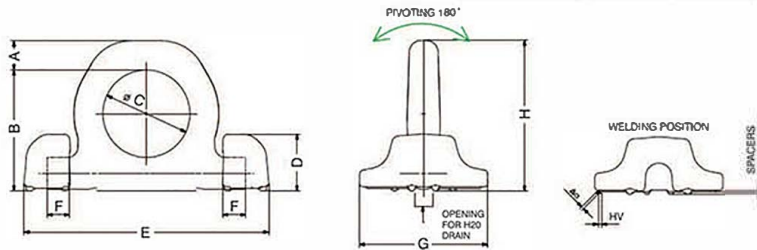

830XM Weld-On Lifting Ring Single-Base w/Spring





Dimensions (In)										
Part#	WLL tons	A	B	C	D	E	F	G	H	Weight lbs.
C830X015M	1.5	0.55	2.56	1.50	0.98	2.60	0.63	1.22	3.11	0.86
C830X025M	2.5	0.63	2.95	1.77	1.06	3.03	0.71	1.36	3.58	1.30
C830X040M	4	0.71	3.31	2.01	1.26	3.43	0.79	1.57	4.02	1.92
C830X067M	6.7	0.94	4.61	2.65	1.73	4.53	1.02	2.30	5.55	4.92
C830X010M	10	1.22	4.96	2.64	2.17	5.08	1.12	2.78	6.18	7.34
C830X016M	16	1.77	6.85	3.94	2.72	7.48	1.65	3.43	8.62	20.46

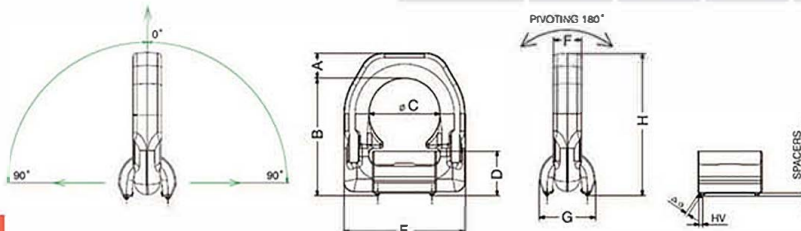

C800 Rotating Eyebolt w/Ring

Part #	Bolt Size mm DxL	WLL tons	A mm	B mm	C mm	E mm	H mm	SW mm	D1 mm	Weight lbs.
C8000030816	M8x16	0.3	30	13	46	50	105	30	38	1.05
C8000030818	M8x18	0.3	30	13	46	50	105	30	38	1.05
C8000031018	M10x18	0.3	30	13	46	50	105	30	38	1.05
C8000051218	M12x18	0.5	30	13	46	50	105	30	38	1.10
C8000051225	M12x25	0.5	30	13	46	50	105	30	38	1.10
C8000101620	M16x20	1.12	30	13	46	50	105	30	38	1.10
C8000101630	M16x30	1.12	30	13	46	50	105	30	38	1.16
C8000102030	M20x30	1.12	30	13	46	50	105	30	38	1.16
C8000202030	M20x30	2	34	16	57	61	131	40	50	2.31
C8000302430	M24x30	3.15	40	18	70	68	153	48	58	3.59
C8000503035	M30x35	5.3	45	22	65	80	165	65	75	4.91
C8000503045	M30x45	5.3	45	22	65	80	165	65	75	4.91
C8000803035	M30x35	8	50	23	95	95	205	75	85	11.68
C8000803045	M30x45	8	50	23	95	95	205	75	85	11.68
C8000803654	M36x54	8	50	23	95	95	205	75	85	12.12
C8001004263	M42x63	10	50	23	95	95	205	75	85	22.04
C8001504860	M48x60	15	70	32	120	130	280	95	120	22.04
C8001505678	M56x78	15	70	32	120	130	280	95	120	22.04
C8001506496	M64x96	15	70	32	120	130	280	95	120	22.04
C80025072108	M72x108	25	90	45	130	165	338	140	170	63.93
C80030080120	M80x120	30	90	45	130	165	338	140	170	63.93
C80035090135	M90x135	35	90	45	130	165	338	140	170	63.93

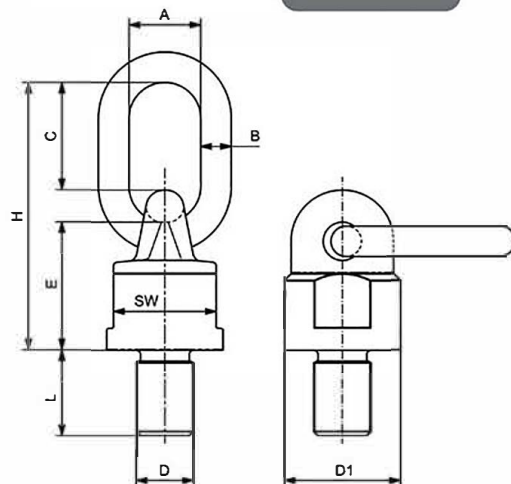



C800 UNC Rotating Eyebolt w/Ring

Part #	Bolt Size (in) DxL	WLL tons	A in	B in	C in	E in	H in	SW in	D1 in	Weight lbs.
C800003UNC51616	5/16" - 18 x .63	0.3	1.18	0.51	1.81	1.96	4.13	1.18	1.49	1.05
C800003UNC3818	3/8" - 16 x .70	0.3	1.18	0.51	1.81	1.96	4.13	1.18	1.49	1.05
C800005UNC1225	1/2" - 13 x .98	0.5	1.18	0.51	1.81	1.96	4.13	1.18	1.49	1.10
C800010UNC5830	5/8" - 11 x 1.18	1.12	1.18	0.51	1.81	1.96	4.13	1.18	1.49	1.16
C800020UNC3430	3/4" - 10 x 1.18	2	1.33	0.62	2.24	2.40	5.15	1.57	1.96	2.31
C800030UNC130	1" - 8 x 1.18	3.15	1.57	0.70	2.75	2.67	6.02	1.88	2.28	3.59
C800050UNC11445	1-1/4" - 7 x 1.77	5.3	1.77	0.86	2.55	3.14	6.49	2.55	2.95	4.91
C800080UNC11254	1-1/2" - 6 x 2.12	8	1.96	0.90	3.74	3.74	8.07	2.95	3.34	11.68
C800100UNC13463	1-3/4" - 5 x 2.48	10	1.96	0.90	3.74	3.74	8.07	2.95	3.34	22.04
C80015UNC260	2" - 4.5 x 2.36	15	2.75	1.25	4.72	5.11	11.02	3.74	4.72	22.04
C80015UNC21478	2-1/4" - 4.5 x 3.07	15	2.75	1.25	4.72	5.11	11.02	3.74	4.72	22.04
C80015UNC21296	2-1/2" - 4 x 3.77	15	2.75	1.25	4.72	5.11	11.02	3.74	4.72	22.04
C80016UNC234104	2-3/4" - 4 x 4.09	16	2.75	1.25	4.72	5.11	11.02	3.74	4.72	22.04
C80025UNC3108	3" - 4 x 4.25	25	3.54	1.77	5.11	6.49	13.30	5.51	6.69	63.93
C80035UNC3121353	3-1/2" - 4 x 5.31	35	3.54	1.77	5.11	6.49	13.30	5.51	6.69	63.93

C800X

Rotating Eyebolt w/Ring


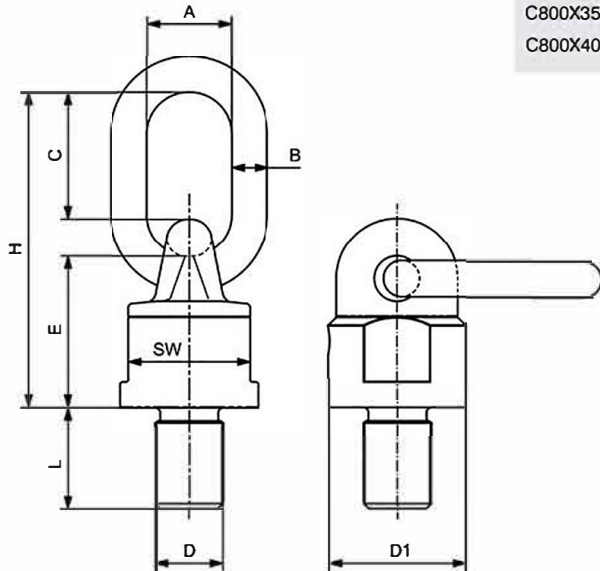



Part #	Size mm DXL	WLL tons	A mm	B mm	C mm	E mm	H mm	SW mm	D1 Ømm	Weight lb
C800X0030816	M8x16	0.3	30	13	46	50	105	30	38	1.05
C800X0030818	M8x18	0.3	30	13	46	50	105	30	38	1.05
C800X0051018	M10x18	0.5	30	13	46	50	105	30	38	1.05
C800X0071218	M12x18	0.7	30	13	46	50	105	30	38	1.10
C800X0101420	M14x20	1	30	13	46	50	105	30	38	1.16
C800X0141620	M16x20	1.4	30	13	46	50	105	30	38	1.16
C800X0172030	M20x30	1.7	30	13	46	50	105	30	38	1.16
C800X0172430	M24x30	1.7	30	13	46	50	105	30	38	1.16
C800X0252030	M20x30	2.5	34	16	57	61	131	40	50	2.31
C800X0402430	M24x30	4	40	18	70	68	153	48	58	3.59
C800X0403035	M30x35	4	40	18	70	68	153	48	58	3.59
C800X0673035	M30x35	6.7	45	22	65	71	156	70	80	6.28
C800X0803045	M30x45	8	50	23	91	86	200	80	90	9.70
C800X1003654	M36x54	10	50	23	91	86	200	80	90	10.18
C800X1254263	M42x63	12.5	50	23	91	86	200	80	90	11.46
C800X1254560	M45x60	12.5	50	23	91	86	200	80	90	11.46
C800X1254872	M48x72	12.5	50	23	91	86	200	80	90	11.46
C800X1604560	M45x60	16	70	32	120	112	262	100	120	24.03
C800X1704860	M48x60	17	70	32	120	112	262	100	120	24.03
C800X1805678	M56x78	18	70	32	120	112	262	100	120	24.03
C800X2006496	M64x96	20	70	32	120	112	262	100	120	24.03
C800X2806496	M64x96	28	90	45	124	165	333	140	170	63.93
C800X31572108	M72x108	31.5	90	45	124	165	333	140	170	63.93
C800X35080120	M80x120	35	90	45	124	165	333	140	170	63.93
C800X40090135	M90x135	40	90	45	124	165	333	140	170	63.93

C806XHT

Rotating Eyebolt w/Clamp




Part #	Bolt size mm	WLL t	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	L mm	W mm	J mm	K mm	Ch mm	Weight lb
C806XHT08	M8	0.5	57	34	10	78	24	41	30	26.5	25	15	43	51	35	13	0.59
C806XHT10	M10	0.9	57	34	10	78	24	41	30	26.5	25	15	42	51	35	17	0.63
C806XHT12	M12	1.35	66	38	13.5	85	30	50	36	33	32	23	40	52	28	19	1.10
C806XHT16	M16	2	66	38	13.5	85	30	50	36	33	32	24	38	52	28	24	1.12
C806XHT20	M20	3.5	87	55	16	111	48	68	44	42.5	45	31	54	71	36	30	2.75
C806XHT24	M24	4.5	87	55	16	111	48	68	44	42.5	45	37	51	71	36	36	2.86
C806XHT27	M27	4	109	66	22.5	145	54	91	63	58.5	60	37	64	86	47	41	6.94
C806XHT30	M30	6.7	109	66	22.5	145	54	91	65	58.5	60	45	62	86	47	46	6.7
C806XHT36T07	M36	7	109	66	22.5	145	54	91	55	58.5	60	50	60	86	43	55	7.27
C806XHT36	M36	8	136	78	28	190	62	108	81	72.5	70	59	88	115	74	55	13.00
C806XHT42T10	M42	10	136	78	28	190	62	108	75	72.5	70	75	86	115	70	65	14.33
C806XHT42	M42	15	169	97	36	242	68	131	89	87.5	85	63	121	151	97	65	24.69
C806XHT48	M48	20	169	97	36	242	68	131	89	87.5	95	71	117	151	93	75	25.57

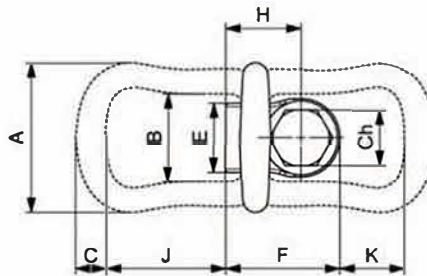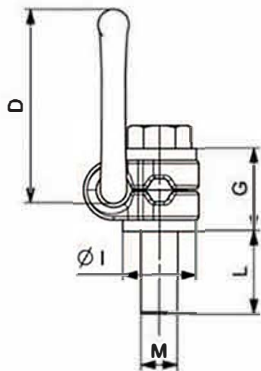

C806X UNC

Rotating Eyebolt w/Clamp

Part #	Bolt size UNC	WLL tons	A in	B in	C in	D in	E in	F in	G in	H in	I in	L in	W in	J in	K in	Ch in	Weight lb
C806XU38	3/8" - 16	0.63	2.24	1.33	0.39	3.07	0.94	1.61	1.18	1.04	0.98	0.59	1.65	2.00	1.37	0.66	0.63
C806XU12	1/2" - 13	1	2.59	1.49	0.53	3.34	1.18	1.96	1.41	1.29	1.25	0.90	1.57	2.04	1.10	0.74	1.10
C806XU58	5/8" - 11	1.5	2.59	1.49	0.53	3.34	1.18	1.96	1.41	1.29	1.25	0.94	1.49	2.04	1.10	0.94	1.12
C806XU34	3/4" - 10	2.5	3.42	2.16	0.62	4.37	1.88	2.67	1.73	1.67	1.77	1.22	2.12	2.79	1.41	1.18	2.75
C806XU78	7/8" - 9	2.5	3.42	2.16	0.62	4.37	1.88	2.67	1.73	1.67	1.77	1.22	2.12	2.79	1.41	1.18	2.75
C806XU1	1" - 8	4	3.42	2.16	0.62	4.37	1.88	2.67	1.73	1.67	1.77	1.45	2.00	2.79	1.41	1.41	2.86
C806XU114	1-1/4" - 7	5	4.29	2.59	0.88	5.70	2.12	3.58	2.55	2.30	2.36	1.77	2.44	3.38	1.85	1.81	7.1
C806XU112	1 1/2" - 6	8	5.35	3.07	1.10	7.48	2.44	4.25	3.18	2.85	2.75	2.32	3.46	4.52	2.91	2.16	13.00
C806XU2	2" - 4.5	20	6.65	3.81	1.41	9.52	2.67	5.15	3.50	3.44	3.74	2.79	4.60	5.94	3.66	2.95	25.57






C807XHT

Rotating Eyebolt w/Key



Part #	Size mm	WLL tons	A mm	B mm	C mm	D Ømm	E Ømm	F mm	K Ømm	L mm	CH mm	Weight lb
C807XCHT06	M6	0.1	27	9.5	7	20	23	28	37	9	6	0.17
C807XCHT08	M8	0.3	35	11	9	25	25.5	30	46	12	6	0.26
C807XCHT10	M10	0.4	33.7	10	9.8	25	25.5	30	46	15	6	0.26
C807XCHT12	M12	0.75	41.5	12.5	11.5	30	30.6	36.5	55.5	18	8	0.44
C807XCHT14	M14	0.75	41.5	12.5	11.5	30	30.6	36.5	55.5	18	8	0.44
C807XCHT16	M16	1.5	49.5	14.5	15.7	35	36.5	42	64.5	24	10	0.77
C807XCHT18	M18	1.5	49.5	14.5	15.7	35	36.5	42	64.5	24	10	0.77
C807XCHT20	M20	2.3	58	16	18	40	42	52.5	74.5	30	12	1.32
C807XCHT22	M22	2.3	58	16	18	40	42	52.5	74.5	30	12	1.32
C807XCHT24	M24	3.2	69	20.5	22	49	50	61	90	36	12	2.20
C807XCHT27	M27	3.2	69	20.5	22	49	50	61	90	36	12	2.20
C807XCHT30	M30	4.5	86	25.5	28	60	66	75	111	45	17	4.40
C807XCHT33	M33	4.5	86	25.5	28	60	66	75	111	45	17	4.40
C807XCHT36	M36	7	105	32	30	74	77	96.5	135	55	22	7.49
C807XCHT42	M42	9	118	38	37	82	87	110	158	65	24	12.56
C807XCHT48	M48	12	137	43	38	95	102	124.5	180	72	27	18.73

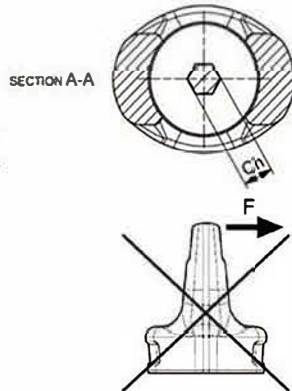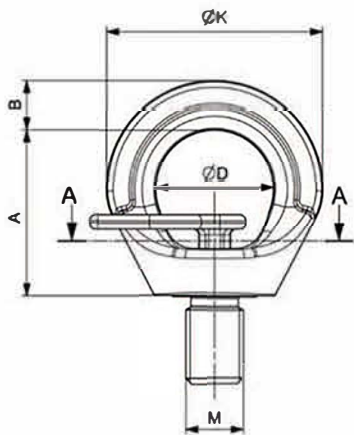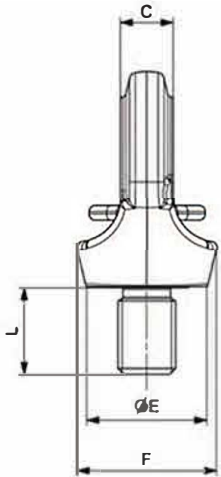

C807XHT UNC

Rotating Eyebolt w/Key




Dimension (inches)												
Part #	Size	WLL tons	A	B	C	D	E	F	K	L	CH	Weight lb
C807XCHT08U	5/16"-18	0.3	1.37	0.43	0.35	0.98	0.98	1.18	1.85	0.47	0.23	0.26
C807XCHT10U	3/8"-16	0.4	1.37	0.43	0.35	0.98	0.98	1.18	1.85	0.62	0.23	0.26
C807XCHT12U	1/2"-13	0.75	1.69	0.49	0.45	1.18	1.18	1.43	2.18	0.7	0.27	0.44
C807XCHT16U	5/8"-11	1.5	1.94	0.57	0.61	1.37	1.37	1.64	2.53	0.94	0.31	0.77
C807XCHT20U	3/4"-10	2.3	2.28	0.62	0.70	1.57	1.65	2.02	2.93	1.18	0.39	1.32
C807XCHT22U	7/8"-9	2.3	2.28	0.62	0.70	1.57	1.65	2.02	2.93	1.18	0.39	1.32
C807XCHT24U	1"-8	3.2	2.71	0.8	0.86	1.92	1.96	2.28	3.54	1.41	0.47	2.20
C807XCHT30U	1 1/4"-7	4.5	3.38	1.00	1.10	2.36	2.59	2.87	4.37	1.69	0.66	4.40
C807XCHT36U	1 1/2"-6	7	4.21	1.25	1.25	2.91	2.95	3.79	5.31	2.12	0.86	7.49
C807XCHT42U	1 3/4"-5	9	4.72	1.49	1.59	3.22	3.34	4.33	6.22	2.51	0.94	12.56
C807XCHT48U	2"-4.5	12	5.47	1.69	1.73	3.74	3.93	4.90	7.04	2.83	1.06	18.73

Stainless Steel version available!
See page 40




C810X Rotating Eyebolt – Variable Screw Length

Part #	Size mm	WLL t	A mm	B mm	C mm	D Ømm	E Ømm	K Ømm	F mm	Bolt Length Range mm
C810X08	M8	0.3	44.5	8	10	29	32	45	10.5	24.5 - 149.5
C810X10	M10	0.4	44.5	8	10	29	32	45	6.5	33.5 - 173.5
C810X12	M12	0.75	53.5	11	11	34	44	56	8	37 - 172
C810X16	M16	1.5	59.5	13	14.5	39	56	65	8.5	41.5 - 211.5
C810X20	M20	2.3	67	14	17	42	58	70	10.5	44.5 - 189.5
C810X24	M24	3.2	80	18	19	52	73	88	13.5	46.5 - 206.5
C810X30	M30	4.5	101	22	27	62	80	106	17	63 - 183

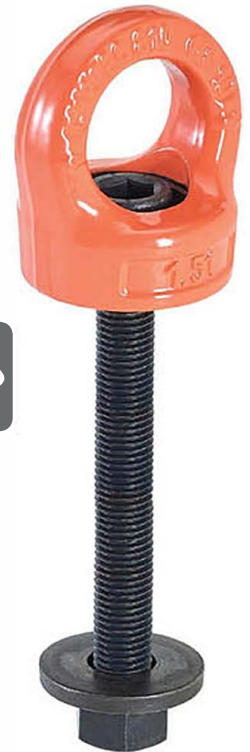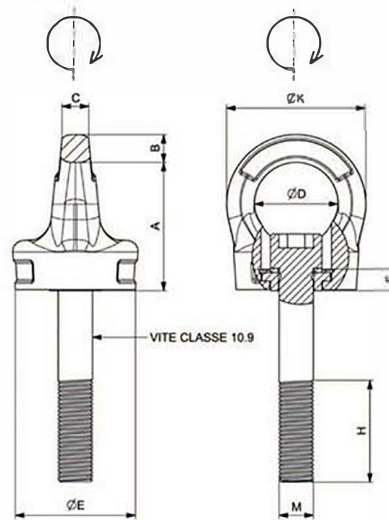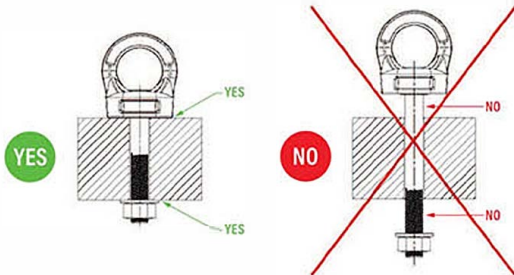

C810FX Rotating Eyenut

Part #	Size mm	WLL t	A mm	B mm	C mm	D Ømm	E Ømm	K Ømm	F mm	L mm	Ch mm	Weight lb
C810FX08	M8	0.3	44.5	8	10	29	32	45	21.5	23	13	0.37
C810FX10	M10	0.4	44.5	8	10	29	32	45	21.5	23	14	0.44
C810FX12	M12	0.75	53.5	11	11	34	44	56	26.5	27	16	0.85
C810FX16	M16	1.5	59.5	13	14.5	39	56	65	30.5	29	21	1.52
C810FX20	M20	2.3	67	14	17	42	58	70	33	34	26	1.56
C810FX24	M24	3.2	80	18	19	52	73	88	40	40	30	3.74
C810FX30	M30	4.5	101	22	27	62	80	106	51	50	36	5.37




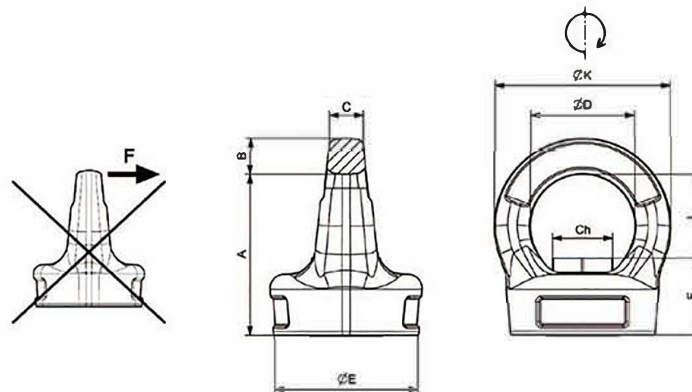


C811XHT Heavy Lift Swivel Hoist Ring – 5:1 Design Factor



Part #	Size mm	WLL 5:1 t	WLL 4:1 t	A mm	B mm	C mm	E mm	F mm	G mm	H mm	J mm	K mm	L mm	CH mm	ch mm	Weight lb
C811XHT08	M8	0.4	0.5	56	28	14	30	55	11	99	40	33.5	12	13	5	0.81
C811XHT10	M10	0.7	0.9	56	28	14	30	55	11	99	40	34.5	15	17	6	0.81
C811XHT12	M12	1.1	1.35	56	28	14	30	55	11	99	40	35.5	18	19	7	0.81
C811XHT14	M14	1.4	1.8	74.5	38	18	47	78	17	135.5	55	46	21	22	7	2.86
C811XHT16	M16	2	2.5	74.5	38	18	47	78	17	135.5	55	46.5	25	24	10	2.86
C811XHT18	M18	2	2.5	74.5	38	18	47	78	17	135.5	55	47	27	27	10	2.86
C811XHT20	M20	3.2	4	74.5	38	18	47	78	17	135.5	55	48	30	30	12	2.86
C811XHT22	M22	3.5	4.5	106	56	25	62	114.5	22	198.5	84	63.5	33	32	12	8.81
C811XHT24	M24	5	6.3	106	56	25	62	114.5	22	198.5	84	64.5	36	36	14	8.81
C811XHT27	M27	5	6.3	106	56	25	62	114.5	22	198.5	84	66.5	40	41	14	8.81
C811XHT30	M30	6.4	8	106	56	25	62	114.5	22	198.5	84	68	45	46	17	8.81

• Available with special bolt lengths and also in UNC thread







C813X Performer Heavy Lift Swivel Hoist Ring – 4:1 Design Factor





Part #	Size mm	WLL t	A mm	B mm	C mm	E mm	F mm	G mm	H mm	J mm	K mm	L mm	P mm	T mm	Ch mm	Weight lb
C813X33	M33	10.5	131	71	30	69	149	30	199	100	49	50	32.5	97	17	12.34
C813X36	M36	12	131	71	30	69	149	30	199	100	49	54	32.5	97	17	12.78
C813X39	M39	14	131	71	30	69	149	30	199	100	49	58	32.5	97	17	13.00
C813X42	M42	15	131	71	30	69	149	30	199	100	49	63	32.5	97	17	13.22
C813X45	M45	16	131	71	30	69	149	30	199	100	49	63	32.5	97	17	13.44
C813X48	M48	20	164	92	40	89	182	40	249	122	63	68	40	119	19	25.57
C813X52	M52	21	164	92	40	89	182	40	249	122	63	68	40	119	19	26.01
C813X56	M56	25	164	92	40	89	182	40	249	122	63	78	40	119	19	26.67
C813X64	M64	32.1	164	92	40	89	182	40	249	122	63	90	40	119	19	28.43
C813X72	M72	25	164	92	40	89	182	40	249	122	63	78	40	119	19	33.28
C813X80	M80	32.1	164	92	40	89	182	40	249	122	63	90	40	119	19	35.05
C813X90	M90	32.1	164	92	40	89	182	40	249	122	63	90	40	119	19	37.25
C813X100	M100	32.1	164	92	40	89	182	40	249	122	63	90	40	119	19	37.25

• Available with special bolt lengths and also in UNC thread





C815X Rotating Eyebolt Weld-on Type w/Ring

Part #	WLL tons	A mm	B mm	C mm	E mm	H mm	D1 mm	Sx45° mm	Weight lb
C815X025	2.5	34	16	58	61	131	52	5.5	2.31
C815X040	4	40	18	72	67	152	58	7	3.17
C815X067	6.7	45	22	65	73	158	75	8.5	5.95
C815X010	10	50	23	92	86	201	85	10	8.70
C815X017	17	70	32	120	105	255	110	12	18.73



C816X Rotating Eynut w/Ring



Part #	Size mm	WLL tons	A mm	B mm	C mm	E mm	F mm	H mm	SW mm	D1 mm	Weight lb
C816X0051215	M12x15	0.5	30	13	47	69	50	124	34	36.5	1.34
C816X0101620	M16x20	1	30	13	47	76	57	131	34	38	1.49
C816X0172025	M20x25	1.7	34	16	58	93	70	164	46	55	3.63
C816X0212430	M24x30	2.1	42	18	72	107	81	193	50	58	4.78
C816X0323040	M30x40	3.2	45	22	65	126	94	211	65	75	9.45
C816X0503645	M36x45	5	50	23	92	145	109.5	260	75	84	13.71

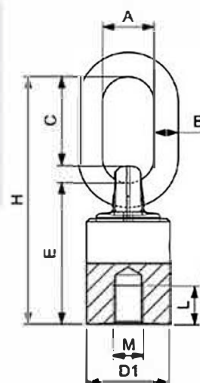

C817X Eyebolt 'Twister' w/Bearing

Part #	Size mm	WLL tons	A mm	B mm	C mm	D Ømm	E Ømm	F mm	K Ømm	L mm	Weight lb
C817XC12	M12	0.75	53.5	11	11	34	44	32	56	18	1.01
C817XC16	M16	1.5	56.5	13	14.5	39	56	33	65	24	1.98
C817XC20	M20	2.3	67	14	17	42	58	40	70	30	2.53
C817XC24	M24	3.2	80	18	19	52	73	44.5	88	38.5	4.51
C817XC30	M30	4.5	101	22	27	62	80	53	106	44	8.81

• Suitable for rotation under load in vertical pull.



NO Second-Guessing Safe Work Loads

WLL Marked on Cartec Lifting Points
Always Apply.



QR Code for
instructions
download




**C813X
PERFORMER**



C807X H.T.



DROP FORGED EYE NUTS

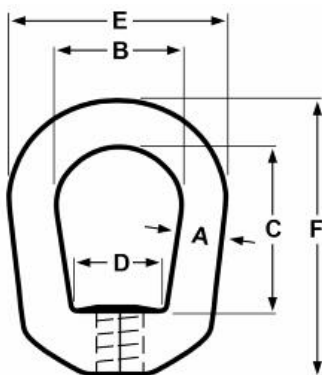

SELF COLORED, GALVANIZED and STAINLESS STEEL, TYPE 316

Size No.	Thread Size	Working Load Limit in Pounds	Bail in Inches (A)	Weight in Pounds	Dimensions in Inches				
					B	C	D	E	F
#1	1/4" - 20	500	1/4	0.09	0.75	1.00	0.66	1.25	1.69
#1A	5/16" - 18	800	1/4	0.09	0.75	1.00	0.66	1.25	1.69
#2A*	1/4" - 20	500	5/16	0.15	1.00	1.19	0.75	1.63	2.06
#2B*	5/16" - 18	500	5/16	0.15	1.00	1.19	0.75	1.63	2.06
#2*	3/8" - 16	1,200	5/16	0.15	1.00	1.19	0.75	1.63	2.06
#3A*	1/2" - 13	2,200	3/8	0.27	1.25	1.44	1.00	2.06	2.50
#4B*	3/8" - 16	1,200	1/2	0.57	1.50	1.88	1.25	2.50	3.13
#4C*	1/2" - 13	2,200	1/2	0.57	1.50	1.88	1.25	2.50	3.13
#4*	5/8" - 11	3,500	1/2	0.57	1.50	1.88	1.25	2.50	3.13
#4A*	3/4" - 10	**5,200	1/2	0.57	1.50	1.88	1.25	2.50	3.13
#5	3/4" - 10	5,200	5/8	0.97	1.75	2.31	1.38	3.00	3.95
#6	7/8" - 9	7,200	3/4	1.69	2.00	2.50	1.63	3.50	4.40
#6A	1" - 8	10,000	3/4	1.69	2.00	2.50	1.63	3.50	4.44
#8A	1.1/8" - 7	11,500	1	3.85	2.50	3.37	1.88	4.40	5.62
#8	1.1/4" - 7	15,200	1	3.85	2.50	3.44	1.88	4.40	5.62
#8B	1.3/8" - 6	15,200	1	3.85	2.50	3.44	1.88	4.40	5.62
#8C	1.1/2" - 6	21,400	1	3.85	2.50	3.44	1.88	4.40	5.62
#10	1.1/2" - 6	21,400	1.1/4	6.31	3.08	3.88	2.38	5.60	6.63
#11A	1.3/4" - 5	28,000	1.1/2	18.70	4.00	6.25	3.88	7.00	10.00
#11	2" - 4.1/2	37,000	1.1/2	18.70	4.00	6.25	3.88	7.00	10.00
#11B	2.1/4" - 4.1/2	37,000	1.1/2	18.70	4.00	6.25	3.88	7.00	10.00
#11C	2.1/2" - 4	37,000	1.1/2	18.70	4.00	6.25	3.88	7.00	10.00


* #2A thru #4A available in 316 stainless steel.

Some sizes available in LH.

**** CAUTION:** Due to the nature of stainless steel, deformation may occur at proof loads exceeding 7,000 pounds.



REGULAR PATTERN EYE BOLTS

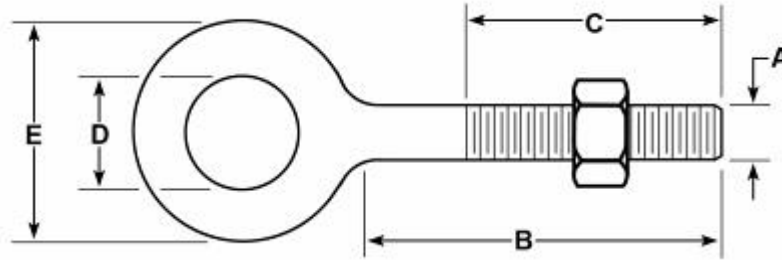

REGULAR PATTERN EYE BOLTS WITH HEAVY HEX NUTS

Size in Inches Diameter x Shank A B	Working Load Limit in Pounds*	Approx. Weight Each in Pounds	Dimensions in Inches		
			C	D	E
1/4 x 2	500	0.06	1.50	0.50	1.00
1/4 x 4	500	0.10	2.50	0.50	1.00
5/16 x 2.1/4	800	0.13	1.50	0.63	1.25
5/16 x 4.1/4	800	0.17	2.50	0.63	1.25
3/8 x 2.1/2	1,200	0.22	1.50	0.75	1.50
3/8 x 4.1/2	1,200	0.28	2.50	0.75	1.50
3/8 x 6	1,200	0.33	2.50	0.75	1.50
1/2 x 2	2,200	0.46	1.50	1.00	2.00
1/2 x 3.1/4	2,200	0.54	1.50	1.00	2.00
1/2 x 6	2,200	0.68	3.00	1.00	2.00
1/2 x 8	2,200	0.80	3.00	1.00	2.00
1/2 x 10	2,200	0.93	3.00	1.00	2.00
1/2 x 12	2,200	1.14	3.00	1.00	2.00
1/2 x 15	2,200	1.23	5.00	1.00	2.00
5/8 x 4	3,500	1.00	2.00	1.25	2.50
5/8 x 6	3,500	1.14	3.00	1.25	2.50
5/8 x 8	3,500	1.38	3.00	1.25	2.50
5/8 x 10	3,500	1.55	3.00	1.25	2.50
5/8 x 12	3,500	1.69	4.00	1.25	2.50
5/8 x 15	3,500	1.92	4.00	1.25	2.50
3/4 x 4.1/2	5,200	1.64	2.00	1.50	3.00
3/4 x 6	5,200	1.81	3.00	1.50	3.00
3/4 x 8	5,200	2.00	3.00	1.50	3.00
3/4 x 10	5,200	2.30	3.00	1.50	3.00
3/4 x 12	5,200	2.50	4.00	1.50	3.00
3/4 x 15	5,200	2.90	5.00	1.50	3.00
7/8 x 8	7,200	3.08	4.00	1.75	3.50
1 x 6	10,000	3.60	3.00	2.00	4.00
1 x 9	10,000	4.30	4.00	2.00	4.00
1 x 12	10,000	5.00	4.00	2.00	4.00

*Regular nut eye bolts are designed for straight line pull applications only.

Straight shank, forged carbon steel, heat treated, hot galvanized. Heavy hex nut according to ASME/ANSI B18.2.2.

Never insert the point of a hook in an eyebolt. Always use a shackle.


Never apply load at an angle.

WARNING: NEVER EXCEED WORKING LOAD LIMIT

Read important warnings and information on pages 2 - 9 and page 33.



SHOULDER PATTERN EYE BOLTS

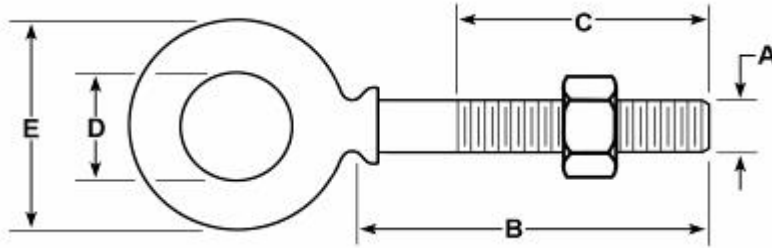

SHOULDER PATTERN EYE BOLT WITH HEAVY HEX NUT

Size in Inches Diameter x Shank A B	Working Load Limit in Pounds*	Approx. Weight Each in Pounds	Dimensions in Inches		
			C	D	E
1/4 x 2	650	0.06	1.50	0.50	0.88
1/4 x 4	650	0.09	2.50	0.50	0.88
5/16 x 2.1/4	1,200	0.11	1.50	0.63	1.13
5/16 x 4.1/4	1,200	0.15	2.50	0.63	1.13
3/8 x 2.1/2	1,500	0.19	1.50	0.75	1.38
3/8 x 4.1/2	1,500	0.25	2.50	0.75	1.38
1/2 x 3.1/4	2,600	0.41	1.50	1.00	1.75
1/2 x 6	2,600	0.59	3.00	1.00	1.75
5/8 x 4	5,200	0.83	2.00	1.25	2.25
5/8 x 6	5,200	1.00	3.00	1.25	2.25
3/4 x 4.1/2	7,200	1.50	2.00	1.50	2.75
3/4 x 6	7,200	1.70	3.00	1.50	2.75

Forged carbon steel, heat treated, hot galvanized. Heavy hex nut according to ASME/ANSI B18.2.2.


Never insert the point of a hook in an eyebolt. Always use a shackle.
DO NOT SIDE LOAD.

TYPE 316 STAINLESS STEEL, WITH STAINLESS HEAVY HEX NUT


Size in Inches Diameter x Shank A B	Working Load Limit in Pounds*	Approx. Weight Each in Pounds	Dimensions in Inches		
			C	D	E
1/4 x 4	500	0.10	2.50	0.50	0.88

WARNING:

* Working Load Limit applies to straight line pull only. When applying load at an angle the Working Load Limit is drastically reduced. Refer to Standard Rigging Handbook for reductions in Working Load Limit of shoulder pattern eye bolts for angular lifting. Above ratings apply only when the shoulder of the eyebolt is in full contact with the mating part of the load and the load is applied in the plane of the eye (see illustration).

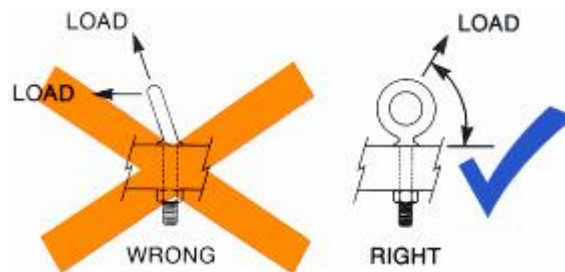

MACHINERY EYE BOLTS—SHOULDER PATTERN

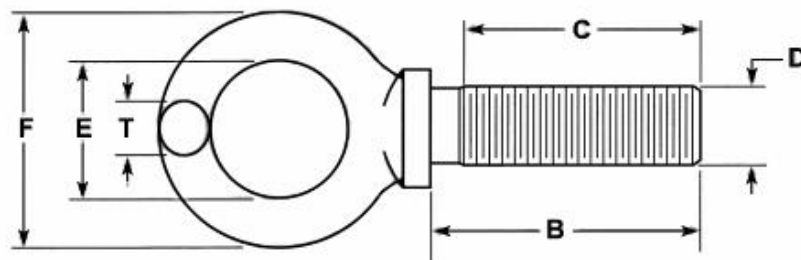

Size in Inches Diameter x Shank D B	Working Load Limit in Pounds*	Approx. Weight Each in Pounds	Dimensions in Inches			
			C	E	F	T
1/4 x 1	500	0.06	0.75	0.69	1.19	0.19
5/16 x 1.1/8	900	0.10	0.81	0.81	1.44	0.25
3/8 x 1.1/4	1,400	0.16	0.88	0.94	1.69	0.31
1/2 x 1.1/2	2,600	0.38	1.12	1.12	2.12	0.44
9/16 x 1.5/8	3,000	0.73	1.25	1.19	2.25	0.47
5/8 x 1.3/4	4,000	0.73	1.38	1.31	2.56	0.56
3/4 x 2	6,000	1.04	1.62	1.44	2.81	0.62
7/8 x 2.1/4	7,000	1.61	1.81	1.56	3.19	0.75
1 x 2.1/2	9,000	2.31	2.06	1.69	3.56	0.88

Forged carbon steel, quenched and tempered, self-colored. Dimensions according to ANSI/ASME B18.15, Type 2, Style A. Manufactured in accordance with A.S.T.M. A489. Rated capacities meet or exceed the requirements of ANSI/ASME 18.15 for Type 2, Style A.

Never insert the point of a hook in an eyebolt. Always use a shackle.
DO NOT SIDE LOAD.

WARNING:

* Working Load Limit applies to straight line pull only. When applying load at an angle, the Working Load Limit is drastically reduced. Refer to Standard Rigging Handbook for reductions in Working Load Limit of shoulder pattern eyebolts for angular lifting. Above ratings apply only when the shoulder of the eyebolt is in full contact and properly seated with the mating part of the load and the load is applied in the plane of the eye (see illustration).

