




ROV FITTINGS



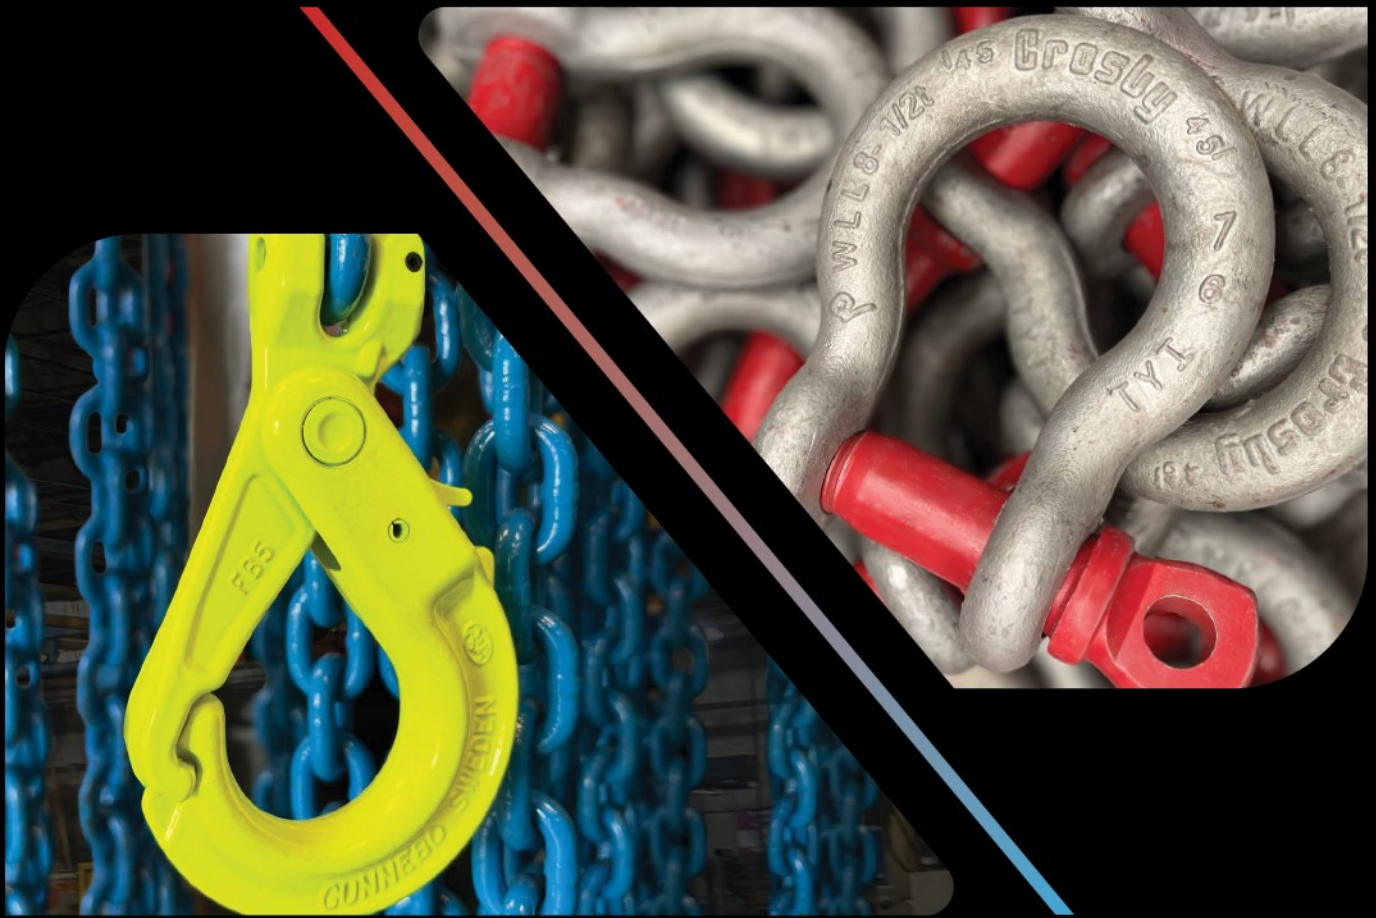

Crosby®




GUNNEBO®
Industries

PRODUCT CATALOG


with application & warning information

Imperial

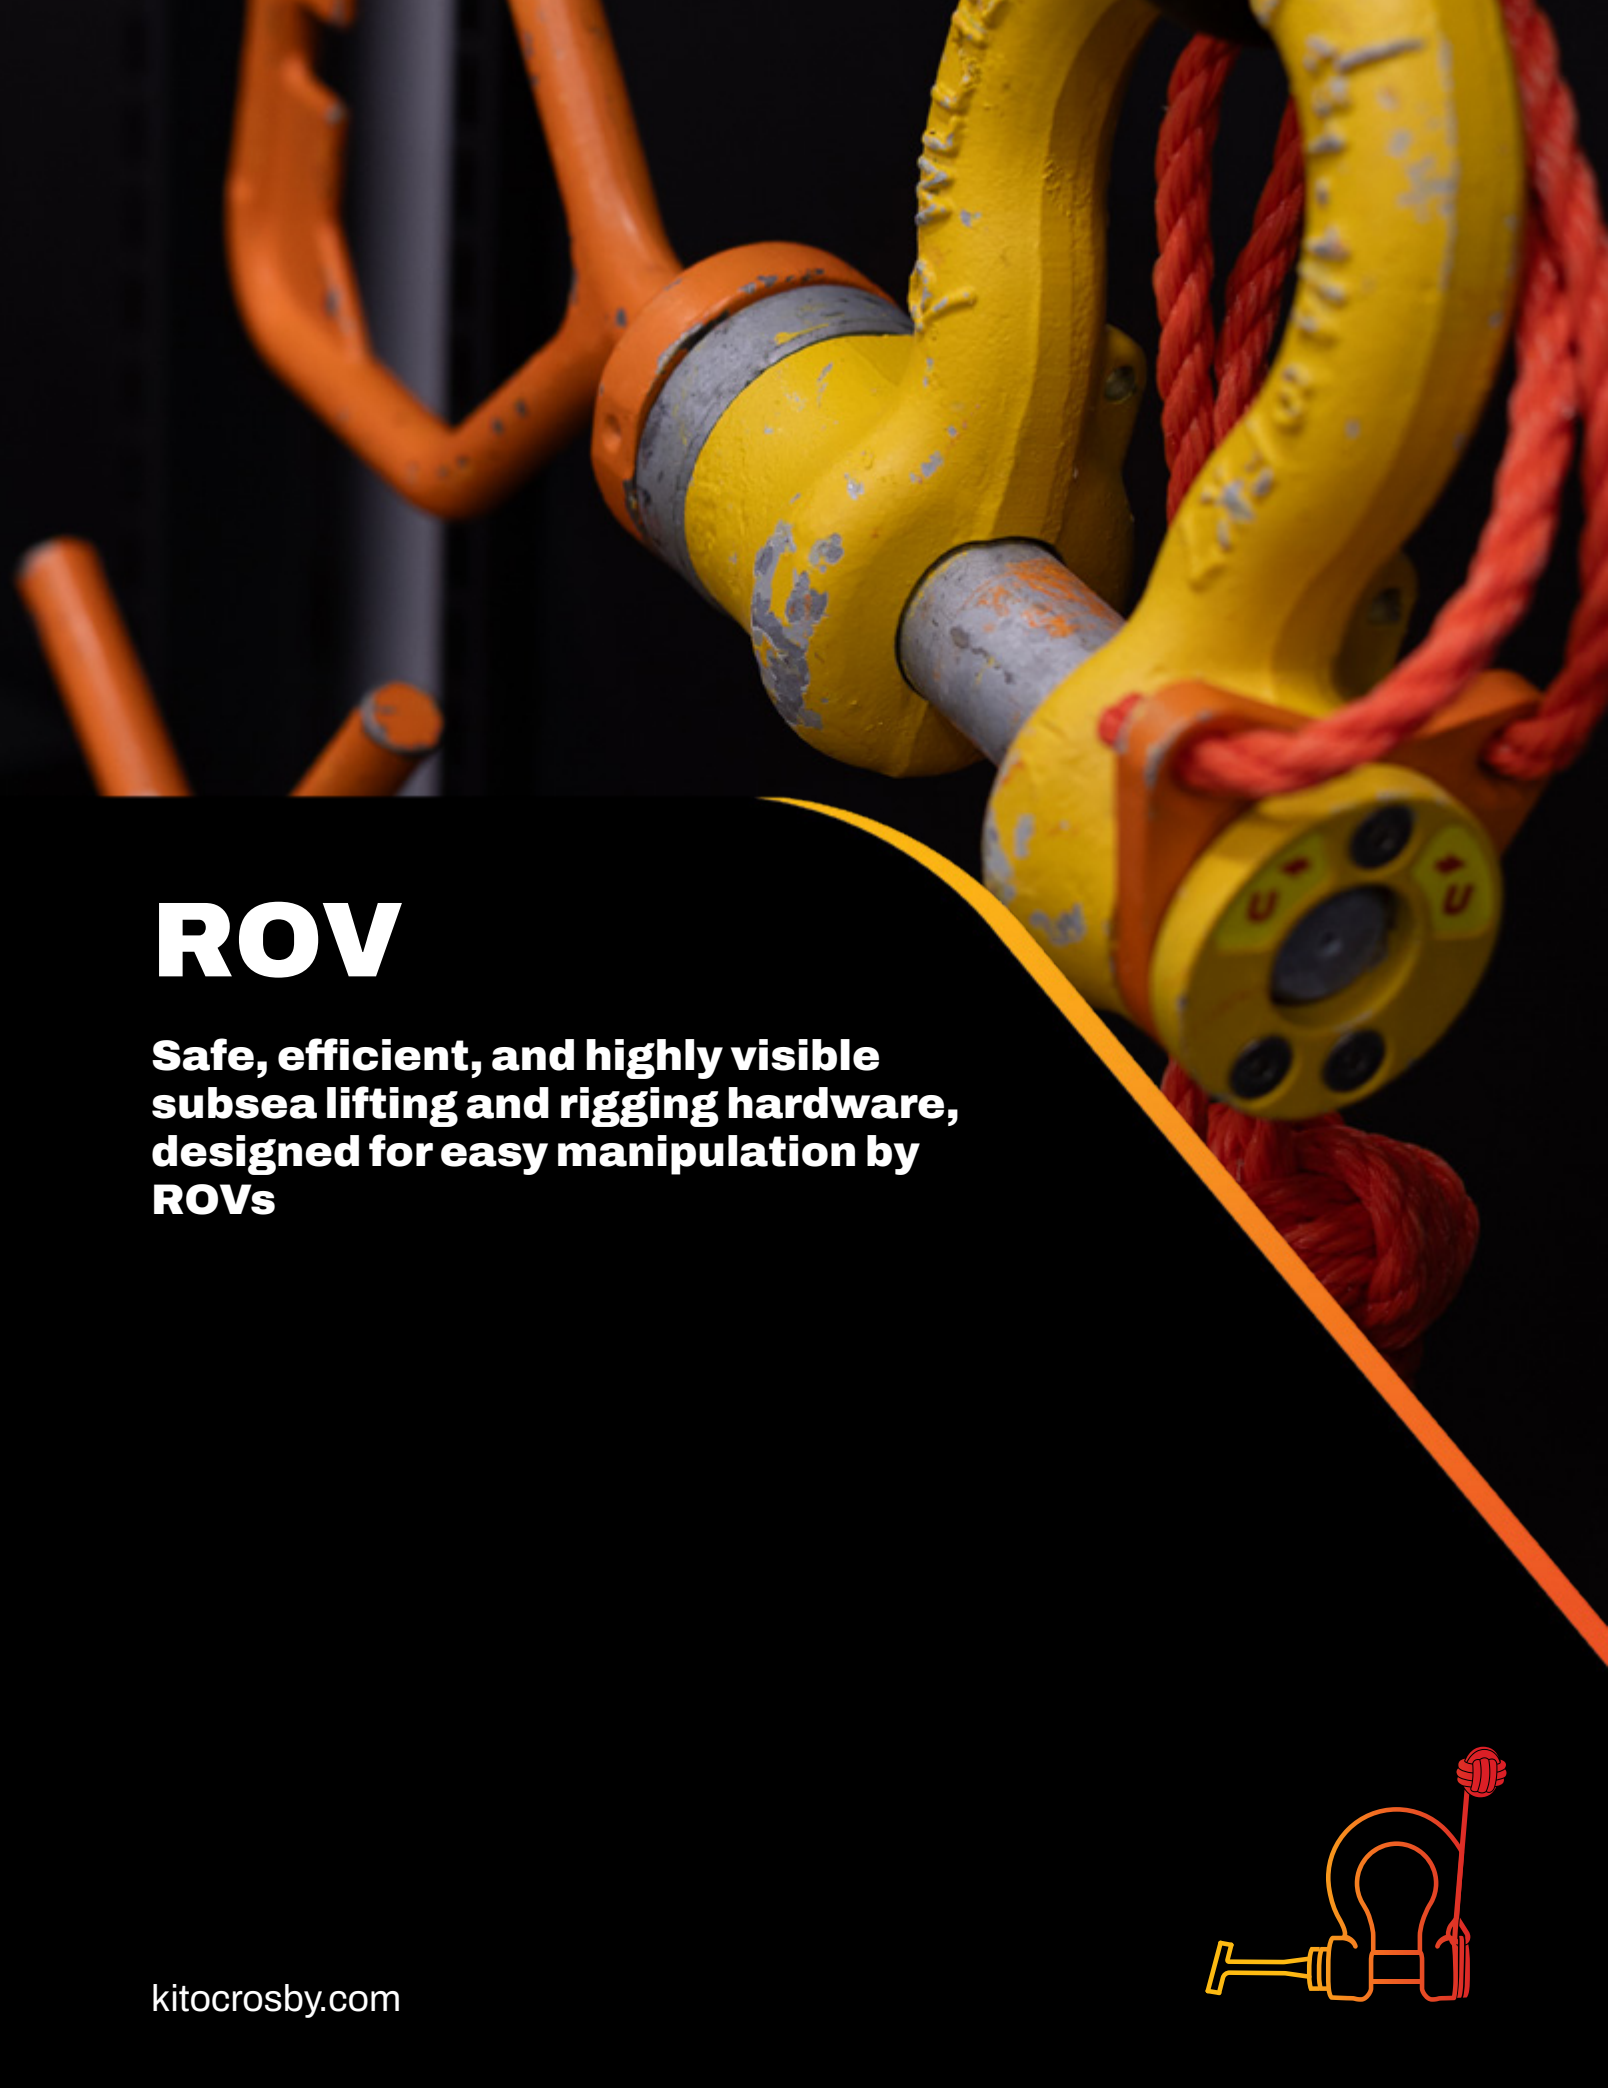


ROV

**Safe, efficient, and highly visible
subsea lifting and rigging hardware,
designed for easy manipulation by
ROVs**







G-2100
Release & Retrieve
ROV Shackle with
QUIC-Thread Bolt

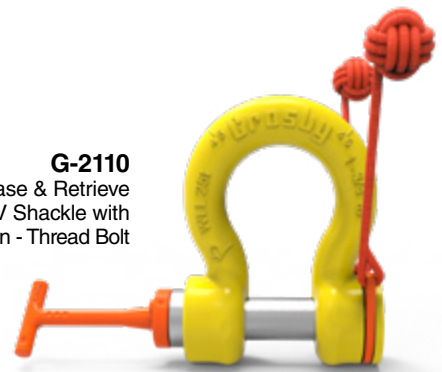

G-2110
Release & Retrieve
ROV Shackle with
Non - Thread Bolt

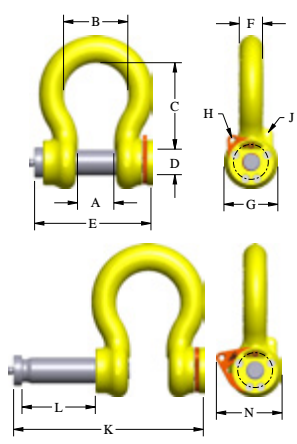

- Forged alloy bow with an industry best 6 to 1 performance design factor.
- Patented captured bolt can withstand over 2,000 lb (907 kg) of pull-out force.
- Galvanized bow with an API RP 17H color compliant coating.
- Galvanized alloy bolt (non-threaded) (G-2110).
- On average, QUIC-Thread bolt requires only 3.5 rotations for full engagement (G-2100).
- Raised pad for serialization.
- API RP 17H compliant 316 stainless steel handles available in T, D, F, and Eye models (sold separately).
- Built in eyelets for optional tether points.
- Monkey fist(s) included.
- Capacities from 9.5t through 85t.
- Forged steel, Quenched & Tempered, with alloy pins.
- Working Load Limit permanently shown on every shackle.
- QUIC-CHECK® deformation and angle indicators forged on the bow.

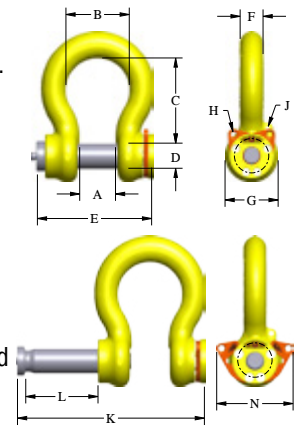

G-2100 ROV Release & Retrieve Shackle — QUIC-Threaded

Working Load Limit (t)	Stock No.	Weight Each (lb)	Dimensions (in)													Replacement Retaining Ring Kit Stock No.
			A	B	C	D	E	F	G	H	J	K	L	N		
9.5	2038739	11.4	1.81	2.91	4.25	1.25	7.33	1.16	2.68	0.38	0.31	11.54	4.21	4.97	1020007	
12	2038762	13.8	2.03	3.25	4.69	1.38	7.75	1.29	3.00	0.38	0.31	12.25	4.50	4.97	1020016	
17	2038785	23.7	2.38	3.88	5.75	1.63	8.54	1.53	3.62	0.50	0.31	13.74	5.20	6.28	1020025	
25	2038614	38.6	2.88	5.00	7.00	2.00	9.54	1.84	4.20	0.50	0.38	15.48	5.94	6.94	1020034	
35	2038808	51.2	3.25	5.75	7.74	2.28	10.41	2.08	4.82	0.50	0.38	16.97	6.56	6.94	1020043	
55	2038831	108	4.12	7.25	10.49	2.78	12.61	2.72	5.81	0.50	0.38	20.74	8.13	8.53	1020052	
85	2038877	157	5.00	7.88	12.98	3.28	14.23	3.12	6.50	0.50	0.50	23.61	9.38	8.53	1020061	

6:1 Design Factor. Maximum Proof Load is 2 times the Working Load Limit.

G-2110 ROV Release & Retrieve Shackle — Non-Threaded

Working Load Limit (t)	Stock No.	Weight Each (lb)	Dimensions (in)												Replacement Retaining Ring Kit Stock No.
			A	B	C	D	E	F	G	H	J	K	L	N	
9.5	2038740	11.4	1.81	2.91	4.25	1.25	7.33	1.16	2.68	0.38	0.31	11.54	4.21	4.97	1020007
12	2038763	13.8	2.03	3.25	4.69	1.38	7.75	1.29	3.00	0.38	0.31	12.25	4.50	4.97	1020016
17	2038786	23.7	2.38	3.88	5.75	1.63	8.54	1.53	3.62	0.50	0.31	13.74	5.20	6.28	1020025
25	2038621	38.6	2.88	5.00	7.00	2.00	9.54	1.84	4.20	0.50	0.38	15.48	5.94	6.94	1020034
35	2038809	51.2	3.25	5.75	7.74	2.28	10.41	2.08	4.82	0.50	0.38	16.97	6.56	6.94	1020043
55	2038832	108	4.12	7.25	10.49	2.78	12.61	2.72	5.81	0.50	0.38	20.74	8.13	8.53	1020052
85	2038878	157	5.00	7.88	12.98	3.28	14.23	3.12	6.50	0.50	0.50	23.61	9.38	8.53	1020061

6:1 Design Factor. Maximum Proof Load is 2 times the Working Load Limit.





"D" Handle







"F" Handle



"Eye" Handle



"T" Handle



- New Interchangeable handles for ROV shackle bolts.
- For use with G-2100 and G-2110 ROV shackles only.
- Handles are stainless steel and painted fluorescent orange.
- "D" and "F" handle kits available containing handle, retaining bolts, and individual packet of Loctite for easy installation.


G-42100H ROV Handles

Handle Style	Stock No.	Weight Each (lb)	Dimensions (in)									
			A	B	C	D	E	F	G	H	J	K
D	1021324	4.5	0.28	0.24	0.29	2.75	0.75	1.75	5.04	9.9	0.75	—
F	1021315	5	0.28	0.24	0.29	2.75	0.75	1.75	5.5	12.29	—	—
T	1021306	2.4	0.28	0.24	0.29	2.75	0.75	0.75	3.82	6.18	—	0.75
Eye	1021333	2.1	0.28	0.24	0.29	2.75	0.75	0.75	—	3.69	0.86	—



ROV Shackles


The ROV Retrieve Shackle is designed for smooth and easy use in retrieving and releasing subsea lifting and rigging operations. It has no loose parts in closed or opened position. Therefore there is no need for wires or monkey fists. The high visibility handles are close-die forged and has double safety functions. The shark tooth locking with indicator that will show if the shackle is in open or locked position as well as the spring loaded handle. The handle is the same size, regardless of size of shackle. The ROV Retrieve Shackle No. 861 is an easy to operate shackle, saving valuable time and money.

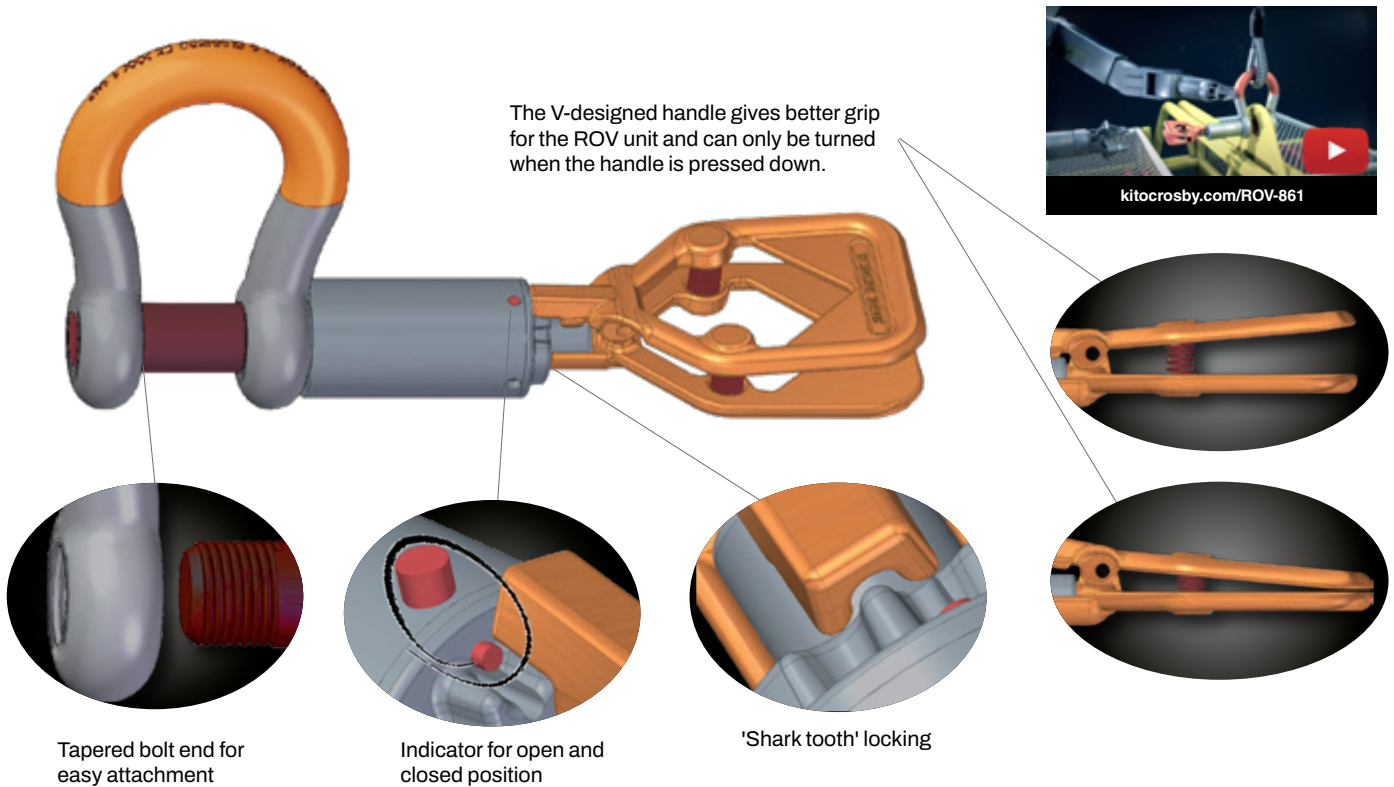

ROV Retrieve Shackle No 861


All shackles have unique markings.

- Dim. according to EN 13889
- High tensile steel, Quenched & Tempered
- All load bearing parts hot-dip galvanized
- Test certificate and traceable 3.1 certificate supplied upon request.
- Temperature: -40 °F to 392 °F

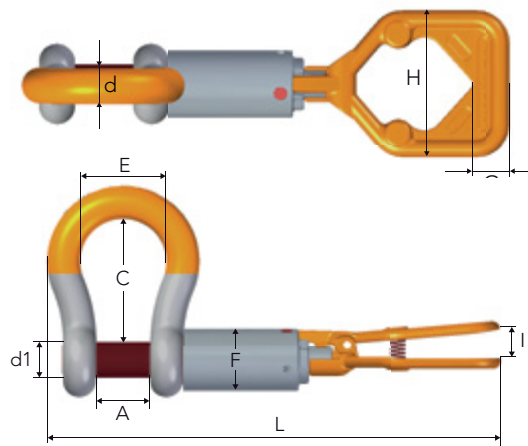

Stock No.	WLL (t)	Design Factor	Dimensions (in)										Weight (lb)
			d1	d	A	C	E	F	L	I	H	G	
A086128	9.5	6:1	1.26	1.10	1.81	4.25	2.91	2.36	17.32	1.22	5.20	1.30	14.3
A086132	12.0	6:1	1.38	1.26	2.05	4.69	3.27	2.36	18.11	1.22	5.20	1.30	17.6
A086138	17.0	6:1	1.65	1.50	2.36	5.75	3.86	2.50	19.72	1.22	5.20	1.30	23.1
A086145	25.0	6:1	1.97	1.77	2.91	7.01	5.00	2.76	22.24	1.22	5.20	1.30	36.3
A086152	35.0	6:1	2.24	1.97	3.27	7.76	5.43	2.99	23.78	1.22	5.20	1.30	45.1
A086164	55.0	6:1	2.76	2.56	4.13	10.24	7.09	3.46	28.03	1.22	5.20	1.30	92.5
A086176	85.0	5:1	3.27	3.31	5.24	12.99	7.48	4.25	29.33	1.22	5.20	1.30	170.25

ROV Release Shackle No 863

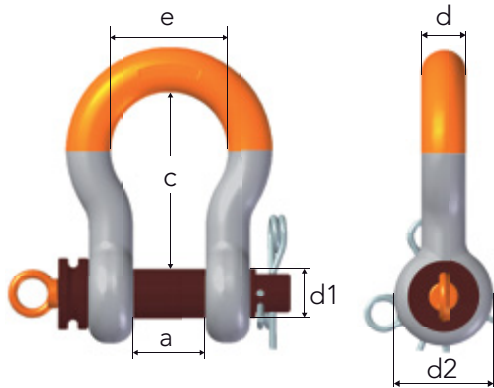

- Equipped with bolt and two locking pins
- Dim. according to EN 13889
- High tensile steel, Quenched & Tempered
- All load bearing parts hot-dip galvanized
- 5:1 Design Factor
- Test certificate and traceable 3.1 certificate supplied on request.
- Temperature: -40 °F to 392 °F




Stock No.	WLL metric tonnes	d1	d	a	c	d2	e	Weight (lb)
A086322	6.5	0.98	0.87	1.46	3.31	2.05	2.28	3.52
A086328	9.5	1.26	1.10	1.81	4.25	2.52	2.91	7.49
A086332	12.0	1.38	1.26	2.05	4.69	2.83	3.27	11.0
A086338	17.0	1.65	1.50	2.36	5.75	3.31	3.86	17.1
A086345	25.0	1.97	1.77	2.91	7.01	4.13	5.00	30.6
A086352	35.0	2.24	1.97	3.27	7.76	5.00	5.43	37.4
A086364	55.0	2.76	2.56	4.13	10.24	5.98	7.09	81.5

8

G-209R



- Capacities from 6-1/2t through 55t.
- Forged steel, Quenched & Tempered, with alloy pins.
- Working Load Limit permanently shown on every shackle.
- Fatigue rated.
- QUIC-CHECK® deformation and angle indicators forged on the bow.
- All ROV shackle bows are galvanized, then painted fluorescent yellow.
- Look for the Red Pin®... the mark of genuine Crosby quality.



G-209R Subsea Shackles

Working Load Limit (t)	Stock No.	Weight Each (lb)	Dimensions (in)								
			A +/- .25	B	C	H	L	O	P	S	T
6.5	1020872	3.62	1.44	1.00	3.31	5.83	4.03	1.18	2.28	.65	.39
8.5	1020902	5.03	1.69	1.13	3.75	6.56	4.69	1.18	2.40	.73	.39
9.5	1020932	7.41	1.81	1.25	4.25	7.47	5.16	2.28	3.27	.75	.47
12	1020952	9.50	2.03	1.38	4.69	8.25	5.75	2.28	3.31	.89	.47
13.5	1020972	13.53	2.25	1.50	5.25	9.16	6.38	2.36	3.58	.91	.59
17	1020992	17.20	2.38	1.63	5.75	10.00	6.88	2.36	3.66	1.18	.59
25	1021102	27.78	2.88	2.00	7.00	12.34	8.86	2.16	4.49	1.14	.69
35	1021125	45.00	3.25	2.25	7.75	13.68	9.97	2.60	5.12	1.18	.79
55	1021158	85.75	4.13	2.75	10.50	17.84	12.87	2.76	5.63	1.50	.98

5:1 Design Factor. Maximum Proof Load is 2.0 times the Working Load Limit.

Load Rated

Fatigue Rated

QUIC-CHECK®

QT

CE

APPLICATION AND WARNING INFORMATION
SECTION 17


L-562A



- Hook identification code stamped on each hook.
- Quenched & Tempered.
- QUIC-CHECK® angle indicators forged into the top eye; and deformation and angle indicators forged on the hook.
- Fluorescent yellow finish for high subsea visibility.
- Tip extension allows for easy handling.
- Sizes 5.4t through 31.5t utilize a new integrated latch (S-4320) that meets the world-class standard for lifting.
 - Heavy duty stamped latch interlocks with the hook tip.
 - High cycle, long life spring.
- Pad eyes are provided on either side of hook as cable guides. The cable is passed through a hole drilled in the latch that assists in allowing the remotely operated cable to open latch.
- Crosby supplies latches with drilled holes for sizes 5.4t through 31.5t. Other sizes can be fitted by your local Authorized Crosby Dealer. Cables are not provided by Crosby.



APPLICATION AND WARNING INFORMATION
SECTION 17

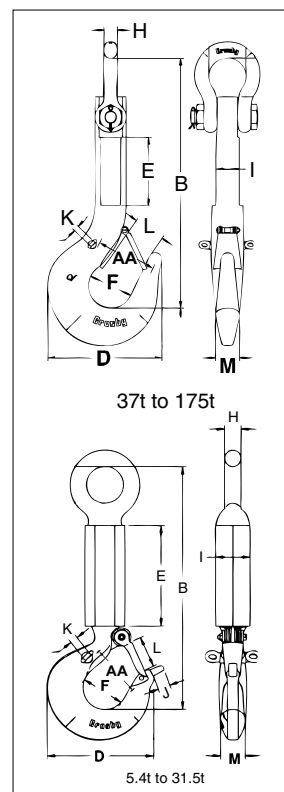

L-562A ROV Eye Shank Hooks


Working Load Limit (t)	Hook ID Code	L-562A Stock No.	Weight Each (lb)	Dimensions (in)											Replacement Latch Stock No.
				I	E	B	D	J	F	M	H	L	K	AA*	
†5.4	IA	1297722	21	2.56	9.84	16.57	4.84	.39	2.00	1.13	.88	1.36	.25	2.50	1096515
†11.5	KA	1297792	33	2.56	9.84	20.39	7.54	1.18	3.00	1.63	1.25	2.08	.38	4.00	1096611
†16	LA	1297806	42	2.56	9.84	21.65	8.34	1.18	3.25	1.94	1.38	2.27	.38	4.00	1096657
†22	NA	1297862	68	3.35	9.84	23.94	10.34	1.77	4.25	2.38	1.59	3.02	.75	5.00	1096704
31.5	OA	1298042	97	3.35	9.84	26.00	13.62	-	5.00	3.00	1.89	3.62	.75	6.50	1090161
‡37	PA	1298049	97	3.15	9.25	32.58	14.06	-	5.38	3.00	1.84	3.75	.75	7.00	1090189
‡45	SA	1298057	198	3.15	9.25	34.07	15.44	-	6.00	3.25	1.84	4.25	.75	8.00	1090189
‡60	TA	1298087	289	3.54	8.46	37.06	18.50	-	7.00	3.91	2.08	5.12	.75	10.00	1090205
‡100	WA	1298103	668	5.51	11.81	46.67	23.00	-	6.81	5.50	2.71	4.88	.75	12.00	1090241
‡150	XA	1298117	871	5.91	9.06	48.53	24.38	-	6.75	6.00	3.62	5.38	.75	13.00	1090241
**175	YA	1298130	1135	6.69	10.04	52.24	26.69	-	7.50	7.00	4.00	-	.75	13.00	143062

4:1 Design Factor. * Deformation Indicators. † Utilizes Crosby S319N style hook. Maximum proof load is 2 times the Working Load Limit. ‡ Utilizes Crosby G-2140 shackle as eye.

L-320R



- Hook identification code stamped on each hook.
- Quenched & Tempered.
- QUIC-CHECK® deformation and angle indicators forged on the hook.
- Fluorescent yellow finish for high subsea visibility.
- Tip extension allows for easy handling.
- Sizes 3.2t through 31.5t utilize new integrated latch (S-4320) that meets the world-class standard for lifting.
 - Heavy duty stamped latch interlocks with the hook tip.
 - High cycle, long life spring.
- Pad eyes are provided on either side of hook as cable guides. The cable is passed through a hole drilled in the latch that assists in allowing the remotely operated cable to open latch.
- Crosby supplies latches with drilled holes for sizes 5.4t through 31.5t. Other sizes can be fitted by your local authorized distributor. Cables are not provided by Crosby.

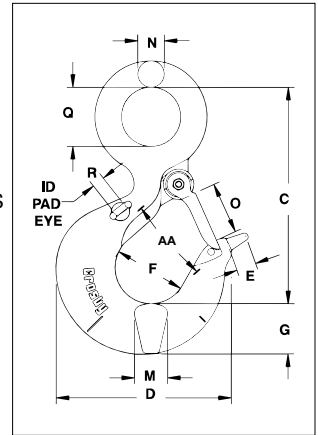

Load Rated

Fatigue Rated

QUIC-CHECK®

QT

CE

APPLICATION AND WARNING INFORMATION
SECTION 17

L-320R ROV Hooks

Working Load Limit (t)	Hook ID Code	L-320R Stock No.	Weight Each (lb)	Dimensions (in)											Replacement Latch Stock No.
				C	D	E	F	G	M	N	O	Q	R	AA*	
†3.2	HA	1298427	2.0	4.69	3.97	.39	1.63	1.13	.94	.58	1.09	1.25	.25	2.00	1096468
†5.4	IA	1298497	4.0	5.77	4.81	.39	2.00	1.44	1.31	.72	1.36	1.56	.25	2.50	1096515
†8	JA	1298567	8.2	7.37	6.27	.79	2.50	1.81	1.66	.90	1.61	2.00	.38	3.00	1096562
†11.5	KA	1298637	15	9.07	7.45	1.18	3.00	2.25	1.63	1.11	2.08	2.44	.38	4.00	1096611
†16	LA	1298707	21	10.19	8.39	1.18	3.25	2.59	1.94	1.27	2.33	2.84	.38	4.00	1096657
†22	NA	1298777	38	12.53	10.30	1.77	4.25	3.00	2.38	1.56	3.02	3.50	.75	5.00	1096704
†31.5	OA	1298847	60	14.07	13.63	-	5.00	3.62	3.00	1.75	3.67	3.50	.75	6.50	1090161
37	PA	1298857	107	18.19	14.06	-	5.38	4.56	3.19	2.00	3.75	4.50	.75	7.00	1090189
45	SA	1298867	137	20.12	15.45	-	6.00	5.06	3.24	2.18	4.25	4.94	.75	8.00	1090189
60	TA	1298877	224	23.72	18.50	-	7.00	6.00	3.91	2.53	5.12	5.69	.75	10.00	1090205


4:1 Design Factor. *Deformation Indicators. †Utilizes Crosby S320N style hook. Maximum proof load is 2 times the Working Load Limit.



Green Pin® Spring Release ROV Shackle



Release ROV shackle (grade 80) with spring

Scan for additional product details



P-5367

- **Material:** bow and pin alloy steel, grade 80, polar quality, quenched and tempered
- **Safety factor:** MBL equals 5 x WLL
- **Finish:** body painted white, pin painted green
- **Temperature range:** -40 °F up to +392 °F
- **Certification:** 2.1 2.2 3.1 MTC^a MTC^b * LROS * CE IIA
- **Article code:** scan QR code to see article codes
- **Note:** for in-line use only.
this shackle is assembled with wire rope slings and monkey's fist. For size starting from WLL 42.5 t up to and including 150 t a special compression tool (sold separately) is required to assemble the shackle.



working load limit	diameter bow	diameter pin	diameter eye	width eye	width inside	length inside	width bow	length	length bolt	width	weight pin	weight each
metric t	a inch	b inch	c inch	d inch	e inch	f inch	g inch	h inch	i inch	j inch	lbs	lbs
12	1 1/4	1 3/8	2 27/32	1 1/4	2	4 17/32	3 9/32	7 29/32	11 15/32	5 25/32	4.41	11.55
13.5	1 3/8	1 1/2	3 5/32	1 3/8	2 1/4	5 1/4	3 5/8	8 15/16	11 27/32	6 3/8	5.29	15.43
17	1 1/2	1 5/8	3 15/32	1 1/2	2 3/8	5 3/4	3 29/32	9 13/16	14 3/16	6 7/8	7.72	20.4
25	1 3/4	2	4 1/16	1 25/32	2 29/32	7	4 31/32	11 13/16	14 9/16	8 1/2	11.46	34.2
35	2	2 1/4	4 9/16	1 31/32	3 9/32	7 3/4	5 7/16	13 5/32	15 3/4	9 3/8	15.65	45
42.5	2 1/4	2 9/16	5 1/8	2 1/4	3 3/4	8 3/4	6 5/16	14 27/32	18 1/8	10 25/32	24.9	86
55	2 1/2	2 3/4	5 23/32	2 9/16	4 1/8	10 1/4	7 3/32	17 1/16	19 9/32	12 7/32	30.4	93
85	3	3 1/4	6 3/8	2 15/16	5	12 15/16	7 15/32	20 3/4	23 1/8	13 3/8	51	148
120	3 3/4	3 3/4	8 3/16	3 19/32	5 25/32	15 23/32	9 3/8	25 7/16	27 1/16	16 27/32	82	271
150	4 1/8	4 1/4	9 3/8	4 1/32	6 21/32	16 5/32	10 13/16	27 3/32	28 5/8	19 3/32	108	370


* For shackles ≥ WLL 150 t

CAD RFID INFO




Green Pin® Compression Tool

Tool to wind up spring release shackle (sizes WLL 42.5 t and up)



P-5368



- **Material:** mild steel
- **Finish:** black painted
- **Certification:** 2.1
- **Article code:** scan QR code to see article codes
- **Note:** required for ROV spring release shackle (type P-5367), for sizes WLL 42.5 t and up



for shackle WLL	diameter bow	diameter pin	width	length closed position	length opened position	height	width	weight each
metric t	inch	inch	a inch	b inch	c inch	d inch	e inch	lbs
42.5	2 1/4	2 9/16	11 13/16	39 3/8	59 1/16	8 27/32	15/16	75
55	2 1/2	2 3/4						
85	3	3 1/4						
120	3 3/4	3 3/4	13 3/8	43 5/16	68 29/32	11 7/32	15/16	93
150	4 1/8	4 1/4						

CAD INFO

GREEN PIN[®]

PRODUCT CATALOGUE

IMPERIAL



ROV SHACKLES & HOOKS



Applications

Green Pin® ROV shackles and hooks are used in sub-sea lifting operations. These products are more specialized than others. More fit to the extreme conditions under water. Like our subsea shackles and hooks for ROV operations. Green Pin® offers an ocean of possibilities with our range of specialized components. Designed and produced with the right subsea mindset. For more control. For more precision. And for more possibilities.

Range

Green Pin® offers a wide range of ROV shackles and hooks for a variety of applications. The range stretches from WLL 6.5 t to 300 t. This provides our customers with a very extensive range to choose a shackle or hook that suits their application best.

Design

Green Pin® offers four types of ROV release shackles and two types of combined release & retrieve shackles. Showpieces in this range are the Green Pin® Guided Pin ROV Shackle (for release and retrieve operations) and the Green Pin® Locking Clamp ROV (Sling) Shackle (for release operations only). ROV release shackles are available with spring pins, locking clamps or spring loaded.

Next to the shackles Green Pin® also offers two types of ROV hooks: the Green Pin® ROV Eye Hook and Green Pin® ROV Shank Hook. Both hooks can be used for release operations while the shank hook can be used for retrieve operations as well. Each hook has a wire rope attached to the latch to make operation with an ROV arm easier.

These shackles and hooks are generally marked with:

- Working Load Limit - e.g. WLL 25 T
- manufacturer's symbol - e.g. GP
- traceability code - e.g. HA indication a particular batch
- steel grade - e.g. 8
- CE conformity code (Conformité Européenne) - e.g. CE
- Origin - e.g. Holland or France

Finish

All shackle bodies and hooks are finished with a white coating for optimized visibility in poor light conditions. The pins are finished in the instantly recognizable and characteristic 'Green Pin®' colour.

Certification

Specific details of certificate availability can be found on each product page. Please verify your certification requirements at the time of order.


Instructions for use

For instructions for use, assembly, etc. we refer to chapter 1 shackles for the ROV shackles, and chapter 3 for the ROV hooks. For shackles P-5363 and P-5367 the side load table is not applicable as these shackles are not allowed to be side loaded.



To keep stored ROV products in a good condition it is best to lightly oil the shackles and hooks after rinsing them with fresh water and drying.

ROV shackles and hooks must be regularly inspected in accordance with the safety standards given in the country of use. This is required because the products in use may be affected by wear, misuse, overloading etc. which may lead to deformation and alteration of the material structure. Inspection should take place at least every six months (follow the local rules in the country of use) and more frequently when the shackles and hooks are used in severe operating conditions.

For most ROV products is a specific user manual available, please find the digital user manuals on greenpin.com/faq.



P-5361D



Green Pin® Tapered Pin ROV Shackle D


Release & retrieve ROV shackle (grade 80) with tapered pin and D-handle

- **Material:** bow and pin alloy steel, grade 80, polar quality, quenched and tempered
- **Safety factor:** MBL equals 5 x WLL
- **Finish:** body painted white, pin painted green
- **Temperature range:** -76 °F up to +392 °F
- **Certification:** 2.1 2.2 3.1 MTC CE IIA
- **Article code:** scan QR code to see article codes
- **Note:** supplied without wires; design your own wiring plan





working load limit	diameter bow	diameter pin	diameter eye	width eye	width inside	length inside	width bow	length	length bolt	width	diameter	weight each
metric t	a inch	b inch	c inch	d inch	e inch	f inch	g inch	h inch	i inch	j inch	k inch	lbs
6.5	7/8	1	2 1/16	7/8	1 13/32	3 9/32	2 9/32	5 21/32	13 19/32	4 1/32	1/8	8.36
9.5	1 1/8	1 1/4	2 5/8	1 3/32	1 27/32	4 1/4	2 15/16	7 9/32	15	5 5/32	7/32	11.86
12	1 1/4	1 3/8	2 27/32	1 1/4	2	4 17/32	3 9/32	7 29/32	15 15/32	5 25/32	1/4	14.33
17	1 1/2	1 5/8	3 15/32	1 1/2	2 3/8	5 3/4	3 29/32	9 13/16	16 13/32	6 7/8	11/32	18.06
25	1 3/4	2	4 1/16	1 25/32	2 29/32	7	4 31/32	11 13/16	18 9/32	8 1/2	11/32	31.3
35	2	2 1/4	4 3/8	1 31/32	3 9/32	7 3/4	5 7/16	13 1/32	19 1/16	9 3/8	11/32	43.9
42.5	2 1/4	2 9/16	5 1/8	2 1/4	3 3/4	8 3/4	6 5/16	14 27/32	20 5/16	10 25/32	9/32	62
55	2 1/2	2 3/4	5 23/32	2 9/16	4 1/8	10 1/4	7 3/32	17 1/16	21 15/32	12 7/32	9/32	87

CAD INFO



P-5361F



Green Pin® Tapered Pin ROV Shackle F

Release & retrieve ROV shackle (grade 80) with tapered screw pin and Fishtail handle

- **Material:** bow and pin alloy steel, grade 80, polar quality, quenched and tempered
- **Safety factor:** MBL equals 5 x WLL
- **Finish:** body painted white, pin painted green
- **Temperature range:** -76 °F up to +392 °F
- **Certification:** 2.1 2.2 3.1 MTC CE IIA
- **Article code:** scan QR code to see article codes
- **Note:** supplied without wires; design your own wiring plan



working load limit	diameter bow	diameter pin	diameter eye	width eye	width inside	length inside	width bow	length	length bolt	width	diameter	weight each
metric t	a inch	b inch	c inch	d inch	e inch	f inch	g inch	h inch	i inch	j inch	k inch	lbs
6.5	7/8	1	2 1/16	7/8	1 13/32	3 9/32	2 9/32	5 21/32	16 1/2	4 1/32	1/8	8.95
9.5	1 1/8	1 1/4	2 19/32	1 3/32	1 27/32	4 1/4	2 15/16	7 9/32	17 29/32	5 5/32	7/32	8.07
12	1 1/4	1 3/8	2 27/32	1 1/4	2	4 17/32	3 9/32	7 29/32	18 3/8	5 25/32	1/4	10.82
17	1 1/2	1 5/8	3 15/32	1 1/2	2 3/8	5 3/4	3 29/32	9 13/16	19 11/32	6 7/8	11/32	18.06
25	1 3/4	2	4 1/16	1 25/32	2 29/32	7	4 31/32	11 13/16	21 3/16	8 1/2	11/32	31.3
35	2	2 1/4	4 3/8	1 31/32	3 9/32	7 3/4	5 7/16	13 1/32	21 21/32	9 3/8	11/32	43.9
42.5	2 1/4	2 9/16	5 1/8	2 1/4	3 3/4	8 3/4	6 5/16	14 27/32	23 7/32	10 25/32	9/32	62
55	2 1/2	2 3/4	5 23/32	2 9/16	4 1/8	10 1/4	7 3/32	17 1/16	24 3/8	12 7/32	9/32	87

CAD INFO



Green Pin® ROV Shank Hook E GR8

Release & retrieve ROV eye shank hook (grade 80)

Scan for
additional
product
details





- **Material:** alloy steel, grade 80, quenched and tempered
- **Safety factor:** MBL equals 4 x WLL
- **Finish:** painted white
- **Temperature range:** -40 °F up to +392 °F
- **Certification:** 2.1 2.2 3.1 MTC^a MPI^b US^b CE IIA
- **Article code:** scan QR code to see article codes



P-6740

working load limit	diameter	thickness	thickness	diameter	diameter	width	opening	thickness	width	thickness	width	length	weight each
metric	a	b	c	d	e	f	g	h	i	j	k	l	lbs
t	inch	inch	inch	inch	inch	inch	inch	inch	inch	inch	inch	inch	
12	2 15/32	1 27/32	1 21/32	1 9/16	3 5/32	1 1/2	2 1/16	1 25/32	2 9/32	2 5/8	2 3/32	23 5/8	24
16	2 25/32	2 7/32	1 31/32	1 25/32	3 17/32	1 25/32	2 13/32	2 3/32	2 5/8	3 5/32	2 15/32	25 19/32	26
22	3 5/32	2 1/2	2 7/32	2 5/32	4 11/32	2	2 23/32	2 3/8	2 15/16	3 17/32	2 29/32	26 27/32	27
32	3 17/32	2 7/8	2 17/32	2 3/8	4 23/32	2 1/8	3 1/32	2 5/8	3 17/32	4 11/32	3 7/32	31 31/32	32
55	4 29/32	4 1/32	3 17/32	2 15/16	5 29/32	2 29/32	4 1/8	3 3/4	4 21/32	5 1/2	4 13/32	36 3/16	36
80	5 1/2	4 17/32	3 31/32	3 17/32	7 3/32	3 11/16	4 21/32	4 3/16	5 13/32	6 7/8	4 29/32	41 5/16	41

CAD RFID

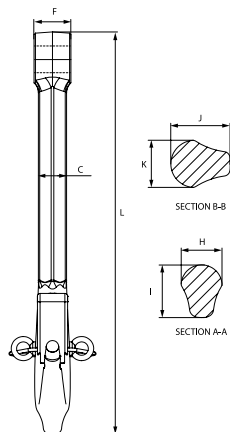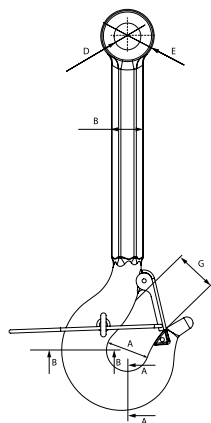



Green Pin® ROV Hook E GR8

Release ROV eye hook (grade 80)

- **Material:** alloy steel, grade 80, quenched and tempered
- **Safety factor:** MBL equals 4 x WLL
- **Finish:** painted white
- **Temperature range:** -40 °F up to +392 °F
- **Certification:** 2.1 2.2 3.1 MPI[®]
- **Article code:** scan QR code to see article codes




working load limit	length	diameter eye inside	opening hook	thickness	width	diameter eye outside	width outside	length outside	width	thickness	weight each
metric t	a inch	b inch	c inch	d inch	e inch	f inch	g inch	h inch	i inch	j inch	lbs
8.2	7 17/32	2 1/16	1 11/16	1 9/16	1 11/16	3 11/16	6 1/2	10 1/32	13/16	21/32	7.65
12.8	9 11/32	2 13/32	2 13/32	1 15/16	2 13/32	4 17/32	8 3/16	12 27/32	1 3/32	13/16	15.74
15.5	11 1/32	2 27/32	2 15/16	2 1/8	2 17/32	5 3/16	9 17/32	14 3/4	1 3/16	29/32	22.5

CAD RFID



CSOROV








Green Pin® Spring Pin ROV Shackle

Release ROV shackle (grade 80) with spring pins

Scan for
additional
product
details



P-5363



- **Material:** bow and pin alloy steel, grade 80, polar quality, quenched and tempered
- **Safety factor:** MBL equals 5 x WLL
- **Finish:** body painted white, pin painted green
- **Temperature range:** -76 °F up to +392 °F
- **Certification:** 2.1 2.2 3.1 MTC[®] CE II A
- **Article code:** scan QR code to see article codes
- **Note:** for in-line use only.
supplied without wires; design your own wiring plan

working load limit	diameter bow	diameter pin	diameter eye	width eye	width inside	length inside	width bow	length	length bolt	width	diameter	weight each
metric t	a inch	b inch	c inch	d inch	e inch	f inch	g inch	h inch	i inch	j inch	k inch	lbs
6.5	$\frac{7}{8}$	1	$2\frac{1}{16}$	$\frac{7}{8}$	$1\frac{13}{32}$	$3\frac{9}{32}$	$2\frac{9}{32}$	$5\frac{21}{32}$	$5\frac{1}{8}$	$4\frac{1}{32}$	$\frac{7}{32}$	3.75
9.5	$1\frac{1}{8}$	$1\frac{1}{4}$	$2\frac{19}{32}$	$1\frac{3}{32}$	$1\frac{27}{32}$	$4\frac{1}{4}$	$2\frac{15}{16}$	$7\frac{9}{32}$	$6\frac{17}{32}$	$5\frac{5}{32}$	$\frac{1}{4}$	7.5
12	$1\frac{1}{4}$	$1\frac{3}{8}$	$2\frac{27}{32}$	$1\frac{1}{4}$	2	$4\frac{17}{32}$	$3\frac{9}{32}$	$7\frac{29}{32}$	$7\frac{1}{4}$	$5\frac{25}{32}$	$\frac{1}{4}$	10.36
17	$1\frac{1}{2}$	$1\frac{5}{8}$	$3\frac{15}{32}$	$1\frac{1}{2}$	$2\frac{3}{8}$	$5\frac{3}{4}$	$3\frac{29}{32}$	$9\frac{13}{16}$	$7\frac{15}{16}$	$6\frac{7}{8}$	$\frac{1}{4}$	17.64
25	$1\frac{3}{4}$	2	$4\frac{1}{16}$	$1\frac{25}{32}$	$2\frac{29}{32}$	7	$4\frac{31}{32}$	$11\frac{13}{16}$	$9\frac{9}{16}$	$8\frac{1}{2}$	$\frac{11}{32}$	30
35	2	$2\frac{1}{4}$	$4\frac{9}{16}$	$1\frac{31}{32}$	$3\frac{9}{32}$	$7\frac{3}{4}$	$5\frac{7}{16}$	$13\frac{5}{32}$	$10\frac{19}{32}$	$9\frac{3}{8}$	$\frac{11}{32}$	42.1
42.5	$2\frac{1}{4}$	$2\frac{9}{16}$	$5\frac{1}{8}$	$2\frac{1}{4}$	$3\frac{3}{4}$	$8\frac{3}{4}$	$6\frac{5}{16}$	$14\frac{27}{32}$	$11\frac{27}{32}$	$10\frac{25}{32}$	$\frac{11}{32}$	62
55	$2\frac{1}{2}$	$2\frac{3}{4}$	$5\frac{23}{32}$	$2\frac{9}{16}$	$4\frac{1}{8}$	$10\frac{1}{4}$	$7\frac{3}{32}$	$17\frac{1}{16}$	$12\frac{15}{16}$	$12\frac{7}{32}$	$\frac{11}{32}$	84
85	3	$3\frac{1}{4}$	$6\frac{3}{8}$	$2\frac{15}{16}$	5	$12\frac{15}{16}$	$7\frac{15}{32}$	$20\frac{3}{4}$	$14\frac{3}{4}$	$13\frac{3}{8}$	$\frac{11}{32}$	132


CAD RFID INFO




Green Pin® Locking Clamp ROV Shackle

Release ROV shackle (grade 80) with locking clamp

Scan for
additional
product
details



P-5365




- **Material:** bow and pin alloy steel, grade 80, polar quality, quenched and tempered
- **Safety factor:** MBL equals 6 x WLL
for shackles with WLL 120 t and up the MBL equals 5x WLL
- **Finish:** body painted white, pin painted green
- **Temperature range:** -76 °F up to +392 °F (-40 °F up to +392 °F for WLL 120 t and up)
- **Certification:** 2.1 2.2 3.1 MTC^a MTC^b * LROS * CE IIA
- **Article code:** scan QR code to see article codes
- **Note:** supplied without wires; design your own wiring plan



working load limit	diameter bow	diameter pin	diameter eye	width eye	width inside	length inside	width bow	length	length bolt	width	width locking clamp	weight pin	weight each
metric t	a inch	b inch	c inch	d inch	e inch	f inch	g inch	h inch	i inch	j inch	k inch	lbs	lbs
6.5	7/8	1	2 1/16	7/8	1 13/32	3 9/32	2 9/32	6 15/32	5 1/2	4 1/32	1 25/32	1.98	4.78
9.5	1 1/8	1 1/4	2 19/32	1 3/32	1 27/32	4 1/4	2 15/16	7 7/8	6 25/32	5 5/32	1 7/8	3.53	9.37
12	1 1/4	1 3/8	2 27/32	1 1/4	2	4 17/32	3 9/32	8 3/8	7 1/4	5 25/32	1 7/8	4.19	11.82
17	1 1/2	1 5/8	3 15/32	1 1/2	2 3/8	5 3/4	3 29/32	10 15/32	8 7/32	6 7/8	1 7/8	7.5	20.4
25	1 3/4	2	4 1/16	1 25/32	2 29/32	7	4 31/32	12 5/32	9 9/16	8 1/2	1 7/8	11.02	32.2
35	2	2 1/4	4 9/16	1 31/32	3 9/32	7 3/4	5 7/16	13 25/32	10 19/32	9 3/8	1 7/8	14.33	45.6
42.5	2 1/4	2 9/16	5 1/8	2 1/4	3 3/4	8 3/4	6 5/16	14 27/32	11 27/32	10 25/32	1 7/8	22.5	62
55	2 1/2	2 3/4	5 23/32	2 9/16	4 1/8	10 1/4	7 3/32	17 5/16	12 15/16	12 7/32	1 7/8	26.5	90
85	3	3 1/4	6 3/8	2 15/16	5	12 15/16	7 15/32	20 3/4	14 3/4	13 3/8	1 7/8	38.6	134
120	3 3/4	3 3/4	8 3/16	3 19/32	5 25/32	15 3/4	9 3/8	25 15/32	17 5/16	16 27/32	2 3/8	65	243
150	4 1/8	4 1/4	9 3/8	4 1/32	6 21/32	16 5/32	10 13/16	27 3/32	19 9/32	19 3/32	2 3/8	85	353
200	4 23/32	5 1/8	10 31/32	4 7/16	7 1/16	20 3/16	11 13/32	33	20 15/32	20 7/8	2 3/8	134	518
250	5 1/8	5 1/2	11 25/32	4 21/32	8 1/16	21 13/16	12	35 19/32	22 1/16	22 1/4	2 3/8	165	628

CAD RFID INFO

* For shackles ≥ WLL 150 t



P-6065



Green Pin® Locking Clamp ROV Sling Shackle

Release ROV Sling shackle (grade 80) with locking clamp

- **Material:** bow and pin alloy steel, grade 80, quenched and tempered
- **Safety factor:** MBL equals 5 x WLL
- **Finish:** shackle bow painted white, pin painted green
- **Temperature range:** -40 °F up to +392 °F
- **Certification:** 2.1 2.2 3.1 MTC^b CE IIIA **Optional:** LROS MPI^b US^a
- **Article code:** scan QR code to see article codes

Scan for
additional
product
details



working load limit	diameter body	diameter pin	diameter eye	width eye	width inside	length inside	width bow	length	length bolt	width	width locking clamp	bearing surface	weight pin	weight each
metric t	a inch	b inch	c inch	d inch	e inch	f inch	g inch	h inch	i inch	j inch	k inch	l inch	lbs	lbs
12.5	1 1/8	1 1/8	2 13/32	31/32	1 23/32	4 3/4	3 7/32	7 3/4	5 5/8	5 3/4	1 7/32	2 1/8	2.65	9.41
18	1 3/8	1 3/8	2 23/32	1 3/16	2 1/8	5 13/16	4 1/32	9 13/32	7 1/4	7 3/32	1 7/32	2 17/32	4.19	15.1
30	1 9/16	1 21/32	3 17/32	1 3/8	2 23/32	6 1/2	4 31/32	10 31/32	8 9/32	7 7/8	1 9/16	3 1/8	7.72	27.6
40	2 5/32	2	4 9/32	1 25/32	3 5/16	7 27/32	5 1/2	13 1/32	10 3/32	9 1/4	1 9/16	3 13/16	11.9	44.8
55	2 3/8	2 1/4	4 17/32	2 5/32	3 17/32	9 7/16	6 5/16	15 5/16	11 3/8	10 5/8	1 9/16	3 15/16	15.43	67
75	2 11/16	2 3/4	4 29/32	2 1/8	4 11/32	11 13/32	7 9/32	18 5/8	12 15/32	12 15/32	1 9/16	4 23/32	25.6	99
125	3 11/32	3 5/32	6 1/16	3 11/32	5 13/32	14 13/32	8 21/32	22 15/16	16 1/4	15 11/32	1 9/16	5 29/32	39.9	203
150	3 11/16	3 3/4	7 1/16	3 1/2	5 25/32	15 13/32	9 31/32	25 13/32	17 17/32	17 3/32	2 5/32	6 11/16	64	309
200	4 11/32	4 1/8	7 27/32	3 15/16	6 7/32	18 15/16	11 1/32	29 7/8	18 29/32	18 31/32	2 5/32	8 1/16	82	452
250	4 31/32	4 23/32	8 15/16	4 11/32	7 1/16	21 11/32	11 13/16	33 13/16	20 19/32	20 7/8	2 5/32	9 7/16	109	582
300	5 5/16	5 9/32	9 21/32	4 13/16	7 11/16	23 21/32	13 25/32	37 9/32	22 5/32	24 13/32	2 5/32	10 7/16	147	794

CAD RFID INFO


* With additional charges



Green Pin® Guided Pin ROV Shackle D



Release & retrieve ROV shackle (grade 80) with guiding tube and D-handle

Scan for additional product details



P-5362D

- **Material:** shackle body and pin alloy steel, grade 80, polar quality, quenched and tempered
- **Safety factor:** MBL equals 5 x WLL
- **Finish:** body painted white, pin painted green
- **Temperature range:** -76 °F up to +392 °F
- **Certification:** 2.1 2.2 3.1 MTC^a CE IIA
- **Article code:** scan QR code to see article codes



working load limit	diameter bow	diameter pin	diameter eye	width eye	width inside	length inside	width bow	length	length bolt		width	guide diameter	weight each
									close	open			
metric t	a inch	b inch	c inch	d inch	e inch	f inch	g inch	h inch	i inch		j inch	k inch	lbs
12	1 1/4	1 3/8	2 27/32	1 1/4	2	4 17/32	3 9/32	7 29/32	22 13/32	25 21/32	5 25/32	3 9/32	22
17	1 1/2	1 5/8	3 15/32	1 1/2	2 3/8	5 3/4	3 29/32	9 13/16	24 3/32	27 15/16	6 7/8	3 9/32	28.7
25	1 3/4	2	4 1/16	1 25/32	2 29/32	7	4 31/32	11 13/16	26 7/8	31 9/16	8 1/2	3 9/32	41.9
35	2	2 1/4	4 3/8	1 31/32	3 9/32	7 3/4	5 7/16	13 1/32	28	33 7/32	9 3/8	3 9/32	53
55	2 1/2	2 3/4	5 23/32	2 9/16	4 1/8	10 1/4	7 3/32	17 1/16	32 7/16	39 1/8	12 7/32	4 1/32	99


CAD INFO

2




Green Pin® Guided Pin ROV Shackle F

Release & retrieve ROV shackle (grade 80) with guiding tube and Fishtail handle



P-5362F

- **Material:** shackle body and pin alloy steel, grade 80, polar quality, quenched and tempered
- **Safety factor:** MBL equals 5 x WLL
- **Finish:** body painted white, pin painted green
- **Temperature range:** -76 °F up to +392 °F
- **Certification:** 2.1 2.2 3.1 MTC^a CE IIA
- **Article code:** scan QR code to see article codes



working load limit	diameter bow	diameter pin	diameter eye	width eye	width inside	length inside	width bow	length	length bolt		width	guide diameter	weight each
									close	open			
metric t	a inch	b inch	c inch	d inch	e inch	f inch	g inch	h inch	i inch		j inch	k inch	lbs
12	1 1/4	1 3/8	2 27/32	1 1/4	2	4 17/32	3 9/32	7 29/32	25 5/16	28 19/32	5 25/32	3 9/32	22
17	1 1/2	1 5/8	3 15/32	1 1/2	2 3/8	5 3/4	3 29/32	9 13/16	27	30 7/8	6 7/8	3 9/32	28.7
25	1 3/4	2	4 1/16	1 25/32	2 29/32	7	4 31/32	11 13/16	29 13/16	34 1/2	8 1/2	3 9/32	41.9
35	2	2 1/4	4 3/8	1 31/32	3 9/32	7 3/4	5 7/16	13 1/32	30 29/32	36 5/32	9 3/8	3 9/32	53
55	2 1/2	2 3/4	5 23/32	2 9/16	4 1/8	10 1/4	7 3/32	17 1/16	35 11/32	42 1/16	12 7/32	4 1/32	99

CAD INFO



Green Pin® D-handle

Accessory for Green Pin® ROV Shackle

- **Material:** cast steel
- **Finish:** painted orange
- **Certification:** 2.1
- **Article code:** scan QR code to see article codes


Scan for
additional
product
details



P-5396D

diameter	width	length	width	length inside	thickness	diameter	diameter	diameter	weight each
a	b	c	d	e	f	g	h	i	lbs
inch	inch	inch	inch	inch	inch	inch	inch	inch	
$\frac{3}{4}$	$6 \frac{1}{32}$	$8 \frac{15}{32}$	$4 \frac{17}{32}$	$4 \frac{11}{32}$	$\frac{13}{32}$	$2 \frac{3}{4}$	$1 \frac{7}{8}$	$\frac{11}{32}$	3.79

CAD



Green Pin® Fishtail handle

Accessory for Green Pin® ROV Shackle


- **Material:** cast steel
- **Finish:** painted orange
- **Certification:** 2.1
- **Article code:** scan QR code to see article codes



P-5396F


diameter	width	length	width	length inside	thickness	diameter	diameter	diameter	weight each
a	b	c	d	e	f	g	h	i	lbs
inch	inch	inch	inch	inch	inch	inch	inch	inch	
$\frac{3}{4}$	7	$11 \frac{3}{8}$	$\frac{13}{16}$	$5 \frac{1}{4}$	$\frac{13}{32}$	$2 \frac{3}{4}$	$1 \frac{7}{8}$	$\frac{11}{32}$	4.25

CAD





P-5396T



Green Pin® T-handle

Accessory for Green Pin® ROV Shackle

- **Material:** cast steel
- **Finish:** painted orange
- **Certification:** 2.1
- **Article code:** scan QR code to see article codes

Scan for additional product details



diameter	width	length	length inside	thickness	diameter	diameter	diameter	weight each
a	b	c	d	e	f	g	h	lbs
$\frac{3}{4}$	$3 \frac{15}{16}$	$7 \frac{1}{8}$	$5 \frac{31}{32}$	$\frac{13}{32}$	$2 \frac{3}{4}$	$1 \frac{7}{8}$	$\frac{11}{32}$	2.18

CAD




F-5396M

Green Pin® Monkey fist

Accessory for Green Pin® ROV Shackle

- **Material:** polymer
- **Finish:** painted orange
- **Article code:** scan QR code to see article codes






William Hackett
Lifting Products Limited

OFFSHORE



ROV Chain Hoists

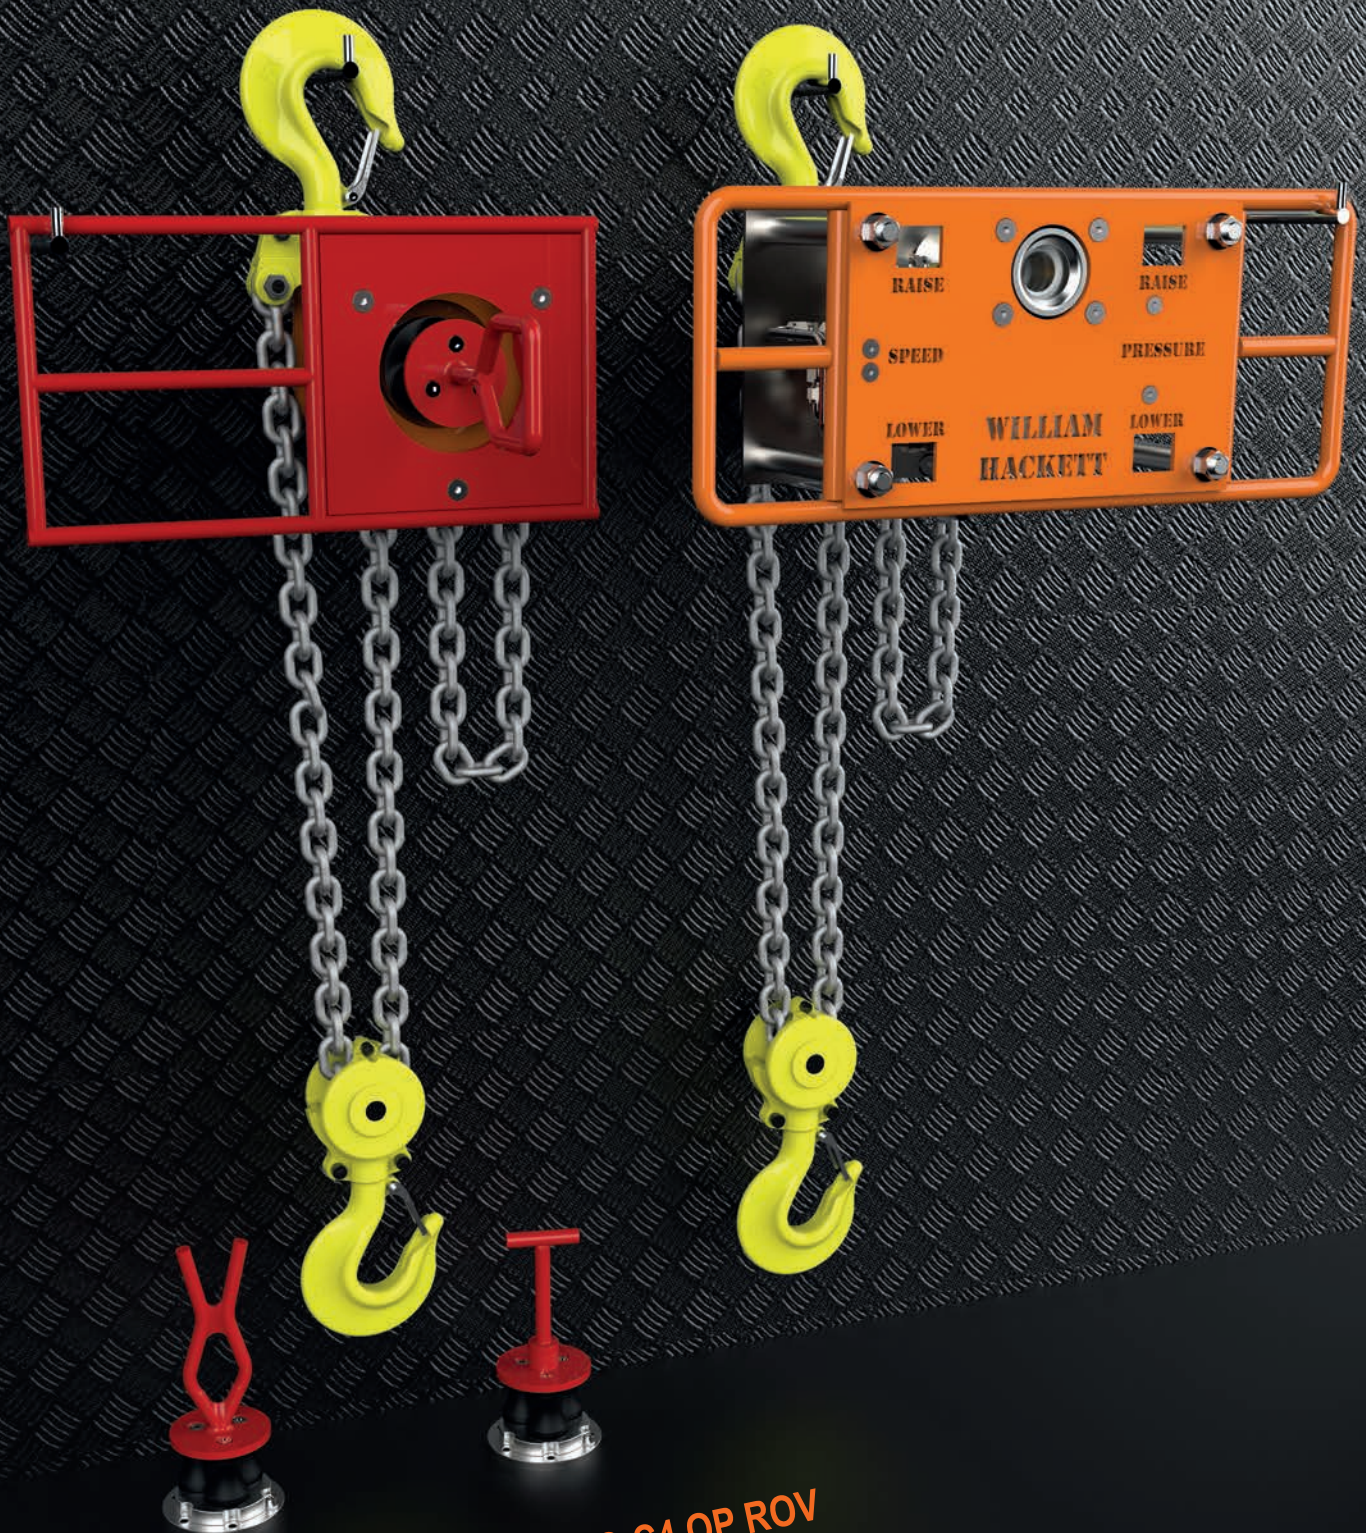

WH SS-C4 QP ROV
Available from
3.2t to 20t

ROV Chain Hoists

In addition to the design and specification of the WH SS-C4 QP chain hoist, the WH SS-C4 QP ROV chain hoist includes the following:

Temperature Range: - 40°C to + 60°C.

Corrosion protected: all William Hackett ROV hoists are finished with highly specialist marine grade paint (AkzoNobel Interpon Redox Triple 3-Layer Corrosion Protection System) to ISO 12944 category C5. This gives superior corrosion protection in harsh, offshore environments.

Neutral salt spray test to ISO 9227: resistance against corrosion, blistering and coating adhesion integrity exceeding 1,500 hours according to ISO 9227. No corrosion creep more than 1.6mm from a scribed mark.

Hyperbaric tested at 3000 metre water depths.

Fixings and fasteners: all made from stainless steel.

Configurations: available with either hydraulic, torque bucket, or manual drive interfaces. Manual drive interface variants can be supplied with optional handwheel or torque limiter, and either D-link, T-handle, or fishtail handles.

Terminal fittings: supplied with our hoist top and bottom hook assemblies as standard. Can also be supplied with bespoke terminal fittings such as ROV shank hooks, shackles and sling hooks.

Manufactured and proof tested in the UK.



WH SS-C4 ROV Chain Hoist (Manual Interface)

Part Code	WLL t	No. of Falls	Load Chain mm	Mass kg 3m HOL	Extra Weight per m kg
022.R.300.*.P	3.2	1	10.0	26.5	2.2
022.R.500.*.P	5.0	2	10.0	37.9	4.4
022.R.1000.*.P	10.0	4	10.0	68.4	8.8
022.R.1500.*.P	15.0	6	10.0	116.2	13.2
022.R.2000.*.P	20.0	8	10.0	146.8	17.6

*F1, T1 or D1 handles available

ROV Chain Hoists



WH SS-C4 ROV Chain Hoist (Hydraulic Interface)

Part Code	WLL t	No. of Falls	Load Chain mm	Mass kg 3m HOL	Extra Weight per m kg
022.R.300.H1.P	3.2	1	10.0	62.8	2.2
022.R.500.H1.P	5.0	2	10.0	74.2	4.4
022.R.1000.H1.P	10.0	4	10.0	104.7	8.8
022.R.1500.H1.P	15.0	6	10.0	152.5	13.2
022.R.2000.H1.P	20.0	8	10.0	185.3	17.6



WH SS-C4 ROV Chain Hoist (Torque Bucket Interface)

Part Code	WLL t	No. of Falls	Load Chain mm	Mass kg 3m HOL	Extra Weight per m kg
022.R.300.TB1.P	3.2	1	10.0	45.2	2.2
022.R.500.TB1.P	5.0	2	10.0	56.6	4.4
022.R.1000.TB1.P	10.0	4	10.0	87.1	8.8
022.R.1500.TB1.P	15.0	6	10.0	134.9	13.2
022.R.2000.TB1.P	20.0	8	10.0	167.7	17.6