




# SYNTHETIC SLING FITTINGS



CoreLifting.com



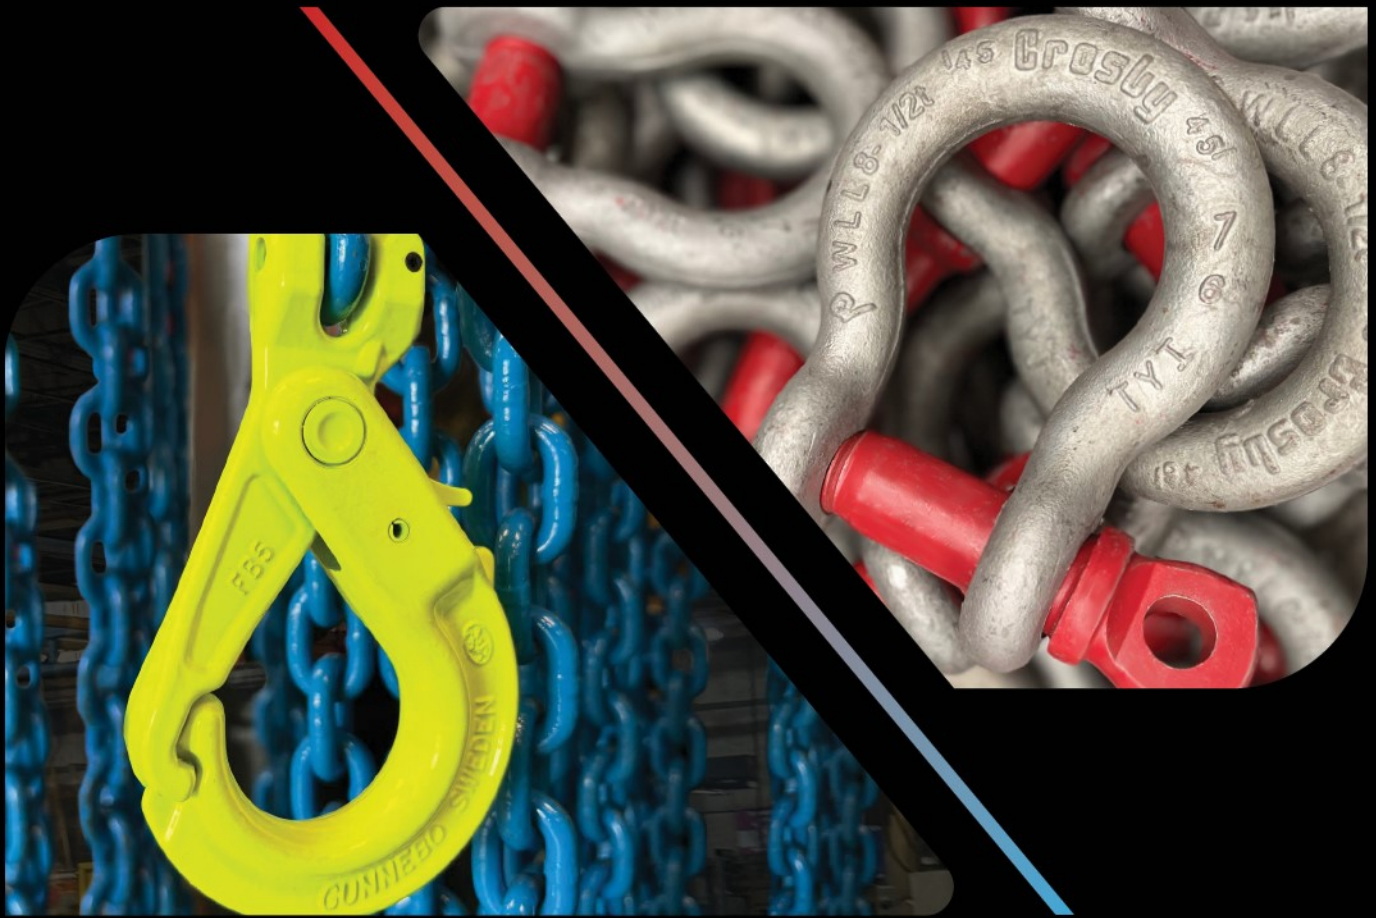

**Crosby®**



**GUNNEBO®**  
Industries

## PRODUCT CATALOG

with application & warning information

**Imperial**



# SYNTHETIC SLING FITTINGS

**Quality end fittings designed  
exclusively for use with synthetic  
web and round slings**



## Application Information

The Crosby Sling Saver® line is the first broad line of fittings developed exclusively for use with synthetic slings. Combined with additional Crosby products, a complete system is now available.


| RECOMMENDED APPLICATION CHART                                                                                                                                                                                                                                                    |                                                                                |                                                                                       |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| APPLICATION                                                                                                                                                                                                                                                                      | USE                                                                            |                                                                                       |
| Web slings, connect to pad eye, eye bolt, or lifting lug.                                                                                                                                                                                                                        | S-281 Sling Saver Web Sling Shackle                                            |    |
| Web slings or roundslings, connecting to pad eye, eye bolt, or lifting lug.                                                                                                                                                                                                      | S-253 or S-252 Sling Saver Shackle                                             |    |
| Web slings or roundslings connecting to master links, rings, or Crosby 320N Eye Hooks.                                                                                                                                                                                           | S-280 Sling Saver Web Connector with spool                                     |    |
| High strength, high capacity web or roundslings.                                                                                                                                                                                                                                 | WSL-320A Synthetic Sling Hook                                                  |    |
| Choking with web slings or roundslings.                                                                                                                                                                                                                                          | S-287 Sliding Choker Hook                                                      |    |
| Master links or master link assembly to be sewn into eye of web sling or attached utilizing web connector.                                                                                                                                                                       | Welded Master Link A-1343 and Master Link Assembly A-1346                      |   |
| Master links or master link assembly to be sewn into eye of web sling or attached utilizing web connector.                                                                                                                                                                       | Welded Master Link A-342 and Master Link Assembly A-345                        |  |
| Connecting high performance slings to master links or eye hooks and to other high performance slings.                                                                                                                                                                            | S-237 or S-238 High Performance Connectors                                     |  |
| Wide body shackles greatly improve wearability of wire rope slings.                                                                                                                                                                                                              | S/G-2160 Wide Body Bolt Type Shackles<br>S/G-2169 Wide Body Screw Pin Shackles |  |
| Always ensure rated Working Load Limits are greater than the load placed on the fitting. Designed for use with Type III (eye & eye), Class 7, 2-ply webbing, and synthetic round slings. Also accommodates single ply and endless slings.                                        |                                                                                |                                                                                       |
| Crosby Sling Saver hardware meets the requirements for minimum stock diameter or thickness and effective contact width shown in the recommended standard specification for synthetic polyester round slings by the Web Sling and Tie Down Association. WSTDA-RS1 (revised 2010). |                                                                                |                                                                                       |



## S-280



- Connects synthetic web and synthetic round slings to conventional Crosby hardware.
- All alloy construction.
- Durable vinyl cover that:
  - Protects sling at eye
  - Keeps sling positioned correctly on spool.
- Makes a field assembled bridle quick and easy.
- No retaining pin to snag sling material.
- Increased radius of spool gives wider sling bearing surface resulting in an increased area for load distribution, allowing better load distribution on internal fibers.
- Increases synthetic sling efficiency as compared to standard anchor and chain shackle bows and conventional eye hooks. This allows 100% of the slings rated Working Load Limit to be achieved.
- Crosby Sling Saver hardware meets the requirements for minimum stock diameter or thickness, and effective contact width shown in the Recommended Standards Specification for Synthetic Polyester Round Slings by the Web Sling & Tie Down Association (WSTDA-RS1).
- Replacement kit for spool and web cover available.
- Designed for use with Type III (eye & eye), Class 7, 2-ply webbing and synthetic round slings. Also accommodates single ply and endless slings.

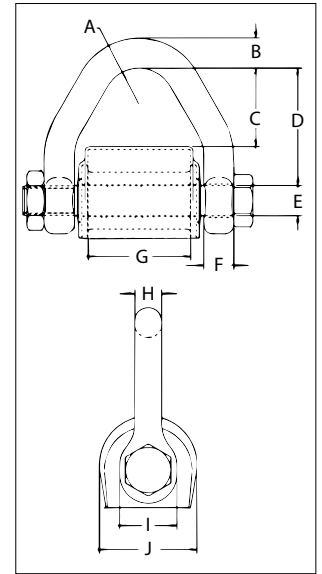

## S-280 Web Connector

CE Sling Saver Load Rated QT

9


| Round Sling Size (No.) | Web Slings         |                |     | Working Load Limit (Tons) | S-280 Stock No. | Weight Each (lb) | Dimensions (in) |     |      |      |      |     |      |     |      |      |
|------------------------|--------------------|----------------|-----|---------------------------|-----------------|------------------|-----------------|-----|------|------|------|-----|------|-----|------|------|
|                        | Webbing Width (in) | Eye Width (in) | Ply |                           |                 |                  | A               | B   | C    | D    | E    | F   | G    | H   | I    | J    |
| 1 & 2                  | 2                  | 2              | 2   | 3-1/4                     | 1021681         | 1.5              | .75             | .62 | 1.63 | 2.44 | .63  | .62 | 2.13 | .56 | 1.19 | 2.02 |
| 3                      | 3                  | 1.5            | 2   | 4-1/2                     | 1021690         | 1.9              | .75             | .69 | 1.10 | 2.01 | .75  | .69 | 1.63 | .60 | 1.38 | 2.34 |
| 4                      | 4                  | 2              | 2   | 6-1/4                     | 1021700         | 2.9              | .75             | .81 | 1.66 | 2.56 | .88  | .75 | 2.13 | .69 | 1.62 | 2.46 |
| 5 & 6                  | 6                  | 3              | 2   | 8-1/2                     | 1021709         | 5.1              | 1.00            | .94 | 2.47 | 3.50 | 1.00 | .88 | 3.13 | .88 | 1.88 | 2.84 |

Design Factor of 5:1. Designed for use with Type III, (eye & eye), Class 7, 2-ply web slings. For 3" and larger webbing width, tapered eye is required. Maximum Proof Load is 2 times the Working Load Limit.

## S-281



- Web Sling Shackle is designed to connect synthetic web slings and synthetic round slings to eyebolts, pad eyes, and lifting lugs.
- All alloy construction.
- Each shackle has a Product Identification Code (PIC) for material traceability along with a Working Load Limit and the name Crosby forged into it.
- Incorporates the same ear spread and pin dimensions as conventional Crosby shackles. Allows easy connection to pad eyes, eye bolts, and lifting lugs.
- Meets or exceeds all requirements of ASME B30.26, including identification, ductility, design factor, proof load, and temperature requirements. Importantly, these shackles meet other critical performance requirements, including fatigue life, impact properties, and material traceability not addressed by ASME B30.26.
- Crosby Sling Saver hardware meets the requirements for minimum stock diameter or thickness, and effective contact width shown in the Recommended Standards Specification for Synthetic Polyester Round Slings by the Web Sling & Tie Down Association (WSTDA-RS1).
- Look for the Red Pin®... The mark of genuine Crosby quality.

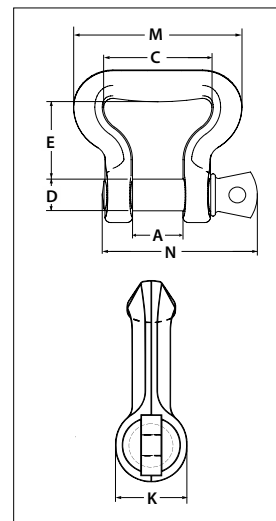

### S-281 Web Sling Shackle

CE Sling Saver Load Rated QT


| Round Sling Size (No.) | Web Slings         |                |     | Working Load Limit (t) | S-281 Stock No. | Weight Each (lb) | Dimensions (in) |      |      |      |      |      |      |
|------------------------|--------------------|----------------|-----|------------------------|-----------------|------------------|-----------------|------|------|------|------|------|------|
|                        | Webbing Width (in) | Eye Width (in) | Ply |                        |                 |                  | A               | C    | D    | E    | K    | M    | N    |
| 1 & 2                  | 2                  | 2              | 2   | 2.95                   | 1021048         | 1.2              | 1.06            | 2.50 | .75  | 1.62 | 1.22 | 3.84 | 3.34 |
| 3                      | 3                  | 1.5            | 2   | 4.08                   | 1021057         | 1.5              | 1.25            | 2.00 | .88  | 1.50 | 1.41 | 3.38 | 3.97 |
| 4                      | 4                  | 2              | 2   | 5.67                   | 1021066         | 2.5              | 1.44            | 2.50 | 1.00 | 2.00 | 1.62 | 4.22 | 4.50 |
| 5 & 6                  | 6                  | 3              | 2   | 7.70                   | 1021075         | 4.3              | 1.69            | 3.62 | 1.13 | 2.75 | 1.84 | 5.64 | 5.13 |

Design Factor of 5:1.

\*Designed for use with Type III, (eye & eye), Class 7, 2-ply web slings. For 3" and larger webbing width, tapered eye is required.


† Maximum Proof Load is 2 times the Working Load Limit.

## S-252

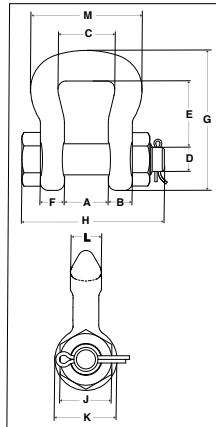

- All alloy construction.
- Each shackle has a Product Identification Code (PIC) for material traceability along with a Working Load Limit and the name Crosby forged into it.
- Increased radius of bow gives wider sling bearing surface resulting in an increased area for load distribution, allows better load distribution on internal fibers.
  - Increasing Synthetic Sling efficiency as compared to standard anchor and chain shackle bows and conventional hooks. This allows 100% of the sling's rated Working Load Limit to be achieved.
- Meets or exceeds all requirements of ASME B30.26, including identification, ductility, design factor, proof load, and temperature requirements. Importantly, these shackles meet other critical performance requirements, including fatigue life, impact properties, and material traceability not addressed by ASME B30.26.
- Crosby Sling Saver hardware meets the requirements for minimum stock diameter or thickness, and effective contact width shown in the Recommended Standards Specification for Synthetic Polyester Round Slings by the Web Sling & Tie Down Association (WSTDA-RS1).
- Bolt (pin) has a larger diameter that provides better load distribution.
- Look for the Red Pin®... the mark of genuine Crosby quality.

## S-253

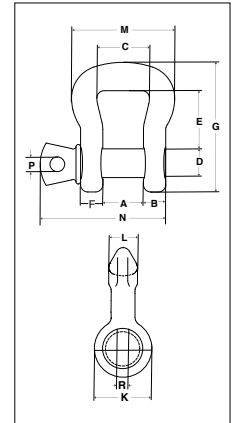

### S-252 Bolt Type Sling Shackle

CE Sling Saver Fatigue Resistant Load Rated QT

| Web Sling<br>Eye Width<br>(in) | Round<br>Sling Size<br>(No.) | Working<br>Load Limit<br>(t) | S-252<br>Stock<br>No. | Weight<br>Each<br>(lb) | Dimensions<br>(in) |      |      |      |      |      |       |       |      |      |      |       | Replacement<br>Bolt Kit<br>Stock No. |
|--------------------------------|------------------------------|------------------------------|-----------------------|------------------------|--------------------|------|------|------|------|------|-------|-------|------|------|------|-------|--------------------------------------|
|                                |                              |                              |                       |                        | A                  | B    | C    | D    | E    | F    | G     | H     | J    | K    | L    | M     |                                      |
| 1                              | 1 & 2                        | 3.25                         | 1020485               | 1.4                    | 1.06               | .58  | 1.38 | .75  | 1.50 | .44  | 3.38  | 3.68  | 1.12 | 1.50 | .75  | 2.69  | -                                    |
| 1.5                            | 3 & 4                        | 6.5                          | 1020496               | 2.4                    | 1.25               | .75  | 1.75 | .88  | 1.88 | .50  | 4.15  | 4.25  | 1.31 | 1.81 | 1.00 | 3.38  | -                                    |
| 2                              | 5 & 6                        | 8.75                         | 1020507               | 4.1                    | 1.38               | .88  | 2.25 | 1.00 | 2.81 | .56  | 5.50  | 4.72  | 1.50 | 2.09 | 1.12 | 4.19  | -                                    |
| 3                              | 7 & 8                        | 12.5                         | 1020518               | 8.0                    | 1.62               | 1.12 | 3.25 | 1.25 | 3.06 | .75  | 6.34  | 5.88  | 1.88 | 2.62 | 1.38 | 5.62  | 1082839                              |
| 4                              | 9 & 10                       | 20.5                         | 1020529               | 16.9                   | 2.12               | 1.38 | 4.50 | 1.50 | 5.25 | .88  | 9.45  | 7.19  | 2.25 | 3.12 | 1.75 | 7.50  | 1082875                              |
| 5                              | 11 & 12                      | 35                           | 1020540               | 35.0                   | 2.50               | 1.75 | 5.50 | 2.00 | 6.34 | 1.12 | 11.50 | 9.31  | 3.00 | 4.19 | 2.25 | 9.19  | 1084418                              |
| 6                              | 13                           | 50                           | 1020551               | 57.5                   | 3.00               | 2.12 | 6.50 | 2.25 | 7.70 | 1.25 | 13.75 | 10.38 | 3.38 | 4.75 | 2.75 | 11.00 | 1084427                              |

Design factor of 5:1. Maximum Proof Load is 2.5 times the Working Load Limit.

### S-253 Screw Pin Sling Shackle

CE Sling Saver Fatigue Resistant Load Rated QT

| Web Sling Eye Width (in) | Round Sling Size (No.) | Working Load Limit (t) | S-253 Stock No. | Weight Each (lb) | Dimensions (in) |      |      |      |      |       |      |      |       |       |      |      |         | Replacement Pin Kit Stock No. |
|--------------------------|------------------------|------------------------|-----------------|------------------|-----------------|------|------|------|------|-------|------|------|-------|-------|------|------|---------|-------------------------------|
|                          |                        |                        |                 |                  | A               | B    | C    | D    | E    | G     | K    | L    | M     | N     | P    | R    |         |                               |
| 1                        | 1 & 2                  | 3.25                   | 1020575         | 1.4              | .88             | .62  | 1.38 | .75  | 1.50 | 3.38  | 1.50 | .75  | 2.69  | 3.22  | .44  | 1.00 | -       |                               |
| 1.5                      | 3 & 4                  | 6.5                    | 1020584         | 2.2              | 1.25            | .75  | 1.75 | .88  | 1.88 | 4.15  | 1.81 | 1.00 | 3.38  | 4.03  | .50  | 1.19 | -       |                               |
| 2                        | 5 & 6                  | 8.75                   | 1020593         | 3.8              | 1.38            | .88  | 2.25 | 1.00 | 2.81 | 5.50  | 2.09 | 1.12 | 4.19  | 4.50  | .50  | 1.44 | -       |                               |
| 3                        | 7 & 8                  | 12.5                   | 1020602         | 7.3              | 1.62            | 1.12 | 3.25 | 1.25 | 3.06 | 6.34  | 2.62 | 1.38 | 5.62  | 5.59  | .62  | 1.81 | 1083867 |                               |
| 4                        | 9 & 10                 | 20.5                   | 1020611         | 15.2             | 2.12            | 1.38 | 4.50 | 1.50 | 5.25 | 9.45  | 3.12 | 1.75 | 7.50  | 6.88  | .75  | 2.13 | 1083885 |                               |
| 5                        | 11 & 12                | 35                     | 1020620         | 30.8             | 2.50            | 1.75 | 5.50 | 2.00 | 6.34 | 11.50 | 4.19 | 2.25 | 9.19  | 8.66  | 1.00 | 2.88 | 1082670 |                               |
| 6                        | 13                     | 50                     | 1020629         | 52.0             | 3.00            | 2.12 | 6.50 | 2.25 | 7.70 | 13.75 | 4.75 | 2.75 | 11.00 | 10.22 | 1.22 | 3.19 | 1082697 |                               |


Design factor of 5:1. Maximum Proof Load is 2.5 times the Working Load Limit.



WSL-320A



- Suitable for use with 2-Ply Web Slings and Round Slings.
  - Eye is designed with a wide beam surface, which eliminates bunching effects, reduces sling tendency to slide, and allows a better load distribution on internal fibers.
- All alloy construction.
- Each hook has a Product Identification Code (PIC) for material traceability along with a working load limit and the name Crosby forged into it.
- All hooks feature Crosby's patented QUIC-CHECK® indicators.
- Fatigue rated to 20,000 cycles at 1.5 times the Working Load Limit.
- Includes S-4320 latch.
- Crosby Sling Saver hardware meets the requirements for minimum stock diameter or thickness, and effective contact width shown in the Recommended Standards Specification for Synthetic Polyester Round Slings by the Web Sling & Tie Down Association (WSTDA-RS1).

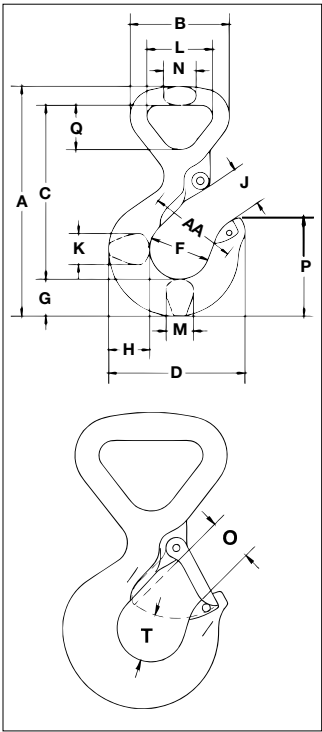

APPLICATION AND WARNING INFORMATION  
SECTION 17

WSL-320A Synthetic Sling Hook



| Web Sling<br>Eye Width<br>(in) | Round<br>Sling Size<br>(No.) | Working<br>Load Limit<br>(t) | WSL-320A<br>with Latch | Weight<br>Each<br>(lb) | Hook<br>ID<br>Code | S-4320<br>Rep. Latch |
|--------------------------------|------------------------------|------------------------------|------------------------|------------------------|--------------------|----------------------|
| 1"                             | 1                            | 1.5                          | 1022706                | 1.10                   | FA                 | 1096374              |
| 2"                             | 2                            | 3                            | 1022717                | 2.86                   | HA                 | 1096468              |
| 3"                             | 3                            | 5                            | 1022728                | 6.60                   | IA                 | 1096515              |

| Hook ID<br>Code | Working<br>Load Limit<br>(t) | Dimensions<br>(in) |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |  |
|-----------------|------------------------------|--------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|--|
|                 |                              | A                  | B    | C    | D    | F    | G    | H    | J    | K    | L    | M    | N    | O    | P    | Q    | T    | AA   |  |
| FA              | 1.5                          | 5.25               | 2.26 | 3.98 | 3.11 | 1.38 | .84  | .94  | .93  | .71  | 1.50 | .63  | .75  | .91  | 2.24 | 1.01 | .98  | 2.00 |  |
| HA              | 3                            | 7.11               | 3.66 | 5.31 | 3.97 | 1.63 | 1.13 | 1.32 | 1.13 | .94  | 2.50 | .85  | 1.13 | 1.09 | 2.82 | 1.69 | 1.16 | 2.00 |  |
| IA              | 5                            | 9.33               | 5.13 | 7.06 | 4.81 | 2.00 | 1.44 | 1.63 | 1.47 | 1.31 | 3.75 | 1.13 | 1.63 | 1.36 | 3.51 | 2.59 | 1.53 | 2.50 |  |


Design factor of 5:1.  
Maximum Proof Load is 2.5 times the Working Load Limit.



## S-287



- Special design of hook protects the synthetic sling when dropped or dragged.
- Uses same spool and cover as S-280 Web Connector.
  - Replacement Kit for Spool and Web Cover available.
  - No retaining pin to snag sling material.
- Forged alloy steel, Quenched & Tempered.
- Each Connector has a Product Identification Code (PIC) for material traceability along with a Working Load Limit and the name Crosby forged into it.
- Designed to reduce friction, abrasion, and fraying in choker area.
- Designed for use with Type III, (eye & eye).
- Crosby Sling Saver hardware meets the requirements for minimum stock diameter or thickness, and effective contact width shown in the Recommended Standards Specification for Synthetic Polyester Round Slings by the Web Sling & Tie Down Association (WSTDA-RS1).



## S-287 Sliding Choker Hook




| Round Sling Size (No.) | Web Slings         |                |     | Working Load Limit (Tons) | S-287 Stock No. | Weight Each (lb) | Dimensions (in) |      |      |     |      |      |      |      |      |      |
|------------------------|--------------------|----------------|-----|---------------------------|-----------------|------------------|-----------------|------|------|-----|------|------|------|------|------|------|
|                        | Webbing Width (in) | Eye Width (in) | Ply |                           |                 |                  | A               | B    | C    | D   | E    | F    | G    | H    | J    | AA   |
| 1 & 2                  | 2                  | 2              | 2   | 3-1/4                     | 1021909         | 3.7              | 2.13            | 2.50 | 3.32 | .38 | 6.03 | 4.77 | 4.88 | .34  | 1.50 | 1.50 |
| 3                      | 3                  | 1.5            | 2   | 4-1/2                     | 1021918         | 6.1              | 1.63            | 3.50 | 3.67 | .38 | 7.06 | 4.53 | 6.51 | 1.36 | 1.88 | —    |

Design factor of 5:1.


Maximum Proof Load is 2 times the Working Load Limit.

## S-237

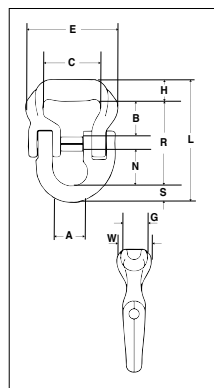

- High Performance Sling Connector is designed to connect to slings of all materials.
- Allows easy connection to master links or eye hooks and is ideal for bridles.
- Increased radius of bow gives wider sling bearing surface resulting in an increased area for load distribution, allows better load distribution on internal fibers.
  - Increases synthetic sling efficiency as compared to master links, shackle bows and conventional eye hooks. This allows 100% of the sling's rated Working Load Limit to be achieved.
- All alloy construction
- Each connector has a Product Identification Code (PIC) for material traceability, along with a frame size and the name Crosby forged into it.
- Crosby Sling Saver hardware meets the requirements for minimum stock diameter or thickness, and effective contact width shown in the Recommended Standards Specification for Synthetic Polyester Round Slings by the Web Sling & Tie Down Association (WSTDA-RS1).

## S-238

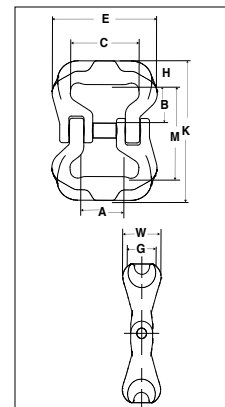

### S-237 High Performance Sling Connector



| Working Load Limit |          |         |    | Nominal Sling Body Width (in) | Lok-A-Loy Size (in) | Weight Each (lb) | Dimensions (in) |           |      |      |      |      |       |      |      |      |      |
|--------------------|----------|---------|----|-------------------------------|---------------------|------------------|-----------------|-----------|------|------|------|------|-------|------|------|------|------|
| 4:1 (lb)           | 5:1 (lb) |         |    |                               |                     |                  | Stock No.       | Frame No. | A    | B    | C    | E    | G     | H    | L    | N    | R    |
| 6250               | 5000     | 1020695 | 5  | 2                             | 3/8                 | 1.14             | .88             | 1.42      | 2.00 | 3.18 | 1.00 | .80  | 4.20  | 1.04 | 2.92 | .48  | 1.38 |
| 12500              | 10000    | 1020704 | 10 | 3                             | 5/8                 | 2.96             | 1.42            | 1.52      | 2.75 | 4.13 | 1.25 | .98  | 5.68  | 1.71 | 3.94 | .75  | 1.75 |
| 18750              | 15000    | 1020713 | 15 | 3                             | 3/4                 | 4.75             | 1.63            | 1.58      | 2.75 | 4.37 | 1.38 | 1.10 | 6.49  | 2.04 | 4.46 | .93  | 1.88 |
| 31250              | 25000    | 1020722 | 25 | 4                             | 7/8                 | 8.59             | 2.00            | 2.33      | 3.75 | 6.00 | 1.75 | 1.41 | 7.97  | 2.27 | 5.51 | 1.06 | 2.25 |
| 37500              | 30000    | 1020731 | 30 | 4                             | 7/8                 | 9.24             | 2.00            | 2.20      | 3.75 | 6.19 | 1.75 | 1.41 | 7.84  | 2.27 | 5.38 | 1.06 | 2.38 |
| 50000              | 40000    | 1020740 | 40 | 5                             | 1                   | 15.7             | 2.25            | 2.91      | 4.75 | 7.25 | 2.25 | 1.78 | 9.45  | 2.44 | 6.45 | 1.22 | 3.09 |
| 75000              | 60000    | 1020759 | 60 | 6                             | 1-1/4               | 26.0             | 2.56            | 3.36      | 5.75 | 9.13 | 2.31 | 1.86 | 11.08 | 3.07 | 7.72 | 1.50 | 3.16 |

Design Factor of 5:1.

Maximum allowable Proof Load is 2 times the Working Load Limit when used at 4:1 design factor.

### S-238 High Performance Sling Connector



| Working Load Limit (lb) | Stock No. | Frame No. | Nominal Sling Body Width (in) | Weight Each (lb) | Dimensions (in) |      |      |      |      |      |       |      |      |
|-------------------------|-----------|-----------|-------------------------------|------------------|-----------------|------|------|------|------|------|-------|------|------|
|                         |           |           |                               |                  | A               | B    | C    | E    | G    | H    | K     | M    | W    |
| 5000                    | 1020415   | 5         | 2                             | 1.6              | .88             | 1.42 | 2.00 | 3.18 | 1.00 | .80  | 4.90  | 3.30 | 1.38 |
| 10000                   | 1020423   | 10        | 3                             | 3.3              | 1.42            | 1.52 | 2.75 | 4.13 | 1.25 | .98  | 5.72  | 3.76 | 1.75 |
| 15000                   | 1020432   | 15        | 3                             | 4.9              | 1.63            | 1.58 | 2.75 | 4.37 | 1.38 | 1.10 | 6.16  | 3.96 | 1.88 |
| 25000                   | 1020441   | 25        | 4                             | 10.1             | 2.00            | 2.33 | 3.75 | 6.00 | 1.75 | 1.41 | 8.40  | 5.58 | 2.25 |
| 30000                   | 1020450   | 30        | 4                             | 11.4             | 2.00            | 2.20 | 3.75 | 6.19 | 1.75 | 1.41 | 8.14  | 5.32 | 2.38 |
| 40000                   | 1020469   | 40        | 5                             | 20.7             | 2.25            | 2.91 | 4.75 | 7.25 | 2.25 | 1.78 | 10.48 | 6.92 | 3.09 |
| 60000                   | 1020478   | 60        | 6                             | 32.0             | 2.56            | 3.36 | 5.75 | 9.13 | 2.31 | 1.86 | 11.72 | 8.00 | 3.16 |

Design factor of 5:1. Maximum Proof Load is 2.5 times the Working Load Limit.




## Roundsling Hook RH

The RH-hook is the perfect load connection solution, combining the advantages of both soft lifting slings and grade 100 components. It can be inserted into a softsling and is quicker and safer to use than the commonly used shackle. The RH-hook is a connector as well as a hook, which gives the user increased flexibility, safer use and increased durability of the soft slings.

The RH-hook comes with a blocking pin, but thanks to the narrow opening it may be used without blocking pin.

CE

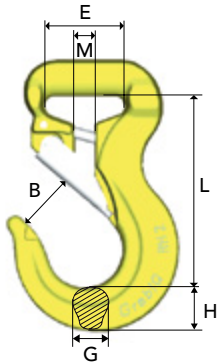

| Stock No. | Code    | WLL (lb) | B    | E    | G    | L    | H    | M    | Weight (lb) |
|-----------|---------|----------|------|------|------|------|------|------|-------------|
| 7202530   | RH-1-10 | 2204     | 0.94 | 1.37 | 0.65 | 3.30 | 0.74 | 0.31 | 1.10        |
| 7202539   | RH-2-10 | 4500     | 1.10 | 1.57 | 0.66 | 3.77 | 0.86 | 0.39 | 1.54        |
| 7202548   | RH-3-10 | 6612     | 1.29 | 1.85 | 0.94 | 4.60 | 1.18 | 0.47 | 2.86        |
| 7202557   | RH-5-10 | 11020    | 1.69 | 2.87 | 1.06 | 6.10 | 1.41 | 0.64 | 7.05        |

4:1 Design Factor. Tested according to EN 1677-2.



The roundsling hooks are color coded in order to match the corresponding sizes of roundslings marked according to EN 1492: Red=5T, Yellow=3T, Green=2T and Violet=1T.



A few seconds can make a significant difference in a serious accident rescue operation. Vehicle design and extreme deformations common in accidents can make the work of emergency workers challenging.

The Gunnebo Industries Rescue Chain Kit is simple and effective for patient-friendly rescues in various accident scenarios, including frontal, side, and rear impacts.

The methodology and equipment is standardized in many parts of Europe, including Germany and Scandinavia. The pulling moves the fire brigade's working space to the outside and allows parallel work of medical care and technical rescue.

The kits are available in sizes from 6 mm (7/32 in) up to 16 mm (5/8 in) and working load limits up to 10t (22 600 lb). Most commonly 8 mm (5/16 in) or 10 mm (3/8 in) are used, along with appropriately sized synthetic slings and synthetic sling hooks.

### Recommended kit

- 4 x 2,7m (9ft) chain sling MG1-CL
- 2 x 6m (20ft) synthetic sling\*
- 4 x RH synthetic sling hooks
- 4 x G-209 or 854 bow screw pin shackles
- 2 x metal or plastic hardcase for easy storage



**GUNNEBO**  
Industries

# The SK-System

A range of specialized components for safe and easy assembly to chain, steel wire rope, webbing, and roundsling, designed to solve your below-the-hook challenges.

The Polyester Sling System provides:

- Universal coupling of components to chain, wire and synthetic slings.
- Quick and simple assembly (only a hammer needed).
- Easy assembly - standardized dimensions within each size range effectively eliminates the incorrect assembly of components with different safe working loads.
- Heavy hoisting with strong yet lightweight equipment.
- All components are manufactured from alloy steel for use with Grade 8 chain.



## SKA – pin & collar

The SKA set, containing pin and collar, can be used to connect all products in the SK-range. This creates a multitude of available combinations, each adaptable to the unique lifting situation.

The SKA set gives you flexibility. It can be disassembled and put in new combinations, providing solutions for a versatile lifting environment.



## SKLI/SKLU

Electrically insulated, lubricated, sealed roller bearing swivel. Fully rotational even at maximum load. Tested to resist 1000 V. Suitable for protection of overhead cranes during welding operations on suspended loads.

By using the SKLI/SKLU with the SK-system you get a versatile solution that will fit almost any situation.



# GREEN PIN<sup>®</sup>

## PRODUCT CATALOGUE

**IMPERIAL**







## Green Pin® Web Sling Shackle SC


Shackle for synthetic web slings with screw collar pin

- **Material:** bow and pin alloy steel, grade 80, quenched and tempered
- **Safety factor:** MBL equals 6 x WLL
- **Standard:** EN1677-1 and ASME B30.26
- **Finish:** painted green
- **Temperature range:** -40 °C up to 200 °C
- **Certification:** 2.1 2.2 3.1 CE IIA
- **Article code:** scan QR code to see article codes

Scan for additional product details



P-5461




| working load limit | diameter bow                   | diameter pin                  | diameter eye                    | width eye                     | width inside                    | length inside                   | width inside                    | length                          | length bolt                     | width                           | weight each |
|--------------------|--------------------------------|-------------------------------|---------------------------------|-------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|-------------|
| metric t           | a inch                         | b inch                        | c inch                          | d inch                        | e inch                          | f inch                          | g inch                          | h inch                          | i inch                          | j inch                          | lbs         |
| 3.25               | <sup>25</sup> / <sub>32</sub>  | <sup>3</sup> / <sub>4</sub>   | 1 <sup>9</sup> / <sub>16</sub>  | <sup>5</sup> / <sub>8</sub>   | 1 <sup>1</sup> / <sub>16</sub>  | 1 <sup>1</sup> / <sub>2</sub>   | 1 <sup>3</sup> / <sub>8</sub>   | 3 <sup>7</sup> / <sub>16</sub>  | 3 <sup>1</sup> / <sub>2</sub>   | 2 <sup>11</sup> / <sub>16</sub> | 1.46        |
| 4.75               | <sup>15</sup> / <sub>16</sub>  | <sup>7</sup> / <sub>8</sub>   | 1 <sup>13</sup> / <sub>16</sub> | <sup>3</sup> / <sub>4</sub>   | 1 <sup>7</sup> / <sub>32</sub>  | 1 <sup>7</sup> / <sub>8</sub>   | 1 <sup>13</sup> / <sub>16</sub> | 4 <sup>3</sup> / <sub>16</sub>  | 4 <sup>1</sup> / <sub>16</sub>  | 3 <sup>11</sup> / <sub>32</sub> | 2.43        |
| 6.5                | 1 <sup>1</sup> / <sub>16</sub> | 1                             | 2 <sup>1</sup> / <sub>16</sub>  | <sup>7</sup> / <sub>8</sub>   | 1 <sup>13</sup> / <sub>32</sub> | 2 <sup>27</sup> / <sub>32</sub> | 2 <sup>7</sup> / <sub>16</sub>  | 5 <sup>13</sup> / <sub>32</sub> | 4 <sup>11</sup> / <sub>16</sub> | 4 <sup>9</sup> / <sub>32</sub>  | 3.95        |
| 8.5                | 1 <sup>1</sup> / <sub>4</sub>  | 1 <sup>1</sup> / <sub>8</sub> | 2 <sup>5</sup> / <sub>16</sub>  | <sup>31</sup> / <sub>32</sub> | 1 <sup>11</sup> / <sub>16</sub> | 3 <sup>9</sup> / <sub>32</sub>  | 3 <sup>1</sup> / <sub>8</sub>   | 6 <sup>7</sup> / <sub>32</sub>  | 5 <sup>13</sup> / <sub>32</sub> | 5 <sup>1</sup> / <sub>4</sub>   | 6.04        |

CAD



## Green Pin® Theatre Shackle SC

Matte black bow shackle with screw collar pin

- **Material:** bow and pin high tensile steel, grade 60, quenched and tempered
- **Safety factor:** MBL equals 6 x WLL
- **Standard:** ISO 2415, EN 13889 and meets performance requirements of US Fed. Spec. RR-C-271 Type IVA Class 2, grade A, from 2 t and upward these shackles comply with ASME B30.26
- **Finish:** black
- **Temperature range:** -40 °F up to +392 °F
- **Certification:** 2.1 2.2 3.1 MTC<sup>3</sup> CE IIA
- **Article code:** scan QR code to see article codes



G-4161T



| working load limit | diameter bow                 | diameter pin                  | diameter eye                    | width eye                     | width inside                    | length inside                   | width bow                       | length                          | length bolt                     | width                           | weight each |
|--------------------|------------------------------|-------------------------------|---------------------------------|-------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|-------------|
| metric t           | a inch                       | b inch                        | c inch                          | d inch                        | e inch                          | f inch                          | g inch                          | h inch                          | i inch                          | j inch                          | lbs         |
| 0.33               | <sup>3</sup> / <sub>16</sub> | <sup>1</sup> / <sub>4</sub>   | <sup>15</sup> / <sub>32</sub>   | <sup>3</sup> / <sub>16</sub>  | <sup>3</sup> / <sub>8</sub>     | <sup>7</sup> / <sub>8</sub>     | <sup>5</sup> / <sub>8</sub>     | 1 <sup>13</sup> / <sub>32</sub> | 1 <sup>5</sup> / <sub>32</sub>  | 1 <sup>1</sup> / <sub>32</sub>  | 0.04        |
| 0.5                | <sup>1</sup> / <sub>4</sub>  | <sup>5</sup> / <sub>16</sub>  | <sup>5</sup> / <sub>8</sub>     | <sup>9</sup> / <sub>32</sub>  | <sup>15</sup> / <sub>32</sub>   | 1 <sup>5</sup> / <sub>32</sub>  | <sup>25</sup> / <sub>32</sub>   | 1 <sup>7</sup> / <sub>8</sub>   | 1 <sup>1</sup> / <sub>2</sub>   | 1 <sup>11</sup> / <sub>32</sub> | 0.11        |
| 0.75               | <sup>5</sup> / <sub>16</sub> | <sup>3</sup> / <sub>8</sub>   | <sup>25</sup> / <sub>32</sub>   | <sup>11</sup> / <sub>32</sub> | <sup>17</sup> / <sub>32</sub>   | 1 <sup>1</sup> / <sub>4</sub>   | <sup>7</sup> / <sub>8</sub>     | 2 <sup>7</sup> / <sub>32</sub>  | 1 <sup>27</sup> / <sub>32</sub> | 1 <sup>9</sup> / <sub>16</sub>  | 0.22        |
| 1                  | <sup>3</sup> / <sub>8</sub>  | <sup>7</sup> / <sub>16</sub>  | <sup>29</sup> / <sub>32</sub>   | <sup>13</sup> / <sub>32</sub> | <sup>21</sup> / <sub>32</sub>   | 1 <sup>15</sup> / <sub>32</sub> | 1 <sup>1</sup> / <sub>32</sub>  | 2 <sup>17</sup> / <sub>32</sub> | 2 <sup>1</sup> / <sub>8</sub>   | 1 <sup>13</sup> / <sub>16</sub> | 0.31        |
| 1.5                | <sup>7</sup> / <sub>16</sub> | <sup>1</sup> / <sub>2</sub>   | <sup>31</sup> / <sub>32</sub>   | <sup>7</sup> / <sub>16</sub>  | <sup>3</sup> / <sub>4</sub>     | 1 <sup>11</sup> / <sub>16</sub> | 1 <sup>5</sup> / <sub>32</sub>  | 2 <sup>7</sup> / <sub>8</sub>   | 2 <sup>11</sup> / <sub>32</sub> | 2                               | 0.42        |
| 2                  | <sup>1</sup> / <sub>2</sub>  | <sup>5</sup> / <sub>8</sub>   | 1 <sup>11</sup> / <sub>32</sub> | <sup>1</sup> / <sub>2</sub>   | <sup>7</sup> / <sub>8</sub>     | 2                               | 1 <sup>1</sup> / <sub>4</sub>   | 3 <sup>17</sup> / <sub>32</sub> | 2 <sup>7</sup> / <sub>8</sub>   | 2 <sup>5</sup> / <sub>16</sub>  | 0.79        |
| 3.25               | <sup>5</sup> / <sub>8</sub>  | <sup>3</sup> / <sub>4</sub>   | 1 <sup>9</sup> / <sub>16</sub>  | <sup>5</sup> / <sub>8</sub>   | 1 <sup>1</sup> / <sub>16</sub>  | 2 <sup>17</sup> / <sub>32</sub> | 1 <sup>11</sup> / <sub>16</sub> | 4 <sup>11</sup> / <sub>32</sub> | 3 <sup>1</sup> / <sub>2</sub>   | 2 <sup>15</sup> / <sub>16</sub> | 1.39        |
| 4.75               | <sup>3</sup> / <sub>4</sub>  | <sup>7</sup> / <sub>8</sub>   | 1 <sup>13</sup> / <sub>16</sub> | <sup>3</sup> / <sub>4</sub>   | 1 <sup>7</sup> / <sub>32</sub>  | 3                               | 2                               | 5 <sup>3</sup> / <sub>32</sub>  | 4 <sup>1</sup> / <sub>16</sub>  | 3 <sup>1</sup> / <sub>2</sub>   | 2.23        |
| 6.5                | <sup>7</sup> / <sub>8</sub>  | 1                             | 2 <sup>1</sup> / <sub>16</sub>  | <sup>7</sup> / <sub>8</sub>   | 1 <sup>13</sup> / <sub>32</sub> | 3 <sup>9</sup> / <sub>32</sub>  | 2 <sup>9</sup> / <sub>32</sub>  | 5 <sup>21</sup> / <sub>32</sub> | 4 <sup>11</sup> / <sub>16</sub> | 4 <sup>1</sup> / <sub>32</sub>  | 3.31        |
| 8.5                | 1                            | 1 <sup>1</sup> / <sub>8</sub> | 2 <sup>5</sup> / <sub>16</sub>  | <sup>31</sup> / <sub>32</sub> | 1 <sup>11</sup> / <sub>16</sub> | 3 <sup>3</sup> / <sub>4</sub>   | 2 <sup>11</sup> / <sub>16</sub> | 6 <sup>15</sup> / <sub>32</sub> | 5 <sup>13</sup> / <sub>32</sub> | 4 <sup>21</sup> / <sub>32</sub> | 4.87        |



# **CM<sup>®</sup>** **CHAIN & RIGGING ATTACHMENTS**

SHACKLES

CHAIN & SYNTHETIC  
SLING COMPONENTS

RIGGING HARDWARE

CLAMPS

TRANSPORTATION  
CHAIN & ATTACHMENTS

SPECIALTY PRODUCTS



C O L U M B U S   M c K I N N O N   C O R P O R A T I O N










## HAMMERLOK® HERC-ALLOY 800®

WORKING LOAD LIMIT: 2,100 TO 72,300 LBS.



### BENEFITS & FEATURES

- Used for overhead lifting slings to connect chain branches to the master link and the hook to attachments.
- Constructed of drop forged alloy steel
- Can be used with Grade 80 chain
- Must be matched to chain size
- Do not use for chain repair or splicing
- Meets ASTM A952 standards.
- 4:1 design factor



| Size (in.) | Working Load Limit (lbs.) | Completed Unit |               |                  | Load Pin Kit |               | Dimensions (in.) |      |      |      |      |      |      |
|------------|---------------------------|----------------|---------------|------------------|--------------|---------------|------------------|------|------|------|------|------|------|
|            |                           | Product Code   | Weight (lbs.) | Standard Package | Product Code | Weight (lbs.) | A                | B    | C    | D    | E    | F    | G    |
| 7/32       | 2,100                     | 664021-2       | 0.12          | 36               | R664021-2    | 0.01          | 0.25             | 0.25 | 1.40 | 0.50 | 0.58 | 1.21 | 0.44 |
| 9/32       | 3,500                     | 664028-2       | 0.26          | 36               | R664028-2    | 0.02          | 0.34             | 0.31 | 1.94 | 0.75 | 0.70 | 1.51 | 0.56 |
| 3/8        | 7,100                     | 664038-2       | 0.59          | 36               | R664038-2    | 0.05          | 0.48             | 0.50 | 2.41 | 0.88 | 0.91 | 2.09 | 0.80 |
| 1/2        | 12,000                    | 664050-2       | 1.42          | 24               | R664050-2    | 0.12          | 0.66             | 0.70 | 3.51 | 1.29 | 1.41 | 2.96 | 1.15 |
| 5/8        | 18,100                    | 664062-2       | 2.35          | 12               | R664062-2    | 0.20          | 0.78             | 0.81 | 4.06 | 1.50 | 1.70 | 3.52 | 1.40 |
| 3/4        | 28,300                    | 664075-2       | 3.67          | 12               | R664075-2    | 0.30          | 0.96             | 0.94 | 4.78 | 1.80 | 1.97 | 4.11 | 1.71 |
| 7/8        | 34,200                    | 664089-2       | 5.98          | 6                | R664089-2    | 0.40          | 1.16             | 1.05 | 5.25 | 1.97 | 2.09 | 4.95 | 1.88 |
| 1          | 47,700                    | 664100-2       | 9.47          | —                | R664100-2    | 0.70          | 1.32             | 1.25 | 6.00 | 2.31 | 2.37 | 5.87 | 2.33 |
| 1-1/4      | 72,300                    | 664125-2       | 16.61         | —                | R664125-2    | 1.20          | 1.57             | 1.53 | 6.81 | 2.17 | 2.98 | 7.04 | 2.67 |

## WEBLOK™ ASSEMBLY HERC-ALLOY 800®

WORKING LOAD LIMIT: 5,000 TO 75,000 LBS.

SEE PAGES 88-89  
 For the full Weblok product offering!




### BENEFITS & FEATURES

- Combines our industry-leading Hammerlok coupling link with a CM web sling attachment, making it ideal for use with synthetic slings.
- Features a unique double load pin retention system to prevent the load pin from backing out during extreme use. Uses both traditional and bolt/lock nut retention.
- Durable orange powder coated finish on web sling arrangement.
- Made of durable forged alloy steel.
- 100% proof tested.
- Meets ASTM A952 & WSTDA-RS1 standards.
- 5:1 design factor



- Retention Component 1:**  
 Traditional stud tube and spring assembly engages the center of the load pin.
- Retention Component 2:**  
 Load pin is designed to act like a bolt, featuring a capped end and lock nut.

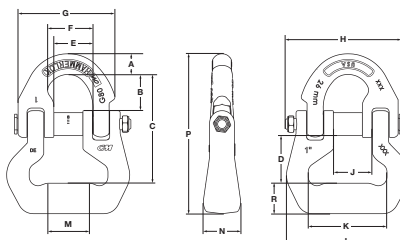

| Size<br>(in.) | Working<br>Load Limit<br>(lbs.) |        | Product<br>Code | Load Pin<br>Kit | Dimensions (in.) |       |       |       |       |       |       |       |       |       |       |       |       |        |       |            | Weight<br>(lbs.) |
|---------------|---------------------------------|--------|-----------------|-----------------|------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------|-------|------------|------------------|
|               | Design Factor                   |        |                 |                 | A                | B     | C     | D     | E     | F     | G     | H     | J     | K     | L     | M     | N     | P      | R     | Locknut    |                  |
|               | 5:1                             | 4:1    |                 |                 |                  |       |       |       |       |       |       |       |       |       |       |       |       |        |       |            |                  |
| 3/8           | 5,000                           | 6,250  | 867010-4        | R867010-4       | 0.530            | 1.157 | 3.151 | 1.306 | 0.931 | 1.048 | 2.327 | 2.883 | 0.931 | 2.000 | 3.175 | 0.750 | 1.000 | 4.482  | 0.800 | 1/4-20 UNC | 1.49             |
| 5/8           | 10,000                          | 12,500 | 867020-4        | R867020-4       | 0.875            | 1.737 | 4.320 | 1.520 | 1.347 | 1.551 | 3.574 | 4.372 | 1.347 | 2.750 | 4.130 | 1.250 | 1.250 | 6.185  | 0.990 | 3/8-16 UNC | 3.96             |
| 3/4           | 15,000                          | 18,750 | 867025-4        | R867025-4       | 1.039            | 2.022 | 5.467 | 2.132 | 1.547 | 1.781 | 4.313 | 5.341 | 1.547 | 2.750 | 4.479 | 1.200 | 1.380 | 7.607  | 1.100 | 1/2-13UNC  | 6.62             |
| 7/8           | 25,000                          | 31,250 | 867030-4        | R867030-4       | 1.046            | 1.829 | 5.145 | 2.004 | 1.919 | 2.247 | 5.003 | 6.103 | 1.919 | 3.750 | 6.000 | 2.410 | 1.750 | 7.601  | 1.410 | 5/8-11UNC  | 8.96             |
| 1             | 40,000                          | 50,000 | 867035-4        | R867035-4       | 1.250            | 2.313 | 6.573 | 2.885 | 2.365 | 2.735 | 5.856 | 7.030 | 2.365 | 4.744 | 7.446 | 2.500 | 2.250 | 9.670  | 1.848 | 5/8-11UNC  | 15.83            |
| 1-1/4         | 60,000                          | 75,000 | 867040-4        | R867040-4       | 1.531            | 2.625 | 7.406 | 3.219 | 2.701 | 3.000 | 7.035 | 8.536 | 2.701 | 5.753 | 8.882 | 3.375 | 2.310 | 10.918 | 1.980 | 3/4-16UNC  | 25.35            |



## WEBLOK ASSEMBLY

**WORKING LOAD LIMIT: UP TO 75,000 LBS.  
AVAILABLE IN 6 SIZES FROM 3/8" TO 1-1/4"**

When working with synthetic slings, CM Weblok assemblies allow for quick, easy and safe sling attachment. CM Webloks are available in two designs. Synthetic-to-attachment Webloks combine our industry-leading CM Hammerlok® coupling link with a CM synthetic sling attachment. Synthetic-to-synthetic Webloks feature two synthetic sling attachments. CM Webloks are available with either single or double load pin retention, depending on your application.

### BENEFITS & FEATURES

- Versatile & easy to use
- Made of durable forge alloy steel
- 5:1 design factor
- 100% proof tested
- Durable orange powder coated finish
- Meets ASTM A952 & WSTDA-RS1 standards
- Industry-leading safety




SYNTHETIC TO ATTACHMENT  
WITH DOUBLE RETENTION



SYNTHETIC TO ATTACHMENT  
WITH SINGLE RETENTION



SYNTHETIC TO SYNTHETIC  
WITH SINGLE RETENTION



SYNTHETIC TO SYNTHETIC  
WITH DOUBLE RETENTION







## WEBLOK ASSEMBLY

**WORKING LOAD LIMIT: UP TO 75,000 LBS.  
AVAILABLE IN 6 SIZES FROM 3/8" TO 1-1/4"**

When working with synthetic slings, CM Weblok assemblies allow for quick, easy and safe sling attachment. CM Webloks are available in two designs. Synthetic-to-attachment Webloks combine our industry-leading CM Hammerlok® coupling link with a CM synthetic sling attachment. Synthetic-to-synthetic Webloks feature two synthetic sling attachments. CM Webloks are available with either single or double load pin retention, depending on your application.

### BENEFITS & FEATURES

- Versatile & easy to use
- Made of durable forge alloy steel
- 5:1 design factor
- 100% proof tested
- Durable orange powder coated finish
- Meets ASTM A952 & WSTDA-RS1 standards
- Industry-leading safety



SYNTHETIC TO ATTACHMENT  
WITH DOUBLE RETENTION



SYNTHETIC TO ATTACHMENT  
WITH SINGLE RETENTION



SYNTHETIC TO SYNTHETIC  
WITH SINGLE RETENTION



SYNTHETIC TO SYNTHETIC  
WITH DOUBLE RETENTION




OPTIONAL  
UNIQUE DOUBLE LOAD PIN RETENTION

SAFETY IS A TOP PRIORITY


When working with synthetic slings, CM Weblok assemblies allow for quick, easy and safe sling attachment. CM Webloks are available with either single or double load pin retention, depending on your application.



SINGLE RETENTION




DOUBLE RETENTION

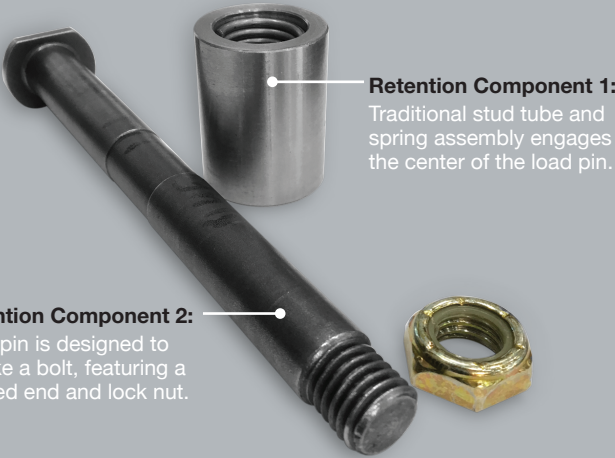


**Retention Component 1:**  
Traditional stud tube and spring assembly engages the center of the load pin.

**Retention Component 2:**  
Load pin is designed to act like a bolt, featuring a capped end and lock nut.

SYNTHETIC TO ATTACHMENT

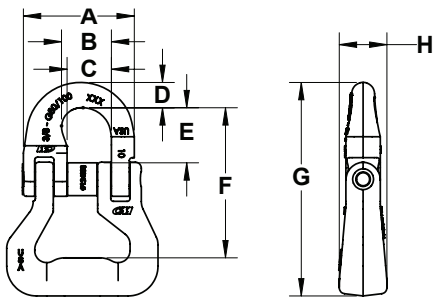

SYNTHETIC TO SYNTHETIC

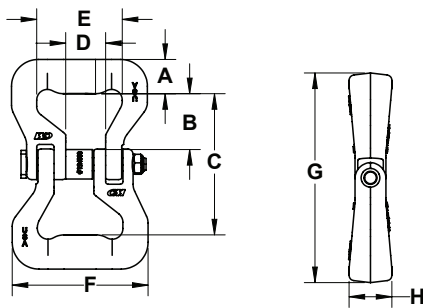

| Size<br>(in.)           | Working Load Limit<br>(lbs.) |        | Product Code        |                     | Double<br>Retention<br>Load Pin<br>Kit | Dimensions (in.) |      |      |      |      |      |       |      | Weight<br>(lbs.) |
|-------------------------|------------------------------|--------|---------------------|---------------------|----------------------------------------|------------------|------|------|------|------|------|-------|------|------------------|
|                         | Design Factor                |        | Single<br>Retention | Double<br>Retention |                                        | A                | B    | C    | D    | E    | F    | G     | H    |                  |
|                         | 5:1                          | 4:1    |                     |                     |                                        |                  |      |      |      |      |      |       |      |                  |
| Synthetic to Attachment |                              |        |                     |                     |                                        |                  |      |      |      |      |      |       |      |                  |
| 3/8                     | 6,250                        | 7,850  | 867010-2            | 867010-4            | R867010-4                              | 2.33             | 1.05 | 0.93 | 0.53 | 1.16 | 3.15 | 4.48  | 1.00 | 1.49             |
| 5/8                     | 12,500                       | 15,650 | 867020-2            | 867020-4            | R867020-4                              | 3.57             | 1.55 | 1.35 | 0.88 | 1.74 | 4.32 | 6.19  | 1.25 | 3.96             |
| 3/4                     | 18,750                       | 23,450 | 867025-2            | 867025-4            | R867025-4                              | 4.31             | 1.78 | 1.55 | 1.04 | 2.02 | 5.47 | 7.61  | 1.38 | 6.62             |
| 7/8                     | 30,000                       | 37,500 | 867030-2            | 867030-4            | R867030-4                              | 5.00             | 2.25 | 1.92 | 1.05 | 1.83 | 5.15 | 7.60  | 1.75 | 8.96             |
| 1                       | 40,000                       | 50,000 | N/A                 | 867035-4            | R867035-4                              | 5.86             | 2.74 | 2.37 | 1.25 | 2.31 | 6.57 | 9.67  | 2.25 | 16.18            |
| 1-1/4                   | 60,000                       | 75,000 | N/A                 | 867040-4            | R867040-4                              | 7.04             | 3.00 | 2.70 | 1.53 | 2.63 | 7.41 | 10.92 | 2.31 | 25.35            |
| Synthetic to Synthetic  |                              |        |                     |                     |                                        |                  |      |      |      |      |      |       |      |                  |
| 3/8                     | 5,000                        | N/A    | 877010-2            | 877010-4            | R867010-4                              | 0.80             | 1.31 | 3.30 | 0.93 | 2.00 | 3.18 | 4.90  | 1.00 | 2.03             |
| 5/8                     | 10,000                       | N/A    | 877020-2            | 877020-4            | R867020-4                              | 0.99             | 1.52 | 4.10 | 1.38 | 2.75 | 4.13 | 6.08  | 1.25 | 4.56             |
| 3/4                     | 15,000                       | N/A    | 877025-2            | 877025-4            | R867025-4                              | 1.10             | 2.13 | 5.58 | 1.55 | 2.75 | 4.48 | 7.78  | 1.38 | 6.96             |
| 7/8                     | 25,000                       | N/A    | 877030-2            | 877030-4            | R867030-4                              | 1.41             | 2.00 | 5.32 | 1.92 | 3.75 | 6.00 | 8.14  | 1.75 | 11.00            |
| 1                       | 40,000                       | N/A    | N/A                 | 877035-4            | R867035-4                              | 1.85             | 2.89 | 7.15 | 2.37 | 4.74 | 7.45 | 10.84 | 2.25 | 22.79            |
| 1-1/4                   | 60,000                       | N/A    | N/A                 | 877040-4            | R867040-4                              | 1.98             | 3.22 | 8.00 | 2.70 | 5.75 | 8.88 | 11.96 | 2.31 | 33.30            |

SYNTHETIC SLING  
COMPONENTS



# FLAT EYE RIGGING HOOK


WORKING LOAD LIMIT: UP TO 5 TONS • WEB SLING EYE WIDTHS UP TO 3"



Designed specifically for use with synthetic slings, CM Flat Eye Rigging Hooks provide a wide, smooth, load-bearing surface that won't damage synthetic material, promoting longer sling life. The flat eye opening eliminates bunching and pinching of the synthetic sling, ensuring the sling can be used at full capacity.

## BENEFITS & FEATURES

- High sling strength
- Longer sling life
- Strong and durable
- Versatile use
- Available with and without latches
- CE compliant
- 5:1 design factor
- Meets or exceeds ASME B30.10 standards

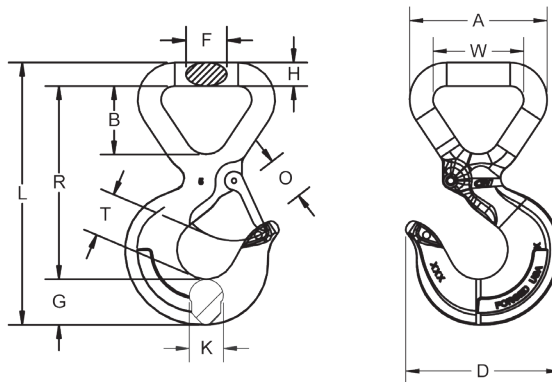

| Working Load Limit (tons) | Product Code |               |           | Dimensions (in.) |      |      |      |      |      |      |      |      |      |      | Weight (lbs.) |            |
|---------------------------|--------------|---------------|-----------|------------------|------|------|------|------|------|------|------|------|------|------|---------------|------------|
|                           | With Latch   | Without Latch | Latch Kit | A                | B    | D    | F    | G    | K    | L    | O    | R    | T    | W    | without Latch | with Latch |
| 1-1/2                     | M8503        | M8403         | 4X1303    | 2.38             | 1.20 | 3.37 | 0.75 | 0.94 | 0.71 | 5.36 | 0.97 | 3.98 | 0.97 | 1.50 | 1.16          | 1.25       |
| 3                         | M8505        | M8405         | 4X1305    | 3.79             | 1.88 | 4.25 | 1.13 | 1.26 | 0.94 | 7.21 | 1.21 | 5.31 | 1.21 | 2.50 | 2.82          | 3.00       |
| 5                         | M8507        | M8407         | 4X1307    | 5.53             | 2.84 | 5.11 | 1.63 | 1.44 | 1.38 | 9.27 | 1.47 | 7.06 | 1.47 | 4.00 | 5.50          | 5.90       |

SYNTHETIC SLING COMPONENTS








# QUICK CONNECT HOOK

WORKING LOAD LIMIT: UP TO 13,200 LBS • WEB SLING EYE WIDTHS UP TO 3"

Ideal for use with synthetic slings, CM Quick Connect Hooks are the quickest and easiest way to add hooks to any synthetic sling by eliminating the need for additional hardware or assembly tools. Designed with a large bearing surface, these hooks prevent the sling from bunching, allowing the sling to be used at full capacity. And, for easy selection, Quick Connect Hooks are color coded to match common industry synthetic sling capacities.


## BENEFITS & FEATURES

- Quick and efficient attachment
  - Longer sling life
  - Low sling weight and cost
- Easy selection
  - Secure sling attachment
  - Strong and durable
  - Standard hook latches
  - I-Beam design reduces overall sling weight
  - Embossed for worldwide use



WLL: 2,600 LBS.

| Color | Working Load Limit (lbs.) | Product Code | Latch Kit | Dimensions (in.) |       |       |       |       |       |       |       |       |       | Weight (lbs.) |
|-------|---------------------------|--------------|-----------|------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|---------------|
|       |                           |              |           | A                | B     | C     | D     | E     | F     | G     | H     | I     | J     |               |
|       | 2,600                     | M85030       | 4X85030   | 0.770            | 3.530 | 0.794 | 2.884 | 1.500 | 1.500 | 0.418 | 0.938 | 0.813 | 0.580 | 1.450         |
|       | 5,300                     | M85060       | 4X85060   | 1.034            | 4.589 | 1.040 | 3.751 | 1.625 | 1.875 | 0.553 | 1.200 | 1.188 | 0.865 | 3.735         |
|       | 8,400                     | M85090       | 4X455329  | 1.208            | 5.410 | 1.172 | 4.325 | 1.875 | 2.375 | 0.640 | 1.500 | 1.250 | 1.043 | 5.835         |
|       | 13,200                    | M85120       | 4X455329  | 1.384            | 6.141 | 1.392 | 5.026 | 2.125 | 2.625 | 0.744 | 1.750 | 1.438 | 1.200 | 8.282         |

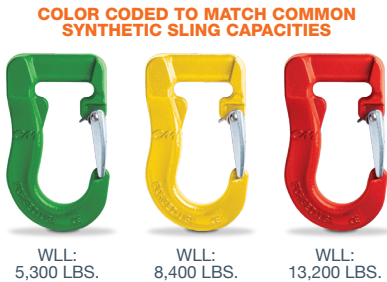

SYNTHETIC SLING  
COMPONENTS

## CARBON WEB SLING SHACKLE

WORKING LOAD LIMIT: 8,000 TO 23,500 LBS.




### BENEFITS & FEATURES

- Designed to connect synthetic slings to lifting hardware
- Design factor 4:1
- Web sling shackles can be used on web slings from 2 to 6 inches in width
- Shackle body: carbon steel, heat treated
- Shackle pin: alloy steel, heat treated
- Finish: hot dip galvanized
- Zinc-plated linchpin comes standard
- Cotter or hairpin available on special order.
- Do not point load. The load should be evenly distributed over the entire pin to achieve full working load limit.



| Product Code | Pin Number | Linch Pin Number | Working Load Limit (lbs.) | Dimensions (in.) |      |      |      |      | Weight (lbs.) |
|--------------|------------|------------------|---------------------------|------------------|------|------|------|------|---------------|
|              |            |                  |                           | P                | D    | L    | W    | R    |               |
| M702         | 2X702      | 35480            | 8,000                     | 0.75             | 0.63 | 2.25 | 2.00 | 1.63 | 1.70          |
| M703         | 2X703      | 35480            | 13,000                    | 0.88             | 0.75 | 3.25 | 3.00 | 1.88 | 2.86          |
| M704         | 2X704      | 35480            | 11,000                    | 0.88             | 0.75 | 3.75 | 4.00 | 1.88 | 3.15          |
| M705         | 2X705      | 5511             | 18,000                    | 1.00             | 0.88 | 4.25 | 5.00 | 2.13 | 4.75          |
| M706         | 2X706      | 5511             | 18,000                    | 1.13             | 1.00 | 4.75 | 6.00 | 2.38 | 6.75          |
| M706H        | 2X706H     | 5511             | 23,500                    | 1.25             | 1.13 | 4.75 | 6.00 | 2.63 | 9.80          |



## ALLOY WEB SLING SHACKLE

WORKING LOAD LIMIT: 13,500 TO 22,500 LBS.




### BENEFITS & FEATURES

- Designed to connect synthetic web and round slings to eye bolts and other lifting hardware
- Design factor 6:1
- Web sling shackles can be used on web slings from 3 to 6 inches in width
- Utilize a bolt and nut with linchpin to secure the assembly in place
- All shackles are galvanized for longer life
- Marked with working load limit (WLL) and size
- Do not point load. The load should be evenly distributed over the entire pin to achieve full working load limit.



| Product Code | Pin Number | Linch Pin Number | Working Load Limit (lbs.) | Dimensions (in.) |      |      |      |      | Weight (lbs.) |
|--------------|------------|------------------|---------------------------|------------------|------|------|------|------|---------------|
|              |            |                  |                           | P                | D    | L    | W    | R    |               |
| M703A        | 2X8703A    | 35480            | 13,500                    | 0.88             | 0.75 | 3.25 | 3.00 | 1.88 | 3.01          |
| M704A        | 2X8704A    | 35480            | 14,500                    | 0.88             | 0.75 | 3.75 | 4.00 | 1.88 | 3.16          |
| M705A        | 2X8705A    | 5511             | 19,000                    | 1.00             | 1.00 | 4.25 | 5.00 | 2.38 | 6.04          |
| M706A        | 2X8706A    | 5511             | 22,500                    | 1.13             | 1.13 | 4.75 | 6.00 | 2.63 | 9.02          |







ALL MATERIAL HANDLING  
Lifting Equipment

Product Catalog #20







# Double Jacket Round Sling

## FEATURES

- ▶ Endless Polyester Round Sling lengths are measured from bearing point to bearing point and WLL's are rated vertically at 5:1 design factor. All standard round slings are double jacket.

## Specifications and Dimensions



| Part # | Color  | Work Load (lbs) |        |         | Weight (lbs/ft) | Width           |
|--------|--------|-----------------|--------|---------|-----------------|-----------------|
|        |        | Vertical        | Choker | Basket  |                 |                 |
| DR1    | PURPLE | 2,600           | 2,100  | 5,200   | 0.20            | 5/8" - 1"       |
| DR2    | GREEN  | 5,300           | 4,200  | 10,600  | 0.30            | 7/8" - 1-3/8"   |
| DR3    | YELLOW | 8,400           | 6,700  | 16,800  | 0.50            | 1-1/8" - 1-3/4" |
| DR4    | TAN    | 10,600          | 8,500  | 21,200  | 0.60            | 1-1/8" - 1-7/8" |
| DR5    | RED    | 13,200          | 10,600 | 26,400  | 0.80            | 1-3/8" - 2"     |
| DR6    | WHITE  | 16,800          | 13,400 | 33,600  | 0.87            | 1-3/8" - 2-1/8" |
| DR7    | BLUE   | 21,200          | 17,000 | 42,400  | 1.30            | 1-3/4" - 2-5/8" |
| DR9    | ORANGE | 31,000          | 24,800 | 62,000  | 2.00            | 2-1/4" - 3-1/4" |
| DR12   | ORANGE | 66,000          | 52,800 | 132,000 | 3.50            | 3-1/8" - 4-5/8" |
| DR13   | ORANGE | 90,000          | 72,000 | 180,000 | 4.50            | 3-5/8" - 5-1/4" |

## CARTEC MADE IN ITALY Alloy Sling Hooks for Synthetic Slings



PURPLE  
SYNTHETIC  
ALLOY SLING HOOK





GREEN  
SYNTHETIC  
ALLOY SLING HOOK



YELLOW  
SYNTHETIC  
ALLOY SLING HOOK



RED  
SYNTHETIC  
ALLOY SLING HOOK

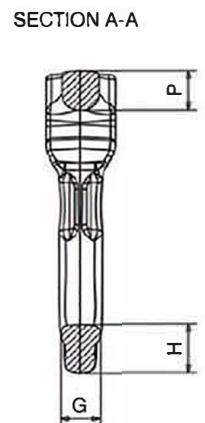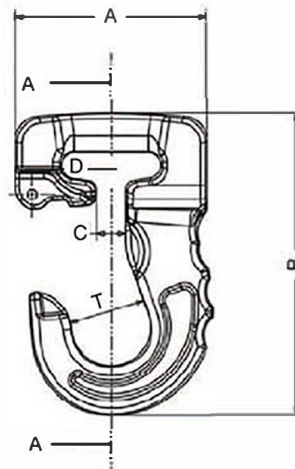

Synthetic Sling Hook color coded matching Round Sling of same color. WLL are rated at 5:1 design factor.

| Part # | Color  | Dimensions (in) |      |      |      |      |      |      |      | Weight (lbs) | WLL (lbs) |
|--------|--------|-----------------|------|------|------|------|------|------|------|--------------|-----------|
|        |        | A               | B    | C    | D    | G    | H    | P    | T    |              |           |
| CJ026  | PURPLE | 3.07            | 4.84 | 0.47 | 1.61 | 0.67 | 0.79 | 0.63 | 1.22 | 1.54         | 2,600     |
| CJ053  | GREEN  | 3.58            | 5.83 | 0.75 | 2.17 | 0.83 | 1.02 | 0.67 | 1.57 | 2.65         | 5,300     |
| CJ084* | YELLOW | 4.45            | 6.89 | 0.83 | 2.17 | 0.98 | 1.26 | 0.98 | 1.97 | 4.85         | 8,400     |
| CJ132  | RED    | 5.24            | 8.78 | 1.57 | 2.76 | 1.42 | 1.57 | 1.42 | 2.34 | 9.92         | 13,200    |

\*Also fits a 2" 2-ply Eye & Eye or 2" 1-ply Endless Sling