




CRANE BLOCKS


Crosby® McKISSICK®

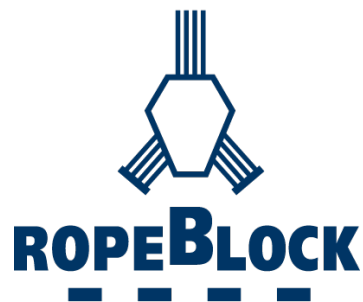

MILLER®

CoreLifting.com



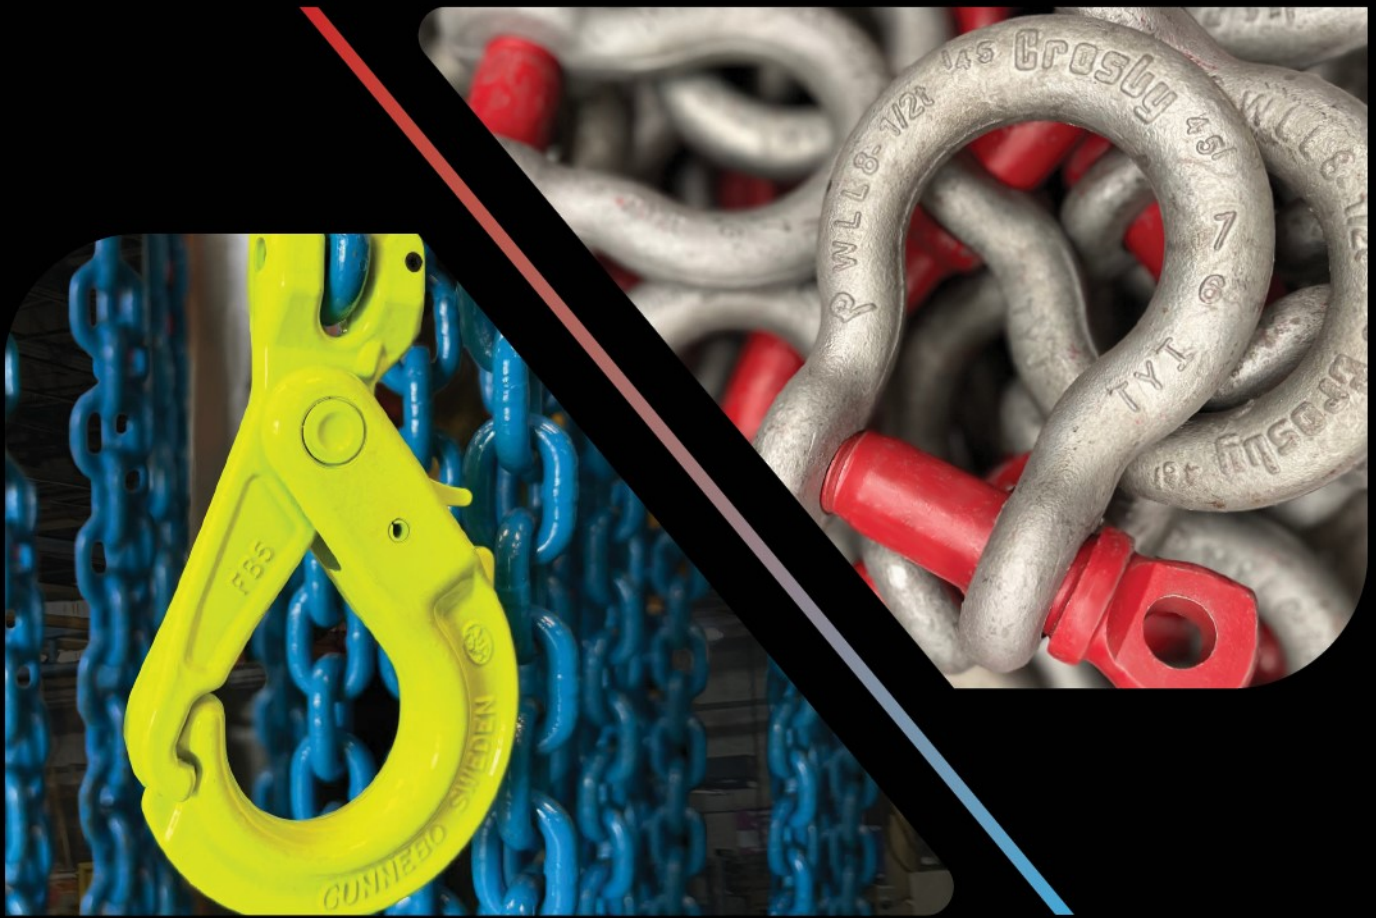

Crosby®




GUNNEBO®
Industries

PRODUCT CATALOG

with application & warning information

Imperial

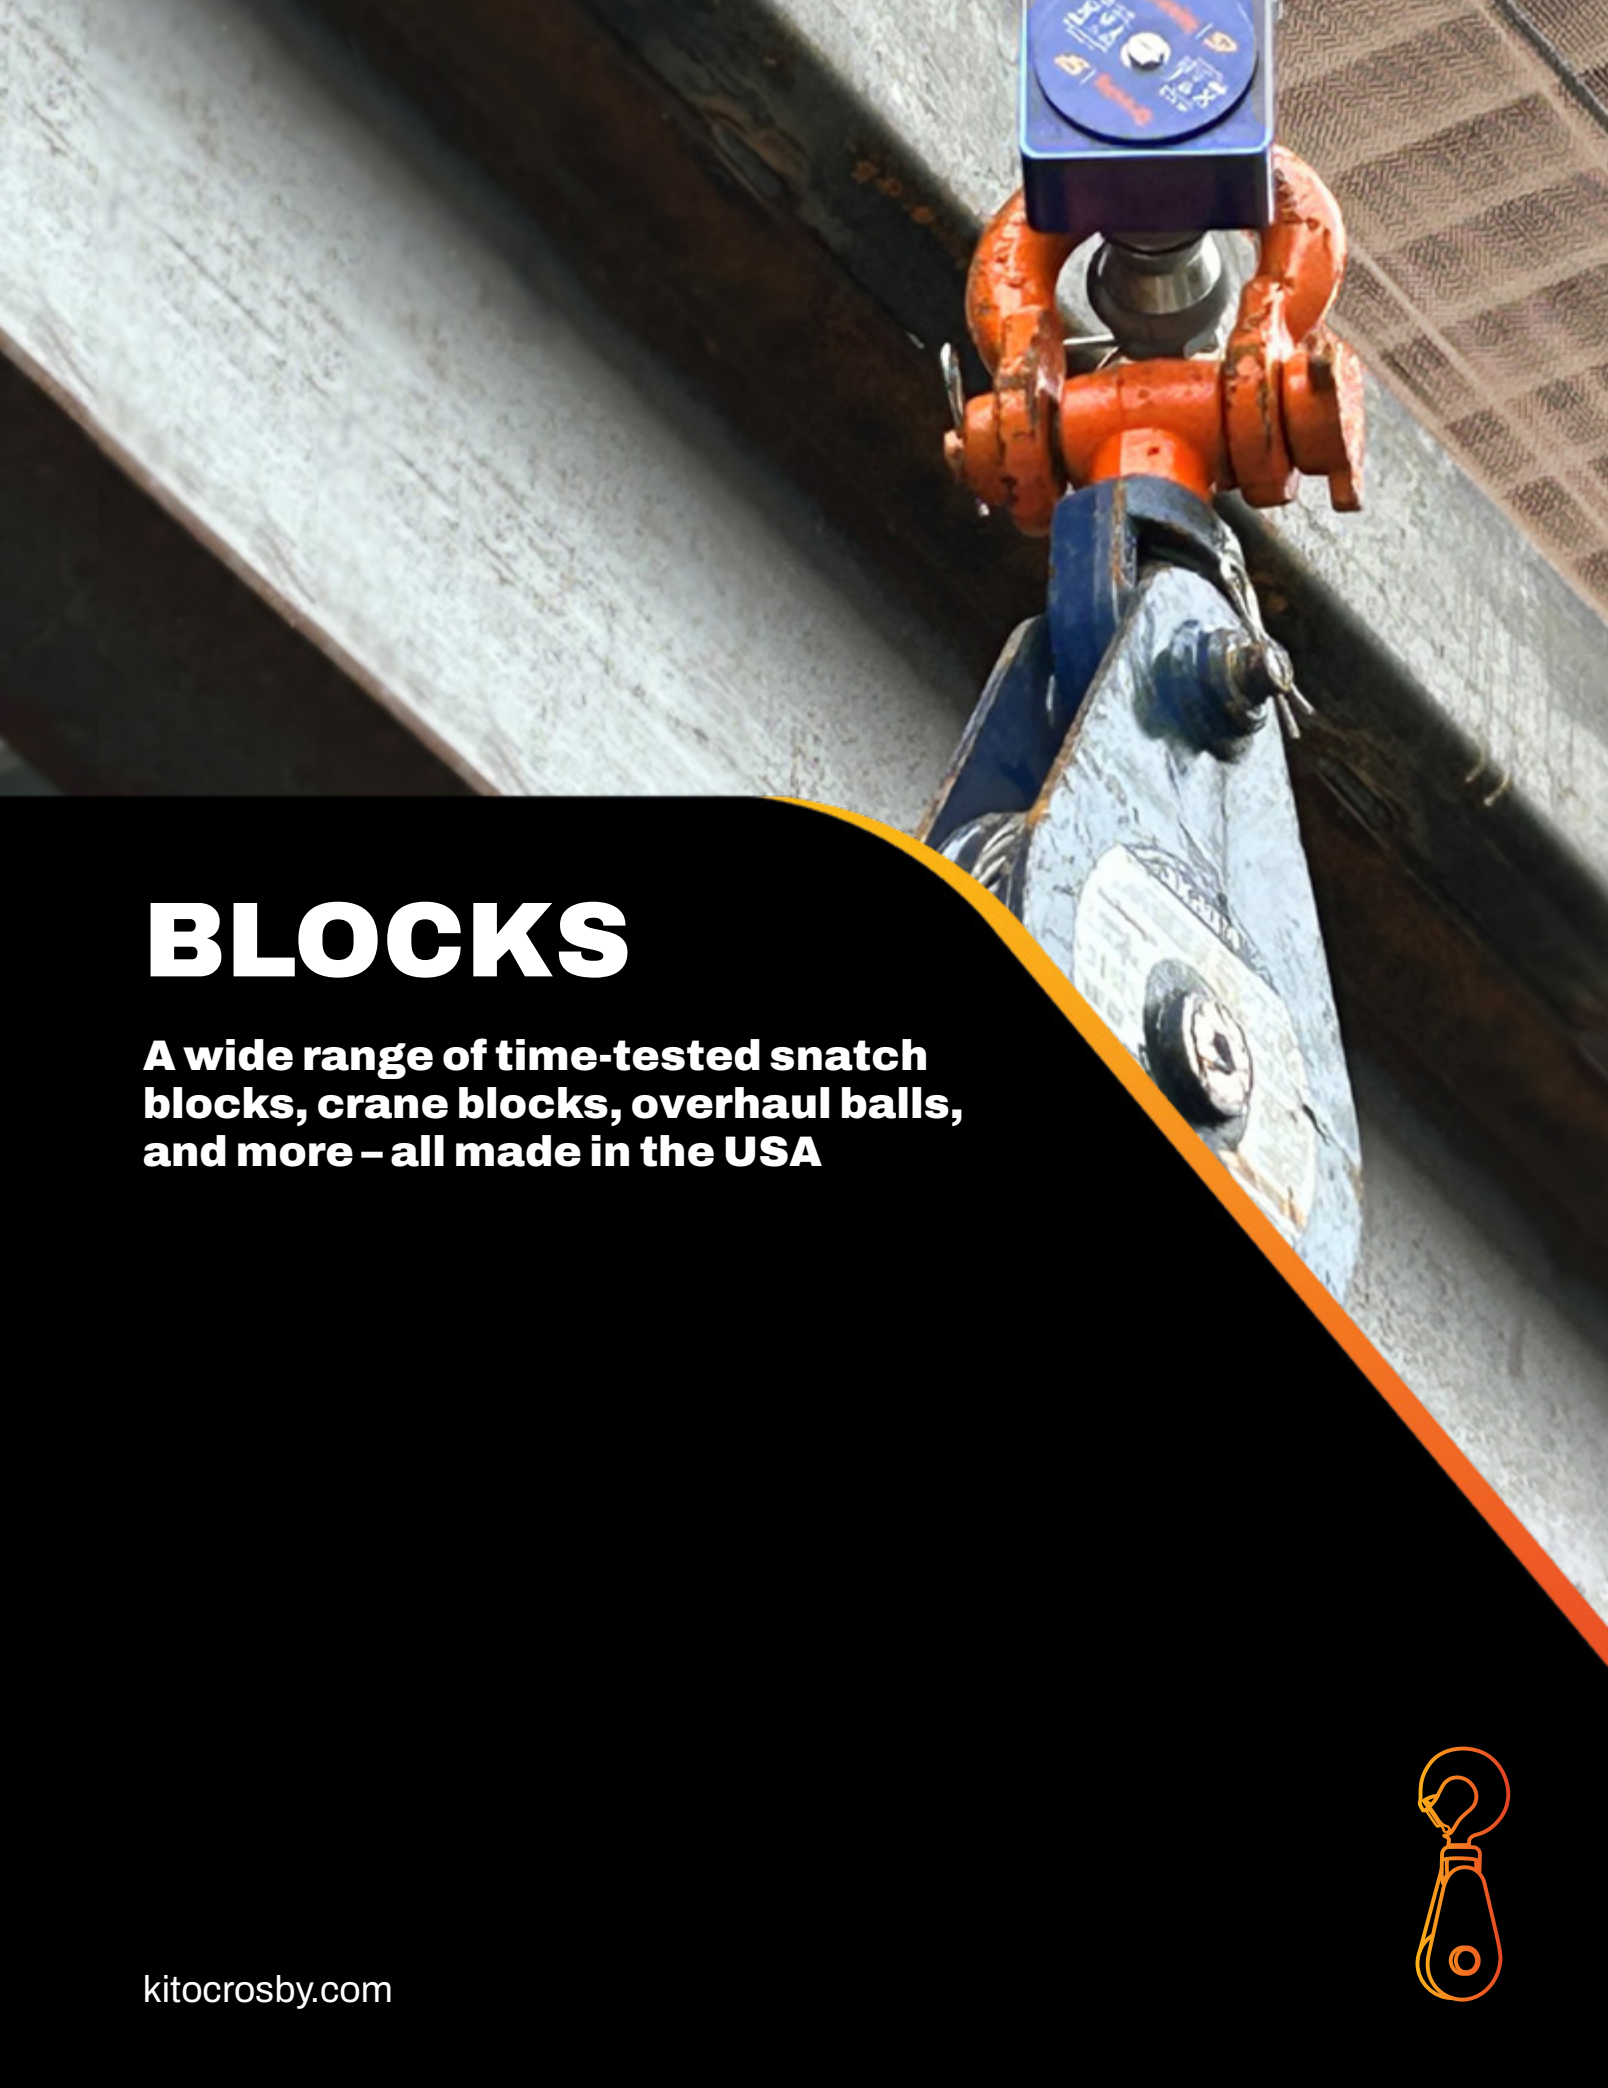

BLOCKS

A wide range of time-tested snatch blocks, crane blocks, overhaul balls, and more – all made in the USA



IMPORTANT CONSIDERATIONS

Some of the most important considerations in your block requirements are:

Available bearing types



Bronze Bushed
SAE 660 bronze with
figure 8 oil groove



Double Row
Sealed Tapered
Roller Bearing



Straight Roller
Bearing



Full Complement
Cylindrical Roller
Bearing

The sheave

In the image on the right, note the groove form with proper line support and gently rounded lips to prevent line chafing when fleet angles are present.

The sheave cross-section is machined in the image to the right, and the dense martensitic structure is clearly outlined by the etching.

This flame-hardened surface in the wear area of the sheave always presents a smooth, uncorrugated, proper size groove – face to the line. Sheaves 14" (356 mm) diameter and larger are flame hardened in groove to minimum 35 Rockwell C.

Smaller sheaves can be flame hardened on special order.



Unretouched photograph
of a section cut from a flame-
hardened McKissick sheave
(etched 2-1/2 minutes)

Additional connections

All crane and construction blocks can be furnished with:



Swivel shackle in selected
capacities with bronze thrust
or roller thrust bearing



Single hook in capacities to
300 metric tons



Duplex swivel hook in stan-
dard
capacities up to 1,000 metric
tons (larger sizes available)



Quad swivel hook from 200
Metric tons and larger

ORDERING INSTRUCTIONS

The following information should be specified when ordering blocks and sheaves:

Blocks

- Wire rope diameter
- Working Load Limit
- Number of sheaves
- Minimum overhaul weight
- Sheave diameter
- Hook or shackle fittings
- Type of bearing: bronze bushed (BB), roller (RB), tapered roller (TB)

All crane and some construction blocks are available as shown or with swivel shackle assembly, duplex swivel hook assembly, or quadruple hook assembly. Various combinations of bearing assemblies can be furnished, such as bronze bushed sheaves and swivel hooks, roller or tapered roller bearing sheaves and hook assemblies, or a combination of bronze, roller, or tapered roller bearings.

Sheaves

- Wire rope diameter
- Sheave OD
- Shaft or bore size
- Bearing type or blain bore
- Hub width & rim width
- Stock number (if known)
- Special machine features
- Special finishes

If hub or rim dimensions necessitate a dimension other than those shown in this catalog, please contact Kito Crosby for minimums and maximums. Tapered roller bearing sheaves show width over bearing cones, which cannot be altered. Price and delivery for your special needs, if not shown, are available upon request.

380 Series Hook Blocks




- Wide range of products available:
 - 5 to 300 short Tons capacity
 - 10" to 30" sheave diameter
 - 7/16" to 1-3/8" wire rope diameter
 - Larger capacity blocks available
- All 380 Blocks are furnished standard with roller bearings.
- Reeving Guide Standard – all models.
- Blocks through 25 short Tons use 319N style hooks with S-4320 latches.
- Sheaves lubrication through center pin - separate lube channel to each bearing.
- Sheave fully protected by side plates.
- Dual action hook (swings and rotates).
- Repair parts available through worldwide distribution network.
- Design Factor of 4:1 (unless otherwise noted).
- All 380 blocks 16" and larger are furnished with McKissick® roll-forged sheaves with flame-hardened grooves.
- Marked in short tons unless metric tag requested at time of order.
- Scrap Handling version of this block available upon request.
- Look for the orange hook...the mark of genuine McKissick® quality.



APPLICATION AND WARNING INFORMATION
SECTION 17

OPTIONS AVAILABLE

- Bronze Bushed Sheaves
- Duplex Hooks
- Swivel Tee and Shackle Assemblies
- Sheave Shrouds
- Anti Rotation Hook - Locking Device
- Plate Steel Cheek Weights
- Third party testing with Certification available upon request.

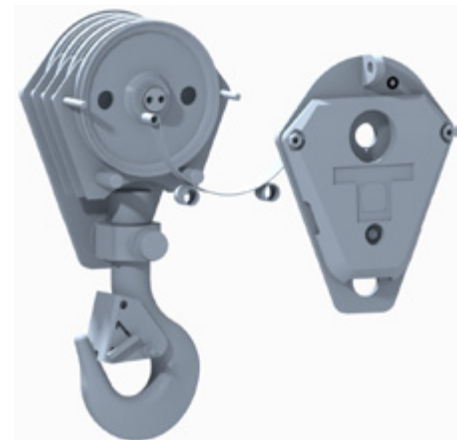

Minimized height, for maximum head-room. Traditional guards/guides facilitate reeving without a fitting.

The patented McKissick® Split-Nut® is the standard retention system for standard crane blocks up to 100 Tons.

For standard & custom block orders contact our Block Hotline at 800-727-1555 or visit thecrosbygroup.com/engineeredolutions for more information.

McKissick® Utility Crane Blocks

To see the legacy dimensional tables for McKissick® 380 Series Blocks, visit kitocrosby.com/tables

		SHV OD (in)	Capacity in short Tons																												
			5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	90	100	115	125	130	140	150	165	200	225	250	275	300
1 SHV	10																														
	12																														
	14																														
	16																														
	18																														
	20																														
	24																														
2 SHV	10																														
	12																														
	14																														
	16																														
	18																														
	20																														
	24																														
3 SHV	10																														
	12																														
	14																														
	16																														
	18																														
	20																														
	24																														
4 SHV	10																														
	12																														
	14																														
	16																														
	18																														
	20																														
	24																														
5 SHV	14																														
	16																														
	18																														
	20																														
	24																														
6 SHV	30																														
	14																														
	16																														
	18																														
	20																														
7 SHV	24																														
	30																														
	8 SHV	30																													

Review the table above to see all standard configurations available. We have also engineered thousands of special crane blocks, so it is very likely that we have the ideal solution to your rigging application. Visit kitocrosby.com/engineeredolutions to learn more.

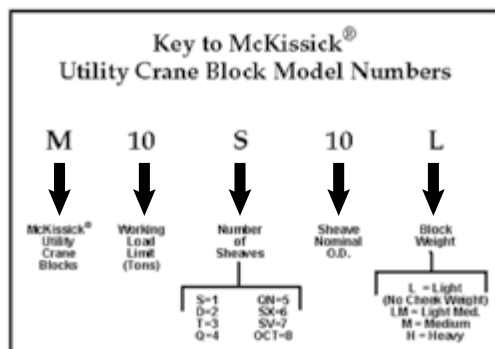


Table 1 - Standard Wireline Sizes For McKissick 380 Utility Crane Blocks											
Sheave Diameter (in)	Wireline Size (in)										
	7/16	1/2	9/16	5/8	3/4	7/8	1	1 1/8	1 1/4	1 3/8	
10											
12											
14											
16											
18											
20											
24											
30											

*For additional wireline sizes, please call 800-777-1555.

380 Series Easy Reeve® Hook Blocks



**380 Series
Easy Reeve®
Hook Block**

- Wide range of products available:
 - 5 to 80 short Tons capacity
 - 10" to 20" sheave diameter
 - 7/16" to 1-1/4" wire rope diameter
 - Larger capacity blocks available
- All single point shank hooks are genuine Crosby®, forged alloy steel, Quenched & Tempered, and have the patented QUIC-CHECK® markings (Duplex hooks are available on most sizes).
- Design factor of 4:1 (unless otherwise noted).
- All Easy Reeve® Blocks are furnished standard with roller bearings.
- Reeing Guides Standard – All Models.
- Blocks through 25 short Tons use 319N hooks with S-4320 latches.
- Heavy duty positive locking (PL) latch – Models: 30 short Tons and larger.
- Sheave lubrication through center pin - separate lube channel to each bearing.
- Sheaves fully protected by side plates.
- Dual action hook (swings and rotates).
- Repair parts available through worldwide distribution network.
- All Easy Reeve® blocks 16" and larger are furnished with McKissick® Roll-Forged sheaves with flame hardened grooves.
- Manufactured by an ISO 9001 and API Q1 certified facility.
- Marked in short tons unless metric tag requested at time of order.
- Scrap Handling version of this block available upon request.
- Look for the orange hook...the mark of genuine McKissick® quality.



APPLICATION AND WARNING INFORMATION
SECTION 17

Center "Dead End" to promote better block travel under various reeing configurations.

The patented McKissick® Split-Nut® is the standard retention system for standard crane blocks up to 90 tonnes.

Sheave Guards that open to allow block reeing without removing the rope end fitting.



Flat Bottom side plate for self standing during reeing process.


For standard & custom block orders contact our Block Hotline at: 800-727-1555 or visit kitocrosby.com/engineeredolutions for more information.

McKissick® Easy Reeve® Crane Blocks

To see the legacy dimensional tables for McKissick® 380 Series Easy Reeve® Blocks, visit kitocrosby.com/tables

	SHV OD (in)	Capacity in short Tons															
		5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80
1 SHV	10																
	12																
	14																
	16																
	18																
	20																
	28																
	30																
2 SHV	10																
	12																
	14																
	16																
	18																
3 SHV	10																
	12																
	14																
	16																
	18																
	20																
	30																
4 SHV	12																
	14																
	16																
	18																
5 SHV	14																
	16																
	18																
	20																

Review the table above to see all standard configurations available. We have also engineered thousands of special crane blocks, so it is very likely that we have the ideal solution to your rigging application. Visit kitocrosby.com/engineeredolutions to learn more.

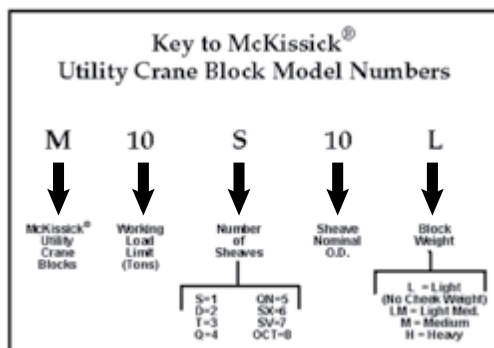

Sheave Diameter (in)	Wireline Size (in)									
	7/16	1/2	9/16	5/8	3/4	7/8	1	1 1/8	1 1/4	1 3/8
10										
12										
14										
16										
18										
20										
24										
30										

*For additional wireline sizes, please call 800-777-1555.


INNOVATIVE RETENTION SYSTEM MAKES INSPECTION EASIER

Crane block hook inspection
in four easy steps:

STEP 1 —
Remove protective
vinyl cover



STEP 2 —
Remove retaining
ring

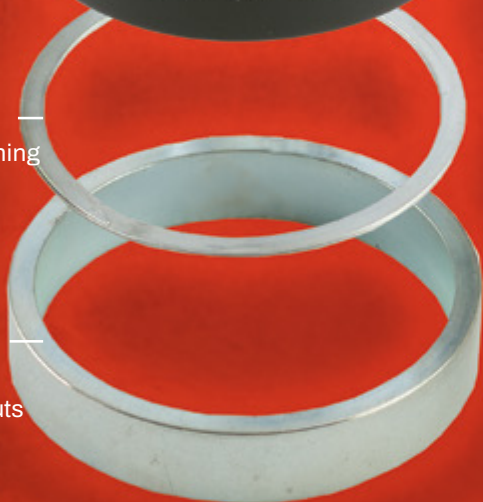

STEP 3 —
Slide keeper
ring off split nuts



STEP 4 —
Easily remove split
nut halves to inspect
shank hook

McKissick® Split-Nut® Retention System

Shank hooks on crane blocks must be inspected in accordance with applicable crane standards. These standards mandate the crane hook to be inspected for surface indications, damage, and corrosion, which could compromise the integrity of the crane block.

Because of the type of environments in which these hooks are required to perform, the removal of corroded nuts from the threads can become a problem during inspections. The innovative, patented* Split-Nut Retention System featured on McKissick crane blocks makes inspection easier. With four easy steps, the hook can be disassembled, inspected and put back into service in a fraction of the time of a conventional threaded nut.



The Split-Nut is standard equipment on McKissick Easy Reeve® crane blocks up to 90 tonnes.

- Allows for easy inspection, as required by ASME B30, CSA Z150, and other crane standards.
- Eliminates conventional threaded nut and problems associated with the nut removal for inspection.
- Allows repeated installation and removal without risk of damage to hook/nut interface.
- Zinc plated finish for corrosion resistance.
- Replacement hook and trunnion assemblies available for selected McKissick 380, or Easy Reeve & 790 blocks with threaded hooks.

The Split-Nut can be purchased in a variety of configurations that can be used to retrofit the following McKissick blocks in the field or in the shop:

- Over 90 tonnes and larger crane blocks (upon request)
- Bridge crane blocks
- 80 Series tubing blocks

In addition, the Split-Nut can be used to replace existing hooks on existing crane blocks currently in the field (most manufacturers' makes and models) and on special designed lifting equipment.

* US Patent 7,000,905 & 7,293,763

Crosby®

API 2C SYSTEMS

Block systems for offshore pedestal-mounted cranes certified to API 2C are considered critical components. Crosby McKissick blocks, overhaul balls, sheaves, button spelter sockets, and wedge sockets meet the compound requirements of API 2C.

It is the responsibility of the crane manufacturer to license or certify these components.

MCKISSICK® BLOCKS

Material traceability, chemistry reports, tensile test reports, magnetic particle inspection per ASTM E-709 on the following components:

Hook
Hook Nut
Trunnion
Center Pin
Side Plate
Sheave (no MPI on sheave)
Dead End

Charpy impact test reports per API 2C latest revision on the following components:

Hook
Hook Nut
Trunnion
Center Pin
Side Plate
Dead End



Sheave diameter based on D/d ratio based on pitch equal to a minimum of 18/1.
Weight plates produced from plate steel. Hook to rotate on thrust bearing with grease fitting.
Sheave bearing to be roller bearings with grease fitting. May be proof tested to 2x the rated Working Load Limit.

McKISSICK® OVERHAUL BALLS

Material traceability, chemistry, tensile test, magnetic particle inspection per ASTM E-709 on the following components:

Swivel Eye
Fixed Eye Nut
Swivel Base Plug
Case Pin
Hook Pin
Hook

Charpy impact test reports per API 2C latest revision on the following components:

Swivel Eye
Fixed Eye
Swivel Eye Nut
Swivel Base Plug
Case Pin
Hook Pin
Hook



Eye to rotate on thrust bearing with grease fitting.
May be proof tested to 2x the rated Working Load Limit.

McKISSICK® WEDGE SOCKETS

421 & 422 up to 1-1/4 in

Material traceability, chemistry, tensile test, magnetic particle inspection per ASTM E-709 on the following components:

Socket Body
Pin

Charpy impact test reports per API 2C latest revision on the following components:

Socket Body
Pin



680 Series Construction Blocks



680 Construction Block with shackle



680 Construction Block with hanger




680 Construction Block bolt only

APPLICATION AND WARNING INFORMATION
SECTION 17

- Wide range of products available:
 - 5 to 100 short Tons capacity
 - 6" to 24" sheave diameter
 - 3/8" to 1-1/4" wire rope diameter
 - Larger capacity blocks available
- Equipped with genuine Crosby® forged steel Quenched & Tempered shackles that contain the patented QUIC-CHECK® markings.
- Design Factor of 4:1.
- All 680 Series Blocks are furnished standard with bronze bushings.
- All 680 Series Blocks 16" and larger, are furnished with McKissick® roll-forged sheaves with flame-hardened grooves.
- Sheaves are lubricated through center pin with a separate lube channel to each bearing.

- Single sheave blocks have thimble dead end.
- Manufactured by an ISO 9001 and API Q1 Certified facility.
- Marked in short tons unless metric tag requested at time of order.
- Meets or exceeds all requirements of ASME B30.26. Importantly, these blocks meet other critical performance requirements including fatigue life, impact properties and material traceability, not addressed by ASME B30.26.

Block Loading Area

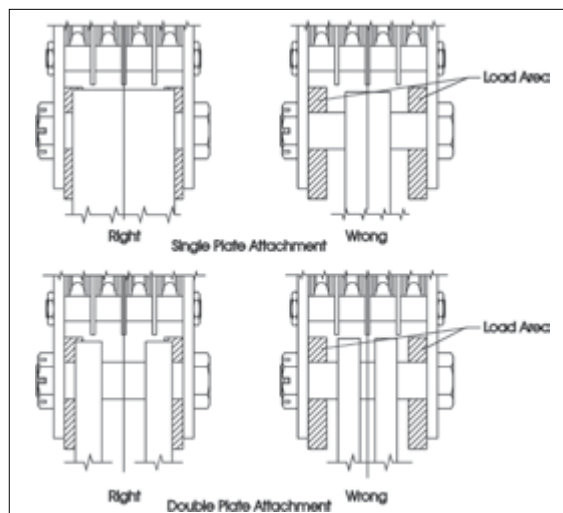

NOTE: The outside of attaching plates must be within the indicated load areas. Means must be provided to keep attaching plates equally spaced from the block side plates. For dimension information, including the load area, visit kitocrosby.com/tables.

OPTIONS AVAILABLE


- Roller bearing sheaves
- Hanger and Bolt Only models available
- Third party testing with certification
- Galvanized finish – Most models

McKissick® Construction Blocks

To see the legacy dimensional tables for McKissick® 680 Series Construction Blocks, visit kitocrosby.com/tables

	OD (mm)	SHV OD (in)	Capacity in short Tons																	
			5	7.5	10	15	20	25	30	35	40	45	50	55	60	65	70	80	90	100
1 SHV	152	6																		
	203	8																		
	254	10																		
	305	12																		
	356	14																		
	457	18																		
2 SHV	152	6																		
	203	8																		
	254	10																		
	305	12																		
	356	14																		
	406	16																		
	457	18																		
	508	20																		
3 SHV	610	24																		
	152	6																		
	203	8																		
	254	10																		
	305	12																		
	356	14																		
	406	16																		
	457	18																		
	508	20																		
	610	24																		
4 SHV	203	8																		
	254	10																		
	305	12																		
	356	14																		
	406	16																		
	457	18																		
	508	20																		
	610	24																		
5 SHV	508	20																		
	610	24																		
6 SHV	508	20																		
	610	24																		

Review the table above to see all standard configurations available. We have also engineered thousands of special crane blocks, so it is very likely that we have the ideal solution to your rigging application. Visit kitocrosby.com/engineeredolutions to learn more.

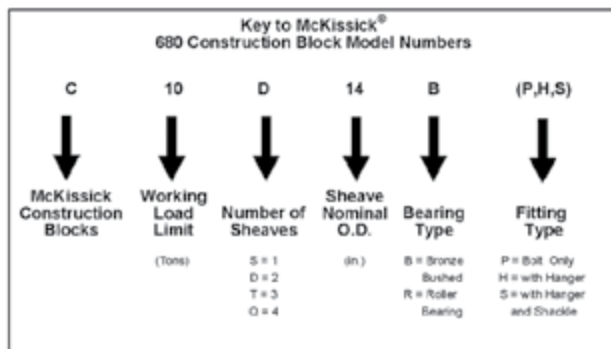

Sheave Diameter (mm)	Wireline Size (mm)							
	10	11	13	14	16	19	22	26
152								
203								
254								
305								
356								
406								
457								
508								
610								

70 Series Blocks



McKissick® Oilfield Tubing Blocks

- Manufactured in the USA to API-8C PSL-1 specifications with a minimum design temperature of -4°F (-20°C).
- The 70 Series has a spring loaded hook that is desirable for higher utilization and larger depths. The spring mitigates shock loadings and reduces wear on components.
- The 80 Series is not spring loaded and is desirable for shallow depths and rework.
- Utilizing the McKissick® revolutionary split nut retention system, these critical components:
- Are precision machined and individually fitted for maximum performance.
- Eliminate conventional threaded nut and potential problems associated with thread corrosion during regular maintenance.
- Equipped with a duplex hook for easy elevator operation which features:
- An eight position locking mechanism and rotates on a roller thrust bearing.
- Locking arms with self-retaining bolts to mitigate drop hazards.
- Available with optional 35 Ton rod hook clevis.
- McKissick® API-8C sheaves are roll-forged and come equipped with flame hardened grooves for exceptional groove life.
- Each sheave is individually lubricated from easily accessible lubrication fittings located on the center pin.
- Equipped with double row tapered roller bearings and seals.
- The E-Z opening roll guards facilitate the fastest possible exposure of sheave cluster for quick reeving and contain no bolts to pull out and lose.
- Engineered for short overall length, extra weight, excellent balance for fast non-wobbling falls.
- Completely streamlined exterior surfaces with no unnecessary projections minimize opportunities for interference during operations.

80 Series Blocks



Fatigue Resistant



Licensed Under
API Spec 8C-001

APPLICATION AND WARNING INFORMATION
SECTION 17

Standard Tubing Block Offerings								
	Series	Number of Sheaves	Block Capacity (Tons)	Sheave Diameter (in)	Nominal Wire Rope Size (in)			
					7/8	1	1-1/8	1-1/4
70 Series	72	2	75	24				
	73	3	75	20				
	73	3	125	24				
	73	3	175	30				
	74	4	175	30				
80 Series	82	2	75	24				
	83	3	75	20				
	83	3	125	24				
	83	3	175	30				
	84	4	125	24				
	84	4	175	30				



458

Guy Line Blocks

- Used on guy lines to gain mechanical advantage through rapid take-up, taking less pull to guy down.



459

APPLICATION AND WARNING INFORMATION
SECTION 17

Guy Line Blocks

Model No.	No. of Sheaves	Stock No.	Working Load Limit (short Tons)	Sheave Diameter (in)	Wire Rope Diameter (in)	Weight Each (lb)
458	1	171619	5	6	1/2	21
458H	1	239067	8	6	9/16 - 5/8	25
459	2	171637	10	6	1/2	28
459H	2	239076	12	6	9/16 - 5/8	31



731

Crown Blocks

- McKissick® Roll-Forged sheaves with flame hardened grooves.
- Double row pre-adjusted sealed tapered bearings mounted on a steel shaft.
- Heavy center and side plates for proper support of center pin.
- Pre-assembled units for rapid attachment to crown assembly for installation on derrick.
- On multiple sheave assemblies, one sheave can be grooved for sand line on request.
- Other sizes available upon request.
- Sheaves manufactured to API-8C specifications.


APPLICATION AND WARNING INFORMATION
SECTION 17


Crown Blocks

Sheave Diameter (in)	Model No.	Stock No.	No. of Sheaves	Working Load Limit (short Tons)	Wire Rope Diameter (in)	Weight Each (lb)
24	241	351158	1	15	7/8	200
24	242	351167	2	30	7/8	278
24	243	351176	3	45	7/8	375
24	731	351185	1	35	1	200
24	732	351194	2	75	1	350
24	733	351201	3	100	1	525
24	734	351210	4	125	1	720
30	741	351229	1	40	1-1/8	325
30	742	351238	2	80	1-1/8	560
30	743	351247	3	110	1-1/8	800
30	744	351256	4	140	1-1/8	982
30	745	351265	5	170	1-1/8	1163

ROPEBLOCK

CATALOG



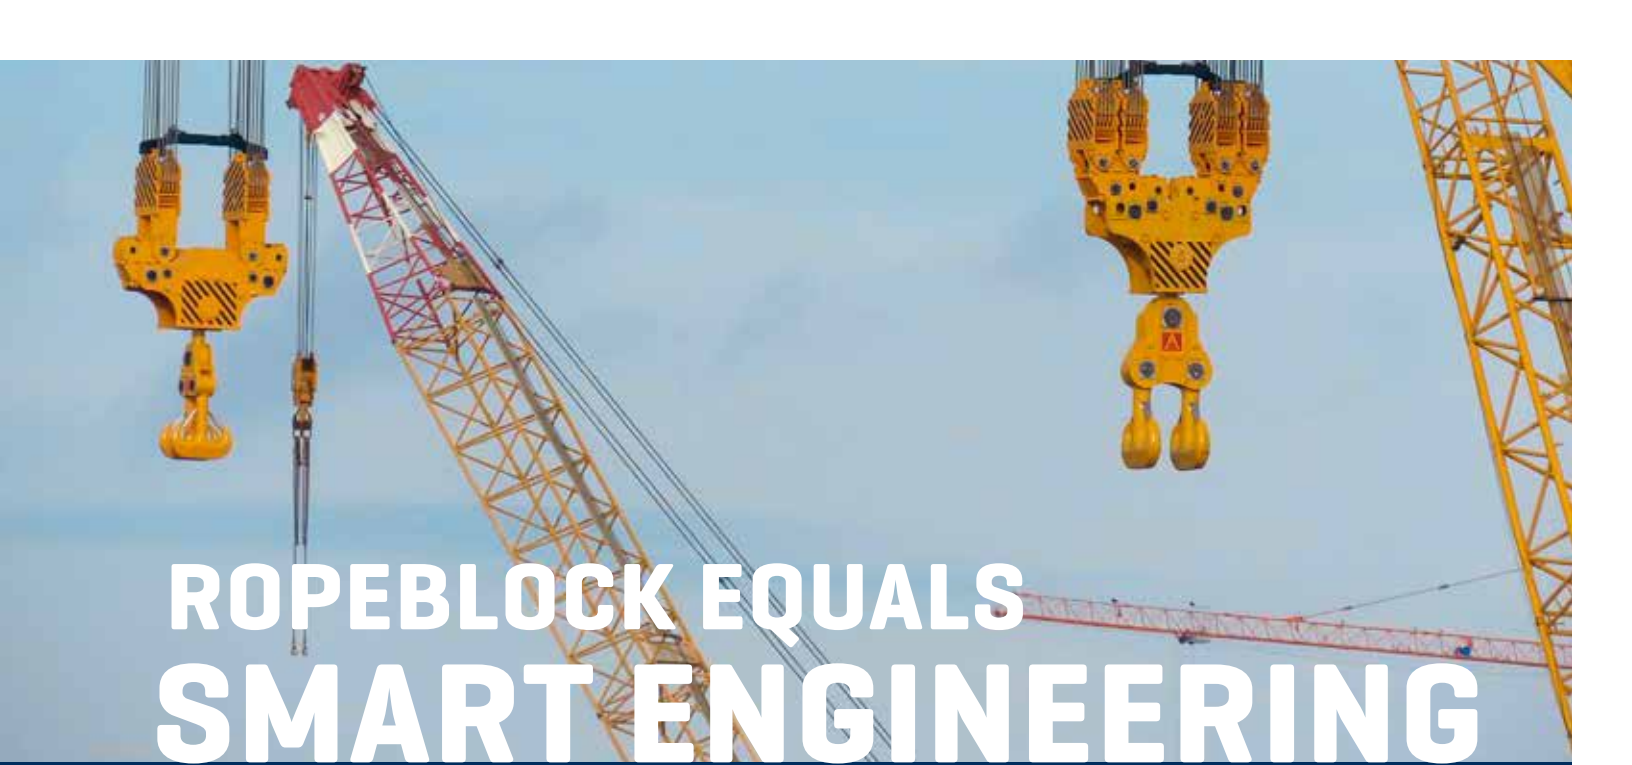

ROPEBLOCK EQUALS SMART ENGINEERING

Established in 1994, Ropeblock is a globally renowned developer and manufacturer of lifting and rigging hardware. We supply safe and high quality components to crane OEMs and end users worldwide. Our products are used in critical equipment such as mobile cranes, port cranes, ship cranes, offshore cranes and platforms, dredging equipment, pendant structures, mooring systems, and heavy industry applications. By providing a reliable interface between the wire rope and its load and efficiently guiding the rope through the crane system, Ropeblock products maximize operational safety as well as wire rope durability.

ENGINEERED FOR EFFICIENCY

Ropeblock products stand out by being engineered for efficiency, which is a matter of matching superior product design and (cost) efficient production. Mind you, our Smart Engineering philosophy goes way beyond actual engineering. It involves the entire process, including quality and safety, certification, and research & development. The fruits of Smart Engineering are often introduced in custom designed solutions. In turn, our standard components benefit as well, as any major innovations and improvements achieved are subsequently incorporated into the entire portfolio of Ropeblock products.

WE KNOW YOUR MARKET

Besides Smart Engineered products and solutions, Ropeblock's excellent reputation is due to thorough knowledge of the markets in which we operate. From construction to cargo handling, offshore to industry, our dedicated specialists know all about industry specific issues, requirements, trends and developments. This very knowledge helps them in putting customers and customer needs first - which is

another Ropeblock trademark. Besides direct sales to customers in our various target markets, Ropeblock products are available from numerous rigging and sling shops worldwide. These vendors are proud to carry Ropeblock catalog products, most of which are instantly available from large stocks.

**IN THIS CATALOG WE WILL TELL YOU ABOUT ROPEBLOCK,
AND INTRODUCE YOU TO OUR PORTFOLIO.**

**IF YOU HAVE ANY QUESTIONS, OUR STAFF WILL BE
GLAD TO BE OF SERVICE**



WHY CHOOSE ROPEBLOCK? MARKET LEADING DESIGNS

Ropeblock's design philosophy is primarily aimed at supplying low maintenance products that protect the wire rope and extend its lifetime. The implementation of this philosophy is restricted by the rules and regulations of different third parties and governmental institutions.

Our extensive knowledge in this domain has allowed us to come up with truly market leading designs appreciated by OEMs and end-users alike.

THE BENEFITS OF STANDARDIZATION

Wherever possible Ropeblock seeks to standardize its products. As a result, many of them can be used across applications. As an added benefit, lead times are relatively short.

CONSISTENT QUALITY

Consistent product quality is assured by Ropeblock's ISO 9001 QMS and a dedicated team of QA/QC professionals. Our efforts in this regard include elaborate in-house testing, especially where blocks and overhaul balls are concerned. Moreover, our manufacturing process has been approved by DNV GL, RMRS, BV, RINA and API Q1, with whom we are now in a Manufacturing Survey Arrangement.

FULL COMPLIANCE


Ropeblock products are state of the art designed following European machine directive 2006/42/EC and using relevant guidelines in EN, ISO, DIN or FEM standards, ASME B30.5, B30.10, B30.26 safety standards and e.g. federal specifications RR-S550D, RR-C-271. Ropeblock products adhere to standards and design rules (such as API 2C, API 8C, ABS, DNV, LRS, BV, GL, RINA, RS, etc.) as mentioned in the contract and/or drawings. With Ropeblock Design For Assembly (DFA) engineering principles they are the perfect choice for local regulations, stipulating hook and hook-nut should be dismantled, inspected and re-tested (proof loaded) every 4 or 5 years.

CERTIFICATES AND DOCUMENTATION

Ropeblock products can be supplied with any certification/ documentation you desire or require, such as declarations of compliance, manufacturer test certificates, material certificates, inspection reports and third party documents.

THE FINISHING TOUCH

An important requirement in the total scope of manufacturing is the finishing, or corrosion protection, of the products. Ropeblock has developed comprehensive finishing methods in accordance with ISO standards, which allows for flexible adaptation to segment specific requirements.

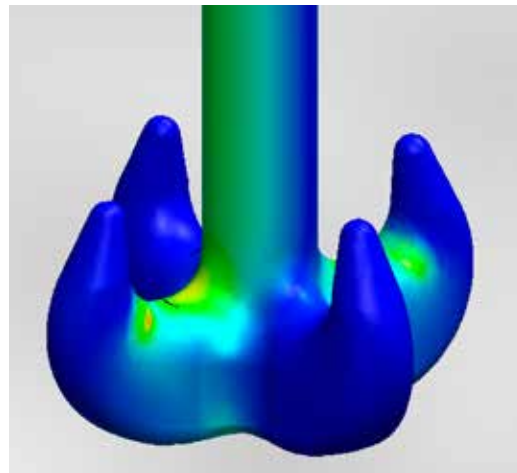



The Ropeblock Quality Management System is certified in accordance with ISO 9001:2015. Our manufacturing processes have been approved by DNV-GL, RMRS, BV, RINA and API Q1, resulting in a Manufacturing Survey Arrangement with these third parties. This, together with a dedicated team of QA/QC professionals, ensures a consistent quality of products and services.

and many more...

QUALITY & CERTIFICATES



QUALITY & CERTIFICATES

With Ropeblock Design For Assembly (DFA) engineering principles they are the perfect choice for local regulations, stipulating hook and hook-nut should be dismantled, inspected and re-tested (proof loaded) every 4 or 5 years.

Upon request, all blocks and swivels can be supplied with any of the following documents:


- QUALITY & CERTIFICATE

7

ROPEBLOCK R&D

THE HANDS-ON APPROACH

At Ropeblock, research & development is not an isolated department. Rather, it's an ongoing process that is integral to our Smart Engineering philosophy. Our constant aim is to fulfil customer needs by providing efficient, safe, durable, low-maintenance products and solutions, well thought-out from manufacturing through application. To achieve this, our engineers are always looking for ways to optimize current designs or come up with new ones that do an even better job. Our hands-on approach of R&D has led to success for both our customers and end users, while also yielding patented market leading designs. On these pages we present two examples of highly appreciated product optimizations that couldn't have been achieved without Ropeblock's signature R&D approach.

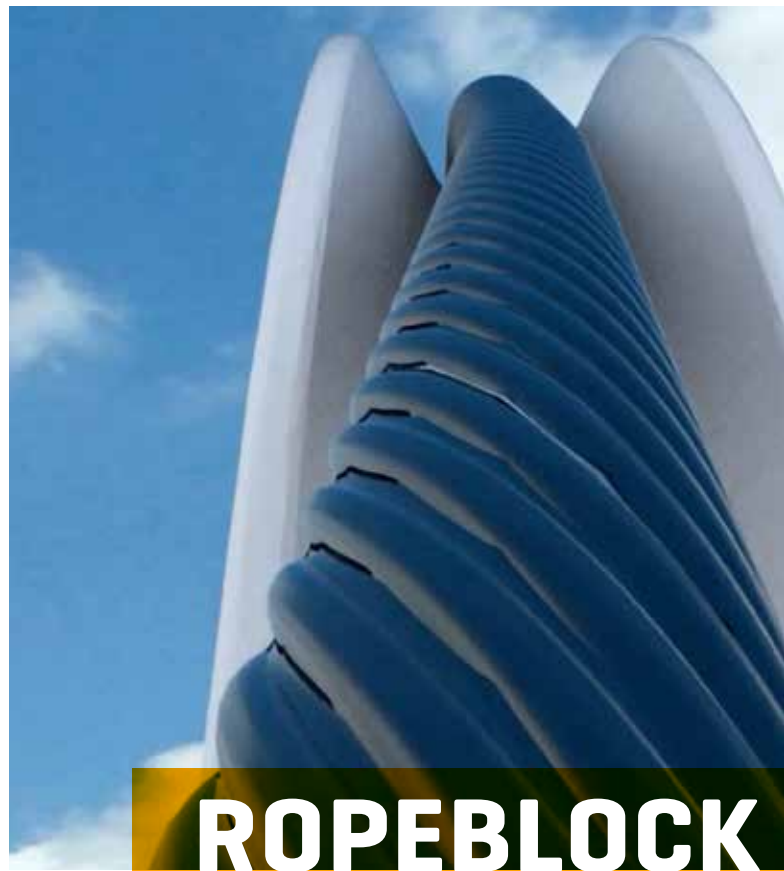


ROPEBLOCK ENGINEERED

In any type of crane system, a wire rope being bent over a sheave will lead to rope fatigue. Recent studies show that this particular type of fatigue is even more severe when the wire rope is in a twisted state. In such cases, the most commonly used rotation resistant ropes may see their longevity reduced by up to 70 percent. At Ropeblock, we took it upon ourselves to address this issue by developing a unique type of sheave.

FLEET ANGLES

One of the major causes of wire rope twist in crane applications is friction between the wire rope and the sheave.

This friction, in turn, is primarily caused by the angle of attack of the wire rope on the sheave groove (a phenomenon also known as fleet angles). Under tension, the end of a wire rope will rotate when free (e.g. with a swivel). However, such rotation



CAST SHEAVES FOR DURABILITY

is not possible when the wire rope is fixed directly to the crane. The additional twist resulting from fleet angles then generates extra torsion. When the accumulated twist in the crane system is released between the tip of the crane and the lower block, block rotation may eventually ensue.


CHOOSING THE OPTIMUM MATERIAL

The degree of friction in crane systems largely depends on the type of sheave used. Plastic sheaves, especially, are known to cause above-average friction, hence, more twist. Consequently, after meticulous R&D, Ropeblock introduced a unique type of cast sheave. It ensures optimum interaction with the wire rope, resulting in significant friction reduction and record amounts of Cycle Bends Over Sheave (CBOS) in any application.

GRAPHITE LUBRICATION

The secret of the Ropeblock cast sheave is dry graphite lubrication, which works in a way similar to bronze bearings with graphite nodes. By making the wire rope slide rather than twisting it, Ropeblock sheaves substantially lower the friction coefficient. Once the rope and groove are properly run in, wear is reduced


to practically zero. What's more, improved sheave ductility provides better resistance against impact or unintended blows against objects, while the material grain makes sheaves more crack-resistant. As an added benefit when operating in extreme circumstances, Ropeblock graphite sheaves have a better than average low temperature performance, allowing service down to even $-40^{\circ}\text{C}/-40^{\circ}\text{F}$.

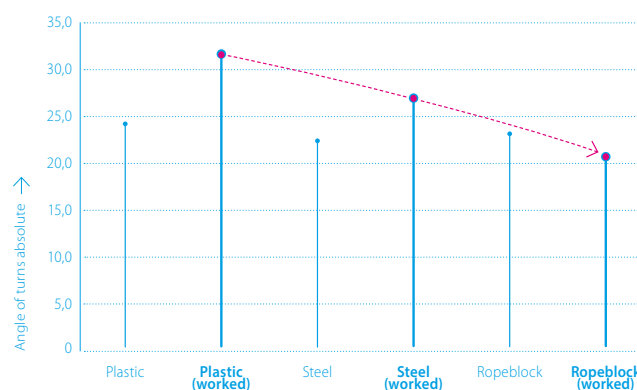

LONGER LASTING

Research in a lab environment proved that by minimizing wire rope twist Ropeblock sheaves make wire rope last up to 40 percent longer when compared to the same size and geometry plastic sheaves. When compared to regular steel sheaves of the same size and geometry, Ropeblock sheaves perform better by 25 percent. All in all, Ropeblock sheaves make crane systems safer, improve uptime and optimize cost effectiveness. They come in hundreds of different bearing and D/d sizes, ranging from wire rope 10 mm to 76 mm and beyond, and are accepted by all major classification societies.



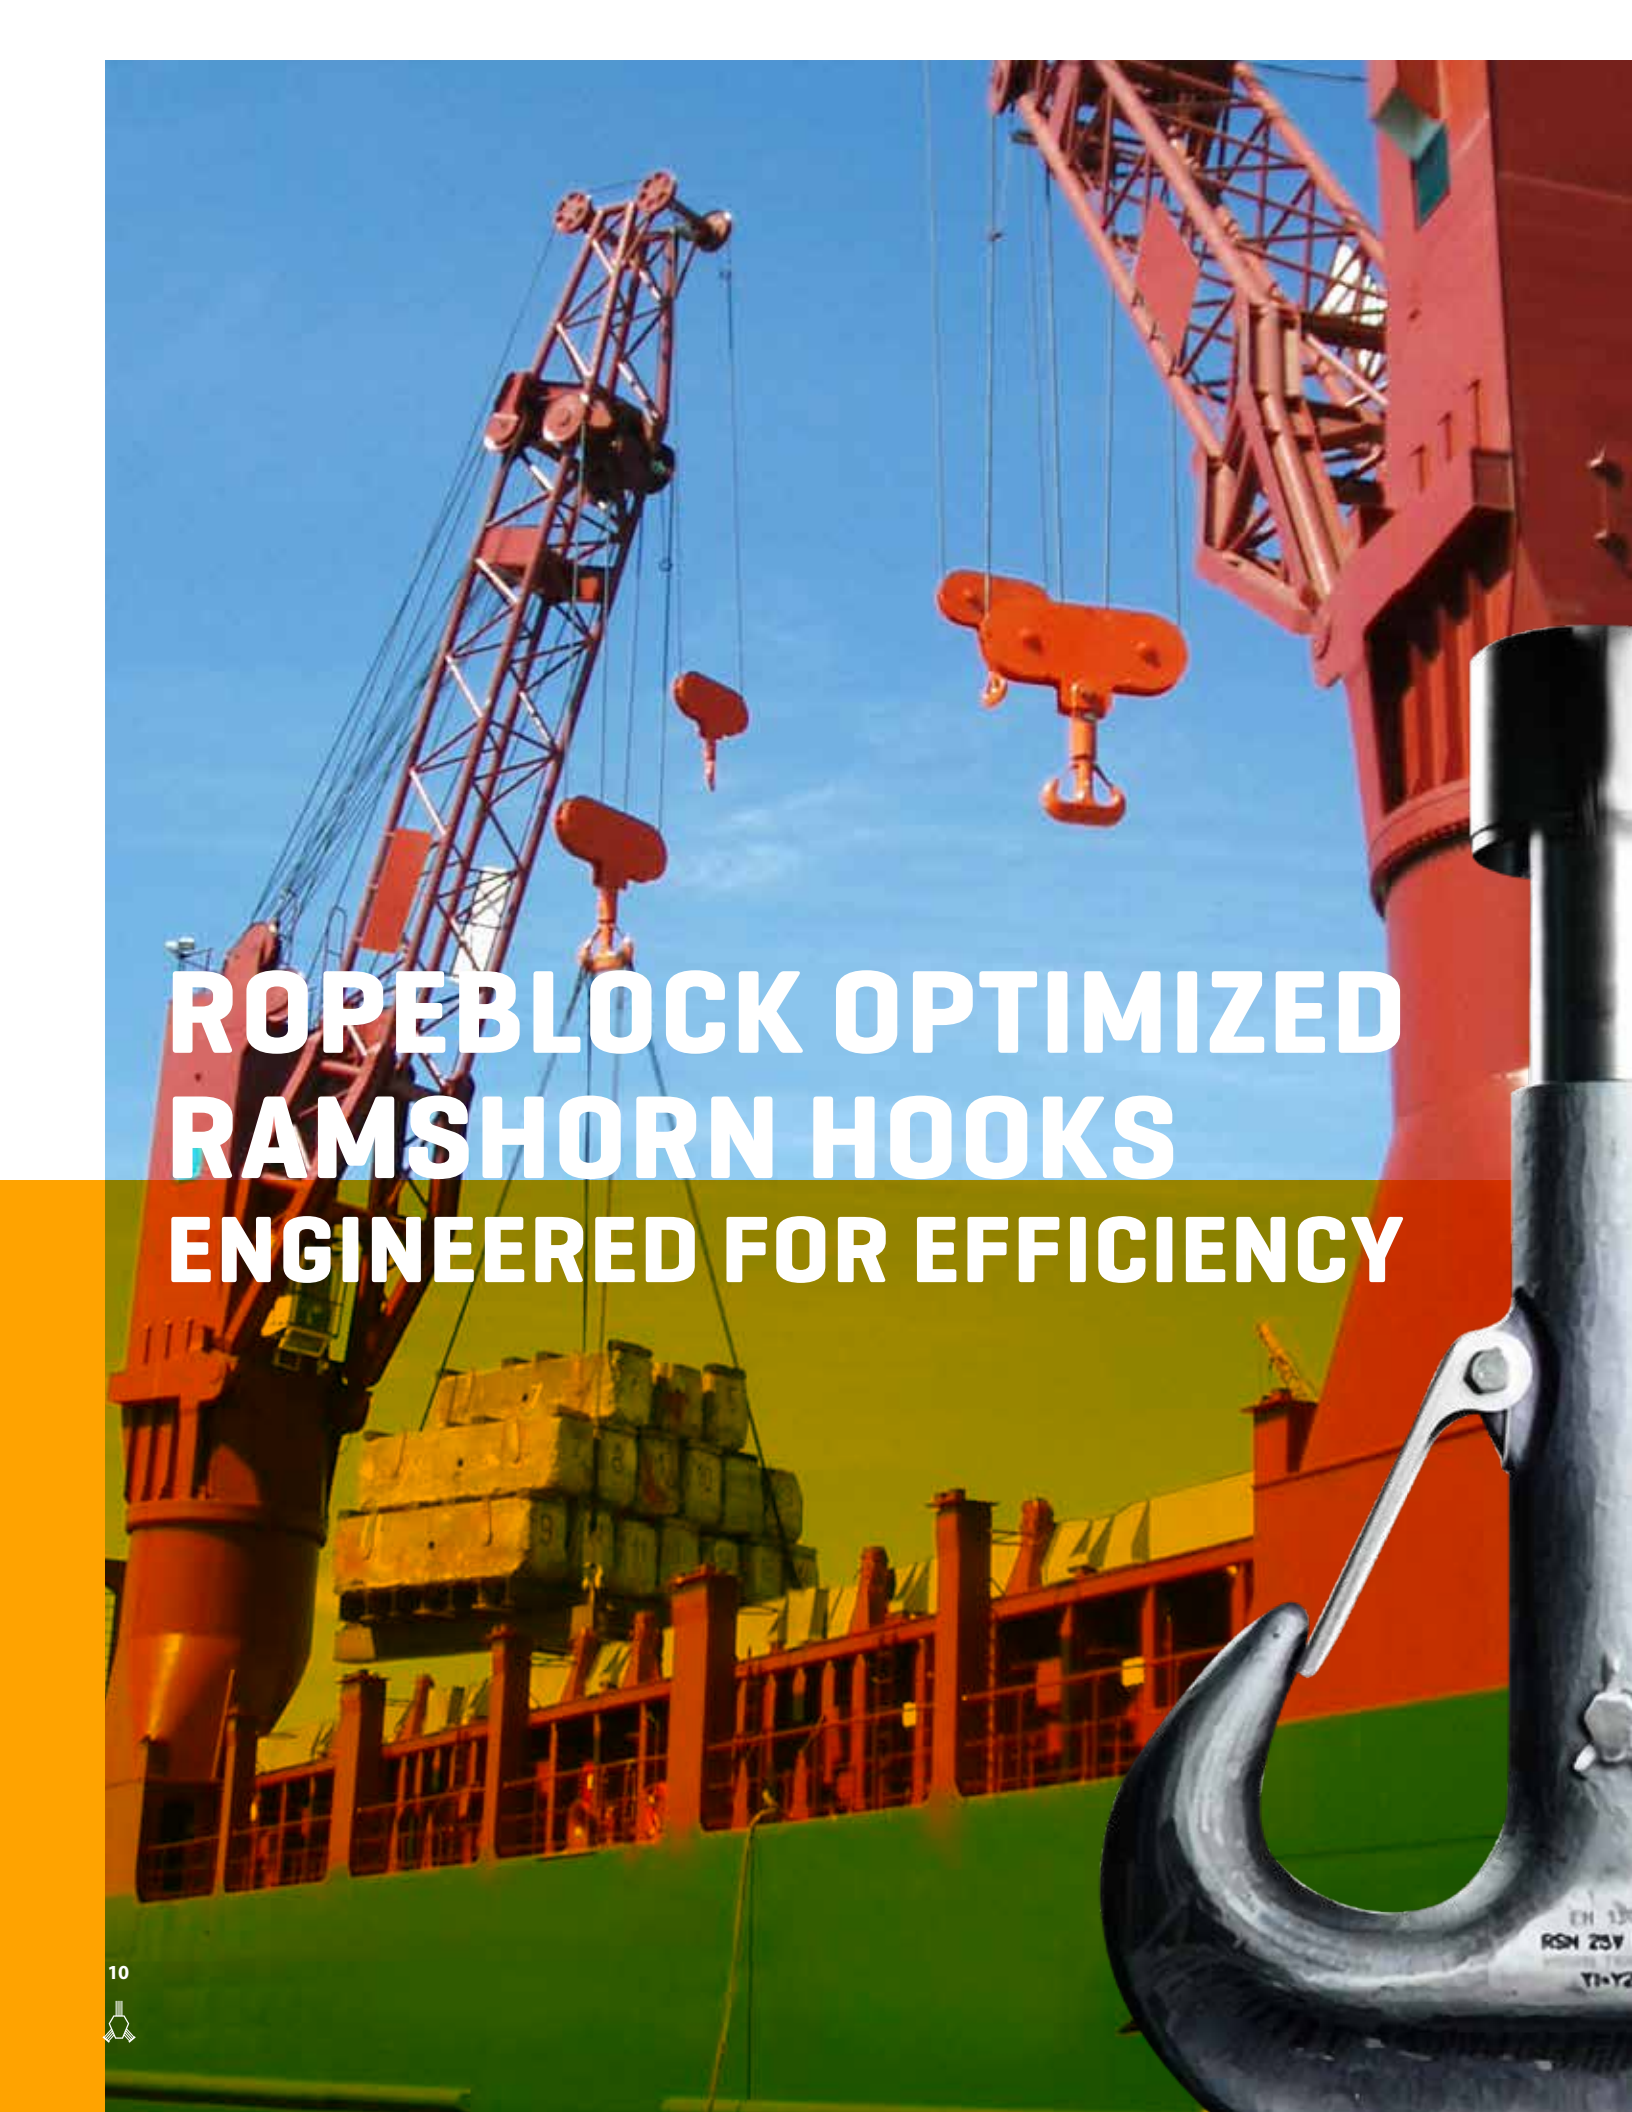

ROPEBLOCK OPTIMIZED RAMSHORN HOOKS ENGINEERED FOR EFFICIENCY


Crane blocks and lifting hooks are often used in applications that include soft eye and steel wire rope slings and grommets.

The capacity of these slings and grommets largely depends on the bending radius on the hook saddle. The sharper the edge, the lower the capacity. Oversized slings/grommets need to be selected to meet the required load and wear will arise on the bending spots.

INCREASED BENDING RADIUS

To remedy this, Ropeblock developed a new generation of ramshorn hooks featuring a significantly larger bending radius in the sling zone. The increased bending radius improves the working efficiency of slings and grommets. The resulting wear reduction translates into improved endurance, while capacity is less compromised.

WIRE ROPE BENDING RADIUS

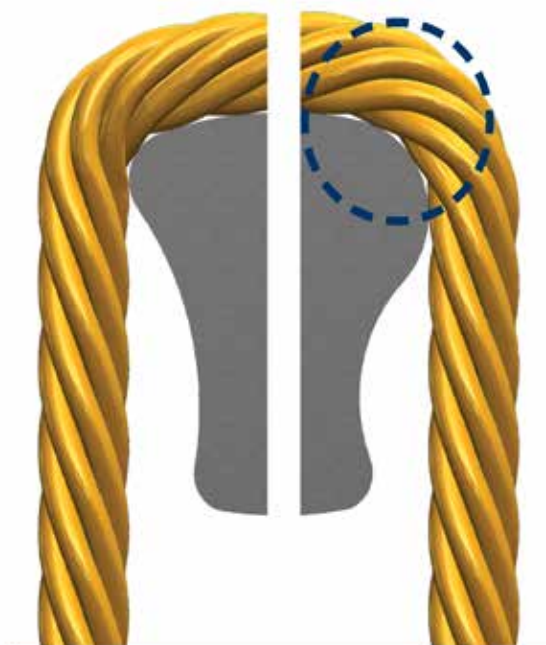


STANDARD SHAPE

ROPEBLOCK
OPTIMIZED SHAPE

EN AND DIN COMPLIANT

Whereas the new geometry makes the hook body exceed EN and DIN standards (including EN13001-3-5), the shape still allows the hooks to work with traditional hardware. All in all this is the safe choice for any application. The new improved ramshorn hooks are available in the medium and larger capacity range (sizes 16 and up) where grommets and soft-eye slings are used along with traditional hardware.



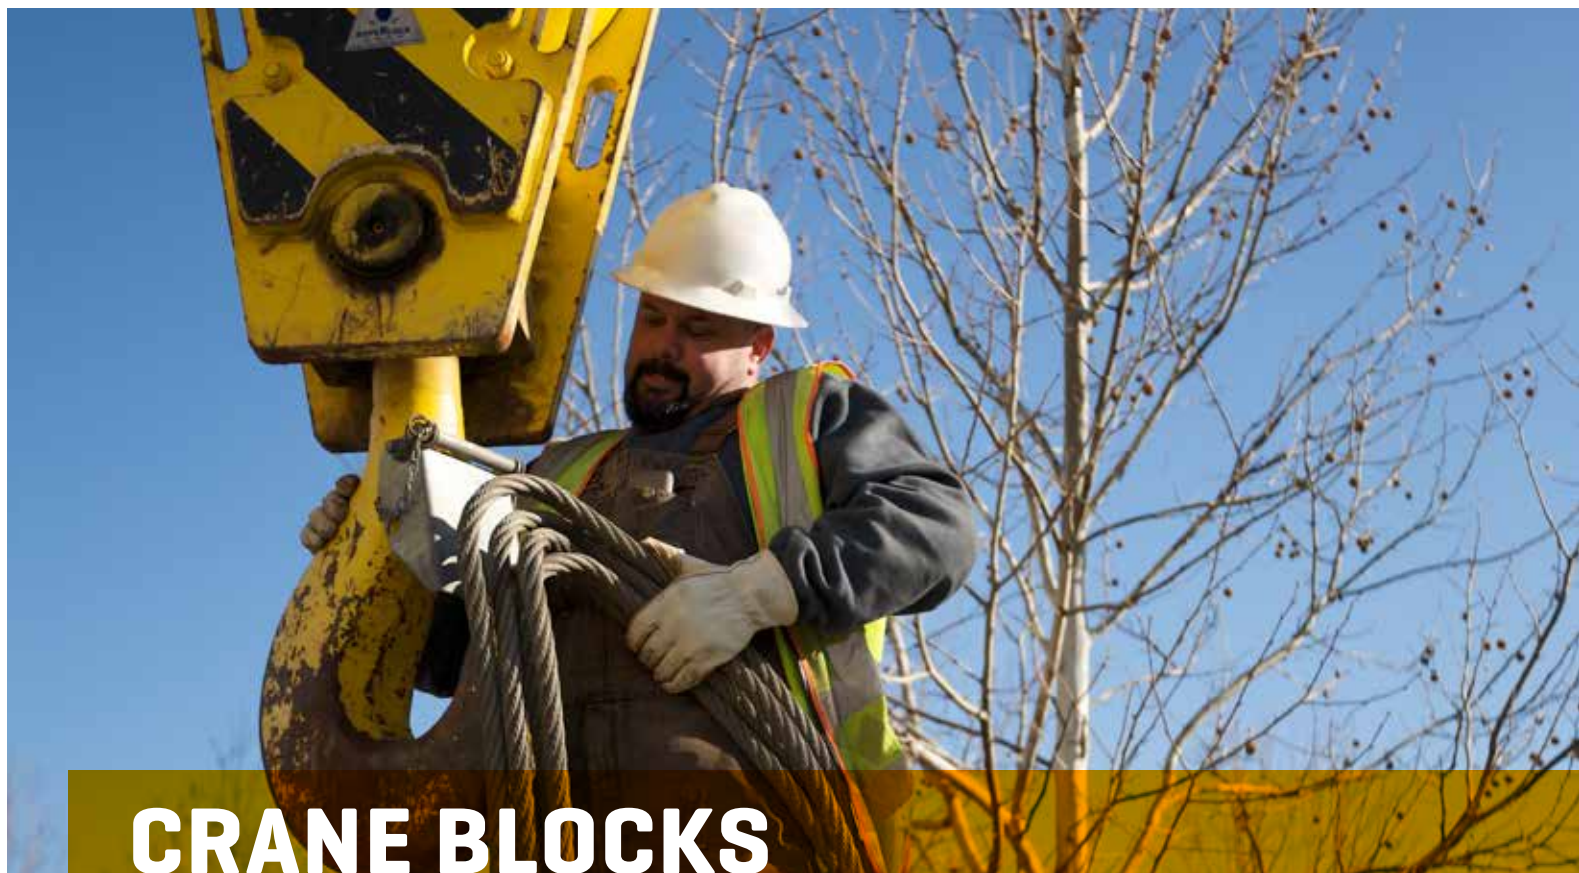

CRANE BLOCKS & OVERHAUL BALLS

The Ropeblock portfolio includes a wide range of crane blocks with proven quality assured by a track record spanning 25 years. They feature superb finishing and a high degree of flexibility in terms of, e.g., possible weights and wire rope diameters, and hook interchangeability.

- Components include Ropeblock cast sheaves with maintenance free bearings.
- Axial cylindrical roller bearings minimise rotational resistance of the hook.
- Spare parts are readily available from stock.

RECOMMENDED FINISH

Segment / application	ISO 12944 classification	Classification description	Expected protection duration	DFT (µm)
Construction	C2M	Slightly polluted atmosphere, predominately agriculture areas	5 to 15 year	120
Construction	C3M	Industrial and residential air pollution levels, with an average sulfurdioxide (IV) contamination level. Coastal areas with low salt content in air	2 to 5 year	120
Construction	C3M	Industrial and residential air pollution levels, with an average sulfurdioxide (IV) contamination level. Coastal areas with low salt content in air	5 to 15 year	160
Cargo handling	C3M	Industrial and residential air pollution levels, with an average sulfurdioxide (IV) contamination level. Coastal areas with low salt content in air	5 to 15 year	160
Cargo handling	C4H	Industrial areas and coastal areas with average salt content in air	more than 15 year	280
Cargo handling	C5-MM	Coastal areas and open sea with high salt content in air	5 to 15 year	280
Offshore	C4H	Industrial areas and coastal areas with average salt content in air	more than 15 year	300
Offshore	C5-MM	Coastal areas and open sea with high salt content in air	5 to 15 year	300
Offshore	C5-MH	Coastal areas and open sea with high salt content in air	more than 15 year	320
Offshore	NORSOK sys. 1*	Open sea with high salt content in air	more than 15 year	300



CONSTRUCTION SPECIFIC BLOCKS

FAST REEVE CRANE BLOCKS


Ropeblock Fast Reeve Crane Blocks are suitable for use on a wide variety of mobile cranes, crawler cranes and other land-based cranes. These blocks are an excellent choice for lifting applications requiring frequent block change.


Standard features include:

- Design factor: 4:1
- Design acc. ASME B30.5, B30.10, B30.26
- Double-sealed maintenance-free roller bearings
- Forged high tensile steel EN/DIN hooks
- Cast sheaves featuring graphite lubricated groove
- High impact-resistant side plates
- Operational temperature range: -40 up to +80°C / -40 up to +176°F
- Lubrication on hook suspension
- 4 or 8 point hook locking device
- Fast reeve guides for fast reeving
- C3M finish in signal yellow with black striping
- Safety latch with locking pin

PLEASE CONTACT US FOR MORE DETAILS

THE ANATOMY OF A ROPEBLOCK CRANE BLOCK PRODUCT NUMBER

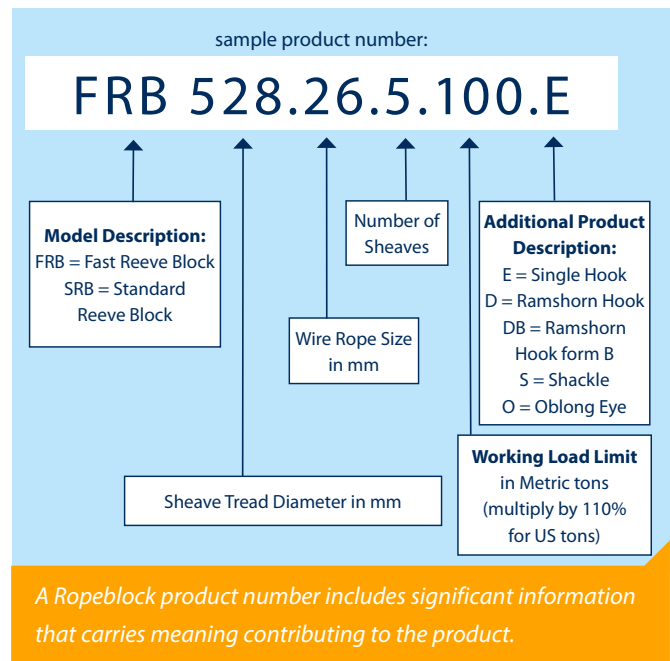

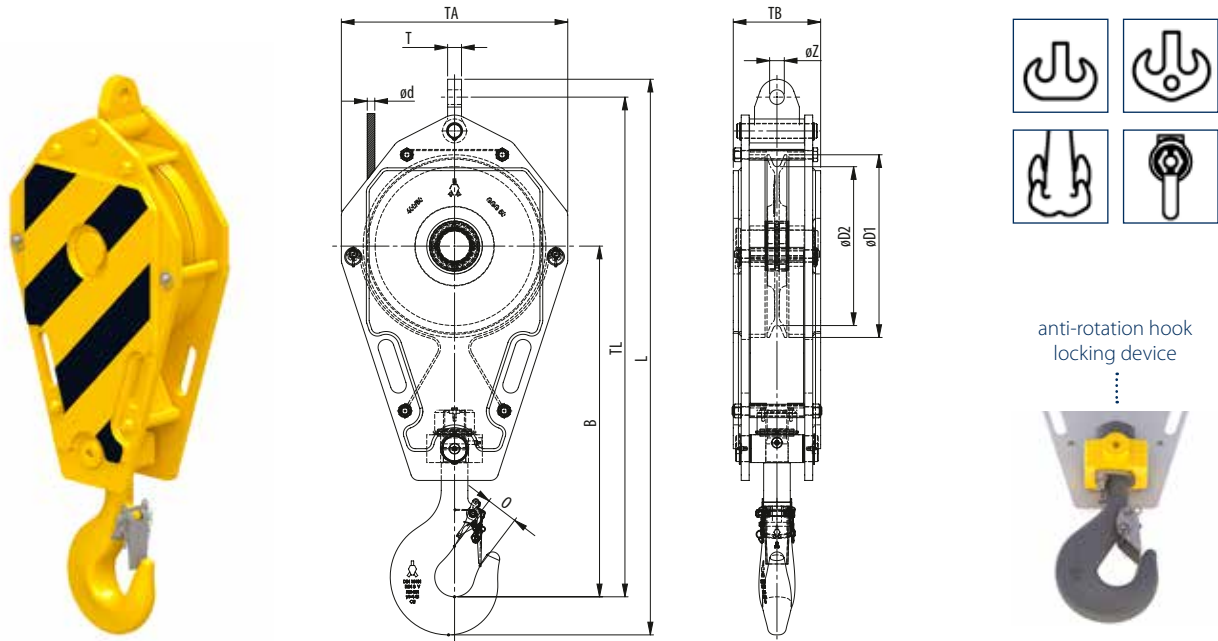

Model No.	WLL (UStons)	For wire ød (inch)	Hook size	Dimensions (inch)									Weight (lbs)
				øD1	øD2	B	O	TA	TL	L	T	øZ	
FRB 225.xx.1.12.5.E	13.7	3/8 - 1/2	4	10.2	8.9	23.1	2.2	13.6	34	38.2	TBD	TBD	195
FRB 260.xx.1.12.5.E	13.7	1/2 - 5/8	4	11.8	10.2	25.7	2.2	15.7	36.9	41.9	TBD	TBD	220
FRB 225.xx.1.16.E	17.6	3/8 - 1/2	6	10.2	8.9	23.9	2.8	13.6	34.8	39.7	TBD	TBD	225
FRB 260.xx.1.16.E	17.6	1/2 - 5/8	6	11.8	10.2	27.3	2.8	15.7	38.5	43.4	TBD	TBD	265 325 375
FRB 285.xx.1.16.E	17.6	1/2 - 3/4	6	12.6	11.2	28.5	2.8	16.5	40.3	45.2	TBD	TBD	350
FRB 320.xx.1.16.E	17.6	5/8 - 3/4	6	14.4	12.6	28.7	2.8	17.7	41.8	16.8	TBD	TBD	350
FRB 355.xx.1.16.E	17.6	5/8 - 7/8	6	16.1	14	31	2.8	19.7	44.6	49.7	TBD	TBD	500 550
FRB 260.xx.1.20.E	22	1/2 - 5/8	8	11.8	10.2	29.4	3.1	15.7	40.7	46	TBD	TBD	285 375 425
FRB 285.xx.1.20.E	22	1/2 - 3/4	8	12.6	11.2	30.6	3.1	16.5	42.4	47.8	TBD	TBD	350
FRB 320.xx.1.20.E	22	5/8 - 3/4	8	14.4	12.6	30.2	3.1	17.7	43.3	48.7	TBD	TBD	350 425 475
FRB 355.xx.1.20.E	22	5/8 - 7/8	8	16.1	14	33.6	3.1	19.7	47.2	52.5	TBD	TBD	550 660
FRB 355.xx.1.25.E	27.5	5/8 - 7/8	8	16.1	14	33.4	3.1	19.7	47	52.5	TBD	TBD	550 750
FRB 400.xx.1.25.E	27.5	3/4 - 1	8	18.1	15.7	34.8	3.1	22.4	49.5	55.2	TBD	TBD	700 750
FRB 400.xx.1.26.E	28.5	3/4 - 1	8	18.1	15.7	34.8	3.1	22.4	49.5	55.2	TBD	TBD	1100
FRB 400.xx.1.29.E	32	3/4 - 1	8	18.1	15.7	34.8	3.1	22.4	49.9	55.6	TBD	TBD	800
FRB 450.xx.1.29.E	32	3/4 - 1 1/8	8	20.3	17.7	37.3	3.1	23.6	51.4	59.3	TBD	TBD	650 800
FRB 450.xx.1.32.E	35	3/4 - 1 1/8	10	20.3	17.7	39.5	3.5	23.6	56.1	62.7	TBD	TBD	1100 1320
FRB 528.xx.1.32.E	35	7/8 - 1 1/4	10	23.4	20.8	40.5	3.5	28	58.7	65.3	TBD	TBD	1100 1320 1500 1800
FRB 670.xx.1.32.E	35	1 - 1 1/2	10	29.9	26.4	41.3	3.5	34.3	63.3	70.3	TBD	TBD	1700
FRB 450.xx.1.40.E	45	3/4 - 1 1/8	12	20.3	17.7	42.3	3.9	23.6	58.9	65.9	TBD	TBD	1300 1500
FRB 528.xx.1.40.E	45	7/8 - 1 1/4	12	23.4	20.8	43.9	3.9	28	62.7	69.7	TBD	TBD	1500 1700 1875 2000
FRB 450.xx.1.50.E	55	3/4 - 1 1/8	12	20.3	17.7	43.1	3.9	23.6	59.6	67.2	TBD	TBD	1300 1500
FRB 528.xx.1.50.E	55	7/8 - 1 1/4	12	23.4	20.8	43.7	3.9	28	62.6	70.1	TBD	TBD	1500 1700 1875 2000
FRB 575.xx.1.50.E	55	1 1/8 - 1 1/4	12	25.6	22.6	45	3.9	30.3	64.9	72.9	TBD	TBD	2200
FRB 630.xx.1.50.E	55	1 - 1 3/8	12	27.9	24.8	43.6	3.9	35.4	64.7	72.1	TBD	TBD	1800 / 3500 / 5300*
FRB 670.xx.1.50.E	55	1 - 1 1/2	12	29.9	26.4	44.1	3.9	34.3	66.3	73.7	TBD	TBD	2000 2600 3000
FRB 670.xx.1.64.E	70	1 - 1 1/2	16	29.9	26.4	49.1	4.4	34.3	71.4	79.3	TBD	TBD	2200 2600 3000

* Removable cheek weights


Minimum Ultimate Strength = 4 x WLL

- The dimensions in this table are indicative only. A drawing will always be submitted prior production and will be the leading document when discussing dimensions.
- Blocks shown here are standard models; inquiries for custom versions are welcome.
- Refer to wire rope manufacturers D/d ratio guideline.
- Optional: Hook locking pin.

SEE OUR WARNING & SAFETY
INFORMATION ON PAGES 134 - 146

FAST REEVE CRANE BLOCKS

2 SHEAVES

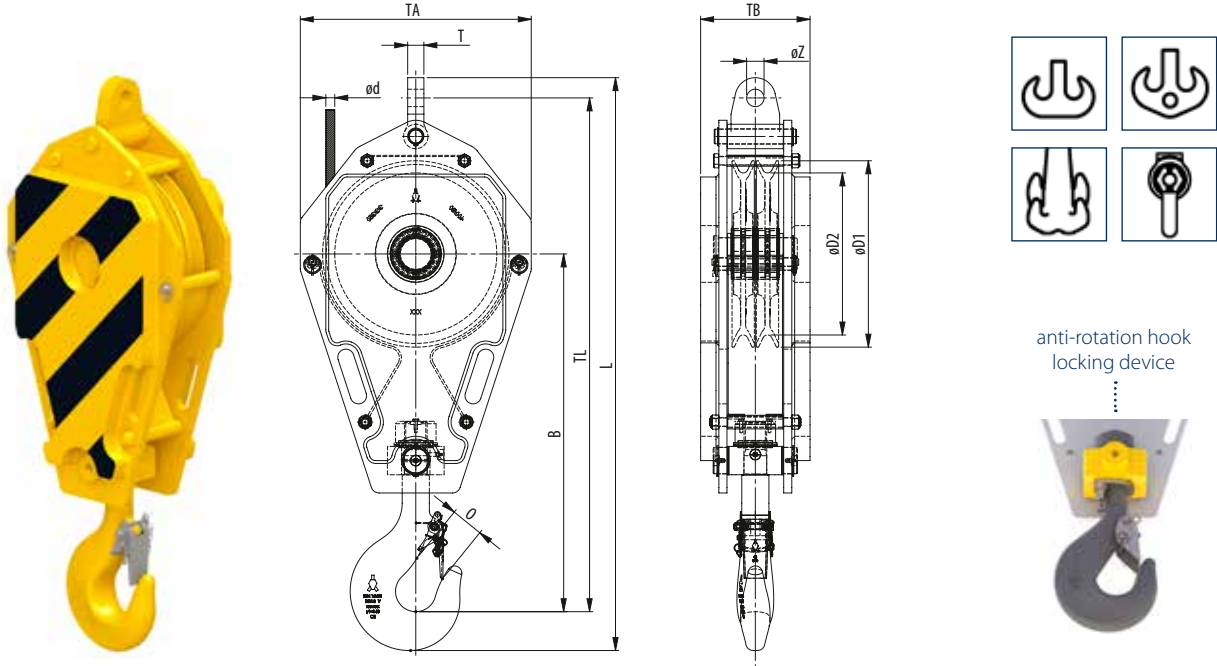

Model No.	WLL (USTons)	For wire ød (inch)	Hook size	Dimensions (inch)									Weight (lbs)
				øD1	øD2	B	O	TA	TL	L	T	øZ	
FRB 225.xx.2.16.E	17.6	$\frac{3}{8} - \frac{9}{16}$	6	10.2	8.9	23.9	2.8	13.6	34.8	39.7	TBD	TBD	265
FRB 260.xx.2.16.E	17.6	$\frac{7}{16} - \frac{5}{8}$	6	11.8	10.2	27.3	2.8	15.7	38.5	43.4	TBD	TBD	285 350
FRB 225.xx.2.20.E	22	$\frac{3}{8} - \frac{9}{16}$	8	10.2	8.9	28.3	3.1	13.6	37.7	43.1	TBD	TBD	285
FRB 260.xx.2.20.E	22	$\frac{7}{16} - \frac{5}{8}$	8	11.8	10.2	29.4	3.1	15.7	40.7	46	TBD	TBD	285 350 425
FRB 260.xx.2.25.E	27.5	$\frac{7}{16} - \frac{5}{8}$	8	11.8	10.2	29.3	3.1	15.7	40.5	45.6	TBD	TBD	350 425
FRB 320.xx.2.25.E	27.5	$\frac{9}{16} - \frac{3}{4}$	8	14.4	12.6	30	3.1	17.7	43.1	48.5	TBD	TBD	450 495
FRB 320.xx.2.29.E	32	$\frac{9}{16} - \frac{3}{4}$	8	14.4	12.6	30.1	3.1	17.3	43.1	48.5	TBD	TBD	600
FRB 355.xx.2.29.E	32	$\frac{9}{16} - \frac{7}{8}$	8	16.1	14	33.4	3.1	19.7	47	52.5	TBD	TBD	585 625 750
FRB 400.xx.2.32.E	35	$\frac{5}{8} - 1$	10	18.1	15.7	37.5	3.5	22.4	52.7	58.9	TBD	TBD	800
FRB 450.xx.2.32.E	35	$\frac{3}{4} - 1\frac{1}{8}$	10	20.3	17.7	39.5	3.5	23.6	55.7	61.9	TBD	TBD	1100
FRB 450.xx.2.46.E	50	$\frac{3}{4} - 1\frac{1}{8}$	12	20.3	17.7	42.2	3.9	23.6	58.5	65.2	TBD	TBD	1200
FRB 450.xx.2.55.E	60	$\frac{3}{4} - 1\frac{1}{8}$	16	20.3	17.7	42.3	4.4	23.6	58.9	66.5	TBD	TBD	1600
FRB 528.xx.2.55.E	60	$\frac{7}{8} - 1\frac{1}{4}$	12	23.4	20.8	43.8	3.9	27.9	62.6	70.1	TBD	TBD	2000
FRB 670.xx.2.55.E	60	$1 - 1\frac{1}{2}$	12	29.9	26.4	44.2	3.9	34.3	67	74.1	TBD	TBD	2080
FRB 528.xx.2.70.E	77	$\frac{7}{8} - 1\frac{1}{4}$	16	23.4	20.8	47.3	4.4	28	65.2	72.8	TBD	TBD	2200
FRB 670.xx.2.82.E	90	$1 - 1\frac{1}{2}$	20	29.9	26.4	50.7	4.9	34.3	74.7	83.6	TBD	TBD	3400


Minimum Ultimate Strength = 4 x WLL

- The dimensions in this table are indicative only. A drawing will always be submitted prior to production and will be the leading document when discussing dimensions.
- Blocks shown here are standard models; inquiries for custom versions are welcome.
- Refer to wire rope manufacturers D/d ratio guideline.
- Optional: Hook locking pin.



SEE OUR WARNING & SAFETY
INFORMATION ON PAGES 134 - 146



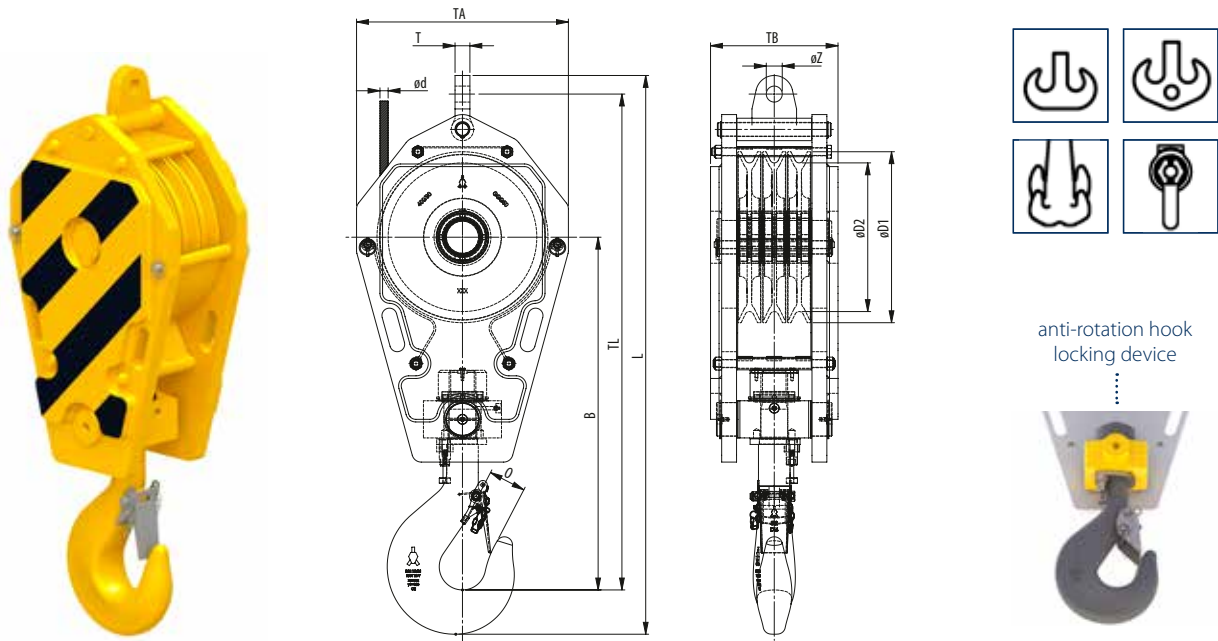

Model No.	WLL (UStons)	For wire ød (inch)	Hook size	Dimensions (inch)									Weight (lbs)
				øD1	øD2	B	O	TA	TL	L	T	øZ	
FRB 225.xx.3.20.E	22	3/8 - 9/16	8	10.2	8.9	28.3	3.1	13.6	39.1	44.4	TBD	TBD	410
FRB 260.xx.3.20.E	22	7/16 - 5/8	8	11.8	10.2	28.5	3.1	15.7	40.1	45.4	TBD	TBD	410
FRB 260.xx.3.25.E	27.5	7/16 - 5/8	8	11.8	10.2	27.5	3.1	15.7	39.1	44.4	TBD	TBD	465
FRB 285.xx.3.29.E	32	1/2 - 3/4	8	12.6	11	27.7	3.5	16.5	39.9	45.2	TBD	TBD	460
FRB 320.xx.3.29.E	32	9/16 - 3/4	8	14.4	12.6	30	3.1	17.7	43.1	48.5	TBD	TBD	505
FRB 260.xx.3.32.E	35	7/16 - 5/8	10	11.8	10.2	28.9	3.5	15.7	40.5	46.3	TBD	TBD	465
FRB 285.xx.3.32.E	35	1/2 - 3/4	10	12.6	11	30	3.5	16.5	42.2	48	TBD	TBD	460 505
FRB 320.xx.3.32.E	35	9/16 - 3/4	10	14.4	12.6	32.2	3.5	17.7	45.3	51.1	TBD	TBD	505 625
FRB 320.xx.3.37.E	40	9/16 - 3/4	10	14.4	12.6	32.2	3.5	17.7	45.3	51.1	TBD	TBD	700
FRB 355.xx.3.37.E	40	9/16 - 7/8	10	16.1	14	34	3.5	19.7	48	53.7	TBD	TBD	700 825
FRB 360.xx.3.41.E	45	5/8 - 7/8	12	16.5	14.2	35.4	3.9	20.1	49.3	55.8	TBD	TBD	900
FRB 360.xx.3.46.E	50	5/8 - 7/8	12	16.5	14.2	35.4	3.9	20.1	49.3	55.8	TBD	TBD	900
FRB 400.xx.3.46.E	50	5/8 - 1	12	18.1	15.7	37.3	3.9	22.4	52.1	58.6	TBD	TBD	1000
FRB 360.xx.3.50.E	55	5/8 - 7/8	12	16.5	14.2	35.4	3.9	20.1	49.4	56.3	TBD	TBD	900 1200
FRB 400.xx.3.50.E	55	5/8 - 1	12	18.1	15.7	37.4	3.9	22.4	52.1	59.1	TBD	TBD	1100 1200 1350
FRB 360.xx.3.55.E	60	5/8 - 7/8	12	16.5	14.2	35.4	3.9	20.1	49.3	55.8	TBD	TBD	900 1200
FRB 400.xx.3.55.E	60	5/8 - 1	12	18.1	15.7	37.4	3.9	22.4	52.1	59.1	TBD	TBD	1100 1200 1350



Minimum Ultimate Strength = 4 x WLL

- The dimensions in this table are indicative only. A drawing will always be submitted prior to production and will be the leading document when discussing dimensions.
- Blocks shown here are standard models; inquiries for custom versions are welcome.
- Refer to wire rope manufacturers D/d ratio guideline.
- Optional: Hook locking pin.




SEE OUR WARNING & SAFETY
INFORMATION ON PAGES 134 - 146



<< FAST REEVE CRANE BLOCKS

3 SHEAVES

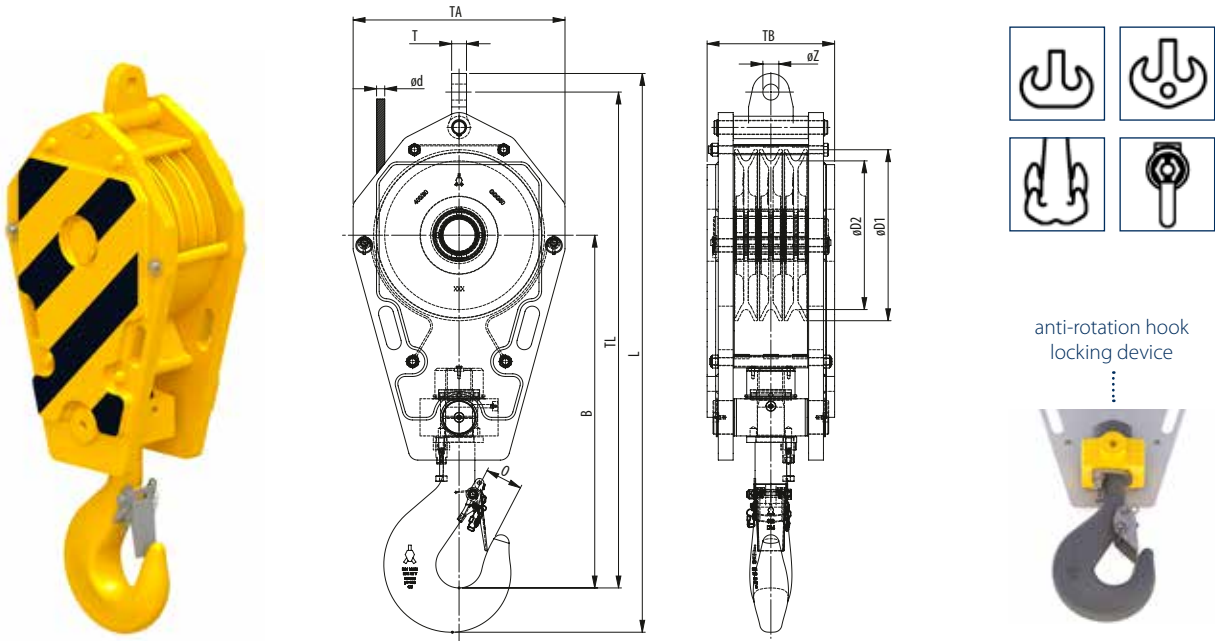

Model No.	WLL (USTons)	For wire ød (inch)	Hook size	Dimensions (inch)									Weight (lbs)
				øD1	øD2	B	O	TA	TL	L	T	øZ	
FRB 400.xx.3.63.E	69	5/8 - 1	16	18.1	15.7	37.4	4.4	22.4	52.1	59.1	TBD	TBD	1350
FRB 450.xx.3.64.E	70	3/4 - 1 1/8	16	20.3	17.7	40.9	4.4	23.6	57.2	64.8	TBD	TBD	1500 1700
FRB 450.xx.3.70.E	77	3/4 - 1 1/8	16	20.3	17.7	41.1	4.4	23.6	57.4	64.6	TBD	TBD	1500 1700 1800
FRB 528.xx.3.70.E	77	7/8 - 1 1/4	16	23.4	20.8	47.6	4.4	28	65.9	73.5	TBD	TBD	2350
FRB 450.xx.3.82.E	90	3/4 - 1 1/8	20	20.3	17.7	46.5	4.9	23.6	62.8	70.7	TBD	TBD	1800 2200
FRB 528.xx.3.82.E	90	7/8 - 1 1/4	20	23.4	20.8	50.1	4.9	28	68.3	76.6	TBD	TBD	2500 2800
FRB 630.xx.3.82.E	90	1 - 1 3/8	20	27.9	24.8	53.7	4.9	32.7	74.1	82.1	TBD	TBD	3600
FRB 528.xx.3.100.E	110	7/8 - 1 1/4	20	23.4	20.8	50.1	4.9	28	68.3	76.6	TBD	TBD	2500 2800
FRB 528.xx.3.100.E	110	7/8 - 1 1/4	25	23.4	20.8	53.7	5.5	28	71.9	80.9	TBD	TBD	2860 3000
FRB 575.xx.3.100.E	110	1 5/16 - 1 1/4	25	25.6	22.6	51.3	5.5	30.3	71.2	80.6	TBD	TBD	3000
FRB 575.xx.3.100.E	110	1 5/16 - 1 1/4	25	25.6	22.6	51.3	5.5	30.3	71.2	80.6	TBD	TBD	2425 / 4520 / 6620*
FRB 630.xx.3.100.E	110	1 - 1 3/8	25	27.9	24.8	53.3	5.5	32.7	74.4	83.9	TBD	TBD	2425 / 4520 / 6620*
FRB 630.xx.3.100.E	110	1 - 1 3/8	25	27.9	24.8	53.3	5.5	32.7	74.4	83.9	TBD	TBD	3500
FRB 670.xx.3.100.E	110	1 - 1 1/2	25	29.9	26.4	55.2	5.5	34.3	77.5	87	TBD	TBD	4000 / 14000*
FRB 630.xx.3.125.E	137,5	1 - 1 3/8	25	27.9	24.8	55.4	5.5	35.4	77.7	88	TBD	TBD	3300 / 12100*
FRB 670.xx.3.137.E	150	1 - 1 1/2	25	29.9	26.4	54.6	5.5	34.3	73.8	83.2	TBD	TBD	8100 / 16000*

* Removable cheek weights


Minimum Ultimate Strength = 4 x WLL

- The dimensions in this table are indicative only. A drawing will always be submitted prior to production and will be the leading document when discussing dimensions.
- Blocks shown here are standard models; inquiries for custom versions are welcome.
- Refer to wire rope manufacturers D/d ratio guideline.
- Optional: Hook locking pin.



SEE OUR WARNING & SAFETY
INFORMATION ON PAGES 134 - 148



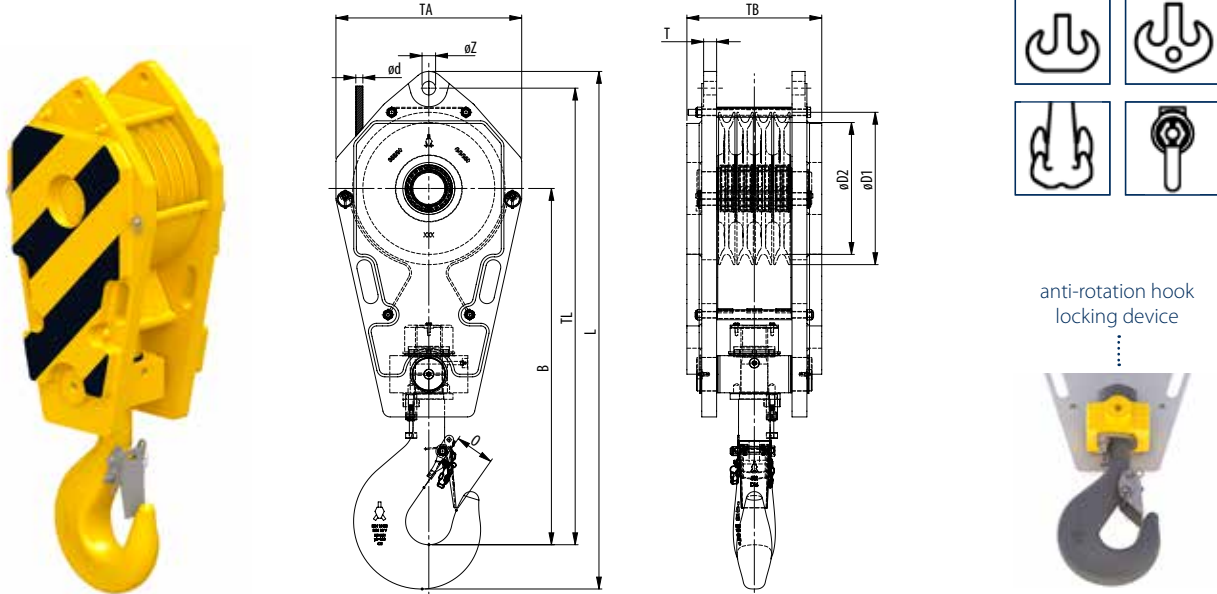

Model No.	WLL (UStons)	For wire ød (inch)	Hook size	Dimensions (inch)									Weight (lbs)
				øD1	øD2	B	O	TA	TL	L	T	øZ	
FRB 355.xx.4.35.E	38.5	5/16 - 7/8	10	16.1	14	36.7	3.5	19.7	47.4	53.1	TBD	TBD	925
FRB 320.xx.4.37.E	40	5/16 - 3/4	10	14.4	12.6	29.6	3.5	17.7	39	44.8	TBD	TBD	700
FRB 355.xx.4.37.E	40	5/16 - 7/8	10	16.1	14	34	3.5	19.7	44.6	50.4	TBD	TBD	620
FRB 320.xx.4.41.E	45	5/16 - 3/4	12	14.4	12.6	34.6	3.9	17.7	43.9	50.2	TBD	TBD	760
FRB 355.xx.4.46.E	50	5/16 - 7/8	12	16.1	14	37.7	3.9	19.7	48.1	54.2	TBD	TBD	1000
FRB 355.xx.4.55.E	60	5/16 - 7/8	12	16.1	14	37.8	3.9	19.7	48.4	54.8	TBD	TBD	1100
FRB 400.xx.4.70.E	77	5/8 - 1	16	18.1	15.7	40.9	4.4	22.4	52.5	57.7	TBD	TBD	1500
FRB 450.xx.4.70.E	77	3/4 - 1 1/8	16	20.3	17.7	40.9	4.4	23.6	57	62.2	TBD	TBD	1650 1800
FRB 528.xx.4.70.E	77	7/8 - 1 1/4	16	23.4	20.8	42.7	4.4	27.9	57.7	65.1	TBD	TBD	2800
FRB 528.xx.4.82.E	90	7/8 - 1 1/4	20	23.4	20.8	50.1	4.9	28	68.3	74.3	TBD	TBD	2800
FRB 528.xx.4.100.E	110	7/8 - 1 1/4	25	23.4	20.8	50.7	5.5	28	68.6	75.3	TBD	TBD	2800
FRB 528.xx.4.105.E	115	7/8 - 1 1/4	25	23.4	20.8	52.1	5.5	28	67.6	77.1	TBD	TBD	3850
FRB 528.xx.4.137,5.E	150	7/8 - 1 1/4	32	23.4	20.8	54.6	6.3	28	69.8	79.9	TBD	TBD	3150
FRB 575.xx.4.137,5.E	150	1 1/16 - 1 1/4	32	25.6	22.6	55.6	6.3	30.3	72.2	82.1	TBD	TBD	3000
FRB 670.xx.4.137,5.E	150	1 - 1 1/2	32	29.9	26.4	56.7	6.3	34.3	75.7	86	TBD	TBD	3200


Minimum Ultimate Strength = 4 x WLL

- The dimensions in this table are indicative only. A drawing will always be submitted prior to production and will be the leading document when discussing dimensions.
- Blocks shown here are standard models; inquiries for custom versions are welcome.
- Refer to wire rope manufacturers D/d ratio guideline.
- Optional: Hook locking pin.



SEE OUR WARNING & SAFETY
INFORMATION ON PAGES 134 - 146



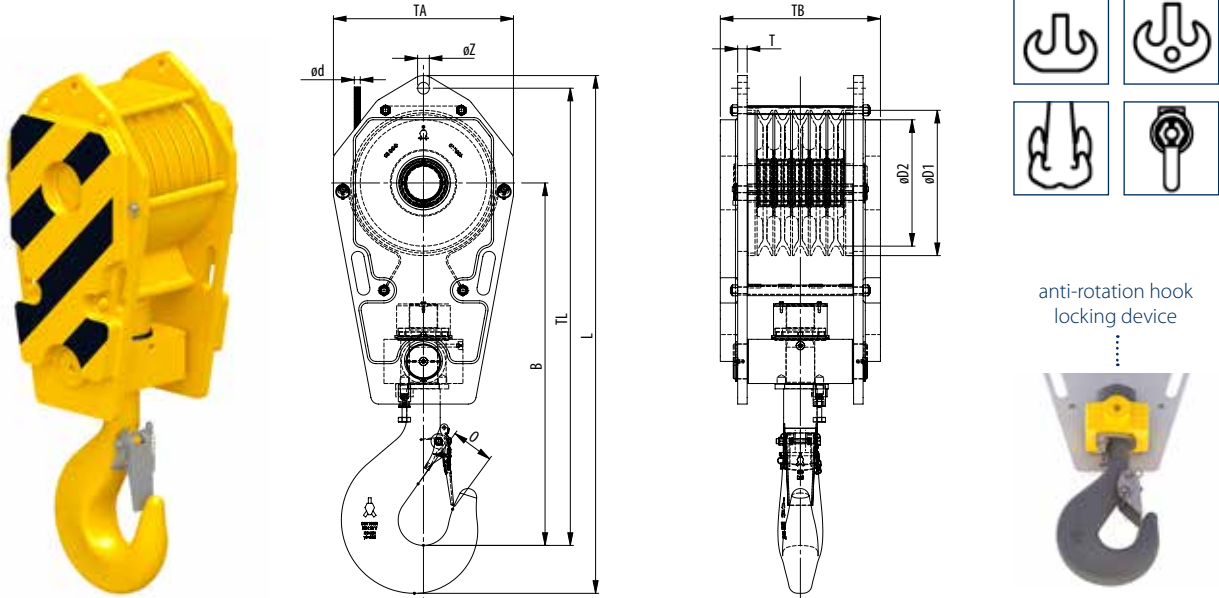

Model No.	WLL (UStons)	For wire ød (inch)	Hook size	Dimensions (inch)									Weight (lbs)
				øD1	øD2	B	O	TA	TL	L	T	øZ	
FRB 355.xx.5.55.E	60	5/16 - 7/8	12	16.1	14	37.8	3.9	19.7	48.2	52.8	TBD	TBD	1100 1280
FRB 360.xx.5.64.E	70	5/8 - 7/8	16	16.5	14.2	39.3	4.4	20.1	49.9	56.8	TBD	TBD	1340 1550
FRB 360.xx.5.70.E	77	5/8 - 7/8	16	16.5	14.2	39.3	4.4	20.1	49.9	56.8	TBD	TBD	1340 1550
FRB 360.xx.5.72.E	80	5/8 - 7/8	16	16.5	14.2	39.6	4.4	20.1	50.2	57.1	TBD	TBD	1340 1550
FRB 400.xx.5.82.E	90	5/8 - 1	20	18.1	15.7	45.2	4.9	22.4	57	62.9	TBD	TBD	1477 1540 1600 1800
FRB 400.xx.5.91.E	100	5/8 - 1	20	18.1	15.7	45.2	4.9	22.4	57	65.2	TBD	TBD	2250
FRB 450.xx.5.91.E	100	3/4 - 1 1/8	20	20.3	17.7	46.7	4.9	23.6	59.9	67.9	TBD	TBD	2250
FRB 400.xx.5.95.E	105	5/8 - 1	20	18.1	15.7	40.7	4.9	22.4	53.1	59.9	TBD	TBD	2250 2870
FRB 400.xx.5.100.E	110	5/8 - 1	20	18.1	15.7	40.7	4.9	22.4	53.1	59.9	TBD	TBD	2250
FRB 450.xx.5.100.E	110	3/4 - 1 1/8	25	20.3	17.7	49.7	5.5	23.6	62.9	69.6	TBD	TBD	1900 2200 2250 2510
FRB 528.xx.5.100.E	110	7/8 - 1 1/4	25	23.4	20.8	49.9	5.5	28	65.9	74.6	TBD	TBD	2500 2800
FRB 528.xx.5.100.E	110	7/8 - 1 1/4	25	23.4	20.8	50.9	5.5	31.1	66	75.1	TBD	TBD	2860 / 3960 / 5060*
FRB 575.xx.5.100.D	110	1 5/16 - 1 1/4	25	25.6	22.6	33.7	5.5	30.3	70.2	78.4	TBD	TBD	2860 / 3960 / 5060*
FRB 528.xx.5.119.E	130	7/8 - 1 1/4	25	23.4	20.8	52.1	5.5	27.9	67.6	76.6	TBD	TBD	3300
FRB 450.xx.5.125.D	137.5	3/4 - 1 1/8	32	20.3	17.7	50.7	6.3	23.6	63.7	72.1	TBD	TBD	3630

* Removable cheek weights

Minimum Ultimate Strength = 4 x WLL

- The dimensions in this table are indicative only. A drawing will always be submitted prior to production and will be the leading document when discussing dimensions.
- Blocks shown here are standard models; inquiries for custom versions are welcome.
- Refer to wire rope manufacturers D/d ratio guideline.
- Optional: Hook locking pin.




SEE OUR WARNING & SAFETY
INFORMATION ON PAGES 134 - 146



FAST REEVE CRANE BLOCKS

6 SHEAVES

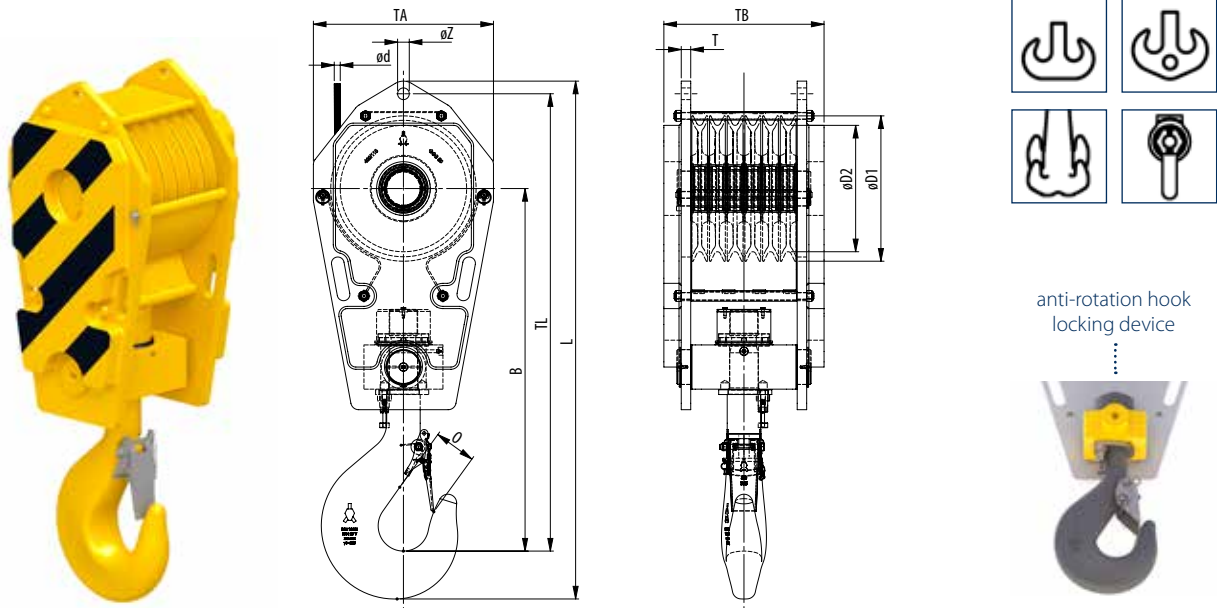

Model No.	WLL (UStons)	For wire ød (inch)	Hook size	Dimensions (inch)									Weight (lbs)
				øD1	øD2	B	O	TA	TL	L	T	øZ	
FRB 355.xx.6.55.E	55	5/16 - 7/8	12	16.1	14	35.8	3.9	19.7	46	52.4	TBD	TBD	1496
FRB 360.xx.6.64.E	70	5/8 - 7/8	16	16.5	14.2	38.3	4.4	20.1	48.9	50.3	TBD	TBD	1495
FRB 400.xx.6.64.E	70	5/8 - 1	16	18.1	15.7	41.9	4.4	22.4	53.7	60.5	TBD	TBD	1700
FRB 400.xx.6.82.E	90	5/8 - 1	20	18.1	15.7	45.2	4.9	22.4	57	62.9	TBD	TBD	1800
FRB 450.xx.6.82.E	90	3/4 - 1 1/8	20	20.3	17.7	46.7	4.9	23.6	62.2	68.1	TBD	TBD	2000
FRB 400.xx.6.91.E	100	5/8 - 1	20	18.1	15.7	44.6	4.9	22.4	56.4	64	TBD	TBD	2200
FRB 450.xx.6.100.E	110	3/4 - 1 1/8	25	20.3	17.7	49.7	5.5	23.6	62.9	69.6	TBD	TBD	2500
FRB 528.xx.6.100.E	110	7/8 - 1 1/4	25	23.4	20.8	50.1	5.5	28	64.9	73.4	TBD	TBD	2500
FRB 450.xx.6.120.E	132	3/4 - 1 1/8	25	20.3	17.7	47.9	5.5	22.4	59.8	68.1	TBD	TBD	2200
FRB 528.xx.6.137.E	150	7/8 - 1 1/4	32	23.4	20.8	52.5	6.3	28	67.8	77.8	TBD	TBD	3500
FRB 528.xx.6.150.E	165	7/8 - 1 1/4	40	23.5	20.8	61.1	7.1	28	79.5	87.9	TBD	TBD	4000
FRB 528.xx.6.160.E	176	7/8 - 1 1/4	40	23.5	20.8	62.2	7.1	28	77.8	86.1	TBD	TBD	4500 5000
FRB 528.xx.6.182.E	200	7/8 - 1 1/4	40	23.5	20.8	63	7.1	28	79.5	87.9	TBD	TBD	4500
FRB 575.xx.6.182.E	200	1 5/16 - 1 1/4	40	25.6	22.6	61.1	7.1	30.3	77.4	88.4	TBD	TBD	4500 5500
FRB 670.xx.6.182.E	200	1 - 1 1/2	40	29.9	26.4	61.7	7.1	34.3	80.2	90.2	TBD	TBD	5500
FRB 528.xx.6.200.E	220	7/8 - 1 1/4	50	23.5	20.8	63	7.9	28	79.5	87.9	TBD	TBD	5500
FRB 575.xx.6.209.E	230	1 5/16 - 1 1/4	50	25.6	22.6	65.4	7.9	30.3	81.9	91.2	TBD	TBD	6500


Minimum Ultimate Strength = 4 x WLL

- The dimensions in this table are indicative only. A drawing will always be submitted prior to production and will be the leading document when discussing dimensions.
- Blocks shown here are standard models; inquiries for custom versions are welcome.
- Refer to wire rope manufacturers D/d ratio guideline.
- Optional: Hook locking pin.



SEE OUR WARNING & SAFETY
INFORMATION ON PAGES 134 - 146



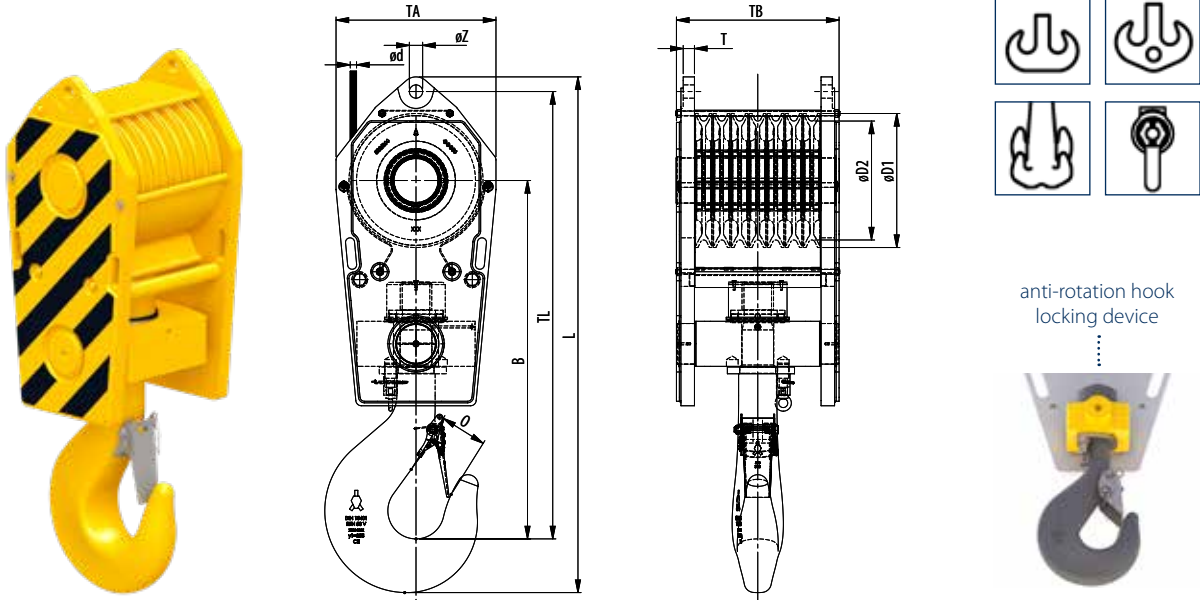

Model No.	WLL (UStons)	For wire ød (inch)	Hook size	Dimensions (inch)									Weight (lbs)
				øD1	øD2	B	O	TA	TL	L	T	øZ	
FRB 355.xx.7.75.E	82.5	5/16 - 7/8	16	16.1	14	39.2	4.4	18.9	49.8	56.8	TBD	TBD	1600
FRB 400.xx.7.100.E	110	5/8 - 1	20	18.1	15.7	43.6	4.9	22.4	55.6	63.4	TBD	TBD	2400
FRB 400.xx.7.118.E	130	5/8 - 1	25	18.1	15.7	48.9	5.5	22.4	60.9	69.4	TBD	TBD	2400
FRB 400.xx.7.127.D	140	5/8 - 1	32	18.1	15.7	47.8	6.3	22.4	59.8	68.3	TBD	TBD	2850
FRB 450.xx.7.127.E	140	3/4 - 1 1/8	32	20.3	17.7	54.3	6.3	23.6	67.4	76.9	TBD	TBD	3150
FRB 450.xx.7.137.E	150	3/4 - 1 1/8	32	20.3	17.7	54.3	6.3	23.6	67.4	76.9	TBD	TBD	3100
FRB 450.xx.7.160.D	176	3/4 - 1 1/8	40	20.3	17.7	58.2	7.1	23.6	71.4	80.8	TBD	TBD	3930
FRB 528.xx.7.160.D	176	7/8 - 1 1/4	40	23.4	20.8	58.6	7.1	31.1	73.9	83.5	TBD	TBD	3300 / 4950 / 6600*
FRB 575.xx.7.171.D	188	1 5/16 - 1 1/4	40	25.6	22.6	56.8	7.1	30.4	72.7	82.6	TBD	TBD	5940
FRB 528.xx.7.182.E	200	7/8 - 1 1/4	40	23.4	20.8	59.5	7.1	27.9	74.3	85.4	TBD	TBD	6160
FRB 528.xx.7.200.D	220	7/8 - 1 1/4	50	23.4	20.8	58.8	7.9	27.9	74.3	84.2	TBD	TBD	5280
FRB 575.xx.7.209.D	230	1 5/16 - 1 1/4	50	25.6	22.6	59.9	7.9	30.3	76.4	87.4	TBD	TBD	6500 7500
FRB 575.xx.7.209.D	230	1 5/16 - 1 1/4	50	25.6	22.6	59.9	7.9	30.3	76.4	87.5	TBD	TBD	5500 / 7500 / 8500*
FRB 575.xx.7.209.D	230	1 5/16 - 1 1/4	50	25.6	22.6	59.9	7.9	30.3	76.4	87.5	TBD	TBD	5500 / 7500 / 9500*
FRB 670.xx.7.209.D	230	1 - 1 1/2	50	29.9	26.4	63.1	7.9	34.3	82.2	93.1	TBD	TBD	6500*
FRB 670.xx.7.228.D	250	1 - 1 1/2	50	29.9	26.4	63.1	7.9	34.3	82.2	93.1	TBD	TBD	6500 7700*
FRB 670.xx.7.250.DB	275	1 - 1 1/2	63	29.9	26.4	64.6	8.8	34.3	83.8	99.5	TBD	TBD	10000*
FRB 528.xx.7.272.D	300	7/8 - 1 1/4	63	23.4	20.8	61.8	8.8	27.9	77.2	88.8	TBD	TBD	6450

* Removable cheek weights

Minimum Ultimate Strength = 4 x WLL

- The dimensions in this table are indicative only. A drawing will always be submitted prior to production and will be the leading document when discussing dimensions.
- Blocks shown here are standard models; inquiries for custom versions are welcome.
- Refer to wire rope manufacturers D/d ratio guideline.
- Optional: Hook locking pin.



SEE OUR WARNING & SAFETY
INFORMATION ON PAGES 134 - 146



CONSTRUCTION SPECIFIC BLOCKS

STANDARD REEVE CRANE BLOCKS


Ropeblock Standard Reeve Crane Blocks are suitable for use on a wide variety of mobile cranes, crawler cranes and other land-based cranes. These blocks are an excellent choice when frequent easy block change is not a required main feature, or lifting height is limited.

Standard features include:

- Design factor: 4:1
- Design acc. ASME B30.5, B30.10, B30.26
- Double-sealed maintenance-free roller bearings
- Forged high tensile steel DIN hooks
- Cast sheaves featuring graphite lubricated groove
- High impact-resistant side plates
- Operational temperature range: -40 up to +80°C / -40 up to +176°F
- Lubrication on hook suspension
- Short design for increased lifting height
- C3M finish in signal yellow
- Safety latch with locking pin

PLEASE CONTACT US FOR MORE DETAILS


THE ANATOMY OF A ROPEBLOCK CRANE BLOCK PRODUCT NUMBER

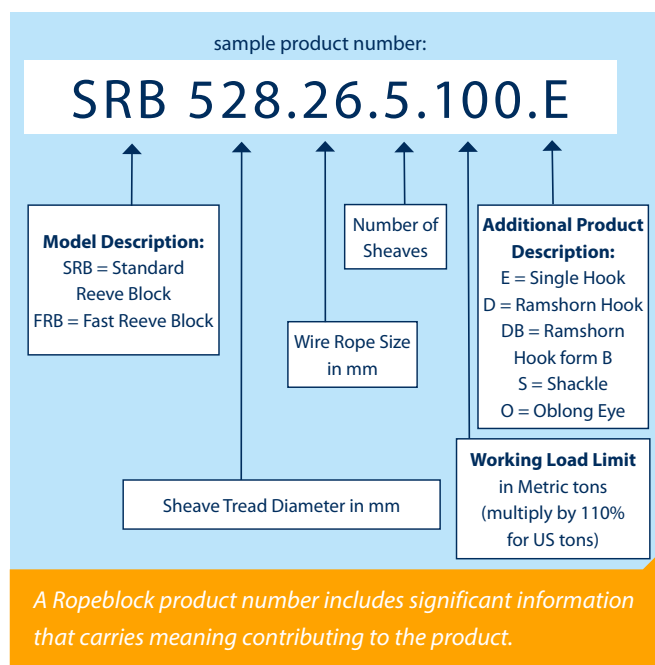

STANDARD REEVE CRANE BLOCKS

1 SHEAVE

CRANE BLOCKS

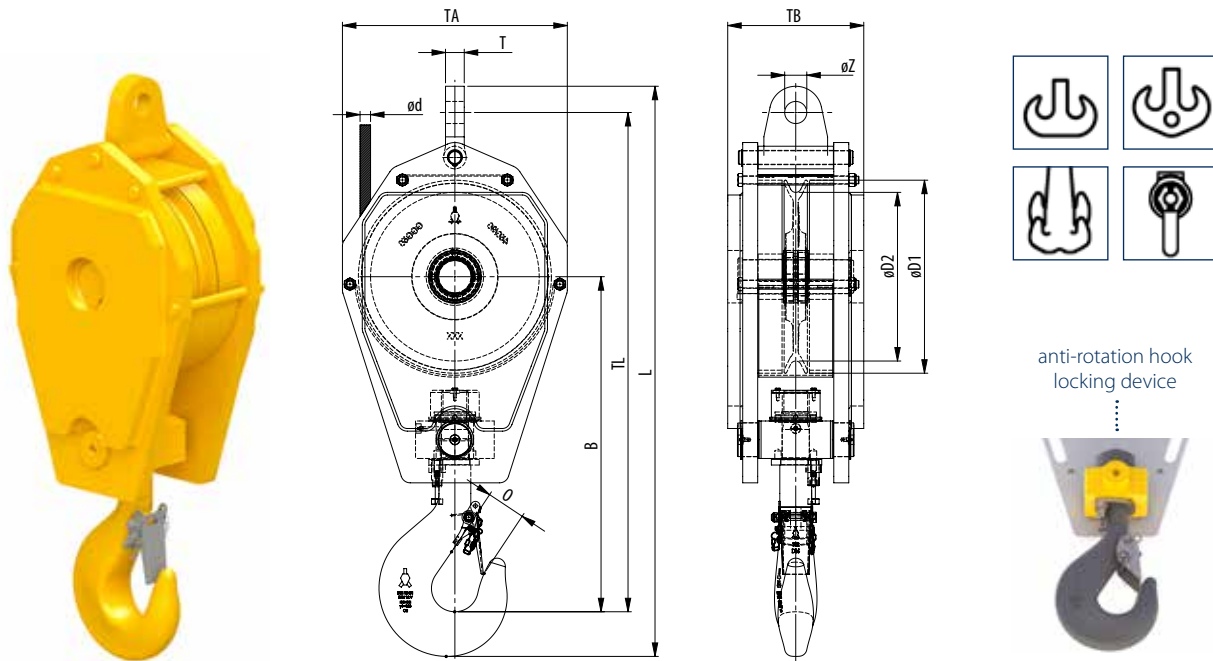

Model No.	WLL (USTons)	For wire ød (inch)	Hook size	Dimensions (inch)									Weight (lbs)
				øD1	øD2	B	O	TA	TL	L	T	øZ	
SRB 225.xx.1.12.5.E	13.7	3/8 - 1/2	5	10.2	8.9	20.6	2.5	13.6	31.4	35.9	TBD	TBD	165
SRB 260.xx.1.12.5.E	13.7	7/16 - 5/8	5	11.8	10.2	21.6	2.5	15.7	32.8	37.3	TBD	TBD	240
SRB 225.xx.1.16.E	17.6	3/8 - 1/2	6	10.2	8.9	21.6	2.5	13.6	32.4	36.9	TBD	TBD	220
SRB 260.xx.1.16.E	17.6	7/16 - 5/8	6	11.8	10.2	21.6	2.5	15.7	32.8	37.3	TBD	TBD	240
SRB 285.xx.1.16.E	17.6	1/2 - 3/4	6	12.6	11	23.9	2.8	16.5	35.7	40.7	TBD	TBD	350
SRB 320.xx.1.16.E	17.6	9/16 - 3/4	6	14.4	12.6	24.7	2.8	17.7	37.4	42.6	TBD	TBD	350
SRB 355.xx.1.16.E	17.6	9/16 - 7/8	6	16.1	14	26.3	2.8	19.7	39.9	44.8	TBD	TBD	400
SRB 320.xx.1.20.E	22	9/16 - 3/4	8	14.4	12.6	27.1	3.1	17.7	39.8	45.4	TBD	TBD	350
SRB 355.xx.1.20.E	22	9/16 - 7/8	8	16.1	14	28.1	3.1	19.7	41.5	47.4	TBD	TBD	550
SRB 450.xx.1.25.E	27.5	3/4 - 1 1/8	8	20.3	17.7	30.3	3.1	23.6	46.8	52.9	TBD	TBD	435
SRB 528.xx.1.28.E	30	7/8 - 1 1/4	8	23.5	20.8	33	3.1	27.9	52	58.6	TBD	TBD	600
SRB 400.xx.1.29.E	32	5/8 - 1	8	18.1	15.7	29.3	3.1	22.4	44.4	50.1	TBD	TBD	640
SRB 450.xx.1.32.E	35	3/4 - 1 1/8	10	20.3	17.7	32.8	3.5	23.6	49.4	56	TBD	TBD	1000 1100
SRB 528.xx.1.32.E	35	7/8 - 1 1/4	10	23.5	20.8	35.4	3.5	28	53.6	60.2	TBD	TBD	1100 1400 2000
SRB 450.xx.1.40.E	45	3/4 - 1 1/8	12	20.3	17.7	42.3	3.9	23.6	58.5	65.6	TBD	TBD	1300
SRB 450.xx.1.50.E	55	3/4 - 1 1/8	12	20.3	17.7	36.1	3.9	23.8	52.7	59.7	TBD	TBD	1300
SRB 528.xx.1.50.E	55	7/8 - 1 1/4	12	23.5	20.8	36.8	3.9	28	55.6	63.1	TBD	TBD	1650
SRB 575.xx.1.50.E	55	15/16 - 1 1/4	12	25.6	22.6	37.7	3.9	30.3	57.4	65.4	TBD	TBD	2045
SRB 630.xx.1.64.E	70	1 - 1 3/8	16	28.3	24.8	38.8	4.4	32.5	59.9	68	TBD	TBD	2200
SRB 670.xx.1.64.E	70	1 - 1 1/2	16	29.9	26.4	46.2	4.4	34.3	68.4	76.6	TBD	TBD	3000

Minimum Ultimate Strength = 4 x WLL

- The dimensions in this table are indicative only. A drawing will always be submitted prior to production and will be the leading document when discussing dimensions.
- Blocks shown here are standard models; inquiries for custom versions are welcome.
- Refer to wire rope manufacturers D/d ratio guideline.
- Optional: Hook locking pin.




SEE OUR WARNING & SAFETY
INFORMATION ON PAGES 134 - 146



STANDARD REEVE CRANE BLOCKS

2 SHEAVES

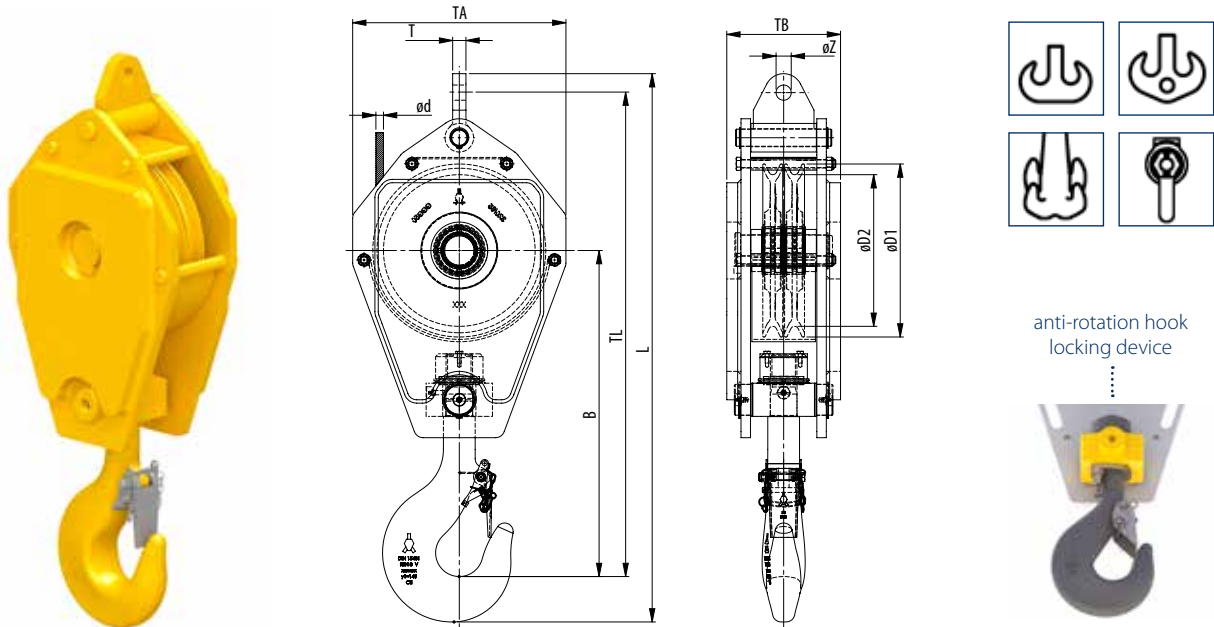

Model No.	WLL (USTons)	For wire ød (inch)	Hook size	Dimensions (inch)									Weight (lbs)
				øD1	øD2	B	O	TA	TL	L	T	øZ	
SRB 225.xx.2.16.E	17.6	3/8 - 1/16	6	11.8	10.2	23.3	2.8	15.7	34.6	39.5	TBD	TBD	240
SRB 260.xx.2.16.E	17.6	7/16 - 5/8	6	11.8	10.2	23.3	2.8	15.7	34.6	39.5	TBD	TBD	285
SRB 285.xx.2.16.E	17.6	1/2 - 3/4	6	12.6	11	23.9	2.8	16.5	35.7	40.7	TBD	TBD	210
SRB 260.xx.2.20.E	22	7/16 - 5/8	8	11.8	10.2	26.7	3.1	15.7	43	38	TBD	TBD	285 350
SRB 285.xx.2.20.E	22	1/2 - 3/4	8	12.6	11	26.3	3.1	16.5	38.1	43.4	TBD	TBD	285 330
SRB 320.xx.2.20.E	22	9/16 - 3/4	8	14.4	12.6	27.1	3.1	17.7	39.8	45.1	TBD	TBD	350
SRB 320.xx.2.22.E	24	9/16 - 3/4	8	14.4	12.6	27.1	3.1	17.7	39.8	45.6	TBD	TBD	350
SRB 260.xx.2.25.E	27.5	7/16 - 5/8	8	11.8	10.2	26.5	3.1	15.7	37.7	42.8	TBD	TBD	350
SRB 320.xx.2.25.E	27.5	9/16 - 3/4	8	14.4	12.6	27.1	3.1	17.7	39.8	45.1	TBD	TBD	450
SRB 355.xx.2.29.E	32	9/16 - 7/8	8	16.1	14	28.1	3.1	19.7	41.9	47.4	TBD	TBD	550
SRB 400.xx.2.29.E	32	5/8 - 1	8	18.1	15.7	29.3	3.1	22.4	44.4	50.1	TBD	TBD	705
SRB 450.xx.2.40.E	45	3/4 - 1 1/8	12	20.3	17.7	35.2	3.9	23.6	52	58.1	TBD	TBD	1210
SRB 450.xx.2.50.E	55	3/4 - 1 1/8	12	20.3	17.7	35.2	3.9	23.6	52	59.6	TBD	TBD	1210
SRB 400.xx.2.55.E	60	5/8 - 1	12	18.1	15.7	34	3.9	22.4	48.9	55.6	TBD	TBD	800
SRB 528.xx.2.64.E	70	7/8 - 1 1/4	16	23.4	20.8	39.5	4.4	28	58.4	65.9	TBD	TBD	2155
SRB 528.xx.2.80.E	88	7/8 - 1 1/4	20	23.4	20.8	43.7	4.9	28	62.6	71.2	TBD	TBD	2200
SRB 670.xx.2.100.E	110	1 - 1 3/8	20	29.9	26.4	49.5	4.9	34.3	71.7	80.4	TBD	TBD	4930

Minimum Ultimate Strength = 4 x WLL

- The dimensions in this table are indicative only. A drawing will always be submitted prior to production and will be the leading document when discussing dimensions.
- Blocks shown here are standard models; inquiries for custom versions are welcome.
- Refer to wire rope manufacturers D/d ratio guideline.
- Optional: Hook locking pin.




SEE OUR WARNING & SAFETY
INFORMATION ON PAGES 134 - 146



STANDARD REEVE CRANE BLOCKS

3 SHEAVES

CRANE BLOCKS

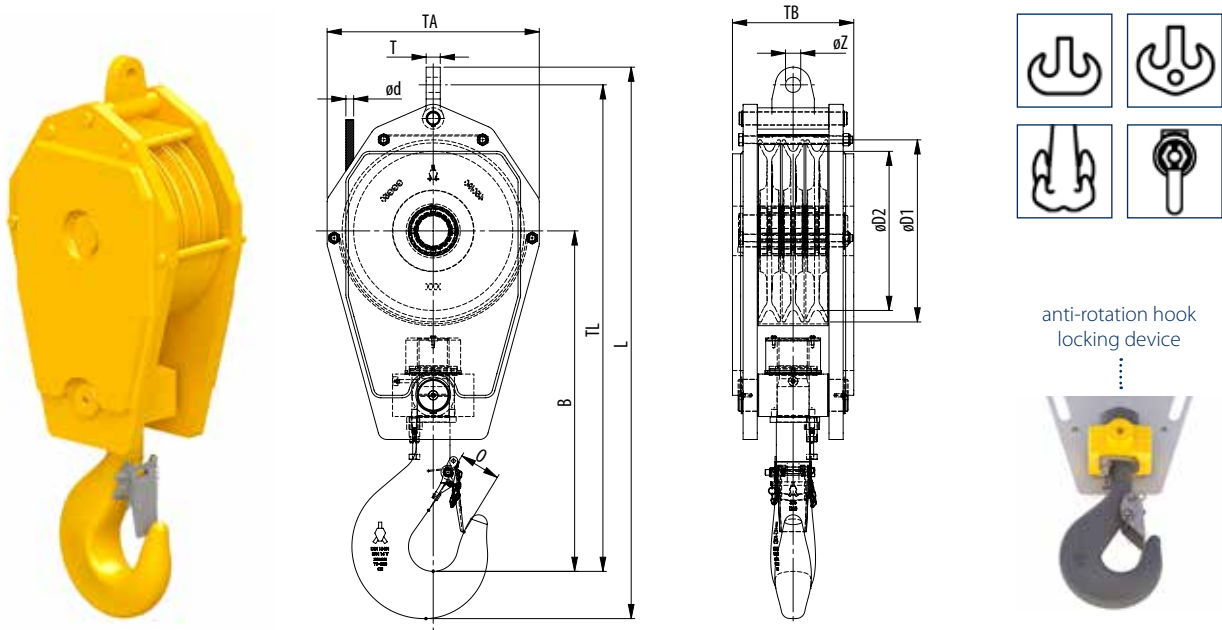

Model No.	WLL (UStons)	For wire ød (inch)	Hook size	Dimensions (inch)									Weight (lbs)
				øD1	øD2	B	O	TA	TL	L	T	øZ	
SRB 260.xx.3.25.E	27.5	7/16 - 5/8	8	11.8	10.2	25.9	3.1	15.7	37.5	42.8	TBD	TBD	465
SRB 285.xx.3.29.E	32	1/2 - 3/4	8	12.8	11.2	26.3	3.1	15.7	38.5	43.8	TBD	TBD	465
SRB 320.xx.3.29.E	32	5/16 - 3/4	8	14.4	12.6	28.1	3.1	17.7	41.3	46.6	TBD	TBD	495
SRB 355.xx.3.32.E	35	5/16 - 7/8	10	16.1	14	29.6	3.5	19.7	43	49	TBD	TBD	715
SRB 360.xx.3.40.E	44	5/8 - 7/8	12	16.1	14.2	33	3.9	19.7	46.4	52.8	TBD	TBD	1000
SRB 400.xx.3.40.E	44	5/8 - 1	12	18.1	15.7	34	3.9	22.4	49	55.6	TBD	TBD	1100
SRB 400.xx.3.50.E	55	5/8 - 1	12	18.1	15.7	34	3.9	22.4	49	56.1	TBD	TBD	1100 1200
SRB 450.xx.3.50.E	55	3/4 - 1 1/8	16	20.3	17.7	38.6	4.4	23.6	53.5	60.3	TBD	TBD	1450
SRB 360.xx.3.55.E	60	5/8 - 7/8	12	16.1	14.2	33	3.9	19.7	46.4	52.9	TBD	TBD	1000
SRB 400.xx.3.55.E	60	5/8 - 1	12	18.1	15.7	34	3.9	22.4	49	55.6	TBD	TBD	1200
SRB 450.xx.3.64.E	70	3/4 - 1 1/8	16	20.3	17.7	37.9	4.4	23.6	54.2	61.3	TBD	TBD	1500 1700
SRB 450.xx.3.70.E	77	3/4 - 1 1/8	16	20.3	17.7	38.3	4.4	23.6	55	62.9	TBD	TBD	1500 1650
SRB 528.xx.3.82.E	90	7/8 - 1 1/4	20	23.4	20.8	44.6	4.9	28	63.5	71.7	TBD	TBD	2500
SRB 528.xx.3.100.E	110	7/8 - 1 1/4	25	23.4	20.8	48.1	5.5	28	66.3	75.3	TBD	TBD	2800
SRB 670.xx.3.125.E	137.5	1 - 1 3/8	25	29.9	26.4	53.3	5.5	34.3	75.5	85	TBD	TBD	6380

Minimum Ultimate Strength = 4 x WLL

- The dimensions in this table are indicative only. A drawing will always be submitted prior to production and will be the leading document when discussing dimensions.
- Blocks shown here are standard models; inquiries for custom versions are welcome.
- Refer to wire rope manufacturers D/d ratio guideline.
- Optional: Hook locking pin.






SEE OUR WARNING & SAFETY
INFORMATION ON PAGES 134 - 146



STANDARD REEVE CRANE BLOCKS

4 SHEAVES

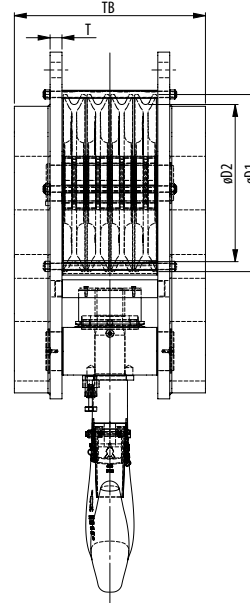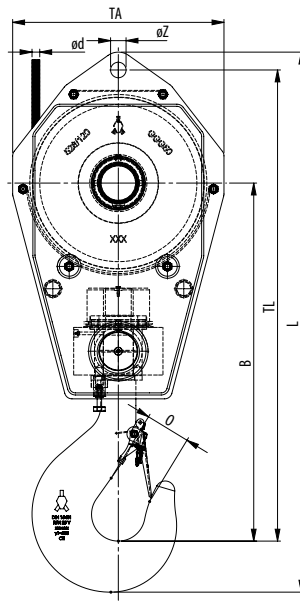
anti-rotation hook
locking device

Model No.	WLL (UStons)	For wire ød (inch)	Hook size	Dimensions (inch)									Weight (lbs)
				øD1	øD2	B	O	TA	TL	L	T	øZ	
SRB 285.xx.4.35.E	38.5	1/2 - 3/4	10	12.8	11.2	26	3.5	15.7	36.2	40.4	TBD	TBD	570
SRB 355.xx.4.50.E	55	5/16 - 7/8	12	16.1	14	33	3.9	19.7	43.9	50.8	TBD	TBD	1045
SRB 528.xx.4.55.E	60	7/8 - 1 1/4	12	23.5	20.8	38.5	3.9	28	53.5	60.6	TBD	TBD	2600
SRB 400.xx.4.64.E	70	5/8 - 1	16	18.1	15.7	35.6	4.4	22.4	47.2	54.4	TBD	TBD	1155
SRB 450.xx.4.64.E	70	3/4 - 1 1/8	16	20.3	17.7	38	4.4	23.6	52	59.2	TBD	TBD	1595
SRB 528.xx.4.70.E	77	7/8 - 1 1/4	16	23.5	20.8	40.4	4.4	28	55.3	63	TBD	TBD	3850
SRB 450.xx.4.82.E	90	3/4 - 1 1/8	20	20.3	17.7	41.2	4.9	23.6	51.6	59.8	TBD	TBD	2110
SRB 450.xx.4.82.E	90	3/4 - 1 1/8	20	20.3	17.7	41.2	4.9	23.6	51.6	59.8	TBD	TBD	2110
SRB 528.xx.4.105.E	115	7/8 - 1 1/4	25	23.4	20.8	48.1	5.5	28	62.7	71.8	TBD	TBD	3900
SRB 710.xx.4.105.E	115	1 1/8 - 1 1/2	25	31.5	28	53.3	5.5	35.4	73.9	84.4	TBD	TBD	3000
SRB 450.xx.4.108.E	120	3/4 - 1 1/8	25	20.3	17.7	46.8	5.5	23.6	60.2	68.9	TBD	TBD	3200
SRB 670.xx.4.160.E	176	1 - 1 3/8	40	29.9	26.4	60.7	7.1	34.3	82.9	94	TBD	TBD	6930

Minimum Ultimate Strength = 4 x WLL

- The dimensions in this table are indicative only. A drawing will always be submitted prior to production and will be the leading document when discussing dimensions.
- Blocks shown here are standard models; inquiries for custom versions are welcome.
- Refer to wire rope manufacturers D/d ratio guideline.
- Optional: Hook locking pin.

SEE OUR WARNING & SAFETY
INFORMATION ON PAGES 134 - 146

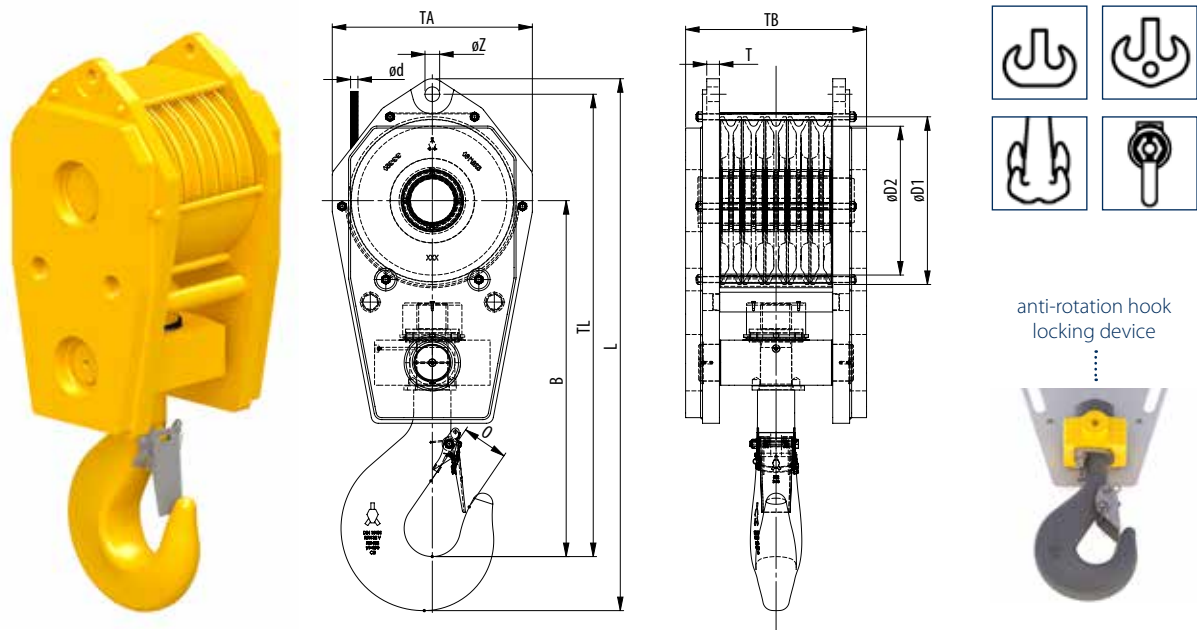

Model No.	WLL (UStons)	For wire ød (inch)	Hook size	Dimensions (inch)									Weight (lbs)
				øD1	øD2	B	O	TA	TL	L	T	øZ	
SRB 355.xx.5.55.E	60	$\frac{5}{16}$ - $\frac{3}{8}$	12	16.1	14	33	4.4	19.7	44.6	51.4	TBD	TBD	1100
SRB 360.xx.5.64.E	70	$\frac{3}{8}$ - $\frac{7}{8}$	16	16.1	14.2	39.1	4.4	19.7	47.2	54.1	TBD	TBD	1320
SRB 528.xx.5.70.E	77	$\frac{7}{8}$ - $1\frac{1}{4}$	16	23.4	20.8	40.8	4.4	27.9	55.7	63.1	TBD	TBD	2800
SRB 400.xx.5.73.E	80	$\frac{3}{8}$ - 1	16	18.1	15.7	37.6	4.4	22.4	49.6	56.7	TBD	TBD	1650
SRB 360.xx.5.80.E	88	$\frac{3}{8}$ - $\frac{7}{8}$	20	16.1	14.2	39.1	4.9	19.7	50.5	58.1	TBD	TBD	1805
SRB 400.xx.5.82.E	90	$\frac{3}{8}$ - 1	20	18.1	15.7	40.7	4.9	22.4	53.7	61.6	TBD	TBD	1800
SRB 450.xx.5.82.E	90	$\frac{3}{4}$ - $1\frac{1}{8}$	20	20.3	17.7	42.2	4.9	23.6	56.3	64.2	TBD	TBD	2250
SRB 450.xx.5.100.E	110	$\frac{3}{4}$ - $1\frac{1}{8}$	25	20.3	17.7	44.4	5.5	23.6	58.5	67.6	TBD	TBD	2500
SRB 528.xx.5.125.E	137.5	$\frac{7}{8}$ - $1\frac{1}{4}$	32	23.4	20.8	49.7	6.3	28	66.8	76.6	TBD	TBD	3500
SRB 528.xx.5.137.5.E	150	$\frac{7}{8}$ - $1\frac{1}{4}$	32	23.4	20.8	52.5	6.3	28	50.1	77.8	TBD	TBD	3500
SRB 528.xx.5.160.E	176	$\frac{7}{8}$ - $1\frac{1}{4}$	40	23.4	20.8	55.4	7.1	28	70.7	81.8	TBD	TBD	3640
FRB 670.xx.5.200.E	220	1 - $1\frac{3}{8}$	50	29.9	26.4	64.6	7.9	34.3	83.9	95.9	TBD	TBD	7830

Minimum Ultimate Strength = 4 x WLL

- The dimensions in this table are indicative only. A drawing will always be submitted prior to production and will be the leading document when discussing dimensions.
- Blocks shown here are standard models; inquiries for custom versions are welcome.
- Refer to wire rope manufacturers D/d ratio guideline.
- Optional: Hook locking pin.



SEE OUR WARNING & SAFETY
INFORMATION ON PAGES 134 - 146

OFFSHORE SPECIFIC CRANE BLOCKS

At Ropeblock we employ our Smart Engineering philosophy to design and calculate components dedicated to the offshore industry, such as special crane blocks, sheaves and swivels. Available with and without active heave compensation, these components can be used in, e.g., lattice boom cranes, knuckle boom cranes and heavy lift cranes.

Standard features include:

- Design factors in accordance with customer and third party specifications.

- Certification or classification in accordance with any IACS party or API is possible.
- 100% traceability of all load bearing parts (3.1 or 3.2).
- Fit for extremely low temperature applications.
- Can be made suitable for subsea depths up to 4,000 metres.
- C5-MM or higher quality coating.
- Forged high tensile steel EN/DIN hooks.
- Lockable heavy-duty safety latch.
- Cast sheaves featuring 'graphite lubrication'.
- High-quality, low-friction thrust bearing.
- ATEX proof on request.

PLEASE CONTACT US FOR MORE DETAILS

RECOMMENDED FINISH

Segment / application	ISO 12944 classification	Classification description	Expected protection duration	DFT (µm)
Construction	C2M	Slightly polluted atmosphere, predominately agriculture areas	5 to 15 year	120
Construction	C3M	Industrial and residential air pollution levels, with an average sulfurdioxide (IV) contamination level. Coastal areas with low salt content in air	2 to 5 year	120
Construction	C3M	Industrial and residential air pollution levels, with an average sulfurdioxide (IV) contamination level. Coastal areas with low salt content in air	5 to 15 year	160
Cargo handling	C3M	Industrial and residential air pollution levels, with an average sulfurdioxide (IV) contamination level. Coastal areas with low salt content in air	5 to 15 year	160
Cargo handling	C4H	Industrial areas and coastal areas with average salt content in air	more than 15 year	280
Cargo handling	C5-MM	Coastal areas and open sea with high salt content in air	5 to 15 year	280
Offshore	C4H	Industrial areas and coastal areas with average salt content in air	more than 15 year	300
Offshore	C5-MM	Coastal areas and open sea with high salt content in air	5 to 15 year	300
Offshore	C5-MH	Coastal areas and open sea with high salt content in air	more than 15 year	320
Offshore	NORSOK sys. 1*	Open sea with high salt content in air	more than 15 year	300





CARGO HANDLING- /MARITIME CRANE BLOCKS

The Ropeblock portfolio includes special blocks for cargo handling, especially on container ships, bulk carriers and general heavy and multi-purpose cargo ships. Our blocks are available in different classifications. Smart Engineering enables us to always come up with the optimum solution for your application and classification.

Standard features include:

- Different design factors are possible, depending on application and classification.

- Certification or classification in accordance with any IACS party is possible.
- 100% traceability of all load bearing parts (3.1 or 3.2).
- Forged high tensile steel EN/DIN hooks.
- Cast sheaves featuring 'graphite lubrication'.
- Standard with C3M coating, higher quality finishing available.
- High-quality, low-friction thrust bearing.

**PLEASE CONTACT YOUR SALES
REPRESENTATIVE FOR MORE DETAILS**

RECOMMENDED FINISH

Segment / application	ISO 12944 classification	Classification description	Expected protection duration	DFT (µm)
Construction	C2M	Slightly polluted atmosphere, predominately agriculture areas	5 to 15 year	120
Construction	C3M	Industrial and residential air pollution levels, with an average sulfur dioxide (IV) contamination level. Coastal areas with low salt content in air	2 to 5 year	120
Construction	C3M	Industrial and residential air pollution levels, with an average sulfur dioxide (IV) contamination level. Coastal areas with low salt content in air	5 to 15 year	160
Cargo handling	C3M	Industrial and residential air pollution levels, with an average sulfur dioxide (IV) contamination level. Coastal areas with low salt content in air	5 to 15 year	160
Cargo handling	C4H	Industrial areas and coastal areas with average salt content in air	more than 15 year	280
Cargo handling	C5-MM	Coastal areas and open sea with high salt content in air	5 to 15 year	280
Offshore	C4H	Industrial areas and coastal areas with average salt content in air	more than 15 year	300
Offshore	C5-MM	Coastal areas and open sea with high salt content in air	5 to 15 year	300
Offshore	C5-MH	Coastal areas and open sea with high salt content in air	more than 15 year	320
Offshore	NORSOK sys. 1*	Open sea with high salt content in air	more than 15 year	300





INDUSTRIAL SPECIFIC BLOCKS

This block type is always custom specific.

Depending on the particular application, the following features are available:

- Double-sealed maintenance-free roller bearings
- Compact design
- Protected grease fittings
- Durable reeve guards
- Forged high tensile steel EN/DIN hooks
- Cast sheaves, featuring graphite lubricated groove
- Motorized hook (optional)
- Temperature range depending on application
- C3M finish in signal yellow

**PLEASE CONTACT YOUR SALES
REPRESENTATIVE FOR MORE DETAILS**





OVERHAUL WEIGHTS

Many factors are relevant to determine minimum overhaul weights.

These factors include:

- Boom length or jib height
- Geometrical design of block and crown block
- Type of bearing
- Sheave diameters
- Wire rope type and construction
- Number of stationary sheaves outside the tackle
- Grease
- Operational temperatures

The overhaul weight is therefore established in collaboration with the crane manufacturer. For cranes with various boom configurations the overhaul weight can be set by means of interchangeable cheek weights.

PLEASE CONTACT US FOR MORE DETAILS





MISCELLANEOUS BLOCKS


Ropeblock offers a wide choice of standard blocks. Some were developed for general purposes, others for specific rigging equipment. Possible applications include routing or guiding wire rope, upending and wall tilt-up, and cargo handling on merchant vessels. The blocks presented in this catalog are off-the-shelf products that can be modified to meet specific customer needs.

Standard features include:


- Design factor 4:1
- Design acc. ASME B30.5, B30.10, B30.26
- D/d ration can be modified upon customer request
- With or without becket
- Bronze bushing
- For high speed purposes: roller bearings
- Painted in a suitable industrial coating

PLEASE CONTACT US FOR MORE DETAILS


THE ANATOMY OF A ROPEBLOCK BLOCK PRODUCT NUMBER

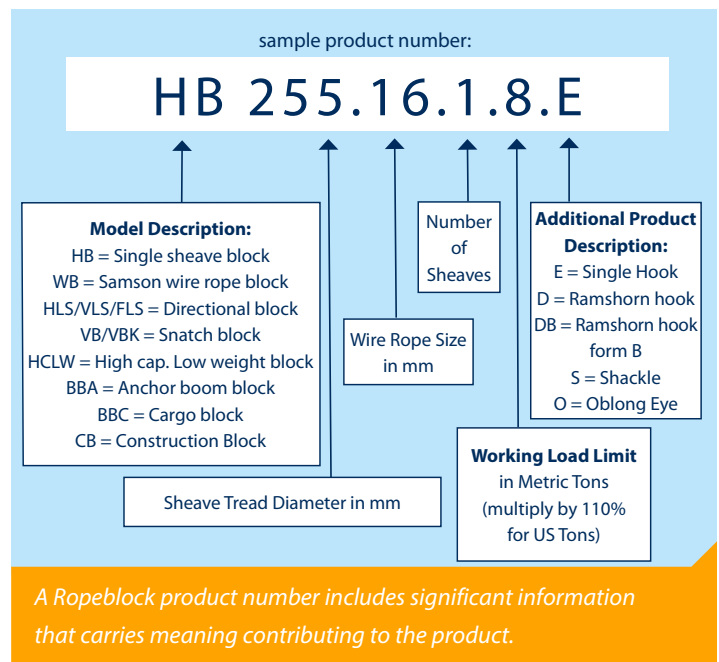

SINGLE SHEAVE BLOCKS

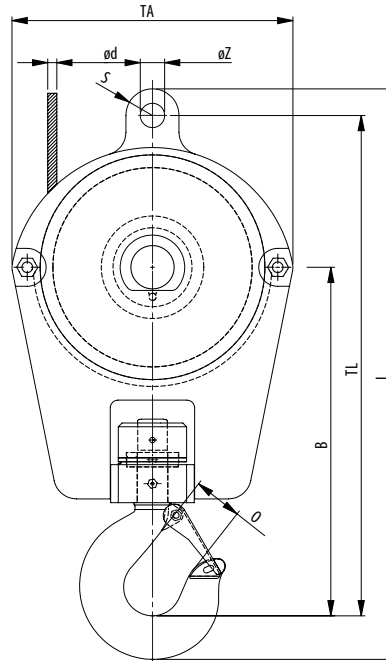

SINGLE ACTION HOOK

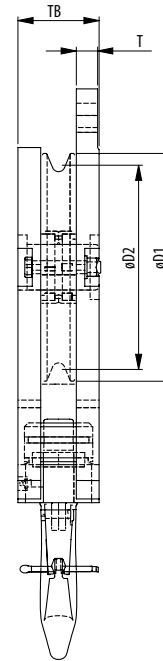

Model No.	WLL (USTons)	for wire ød (inch)	Dimensions (inch)										Weight (lbs)
			øD1	øD2	B	O	S	TA	TB	TL	T	øZ	
HB 210.11.1.5.E	5.5	7/16	9.84	8.27	13.70	1.34	1.18	12.60	4.06	20.59	0.79	1.06	90
HB 220.13.1.5.E	5.5	1/2	10.24	8.70	13.90	1.34	1.18	13.90	4.29	20.67	0.87	1.06	148
HB 220.14.1.8.E	8.8	9/16	10.24	8.58	15.35	1.69	1.38	12.99	4.76	22.48	1.10	1.26	176
HB 220.14.1.10.E	11	9/16	10.24	8.58	16.89	2.05	1.38	12.99	5.39	23.98	1.10	1.26	205
HB 255.13.1.8.E	8.8	1/2	11.81	10.04	16.77	1.69	1.18	14.57	3.98	24.45	0.87	1.06	196
HB 255.16.1.8.E	8.8	5/8	11.81	9.92	16.54	1.69	1.38	14.57	4.37	24.45	1.10	1.26	207
HB 255.16.1.10.E	11	5/8	11.81	9.92	18.07	2.05	1.38	14.57	5.00	25.94	1.10	1.26	201
HB 305.16.1.10.E	11	5/8	13.78	12.01	19.65	2.05	1.38	17.13	4.21	29.09	1.10	1.30	249
HB 345.18.1.12.E	13.2	11/16	15.75	13.58	21.93	2.24	1.77	19.69	4.92	32.76	1.38	1.46	357
HB 390.20.1.16.E	17.6	13/16	17.72	15.35	23.31	2.24	1.97	21.65	5.16	36.10	1.38	1.69	454
HB 430.22.1.20.E	22	7/8	19.69	16.93	23.31	2.99	1.97	23.62	5.83	40.63	1.57	1.69	626

Minimum Ultimate Strength = 4 x WLL

- Standard fitted with becket, cylindrical roller bearing and reeving guide.
- Standard fitted with swivel only hook (319AN style), including safety latch and split pin. Standard painted yellow (no striping).
- This crane block may be used with 2 lines only as well.
- Third party testing with certification available upon request.
- Sheaves may be adjustud for other wire rope diameters.
- Becket suitable for connecting Open Wedge Socket for indicated wire rope diameter.




SEE OUR WARNING & SAFETY
INFORMATION ON PAGES 134 - 146



CONSTRUCTION BLOCK WITH SHACKLE

1 SHEAVE

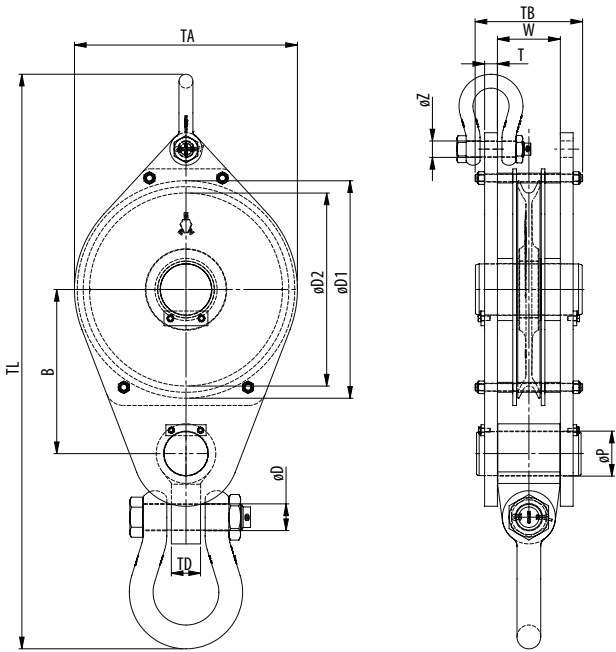

Model No.	WLL (UStons)	For wire ød (inch)	Dimensions (inch)												Weight (lbs)
			øD1	øD2	B	øD	øP	TD	øZ	T	TA	TB	TL	W	
CB 260.xx.1.18,5	20	½ - ⅝	11.8	10.2	10.1	1.8	2.4	1.4	1.1	0.8	12.2	7.5	35.3	4.2	165
CB 320.xx.1.27,5	30	⅝ - ¾	14.4	12.6	11.7	2.1	2.8	1.8	1.2	1.0	14.8	8.4	41.2	4.7	279
CB 355.xx.1.36,5	40	¾ - 7⁄8	16.1	14.0	13.4	2.4	3.9	2.4	1.6	1.2	16.5	9.9	48.3	5.8	452
CB 400.xx.1.45	50	¾ - 1	18.1	15.7	14.5	2.7	3.9	2.6	1.6	1.2	18.5	10.2	52.5	5.8	568
CB 450.xx.1.55	60	7⁄8 - 1⅛	20.3	17.7	16.1	2.9	4.7	3.1	1.8	1.4	20.9	11.6	58.7	6.8	835
CB 528.xx.1.64	70	7⁄8 - 1¼	23.4	20.8	17.7	2.9	4.7	3.1	1.8	1.4	24.0	11.6	61.9	6.8	1009
CB 575.xx.1.73	80	1 - 1⅞	25.6	22.6	19.4	3.4	5.5	4.3	2.1	1.6	26.4	13.3	71.2	7.8	1436
CB 630.xx.1.82	90	1 - 1½	28.0	24.8	20.6	3.4	5.5	4.3	2.1	1.6	28.7	13.3	73.6	7.8	1563

Minimum Ultimate Strength = 4 x WLL

- Standard delivered with bronze bearing
- The dimensions in this table are indicative only. A drawing will always be submitted prior production and will be the leading document when discussing dimensions.
- Blocks shown here are standard models; inquiries for custom versions are welcome.
- Refer to wire rope manufacturers D/d ratio guideline.



SEE OUR WARNING & SAFETY
INFORMATION ON PAGES 134 - 146

Optional

With hanger

With pin

With swivel eye


With swivel jaw



CONSTRUCTION BLOCK WITH SHACKLE

2 SHEAVE

MISCELLANEOUS BLOCKS

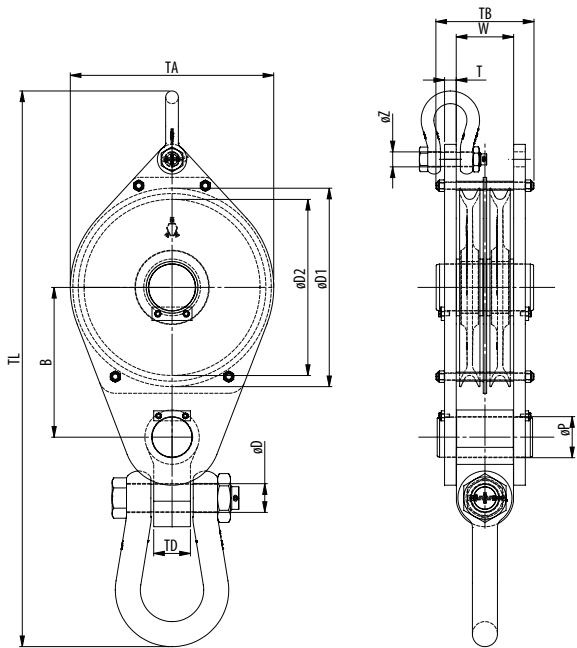

Model No.	WLL (UStons)	For wire ød (inch)	Dimensions (inch)												Weight (lbs)
			øD1	øD2	B	øD	øP	TD	øZ	T	TA	TB	TL	W	
CB 260.xx.2.27,5	30	½ - ⅝	11.8	10.2	10.1	2.1	2.4	1.8	1.1	0.8	12.2	7.5	37.3	4.2	194
CB 320.xx.2.41	45	⅝ - ¾	14.4	12.6	11.7	2.4	2.8	2.4	1.2	1.0	14.8	8.4	42.4	4.7	315
CB 355.xx.2.55	60	¾ - ⅞	16.1	14.0	13.4	2.9	3.9	3.1	1.6	1.2	16.5	9.9	52.3	5.8	520
CB 400.xx.2.68	75	¾ - 1	18.1	15.7	14.5	2.9	3.9	3.1	1.6	1.2	18.5	10.2	54.7	5.8	628
CB 450.xx.2.82	90	⅞ - 1⅛	20.3	17.7	16.1	3.4	4.7	4.3	1.8	1.4	20.9	11.6	62.4	6.8	940
CB 528.xx.2.100	110	⅞ - 1¼	23.4	20.8	17.7	3.4	4.7	4.3	1.8	1.4	24.0	11.6	65.6	6.8	1130
CB 575.xx.2.114	126	1 - 1⅞	25.6	22.6	19.4	3.9	5.5	4.7	2.1	1.6	26.4	13.3	75.9	7.8	1645
CB 630.xx.2.127	140	1 - 1½	28.0	24.8	20.6	3.9	5.5	4.7	2.1	1.6	28.7	13.3	78.3	7.8	1739

Minimum Ultimate Strength = 4 x WLL

- Standard delivered with bronze bearing
- The dimensions in this table are indicative only. A drawing will always be submitted prior production and will be the leading document when discussing dimensions.
- Blocks shown here are standard models; inquiries for custom versions are welcome.
- Refer to wire rope manufacturers D/d ratio guideline.



SEE OUR WARNING & SAFETY
INFORMATION ON PAGES 134 - 146

Optional

With hanger

With pin

With swivel eye

With swivel jaw




SEE OUR WARNING AND SAFETY INFORMATION ON PAGE 134



CONSTRUCTION BLOCK WITH SHACKLE

3 SHEAVE

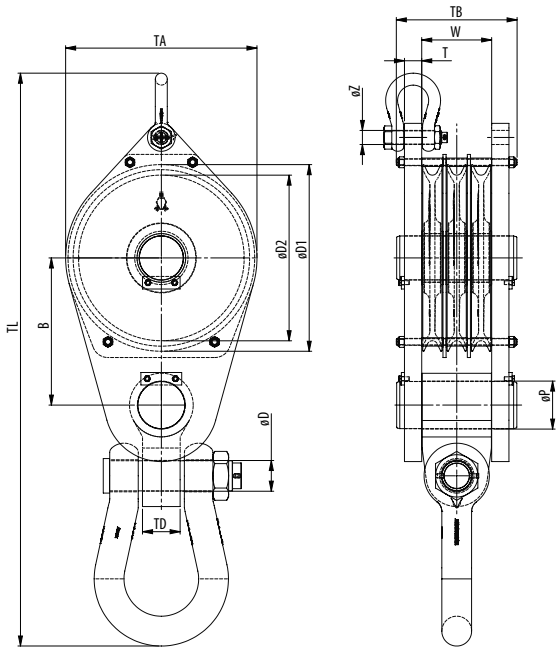

Model No.	WLL (UStons)	For wire ød (inch)	Dimensions (inch)												Weight (lbs)
			øD1	øD2	B	øD	øP	TD	øZ	T	TA	TB	TL	W	
CB 260.xx.3.36,5	40	1/2 - 5/8	11.8	10.2	10.7	2.4	3.1	2.4	1.1	1.2	12.2	9.9	39.6	5.8	298
CB 320.xx.3.55	60	5/8 - 3/4	14.4	12.6	12.5	2.9	3.9	3.1	1.2	1.4	14.8	11.3	48.0	6.8	509
CB 355.xx.3.73	80	3/4 - 7/8	16.1	14.0	14.1	3.4	5.1	4.3	1.6	1.8	16.5	13.1	57.6	7.8	825
CB 400.xx.3.91	100	3/4 - 1	18.1	15.7	15.3	3.4	5.1	4.3	1.6	1.8	18.5	13.4	59.9	7.8	988
CB 450.xx.3.110	121	7/8 - 1 1/8	20.3	17.7	16.9	3.9	5.9	4.7	1.8	2.2	20.9	15.2	68.7	8.8	1513
CB 528.xx.3.127	140	7/8 - 1 1/4	23.4	20.8	18.5	3.9	5.9	4.7	1.8	2.2	24.0	15.2	71.9	8.8	1813
CB 575.xx.3.145	160	1 - 1 1/16	25.6	22.6	20.2	4.4	6.7	5.5	2.1	2.4	26.4	17.6	79.1	10.5	2510
CB 630.xx.3.165	182	1 - 1 1/2	28.0	24.8	21.4	4.4	6.7	5.5	2.1	2.4	28.7	17.6	81.5	10.5	2656

Minimum Ultimate Strength = 4 x WLL

- Standard delivered with bronze bearing
- The dimensions in this table are indicative only. A drawing will always be submitted prior production and will be the leading document when discussing dimensions.
- Blocks shown here are standard models; inquiries for custom versions are welcome.
- Refer to wire rope manufacturers D/d ratio guideline.



SEE OUR WARNING & SAFETY
INFORMATION ON PAGES 134 - 146

Optional

With hanger

With pin

With swivel eye


With swivel jaw



CONSTRUCTION BLOCK WITH SHACKLE

4 SHEAVE

MISCELLANEOUS BLOCKS

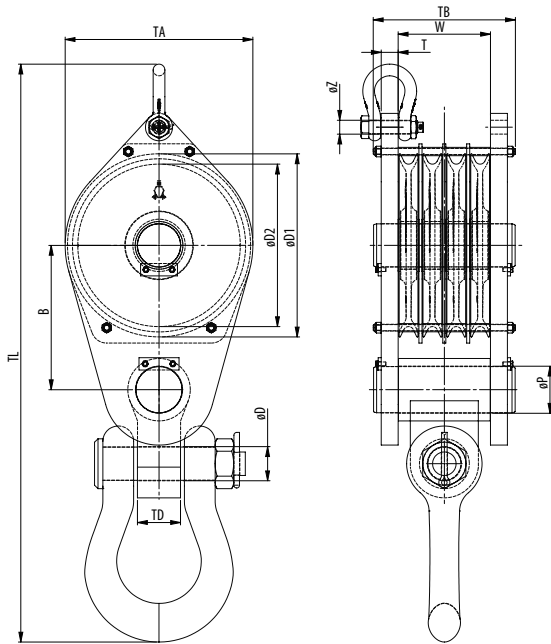

Model No.	WLL (UStons)	For wire ød (inch)	Dimensions (inch)												Weight (lbs)
			øD1	øD2	B	øD	øP	TD	øZ	T	TA	TB	TL	W	
CB 260.xx.4.41	45	1/2 - 5/8	11.8	10.2	10.7	2.4	3.1	2.4	1.1	1.2	12.2	11.9	39.6	7.8	334
CB 320.xx.4.64	70	5/8 - 3/4	14.4	12.6	12.5	2.9	3.9	3.1	1.2	1.4	14.8	12.3	48.0	7.8	554
CB 355.xx.4.82	90	3/4 - 7/8	16.1	14.0	14.1	3.4	5.1	4.3	1.6	1.8	16.5	15.7	57.6	10.5	918
CB 400.xx.4.105	116	3/4 - 1	18.1	15.7	15.3	3.4	5.1	4.3	1.6	1.8	18.5	16.1	59.9	10.5	1109
CB 450.xx.4.127	140	7/8 - 1 1/8	20.3	17.7	16.9	3.9	5.9	4.7	1.8	2.2	20.9	18.2	68.7	11.8	1690
CB 528.xx.4.150	165	7/8 - 1 1/4	23.4	20.8	18.5	4.4	5.9	5.5	1.8	2.2	24.0	18.2	73.5	11.8	2176
CB 575.xx.4.173	191	1 - 1 1/16	25.6	22.6	20.2	4.4	6.7	5.5	2.1	2.4	26.4	21.0	79.1	13.9	2809
CB 630.xx.4.191	210	1 - 1 1/2	28.0	24.8	21.4	5.2	6.7	5.5	2.1	2.4	28.7	21.0	87.4	13.9	3153

Minimum Ultimate Strength = 4 x WLL

- Standard delivered with bronze bearing
- The dimensions in this table are indicative only. A drawing will always be submitted prior production and will be the leading document when discussing dimensions.
- Blocks shown here are standard models; inquiries for custom versions are welcome.
- Refer to wire rope manufacturers D/d ratio guideline.



SEE OUR WARNING & SAFETY
INFORMATION ON PAGES 134 - 146

Optional

With hanger

With pin

With swivel eye

With swivel jaw




SEE OUR WARNING AND SAFETY INFORMATION ON PAGE 134



CONSTRUCTION BLOCK WITH SHACKLE

5 SHEAVE

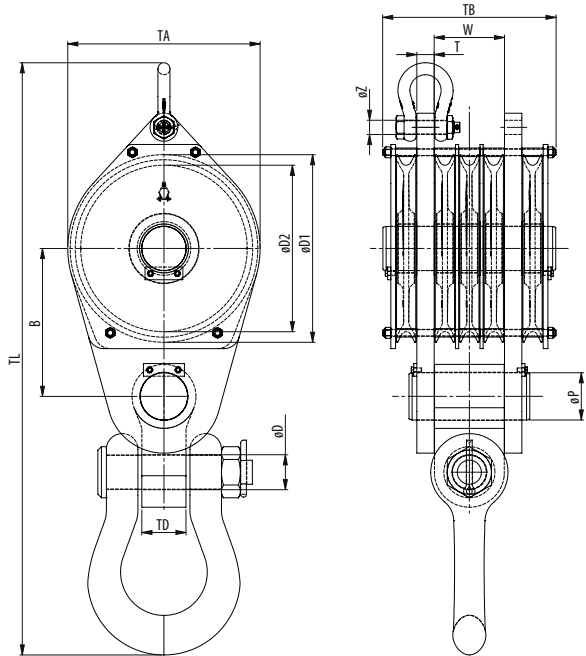

Model No.	WLL (UStons)	For wire ød (inch)	Dimensions (inch)												Weight (lbs)
			øD1	øD2	B	øD	øP	TD	øZ	T	TA	TB	TL	W	
CB 260.xx.5.50	55	1/2 - 5/8	11.8	10.2	10.7	2.7	3.1	2.6	1.1	1.2	12.2	14.8	41.4	5.8	412
CB 320.xx.5.73	80	5/8 - 3/4	14.4	12.6	12.5	3.4	3.9	4.3	1.2	1.4	14.8	16.1	51.7	6.8	713
CB 355.xx.5.95	105	3/4 - 7/8	16.1	14.0	14.1	3.4	5.1	4.3	1.6	1.8	16.5	19.0	57.6	7.8	993
CB 400.xx.5.120	132	3/4 - 1	18.1	15.7	15.3	3.9	5.1	4.7	1.6	1.8	18.5	19.3	64.7	7.8	1352
CB 450.xx.5.145	160	7/8 - 1 1/8	20.3	17.7	16.9	4.4	5.9	5.5	1.8	2.2	20.9	21.7	70.4	8.8	1971
CB 528.xx.5.173	191	7/8 - 1 1/4	23.4	20.8	18.5	4.4	5.9	5.5	1.8	2.2	24.0	21.7	73.5	8.8	2366
CB 575.xx.5.191	210	1 - 1 1/16	25.6	22.6	20.2	5.2	6.7	5.5	2.1	2.4	26.4	25.1	85.0	10.5	3267
CB 630.xx.5.220	243	1 - 1 1/2	28.0	24.8	21.4	5.2	6.7	5.5	2.1	2.4	28.7	25.1	87.4	10.5	3403

Minimum Ultimate Strength = 4 x WLL

- Standard delivered with bronze bearing
- The dimensions in this table are indicative only. A drawing will always be submitted prior production and will be the leading document when discussing dimensions.
- Blocks shown here are standard models; inquiries for custom versions are welcome.
- Refer to wire rope manufacturers D/d ratio guideline.



SEE OUR WARNING & SAFETY
INFORMATION ON PAGES 134 - 146

Optional

With hanger

With pin

With swivel eye


With swivel jaw



CONSTRUCTION BLOCK WITH SHACKLE

6 SHEAVE

MISCELLANEOUS BLOCKS

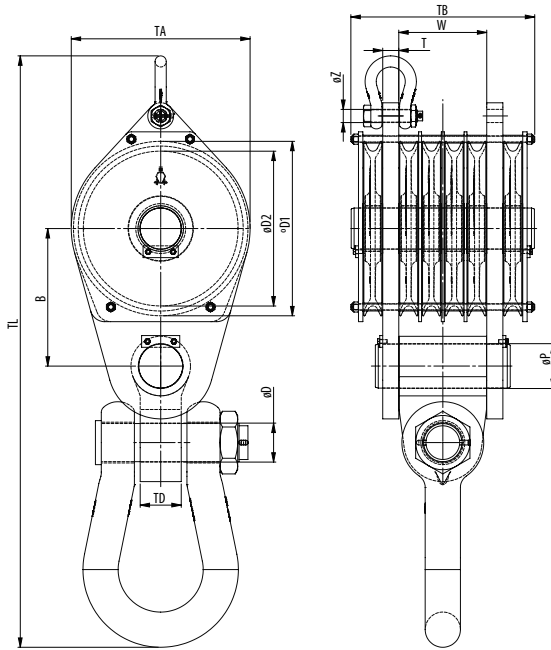

Model No.	WLL (UStons)	For wire ød (inch)	Dimensions (inch)												Weight (lbs)
			øD1	øD2	B	øD	øP	TD	øZ	T	TA	TB	TL	W	
CB 260.xx.6.55	60	1/2 - 5/8	11.8	10.2	10.7	2.9	3.1	3.1	1.1	1.2	12.2	16.7	43.6	7.8	481
CB 320.xx.6.82	90	5/8 - 3/4	14.4	12.6	12.5	3.4	3.9	4.3	1.2	1.4	14.8	17.1	51.7	7.8	758
CB 355.xx.6.110	121	3/4 - 7/8	16.1	14.0	14.1	3.9	5.1	4.7	1.6	1.8	16.5	21.7	62.3	10.5	1215
CB 400.xx.6.132	146	3/4 - 1	18.1	15.7	15.3	3.9	5.1	4.7	1.6	1.8	18.5	22.0	64.7	10.5	1472
CB 450.xx.6.160	176	7/8 - 1 1/8	20.3	17.7	16.9	4.4	5.9	5.5	1.8	2.2	20.9	24.7	70.4	11.8	2147
CB 528.xx.6.191	211	7/8 - 1 1/4	23.4	20.8	18.5	5.2	5.9	5.5	1.8	2.2	24.0	24.7	79.4	11.8	2792
CB 575.xx.6.220	243	1 - 1 1/16	25.6	22.6	20.2	5.2	6.7	5.5	2.1	2.4	26.4	28.5	85.0	13.9	3566
CB 630.xx.6.240	265	1 - 1 1/2	28.0	24.8	21.4	5.6	6.7	5.9	2.1	2.4	28.7	28.5	90.0	13.9	3837

Minimum Ultimate Strength = 4 x WLL

- Standard delivered with bronze bearing
- The dimensions in this table are indicative only. A drawing will always be submitted prior production and will be the leading document when discussing dimensions.
- Blocks shown here are standard models; inquiries for custom versions are welcome.
- Refer to wire rope manufacturers D/d ratio guideline.



SEE OUR WARNING & SAFETY
INFORMATION ON PAGES 134 - 146

Optional

With hanger

With pin



With swivel eye

With swivel jaw



SAMSON WIRE ROPE BLOCKS

1 SHEAVE

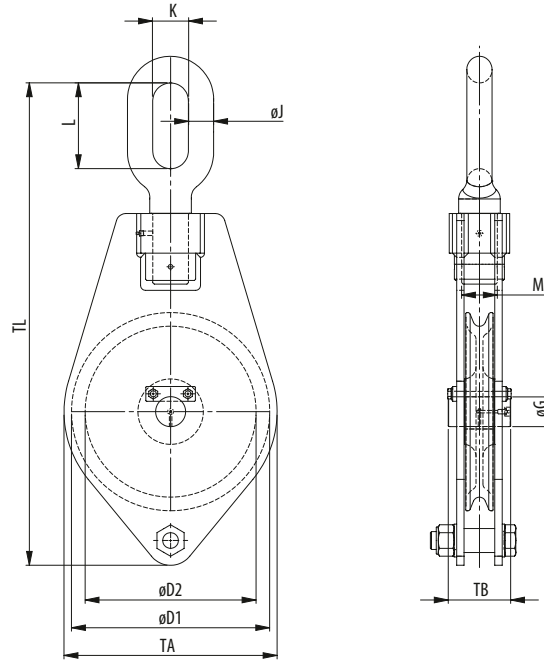

- Hook
- Jaw
- Stud eye
- Roller bearings
- Becket


Model No. (+B for w. becket)	WLL (UStons)	for wire ød (inch)	Dimensions (inch)										Weight (lbs)
			øD1	øD2	øG	øJ	K	L	M	TA	TB	TL	
WB 80.8.1.0.75.O	0.8	5/16	3.94	3.15	0.59	0.47	0.83	1.89	0.63	4.33	1.77	10.83	4
WB 105.10.1.1.0	1.1	3/8	4.92	4.13	0.87	0.63	1.02	2.28	0.71	5.31	2.05	13.23	7
WB 120.12.1.2.0	2.2	1/2	5.91	4.72	1.18	0.63	1.02	2.28	0.94	6.69	2.91	16.02	13
WB 165.14.1.3.0	3.3	5/16	7.87	6.50	1.18	0.83	1.26	2.83	1.18	8.66	2.91	19.69	22
WB 210.18.1.4.0	4.4	11/16	9.84	8.27	1.38	1.02	1.57	3.70	1.30	10.63	3.19	23.94	40
WB 255.20.1.6.0	6.6	13/16	11.81	10.04	1.57	1.14	1.77	4.25	1.65	12.60	3.46	27.80	60
WB 305.22.1.8.0	8.8	7/8	13.78	12.01	1.77	1.26	1.93	4.49	1.77	14.96	3.62	30.63	97
WB 305.22.1.10.0	11.0	7/8	13.78	12.01	1.97	1.42	2.13	4.92	2.05	14.96	4.33	31.30	110
WB 345.24.1.10.0	11.0	15/16	15.75	13.58	1.97	1.42	2.13	4.92	2.05	16.93	4.33	33.39	132
WB 305.22.1.12.0	13.2	7/8	13.78	12.01	1.97	1.61	2.36	5.67	2.20	14.96	4.49	32.32	130
WB 345.24.1.12.0	13.2	15/16	15.75	13.58	2.36	1.61	2.36	5.67	2.20	16.93	4.65	36.46	165
WB 305.22.1.16.0	17.6	7/8	13.78	12.01	1.97	1.81	2.60	6.42	2.52	14.96	4.49	34.61	152
WB 345.24.1.16.0	17.6	15/16	15.75	13.58	2.36	1.81	2.60	6.42	2.52	16.93	4.65	37.76	179
WB 345.24.1.20.0	22.0	15/16	15.75	13.58	2.36	2.01	2.83	6.81	2.83	16.93	4.65	38.98	214
WB 390.28.1.20.0	22.0	1 1/8	17.72	15.35	2.76	2.01	2.83	6.81	2.83	18.90	5.04	41.18	240
WB 390.28.1.25.0	27.6	1 1/8	17.72	15.35	2.76	2.36	3.15	7.68	2.99	18.90	5.04	43.50	287
WB 390.28.1.30.0	33.1	1 1/8	17.72	15.35	2.76	2.36	3.54	8.66	3.15	18.90	5.28	45.08	331

Minimum Ultimate Strength = 5 x WLL

WLL= Working Load Limit on head fitting.

- All blocks up to 30 tons are standard supplied with swivel oval eye, for over 30 tons with swivel stud eye.
- All blocks can be supplied with swivel hook, swivel stud eye or swivel jaw.
- Standard supplied with bronze bearings.
- Other bearings available on request.
- Groove in sheave may be adjusted to other wire rope diameters.

SEE OUR WARNING & SAFETY
INFORMATION ON PAGES 134 - 146

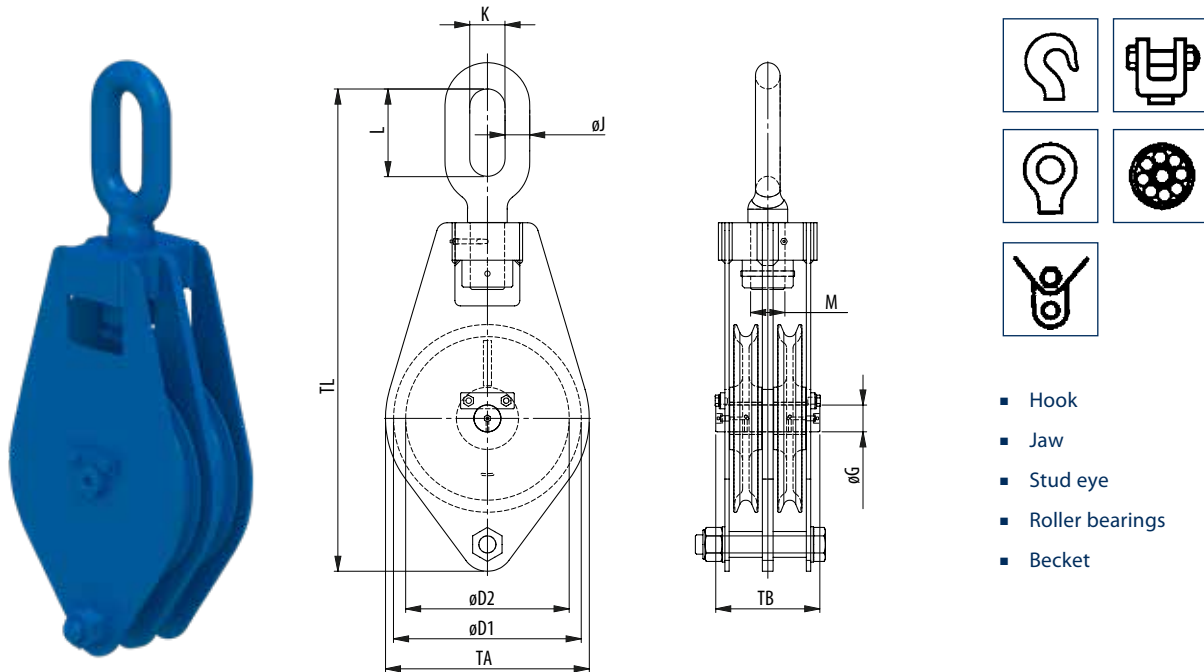

Model No. (+B for w. becket)	WLL (UStons)	for wire ød (inch)	Dimensions (inch)										Weight (lbs)
			øD1	øD2	øG	øJ	K	L	M	TA	TB	TL	
WB 80.8.2.1.O	1.1	5/16	3.94	3.15	0.59	0.63	1.02	2.28	0.71	4.33	2.76	11.61	9
WB 105.10.2.1.5.O	1.7	3/8	4.92	4.13	0.87	0.63	1.02	2.28	0.94	5.31	3.35	13.23	13
WB 120.12.2.3.O	3.3	1/2	5.91	4.72	1.18	0.83	1.26	2.83	1.18	6.69	4.72	16.93	24
WB 165.14.2.4.O	4.4	5/16	7.87	6.50	1.18	1.02	1.57	3.70	1.30	8.66	4.72	21.18	40
WB 210.18.2.6.O	6.6	11/16	9.84	8.27	1.38	1.14	1.77	4.25	1.65	10.63	5.24	24.57	71
WB 255.20.2.8.O	8.8	13/16	11.81	10.04	1.57	1.26	1.93	4.49	1.77	12.60	5.75	28.07	95
WB 305.22.2.10.O	11.0	7/8	13.78	12.01	1.77	1.42	2.13	4.92	2.05	14.96	5.98	22.40	163
WB 305.22.2.12.O	13.2	7/8	13.78	12.01	1.97	1.61	2.36	5.67	2.20	14.96	7.32	32.32	179
WB 345.24.2.12.O	13.2	15/16	15.75	13.58	1.97	1.61	2.36	5.67	2.20	16.93	7.09	35.16	225
WB 305.22.2.16.O	17.6	7/8	13.78	12.01	1.97	1.81	2.60	6.42	2.52	14.96	7.32	34.61	216
WB 345.24.2.16.O	17.6	15/16	15.75	13.58	2.36	1.81	2.60	6.42	2.52	16.93	7.56	37.76	278
WB 305.22.2.20.O	22.0	7/8	13.78	12.01	1.97	2.01	2.83	6.81	2.83	14.96	7.32	35.28	256
WB 345.24.2.20.O	22.0	15/16	15.75	13.58	2.36	2.01	2.83	6.81	2.83	16.93	7.56	38.43	322
WB 345.24.2.25.O	27.6	15/16	15.75	13.58	2.36	2.36	3.15	7.68	2.99	16.93	7.56	41.93	373
WB 390.28.2.25.O	27.6	1 1/8	17.72	15.35	2.76	2.36	3.15	7.68	2.99	18.90	8.70	44.09	419
WB 345.24.2.30.O	33.1	15/16	15.75	13.58	2.36	2.36	3.54	8.66	3.15	16.93	7.56	43.11	406
WB 390.28.2.30.O	33.1	1 1/8	17.72	15.35	2.76	2.36	3.54	8.66	3.15	18.90	9.29	45.28	450
WB 390.28.2.40.O	44.1	1 1/8	17.72	15.35	2.76	-	3.78	3.78	3.54	18.90	9.29	40.55	496

Minimum Ultimate Strength = 5 x WLL

WLL= Working Load Limit on head fitting.

- All blocks up to 30 tons are standard supplied with swivel oval eye, for over 30 tons with swivel stud eye.
- All blocks can be supplied with swivel hook, swivel stud eye or swivel jaw.
- Standard supplied with bronze bearings.
- Other bearings available on request.
- Groove in sheave may be adjusted to other wire rope diameters.




SEE OUR WARNING & SAFETY
INFORMATION ON PAGES 134 - 146



SAMSON WIRE ROPE BLOCKS

3 SHEAVES

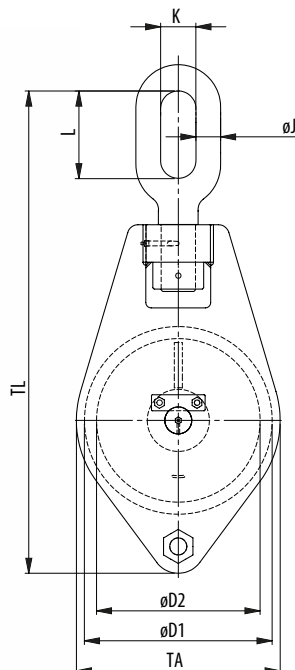

- Hook
- Jaw
- Stud eye
- Roller bearings
- Becket

Model No. (+B for w. becket)	WLL (UStons)	for wire ød (inch)	Dimensions (inch)										Weight (lbs)
			øD1	øD2	G	øJ	K	L	M	TA	TB	TL	
WB 105.10.3.2.O	2.2	3/8	4.92	4.13	0.87	0.63	1.02	2.28	0.94	5.31	4.72	13.23	20
WB 120.12.3.4.O	4.4	1/2	5.91	4.72	1.18	1.02	1.57	3.70	1.30	6.69	6.54	18.43	37
WB 165.14.3.6.O	6.6	9/16	7.87	6.50	1.18	1.14	1.77	4.25	1.65	8.66	6.54	21.89	62
WB 210.18.3.8.O	8.8	1 1/16	9.84	8.27	1.38	1.26	1.93	4.49	1.77	10.63	7.28	24.92	101
WB 255.20.3.10.O	11.0	1 3/16	11.81	10.04	1.57	1.42	2.13	4.92	2.05	12.60	8.03	28.86	152
WB 305.22.3.12.O	13.2	7/8	13.78	12.01	1.77	1.61	2.36	5.67	2.20	14.96	8.35	32.40	218
WB 305.24.3.16.O	17.6	1 5/16	13.78	12.01	1.97	1.81	2.60	6.42	2.52	14.96	10.16	34.65	265
WB 345.24.3.16.O	17.6	1 5/16	15.75	13.58	1.97	1.81	2.60	6.42	2.52	16.93	9.84	36.50	346
WB 305.24.3.20.O	22.0	1 5/16	13.78	12.01	1.97	2.01	2.83	6.81	2.83	14.96	10.16	35.28	315
WB 345.24.3.20.O	22.0	1 5/16	15.75	13.58	2.36	2.01	2.83	6.81	2.83	16.93	10.47	39.61	406
WB 305.24.3.25.O	27.6	1 5/16	13.78	12.01	1.97	2.36	3.15	7.68	2.99	14.96	10.47	37.60	375
WB 345.24.3.25.O	27.6	1 5/16	15.75	13.58	2.36	2.36	3.15	7.68	2.99	16.93	10.47	41.93	437
WB 390.28.3.25.O	27.6	1 1/8	17.72	15.35	2.76	2.36	3.15	7.68	2.99	18.90	11.65	44.09	485
WB 345.28.3.30.O	33.1	1 1/8	15.75	13.58	2.36	2.36	3.54	8.66	3.15	16.93	10.47	43.11	474
WB 390.28.3.30.O	33.1	1 1/8	17.72	15.35	2.76	2.36	3.54	8.66	3.15	18.90	11.65	44.88	562
WB 345.28.3.40.O	44.1	1 1/8	15.75	13.58	2.36	-	3.78	3.78	3.54	16.93	10.94	37.20	551
WB 390.28.3.40.O	44.1	1 1/8	17.72	15.35	2.76	-	3.78	3.78	3.54	18.90	12.13	40.55	650
WB 390.28.3.50.O	55.1	1 1/8	17.72	15.35	2.95	-	4.17	4.17	3.94	18.90	13.31	41.54	739

Minimum Ultimate Strength = 5 x WLL

WLL= Working Load Limit on head fitting.

- All blocks up to 30 tons are standard supplied with swivel oval eye, for over 30 tons with swivel stud eye.
- All blocks can be supplied with swivel hook, swivel stud eye or swivel jaw.
- Standard supplied with bronze bearings.
- Other bearings available on request.
- Groove in sheave may be adjusted to other wire rope diameters.



SEE OUR WARNING & SAFETY
INFORMATION ON PAGES 134 - 146





GENERAL CATALOG

LIFTING PRODUCTS

MILLERTM
LIFTING PRODUCTS

High Quality Lifting Products since 1935
www.millerproducts.net

BLOCKS- HI-LIFT BLOCKS

Wide capacity range available

- Standard capacities to 300T
- Design factor 4:1
- Larger capacities available
- Sheaves from 8" to 36"
- Wire rope sizes to 1 3/4"

Hooks- high quality forged alloy steel

- Per DIN 15401 or DIN 15402
- Other hook standards available
- Heavy duty thrust bearing
- Dual motion- swing plus 360° rotation
- Safety latch on all hooks
- Double and other hooks available

Heavy welded steel plate construction


- provides rigidity and strength for longer life
- Designed for shortest possible overall length
- Enclosed sheave guard for easier threading- eliminates possibility of rope jumping sheave
- "H" models provide additional overhaul weight with detachable steel cheek plates
- "T" and "TF", extended or standard side plates- on 24" sheave models

Bearings and sheaves

- For sheave sizes 20" and below, hardened and ground sheave pin with roller bearings
- For sheaves 24" and higher, tapered roller bearings with lip seals on alloy steel sheave pin
- Bronze bushings optional
- Individual sheave lubrication for assured grease penetration.
- Heavy duty cast steel sheaves standard, roll formed/welded sheaves available
- Bronze spacers between sheaves eliminate galling


Options available

- Double hooks
- Higher load capacities
- Fittings other than hook
- Hook rotation locking device
- Third party certifications
- Cast hooks (quad)
- Custom

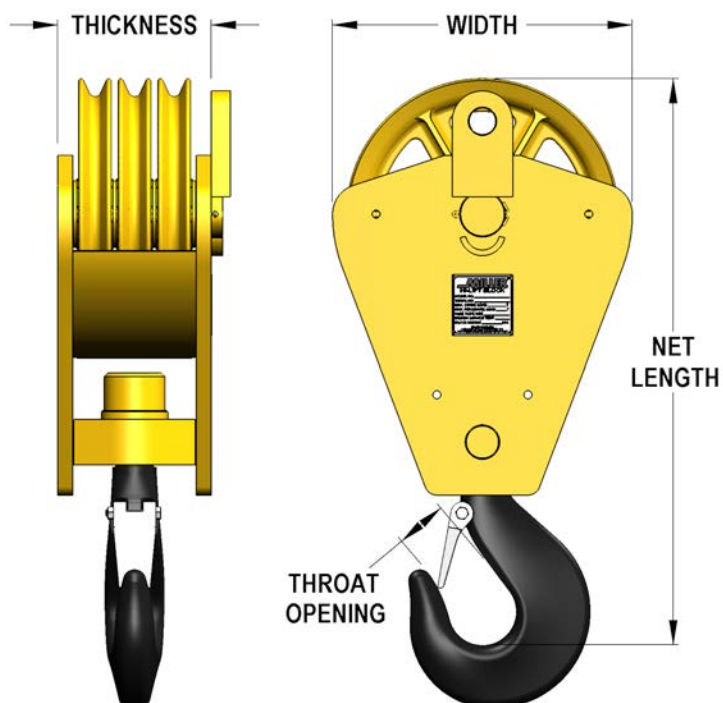

BLOCKS- HI-LIFT BLOCKS


MILLER Block Model Number Key					
#	##	XX	-	###	- XX
(Number of Sheaves)	(Sheave Outside Diameter (in))*	(Configuration)**		(Working load limit)***	(Special Designation)****
*Standard Outside Diameter Sheave Range from 8 to 36" **Block Configuration Options: F - Roller Bearing Mounted Sheaves, Low Profile Side Plates H - Roller Bearing Mounted Sheaves, Low Profile Side Plates, Cheek weights TF - Tapered Roller Bearing Mounted Sheaves, Low Profile Side Plates T - Tapered Roller Bearing Mounted Sheaves, Extended Side Plates ***Working Load Limit Range from 5 to 300T ****Special Designations: RT - Round Top Side Plates LD - Locking Device, 4 Positions					
****Specify Wire Rope Size When Ordering****					

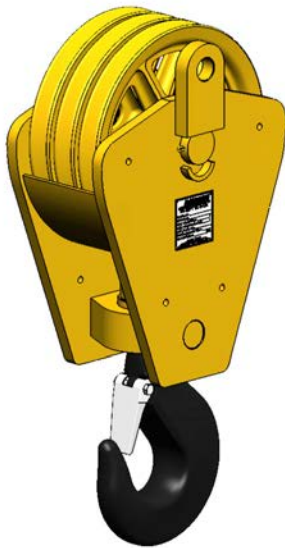

MODEL NO: 318F40
-3 SHEAVES, 18" DIAMETER
-LOW PROFILE SIDE PLATES
-40 TON WLL



MODEL NO: 520H80
-5 SHEAVES, 20" DIAMETER
-CHEEK WEIGHTS
-80 TON WLL

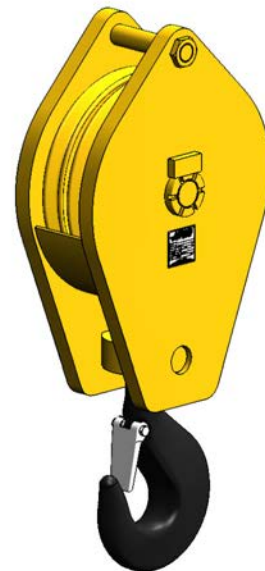

MODEL NO: 224T50
-2 SHEAVES, 24" DIAMETER
-EXTENDED SIDE PLATES
-50 TON WLL



BLOCKS- HI-LIFT BLOCKS

5 TON

WLL* Tons	Model Number	SHEAVE DIA. (in.)	# OF SHEAVES	THICKNESS (in.)	WIDTH (in.)	NET LENGTH (in.)	THROAT OPENING (in.)	SHEAVE PIN DIA. (in.)	STD WIRE ROPE DIA. (in.)	Weight Lbs.
5	108F5	8	1	5.75	9.5	17.5	1.88	1.63	7/16	70
5	108H5	8	1	8.75	9.5	17.5	1.88	1.63	7/16	120
5	110F5	10	1	9.5	11.5	19	1.88	1.63	9/16	90
5	110H5	10	1	13	11.5	19	1.88	1.63	9/16	160
5	112F5	12	1	7.5	13.5	22.5	1.88	2.5	5/8	140
5	112H5	12	1	10.5	13.5	22.5	1.88	2.5	5/8	240
5	114F5	14	1	7.5	15.5	27.06	1.88	2.5	3/4	160
5	114H5	14	1	11	15.5	27.06	1.88	2.5	3/4	320
5	208F5	8	2	5.75	9.5	19.75	1.88	1.63	7/16	80
5	208H5	8	2	8.75	9.5	19.75	1.88	1.63	7/16	130

10 TON

WLL* Tons	Model Number	SHEAVE DIA (in.)	# OF SHEAVES	THICKNESS (in.)	WIDTH (in.)	NET LENGTH (in.)	THROAT OPENING (in.)	SHEAVE PIN DIA. (in.)	STD WIRE ROPE DIA. (in.)	Weight Lbs.
10	108F10	8	1	5.75	9.5	19.75	2.5	1.63	7/16	80
10	108H10	8	1	8.75	9.5	19.75	2.5	1.63	7/16	130
10	110F10	10	1	6	11.5	22	2.5	1.63	9/16	100
10	110H10	10	1	9.5	11.5	22	2.5	1.63	9/16	170
10	112F10	12	1	7.5	13.5	24.75	2.5	2.5	5/8	150
10	112H10	12	1	10.5	13.5	24.75	2.5	2.5	5/8	250
10	114F10	14	1	7.5	15.5	27.75	2.5	2.5	3/4	170
10	114H10	14	1	11	15.5	27.75	2.5	2.5	3/4	330
10	116F10	16	1	8.75	17.5	30.56	2.5	3	7/8	250
10	116H10	16	1	13.75	17.5	30.56	2.5	3	7/8	490
10	118F10	18	1	8.75	19.5	32.75	2.5	3	7/8	285
10	118H10	18	1	12.75	19.5	32.75	2.5	3	7/8	585
10	208F10	8	2	5.75	9.5	19.75	2.5	1.63	7/16	85
10	208H10	8	2	8.75	9.5	19.75	2.5	1.63	7/16	135
10	210F10	10	2	6	11.5	22	2.5	1.63	9/16	110
10	210H10	10	2	9.5	11.5	22	2.5	1.63	9/16	180
10	212F10	12	2	7.5	13.5	24.75	2.5	2.5	5/8	165
10	212H10	12	2	10.5	13.5	24.75	2.5	2.5	5/8	265
10	214F10	14	2	7.5	15.5	28	2.5	2.5	3/4	215
10	214H10	14	2	11	15.5	28	2.5	2.5	3/4	365
10	308F10	8	3	7.25	9.5	19.75	2.5	1.63	7/16	95
10	308H10	8	3	10.25	9.5	19.75	2.5	1.63	7/16	145
10	310F10	10	3	7.5	11.5	22	2.5	1.63	9/16	125
10	310H10	10	3	11	11.5	22	2.5	1.63	9/16	195
10	312F10	12	3	9.75	13.5	24.75	2.5	2.5	5/8	210
10	312H10	12	3	12.75	13.5	24.75	2.5	2.5	5/8	310

BLOCKS- HI-LIFT BLOCKS

15 TON

WLL* Tons	Model Number	SHEAVE DIA. (in.)	# OF SHEAVES	THICKNESS (in.)	WIDTH (in.)	NET LENGTH (in.)	THROAT OPENING (in.)	SHEAVE PIN DIA. (in.)	STD WIRE ROPE DIA. (in.)	Weight Lbs.
15	114F15	14	1	7.5	15.5	29.63	3.38	2.5	3/4	215
15	114H15	14	1	11	15.5	29.63	3.38	2.5	3/4	365
15	116F15	16	1	8.75	17.5	32.5	3.38	3	7/8	265
15	116H15	16	1	13.75	17.5	32.5	3.38	3	7/8	585
15	118F15	18	1	8.75	19.5	34.5	3.38	3	7/8	305
15	118H15	18	1	12.75	19.5	34.5	3.38	3	7/8	605
15	210F15	10	2	7.5	11.5	25	3.38	1.63	9/16	120
15	212F15	12	2	7.5	11.5	26.88	3.38	2.5	5/8	185
15	212H15	12	2	10.5	13.5	26.88	3.38	2.5	5/8	285
15	214F15	14	2	7.5	15.5	27.06	3.38	2.5	3/4	220
15	214H15	14	2	11	15.5	27.06	3.38	2.5	3/4	380
15	216F15	16	2	8.75	17.5	32.5	3.38	3	7/8	315
15	216H15	16	2	13.75	17.5	32.5	3.38	3	7/8	555
15	310F15	10	3	7.5	11.5	22	3.38	1.63	9/16	125
15	310H15	10	3	11	11.5	22	3.38	1.63	9/16	195
15	312F15	12	3	9.75	13.5	27.06	3.38	2.5	5/8	220
15	312H15	12	3	12.75	13.5	27.06	3.38	2.5	5/8	320
15	314F15	14	3	9.75	15.5	29.5	3.38	2.5	3/4	255
15	314H15	14	3	13	15.5	29.5	3.38	2.5	3/4	415

20 TON

WLL* Tons	Model Number	SHEAVE DIA. (in.)	# OF SHEAVES	THICKNESS (in.)	WIDTH (in.)	NET LENGTH (in.)	THROAT OPENING (in.)	SHEAVE PIN DIA. (in.)	STD WIRE ROPE DIA. (in.)	Weight Lbs.
20	114F20	14	1	7.5	15.5	29.5	3.38	2.5	3/4	215
20	114H20	14	1	11	15.5	29.5	3.38	2.5	3/4	365
20	116F20	16	1	8.75	17.5	32.69	3	3	7/8	265
20	116H20	16	1	13.75	17.5	32.69	3	3	7/8	505
20	118F20	18	1	8.75	19.5	34.25	3	3	7/8	305
20	118H20	18	1	12.75	19.5	34.25	3	3	7/8	605
20	214F20	14	2	7.5	15.5	29.5	3	2.5	3/4	220
20	214H20	14	2	11	15.5	29.5	3	2.5	3/4	380
20	216F20	16	2	8.75	17.5	32.69	3	3	7/8	315
20	216H20	16	2	13.75	17.5	32.69	3	3	7/8	555
20	218F20	18	2	8.75	19.5	34.25	3	3	7/8	340
20	218H20	18	2	12.75	19.5	34.25	3	3	7/8	640
20	312F20	12	3	9.75	13.5	27.06	3	2.5	5/8	220
20	312H20	12	3	12.75	13.5	27.06	3	2.5	5/8	320
20	314F20	14	3	9.75	15.5	29.5	3	2.5	3/4	255
20	314H20	14	3	13.25	15.5	29.5	3	2.5	3/4	415



BLOCKS- HI-LIFT BLOCKS

25 TON

WLL* Tons	Model Number	SHEAVE DIA. (in.)	# OF SHEAVES	THICKNESS (in.)	WIDTH (in.)	NET LENGTH (in.)	THROAT OPENING (in.)	SHEAVE PIN DIA. (in.)	STD WIRE ROPE DIA. (in.)	Weight Lbs.
25	116F25	16	1	8.75	17.5	33.5	3.63	3	7/8	310
25	116H25	16	1	13.75	17.5	33.5	3.63	3	7/8	460
25	118F25	18	1	8.75	19.5	34.5	3	3	7/8	330
25	118H25	18	1	12.75	19.5	34.5	3	3	7/8	630
25	120F25	20	1	9	21.5	38.5	4	3	1	400
25	120H25	20	1	13	21.5	38.5	4	3	1	765
25	214F25	14	2	7.5	15.5	29.5	3	2.5	3/4	250
25	214H25	14	2	11	15.5	29.5	3	2.5	3/4	415
25	216F25	16	2	8.75	17.5	33.75	3.63	3	7/8	340
25	216H25	16	2	13.75	17.5	33.75	3.63	3	7/8	580
25	218F25	18	2	8.75	19.5	35.75	3.63	3	7/8	365
25	218H25	18	2	12.75	19.5	35.75	3.63	3	7/8	665
25	220F25	20	2	9	21.5	38.5	3	3.25	1	445
25	220H25	20	2	13	21.5	38.5	3	3.25	1	810
25	314F25	14	3	9.75	15.5	29.88	3.63	2.5	3/4	285
25	314H25	14	3	13.25	15.5	29.88	3.63	2.5	3/4	445
25	316F25	16	3	8.75	17.5	33.75	3.63	3	7/8	415
25	316H25	16	3	13.75	17.5	33.75	3.63	3	7/8	655
25	318F25	18	3	11.38	19.5	35.75	3	3	7/8	425
25	318H25	18	3	15.38	19.5	35.75	3	3	7/8	725
25	414F25	14	4	12.88	15.5	31.19	3.5	2.5	3/4	425
25	414H25	14	4	16.38	15.5	31.19	3.5	2.5	3/4	645

30 TON

WLL* Tons	Model Number	SHEAVE DIA. (in.)	# OF SHEAVES	THICKNESS (in.)	WIDTH (in.)	NET LENGTH (in.)	THROAT OPENING (in.)	SHEAVE PIN DIA. (in.)	STD WIRE ROPE DIA. (in.)	Weight Lbs.
30	120F30	20	1	9	21.5	38.5	3	3.25	1	400
30	120H30	20	1	13	21.5	38.5	3	3.25	1	765
30	130T30	30	1	14.88	33	62.25	3.63	5	1 1/4	1750
30	214F30	14	2	7.5	15.5	31	3.63	2.5	3/4	250
30	214H30	14	2	11	15.5	31	3.63	2.5	3/4	410
30	216F30	16	2	8.75	17.5	33.75	3.63	3	7/8	340
30	216H30	16	2	13.75	17.5	33.75	3.63	3	7/8	580
30	314F30	14	3	9.75	15.5	29.88	3.63	3	3/4	285
30	314H30	14	3	13.25	15.5	29.88	3.63	3	3/4	445
30	316F30	16	3	11.38	17.5	33.75	3.63	3	7/8	415
30	316H30	16	3	16.38	17.5	33.75	3.63	3	7/8	655
30	318F30	18	3	11.38	19.5	35.34	3	3	7/8	425
30	318H30	18	3	15.38	19.5	35.34	3	3	7/8	725
30	320F30	20	3	11.75	21.5	38.5	3	3.25	1	515
30	320H30	20	3	15.75	21.5	38.5	3	3.25	1	880
30	414F30	14	4	12.88	15.5	31.19	3.5	2.5	3/4	425
30	414H30	14	4	16.38	15.5	31.19	3.5	2.5	3/4	645
30	516F30	16	5	17.63	17.5	33.81	3.5	3	7/8	520
30	516H30	16	5	22.63	17.5	33.81	3.5	3	7/8	760

BLOCKS- HI-LIFT BLOCKS

35 TON

WLL* Tons	Model Number	SHEAVE DIA. (in.)	# OF SHEAVES	THICKNESS (in.)	WIDTH (in.)	NET LENGTH (in.)	THROAT OPENING (in.)	SHEAVE PIN DIA. (in.)	STD WIRE ROPE DIA. (in.)	Weight Lbs.
35	124T35	24	1	11.5	26.63	56.81	3.75	3.5	1 1/8	1255
35	124TF35	24	1	12	26.63	50.81	3.75	3.5	1 1/8	830
35	216F35	16	2	8.75	17.5	36.38	3.75	3	7/8	385
35	216H35	16	2	13.75	17.5	36.38	3.75	3	7/8	625
35	218F35	18	2	8.75	19.5	38.5	3.75	3	7/8	410
35	218H35	18	2	12.75	19.5	38.5	3.75	3	7/8	710
35	220F35	20	2	9	21.5	41.13	3.75	3.25	1	495
35	220H35	20	2	13	21.5	41.13	3.75	3.25	1	860
35	224T35	24	2	11.5	26	56.81	3.75	3.5	1 1/8	1360
35	224TF35	24	2	12	26.63	50.81	3.75	3.5	1 1/8	945
35	314F35	14	3	9.75	15.5	33.5	3.63	2.5	3/4	365
35	314H35	14	3	13.25	15.5	33.5	3.63	2.5	3/4	585
35	316F35	16	3	11.38	17.5	36.38	3.75	3	7/8	455
35	316H35	16	3	16.38	17.5	36.38	3.75	3	7/8	695
35	318F35	18	3	11.38	19.5	38.38	3.75	3	7/8	465
35	318H35	18	3	15.38	19.5	38.38	3.75	3	7/8	765
35	320F35	20	3	11.75	21.5	41.38	3.75	3.25	1	565
35	320H35	20	3	15.75	21.5	41.38	3.75	3.25	1	930
35	414F35	14	4	12.88	15.5	34.06	3.75	2.5	3/4	465
35	414H35	14	4	16.38	15.5	34.06	3.75	2.5	3/4	685
35	416F35	16	4	14.75	17.5	36.38	3.75	3	7/8	585
35	416H35	16	4	19.75	17.5	36.38	3.75	3	7/8	825
35	514F35	14	5	15.75	15.5	33.94	3.75	2.5	3/4	600
35	514H35	14	5	19.25	15.5	33.94	3.75	2.5	3/4	820
35	516F35	16	5	17.63	17.5	37.94	3.75	3	7/8	780
35	516H35	16	5	22.63	17.5	37.94	3.75	3	7/8	1020

40 TON

WLL* Tons	Model Number	SHEAVE DIA. (in.)	# OF SHEAVES	THICKNESS (in.)	WIDTH (in.)	NET LENGTH (in.)	THROAT OPENING (in.)	SHEAVE PIN DIA. (in.)	STD WIRE ROPE DIA. (in.)	Weight Lbs.
40	124T40	24	1	11.5	26.63	56.68	3.75	3.5	1 1/8	1255
40	124TF40	24	1	12	26.63	56.68	3.75	3.5	1 1/8	830
40	130T40	30	1	14.88	33	65.81	3.75	5	1 1/4	1750
40	220F40	20	2	9	21.5	41.88	3.75	3.25	1	495
40	220H40	20	2	13	21.5	41.88	3.75	3.25	1	860
40	224T40	24	2	11.5	26	56.81	3.75	3.5	1 1/8	1360
40	224TF40	24	2	12	26.63	50.81	3.75	3.5	1 1/8	945
40	230T40	30	2	14.88	33	65.81	3.75	5	1 1/4	1900
40	316F40	16	3	11.38	17.5	35.38	3.75	3	7/8	455
40	316H40	16	3	16.38	17.5	35.38	3.75	3	7/8	695
40	318F40	18	3	11.38	19.5	38.88	3.75	3	7/8	465
40	318H40	18	3	15.38	19.5	38.88	3.75	3	7/8	765
40	320F40	20	3	11.75	21.5	42.06	3.75	3.25	1	565
40	320H40	20	3	15.75	21.5	42.06	3.75	3.25	1	930
40	414F40	14	4	13	15.5	35.25	3.75	2.5	3/4	465
40	414H40	14	4	16.5	15.5	35.25	3.75	2.5	3/4	685
40	416F40	16	4	14.75	17.5	37.88	3.75	3	7/8	585
40	416H40	16	4	19.75	17.5	37.88	3.75	3	7/8	825
40	418F40	18	4	14.75	19.5	39.63	3.75	3	7/8	640
40	418H40	18	4	18.75	19.5	39.63	3.75	3	7/8	940
40	514F40	14	5	15.75	15.5	34.06	3.75	2.5	3/4	600
40	514H40	14	5	19.25	15.5	34.06	3.75	2.5	3/4	820
40	516F40	16	5	17.63	17.5	37.88	3.75	3	7/8	770
40	516H40	16	5	22.63	17.5	37.88	3.75	3	7/8	1040
40	616F40	16	6	20	17.5	37.88	3.75	3	7/8	830
40	616H40	16	6	25	17.5	37.88	3.75	3	7/8	1100



BLOCKS- HI-LIFT BLOCKS

45 TON

WLL* Tons	Model Number	SHEAVE DIA. (in.)	# OF SHEAVES	THICKNESS (in.)	WIDTH (in.)	NET LENGTH (in.)	THROAT OPENING (in.)	SHEAVE PIN DIA. (in.)	STD WIRE ROPE DIA. (in.)	Weight Lbs.
45	220F45	20	2	9	21.5	41.88	4.25	3.25	1	640
45	220H45	20	2	13	21.5	41.88	4.25	3.25	1	900
45	224T45	24	2	11.5	26.63	58.69	4.25	3.5	1 1/8	1000
45	224TF45	24	2	12	26.63	52.69	4.25	3.5	1 1/8	1375
45	318F45	18	3	11.38	19.5	39.38	4.25	3	7/8	525
45	318H45	18	3	15.38	19.5	39.38	4.25	3	7/8	825
45	320F45	20	3	11.75	21.5	42.13	4.25	3.25	1	535
45	320H45	20	3	15.75	21.5	42.13	4.25	3.25	1	900
45	416F45	16	4	14.75	17.5	37.5	4.25	3	7/8	705
45	416H45	16	4	19.75	17.5	38.5	4.25	3	7/8	975
45	418F45	18	4	15.25	19.5	41.63	4.25	3	7/8	760
45	418H45	18	4	19.25	19.5	41.63	4.25	3	7/8	1050
45	514F45	14	5	15.75	15.5	35.5	4.25	2.5	3/4	605
45	514H45	14	5	19.25	15.5	35.5	4.25	2.5	3/4	970
45	516F45	16	5	17.63	17.5	37.5	4.25	3	7/8	820
45	516H45	16	5	22.63	17.5	37.5	4.25	3	7/8	1090

50 TON

WLL* Tons	Model Number	SHEAVE DIA. (in.)	# OF SHEAVES	THICKNESS (in.)	WIDTH (in.)	NET LENGTH (in.)	THROAT OPENING (in.)	SHEAVE PIN DIA. (in.)	STD WIRE ROPE DIA. (in.)	Weight Lbs.
50	130T50	30	1	14.88	33	67.69	4.25	5	1 1/4	2000
50	136T50	36	1	14.88	39	74.25	4.25	5		2500
50	220F50	20	2	9	21.5	41.88	4.25	3.25	1	535
50	220H50	20	2	13	21.5	41.88	4.25	3.25	1	900
50	224T50	24	2	11.5	26.63	58.69	4.25	3.5	1 1/8	1375
50	224TF50	24	2	12	26.63	52.69	4.25	3.5	1 1/8	1000
50	230T50	30	2	14.88	33	67.69	4.25	5	1 1/4	2160
50	318F50	18	3	11.38	19.5	39.38	4.25	3	7/8	525
50	318H50	18	3	15.38	19.5	39.38	4.25	3	7/8	825
50	320F50	20	3	11.75	21.5	42.13	4.25	3.25	1	605
50	320H50	20	3	15.75	21.5	42.13	4.25	3.25	1	970
50	324T50	24	3	16.38	26.63	62.31	4.25	3.5	1 1/8	1740
50	324TF50	24	3	12	26.63	52.69	4.25	3.5	1 1/8	1000
50	416F50	16	4	14.75	17.5	37.5	4.25	3	7/8	705
50	416H50	16	4	19.75	17.5	37.5	4.25	3	7/8	975
50	418F50	18	4	15.25	19.5	41.63	4.25	3	7/8	760
50	418H50	18	4	19.25	19.5	41.63	4.25	3	7/8	1050
50	420F50	20	4	15.5	22	42.13	4.25	3.25	1	800
50	420H50	20	4	19.5	22	42.13	4.25	3.25	1	1200
50	516F50	16	5	17.63	17.5	37.5	4.25	3	7/8	820
50	516H50	16	5	22.63	17.5	37.5	4.25	3	7/8	1090
50	518F50	18	5	16.63	20	41.63	4.25	3	7/8	1010
50	518H50	18	5	20.63	20	41.63	4.25	3	7/8	1300
50	616F50	16	6	20	17.5	37.5	4.25	3	7/8	930
50	616H50	16	6	25	17.5	37.5	4.25	3	7/8	1200

BLOCKS- HI-LIFT BLOCKS

60 TON

WLL* Tons	Model Number	SHEAVE DIA. (in.)	# OF SHEAVES	THICKNESS (in.)	WIDTH (in.)	NET LENGTH (in.)	THROAT OPENING (in.)	SHEAVE PIN DIA. (in.)	STD WIRE ROPE DIA. (in.)	Weight Lbs.
60	130T60	30	1	14.88	33	71.75	5.13	5	1 1/4	2100
60	224T60	24	2	11.5	26.63	65.75	5.13	3.5	1 1/8	1650
60	224TF60	24	2	12	26.63	59.75	5.13	3.5	1 1/8	1100
60	230T60	30	2	14.88	33	71.75	5.13	5	1 1/4	2250
60	320F60	20	3	11.75	21.5	45.88	5.13	3.5	1	945
60	320H60	20	3	15.75	21.5	45.88	5.13	3.5	1	1345
60	324T60	24	3	16.38	26.63	65.75	5.13	3.5	1 1/8	1950
60	324TF60	24	3	15.38	26.63	59.75	5.13	3.5	1 1/8	1450
60	330T60	30	3	19.94	33	71.75	5.13	5	1 1/4	2735
60	418F60	18	4	16.25	19.75	45.88	5.13	3	7/8	1010
60	418H60	18	4	20.25	19.75	45.88	5.13	3	7/8	1300
60	420F60	20	4	17.25	22	48.38	5.13	3.5	1	1110
60	420H60	20	4	21.25	22	48.38	5.13	3.5	1	1510
60	516F60	16	5	18.63	17.5	43.5	5.13	3	7/8	1060
60	516H60	16	5	23.63	17.5	43.5	5.13	3	7/8	1330
60	518F60	18	5	18.63	20	56.5	5.13	3	7/8	1110
60	518H60	18	5	18.63	20	56.5	5.13	3	7/8	1400
60	520F60	20	5	19.75	22	48.38	5.13	3.5	1	1315
60	520H60	20	5	23.75	22	48.38	5.13	4	1	1715

65 TON

WLL* Tons	Model Number	SHEAVE DIA. (in.)	# OF SHEAVES	THICKNESS (in.)	WIDTH (in.)	NET LENGTH (in.)	THROAT OPENING (in.)	SHEAVE PIN DIA. (in.)	STD WIRE ROPE DIA. (in.)	Weight Lbs.
65	420F65	20	4	17.25	22	48.38	5.13	3.5	1	1110
65	420H65	20	4	21.25	22	48.38	5.13	3.5	1	1510
65	516F65	16	5	18.63	17.5	43.5	5.13	3	7/8	830
65	516H65	16	5	23.63	17.5	43.5	5.13	3	7/8	1100
65	518F65	18	5	18.63	20	56.5	5.13	3	7/8	1100
65	518H65	18	5	22.63	20	56.5	5.13	3	7/8	1400
65	520F65	20	5	19.75	22	48.38	5.13	3.5	1	1315
65	520H65	20	5	23.75	22	48.38	5.13	3.5	1	1715
65	620F65	20	6	22.25	22	48.13	5.38	3.5	1	1450
65	620H65	20	6	26.25	22	48.13	5.38	3.5	1	1850

75 TON

WLL* Tons	Model Number	SHEAVE DIA. (in.)	# OF SHEAVES	THICKNESS (in.)	WIDTH (in.)	NET LENGTH (in.)	THROAT OPENING (in.)	SHEAVE PIN DIA. (in.)	STD WIRE ROPE DIA. (in.)	Weight Lbs.
75	136T75	36	1	14.88	42.5	80.81	5.88	5		2800
75	230T75	30	2	14.88	33	74.31	5.88	5	1 1/4	2500
75	236T75	36	2	14.88	42.5	80.81	5.88	5		3000
75	320F75	20	3	11.75	21.5	50.25	5.88	3.5	1	1045
75	320H75	20	3	15.75	21.5	50.25	5.88	3.5	1	1445
75	324T75	24	3	16.38	26.56	68.31	5.88	3.5	1 1/8	2220
75	324TF75	24	3	15.38	26.63	62.44	5.88	3.5	1 1/8	1550
75	330T75	30	3	19.94	33	74.31	5.88	5	1 1/4	2835
75	420F75	20	4	16.75	22	50.63	5.88	3.5	1	1275
75	420H75	20	4	20.75	22	50.63	5.88	3.5	1	1675
75	424T75	24	4	19.75	26.5	68.31	5.88	3.5	1 1/8	2200
75	424TF75	24	4	20.25	26.63	62.44	5.88	3.5	1 1/8	1770
75	430T75	30	4	23.31	33	74.31	5.88	5	1 1/4	3625
75	520F75	20	5	19.75	22	51	5.88	3.5	1	1435
75	520H75	20	5	23.75	22	51	5.88	3.5	1	1835
75	620F75	20	6	22.25	22	49.5	5.88	3.5	1	1550
75	620H75	20	6	26.25	22	49.5	5.88	3.5	1	1950



BLOCKS- HI-LIFT BLOCKS

80 TON

WLL* Tons	Model Number	SHEAVE DIA. (in.)	# OF SHEAVES	THICKNESS (in.)	WIDTH (in.)	NET LENGTH (in.)	THROAT OPENING (in.)	SHEAVE PIN DIA. (in.)	STD WIRE ROPE DIA. (in.)	Weight Lbs.
80	324T80	24	3	16.38	26.63	68.31	5.88	3.5	1 1/8	2220
80	324TF80	24	3	15.38	26.63	62.44	5.88	3.5	1 1/8	1550
80	420F80	20	4	16.75	21.5	50.5	5.88	3.5	1	1275
80	420H80	20	4	20.75	21.5	50.5	5.88	3.5	1	1675
80	424T80	24	4	19.75	26.5	68.44	5.88	3.5	1 1/8	2200
80	424TF80	24	4	20.25	26.63	62.44	5.88	3.5	1 1/8	1770
80	520F80	20	5	19.75	22	51	5.88	3.5	1	1435
80	520H80	20	5	23.75	22	51	5.88	3.5	1	1835
80	524T80	24	5	24.38	26.63	68.81	5.88	3.5	1 1/8	2450
80	524TF80	24	5	24.88	26.63	62.81	5.88	3.5	1 1/8	2140

90 TON

WLL* Tons	Model Number	SHEAVE DIA. (in.)	# OF SHEAVES	THICKNESS (in.)	WIDTH (in.)	NET LENGTH (in.)	THROAT OPENING (in.)	SHEAVE PIN DIA. (in.)	STD WIRE ROPE DIA. (in.)	Weight Lbs.
90	324T90	24	3	16.38	26.63	70.31	5.38	3.5	1 1/8	2385
90	324TF90	24	3	15.38	26.63	30.75	5.38	3.5	1 1/8	1715
90	424T90	24	4	19.75	26.5	70.18	5.38	3.5	1 1/8	2365
90	424TF90	24	4	20.25	26.63	60.75	5.38	3.5	1 1/8	1935
90	520F90	20	5	19.75	22	53.5	5.38	3.5	1	1600
90	520H90	20	5	23.75	22	53.5	5.38	3.5	1	2000
90	524TF90	24	5	24.88	26.63	64.88	5.38	3.5	1 1/8	2615
90	620F90	20	6	22.25	22	53.5	5.38	3.5	1	1750
90	620H90	20	6	26.25	22	53.5	5.38	3.5	1	2150
90	624T90	24	6	28	26	70.25	5.38	3.5	1 1/8	3170
90	624TF90	24	6	27	26.63	64.75	5.38	3.5	1 1/8	2800

100 TON

WLL* Tons	Model Number	SHEAVE DIA. (in.)	# OF SHEAVES	THICKNESS (in.)	WIDTH (in.)	NET LENGTH (in.)	THROAT OPENING (in.)	SHEAVE PIN DIA. (in.)	STD WIRE ROPE DIA. (in.)	Weight Lbs.
100	136T100	36	1	14.88	42.5	86.38	5.38	5		3250
100	236T100	36	2	14.88	42.5	86.38	5.38	5		3450
100	324T100	24	3	16.38	26.63	73.88	5.38	3.5	1 1/8	2535
100	324TF100	24	3	15.38	26.63	67.75	5.38	3.5	1 1/8	1800
100	330T100	30	3	19.94	33	79.88	5.38	5	1 1/4	3175
100	336T100	36	3	19.94	42.5	86.38	5.38	5		3900
100	424T100	24	4	19.75	26.5	73.75	5.38	3.5	1 1/8	2515
100	424TF100	24	4	20.25	26.63	67.75	5.38	3.5	1 1/8	2015
100	430T100	30	4	23.31	36	79.88	5.38	5	1 1/4	3725
100	436T100	36	4	23.31	42.5	86.38	5.38	5		4490
100	520F100	20	5	19.75	22	54.13	5.38	3.5	1	2110
100	520H100	20	5	23.75	22	54.13	5.38	3.5	1	2575
100	524T100	24	5	24.38	26.63	74.25	5.38	3.5	1 1/8	2970
100	524TF100	24	5	24.88	26.63	67.75	5.38	3.5	1 1/8	2500
100	530T100	30	5	28	36	79.88	5.38	5	1 1/4	4530
100	536T100	36	5	28	42.5	86.38	5.38	5		5340
100	620F100	20	6	22.25	22	54.13	5.38	3.5	1	2000
100	620H100	20	6	26.25	22	54.13	5.38	3.5	1	2400
100	624T100	24	6	28	26	74.25	5.38	3.5	1 1/8	3320
100	624TF100	24	6	27	26.63	64.75	5.38	3.5	1 1/8	2875

BLOCKS- HI-LIFT BLOCKS

115 TON

WLL* Tons	Model Number	SHEAVE DIA. (in.)	# OF SHEAVES	THICKNESS (in.)	WIDTH (in.)	NET LENGTH (in.)	THROAT OPENING (in.)	SHEAVE PIN DIA. (in.)	STD WIRE ROPE DIA. (in.)	Weight Lbs.
115	424T115	24	4	19.75	26.5	73.75	5.38	3.5	1 1/8	2515
115	424TF115	24	4	20.25	26.63	67.75	5.38	3.5	1 1/8	2015
115	524TF115	24	5	24.88	26.63	67.75	5.38	3.5	1 1/8	2500
115	620F115	20	6	22.25	22	54.13	5.38	3.5	1	2000
115	620H115	20	6	26.25	22	54.13	5.38	3.5	1	2400
115	624T115	24	6	28	26	74.25	5.38	3.5	1 1/8	3320
115	624TF115	24	6	27	26.63	64.75	5.38	3.5	1 1/8	2875

125 TON

WLL* Tons	Model Number	SHEAVE DIA. (in.)	# OF SHEAVES	THICKNESS (in.)	WIDTH (in.)	NET LENGTH (in.)	THROAT OPENING (in.)	SHEAVE PIN DIA. (in.)	STD WIRE ROPE DIA. (in.)	Weight Lbs.
125	236T125	36	2	14.88	42.5	87.38	5.5	5		3600
125	330T125	30	3	19.94	33	80.88	5.5	5	1 1/4	3200
125	336T125	36	3	19.94	42.5	87.38	5.5	5		3930
125	424T125	24	4	19.75	26.5	74.88	5.5	3.5	1 1/8	2670
125	424TF125	24	4	20.25	26.63	68.88	5.5	3.5	1 1/8	2150
125	430T125	30	4	23.31	36	80.88	5.5	5	1 1/4	3825
125	436T125	36	4	23.31	42.5	87.38	5.5	5		4590
125	524T125	24	5	24.38	26.63	75.38	5.5	3.5	1 1/8	3000
125	524TF125	24	5	27	26.63	69.38	5.5	3.5	1 1/8	2530
125	624T125	24	6	28	26	75.38	5.5	3.5	1 1/8	3350
125	624TF125	24	6	27	26.63	69.38	5.5	3.5	1 1/8	2975

135 TON

WLL* Tons	Model Number	SHEAVE DIA. (in.)	# OF SHEAVES	THICKNESS (in.)	WIDTH (in.)	NET LENGTH (in.)	THROAT OPENING (in.)	SHEAVE PIN DIA. (in.)	STD WIRE ROPE DIA. (in.)	Weight Lbs.
135	424T135	24	4	19.75	26.5	74.88	5.5	3.5	1 1/8	2670
135	424TF135	24	4	20.25	26.63	68.88	5.5	3.5	1 1/8	2150

150 TON

WLL* Tons	Model Number	SHEAVE DIA. (in.)	# OF SHEAVES	THICKNESS (in.)	WIDTH (in.)	NET LENGTH (in.)	THROAT OPENING (in.)	SHEAVE PIN DIA. (in.)	STD WIRE ROPE DIA. (in.)	Weight Lbs.
150	330T150	30	3	19.94	33	80.88	5.5	5	1 1/4	3200
150	336T150	36	3	19.94	42.5	87.88	5.5	5		3930
150	424T150	24	4	19.75	26.5	74.88	5.5	3.5	1 1/8	2670
150	424TF150	24	4	20.25	26.63	68.88	5.5	3.5	1 1/8	2150
150	430T150	30	4	23.31	36	80.88	5.5	5	1 1/4	3825
150	436T150	36	4	23.31	42.5	87.88	5.5	5		4590
150	524T150	24	5	24.38	26.63	75.38	5.5	3.5	1 1/8	3000
150	524TF150	24	5	24.88	26.63	69.38	5.5	3.5	1 1/8	2530
150	530T150	30	5	28	36	86.75	5.5	5	1 1/4	4560
150	536T150	36	5	28	42.5	87.88	5.5	5		5370
150	624T150	24	6	28	26	75.38	5.5	3.5	1 1/8	3350
150	624TF150	24	6	27	26.63	69.38	5.5	3.5	1 1/8	2975
150	630T150	30	6	31.75	36	86.75	5.5	5	1 1/4	4650
150	636T150	36	6	31.75	42.5	87.88	5.5	5		5600

BLOCKS- HI-LIFT BLOCKS

200 TON

WLL* Tons	Model Number	SHEAVE DIA. (in.)	# OF SHEAVES	THICKNESS (in.)	WIDTH (in.)	NET LENGTH (in.)	THROAT OPENING (in.)	SHEAVE PIN DIA. (in.)	STD WIRE ROPE DIA. (in.)	Weight Lbs.
200	430T200	30	4	23.31	36	89	6	5	1 1/4	4200
200	436T200	36	4	23.31	42.5	95.5	6	5		4965
200	530T200	30	5	28	36	89	6	5	1 1/4	4700
200	536T200	36	5	28	42.5	95.5	6	5		5600
200	630T200	30	6	31.75	36	89	6	5	1 1/4	4900
200	636T200	36	6	31.75	42.5	95.5	6	5		5900


250 TON

WLL* Tons	Model Number	SHEAVE DIA. (in.)	# OF SHEAVES	THICKNESS (in.)	WIDTH (in.)	NET LENGTH (in.)	THROAT OPENING (in.)	SHEAVE PIN DIA. (in.)	STD WIRE ROPE DIA. (in.)	Weight Lbs.
250	630T250	30	6	31.75	36	93.5	7.5	5	1 1/4	5120
250	636T250	36	6	31.75	42.5	99.75	7.5	5		6125

300 TON


WLL* Tons	Model Number	SHEAVE DIA. (in.)	# OF SHEAVES	THICKNESS (in.)	WIDTH (in.)	NET LENGTH (in.)	THROAT OPENING (in.)	SHEAVE PIN DIA. (in.)	STD WIRE ROPE DIA. (in.)	Weight Lbs.
300	530T300	30	5	30	36	94.25	8	5	1 1/4	6400
300	536T300	36	5	28	42.5	100.75	7.5	5		7025
300	630T300	30	6	33.75	36	94.25	7.5	5	1 1/4	6700
300	636T300	36	6	31.75	42.5	100.75	7.5	5		7370

Custom Miller Blocks are available to suit your special requirements.
Contact us for more information.

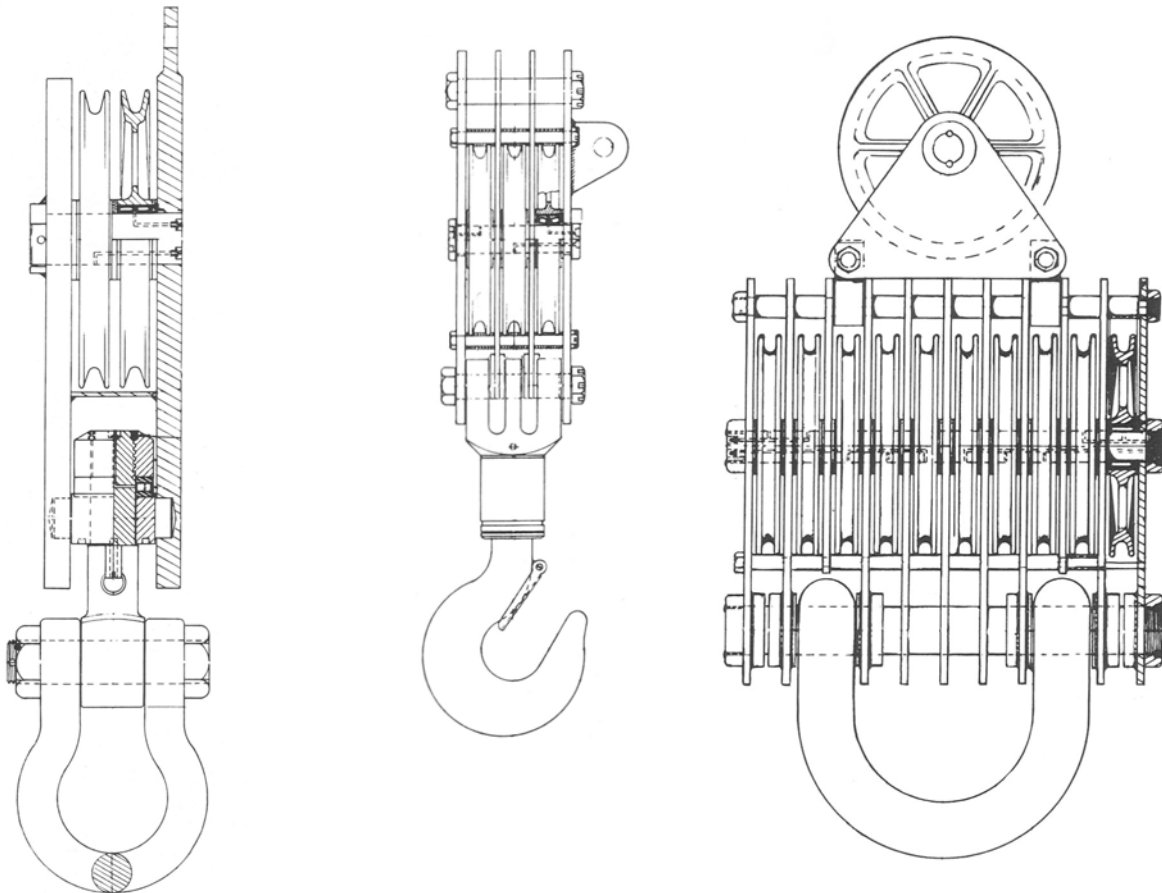

BLOCKS- MOBILE CRANE BLOCKS

- **Product Range**
 - o **Capacity** 15 to 80 tons standard with higher capacities available
 - o **Sheave** sizes, to 24" for up to 1 ¼" wire rope, 1 to 7 sheaves
- **Technical Features**
 - o **Quick-reeving** configuration with optional drop-away sheave guards allows easy passage of rope with end fitting in place. Dead end centered above the sheaves on 1-4 sheave blocks, 5 and up dead end to side plate.
 - o **Hooks** are forged alloy steel, single or duplex, in accordance with DIN15401 or DIN15402. Single hook blocks include heavy-duty locking latches. Locking latches optional for duplex hooks. All hooks are individually certified for mechanical and physical properties including Charpy impact test, and include ultrasonic and magnetic particle evaluation.
 - o **Design Factor** 4 to 1 minimum.
 - o **Bearings** for sheaves are low-friction, double-row, full complement cylindrical roller type for tight sheave alignment and high resistance to axial forces caused by variation in fleet angles and require no friction spacers between sheaves. Hook bearings are tapered roller thrust type as used in all Miller Hi-Lift blocks.
 - o **Lubrication** for sheave bearings via channels in the sheave pin. Hook bearing grease fitting is located in the hook upper end.
 - o **Hook-locking** device is available for all models over 40 tons. Allows user to lock hook every 90°.
 - o **Side plates** and cheek weights are full-length and provided for a range of overhaul weights.

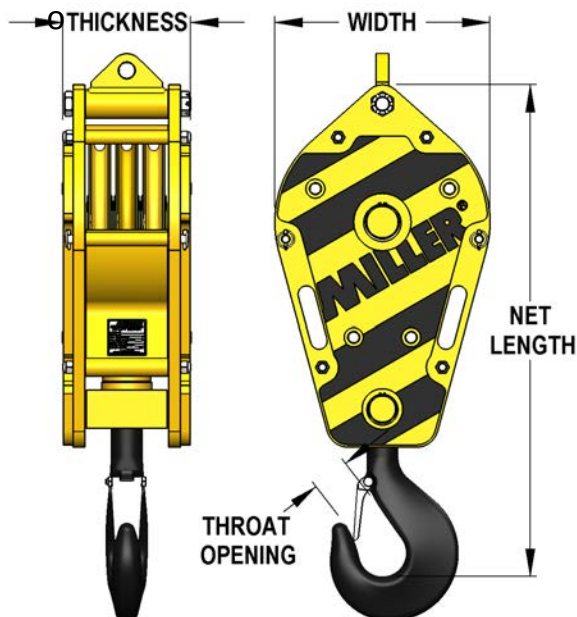

Model Number Key

#	##	MC	###	-	#	XX
<i>Number of Sheaves</i>	<i>Sheave O.D.</i>	<i>Mobile Crane Block</i>	<i>Working Load Limit</i>		<i>Cheek Weights</i>	<i>Option Code*</i>

*Option Codes

D - Duplex Hook

DL - Duplex Hook, Locking Latches

LD - Hook Locking Device, 4 Position

DLD - Duplex Hook, 4 Position Locking Device

DLLD - Duplex Hook, Locking Latches, 4 Position Locking Device



BLOCKS- MOBILE CRANE BLOCKS

15 TON

WLL * Tons	Model Number	Sheave Diameter (in)	Number of Sheaves	Thickness (in)	Width (in)	Net Length (in)	Throat Opening (in)	Wire Rope Range (in)	Weight (lbs)
15	110MC15	10	1	7.50	14.25	33.43	2.48	1/2 to 5/8"	240
15	110MC15-1	10	1	9.00	14.25	33.43	2.48	1/2 to 5/8"	310
15	112MC15	12	1	8.44	16.00	36.31	2.48	1/2 to 3/4"	315
15	112MC15-1	12	1	9.94	16.00	36.31	2.48	1/2 to 3/4"	400
15	114MC15	14	1	8.44	18.00	39.00	2.48	1/2 to 3/4"	360
15	114MC15-1	14	1	9.94	18.00	39.00	2.48	1/2 to 3/4"	470
15	116MC15	16	1	9.16	20.25	41.78	2.48	9/16 to 7/8"	460
15	116MC15-1	16	1	10.66	20.25	41.78	2.48	9/16 to 7/8"	590
15	118MC15	18	1	9.98	22.5	39.38	2.48	5/8 to 1"	365
15	118MC15-1	18	1	11.98	22.5	39.38	2.48	5/8 to 1"	535
15	210MC15	10	2	7.47	14.25	33.43	2.48	1/2 to 5/8"	255
15	210MC15-1	10	2	8.97	14.25	33.43	2.48	1/2 to 5/8"	325
15	212MC15	12	2	8.44	16.00	36.31	2.48	1/2 to 3/4"	335
15	212MC15-1	12	2	9.94	16.00	36.31	2.48	1/2 to 3/4"	420
15	214MC15	14	2	8.44	18.00	39.00	2.48	1/2 to 3/4"	380
15	214MC15-1	14	2	10.44	18.00	39.00	2.48	1/2 to 3/4"	490
15	216MC15	16	2	9.16	20.25	41.78	2.48	9/16 to 7/8"	490
15	216MC15-1	16	2	10.66	20.25	41.78	2.48	9/16 to 7/8"	625
15	218MC15	18	2	9.98	22.5	39.38	2.48	5/8 to 1"	405
15	218MC15-1	18	2	11.98	22.5	39.38	2.48	5/8 to 1"	575
15	310MC15	10	3	7.47	14.25	33.43	2.48	1/2 to 5/8"	295
15	310MC15-1	10	3	8.97	14.25	33.43	2.48	1/2 to 5/8"	345
15	312MC15	12	3	8.44	16.00	36.31	2.48	1/2 to 3/4"	365
15	312MC15-1	12	3	9.94	16.00	36.31	2.48	1/2 to 3/4"	450
15	314MC15	14	3	8.44	18.00	39.00	2.48	1/2 to 3/4"	425
15	314MC15-1	14	3	9.94	18.00	39.00	2.48	1/2 to 3/4"	530
15	316MC15	16	3	9.16	20.25	37.38	2.48	9/16 to 7/8"	540
15	316MC15-1	16	3	10.66	20.25	37.38	2.48	9/16 to 7/8"	675
15	318MC15	18	3	9.98	22.5	39.38	2.48	5/8 to 1"	445
15	318MC15-1	18	3	11.98	22.5	39.38	2.48	5/8 to 1"	615
15	412MC15	12	4	10.56	16.00	42.18	2.48	1/2 to 3/4"	430
15	412MC15-1	12	4	12.06	16.00	42.18	2.48	1/2 to 3/4"	515
15	414MC15	14	4	10.56	18.00	39.00	2.48	1/2 to 3/4"	485
15	414MC15-1	14	4	12.06	18.00	39.00	2.48	1/2 to 3/4"	595

BLOCKS- MOBILE CRANE BLOCKS

20 TON

WLL * Tons	Model Number	Sheave Diameter (in)	Number of Sheaves	Thickness (in)	Width (in)	Net Length (in)	Throat Opening (in)	Wire Rope Range (in)	Weight (lbs)
20	110MC20-1	10	1	9.00	14.25	33.43	2.48	1/2 to 5/8"	310
20	112MC20	12	1	8.44	16.00	36.31	2.48	1/2 to 3/4"	315
20	112MC20-1	12	1	9.94	16.00	36.31	2.48	1/2 to 3/4"	400
20	114MC20	14	1	8.44	18.00	39.00	2.48	1/2 to 3/4"	360
20	114MC20-1	14	1	9.94	18.00	39.00	2.48	1/2 to 3/4"	470
20	116MC20	16	1	9.16	20.25	41.78	2.48	9/16 to 7/8"	460
20	116MC20-1	16	1	10.66	20.25	41.78	2.48	9/16 to 7/8"	590
20	118MC20	18	1	9.98	22.5	40.38	2.8	5/8 to 1"	375
20	118MC20-1	18	1	11.98	22.5	40.38	2.8	5/8 to 1"	525
20	210MC20	10	2	7.47	14.25	33.43	2.48	1/2 to 5/8"	255
20	210MC20-1	10	2	8.97	14.25	33.43	2.48	1/2 to 5/8"	325
20	212MC20	12	2	8.44	16.00	36.31	2.48	1/2 to 3/4"	335
20	212MC20-1	12	2	9.94	16.00	36.31	2.48	1/2 to 3/4"	420
20	214MC20	14	2	8.44	18.00	39.00	2.48	1/2 to 3/4"	380
20	214MC20-1	14	2	10.44	18.00	39.00	2.48	1/2 to 3/4"	490
20	216MC20	16	2	9.16	20.25	41.78	2.48	9/16 to 7/8"	490
20	216MC20-1	16	2	10.66	20.25	41.78	2.48	9/16 to 7/8"	625
20	218MC20	18	2	9.98	22.5	40.38	2.8	5/8 to 1"	415
20	218MC20-1	18	2	11.98	22.5	40.38	2.8	5/8 to 1"	565
20	310MC20	10	3	7.47	14.25	33.43	2.48	1/2 to 5/8"	295
20	310MC20-1	10	3	8.97	14.25	33.43	2.48	1/2 to 5/8"	345
20	312MC20	12	3	8.44	16.00	36.31	2.48	1/2 to 3/4"	365
20	312MC20-1	12	3	9.94	16.00	36.31	2.48	1/2 to 3/4"	450
20	314MC20	14	3	8.44	18.00	39.00	2.48	1/2 to 3/4"	425
20	314MC20-1	14	3	9.94	18.00	39.00	2.48	1/2 to 3/4"	530
20	316MC20	16	3	9.16	20.25	37.38	2.48	9/16 to 7/8"	540
20	316MC20-1	16	3	10.66	20.25	37.38	2.48	9/16 to 7/8"	675
20	318MC20	18	3	9.98	22.5	40.38	2.8	5/8 to 1"	455
20	318MC20-1	18	3	11.98	22.5	40.38	2.8	5/8 to 1"	605
20	412MC20	12	4	10.56	16.00	42.18	2.48	1/2 to 3/4"	430
20	412MC20-1	12	4	12.06	16.00	42.18	2.48	1/2 to 3/4"	515
20	414MC20	14	4	10.56	18.00	39.00	2.48	1/2 to 3/4"	485
20	414MC20-1	14	4	12.06	18.00	39.00	2.48	1/2 to 3/4"	595

25 TON

WLL * Tons	Model Number	Sheave Diameter (in)	Number of Sheaves	Thickness (in)	Width (in)	Net Length (in)	Throat Opening (in)	Wire Rope Range (in)	Weight (lbs)
25	116MC25-1	16	1	10.94	20.50	45.88	3.15	9/16 to 7/8"	670
25	118MC25	18	1	9.98	22.50	48.25	3.15	5/8 to 1"	595
25	118MC25-1	18	1	11.98	22.50	48.25	3.15	5/8 to 1"	800
25	120MC25	20	1	9.98	24.50	52.00	3.15	3/4 to 1-1/8"	690
25	120MC25-1	20	1	11.98	24.50	52.00	3.15	3/4 to 1-1/8"	935
25	214MC25	14	2	8.44	18.50	43.25	3.15	1/2 to 3/4"	440
25	214MC25-1	14	2	10.44	18.50	43.25	3.15	1/2 to 3/4"	580
25	216MC25	16	2	9.16	20.50	45.88	3.15	9/16 to 7/8"	540
25	216MC25-1	16	2	10.94	20.50	45.88	3.15	9/16 to 7/8"	705
25	218MC25	18	2	9.98	22.50	44.56	3.15	5/8 to 1"	655
25	218MC25-1	18	2	11.98	22.50	44.56	3.15	5/8 to 1"	860
25	220MC25	20	2	9.98	24.50	52.00	3.15	3/4 to 1-1/8"	765
25	220MC25-1	20	2	11.98	24.50	52.00	3.15	3/4 to 1-1/8"	1000
25	314MC25	14	3	8.44	18.50	43.25	3.15	1/2 to 3/4"	475
25	314MC25-1	14	3	10.44	18.50	43.25	3.15	1/2 to 3/4"	615
25	316MC25	16	3	9.16	20.50	43.88	3.15	9/16 to 7/8"	590
25	316MC25-1	16	3	10.94	20.50	43.88	3.15	9/16 to 7/8"	750
25	318MC25	18	3	9.98	22.50	48.25	3.15	5/8 to 1"	745
25	318MC25-1	18	3	11.98	22.50	48.25	3.15	5/8 to 1"	945
25	320MC25	20	3	9.98	24.50	52.00	3.15	3/4 to 1-1/8"	855
25	320MC25-1	20	3	11.98	24.50	52.00	3.15	3/4 to 1-1/8"	1100
25	414MC25	14	4	10.56	18.25	36.88	3.15	1/2 to 3/4"	480
25	414MC25-1	14	4	12.56	18.25	36.88	3.15	1/2 to 3/4"	580



BLOCKS- MOBILE CRANE BLOCKS

30 TON

WLL * Tons	Model Number	Sheave Diameter (in)	Number of Sheaves	Thickness (in)	Width (in)	Net Length (in)	Throat Opening (in)	Wire Rope Range (in)	Weight (lbs)
30	116MC30-1	16	1	10.94	20.50	45.88	3.15	9/16 to 7/8"	670
30	118MC30	18	1	9.98	22.50	48.25	3.15	5/8 to 1"	595
30	118MC30-1	18	1	11.98	22.50	48.25	3.15	5/8 to 1"	800
30	120MC30	20	1	9.98	24.50	52.00	3.15	3/4 to 1-1/8"	690
30	120MC30-1	20	1	11.98	24.50	52.00	3.15	3/4 to 1-1/8"	935
30	214MC30	14	2	8.44	18.50	43.25	3.15	1/2 to 3/4"	440
30	214MC30-1	14	2	10.44	18.50	43.25	3.15	1/2 to 3/4"	580
30	216MC30	16	2	9.16	20.50	45.88	3.15	9/16 to 7/8"	540
30	216MC30-1	16	2	10.94	20.50	45.88	3.15	9/16 to 7/8"	705
30	218MC30	18	2	9.98	22.50	44.56	3.15	5/8 to 1"	655
30	218MC30-1	18	2	11.98	22.50	44.56	3.15	5/8 to 1"	860
30	220MC30	20	2	9.98	24.50	52.00	3.15	3/4 to 1-1/8"	765
30	220MC30-1	20	2	11.98	24.50	52.00	3.15	3/4 to 1-1/8"	1000
30	314MC30	14	3	8.44	18.50	43.25	3.15	1/2 to 3/4"	475
30	314MC30-1	14	3	10.44	18.50	43.25	3.15	1/2 to 3/4"	615
30	316MC30	16	3	9.16	20.50	43.88	3.15	9/16 to 7/8"	590
30	316MC30-1	16	3	10.94	20.50	43.88	3.15	9/16 to 7/8"	750
30	318MC30	18	3	9.98	22.50	48.25	3.15	5/8 to 1"	745
30	318MC30-1	18	3	11.98	22.50	48.25	3.15	5/8 to 1"	945
30	320MC30	20	3	9.98	24.50	52.00	3.15	3/4 to 1-1/8"	855
30	320MC30-1	20	3	11.98	24.50	52.00	3.15	3/4 to 1-1/8"	1100
30	414MC30	14	4	10.56	18.25	37.88	3.15	1/2 to 3/4"	480
30	414MC30-1	14	4	12.56	18.25	37.88	3.15	1/2 to 3/4"	580

35 TON

WLL * Tons	Model Number	Sheave Diameter (in)	Number of Sheaves	Thickness (in)	Width (in)	Net Length (in)	Throat Opening (in)	Wire Rope Range (in)	Weight (lbs)
35	124MC35-1	24	1	14.02	28.50	58.25	3.54	7/8 to 1-1/4"	1475
35	220MC35	20	2	10.48	24.50	52.00	3.54	3/4 to 1-1/8"	910
35	220MC35-1	20	2	12.48	24.50	52.00	3.54	3/4 to 1-1/8"	1160
35	224MC35	24	2	12.02	28.50	58.25	3.54	7/8 to 1-1/4"	1260
35	224MC35-1	24	2	14.02	28.50	58.25	3.54	7/8 to 1-1/4"	1610
35	314MC35	14	3	8.94	18.50	42.88	3.54	1/2 to 3/4"	525
35	314MC35-1	14	3	10.94	18.50	42.88	3.54	1/2 to 3/4"	635
35	316MC35	16	3	9.66	20.50	46.75	3.54	9/16 to 7/8"	720
35	316MC35-1	16	3	11.66	20.50	46.75	3.54	9/16 to 7/8"	900
35	318MC35	18	3	10.48	22.50	49.38	3.54	5/8 to 1"	860
35	318MC35-1	18	3	12.48	22.50	49.38	3.54	5/8 to 1"	1065
35	320MC35	20	3	10.48	24.50	52.00	3.54	3/4 to 1-1/8"	1000
35	320MC35-1	20	3	12.48	24.50	52.00	3.54	3/4 to 1-1/8"	1250
35	414MC35	14	4	11.06	18.25	43.63	3.54	1/2 to 3/4"	580
35	414MC35-1	14	4	13.06	18.25	43.63	3.54	1/2 to 3/4"	690
35	416MC35	16	4	12.02	20.50	46.75	3.54	9/16 to 7/8"	825
35	416MC35-1	16	4	14.02	20.50	46.75	3.54	9/16 to 7/8"	1000
35	418MC35	18	4	13.13	22.50	49.38	3.54	5/8 to 1"	980
35	418MC35-1	18	4	15.13	22.50	49.38	3.54	5/8 to 1"	1190
35	514MC35	14	5	13.19	18.25	43.63	3.54	1/2 to 3/4"	645
35	514MC35-1	14	5	15.19	18.25	43.63	3.54	1/2 to 3/4"	755
35	516MC35	16	5	14.38	20.31	47.19	3.54	9/16 to 7/8"	715
35	516MC35-1	16	5	16.38	20.31	47.19	3.54	9/16 to 7/8"	875
35	616MC35	16	6	16.75	20.31	48.19	3.54	9/16 to 7/8"	790
35	616MC35-1	16	6	18.75	20.31	48.19	3.54	9/16 to 7/8"	950

BLOCKS- MOBILE CRANE BLOCKS

40 TON

WLL * Tons	Model Number	Sheave Diameter (in)	Number of Sheaves	Thickness (in)	Width (in)	Net Length (in)	Throat Opening (in)	Wire Rope Range (in)	Weight (lbs)
40	124MC40-1	24	1	14.02	28.50	58.25	3.54	7/8 to 1-1/4"	1475
40	220MC40	20	2	10.48	24.50	52.00	3.54	3/4 to 1-1/8"	910
40	220MC40-1	20	2	12.48	24.50	52.00	3.54	3/4 to 1-1/8"	1160
40	224MC40	24	2	12.02	28.50	58.25	3.54	7/8 to 1-1/4"	1260
40	224MC40-1	24	2	14.02	28.50	58.25	3.54	7/8 to 1-1/4"	1610
40	314MC40	14	3	8.94	18.50	42.88	3.54	1/2 to 3/4"	525
40	314MC40-1	14	3	10.94	18.50	42.88	3.54	1/2 to 3/4"	635
40	316MC40	16	3	9.66	20.50	46.75	3.54	9/16 to 7/8"	720
40	316MC40-1	16	3	11.66	20.50	46.75	3.54	9/16 to 7/8"	900
40	318MC40	18	3	10.48	22.50	49.38	3.54	5/8 to 1"	860
40	318MC40-1	18	3	12.48	22.50	49.38	3.54	5/8 to 1"	1065
40	320MC40	20	3	10.48	24.50	52.00	3.54	3/4 to 1-1/8"	1000
40	320MC40-1	20	3	12.48	24.50	52.00	3.54	3/4 to 1-1/8"	1250
40	414MC40	14	4	11.06	18.25	43.63	3.54	1/2 to 3/4"	580
40	414MC40-1	14	4	13.06	18.25	43.63	3.54	1/2 to 3/4"	690
40	416MC40	16	4	12.02	20.50	46.75	3.54	9/16 to 7/8"	825
40	416MC40-1	16	4	14.02	20.50	46.75	3.54	9/16 to 7/8"	1000
40	418MC40	18	4	13.13	22.50	49.38	3.54	5/8 to 1"	980
40	418MC40-1	18	4	15.13	22.50	49.38	3.54	5/8 to 1"	1190
40	514MC40	14	5	13.19	18.25	43.63	3.54	1/2 to 3/4"	645
40	514MC40-1	14	5	15.19	18.25	43.63	3.54	1/2 to 3/4"	755
40	516MC40	16	5	14.38	20.31	47.19	3.54	9/16 to 7/8"	715
40	516MC40-1	16	5	16.38	20.31	47.19	3.54	9/16 to 7/8"	875
40	616MC40	16	6	16.75	20.31	48.19	3.54	9/16 to 7/8"	790
40	616MC40-1	16	6	18.75	20.31	48.19	3.54	9/16 to 7/8"	950

45 TON

WLL * Tons	Model Number	Sheave Diameter (in)	Number of Sheaves	Thickness (in)	Width (in)	Net Length (in)	Throat Opening (in)	Wire Rope Range (in)	Weight (lbs)
45	220MC45-1	20	2	12.48	24.50	55.21	3.94	3/4 to 1-1/8"	1245
45	224MC45	24	2	12.02	28.50	59.50	3.94	7/8 to 1-1/4"	1320
45	224MC45-1	24	2	14.02	28.50	59.50	3.94	7/8 to 1-1/4"	1675
45	314MC45	14	3	8.94	18.25	43.59	3.94	1/2 to 3/4"	525
45	314MC45-1	14	3	10.94	18.25	43.59	3.94	1/2 to 3/4"	655
45	316MC45	16	3	9.66	20.50	49.50	3.94	9/16 to 7/8"	780
45	316MC45-1	16	3	11.66	20.50	49.50	3.94	9/16 to 7/8"	970
45	318MC45	18	3	10.48	22.50	51.65	3.94	5/8 to 1"	935
45	318MC45-1	18	3	12.48	22.50	51.65	3.94	5/8 to 1"	1155
45	320MC45	20	3	10.48	24.50	55.21	3.94	3/4 to 1-1/8"	1070
45	320MC45-1	20	3	12.48	24.50	55.21	3.94	3/4 to 1-1/8"	1335
45	324MC45	24	3	12.02	28.50	59.50	3.94	7/8 to 1-1/4"	1480
45	324MC45-1	24	3	14.02	28.50	59.50	3.94	7/8 to 1-1/4"	1840
45	414MC45	14	4	11.06	18.25	43.59	3.94	1/2 to 3/4"	570
45	414MC45-1	14	4	13.06	18.25	43.59	3.94	1/2 to 3/4"	700
45	416MC45	16	4	12.02	20.50	49.25	3.94	9/16 to 7/8"	890
45	416MC45-1	16	4	14.02	20.50	49.25	3.94	9/16 to 7/8"	1080
45	418MC45	18	4	13.13	22.50	51.65	3.94	5/8 to 1"	1060
45	418MC45-1	18	4	15.13	22.50	51.65	3.94	5/8 to 1"	1380
45	420MC45	20	4	13.13	24.50	55.21	3.94	3/4 to 1-1/8"	1225
45	420MC45-1	20	4	15.13	24.50	55.21	3.94	3/4 to 1-1/8"	1490
45	514MC45	14	5	13.19	18.25	43.59	3.94	1/2 to 3/4"	630
45	514MC45-1	14	5	15.19	18.25	43.59	3.94	1/2 to 3/4"	760
45	516MC45	16	5	14.38	20.31	47.38	3.94	9/16 to 7/8"	720
45	516MC45-1	16	5	16.38	20.31	47.38	3.94	9/16 to 7/8"	895
45	518MC45	18	5	15.75	22.5	49.38	3.94	5/8 to 1"	820
45	518MC45-1	18	5	17.75	22.5	49.38	3.94	5/8 to 1"	1045
45	616MC45	16	6	16.75	20.31	47.38	3.94	9/16 to 7/8"	780
45	616MC45-1	16	6	18.75	20.31	47.38	3.94	9/16 to 7/8"	955



BLOCKS- MOBILE CRANE BLOCKS

50 TON

WLL * Tons	Model Number	Sheave Diameter (in)	Number of Sheaves	Thickness (in)	Width (in)	Net Length (in)	Throat Opening (in)	Wire Rope Range (in)	Weight (lbs)
50	220MC50-1	20	2	12.48	24.50	55.21	3.94	3/4 to 1-1/8"	1245
50	224MC50	24	2	12.02	28.50	59.50	3.94	7/8 to 1-1/4"	1320
50	224MC50-1	24	2	14.02	28.50	59.50	3.94	7/8 to 1-1/4"	1675
50	314MC50	14	3	8.94	18.25	43.59	3.94	1/2 to 3/4"	525
50	314MC50-1	14	3	10.94	18.25	43.59	3.94	1/2 to 3/4"	655
50	316MC50	16	3	9.66	20.50	49.50	3.94	9/16 to 7/8"	780
50	316MC50-1	16	3	11.66	20.50	49.50	3.94	9/16 to 7/8"	970
50	318MC50	18	3	10.48	22.50	51.65	3.94	5/8 to 1"	935
50	318MC50-1	18	3	12.48	22.50	51.65	3.94	5/8 to 1"	1155
50	320MC50	20	3	10.48	24.50	55.21	3.94	3/4 to 1-1/8"	1070
50	320MC50-1	20	3	12.48	24.50	55.21	3.94	3/4 to 1-1/8"	1335
50	324MC50	24	3	12.02	28.50	59.50	3.94	7/8 to 1-1/4"	1480
50	324MC50-1	24	3	14.02	28.50	59.50	3.94	7/8 to 1-1/4"	1840
50	414MC50	14	4	11.06	18.25	43.59	3.94	1/2 to 3/4"	570
50	414MC50-1	14	4	13.06	18.25	43.59	3.94	1/2 to 3/4"	700
50	416MC50	16	4	12.02	20.50	49.25	3.94	9/16 to 7/8"	890
50	416MC50-1	16	4	14.02	20.50	49.25	3.94	9/16 to 7/8"	1080
50	418MC50	18	4	13.13	22.50	51.65	3.94	5/8 to 1"	1060
50	418MC50-1	18	4	15.13	22.50	51.65	3.94	5/8 to 1"	1380
50	420MC50	20	4	13.13	24.50	55.21	3.94	3/4 to 1-1/8"	1225
50	420MC50-1	20	4	15.13	24.50	55.21	3.94	3/4 to 1-1/8"	1490
50	514MC50	14	5	13.19	18.25	43.59	3.94	1/2 to 3/4"	630
50	514MC50-1	14	5	15.19	18.25	43.59	3.94	1/2 to 3/4"	760
50	516MC50	16	5	14.38	20.31	47.38	3.94	9/16 to 7/8"	720
50	516MC50-1	16	5	16.38	20.31	47.38	3.94	9/16 to 7/8"	895
50	518MC50	18	5	15.75	22.5	49.38	3.94	5/8 to 1"	820
50	518MC50-1	18	5	17.75	22.5	49.38	3.94	5/8 to 1"	1045
50	616MC50	16	6	16.75	20.31	47.38	3.94	9/16 to 7/8"	780
50	616MC50-1	16	6	18.75	20.31	47.38	3.94	9/16 to 7/8"	955

55 TON

WLL * Tons	Model Number	Sheave Diameter (in)	Number of Sheaves	Thickness (in)	Width (in)	Net Length (in)	Throat Opening (in)	Wire Rope Range (in)	Weight (lbs)
55	224MC55-1	24	2	14.52	28.88	60.06	4.41	7/8 to 1-1/4"	1475
55	318MC55	18	3	10.98	22.50	53.66	4.41	5/8 to 1"	1080
55	318MC55-1	18	3	12.98	22.50	53.66	4.41	5/8 to 1"	1300
55	320MC55	20	3	10.98	24.50	56.79	4.41	3/4 to 1-1/8"	1235
55	320MC55-1	20	3	12.98	24.50	56.79	4.41	3/4 to 1-1/8"	1500
55	324MC55	24	3	12.52	28.50	61.41	4.41	7/8 to 1-1/4"	1700
55	324MC55-1	24	3	14.52	28.50	61.41	4.41	7/8 to 1-1/4"	2055
55	416MC55	16	4	12.52	20.31	50.13	4.41	9/16 to 7/8"	1000
55	416MC55-1	16	4	14.52	20.31	50.13	4.41	9/16 to 7/8"	1185
55	418MC55	18	4	13.63	22.5	52.88	4.41	5/8 to 1"	1080
55	418MC55-1	18	4	15.63	22.5	52.88	4.41	5/8 to 1"	1310
55	420MC55	20	4	13.63	24.50	56.79	4.41	3/4 to 1-1/8"	1400
55	420MC55-1	20	4	15.63	24.50	56.79	4.41	3/4 to 1-1/8"	1670
55	516MC55	16	5	14.88	20.31	50.13	4.41	9/16 to 7/8"	1100
55	516MC55-1	16	5	16.88	20.31	50.13	4.41	9/16 to 7/8"	1285
55	518MC55	18	5	16.25	22.5	52.88	4.41	5/8 to 1"	1160
55	518MC55-1	18	5	18.25	22.5	52.88	4.41	5/8 to 1"	1490
55	520MC55	20	5	16.25	24.50	56.79	4.41	3/4 to 1-1/8"	1565
55	520MC55-1	20	5	18.25	24.50	56.79	4.41	3/4 to 1-1/8"	1830
55	620MC55	20	6	18.89	24.63	56.06	4.41	3/4 to 1-1/8"	1420
55	620MC55-1	20	6	20.89	24.63	56.06	4.41	3/4 to 1-1/8"	1700

BLOCKS- MOBILE CRANE BLOCKS

65 TON

WLL * Tons	Model Number	Sheave Diameter (in)	Number of Sheaves	Thickness (in)	Width (in)	Net Length (in)	Throat Opening (in)	Wire Rope Range (in)	Weight (lbs)
65	224MC65-1	24	2	14.52	28.88	60.06	4.41	7/8 to 1-1/4"	1475
65	318MC65	18	3	10.98	22.50	53.66	4.41	5/8 to 1"	1080
65	318MC65-1	18	3	12.98	22.50	53.66	4.41	5/8 to 1"	1300
65	320MC65	20	3	10.98	24.50	56.79	4.41	3/4 to 1-1/8"	1235
65	320MC65-1	20	3	12.98	24.50	56.79	4.41	3/4 to 1-1/8"	1500
65	324MC65	24	3	12.52	28.50	61.41	4.41	7/8 to 1-1/4"	1700
65	324MC65-1	24	3	14.52	28.50	61.41	4.41	7/8 to 1-1/4"	2055
65	416MC65	16	4	12.52	20.31	50.13	4.41	9/16 to 7/8"	1000
65	416MC65-1	16	4	14.52	20.31	50.13	4.41	9/16 to 7/8"	1185
65	418MC65	18	4	13.63	22.5	52.88	4.41	5/8 to 1"	1080
65	418MC65-1	18	4	15.63	22.5	52.88	4.41	5/8 to 1"	1310
65	420MC65	20	4	13.63	24.50	56.79	4.41	3/4 to 1-1/8"	1400
65	420MC65-1	20	4	15.63	24.50	56.79	4.41	3/4 to 1-1/8"	1670
65	516MC65	16	5	14.88	20.31	50.13	4.41	9/16 to 7/8"	1100
65	516MC65-1	16	5	16.88	20.31	50.13	4.41	9/16 to 7/8"	1285
65	518MC65	18	5	16.25	22.5	52.88	4.41	5/8 to 1"	1160
65	518MC65-1	18	5	18.25	22.5	52.88	4.41	5/8 to 1"	1490
65	520MC65	20	5	16.25	24.50	56.79	4.41	3/4 to 1-1/8"	1565
65	520MC65-1	20	5	18.25	24.50	56.79	4.41	3/4 to 1-1/8"	1830
65	620MC65	20	6	18.89	24.63	56.06	4.41	3/4 to 1-1/8"	1420
65	620MC65-1	20	6	20.89	24.63	56.06	4.41	3/4 to 1-1/8"	1700

70 TON

WLL * Tons	Model Number	Sheave Diameter (in)	Number of Sheaves	Thickness (in)	Width (in)	Net Length (in)	Throat Opening (in)	Wire Rope Range (in)	Weight (lbs)
70	320MC70-1	20	3	13.48	24.50	61.00	4.92	3/4 to 1-1/8"	1810
70	324MC70	24	3	13.02	28.50	65.18	4.92	7/8 to 1-1/4"	2000
70	324MC70-1	24	3	15.02	28.50	65.18	4.92	7/8 to 1-1/4"	2380
70	418MC70	18	4	14.13	22.5	58.75	4.92	5/8 to 1"	1430
70	418MC70-1	18	4	16.13	22.5	58.75	4.92	5/8 to 1"	1680
70	420MC70	20	4	14.13	24.50	61.00	4.92	3/4 to 1-1/8"	1685
70	420MC70-1	20	4	16.13	24.50	61.00	4.92	3/4 to 1-1/8"	1980
70	424MC70	24	4	16.16	28.50	65.18	4.92	7/8 to 1-1/4"	2270
70	424MC70-1	24	4	18.16	28.50	65.18	4.92	7/8 to 1-1/4"	2660
70	518MC70	18	5	16.75	22.5	58.75	4.92	5/8 to 1"	1540
70	518MC70-1	18	5	18.75	22.5	58.75	4.92	5/8 to 1"	1790
70	520MC70	20	5	16.75	24.63	62.31	4.92	3/4 to 1-1/8"	1615
70	520MC70-1	20	5	18.75	24.63	62.31	4.92	3/4 to 1-1/8"	1915
70	524MC70	24	5	19.31	28.50	65.18	4.92	7/8 to 1-1/4"	2535
70	524MC70-1	24	5	21.31	28.50	65.18	4.92	7/8 to 1-1/4"	2925
70	620MC70	20	6	19.39	22.5	62.31	4.92	3/4 to 1-1/8"	1785
70	620MC70-1	20	6	21.39	22.5	62.31	4.92	3/4 to 1-1/8"	2085

BLOCKS- MOBILE CRANE BLOCKS

80 TON

WLL * Tons	Model Number	Sheave Diameter (in)	Number of Sheaves	Thickness (in)	Width (in)	Net Length (in)	Throat Opening (in)	Wire Rope Range (in)	Weight (lbs)
80	320MC80-1	20	3	13.48	24.50	61.00	4.92	3/4 to 1-1/8"	1810
80	324MC80	24	3	13.02	28.50	65.18	4.92	7/8 to 1-1/4"	2000
80	324MC80-1	24	3	15.02	28.50	65.18	4.92	7/8 to 1-1/4"	2380
80	418MC80	18	4	14.13	22.5	58.75	4.92	5/8 to 1"	1430
80	418MC80-1	18	4	16.13	22.5	58.75	4.92	5/8 to 1"	1680
80	420MC80	20	4	14.13	24.50	61.00	4.92	3/4 to 1-1/8"	1685
80	420MC80-1	20	4	16.13	24.50	61.00	4.92	3/4 to 1-1/8"	1980
80	424MC80	24	4	16.16	28.50	65.18	4.92	7/8 to 1-1/4"	2270
80	424MC80-1	24	4	18.16	28.50	65.18	4.92	7/8 to 1-1/4"	2660
80	518MC80	18	5	16.75	22.5	58.75	4.92	5/8 to 1"	1540
80	518MC80-1	18	5	18.75	22.5	58.75	4.92	5/8 to 1"	1790
80	520MC80	20	5	16.75	24.63	62.31	4.92	3/4 to 1-1/8"	1615
80	520MC80-1	20	5	18.75	24.63	62.31	4.92	3/4 to 1-1/8"	1915
80	524MC80	24	5	19.31	28.50	65.18	4.92	7/8 to 1-1/4"	2535
80	524MC80-1	24	5	21.31	28.50	65.18	4.92	7/8 to 1-1/4"	2925
80	620MC80	20	6	19.39	22.5	64.31	4.92	3/4 to 1-1/8"	1785
80	620MC80-1	20	6	21.39	22.5	64.31	4.92	3/4 to 1-1/8"	2085

MILLER


Load Handling SOLUTIONS

- ▶ Hook Products
- ▶ Swivels
- ▶ Blocks
- ▶ Sheaves



PLET Anchoring Hook Assembly
300 metric tons working load

www.millerproducts.net

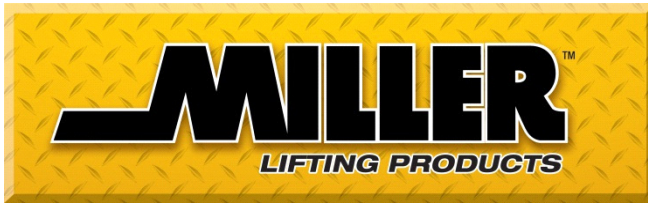BLOCKS- OVERHEAD CRANE**OVERHEAD BRIDGE
CRANE BLOCKS**

**Wide capacity range, made to application,
new or replacement**

- Working loads from 15 tons to 300 tons
- Design factor 4:1 and up per specification
- All CMAA service classes (also FEM, DIN, ISO)
- Hooks are forged alloy in accord with DIN 15041 or 15402, single or duplex on thrust bearing and crosshead
- Hook lock or motorized hook available
- Fabricated, roll-formed or cast sheaves with roller bearings or bronze bushings
- Optional lubrication through sheave shaft
- Heavy duty sheave guards
- Optional slotted covers over sheaves
- Special configurations, sheave spacings
- Optional insulated hook



*See next page
for
Quote Request
form...*



BLOCKS- OVERHEAD CRANE



OVERHEAD CRANE BLOCKS QUOTE REQUEST

Requestor

Name: _____ Date: _____ Quantity _____

Company: _____ Address: _____

City: _____ State: _____ Zip: _____

Phone: _____ E-mail: _____

SHEAVES

NUMBER OF SHEAVES: _____ OUTSIDE DIAMETER: _____ WIRE ROPE SIZE: _____

SHEAVE BUSHINGS

BRONZE BUSHING _____ ROLLER BEARING _____

BLOCK CAPACITY & DIMENSIONS, WEIGHT

DIMENSIONS: A _____ B _____ C _____

WORKING CAPACITY (LOAD LIMIT) _____
(INDICATE US / METRIC TONS)

DESIGN FACTOR _____

OVERHAUL WEIGHT _____


HOOK / FITTING TYPE

HOOK _____ SINGLE _____ DOUBLE _____

LOCKING HOOK _____

MOTORIZED HOOK _____

OTHER FITTINGS _____

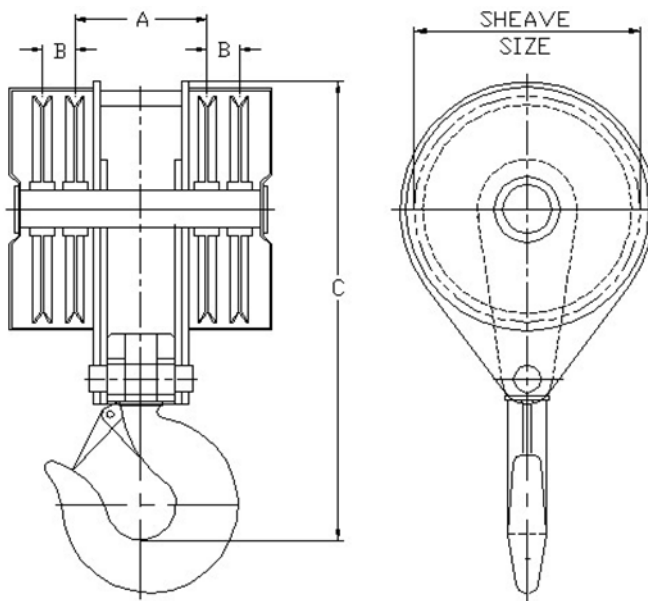

OTHER REQUIREMENTS

CMAA SERVICE CLASS: _____

SPECIAL TESTING, THIRD PARTY INSPECTION,

ETC: _____

Miller Lifting Products

100A Sturbridge Rd.

Charlton, MA USA 01507

Tel.: (508) 248-3941 / Fax: (508) 248-0639

E-mail: sales@millerproducts.net

www.millerproducts.net