





OVERHAUL BALLS



CoreLifting.com

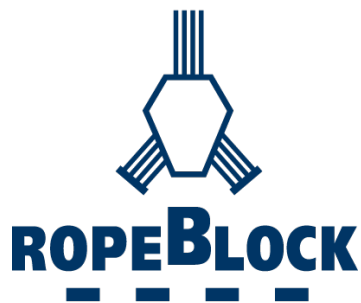

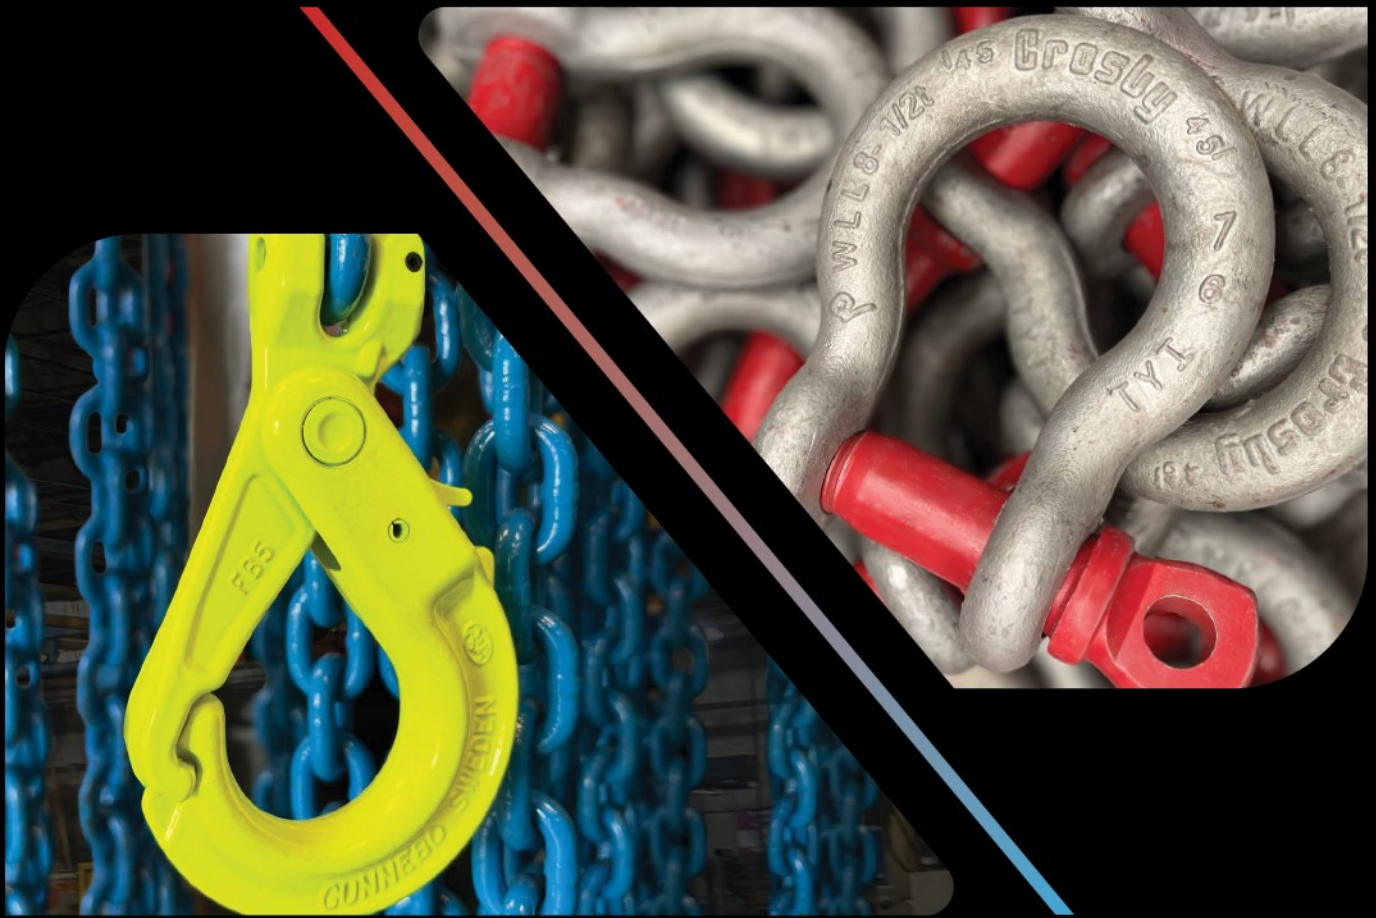

Crosby®



GUNNEBO®
Industries

PRODUCT CATALOG

with application & warning information

Imperial

UB-500 Series Top Swiveling Overhaul Balls



With
S320
Eye Hook



With
S1316 A
SHUR-LOC®
Eye Hook



Both styles available with
optional **McKissick®**
Wedge Socket Assembly
or **S-422 TERMINATOR**
Wedge Socket



UWO 422T
TERMINATOR
Wedge Only

- Sizes 4 short Tons through 30 short Tons are available with Crosby's S1316A positive-locking SHUR-LOC® hook, which may be used for lifting personnel. Meets the intent of OSHA Rule 1926.1431(g)(1)(i)(A) and 1926.1501(g)(4)(iv)(B).
- Design Factor 4:1
- The top swivel design on the UB-500 assures the ball remains stationary if the wireline spins.
- The swivel incorporates a sealed roller thrust bearing together with a grease fitting for easy lubrication.
- Each ball can be equipped with the new McKissick® US-422T Wedge Socket which can be easily adjusted to fit various sizes of wireline by changing the wedge (ensure that correct wedge is used for selected wireline size).
- All hooks used on UB-500 Overhaul Balls (S320, S320N & S1316A) are forged from alloy steel. The S320 and S320N hooks come complete with latches.
- The S320 hook (PL latch) and the S320N hook (S4320 latch), with the proper latch attached, may be used for personnel lifting when secured with proper device (bolt, nut and pin for the PL latch; Cotter pin for the S4320 latch). Meets the intent of OSHA Rule 1926.1431(g)(1)(i)(A) and 1926.1501(g)(4)(iv)(B).

Overhaul Ball Assembly


Optional US-422T Wedge Sockets

McKissick® UB-500 Model No.	UB-500 "E" Eye Hook Stock No.	UB-500 "S" SHUR-LOC® Stock No.	Working Load Limit (short tons)	Weight Each (lb)	Wireline Size (in)	Model No.	Wedge Socket Assy. Stock No.	Weight Each (lb)	Wedge Only Stock No.	Weight Each (lb)
MB4T35E	1036000*	1036005	4	58						
MB4T85E	1036009*	1036018	4	102	3/8	US4T	1044300	4.6	1047310	0.7
MB4T150E	1036027*	1036032	4	162	7/16	US4T	1044309	4.6	1047301	1.0
MB4T200E	1036036*	1036041	4	201	1/2	US4T	1044318	4.6	1047329	1.0
MB7T85E	1036045*	1036050	7	109	1/2	US5T	1044327	8.5	1047338	2.0
MB7T150E	1036054*	1036063	7	170	9/16	US5T	1044336	8.5	1047347	1.8
MB7T200E	1036072*	1036077	7	210	5/8	US5T	1044345	8.5	1047356	1.8
MB7T285E	1036081*	1036086	7	321	5/8	US6T	1044354	9.4	1047365	3.0
MB10T150E	1036090*	1036095	10	216	3/4	US6T	1044363	9.4	1047374	2.5
MB10T200E	1036099*	1036108	10	260						
MB10T285E	1036117*	1036122	10	365	5/8	US6T	1044354	9.4	1047365	3.0
MB10T350E	1036126*	1036131	10	403	3/4	US6T	1044363	9.4	1047374	2.5
MB10T650E	1036135*	1036140	10	718	7/8	US8T	1044404	20.8	1047425	5.5
MB12T150E	1036144*	1036520	12	216	1	US8T	1044417	20.8	1047431	6.1
MB12T200E	1036153*	1036529	12	258	1-1/8	US10T	1044426	46.5	1047440	9.7
MB12T285E	1036171*	1036538	12	365	1-1/4	US10T	1044435	46.5	1047459	10.4
MB12T350E	1036180*	1036547	12	403						
MB12T650E	1036189*	1036556	12	718						
MB15T200E	1036198*	1036565	15	298						
MB15T350E	1036207*	1036574	15	456						
MB15T650E	1036216*	1036583	15	753						
MB15T1150E	1036225*	1036592	15	1311						
MB20T200E	1036234*	1036611	20	298	5/8	US8AT	1044372	17.5	1047383	3.2
MB20T350E	1036243*	1036620	20	456	3/4	US8AT	1044381	17.5	1047392	3.4
MB20T650E	1036252*	1036629	20	753	7/8	US8T	1044404	20.8	1047425	5.5
MB20T1150E	1036261*	1036638	20	1311	1	US8T	1044417	20.8	1047431	6.1
MB25T350E	1036270	1036647	25	533	1-1/8	US10T	1044426	46.5	1047440	9.7
MB25T650E	1036279	1036656	25	865	1-1/4	US10T	1044435	46.5	1047459	10.4
MB25T1150E	1036288	1036665	25	1421						
MB30T650E	1036297	1036674	30	865						
MB30T1150E	1036306	1036683	30	1421						

4:1 Design Factor. * Utilizes Crosby "N" style hooks with integrated latch. Replacement latch kit is S-4320. PL latch and S-4055 latch will not fit. Standard Crosby S-5 Thrust style swivels can not be used with UB-500 Overhaul Balls. For replacement swivels, contact Crosby Customer Service.


UB-500 TOP SWIVEL OVERHAUL BALLS

UB-500E Top Swivel Overhaul Balls with 320 Eye Hooks

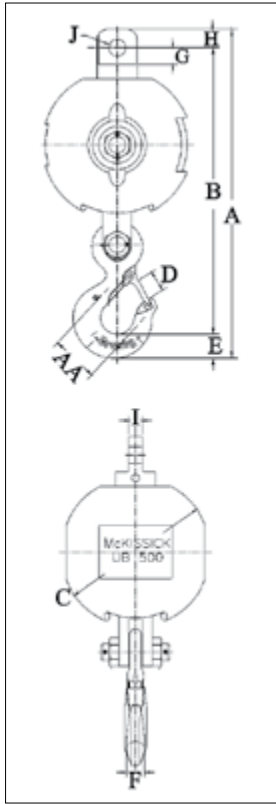

Model No.	UB-500 "E" Stock No.*	Dimensions (in)										
		A	B	C	D	E	F	G	H	I	J	AA
MB4T35E	1036000*	20.09	17.27	7.50	1.36	1.44	1.12	1.88	1.38	.88	1.31	2.5
MB4T85E	1036009*	20.98	18.16	9.25	1.36	1.44	1.12	1.88	1.38	.88	1.31	2.5
MB4T150E	1036027*	21.98	19.16	11.25	1.36	1.44	1.12	1.88	1.38	.88	1.31	2.5
MB4T200E	1036036*	22.35	19.53	12.50	1.36	1.44	1.12	1.88	1.38	.88	1.31	2.5
MB7T85E	1036045*	23.18	20.36	9.25	1.61	1.81	1.38	1.88	1.38	.88	1.31	3.0
MB7T150E	1036054*	24.56	21.36	11.25	1.61	1.81	1.38	1.88	1.38	.88	1.31	3.0
MB7T200E	1036072*	24.89	21.71	12.50	1.61	1.81	1.38	1.88	1.38	.88	1.31	3.0
MB7T285E	1036081*	25.86	22.67	13.88	1.61	1.81	1.38	1.88	1.38	.88	1.31	3.0
MB10T150E	1036090*	31.44	27.19	11.25	2.08	2.25	1.62	2.75	2.00	1.25	1.78	4.0
MB10T200E	1036099*	31.81	27.56	12.50	2.08	2.25	1.62	2.75	2.00	1.25	1.78	4.0
MB10T285E	1036117*	32.75	28.50	13.88	2.08	2.25	1.62	2.75	2.00	1.25	1.78	4.0
MB10T350E	1036126*	33.31	29.06	15.00	2.08	2.25	1.62	2.75	2.00	1.25	1.78	4.0
MB10T650E	1036135*	34.79	30.54	17.94	2.08	2.25	1.62	2.75	2.00	1.25	1.78	4.0
MB12T150E	1036144*	31.44	27.19	11.25	2.08	2.25	1.62	2.75	2.00	1.25	1.78	4.0
MB12T200E	1036153*	31.81	27.56	12.50	2.08	2.25	1.62	2.75	2.00	1.25	1.78	4.0
MB12T285E	1036171*	32.75	28.50	13.88	2.08	2.25	1.62	2.75	2.00	1.25	1.78	4.0
MB12T350E	1036180*	33.31	29.06	15.00	2.08	2.25	1.62	2.75	2.00	1.25	1.78	4.0
MB12T650E	1036189*	35.79	30.54	17.94	2.08	2.25	1.62	2.75	2.00	1.25	1.78	4.0
MB15T200E	1036198*	37.59	32.59	12.50	3.02	3.00	2.38	2.38	2.00	1.25	1.78	5.0
MB15T350E	1036207*	38.81	33.81	15.00	3.02	3.00	2.38	2.38	2.00	1.25	1.78	5.0
MB15T650E	1036216*	40.22	35.22	17.94	3.02	3.00	2.38	2.38	2.00	1.25	1.78	5.0
MB15T1150E	1036225*	42.22	37.22	21.62	3.02	3.00	2.38	2.38	2.00	1.25	1.78	5.0
MB20T200E	1036234*	37.59	32.59	12.50	3.02	3.00	2.38	2.38	2.00	1.25	1.78	5.0
MB20T350E	1036243*	38.81	33.81	15.00	3.02	3.00	2.38	2.38	2.00	1.25	1.78	5.0
MB20T650E	1036252*	40.22	35.22	17.94	3.02	3.00	2.38	2.38	2.00	1.25	1.78	5.0
MB20T1150E	1036261*	42.22	37.22	21.62	3.02	3.00	2.38	2.38	2.00	1.25	1.78	5.0
MB25T350E	1036270	47.18	40.18	15.00	3.00	3.62	3.00	3.31	2.75	1.75	1.78	6.5
MB25T650E	1036279	49.12	42.75	17.94	3.00	3.62	3.00	3.31	2.75	1.75	1.78	6.5
MB25T1150E	1036288	51.06	44.69	21.62	3.00	3.62	3.00	3.31	2.75	1.75	1.78	6.5
MB30T650E	1036297	49.12	42.75	17.94	3.00	3.62	3.00	3.31	2.75	1.75	1.78	6.5
MB30T1150E	1036306	51.06	44.69	21.62	3.00	3.62	3.00	3.31	2.75	1.75	1.78	6.5

4:1 Design Factor. *4 short Ton through 20 short Ton models use Crosby "N" style hooks with integrated latch. All sizes are RFID EQUIPPED.

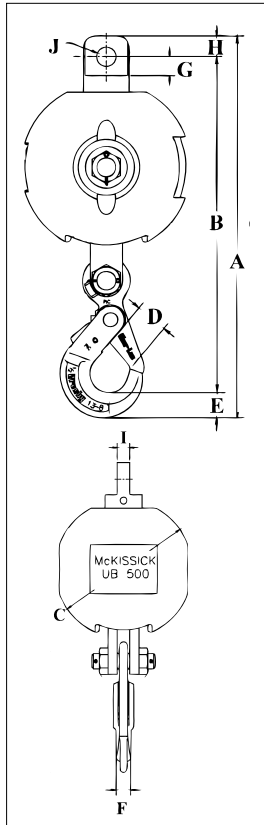

UB-500S Top Swivel Overhaul Balls with SHUR-LOC® Hooks

Model No.	UB-500 "S" Stock No.	Dimensions (in)									
		A	B	C	D	E	F	G	H	I	J
MB4T35S	1036005	20.66	18.18	7.50	1.83	1.15	.94	1.88	1.38	.88	1.31
MB4T85S	1036018	21.55	19.05	9.25	1.83	1.15	.94	1.88	1.38	.88	1.31
MB4T150S	1036032	22.55	20.05	11.25	1.83	1.15	.94	1.88	1.38	.88	1.31
MB4T200S	1036041	22.92	20.42	12.50	1.83	1.15	.94	1.88	1.38	.88	1.31
MB7T85S	1036050	23.90	21.30	9.25	2.11	1.66	1.16	1.88	1.38	.88	1.31
MB7T150S	1036063	25.28	22.30	11.25	2.11	1.66	1.16	1.88	1.38	.88	1.31
MB7T200S	1036077	25.61	22.65	12.50	2.11	1.66	1.16	1.88	1.38	.88	1.31
MB7T285S	1036086	26.58	23.61	13.88	2.11	1.66	1.16	1.88	1.38	.88	1.31
MB10T150S	1036095	31.24	27.19	11.25	2.49	2.06	1.50	2.75	2.00	1.25	1.78
MB10T200S	1036108	31.61	27.56	12.50	2.49	2.06	1.50	2.75	2.00	1.25	1.78
MB10T285S	1036122	32.55	28.50	13.88	2.49	2.06	1.50	2.75	2.00	1.25	1.78
MB10T350S	1036131	33.11	29.06	15.00	2.49	2.06	1.50	2.75	2.00	1.25	1.78
MB10T650S	1036140	34.59	30.54	17.94	2.49	2.06	1.50	2.75	2.00	1.25	1.78

UB-500 Series Non Swiveling Overhaul Balls



S320
Eye Hook



S1316 A
SHUR-LOC®
Eye Hook



Both styles available with
optional **McKissick®**
Wedge Socket Assembly
or S-422 **TERMINATOR**
Wedge Socket



UWO 422T
TERMINATOR
Wedge Only

- Sizes 4 short Tons through 15 short Tons are available with Crosby's S1316A "Positive Locking" SHUR-LOC® hook which may be used for lifting personnel. Meets the intent of OSHA Rule 1926.1431(g)(1)(i)(A) and 1926.1501(g)(4)(iv)(B).
- Design Factor 4:1.
- Each ball can be equipped with the new McKissick® US-422T Wedge Socket which can be easily adjusted to fit various sizes of wireline by changing the wedge.

Key to McKissick® UB-500 Utility Overhaul Ball Model Number				
MB	4	T	35	E
↓	↓	↓	↓	↓
McKissick® Utility Overhead Ball	Working Load Limit (Tons)	Swivel Style T = Top NS = Non	Ball Only Weight	Hook Style E = 320 or 320N S = SHUR-LOC® Eye Hook


Overhaul Ball Assembly

Optional US-422T Wedge Sockets

McKissick® UB-500 Model No.	UB-500 "E" Eye Hook Stock No.*	UB-500 "S" SHUR-LOC® Stock No.	Working Load Limit (short tons)	Weight Each (lb)	Wire Rope Diameter (in)	Model No.	Wedge Socket Assy. Stock No.	Weight Each (lb)	Wedge Only Stock No.	Weight Each (lb)
MB4NS35E	1036402	1036407	4	54						
MB4NS85E	1036411	1036416	4	98	3/8	US4T	1044300	4.6	1047310	0.7
MB4NS150E	1036420	1036425	4	158	7/16	US4T	1044309	4.6	1047301	1.0
MB4NS200E	1036429	1036434	4	200	1/2	US4T	1044318	4.6	1047329	1.0
MB7NS85E	1036438	1036443	7	104	1/2	US5T	1044327	8.5	1047338	2.0
MB7NS150E	1036447	1036452	7	165	9/16	US5T	1044336	8.5	1047347	1.8
MB7NS200E	1036456	1036461	7	205	5/8	US5T	1044345	8.5	1047356	1.8
MB7NS285E	1036465	1036470	7	316	5/8	US6T	1044354	9.4	1047365	3.0
					3/4	US6T	1044363	9.4	1047374	2.5
MB10NS150E	1036474	1036479	10	198						
MB10NS200E	1036483	1036488	10	242						
MB10NS285E	1036492	1036497	10	347						
MB10NS350E	1036501	1036506	10	385	5/8	US6T	1044354	9.4	1047365	3.0
MB10NS650E	1036510	1036511	10	700	3/4	US6T	1044363	9.4	1047374	2.5
MB12NS150E	1036519	—	12	198	7/8	US8T	1044404	20.8	1047425	5.5
MB12NS200E	1036528	—	12	240	1	US8T	1044417	20.8	1047431	6.1
MB12NS285E	1036537	—	12	347	1-1/8	US10T	1044426	46.5	1047440	9.7
MB12NS350E	1036546	—	12	385	1-1/4	US10T	1044435	46.5	1047459	10.4
MB12NS650E	1036555	—	12	700						
MB15NS200E	1036564	—	15	267	5/8	US8AT	1044372	17.5	1047383	3.2
MB15NS350E	1036573	—	15	425	3/4	US8AT	1044381	17.5	1047392	3.4
MB15NS650E	1036582	—	15	722	7/8	US8T	1044404	20.8	1047425	5.5
MB15NS1150E	1036591	—	15	1280	1	US8T	1044417	20.8	1047431	6.1
					1-1/8	US10T	1044426	46.5	1047440	9.7
					1-1/4	US10T	1044435	46.5	1047459	10.4

4:1 Design Factor. *Utilizes Crosby "N" style hooks with integrated latch. Replacement latch kit is S-4320. PL latch and S-4055 latch will not fit.


UB-500 NON SWIVEL OVERHAUL BALLS

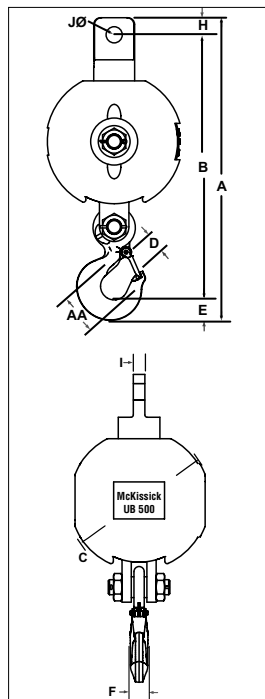

UB-500NS Non Swivel Overhaul Balls with 320N Eye Hooks

Model No.	UB-500NS "E" Stock No.*	Dimensions (in)									
		A	B	C	D	E	F	H	I	J	AA
MB4NS35E	1036402	20.09	17.27	7.5	1.36	1.44	1.12	1.38	0.75	1.31	2.5
MB4NS85E	1036411	20.98	18.16	9.25	1.36	1.44	1.12	1.38	0.75	1.31	2.5
MB4NS150E	1036420	21.98	19.16	11.25	1.36	1.44	1.12	1.38	0.75	1.31	2.5
MB4NS200E	1036429	22.35	19.53	12.5	1.36	1.44	1.12	1.38	0.75	1.31	2.5
MB7NS85E	1036438	23.18	20.36	9.25	1.61	1.81	1.38	1.38	0.75	1.31	3.0
MB7NS150E	1036447	24.56	21.36	11.25	1.61	1.81	1.38	1.38	0.75	1.31	3.0
MB7NS200E	1036456	24.89	21.71	12.5	1.61	1.81	1.38	1.38	0.75	1.31	3.0
MB7NS285E	1036465	25.86	22.67	13.88	1.61	1.81	1.38	1.38	0.75	1.31	3.0
MB10NS150E	1036474	31.44	27.19	11.25	2.08	2.25	1.62	2.00	1.25	1.78	4.0
MB10NS200E	1036483	31.81	27.56	12.5	2.08	2.25	1.62	2.00	1.25	1.78	4.0
MB10NS285E	1036492	32.75	28.5	13.88	2.08	2.25	1.62	2.00	1.25	1.78	4.0
MB10NS350E	1036501	33.31	29.06	15.00	2.08	2.25	1.62	2.00	1.25	1.78	4.0
MB10NS650E	1036510	34.79	30.54	17.94	2.08	2.25	1.62	2.00	1.25	1.78	4.0
MB12NS150E	1036519	31.44	27.19	11.25	2.08	2.25	1.62	2.00	1.25	1.78	4.0
MB12NS200E	1036528	31.81	27.56	12.5	2.08	2.25	1.62	2.00	1.25	1.78	4.0
MB12NS285E	1036537	32.75	28.5	13.88	2.08	2.25	1.62	2.00	1.25	1.78	4.0
MB12NS350E	1036546	33.31	29.06	15.00	2.08	2.25	1.62	2.00	1.25	1.78	4.0
MB12NS650E	1036555	35.79	30.54	17.94	2.08	2.25	1.62	2.00	1.25	1.78	4.0
MB15NS200E	1036564	37.59	32.59	12.5	3.02	3.00	2.38	2.00	1.25	1.78	5.0
MB15NS350E	1036573	38.81	33.81	15.00	3.02	3.00	2.38	2.00	1.25	1.78	5.0
MB15NS650E	1036582	40.22	35.22	17.94	3.02	3.00	2.38	2.00	1.25	1.78	5.0
MB15NS1150E	1036591	42.22	37.22	21.62	3.02	3.00	2.38	2.00	1.25	1.78	5.0

4:1 Design Factor. *Utilizes Crosby "N" style hooks with integrated latch.
Replacement latch kit is S-4320. PL latch and S-4055 latch will not fit.

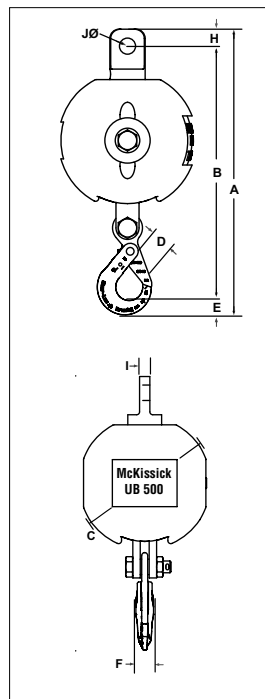


UB-500NS Non Swivel Overhaul Balls with SHUR-LOC® Hooks

Model No.	UB-500NS "S" Stock No.	Dimensions (in)									
		A	B	C	D	E	F	H	I	J	
MB4NS35S	1036407	20.66	18.18	7.5	1.83	1.15	0.94	1.38	0.75	1.31	
MB4NS85S	1036416	21.55	19.05	9.25	1.83	1.15	0.94	1.38	0.75	1.31	
MB4NS150S	1036425	22.55	20.05	11.25	1.83	1.15	0.94	1.38	0.75	1.31	
MB4NS200S	1036434	22.92	20.42	12.5	1.83	1.15	0.94	1.38	0.75	1.31	
MB7NS85S	1036443	23.9	21.3	9.25	2.11	1.66	1.16	1.38	0.75	1.31	
MB7NS150S	1036452	25.28	22.3	11.25	2.11	1.66	1.16	1.38	0.75	1.31	
MB7NS200S	1036461	25.61	22.65	12.5	2.11	1.66	1.16	1.38	0.75	1.31	
MB7NS285S	1036470	26.58	23.61	13.88	2.11	1.66	1.16	1.38	0.75	1.31	
MB10NS150S	1036479	31.24	27.19	11.25	2.49	2.06	1.5	2.00	1.25	1.78	
MB10NS200S	1036488	31.61	27.56	12.5	2.49	2.06	1.5	2.00	1.25	1.78	
MB10NS285S	1036497	32.55	28.5	13.88	2.49	2.06	1.5	2.00	1.25	1.78	
MB10NS350S	1036506	33.11	29.06	15.00	2.49	2.06	1.5	2.00	1.25	1.78	
MB10NS650S	1036511	34.59	30.54	17.94	2.49	2.06	1.5	2.00	1.25	1.78	



Split Overhaul Ball

- Attaches easily to Wireline.

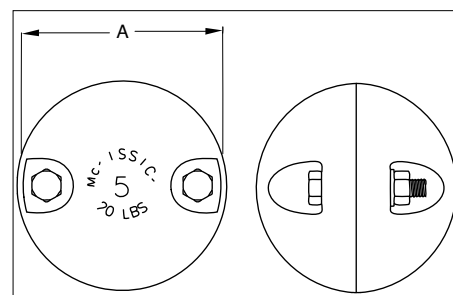


Split Overhaul Ball

Catalog No.	Stock No.	Wire Rope Diameter (in)	Weight Each (lb)	Ball Diameter A (in)
SHB - 15	2003822	1/4-5/16	15	5.06
SHB - 20	2003830	3/8	20	5.38
SHB - 50	2003831	1/2 - 5/8	50	7.12
SHB - 100	2003832	5/8 - 3/4 - 7/8	100	9.19



AS-15

- Utilizes genuine Crosby hooks which are forged alloy steel, Quenched & Tempered, and contain the patented QUIC-CHECK® marking.
- Entire overhaul ball is zinc plated to resist corrosion.
- Designed with angular contact bearings which maximizes efficiency, reliability, and service life of swivel and extend the life of the wireline.
- Available with wide jaw opening that utilizes nylon spools and shields.
- Designed for applications where headroom is critical.
- Other upper fittings available upon request.

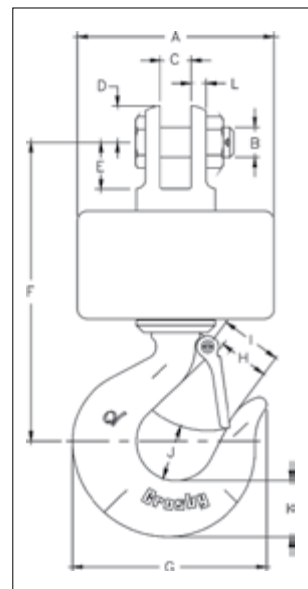

Angular Contact Bearing Swivel Overhaul Balls

Stock No.	Working Load Limit (short Tons)	Wire Rope Diameter (in)	Dimensions (in)												Weight Each (lb)
			A	B	C	D	E	F	G	H	I	J	K	L	
2009806	1.5	.38	4.00	.50	.50	.69	.78	6.28	4.09	1.12	1.22	1.19	1.12	.31	9
2009807	3.0	.50	5.00	.75	.75	.94	1.19	8.56	4.94	1.34	1.50	1.38	1.44	.38	19
2003969	5.0	.62	6.88	.88	1.06	1.12	1.56	10.81	6.50	1.69	1.88	1.75	1.81	.56	43
2009808	8.5	.75	7.00	1.19	1.56	1.34	2.09	13.75	8.69	2.25	2.50	2.56	2.59	.53	60

5:1 Design Factor.




UB-550E

UB-550 Top Swivel Overhaul Balls

- Top swivel design assures that the ball remains stationary if the wireline spins.
- Utilizes genuine forged Crosby hooks, bail and connector.
- Quenched and Tempered.
- Both styles of hooks incorporate QUIC-CHECK® Deformation and Angle Indicators.
- Easy disassembly for periodic inspection and maintenance.
- Design factor of 4:1.



UB-550S

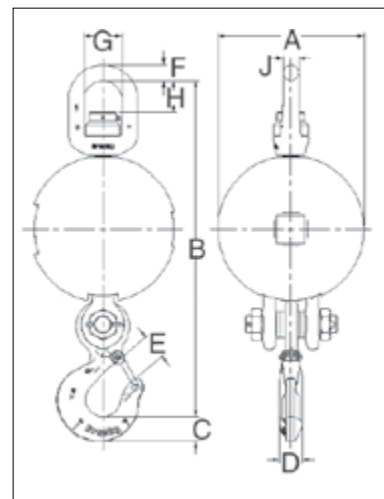

UB-550E Top Swivel Overhaul Balls with Crosby Eye Hook

Stock No.	Model No.	Working Load Limit (short Tons)	Weight Each (lb)	Dimensions (in)								
				A	B	C	D	E	F	G	H	J
1036621	MB04BT085E	4	113	8.88	21.00	1.44	1.31	1.36	1.12	2.75	2.28	1.12
1036649	MB04BT150E	4	178	10.56	22.72	1.44	1.31	1.36	1.12	2.75	2.28	1.12
1036667	MB04BT200E	4	232	11.62	23.72	1.44	1.31	1.36	1.12	2.75	2.28	1.12
1036685	MB07BT085E	7	113	8.88	22.48	1.81	1.66	1.61	1.12	2.75	2.28	1.12
1036705	MB07BT150E	7	178	10.56	24.20	1.81	1.66	1.61	1.12	2.75	2.28	1.12
1036723	MB07BT200E	7	232	11.62	25.20	1.81	1.66	1.61	1.12	2.75	2.28	1.12

4:1 Design Factor.



UB-550S Top Swivel Overhaul Balls with SHUR-LOC® Eye Hook

Stock No.	Model No.	Working Load Limit (short Tons)	Weight Each (lb)	Dimensions (in)								
				A	B	C	D	E	F	G	H	J
1036630	MB04BT085S	4	113	8.88	23.32	1.67	1.16	2.11	1.12	2.75	2.28	1.12
1036658	MB04BT150S	4	178	10.56	25.04	1.67	1.16	2.11	1.12	2.75	2.28	1.12
1036676	MB04BT200S	4	232	11.62	26.04	1.67	1.16	2.11	1.12	2.75	2.28	1.12
1036694	MB07BT085S	7	113	8.88	23.32	1.67	1.16	2.11	1.12	2.75	2.28	1.12
1036714	MB07BT150S	7	178	10.56	25.04	1.67	1.16	2.11	1.12	2.75	2.28	1.12
1036732	MB07BT200S	7	232	11.62	26.04	1.67	1.16	2.11	1.12	2.75	2.28	1.12

4:1 Design Factor.

ROPEBLOCK

CATALOG

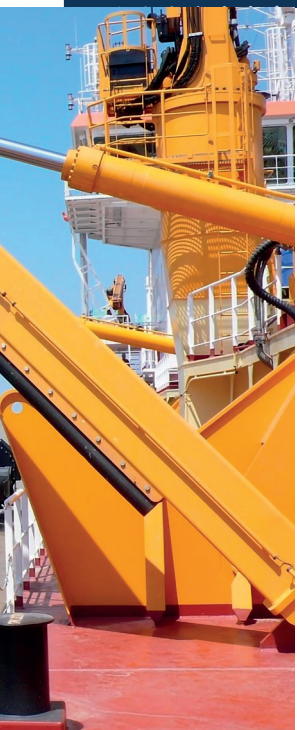



CONSTRUCTION SPECIFIC BLOCKS

OVERHAUL BALLS

In Ropeblock Overhaul Balls, weights are based on average boom lengths and efficiency loss in mobile cranes and crawler cranes. The low friction and easy to access hook swivel design makes these overhaul balls an excellent choice for a wide variety of crane applications.

Standard features include:


- Design factor: 4:1
- Design acc. ASME B30.5, B30.10, B30.26
- Bottom and top swivelling hook

- High quality, low friction thrust bearing
- Becket size optimized for Ropeblock Sockets such as Open Wedge Sockets (OWS), Open Spelter Sockets (OSS), Fast Connector Sockets (FCS) or Super Reeve Connector Sockets (SCS)
- Forged high tensile steel EN/DIN hooks
- Body made of forged bar material
- Operational temperature range: -40 up to +80°C / -40 up to +176°F
- High impact-resistant body
- C3M finish, signal yellow

PLEASE CONTACT US FOR MORE DETAILS



OVERHAUL BALLS

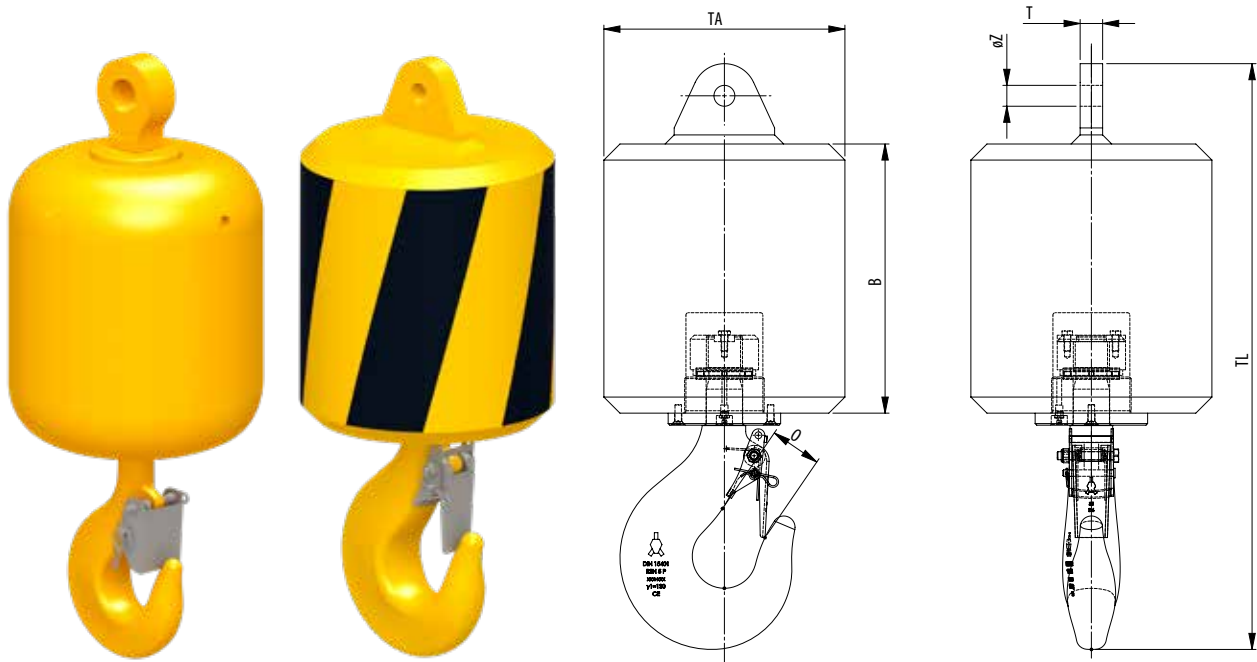

Model No.	WLL (USTons)	For wire ød (inch)	Hook	Becket	Dimensions (inch)						Weight (lbs)
					B	O	TA	TL	T	øZ	
OHB 3,2.60.C-1	3.5	½	2.5	1	7.9	2.0	8.7	19.7	0.9	1.1	130
OHB 3,2.60.C-2	3.5	⅝ - ⅝	2.5	2	7.9	2.0	8.7	19.9	1.1	1.3	130
OHB 5.80.C-2	5.5	⅝ - ⅝	2.5	2	8.7	2.0	9.4	22.3	1.1	1.3	175
OHB 6,3.80.C-2	6.9	⅝ - ⅝	2.5	2	8.7	2.0	9.4	22.3	1.1	1.3	175
OHB 8.130.C-3	8.8	¾	4	3	12.2	2.2	10.1	28.3	1.4	1.5	285
OHB 8.170.C-3	8.8	¾	4	3	13.4	2.2	10.9	26.8	1.4	1.5	375
OHB 8.200.C-3	8.8	¾	5	3	13.2	2.5	11.8	28.7	1.1	1.0	440
OHB 8.250.C.3	8.8	¾	4	3	15.7	2.2	12.5	34.0	1.4	1.5	550
OHB 10.210.C-4	11	⅞	4	4	15.0	2.2	11.7	29.6	1.6	1.7	460
OHB 10.250.C-5	11	1	4	5	15.7	2.2	12.5	30.4	1.8	2.0	550
OHB 12.328.C-4	13.2	⅞	5	4	15.8	2.5	13.8	34.6	1.6	1.7	722
OHB 12,5.200.C-4	13.75	⅞	5	4	13.2	2.5	11.8	31.3	1.6	1.7	440
OHB 12,5.250.C-5	13.75	1	5	5	15.7	2.5	12.5	32.6	1.8	2.0	550
OHB 12,5.370.C-5	13.75	1	5	5	17.7	2.5	13.8	34.6	1.8	2.0	814
OHB 16.370.C-5	17.6	1	6	5	17.7	2.8	12.5	38.7	1.8	2.0	814
OHB 16.450.C-5	17.6	1	6	5	17.3	2.8	15.7	38.3	1.8	2.0	990
OHB 16.545.P-5	17.6	1	6	5	18.1	2.8	17.7	39.5	1.8	2.0	1200
OHB 20.575.P-6	22	1 ⅝	8	6	18.5	3.1	16.0	42.3	2.0	2.3	1265
OHB 20.725.P-6	22	1 ⅝	8	6	24.0	3.1	17.7	47.2	2.0	2.3	1600
OHB 20.910.P-6	22	1 ⅝	8	6	24.2	3.1	19.7	47.4	2.0	2.3	2000
OHB 25.725.P-7	27.5	1 ¼	8	7	20.1	3.1	18.1	42.4	2.4	2.6	1600
OHB 25.725.P-8	27.5	1 ⅜	8	8	20.1	3.1	18.1	42.4	2.4	2.6	1600
OHB 25.910.P-7	27.5	1 ¼	8	7	24.0	3.1	18.1	46.4	2.4	2.6	2000
OHB 25.910.P-8	27.5	1 ⅜	8	8	24.0	3.1	18.1	46.4	2.4	2.6	2000
OHB 32.365.P-8	35	1 ⅝	10	6	15.7	3.5	14.6	49.6	2.6	2.6	800
OHB 32.725.P-7	35	1 ¼	10	7	23.6	3.5	17.7	45.4	2.4	2.6	1600
OHB 32.910.P-9	35	1-½	10	9	24.2	3.5	19.7	46.0	2.8	2.8	2000

Minimum Ultimate Strength = 4 x WLL

- The dimensions in this table are indicative only. A drawing will always be submitted prior to production and will be the leading document when discussing dimensions.
- Overhaul Balls shown here are standard models; inquiries for custom versions are welcome.



SEE OUR WARNING & SAFETY
INFORMATION ON PAGES 134 - 146





CONSTRUCTION SPECIFIC BLOCKS

ROUND OVERHAUL BALLS

The weight of the overhaul balls in this segment are based on average boom lengths and efficiency loss in mobile and crawler cranes. The low friction and easy to access hook swivel design makes the OHB series an excellent choice for a wide variety of crane applications.

Standard features include:


- Top swivelling eye
- Design Factor of 4:1
- Design acc. ASME B30.5, B30.10, B30.26
- High quality, low friction thrust bearing

- Becket size optimized for Ropeblock Sockets such as Open Wedge (OWS), Open Spelter Sockets (OSS), Fast Connector Sockets (FCS) or Super Reeve Connector Sockets (SCS)
- Forged alloy eye hook acc. EN 1677-2
- Body made of cast material
- High impact resistant body
- Operational temperature range: -40 up to +80°C / -40 up to +176°F
- C3M finish, signal yellow

**PLEASE CONTACT YOUR SALES
REPRESENTATIVE FOR MORE DETAILS**



ROUND OVERHAUL BALLS

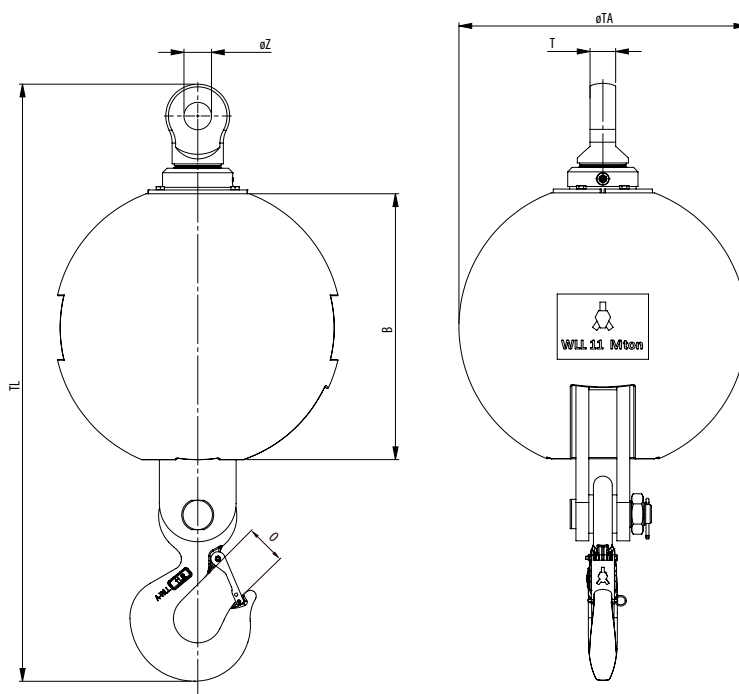

Model No.	WLL (UStons)	For wire ød (inch)	Dimensions (inch)						Weight (lbs)
			B	O	øTA	TL	T	øZ	
OHB-B 4,5.50-x	5	½ - ¾	7.8	1.7	9.1	26.2	TBD	TBD	110
OHB-B 4,5.110-x	5	½ - ¾	11.4	1.7	12.3	27.4	TBD	TBD	242
OHB-B 4,5.145-x	5	½ - ¾	12.6	1.7	13.5	28.9	TBD	TBD	320
OHB-B 7.50-x	8	½ - ¾	7.8	1.7	9.1	26.2	TBD	TBD	110
OHB-B 7.80-x	8	½ - ¾	10	1.7	11	26.2	TBD	TBD	175
OHB-B 7.110-x	8	½ - ¾	11.4	1.7	12.3	27.4	TBD	TBD	242
OHB-B 7.145-x	8	½ - ¾	12.6	1.7	13.5	28.9	TBD	TBD	320
OHB-B 11.180-x	12	¾ - 1 ½	13.1	2.1	14.6	33	TBD	TBD	396
OHB-B 11.265-x	12	¾ - 1 ½	15.4	2.1	16.7	35.9	TBD	TBD	583
OHB-B 11.320-x	12	¾ - 1 ½	16.4	2.1	17.7	36.9	TBD	TBD	705
OHB-B 11.530-x	12	¾ - 1 ½	20	2.1	21.1	40.4	TBD	TBD	1165
OHB-B 14.270-x	15	¾ - 1 ½	15.4	2.3	16.7	37.1	TBD	TBD	594
OHB-B 14.325-x	15	¾ - 1 ½	16.4	2.3	17.7	38.5	TBD	TBD	715
OHB-B 14.387-x	15	¾ - 1 ½	17.7	2.3	18.9	38.9	TBD	TBD	850
OHB-B 18.195-x	20	¾ - 1 ½	13.1	3.1	14.6	38.3	TBD	TBD	429
OHB-B 18.330-x	20	¾ - 1 ½	16.4	3.1	17.7	42	TBD	TBD	726
OHB-B 18.392-x	20	¾ - 1 ½	17.7	3.1	18.9	42.6	TBD	TBD	862
OHB-B 18.545-x	20	¾ - 1 ½	20	3.1	21.1	45.6	TBD	TBD	1200

Minimum Ultimate Strength = 4 x WLL

- The dimensions in this table are indicative only. A drawing will always be submitted prior to production and will be the leading document when discussing dimensions.
- Overhaul Balls shown here are standard models; inquiries for custom versions are welcome.



SEE OUR WARNING & SAFETY
INFORMATION ON PAGES 134 - 146





GENERAL CATALOG LIFTING PRODUCTS

MILLERTM
LIFTING PRODUCTS

High Quality Lifting Products since 1935
www.millerproducts.net

OVERHAUL BALLS- SPLIT BALL

- **Miller's Split Headache Balls provide a convenient way to add weight to wire rope at any point.**
- Split halves bolt together for clamping on the rope.
- Sizes for rope from 3/8" to 7/8".
- Overhaul weights of 20, 50 and 100 lbs.
- Cast iron with Miller Yellow enamel finish



Model Number	Rope Size	Diameter (in.)	Weight Lbs.
HB20	3/8	5	20
HB50	1/2, 5/8	7	50
HB100	5/8, 3/4, 7/8	9	100

OVERHAUL BALLS- ASSEMBLIES Y-LINK

MILLER *SOLID-BALL*® TOP SWIVELING OVERHAUL BALL ASSEMBLIES

Miller's highest-performance overhaul ball assemblies are uniquely equipped with angular contact ball bearing (ACBB) swivels for maximum response to wire rope dynamics under load. The ACBB swivel contains a set of multiple, precision-matched bearings which respond with significantly lower friction and torque than do the basic thrust bearing overhaul balls found elsewhere. In addition to the improved responsiveness, long term durability is greatly enhanced due to longer bearing life.

- Working load capacities from 5 to 35 tons
- Design safety factor of 5:1
- Weights to 1450 lbs. for up to 1 1/2" rope
- Features Miller Y-Link® ACBB swivel
- Swivel lubrication fitting
- Drop forged steel eye hook with safety latch
- Optional positive locking latch
- Heavier & bottom swiveling models available
- Integrated wedge socket or clevis fittings available
- Available in full conformance with API2C




Top Swivel

Bottom Swivel
3000 lbs.

OVERHAUL BALLS- ASSEMBLIES Y-LINK

CLEVIS TO HOOK - TYPE 1

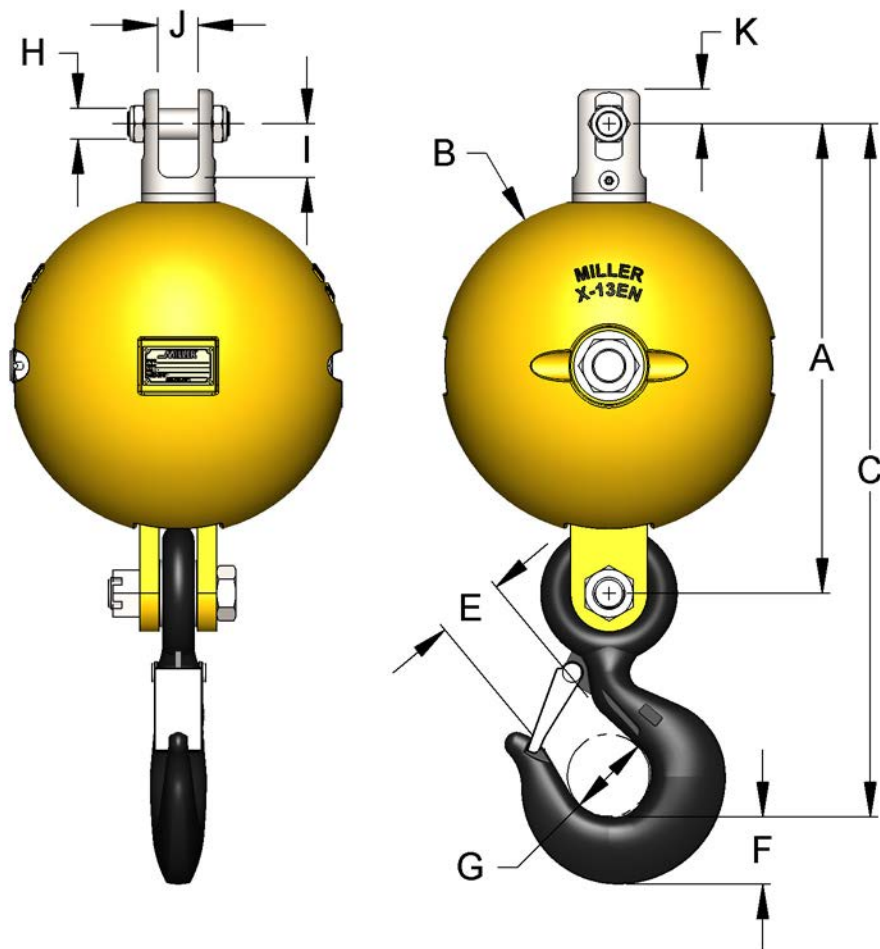


WLL* Tons	Model Number	Rope Size	A	B	C	E	F	G	H	I	J	K	Weight Lbs.	SWIVEL
5	HB7-1N	5/8	13.63	7	20.44	1.61	1.81	2.5	0.88	1.56	1	1.13	65	D-112
5	HB8-1N	5/8	13.63	8	20.44	1.61	1.81	2.5	0.88	1.56	1	1.13	100	D-112
8.5	HB9B-1N	3/4	16.5	9	25.75	2.27	2.59	3.25	1.19	2.19	1.56	1.34	130	EE-112
8.5	HB10B-1N	3/4	16.5	10	25.75	2.27	2.59	3.25	1.19	2.19	1.56	1.34	170	EE-112
8.5	HB11B-1N	3/4	17.38	11	26.63	2.27	2.59	3.25	1.19	2.19	1.56	1.34	215	EE-112
8.5	HB12-1N	3/4	17.38	12	26.63	2.27	2.59	3.25	1.19	2.19	1.56	1.34	265	EE-112
8.5	HB13B-1N	3/4	17.38	13	27.63	2.27	2.59	3.25	1.19	2.19	1.56	1.34	330	EE-112
10	HB13C-1N	7/8	22.13	13	32.88	3.02	3.00	4.25	1.5	3.5	1.75	1.75	364	GG-112
15	HB13D-1N	1	22.13	13	32.88	3.02	3.00	4.25	1.5	3.5	1.75	1.75	364	GG-112
25	HB13E-1N	1-1/2	25.44	13	37.75	3.25	3.62	5	2	3.69	2	2.38	416	H-112
35	HB13F-1N	1-1/2	25.44	13	41.5	3	4.56	5.38	2	3.69	2	2.38	490	HH-112
10	HB16-1N	7/8	24.63	16	35.38	3.02	3.00	4.25	1.5	3.5	1.75	1.75	600	GG-112
15	HB16B-1N	1	24.63	16	35.38	3.02	3.00	4.25	1.5	3.5	1.75	1.75	600	GG-112
25	HB16C-1N	1-1/2	26.94	16	39.63	3.25	3.62	5	2	3.69	2	2.38	650	H-112
35	HB16D-1N	1-1/2	26.94	16	44	3	4.56	5.38	2	3.69	2	2.38	720	HH-112
10	HB18G-1N	7/8	24.93	18	42.21	3.02	3.00	4.25	1.5	3.5	1.75	1.75	800	G-112
15	HB18GG-1N	1	24.93	18	42.21	3.02	3.00	4.25	1.5	3.5	1.75	1.75	800	GG-112
15	HB22GG-1N	1	30	22	40.78	3.02	3.00	4.25	1.5	3.5	1.75	1.75	1300	GG-112
25	HB22H-1N	1-1/2	32.19	22	44.5	3.25	3.62	5	2	3.69	2	2.38	1400	H-112
35	HB22HH-1N	1-1/2	32.19	22	48.13	3	4.56	5.38	2	3.69	2	2.38	1450	HH-112

* Design factor 5:1

OVERHAUL BALLS- ASSEMBLIES Y-LINK

EYE TO HOOK - TYPE 2

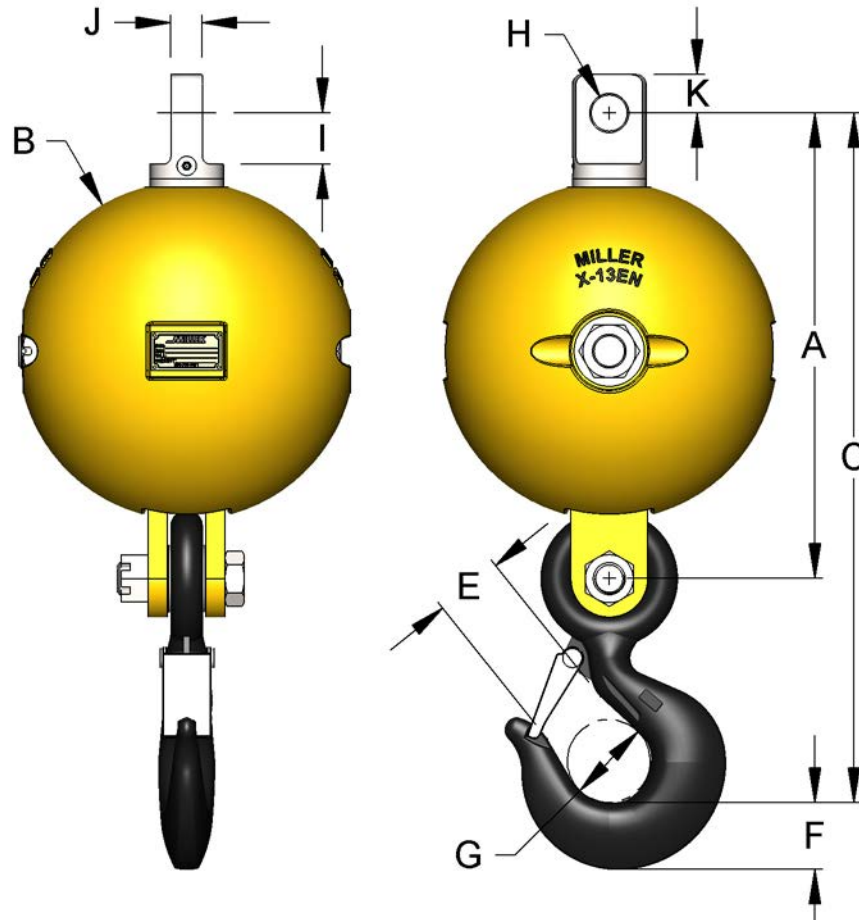


WLL* Tons	Model Number	Rope Size	A	B	C	E	F	G	H	I	J	K	Weight Lbs.	SWIVEL
5	HB7-2N	5/8	13.56	7	20.38	1.61	1.81	2.5	1.28	1.56	1	1.19	65	D-212
5	HB8-2N	5/8	13.56	8	20.38	1.61	1.81	2.5	1.28	1.56	1	1.19	100	D-212
8.5	HB9B-2N	3/4	16.31	9	25.56	2.27	2.59	3.25	1.41	1.94	1.25	1.50	130	EE-212
8.5	HB10B-2N	3/4	16.31	10	25.56	2.27	2.59	3.25	1.41	1.94	1.25	1.50	170	EE-212
8.5	HB11B-2N	3/4	17.19	11	26.44	2.27	2.59	3.25	1.41	1.94	1.25	1.50	215	EE-212
8.5	HB12-2N	3/4	17.19	12	26.44	2.27	2.59	3.25	1.41	1.94	1.25	1.50	265	EE-212
8.5	HB13B-2N	3/4	18.19	13	27.44	2.27	2.59	3.25	1.41	1.94	1.25	1.50	330	EE-212
10	HB13C-2N	7/8	22.06	13	32.81	3.02	3.00	4.25	1.66	2.84	1.72	1.81	363	G3GG
10	HB13-2GN	9/16 THRU 1-1/4	21.84	13	32.59	3.02	3	4.25	1.78	2.75	1.25	2.00	363	G-212-2
15	HB13-2GGN	9/16 THRU 1-1/4	21.88	13	32.63	3.02	3	4.25	1.78	2.75	1.25	2.00	363	GG-212-2
15	HB13D-2N	1	21.75	13	32.5	3.02	3.00	4.25	2.03	2.78	1.94	2.13	363	GG-212
25	HB13E-2N	1-1/2	25.56	13	37.75	3.25	3.62	5	2.31	2.88	2.25	2.38	413	H-212
35	HB13F-2N	1-1/2	25.56	13	41.5	3	4.56	5.38	2.31	2.88	2.25	2.38	487	HH-212
10	HB16-2N	7/8	24.56	16	35.31	3.02	3.00	4.25	1.66	2.84	1.72	1.81	600	G3GG
10	HB16-2GN	9/16 THRU 1-1/4	24.34	16	35.09	3.02	3	4.25	1.78	2.75	1.25	2.00	600	G-212-2
15	HB16-2GGN	9/16 THRU 1-1/4	24.38	16	35.13	3.02	3	4.25	1.78	2.75	1.25	2.00	600	GG-212-2
15	HB16B-2N	1	24.25	16	35	3.02	3.00	4.25	2.03	2.78	1.94	2.13	600	GG-212
25	HB16C-2N	1-1/2	26.94	16	39.63	3.25	3.62	5	2.31	2.88	2.25	2.38	650	H-212
35	HB16D-2N	1-1/2	26.94	16	44	3	4.56	5.38	2.31	2.88	2.25	2.38	720	HH-212
10	HB18G-2N	7/8	25.19	18	37.71	3.02	3.00	4.25	1.66	2.84	1.72	1.81	800	G3GG
10	HB18-2GN	9/16 THRU 1-1/4	24.97	18	37.49	3.02	3	4.25	1.78	2.75	1.25	2.00	800	G-212-2
15	HB18GG-2N	1	24.87	18	37.4	3.02	3.00	4.25	2.03	2.78	1.94	2.13	800	GG-212
15	HB18-2GGN	9/16 THRU 1-1/4	25	18	37.53	3.02	3	4.25	1.78	2.75	1.25	2.00	800	GG-212-2
15	HB22GG-2N	1	29.25	22	40.03	3.02	3.00	4.25	2.03	2.78	1.94	2.13	1300	GG-212
15	HB22-2GGN	9/16 THRU 1-1/4	29.38	22	40.16	3.02	3	4.25	1.78	2.75	1.25	2.00	1300	GG-212-2
25	HB22H-2N	1-1/2	32.19	22	44.5	3.25	3.62	5	2.31	2.88	2.25	2.38	1400	H-212
35	HB22HH-2N	1-1/2	32.19	22	48.13	3	4.56	5.38	2.31	2.88	2.25	2.38	1450	HH-212

* Design factor 5:1

OVERHAUL BALLS- ASSEMBLIES Y-LINK

WEDGE TO HOOK - TYPE 3

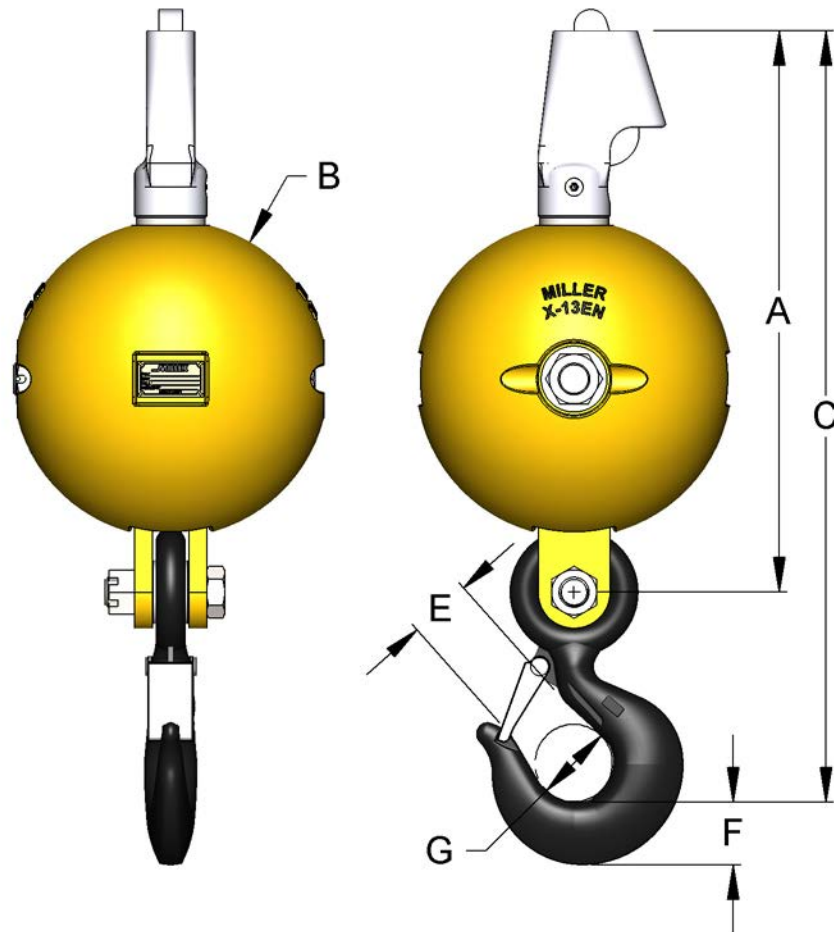


WLL* Tons	Model Number	Rope Size	A	B	C	E	F	G	Weight Lbs.	SWIVEL
5	HB7-3N	1/2, 5/8	18.25	7	25.06	1.61	1.81	2.5	65	D-712
5	HB8-3N	1/2, 5/8	18.25	8	25.06	1.61	1.81	2.5	100	D-712
8.5	HB9B-3N	1/2, 5/8, 3/4	21.25	9	30.5	2.27	2.59	3.25	130	EE-712
8.5	HB10B-3N	1/2, 5/8, 3/4	21.25	10	30.5	2.27	2.59	3.25	170	EE-712
8.5	HB11B-3N	1/2, 5/8, 3/4	22.13	11	31.38	2.27	2.59	3.25	215	EE-712
8.5	HB12-3N	1/2, 5/8, 3/4	22.13	12	31.38	2.27	2.59	3.25	265	EE-712
8.5	HB13B-3N	1/2, 5/8, 3/4	23.13	13	32.38	2.27	2.59	3.25	336	E-712
10	HB13C-3N	3/4, 7/8, 1	27.88	13	38.63	3.02	3.00	4.25	370	GG-712
15	HB13D-3N	3/4, 7/8, 1	27.88	13	38.63	3.02	3.00	4.25	370	GG-712
25	HB13E-3N	1 1/8, 1 1/4	34.31	13	46.63	3.25	3.62	5	439	H-712
35	HB13F-3N	1 1/8, 1 1/4	34.31	13	50.38	3	4.56	5.38	513	HH-712
10	HB16-3N	3/4, 7/8, 1	28.31	16	39.56	3.02	3.00	4.25	600	GG-712
15	HB16B-3N	3/4, 7/8, 1	28.31	16	39.56	3.02	3.00	4.25	600	GG-712
25	HB16C-3N	1 1/8, 1 1/4	35.94	16	48.5	4	3.62	5	640	GG-712
35	HB16D-3N	1 1/8, 1 1/4	35.94	16	52.37	4.25	4.56	5.38	690	GG-712
10	HB18G-3N	3/4, 7/8, 1	24.93	18	45.03	3.02	3.00	4.25	800	G-712
15	HB22GG-3N	3/4, 7/8, 1	33.88	22	44.66	3.02	3.00	4.25	1300	GG-712
25	HB22H-3N	1 1/8, 1 1/4	41.68	22	53.99	3.25	3.62	5	1400	H-712
35	HB22HH-3N	1 1/8, 1 1/4	41.68	22	57.62	3	4.56	5.38	1450	HH-712

* Design factor 5:1

OVERHAUL BALLS- ASSEMBLIES Y-LINK

THIMBLE TO HOOK - TYPE 4

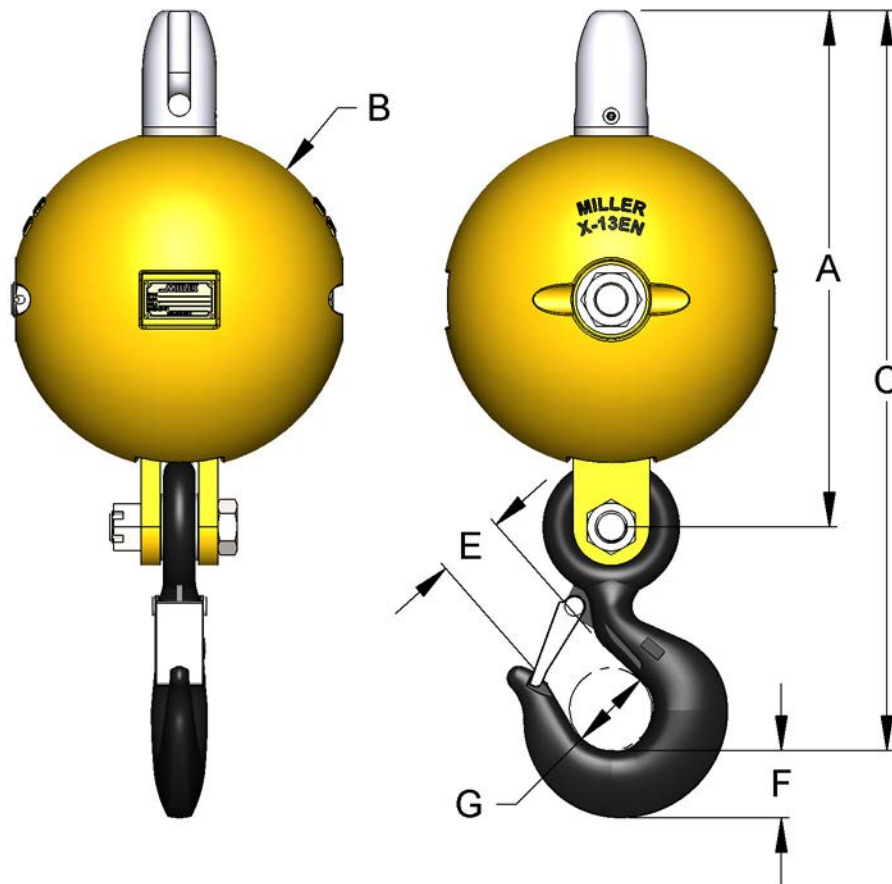


WLL* Tons	Model Number	Rope Size	A	B	C	E	F	G	Weight Lbs.	SWIVEL
5	HB7-4N	5/8	15	7	23.38	1.61	1.81	2.5	65	D-612
5	HB8-4N	5/8	15	8	23.38	1.61	1.81	2.5	100	D-612
8.5	HB9B-4N	3/4	18.44	9	27.1	2.27	2.59	3.25	130	EE-612
8.5	HB10B-4N	3/4	18.44	10	27.1	2.27	2.59	3.25	170	EE-612
8.5	HB11B-4N	3/4	19.19	11	27.85	2.27	2.59	3.25	215	EE-612
8.5	HB12-4N	3/4	19.44	12	28.1	2.27	2.59	3.25	265	EE-612
8.5	HB13B-4N	3/4	20.19	13	28.85	2.27	2.59	3.25	332	EE-612
10	HB13C-4N	7/8	23.63	13	34.38	3.02	3.00	4.25	366	G-612
15	HB13D-4N	1	23.63	13	34.38	3.02	3.00	4.25	366	GG-612
25	HB13E-4N	1-1/2	27.56	13	39.88	3.25	3.62	5	420	H-612
35	HB13F-4N	1-1/2	27.56	13	44.13	3	4.56	5.38	500	HH-612
10	HB16-4N	7/8	26.13	16	36.88	3.02	3.00	4.25	600	GG-612
15	HB16B-4N	1	26.13	16	36.88	3.02	3.00	4.25	600	GG-612
25	HB16C-4N	1-1/2	29.44	16	41.63	3.25	3.62	5	650	H-612
35	HB16D-4N	1-1/2	29.31	16	45.88	3	4.56	5.38	720	HH-612
10	HB18G-4N	7/8	26.44	18	37.5	3.02	3.00	4.25	800	G-612
15	HB18GG-4N	1	26.44	18	37.5	3.02	3.00	4.25	800	GG-612
15	HB22GG-4N	1	31.38	22	42.16	3.02	3.00	4.25	1300	GG-612
25	HB22H-4N	1-1/2	34.56	22	46.87	3.25	3.62	5	1400	H-612
35	HB22HH-4N	1-1/2	34.56	22	50.5	3	4.56	5.38	1450	HH-612

* Design factor 5:1

OVERHAUL BALLS- ASSEMBLIES Y-LINK

NON-SWIVELING EYE TO HOOK - TYPE 5

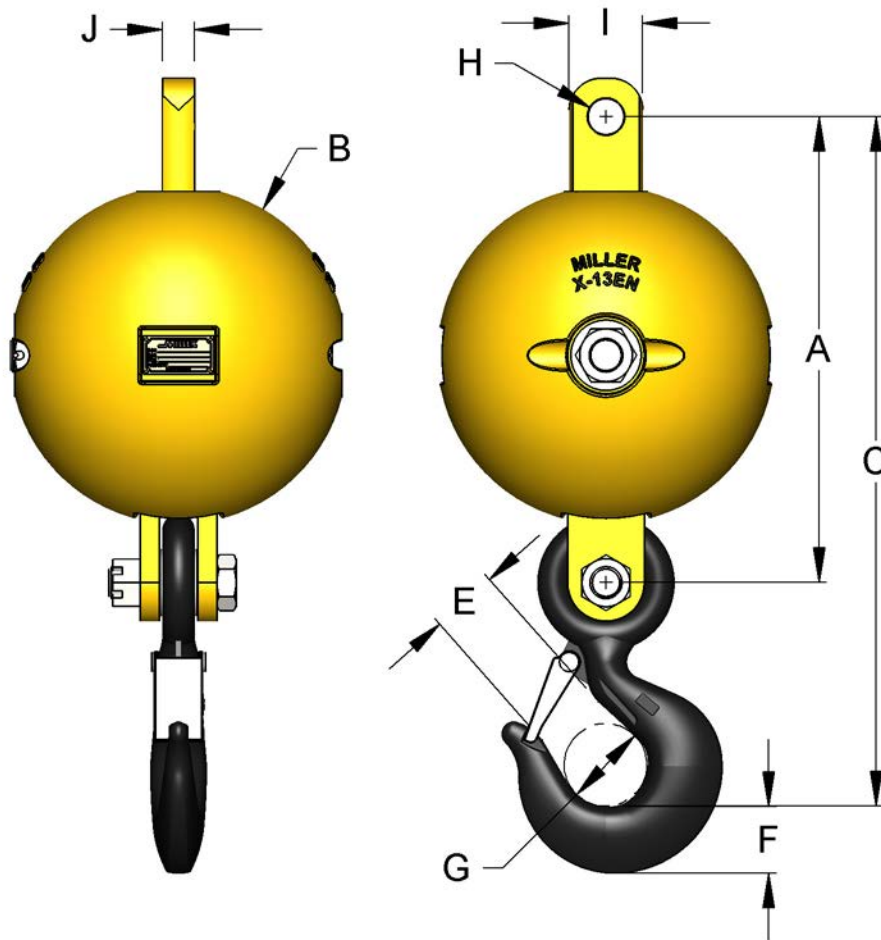

WLL* Tons	Model Number	A	B	C	E	F	G	H	I	J	Weight Lbs.
5	HB8-5N	13.5	8	19.88	1.61	1.81	2.5	1.03	2.5	0.88	95
8.5	HB10-5N	16.5	10	22.81	2.27	2.59	3.25	1.53	3	1.25	165
8.5	HB11-5N	17.13	11	26.78	2.27	2.59	3.25	1.53	3	1.25	215
5	HB12-5N	16.31	12	22.81	1.61	1.81	2.5	1.44	3	1.25	250
8.5	HB12B-5N	18.19	12	26.88	2.27	2.59	3.25	1.44	3	1.25	250
8.5	HB13-5N	17.38	13	26.03	2.27	2.59	3.25	1.53	3	1.25	328
15	HB13B-5N	21.75	13	32.5	3.02	3	4.25	1.81	3	1.5	364
10	HB16-5N	24.25	16	35	3.02	3	4.25	1.81	4	1.5	550
15	HB16B-5N	24.41	16	35.16	3.02	3	4.25	1.63	4	2	550
25	HB16C-5N	24.25	16	35	3.25	3.62	5	2.31	5	2.25	600
35	HB16D-5N	26.94	16	44	3	4.56	5.38	2.31	5	2.25	720
10	HB18G-5N	24.88	18	35.63	3.02	3	4.25	1.63	4	1.72	800
15	HB22GG-5N	28.25	22	39.03	3.02	3	4.25	2.03	4	1.94	1285
25	HB22H-5N	30.19	22	42.5	3.25	3.62	5	2.31	5	2.25	1375
35	HB22HH-5N	30.19	22	46.13	3	4.56	5.38	2.31	5	2.25	1425


* Design factor 5:1

OVERHAUL BALLS- ECONO-LINK SWIVELER

- **Compact headache ball assemblies using Miller Econo-Link thrust bearing swivels are ideal for low head-room applications.**
- Top swiveling- ball remains stationary if wire rope twists.
- Overhaul weights from 35 to 575 lbs.
- Working Loads from 3 to 15 tons, for ½" to 1" wire rope.
- Easy replacement of swivel with standard Miller Econo-Link Type 181 or 281 models.
- Drop forged carbon steel hook with safety latch.
- Design factor 4:1




EYE TO HOOK - TYPE A



WLL* Tons	Model Number	ROPE	A	B	C	D	E	F	G	H	I	J	Weight Lbs.
3	3A35	1/2	6.0	5.0	11.27	13.84	1.13	1.13	1.06	1.00	4.81	1.36	35
6	6A100	5/8-3/4	9.0	6.5	14.17	17.48	1.38	1.50	1.41	1.19	6.27	1.61	100
6	6A250	5/8-3/4	12.5	8.0	14.17	17.48	1.38	1.50	1.41	1.19	6.27	1.61	250
10	10A200	3/4-7/8	11.0	8.0	18.78	23.00	2.38	1.63	1.66	1.44	8.30	2.27	200
10	10A325	3/4-7/8	13.0	10.0	18.78	23.00	2.38	1.63	1.66	1.44	8.30	2.27	325
15	15A320	1	13.0	9.0	23.05	27.94	2.63	1.88	2.06	1.94	10.30	3.02	320
15	15A575	1	15.0	12.0	23.05	27.94	2.63	1.88	2.06	1.94	10.30	3.02	575

* Design factor 4:1

CLEVIS TO HOOK - TYPE O



WLL* Tons	Model Number	ROPE	A	B	C	D	E	F	G	H	I	J	Weight Lbs.
3	3O35	1/2	6.0	5.0	11.64	14.27	1.38	1.19	0.75	1.00	4.81	1.36	35
6	6O100	5/8-3/4	9.0	6.5	14.92	18.04	1.94	1.31	1.00	1.13	6.27	1.61	100
6	6O250	5/8-3/4	12.5	8.0	14.92	18.04	1.94	1.31	1.00	1.13	6.27	1.61	250
10	10O200	3/4-7/8	11.0	8.0	18.91	23.00	2.25	1.50	1.25	1.38	8.30	2.27	200
10	10O325	3/4-7/8	13.0	10.0	18.91	23.00	2.25	1.50	1.25	1.38	8.30	2.27	325
15	15O320	1	13.0	9.0	23.11	27.94	2.56	1.81	1.38	1.75	10.30	3.02	320
15	15O575	1	15.0	12.0	23.11	27.94	2.56	1.81	1.38	1.75	10.30	3.02	575

* Design factor 4:1