




SNATCH BLOCKS


Crosby® **McKISSICK®**



IMPORTED

CoreLifting.com



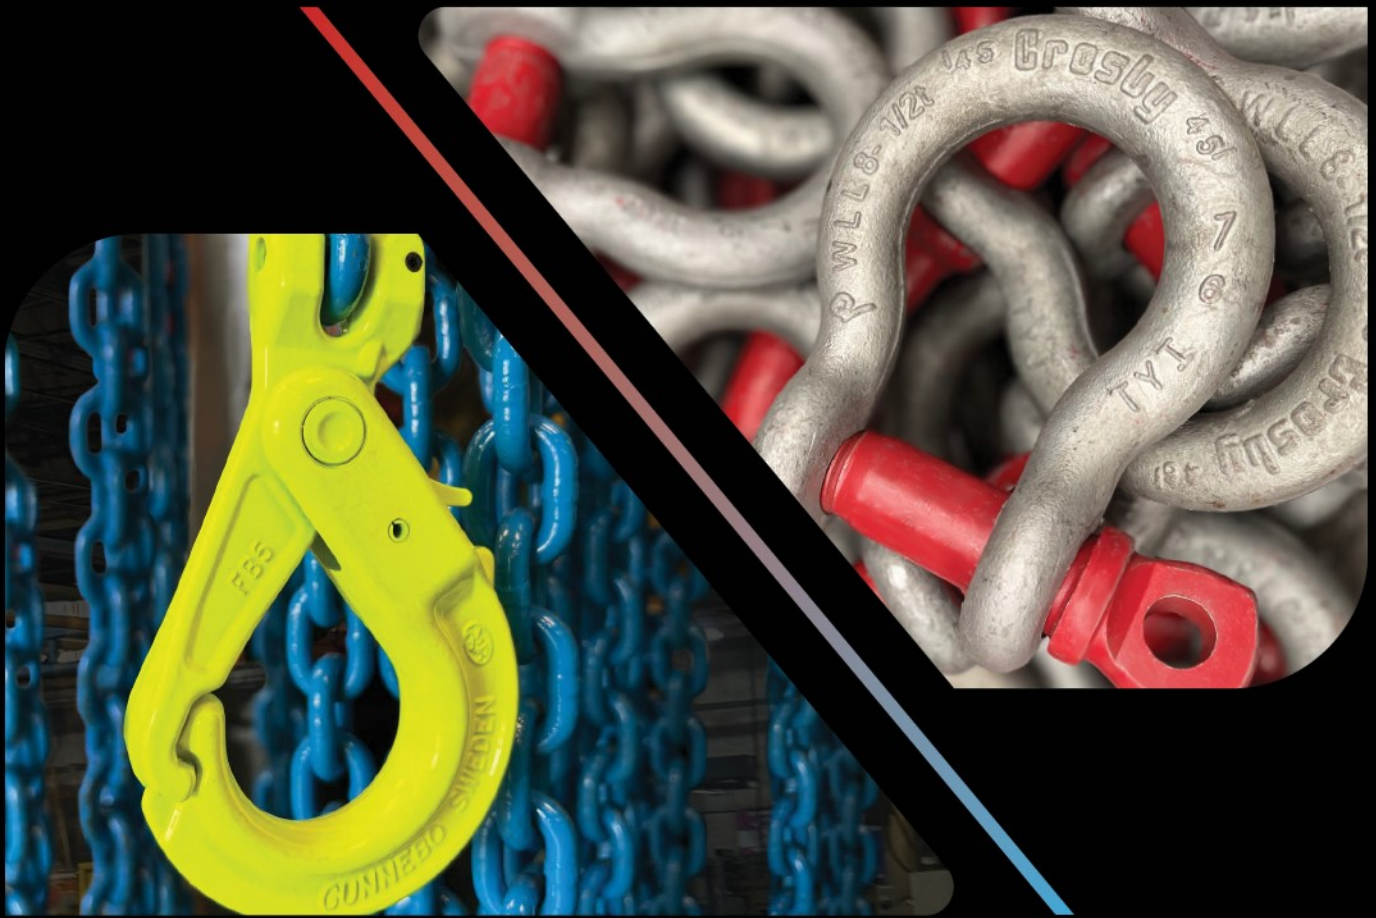

Crosby®



GUNNEBO®
Industries



PRODUCT CATALOG

with application & warning information

Imperial

VALUE ADDED

- **Dual Rated:** To meet the requirements of both short tons and metric tons.
- **Metric Rating:** McKissick® snatch blocks are metric rated to a design factor of 4:1. Because they are metric rated with a world-class design, they are applicable to global use without conversion.
- **US Rating:** When compared to other blocks that are rated in short tons, the design factor of McKissick snatch blocks is 4.5 to 1.
- **Fatigue Properties:** McKissick snatch blocks are fatigue rated. The blocks are designed to meet specific fatigue performance levels and the requirements for the new Euronorm Standards: 20,000 cycles at 1-1/2 times the Working Load Limit.
- **Latch Kits:** McKissick snatch blocks that utilize a hook as an end fitting connection are equipped with latches.
- **Application Information:** Application and warning information for tackle block systems is attached directly to each block. In addition, each block has a product warning sticker attached directly to it for the purpose of giving specific warning instructions about the block.
- **Lock Nut:** McKissick snatch blocks have a special high-performance lock nut on the non-moveable side plate for securing the sheave pin.
- **Sheave & Wireline:** Sheaves for McKissick snatch blocks have a machine-formed groove.
- **Secondary Securement Systems:** McKissick snatch blocks are designed to incorporate a secondary securement system that retains the end fitting connection bolt when the block is in the closed position. In addition, a patented system retains the end fitting connection bolt when the block is in the open position, thus eliminating the loss of block parts.

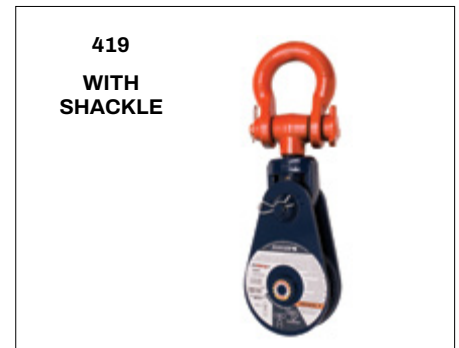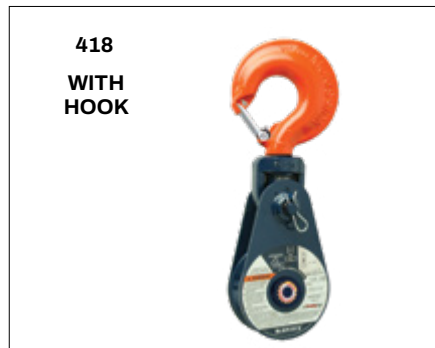

Snatch Block Demonstration

- How to determine snatch block capacity
- How to use a snatch block to gain a mechanical advantage
- Importance of using a load cell in conjunction with a snatch block on a lift



WATCH VIDEO
kitocrosby.com/snatchblockdemo

SNATCH BLOCK WITH SHACKLE FITTING, SINGLE SHEAVE, 2-12t

Fatigue Rated 




L-170



L-160



417

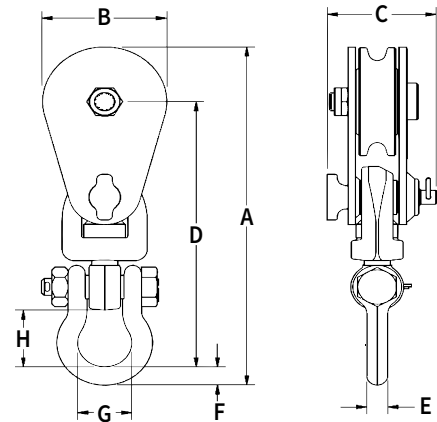

- Opening feature permits easy insertion of rope without reeving, or while the block is suspended.
- Bolt for opening feature is retained, to ensure no lost bolts.
- Forged steel swivel tees, yokes and shackles.
- Can be furnished with bronze bushings or roller bearings.
- Center pin equipped with pressure lube fitting.
- All sizes feature sheave grooves suited for a range of wireline diameters.
- Meets or exceeds all requirements of ASME B30.26. Importantly, these blocks meet other critical performance requirements including fatigue life and material traceability, not addressed by ASME B30.26.
- 417 alloy snatch blocks feature a significant reduction in weight compared to snatch blocks made of non-alloy materials.
- L-170 snatch blocks (with shackle or hook) feature an easy-to-open bolt design. The retaining bolt is released by rotating the fitting assembly, no tools required.
- Kito Crosby's Engineered Solutions Group is ready to discuss your requirements and help select or develop the ideal block for your application. Visit kitocrosby.com/engineeredolutions for more information.



APPLICATION AND WARNING INFORMATION
SECTION 17

Working Load Limit (t)	Wire Rope Diameter (in)	Sheave Diameter (in)	Bearing Code	Weight Each (lb)	Catalog No.	Stock No.	Dimensions (in)							
							A	B	C	D	E	F	G	H
2 metric tons														
2	5/16 - 3/8	3	BB	4	419 w/Eye	109037†	8.67	3.00	2.64	6.61	0.56	0.56	1.38	1.38
2	5/16 - 3/8	3	BB	5	419	109091	9.27	3.00	2.64	7.27	0.50	0.50	1.32	1.56
4 metric tons														
4	3/8 - 1/2	4.5	BB	12	419	109064	13.38	4.24	3.13	10.57	0.62	0.69	1.70	2.00
5 metric tons														
5	3/8 - 1/2 ‡	4	BB	11	L-170	599828	13.88	4.50	2.94	10.94	0.62	0.69	1.70	2.00
5	3/8 - 1/2 ‡	4	RB	11	L-170	599837	13.88	4.50	2.94	10.94	0.62	0.69	1.70	2.00
6 metric tons														
6*	3/8 - 1/2	5	BB	13	L-160	599524	13.82	5.12	3.69	10.57	0.62	0.69	1.70	2.00
6*	3/8 - 1/2	5	RB	13	L-160	599533	13.82	5.12	3.69	10.57	0.62	0.69	1.70	2.00
8 metric tons														
8	5/8 - 3/4	6	BB	28	419	109126	18.93	6.00	4.19	14.68	1.25	1.25	3.00	3.47
8	5/8 - 3/4	6	RB	28	419	109153	18.93	6.00	4.19	14.68	1.25	1.25	3.00	3.47
8	5/8 - 3/4	8	BB	33	419	109224	20.99	8.12	4.19	15.68	1.25	1.25	3.00	3.47
8	5/8 - 3/4	8	RB	33	419	109251	20.99	8.12	4.19	15.68	1.25	1.25	3.00	3.47
8	5/8 - 3/4	10	BB	43	419	109322	23.06	10.12	4.19	16.75	1.25	1.25	3.00	3.47
8	5/8 - 3/4	10	RB	43	419	109359	23.06	10.12	4.19	16.75	1.25	1.25	3.00	3.47
8	5/8 - 3/4	12	BB	55	419	109420	25.87	12.12	4.19	18.56	1.25	1.25	3.00	3.47
8	5/8 - 3/4	12	RB	55	419	109457	25.87	12.12	4.19	18.56	1.25	1.25	3.00	3.47
8	5/8 - 3/4	14	BB	67	419	109527	27.37	14.12	4.19	19.06	1.25	1.25	3.00	3.47
8	5/8 - 3/4	14	RB	67	419	109545	27.37	14.12	4.19	19.06	1.25	1.25	3.00	3.47
12 metric tons														
12*	5/8 - 3/4	5.75	BB	29	L-160	599588	19.03	6.00	4.19	14.78	1.25	1.25	3.00	3.47
12*	5/8 - 3/4	5.75	RB	29	L-160	599597	19.03	6.00	4.19	14.78	1.25	1.25	3.00	3.47
12	3/4 - 7/8	6	BB	28	417	168972	18.93	6.00	4.19	14.68	1.25	1.25	3.00	3.47
12	3/4 - 7/8	6	RB	28	417	193757	18.93	6.00	4.19	14.68	1.25	1.25	3.00	3.47
12	3/4 - 7/8	8	BB	34	417	168990	20.99	8.12	4.19	15.68	1.25	1.25	3.00	3.47
12	3/4 - 7/8	8	RB	34	417	193819	20.99	8.12	4.19	15.68	1.25	1.25	3.00	3.47
12	3/4 - 7/8	10	BB	42	417	193882	23.06	10.12	4.19	16.75	1.25	1.25	3.00	3.47
12	3/4 - 7/8	10	RB	42	417	193935	23.06	10.12	4.19	16.75	1.25	1.25	3.00	3.47

4:1 Design Factor. *3.5:1 Design Factor. † Fitted with 1-1/4" ID Swivel Eye. ‡ Special Dual Groove Sheave also accepts 1-1/4" Manilla Rope.

SNATCH BLOCK WITH SHACKLE FITTING, SINGLE SHEAVE, 15-60t

Fatigue Rated



421




419



431



435

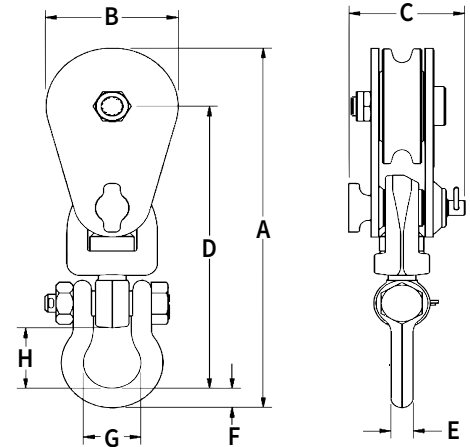

- Opening feature permits easy insertion of rope without reeving, or while the block is suspended.
- Can be furnished with bronze bushings or roller bearings.
- Center pin equipped with pressure lube fitting.
- All sizes feature sheave grooves suited for a range of wireline diameters.
- Meets or exceeds all requirements of ASME B30.26. Importantly, these blocks meet other critical performance requirements including fatigue life and material traceability, not addressed by ASME B30.26.
- 435 alloy snatch blocks feature a significant reduction in weight compared to snatch blocks made of non-alloy materials.
- Kito Crosby's Engineered Solutions Group is ready to discuss your requirements and help select or develop the ideal block for your application. Visit kitocrosby.com/engineeredolutions for more information.



APPLICATION AND WARNING INFORMATION
SECTION 17

Working Load Limit (t)	Wire Rope Diameter (in)	Sheave Diameter (in)	Bearing Code	Weight Each (lb)	Catalog No.	Stock No.	Dimensions (in)							
							A	B	C	D	E	F	G	H
15 metric tons														
15	3/4 - 7/8	8	BB	59	421	108308	23.00	8.12	5.09	17.19	1.50	1.75	3.12	3.12
15	3/4 - 7/8	8	RB	59	421	108309	23.00	8.12	5.09	17.19	1.50	1.75	3.12	3.12
15	3/4 - 7/8	10	BB	68	421	108390	24.75	10.12	5.09	17.94	1.50	1.75	3.12	3.12
15	3/4 - 7/8	10	RB	68	421	108391	24.75	10.12	5.09	17.94	1.50	1.75	3.12	3.12
15	3/4 - 7/8	16	BB	130	419	109607	31.75	16.12	5.09	22.00	1.50	1.75	3.12	3.12
15	3/4 - 7/8	16	RB	130	419	109625	31.75	16.12	5.09	22.00	1.50	1.75	3.12	3.12
15	7/8 - 1	18	BB	159	419	109643	33.12	18.12	5.09	22.25	1.50	1.75	3.12	3.12
15	7/8 - 1	18	RB	159	419	109661	33.12	18.12	5.09	22.25	1.50	1.75	3.12	3.12
20 metric tons														
20	1 - 1-1/8	8	BB	92	431	121022	26.57	8.12	6.00	19.76	2.00	2.75	3.72	4.00
20	1 - 1-1/8	8	RB	92	431	121040	26.57	8.12	6.00	19.76	2.00	2.75	3.72	4.00
20	1 - 1-1/8	10	BB	112	431	121095	28.64	10.12	6.00	20.72	2.00	2.75	3.72	4.00
20	1 - 1-1/8	10	RB	112	431	121111	28.64	10.12	6.00	20.72	2.00	2.75	3.72	4.00
20	1 - 1-1/8	12	BB	130	431	121175	30.65	12.25	6.00	21.78	2.00	2.75	3.72	4.00
20	1 - 1-1/8	12	RB	130	431	121193	30.65	12.25	6.00	21.78	2.00	2.75	3.72	4.00
20	1 - 1-1/8	14	BB	160	431	121255	33.00	14.00	6.00	23.25	2.00	2.75	3.72	4.00
20	1 - 1-1/8	14	RB	160	431	121273	33.00	14.00	6.00	23.25	2.00	2.75	3.72	4.00
25 metric tons														
25	1 - 1-1/4	8	BB	103	435	208954	27.08	8.25	6.13	20.21	2.00	2.75	3.72	4.00
25	1 - 1-1/4	10	BB	117	435	208965	29.33	10.24	6.13	21.46	2.00	2.75	3.72	4.00
25	1 - 1-1/4	18	BB	270	431	119495	41.36	18.25	7.13	29.12	2.00	3.12	3.50	4.81
25	1 - 1-1/4	18	RB	280	431	119496	41.36	18.25	7.13	29.12	2.00	3.12	3.50	4.81
30 metric tons														
30	1 - 1-1/4	12	BB	208	435	208976	36.61	12.25	7.00	27.37	2.00	3.12	3.50	4.81
30	1 - 1-1/4	14	BB	230	435	208977	38.86	14.25	7.00	28.62	2.00	3.12	3.50	4.81
30	1 - 1-1/4	20	BB	503	431	119589	52.40	20.25	8.31	38.34	2.50	3.94	5.62	7.06
30	1 - 1-1/4	20	RB	485	431	119598	52.40	20.25	8.31	38.34	2.50	3.94	5.62	7.06
30	1 - 1-1/4	24	BB	581	431	119605	56.00	24.25	8.31	40.00	2.50	3.94	5.62	7.06
30	1 - 1-1/4	24	RB	575	431	119614	56.00	24.25	8.31	40.00	2.50	3.94	5.62	7.06
60 metric tons														
60	1 - 1-1/4	12	BB	315	435	8027291	41.65	12.12	8.66	33.19	2.06	2.40	5.75	6.12

4:1 Design Factor.

SNATCH BLOCK WITH HOOK FITTING, SINGLE SHEAVE, 2-12t

Fatigue Rated



416




L-170



L-160



C-720

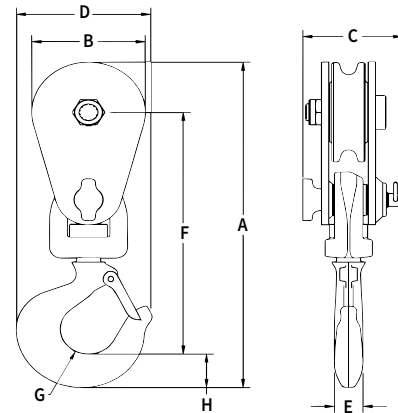

- Opening feature permits easy insertion of rope without reeving, or while the block is suspended.
- Bolt for opening feature is retained, to ensure no lost bolts.
- Forged steel swivel tees, yokes and hooks.
- Furnished with a latch installed.
- Can be furnished with bronze bushings or roller bearings.
- Center pin equipped with pressure lube fitting.
- All sizes feature sheave grooves suited for a range of wireline diameters.
- Meets or exceeds all requirements of ASME B30.26. Importantly, these blocks meet other critical performance requirements including fatigue life and material traceability, not addressed by ASME B30.26.
- 416 alloy snatch blocks feature a significant reduction in weight compared to snatch blocks made of non-alloy materials.
- L-170 snatch blocks (with shackle or hook) feature an easy-to-open bolt design. The retaining bolt is released by rotating the fitting assembly, no tools required.
- Kito Crosby's Engineered Solutions Group is ready to discuss your requirements and help select or develop the ideal block for your application. Visit kitocrosby.com/engineeredolutions for more information.



APPLICATION AND WARNING INFORMATION
SECTION 17

Working Load Limit (t)	Wire Rope Diameter (in)	Sheave Diameter (in)	Bearing Code	Weight Each (lb)	Catalog No.	Stock No.	Dimensions (in)							
							A	B	C	D	E	F	G	H
2 metric tons														
2	5/16 - 3/8	3	BB	5	418	108038	9.74	3.00	2.64	3.59	0.75	7.24	0.75	1.00
4 metric tons														
4	3/8 - 1/2	4.5	BB	12	418	108065	14.12	4.24	3.13	5.24	1.00	10.13	0.94	1.87
5 metric tons														
5	3/8 - 1/2 ‡	4	BB	11	L-170	599800	14.62	4.56	2.94	5.24	1.00	10.50	0.94	1.87
5	3/8 - 1/2 ‡	4	RB	11	L-170	599819	14.62	4.56	2.94	5.24	1.00	10.50	0.94	1.87
6 metric tons														
6*	3/8 - 1/2	5	BB	13	L-160	599506	14.56	5.12	3.69	5.24	1.00	10.13	0.94	1.87
6*	3/8 - 1/2	5	RB	13	L-160	599515	14.56	5.12	3.69	5.24	1.00	10.13	0.94	1.87
7 short Tons														
7T*	3/4 - 7/8	6	BB	28	C-720	280010	16.14	6.00	3.81	6.27	1.44	11.33	1.25	1.61
8 metric tons														
8	5/8 - 3/4	6	BB	27	418	108127	18.95	6.00	4.19	6.81	1.56	13.55	1.31	2.41
8	5/8 - 3/4	6	RB	27	418	108154	18.95	6.00	4.19	6.81	1.56	13.55	1.31	2.41
8	5/8 - 3/4	8	BB	33	418	108225	21.01	8.12	4.19	6.81	1.56	14.54	1.31	2.41
8	5/8 - 3/4	8	RB	33	418	108252	21.01	8.12	4.19	6.81	1.56	14.54	1.31	2.41
8	5/8 - 3/4	10	BB	41	418	108323	23.08	10.12	4.19	6.81	1.56	15.61	1.31	2.41
8	5/8 - 3/4	10	RB	41	418	108350	23.08	10.12	4.19	6.81	1.56	15.61	1.31	2.41
8	5/8 - 3/4	12	BB	48	418	108421	25.89	12.12	4.16	6.81	1.56	17.42	1.31	2.41
8	5/8 - 3/4	12	RB	48	418	108458	25.89	12.12	4.16	6.81	1.56	17.42	1.31	2.41
8	5/8 - 3/4	14	BB	55	418	108528	27.39	14.12	4.19	6.81	1.56	17.92	1.31	2.41
8	5/8 - 3/4	14	RB	55	418	108546	27.39	14.12	4.19	6.81	1.56	17.92	1.31	2.41
12 metric tons														
12*	5/8 - 3/4	5.75	BB	29	L-160	599560	19.99	6.00	4.19	7.88	1.56	14.37	1.44	2.62
12*	5/8 - 3/4	5.75	RB	29	L-160	599579	19.99	6.00	4.19	7.88	1.56	14.37	1.44	2.62
12	3/4 - 7/8	6	BB	26	416	193427	19.89	6.00	4.19	7.88	1.56	14.27	1.44	2.62
12	3/4 - 7/8	6	RB	26	416	193472	19.89	6.00	4.19	7.88	1.56	14.27	1.44	2.62
12	3/4 - 7/8	8	BB	33	416	193490	21.95	8.12	4.19	7.88	1.56	15.27	1.44	2.62
12	3/4 - 7/8	8	RB	33	416	193542	21.95	8.12	4.19	7.88	1.56	15.27	1.44	2.62
12	3/4 - 7/8	10	BB	41	416	193613	24.02	10.12	4.19	7.88	1.56	16.34	1.44	2.62
12	3/4 - 7/8	10	RB	41	416	193677	24.02	10.12	4.19	7.88	1.56	16.34	1.44	2.62

4:1 Design Factor. *3.5:1 Design Factor.. ‡ Special Dual Groove Sheave also accepts 1-1/4" Manilla Rope

SNATCH BLOCK WITH HOOK FITTING, SINGLE SHEAVE, 15-30t

Fatigue Tested



420




418



430



434

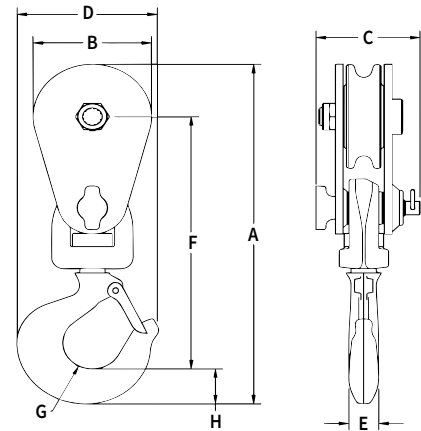

- Opening feature permits easy insertion of rope without reeving, or while the block is suspended.
- Furnished with a latch installed.
- Can be furnished with bronze bushings or roller bearings.
- Center pin equipped with pressure lube fitting.
- All sizes feature sheave grooves suited for a range of wireline diameters.
- Meets or exceeds all requirements of ASME B30.26. Importantly, these blocks meet other critical performance requirements including fatigue life and material traceability, not addressed by ASME B30.26.
- 434 snatch blocks feature a significant reduction in weight compared to snatch blocks made of non-alloy materials.
- Crosby's Engineered Solutions Group is ready to discuss your requirements and help select or develop the ideal block for your application.
- Visit thecrosbygroup.com/engineeredolutions for more information.



APPLICATION AND WARNING INFORMATION
SECTION 17

Working Load Limit (t)	Wire Rope Diameter (in)	Sheave Diameter (in)	Bearing Code	Weight Each (lb)	Catalog No.	Stock No.	Dimensions (in)							
							A	B	C	D	E	F	G	H
15 metric tons														
15	3/4 - 7/8	8	BB	51	420	108275	23.50	8.12	5.09	8.34	1.76	16.51	1.50	2.93
15	3/4 - 7/8	8	RB	51	420	108276	23.50	8.12	5.09	8.34	1.76	16.51	1.50	2.93
15	3/4 - 7/8	10	BB	63	420	108371	25.25	10.12	5.09	8.34	1.76	17.26	1.50	2.93
15	3/4 - 7/8	10	RB	63	420	108372	25.25	10.12	5.09	8.34	1.76	17.26	1.50	2.93
15	3/4 - 7/8	16	BB	130	418	108608	32.25	16.12	5.09	8.34	1.76	21.26	1.50	2.93
15	3/4 - 7/8	16	RB	130	418	108626	32.25	16.12	5.09	8.34	1.76	21.26	1.50	2.93
15	7/8 - 1	18	BB	150	418	108644	33.50	18.12	5.09	8.34	1.76	21.51	1.50	2.93
15	7/8 - 1	18	RB	150	418	108662	33.50	18.12	5.09	8.34	1.76	21.51	1.50	2.93
20 metric tons														
20	1 - 1-1/8	8	BB	75	430	120023	25.87	8.12	6.00	9.39	2.00	18.43	1.50	3.38
20	1 - 1-1/8	8	RB	75	430	120041	25.87	8.12	6.00	9.39	2.00	18.43	1.50	3.38
20	1 - 1-1/8	10	BB	89	430	120096	27.94	10.12	6.00	9.39	2.00	19.50	1.50	3.38
20	1 - 1-1/8	10	RB	89	430	120112	27.94	10.12	6.00	9.39	2.00	19.50	1.50	3.38
20	1 - 1-1/8	12	BB	103	430	120176	30.00	12.25	6.00	9.39	2.00	20.50	1.50	3.38
20	1 - 1-1/8	12	RB	103	430	120194	30.00	12.25	6.00	9.39	2.00	20.50	1.50	3.38
20	1 - 1-1/8	14	BB	123	430	120256	32.34	14.00	6.00	9.39	2.00	21.96	1.50	3.38
20	1 - 1-1/8	14	RB	123	430	120274	32.34	14.00	6.00	9.39	2.00	21.96	1.50	3.38
25 metric tons														
25	1 - 1-1/4	8	BB	90	434	208896	26.56	8.25	6.13	9.36	2.00	19.06	1.50	3.38
25	1 - 1-1/4	10	BB	107	434	208910	28.63	10.25	6.13	9.36	2.00	20.13	1.50	3.38
25	1 - 1-1/4	18	BB	240	430	119486	41.41	18.25	7.12	11.76	2.50	27.97	1.94	4.32
25	1 - 1-1/4	18	RB	240	430	119487	41.41	18.25	7.12	11.76	2.50	27.97	1.94	4.32
30 metric tons														
30	1 - 1-1/4	12	BB	165	434	208931	36.32	12.25	7.00	11.76	2.50	25.88	1.94	4.32
30	1 - 1-1/4	14	BB	180	434	208932	38.57	14.25	7.00	11.76	2.50	27.13	1.94	4.32
30	1 - 1-1/4	20	BB	375	430	119507	52.15	20.25	8.31	15.24	3.00	36.12	2.25	5.91
30	1 - 1-1/4	20	RB	375	430	119516	52.15	20.25	8.31	15.24	3.00	36.12	2.25	5.91
30	1 - 1-1/4	24	BB	450	430	119525	55.75	24.25	8.31	15.24	3.00	37.75	2.25	5.91
30	1 - 1-1/4	24	RB	450	430	119534	55.75	24.25	8.31	15.24	3.00	37.75	2.25	5.91

4:1 Design Factor.

SNATCH BLOCK, TAIL BOARD, SINGLE SHEAVE, 2-12t

Fatigue Rated



- Opening feature permits easy insertion of rope without reeving. Bolt for opening feature is retained, to ensure no lost bolts.
- All sizes feature sheave grooves suited for a range of wireline diameters.
- Meets or exceeds all requirements of ASME B30.26. Importantly, these blocks meet other critical performance requirements including fatigue life and material traceability, not addressed by ASME B30.26.
- 402 snatch blocks feature a significant reduction in weight compared to snatch blocks made of non-alloy materials.
- Kito Crosby's Engineered Solutions Group is ready to discuss your requirements and help select or develop the ideal block for your application. Visit kitocrosby.com/engineeredolutions for more information.



APPLICATION AND WARNING INFORMATION
SECTION 17

Working Load Limit (t)	Wire Rope Diameter (in)	Sheave Diameter (in)	Bearing Code	Weight Each (lb)	Model No.	Stock No.	Dimensions (in)							
							A	B	C	D	E	F	G	H
2 metric tons														
2	5/16 - 3/8	3	BB	3	404	102016	4.87	3.00	2.64	1.04	0.50	2.62	0.87	0.75
4 metric tons														
4	3/8 - 1/2	4.5	BB	7	404	102025	7.75	4.25	3.13	1.56	0.75	4.25	1.63	1.38
5 metric tons														
5	3/8 - 1/2 ‡	4	BB	11	L-170	599846	8.38	4.50	2.94	1.57	0.85	4.69	2.25	1.44
5	3/8 - 1/2 ‡	4	RB	11	L-170	599855	8.38	4.50	2.94	1.57	0.85	4.69	2.25	1.44
6 metric tons														
6*	3/8 - 1/2	5	BB	13	L-160	599542	8.25	5.12	3.69	1.53	0.75	4.25	1.38	1.44
6*	3/8 - 1/2	5	RB	13	L-160	599551	8.25	5.12	3.69	1.53	0.75	4.25	1.38	1.44
8 metric tons														
8	5/8 - 3/4	6	BB	15	404	102098	9.87	6.00	4.19	1.80	1.00	5.12	1.62	1.75
8	5/8 - 3/4	6	RB	15	404	102114	9.87	6.00	4.19	1.80	1.00	5.12	1.62	1.75
8	5/8 - 3/4	8	BB	21	404	102169	11.93	8.12	4.19	1.80	1.00	6.12	1.62	1.75
8	5/8 - 3/4	8	RB	21	404	102187	11.93	8.12	4.19	1.80	1.00	6.12	1.62	1.75
8	5/8 - 3/4	10	BB	29	404	102230	14.00	10.12	4.19	1.80	1.00	7.19	1.69	1.75
8	5/8 - 3/4	10	RB	29	404	102258	14.00	10.12	4.19	1.80	1.00	7.19	1.69	1.75
8	5/8 - 3/4	12	BB	36	404	102301	16.81	12.12	4.19	1.80	1.00	9.00	2.50	1.75
8	5/8 - 3/4	12	RB	36	404	102329	16.81	12.12	4.19	1.80	1.00	9.00	2.50	1.75
12 metric tons														
12*	5/8 - 3/4	5.75	BB	29	L-160	599604	9.97	6.00	4.19	1.72	1.00	5.22	1.85	1.75
12*	5/8 - 3/4	5.75	RB	29	L-160	599613	9.97	6.00	4.19	1.72	1.00	5.22	1.85	1.75
12	3/4 - 7/8	6	BB	15	402	179238	9.87	6.00	4.19	1.80	1.00	5.12	1.62	1.75
12	3/4 - 7/8	6	RB	15	402	179283	9.87	6.00	4.19	1.80	1.00	5.12	1.62	1.75
12	3/4 - 7/8	8	BB	21	402	179318	11.93	8.12	4.19	1.80	1.00	6.12	1.62	1.75
12	3/4 - 7/8	8	RB	21	402	179363	11.93	8.12	4.19	1.80	1.00	6.12	1.62	1.75
12	3/4 - 7/8	10	BB	29	402	179434	14.00	10.12	4.19	1.80	1.00	7.19	1.69	1.75
12	3/4 - 7/8	10	RB	29	402	179498	14.00	10.12	4.19	1.80	1.00	7.19	1.69	1.75

4:1 Design Factor. *3.5:1 Design Factor. ‡ Special Dual Groove Sheave also accepts 1-1/4" Manilla Rope.

SNATCH BLOCK, TAIL BOARD, SINGLE SHEAVE, 15-60t

Fatigue Rated




406



407



401

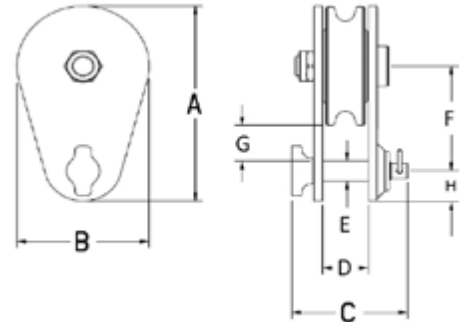

- Opening feature permits easy insertion of rope without reeving. Bolt for opening feature is retained, to ensure no lost bolts.
- Can be furnished with bronze bushings or roller bearings.
- Center pin equipped with pressure lube fitting.
- All sizes feature sheave grooves suited for a range of wireline diameters.
- Meets or exceeds all requirements of ASME B30.26. Importantly, these blocks meet other critical performance requirements including fatigue life and material traceability, not addressed by ASME B30.26.
- 401 snatch blocks feature a significant reduction in weight compared to snatch blocks made of non-alloy materials.
- Kito Crosby's Engineered Solutions Group is ready to discuss your requirements and help select or develop the ideal block for your application. Visit kitocrosby.com/engineeredolutions for more information.


 APPLICATION AND WARNING INFORMATION
SECTION 17


Working Load Limit (t)	Wire Rope Diameter (in)	Sheave Diameter (in)	Bearing Code	Weight Each (lb)	Model No.	Stock No.	Dimensions (in)							
							A	B	C	D	E	F	G	H
15 metric tons														
15	3/4 - 7/8	8	BB	30	406	108311	13.19	8.12	5.13	2.35	1.25	6.75	2.13	2.38
15	3/4 - 7/8	8	RB	30	406	108312	13.19	8.12	5.13	2.35	1.25	6.75	2.13	2.38
15	3/4 - 7/8	10	BB	42	406	108406	14.94	10.12	5.13	2.35	1.25	7.50	1.94	2.38
15	3/4 - 7/8	10	RB	42	406	108407	14.94	10.12	5.13	2.35	1.25	7.50	1.94	2.38
20 metric tons														
20	1 - 1-1/8	8	BB	42	407	103523	13.56	8.12	6.00	2.55	1.50	7.12	2.37	2.38
20	1 - 1-1/8	8	RB	42	407	103541	13.56	8.12	6.00	2.55	1.50	7.12	2.37	2.38
20	1 - 1-1/8	10	BB	55	407	103603	15.63	10.12	6.00	2.55	1.50	8.19	2.44	2.38
20	1 - 1-1/8	10	RB	55	407	103621	15.63	10.12	6.00	2.55	1.50	8.19	2.44	2.38
20	1 - 1-1/8	12	BB	70	407	103685	17.75	12.25	6.00	2.55	1.50	9.25	2.56	2.38
20	1 - 1-1/8	12	RB	70	407	103701	17.75	12.25	6.00	2.55	1.50	9.25	2.56	2.38
20	1 - 1-1/8	14	BB	90	407	103765	20.10	14.00	6.00	2.55	1.50	10.72	2.97	2.38
20	1 - 1-1/8	14	RB	90	407	103783	20.10	14.00	6.00	2.55	1.50	10.72	2.97	2.38
25 metric tons														
25	1 - 1-1/4	8	BB	50	401	178151	13.49	8.25	6.13	2.55	1.50	7.12	2.37	2.25
25	1 - 1-1/4	10	BB	65	401	179167	15.43	10.25	6.13	2.55	1.50	8.19	2.44	2.12
25	1 - 1-1/4	18	BB	165	407	119652	24.62	18.25	7.12	3.05	1.75	13.00	3.13	2.5
25	1 - 1-1/4	18	RB	165	407	119653	24.62	18.25	7.12	3.05	1.75	13.00	3.13	2.5
30 metric tons														
30	1 - 1-1/4	12	BB	95	401	179178	18.62	12.25	7.00	3.05	1.75	10.00	3.13	2.5
30	1 - 1-1/4	14	BB	110	401	179187	20.88	14.25	7.00	3.05	1.75	11.25	3.38	2.5
30	1 - 1-1/4	20	BB	215	407	119669	28.88	20.25	8.31	3.55	2.25	15.25	4.13	3.5
30	1 - 1-1/4	20	RB	215	407	119678	28.88	20.25	8.31	3.55	2.25	15.25	4.13	3.5
30	1 - 1-1/4	24	BB	290	407	119687	32.50	24.25	8.31	3.55	2.25	16.88	3.76	3.5
30	1 - 1-1/4	24	RB	290	407	119696	32.50	24.25	8.31	3.55	2.25	16.88	3.76	3.5
60 metric tons														
60	1 - 1-1/4	12	BB	95	401	8027292	20.32	12.12	8.66	2.78	2.50	10.75	3.50	3.5

4:1 Design Factor.


SNATCH BLOCK WITH HOOK OR SHACKLE FITTING DOUBLE SHEAVE, 4-12t



408
With Hook

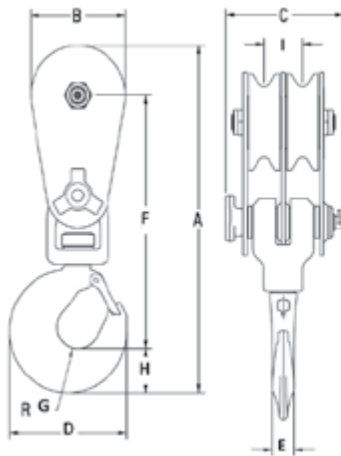

409
With Shackle

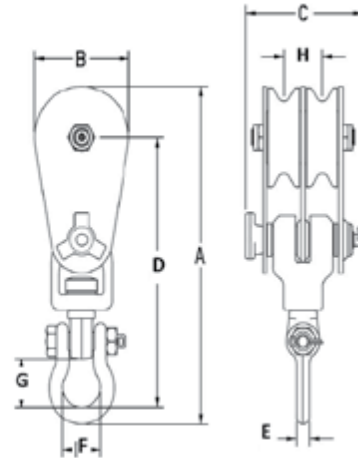

- Two sheave snatch block to allow for additional mechanical advantage, must be reeved with four parts of line.
- Opening feature permits easy insertion of wireline in both sheaves with removal of one bolt.
- 408 is furnished with S-4320 hook latch.
- Center Pin equipped with pressure lube fittings.
- All sizes feature sheave grooves suited for a range of wireline diameters.
- Meets or exceeds all requirements of ASME B30.26. Importantly, these blocks meet other critical performance requirements including fatigue life and material traceability, not addressed by ASME B30.26.
- Kito Crosby's Engineered Solutions Group is ready to discuss your requirements and help select or develop the ideal block for your application. Visit kitocrosby.com/engineeredolutions for more information.

408 Double Sheave Snatch Block with Hook

Working Load Limit (t)	Wire Rope Diameter (in)	Sheave Diameter (in)	Bearing Code	Weight Each (lb)	Stock No.	Dimensions (in)								
						A	B	C	D	E	F	G	H	I
4 metric tons														
4	3/8 - 1/2	4.5	BB	18	104023	14.77	4.24	5.25	5.24	1.00	10.78	0.94	1.87	1.72
12 metric tons														
12	5/8 - 3/4	6	BB	45	104103	21.12	6.00	6.13	7.86	1.56	15.50	1.44	2.62	2.03
12	5/8 - 3/4	6	RB	45	104121	21.12	6.00	6.13	7.86	1.56	15.50	1.44	2.62	2.03
12	5/8 - 3/4	8	BB	53	104185	23.18	8.12	6.13	7.86	1.56	16.50	1.44	2.62	2.03
12	5/8 - 3/4	8	RB	53	104201	23.18	8.12	6.13	7.86	1.56	16.50	1.44	2.62	2.03

4:1 Design Factor.

409 Double Sheave Snatch Block with Shackle

Working Load Limit (t)	Wire Rope Diameter (in)	Sheave Diameter (in)	Bearing Code	Weight Each (lb)	Stock No.	Dimensions (in)							
						A	B	C	D	E	F	G	H
4 metric tons													
4	3/8 - 1/2	4.5	BB	18	105022	14.03	4.24	5.25	11.22	0.62	1.70	2.01	1.72
12 metric tons													
12	5/8 - 3/4	6	BB	50	105102	21.12	6.00	6.13	16.36	1.50	3.12	3.12	2.03
12	5/8 - 3/4	6	RB	50	105120	21.12	6.00	6.13	16.36	1.50	3.12	3.12	2.03
12	5/8 - 3/4	8	BB	58	105184	23.17	8.12	6.13	17.36	1.50	3.12	3.12	2.03
12	5/8 - 3/4	8	RB	58	105200	23.17	8.12	6.13	17.36	1.50	3.12	3.12	2.03

4:1 Design Factor.



APPLICATION AND WARNING INFORMATION
SECTION 17

Tower/Derrick Hoist Blocks


M-491



G-491



- New design provides the dependability of standard McKissick® Snatch Blocks, along with features that make it perfect for the challenging needs of Tugger Hoist and Tower Erection applications.
- Fully recessed sideplate design eliminates gap between sheave rim and sideplate, providing failsafe capture of the sheave in the case of center pin overloading.
- Sealed tapered roller bearings extend the life of the center pin and bearings, and allows for faster line speeds than recommended with standard snatch blocks.
- Holes through side plates are available for secondary block securement device.
- Suitable for hoisting personnel, contingent upon all employees, including the winch operator, being trained to follow applicable Federal, local and industry standards.
 - Tugger/Derrick applications: API RP54
 - Tower applications: OSHA directive CPL 2-1.36
- All sizes are furnished with dual rated wireline sheaves.
- Forged steel swivels, tees, yokes and shackles are Quenched & Tempered.
- Sheave lubrication through center pin for easy maintenance.
- All blocks 14" and larger are furnished with McKissick® Roll Forged sheaves with flame hardened grooves.
- Shackle fitting swivels for easy positioning.
- Manufactured by an API Q1 Certified facility.
- ABS Type Approval and Certification under 2019 Guide for Certification of Lifting Appliances and 2019 Guide for Classification of Drilling Systems.



M-491 / G-491 Tower/Derrick Hoist Blocks

Working Load Limit (t) 4:1 Design Factor	Working Load Limit (t) 5:1 Design Factor	Working Load Limit (t) 10:1 Design Factor (Personnel Lifting)	Maximum Allowable Proof Load (t)	Sheave Diameter (in)	Wire Rope Diameter (in)	M-491 Stock No. Painted	G-491 Stock No. Galvanized	Weight Each (lb)
3	2.4	1.2	6	6	3/8 - 1/2	2020129	-	25
4	3.2	1.6	8	8	3/8 - 1/2	2020161	2020170	35
8	6.4	3.2	16	10	3/8 - 1/2	2020806	2020815	55
8	6.4	3.2	16	10	1/2 - 9/16	2020824	2020833	55
12	9.6	4.8	24	10	1/2 - 9/16	2021118	2021127	55
12	9.6	4.8	24	14	1/2 - 5/8	2021136	2021145	95
12	9.6	4.8	24	14	5/8 - 3/4	2021154	2021163	95
15	12	6.0	30	16	3/4 - 7/8	2021172	2021181	150
15	12	6.0	30	16	7/8 - 1	2021190	2021199	150
25	20	10	50	18	1 - 1 1/8	2032312	2032315	260
30	24	12	60	20	1 1/8 - 1 1/4	2032321	2032324	675

4:1 Design Factor.

GREEN PIN[®]

PRODUCT CATALOGUE

IMPERIAL



BLOCKS



Applications

Blocks are used in lifting systems, to change load direction or to drag a load. Blocks and the wire ropes they contain make a connection between a load and a lifting device.

Range

Green Pin® offers a wide range of blocks. Blocks are available for head loads ranging from 2 t up to 30 t. Other types of blocks can be offered upon special request.

Design

There are different types of blocks with specific designs to suit particular purposes. All types are fitted with conical roller bearings. These can be used for applications with different frequency of use and line speeds. Snatch blocks can be opened up to fit the wire rope easily. There is no need to thread the wire rope through the block.

All types are generally marked as follows:

- Working Load Limit
- manufacturer's symbol
- wire rope diameter in mm and inches
- serial number
- CE conformity code

- e.g. 8 t
- e.g. GP
- e.g. 20 - 22 mm and $\frac{3}{4}$ - $\frac{7}{8}$ inch
- e.g. 1234567
- CE

Finish

Green Pin® Blocks are painted.

Certification

Specific details of certificate availability can be found on each product page. Please verify your certification requirements at the time of order.

Instructions for use

Blocks should be inspected before use to ensure that:

- all markings are legible;
- a block with the correct WLL has been selected;
- the WLL applies to static loads only, the possible occurrence of shock loading must be taken into account when selecting a block;
- the block may never be side loaded but may only be used for in-line use;
- always make sure that the hook, eye or shackle of the block is supporting the load correctly;
- the pin, nut, cotter pin, or any other locking system cannot vibrate out of position;
- the sheaves are functional and rotate easily;
- blocks are free from nicks, gouges and cracks;
- blocks may not be heat treated as this may affect their WLL;
- never modify, repair or reshape a block by machining, welding, heating or bending as this may affect the WLL.

Blocks must be regularly inspected in accordance with the safety standards and regulations given in the country of use. This is required because the products in use may be affected by wear, misuse, overloading etc. which may lead to deformation and alteration of the material structure. Inspection should take place at least every six months and more frequently when the blocks are used in severe operating conditions.


Loads on blocks

The WLLs of our blocks are the maximum loads to be applied to the blocks and their connecting fittings. The load on a sheave or block varies with the angle between the lead and load line. See figure 1. When the two lines are parallel, 1 t on the lead line results in a load of 2 t on the fitting. As the working angle between the lines increases, the load on the fitting is reduced by the angle factor as per table 1. All loads shown ignore frictional losses in the lifting system.

Table 1

working angle	angle factor
0°	2
10°	1.99
20°	1.97
30°	1.93
40°	1.87
45°	1.84
50°	1.81
60°	1.73
70°	1.64
80°	1.53
90°	1.41
100°	1.29
110°	1.15
120°	1
130°	0.84
135°	0.76
140°	0.68
150°	0.52
160°	0.35
170°	0.17
180°	0

Figure 1

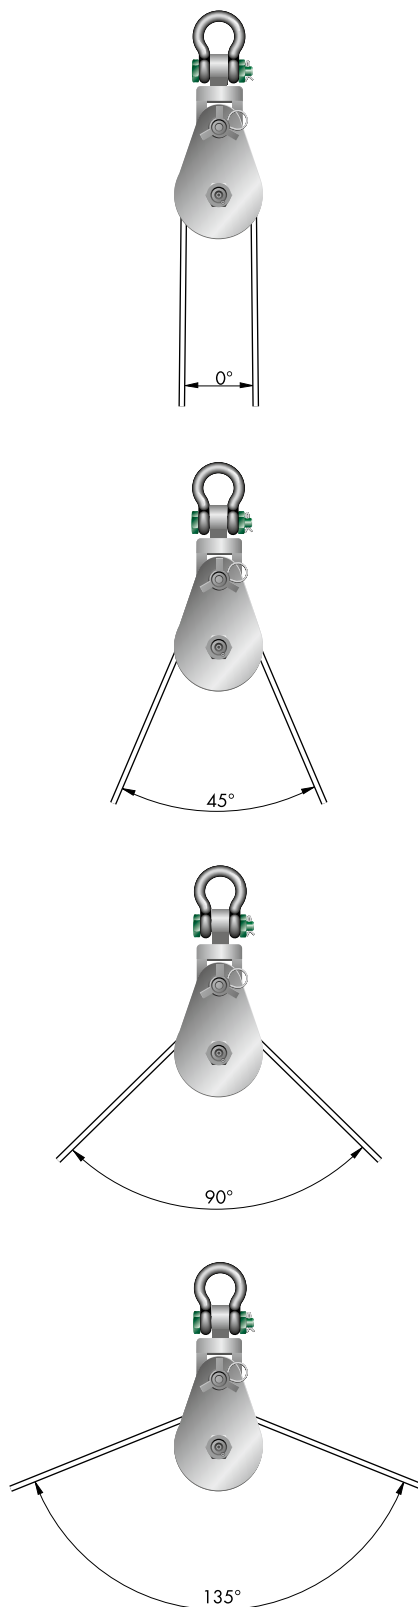






Green Pin® Snatch Block S

Snatch block type 601S with Green Pin® Shackle attached

Scan for
additional
product
details

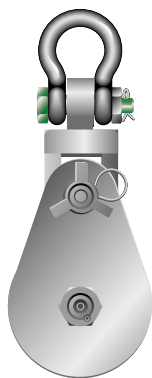

P-6951



- **Material:** carbon steel, fitted with conical roller bearings
- **Safety factor:** MBL equals 4 x WLL
- **Finish:** painted
- **Certification:** 2.1 2.2 MTC[®] CE IIA
- **Article code:** scan QR code to see article codes
- **Note:** Working Load Limit is on the headfitting


working load limit	diameter wire rope	diameter outside sheave	length	width	width outside	thickness	weight each
metric t	inch	a inch	b inch	c inch	d inch	e inch	lbs
2	$\frac{9}{32} - \frac{3}{8}$	3	$11 \frac{15}{32}$	$1 \frac{11}{16}$	$3 \frac{7}{32}$	$3 \frac{7}{16}$	8.53
4	$\frac{3}{8} - \frac{1}{2}$	$4 \frac{1}{2}$	$14 \frac{9}{32}$	$2 \frac{9}{32}$	$4 \frac{23}{32}$	$3 \frac{1}{2}$	14.02
4	$\frac{1}{2} - \frac{9}{16}$	6	$16 \frac{13}{32}$	$2 \frac{9}{32}$	$6 \frac{5}{16}$	$3 \frac{1}{2}$	18.5
8	$\frac{3}{4} - \frac{7}{8}$	6	$18 \frac{13}{16}$	$2 \frac{11}{16}$	$6 \frac{5}{16}$	$4 \frac{11}{16}$	31.1
8	$\frac{9}{16} - \frac{5}{8}$	6	$18 \frac{13}{16}$	$2 \frac{11}{16}$	$6 \frac{5}{16}$	$4 \frac{11}{16}$	31.5
12	$\frac{3}{4} - \frac{7}{8}$	6	$21 \frac{11}{16}$	$3 \frac{9}{32}$	$6 \frac{5}{16}$	$4 \frac{11}{16}$	44.1
12	$\frac{9}{16} - \frac{5}{8}$	6	$21 \frac{11}{16}$	$3 \frac{9}{32}$	$6 \frac{5}{16}$	$4 \frac{11}{16}$	44.1
15	1	6	$23 \frac{1}{32}$	$3 \frac{5}{8}$	$6 \frac{5}{16}$	$5 \frac{7}{16}$	53
4	$\frac{3}{8} - \frac{1}{2}$	8	$18 \frac{13}{16}$	$2 \frac{9}{32}$	$8 \frac{9}{32}$	$4 \frac{11}{16}$	24.3
8	$\frac{3}{4} - \frac{7}{8}$	8	$20 \frac{3}{4}$	$2 \frac{11}{16}$	$8 \frac{9}{32}$	$4 \frac{11}{16}$	39.7
12	$\frac{3}{4} - \frac{7}{8}$	8	$22 \frac{27}{32}$	$3 \frac{9}{32}$	$8 \frac{9}{32}$	$4 \frac{29}{32}$	62
12	$\frac{9}{16} - \frac{5}{8}$	8	$22 \frac{27}{32}$	$3 \frac{9}{32}$	$8 \frac{9}{32}$	$4 \frac{29}{32}$	60
15	1	8	$25 \frac{7}{16}$	$3 \frac{5}{8}$	$8 \frac{9}{32}$	$5 \frac{19}{32}$	66
8	$\frac{3}{4} - \frac{7}{8}$	10	$22 \frac{7}{8}$	$2 \frac{11}{16}$	$10 \frac{1}{4}$	$4 \frac{3}{32}$	57
8	$\frac{9}{16} - \frac{5}{8}$	10	$22 \frac{7}{8}$	$2 \frac{11}{16}$	$10 \frac{1}{4}$	$4 \frac{3}{32}$	57
12	$\frac{3}{4} - \frac{7}{8}$	10	$26 \frac{23}{32}$	$3 \frac{9}{32}$	$10 \frac{1}{4}$	$4 \frac{29}{32}$	77
15	1	10	$27 \frac{3}{4}$	$3 \frac{5}{8}$	$10 \frac{1}{4}$	$5 \frac{3}{4}$	93
8	$\frac{3}{4} - \frac{7}{8}$	12	$25 \frac{7}{16}$	$2 \frac{11}{16}$	$12 \frac{7}{32}$	$4 \frac{3}{16}$	68
12	$\frac{3}{4} - \frac{7}{8}$	12	$29 \frac{7}{16}$	$3 \frac{9}{32}$	$12 \frac{7}{32}$	$5 \frac{3}{4}$	77
15	1	12	$30 \frac{11}{32}$	$3 \frac{5}{8}$	$12 \frac{7}{32}$	$5 \frac{19}{32}$	73
8	$\frac{3}{4} - \frac{7}{8}$	14	$27 \frac{7}{32}$	$2 \frac{11}{16}$	$14 \frac{3}{16}$	$4 \frac{11}{16}$	68
12	$\frac{3}{4} - \frac{7}{8}$	14	$30 \frac{7}{16}$	$3 \frac{9}{32}$	$14 \frac{3}{16}$	$5 \frac{23}{32}$	77
15	1	14	$31 \frac{13}{32}$	$3 \frac{5}{8}$	$14 \frac{3}{8}$	$6 \frac{23}{32}$	139
22	$1 \frac{1}{8} - 1 \frac{1}{4}$	14	$37 \frac{13}{32}$	$4 \frac{31}{32}$	$14 \frac{3}{8}$	$7 \frac{3}{32}$	207
8	$\frac{3}{4} - \frac{7}{8}$	16	$29 \frac{3}{4}$	$2 \frac{11}{16}$	$16 \frac{11}{32}$	$4 \frac{11}{16}$	77
12	$\frac{3}{4} - \frac{7}{8}$	16	$32 \frac{3}{8}$	$3 \frac{9}{32}$	$16 \frac{11}{32}$	$6 \frac{11}{16}$	148
15	1	16	$33 \frac{3}{8}$	$3 \frac{5}{8}$	$16 \frac{11}{32}$	$6 \frac{11}{16}$	86
22	$1 \frac{1}{8} - 1 \frac{1}{4}$	16	$39 \frac{21}{32}$	$4 \frac{31}{32}$	$16 \frac{11}{32}$	$7 \frac{3}{32}$	306
30	$1 \frac{1}{4} - 1 \frac{1}{2}$	16	$42 \frac{3}{8}$	$5 \frac{7}{16}$	$16 \frac{11}{32}$	$8 \frac{9}{32}$	273
8	$\frac{3}{4} - \frac{7}{8}$	18	$32 \frac{5}{32}$	$2 \frac{11}{16}$	$18 \frac{5}{16}$	$4 \frac{11}{16}$	93
12	$\frac{3}{4} - \frac{7}{8}$	18	$34 \frac{17}{32}$	$3 \frac{9}{32}$	$18 \frac{5}{16}$	$6 \frac{11}{16}$	165
15	1	18	$35 \frac{11}{32}$	$3 \frac{5}{8}$	$18 \frac{5}{16}$	$6 \frac{11}{16}$	98
22	$1 \frac{1}{8} - 1 \frac{1}{4}$	18	$41 \frac{5}{8}$	$4 \frac{31}{32}$	$18 \frac{5}{16}$	$7 \frac{3}{32}$	340
30	$1 \frac{1}{8} - 1 \frac{1}{4}$	18	$43 \frac{11}{32}$	$5 \frac{7}{16}$	$18 \frac{5}{16}$	$8 \frac{9}{32}$	481
32	$1 \frac{1}{4} - 1 \frac{3}{8}$	16	$53 \frac{19}{32}$	$5 \frac{7}{16}$	$16 \frac{3}{32}$	$7 \frac{19}{32}$	309
32	$1 \frac{1}{8} - 1 \frac{1}{2}$	18	$56 \frac{27}{32}$	$5 \frac{7}{16}$	$18 \frac{1}{2}$	$7 \frac{19}{32}$	355
32	$1 \frac{1}{8} - 1 \frac{1}{2}$	20	$59 \frac{1}{2}$	$5 \frac{7}{16}$	$20 \frac{1}{8}$	$7 \frac{19}{32}$	375
36	$1 \frac{1}{8} - 1 \frac{1}{2}$	20	62	$6 \frac{5}{16}$	$20 \frac{1}{8}$	8	503
32	$1 \frac{1}{8} - 1 \frac{1}{4}$	23	$65 \frac{23}{32}$	$5 \frac{7}{16}$	$24 \frac{1}{32}$	$7 \frac{19}{32}$	375
54	$1 \frac{3}{8} - 2$	23	$73 \frac{9}{32}$	$7 \frac{3}{32}$	$24 \frac{1}{32}$	$10 \frac{19}{32}$	767
75	$1 \frac{3}{4} - 2$	23	$82 \frac{7}{8}$	$7 \frac{15}{32}$	$24 \frac{1}{32}$	$10 \frac{15}{32}$	862
75	$1 \frac{3}{4} - 2 \frac{1}{4}$	30	$96 \frac{5}{32}$	$7 \frac{15}{32}$	$30 \frac{5}{16}$	$10 \frac{15}{32}$	1402
100	$2 \frac{1}{2} - 2 \frac{5}{8}$	32	$105 \frac{9}{16}$	$9 \frac{3}{8}$	$32 \frac{9}{32}$	$10 \frac{1}{4}$	1847
125	$2 \frac{3}{4} - 3$	35	$114 \frac{3}{32}$	$10 \frac{13}{16}$	$36 \frac{3}{16}$	$10 \frac{1}{4}$	2553

CAD


Green Pin® Snatch Block HK

Snatch block type 601H with hook attached



Scan for
additional
product
details



- **Material:** carbon steel, fitted with conical roller bearings
- **Safety factor:** MBL equals 4 x WLL
- **Finish:** painted
- **Certification:** 2.1 2.2 MTC[®] CE IIA
- **Article code:** scan QR code to see article codes
- **Note:** Working Load Limit is on the headfitting

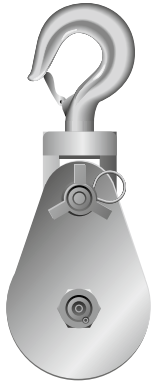

P-6952





working load limit	diameter wire rope	diameter outside sheave	length	thickness	width outside	opening hook	width outside	weight each
metric t	inch	a inch	b inch	c inch	d inch	e inch	f inch	lbs
2	$\frac{9}{32} - \frac{3}{8}$	3	$11 \frac{13}{32}$	$3 \frac{7}{16}$	$3 \frac{7}{32}$	$1 \frac{3}{16}$	$4 \frac{1}{4}$	8.11
4	$\frac{3}{8} - \frac{1}{2}$	$4 \frac{1}{2}$	$14 \frac{3}{32}$	$3 \frac{1}{2}$	$4 \frac{23}{32}$	$1 \frac{11}{16}$	$5 \frac{3}{16}$	13.23
4	$\frac{1}{2} - \frac{9}{16}$	6	$16 \frac{7}{32}$	$3 \frac{1}{2}$	$6 \frac{5}{16}$	$1 \frac{11}{16}$	$5 \frac{3}{16}$	18.74
8	$\frac{3}{4} - \frac{7}{8}$	6	$19 \frac{3}{4}$	$4 \frac{11}{16}$	$6 \frac{5}{16}$	$1 \frac{25}{32}$	$6 \frac{1}{2}$	26
12	$\frac{3}{4} - \frac{7}{8}$	6	$24 \frac{1}{4}$	$4 \frac{11}{16}$	$6 \frac{5}{16}$	$2 \frac{25}{32}$	$8 \frac{29}{32}$	45.2
15	1	6	$24 \frac{21}{32}$	$5 \frac{7}{16}$	$6 \frac{5}{16}$	$2 \frac{25}{32}$	$8 \frac{29}{32}$	52
4	$\frac{3}{8} - \frac{15}{32}$	8	$18 \frac{5}{8}$	$3 \frac{19}{32}$	$8 \frac{9}{32}$	$1 \frac{11}{16}$	$5 \frac{3}{16}$	17.64
8	$\frac{3}{4} - \frac{7}{8}$	8	$21 \frac{11}{16}$	$4 \frac{11}{16}$	$8 \frac{9}{32}$	$1 \frac{25}{32}$	$6 \frac{1}{2}$	45
12	$\frac{3}{4} - \frac{7}{8}$	8	$25 \frac{1}{4}$	$5 \frac{3}{32}$	$8 \frac{9}{32}$	$2 \frac{25}{32}$	$8 \frac{29}{32}$	66
15	1	8	$26 \frac{3}{32}$	$5 \frac{19}{32}$	$8 \frac{9}{32}$	$2 \frac{25}{32}$	$8 \frac{29}{32}$	65
8	$\frac{3}{4} - \frac{7}{8}$	10	$23 \frac{27}{32}$	$4 \frac{1}{16}$	$10 \frac{1}{4}$	$1 \frac{25}{32}$	$6 \frac{1}{2}$	56
12	$\frac{3}{4} - \frac{7}{8}$	10	$28 \frac{21}{32}$	$4 \frac{29}{32}$	$10 \frac{1}{4}$	$2 \frac{25}{32}$	$8 \frac{29}{32}$	78
15	1	10	$29 \frac{11}{32}$	$6 \frac{17}{32}$	$10 \frac{1}{4}$	$2 \frac{25}{32}$	$8 \frac{29}{32}$	90
8	$\frac{3}{4} - \frac{7}{8}$	12	$26 \frac{13}{32}$	$4 \frac{11}{16}$	$12 \frac{7}{32}$	$1 \frac{25}{32}$	$6 \frac{1}{2}$	71
12	$\frac{3}{4} - \frac{7}{8}$	12	$31 \frac{7}{8}$	$6 \frac{17}{32}$	$12 \frac{7}{32}$	$2 \frac{25}{32}$	$8 \frac{29}{32}$	110
15	1	12	$31 \frac{7}{8}$	$6 \frac{17}{32}$	$12 \frac{7}{32}$	$2 \frac{25}{32}$	$8 \frac{29}{32}$	115
8	$\frac{3}{4} - \frac{7}{8}$	14	$28 \frac{3}{16}$	$4 \frac{11}{16}$	$14 \frac{3}{16}$	$1 \frac{25}{32}$	$6 \frac{1}{2}$	84
12	$\frac{3}{4} - \frac{7}{8}$	14	$32 \frac{7}{8}$	$6 \frac{17}{32}$	$14 \frac{3}{16}$	$2 \frac{25}{32}$	$8 \frac{29}{32}$	130
15	1	14	$32 \frac{15}{16}$	$6 \frac{17}{32}$	$14 \frac{3}{16}$	$2 \frac{25}{32}$	$8 \frac{29}{32}$	129
8	$\frac{3}{4} - \frac{7}{8}$	16	$30 \frac{23}{32}$	$4 \frac{11}{16}$	$16 \frac{11}{32}$	$1 \frac{25}{32}$	$6 \frac{1}{2}$	106
12	$\frac{3}{4} - \frac{7}{8}$	16	$34 \frac{31}{32}$	$6 \frac{17}{32}$	$16 \frac{11}{32}$	$2 \frac{25}{32}$	$8 \frac{29}{32}$	79
15	1	16	$35 \frac{1}{32}$	$6 \frac{17}{32}$	$16 \frac{11}{32}$	$2 \frac{25}{32}$	$8 \frac{29}{32}$	151
8	$\frac{3}{4} - \frac{7}{8}$	18	$33 \frac{1}{8}$	$4 \frac{11}{16}$	$18 \frac{5}{16}$	$1 \frac{25}{32}$	$6 \frac{1}{2}$	128
12	$\frac{3}{4} - \frac{7}{8}$	18	$37 \frac{3}{32}$	$6 \frac{17}{32}$	$18 \frac{5}{16}$	$2 \frac{25}{32}$	$8 \frac{29}{32}$	93
15	1	18	$37 \frac{3}{32}$	$6 \frac{17}{32}$	$18 \frac{5}{16}$	$2 \frac{25}{32}$	$8 \frac{29}{32}$	181



CAD

ROPEBLOCK

CATALOG

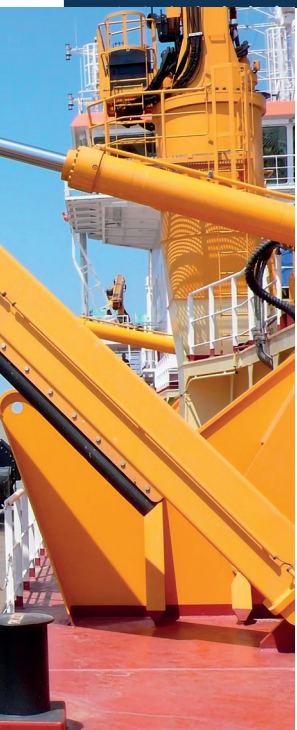

SNATCH BLOCKS >>

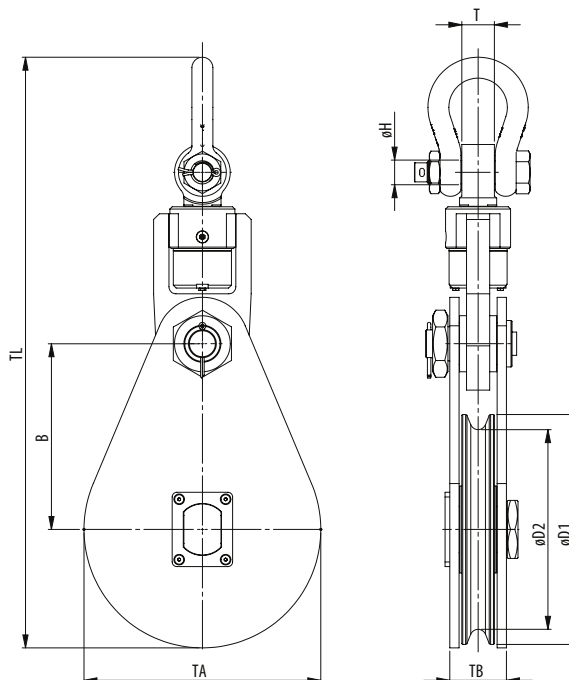

- Hook
- Clevis
- Tailboard
- Oblong eye

Model No.	WLL (UStons)	For wire ød (inch)	Dimensions (inch)								Weight (lbs)
			øD1	øD2	B	øH	T	TA	TB	TC/TL	
VB 355.22.1.14.S	15	7/8	16.1	14	13	1.4	1.9	16.6	3.6	35	190
VB 240.28.1.20.S	22	1 - 1 1/8	11.8	9.4	10	1.5	1.9	12.2	3.3	28.9	120
VB 300.32.1.20.S	22	1 1/8 - 1 1/4	14.4	11.8	11	1.5	1.9	14.8	3.3	31.4	130
VB 240.28.1.25.S	27.5	1 - 1 1/8	11.8	9.4	10	1.6	2.1	12.2	3.3	28.6	125
VB 300.32.1.25.S	27.5	1 1/8 - 1 1/4	14.4	11.8	11	1.6	2.1	14.8	3.3	31.2	140
VB 390.26.1.25.S	27.5	7/8 - 1	17.7	15.4	13.8	2.1	2.8	18.5	4.4	39.5	265
VB 240.28.1.27.S	30	1 - 1 1/8	11.8	9.4	10	1.7	2.2	12.2	3.3	32	150
VB 300.32.1.27.S	30	1 1/8 - 1 1/4	14.4	11.8	11.3	1.7	2.2	14.8	3.3	34.6	185
VB 345.32.1.32.S	35	1 1/8 - 1 1/4	15.7	13.6	12.8	2.1	2.8	16.1	4.4	37.4	265
VB 345.36.1.32.S	35	1 1/4 - 1 3/8	15.7	13.6	12.8	2.1	2.8	16.1	4.4	37.4	265
VB 390.32.1.32.S	35	1 1/8 - 1 1/4	17.7	15.4	13.8	2.1	2.8	18.5	4.4	39.5	310
VB 390.38.1.32.S	35	1 3/8 - 1 1/2	17.7	15.4	13.8	2.1	2.8	18.5	4.4	39.5	310
VB 430.32.1.32.S	35	1 1/8 - 1 1/4	19.5	16.9	14.8	2.1	2.8	20.1	4.4	41.3	330
VB 430.38.1.32.S	35	1 3/8 - 1 1/2	19.5	16.9	14.8	2.1	2.8	20.1	4.4	41.3	330
VB 520.32.1.32.S	35	1 1/8 - 1 1/4	23.4	20.5	17.1	2.1	2.8	24	4.4	45.6	660
VB 430.32.1.36,5.S	40	1 1/8 - 1 1/4	19.5	16.9	15.7	2.1	2.8	20.1	4.8	42.7	440

Minimum Ultimate Strength = 4 x WLL

WLL= Working Load Limit on head fitting.

- The dimensions in this table are indicative only. A drawing will always be submitted prior to production and will be the leading document when discussing dimensions.
- Blocks shown here are standard models; inquiries for custom versions are welcome.
- Refer to wire rope manufacturers D/d ratio guideline.
- Standard provided with bronze bearing. Roller bearing optional.




SEE OUR WARNING & SAFETY
INFORMATION ON PAGES 134 - 146

>>



<< SNATCH BLOCKS

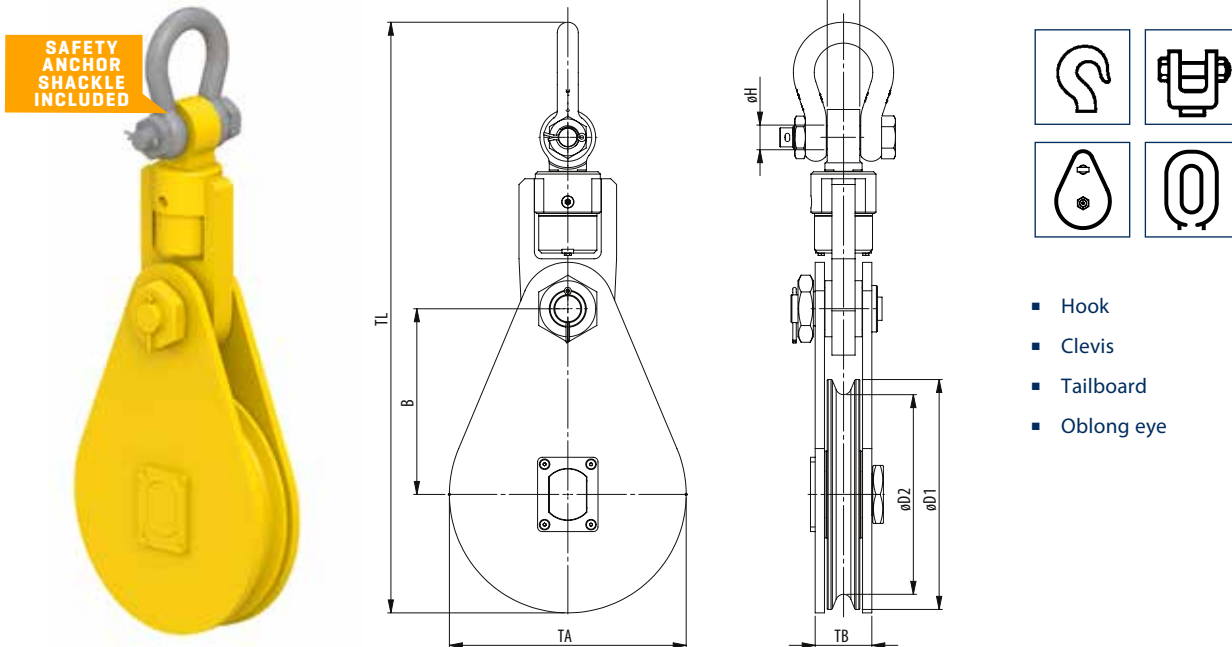

Model No.	WLL (UStons)	For wire ød (inch)	Dimensions (inch)								Weight (lbs)
			øD1	øD2	B	øH	T	TA	TB	TC/TL	
VB 430.38.1.36.5.S	40	1 3/8 - 1 1/2	19.5	16.9	15.7	2.1	2.8	20.1	4.8	42.7	440
VB 240.28.1.55.S	60	1 - 1 1/8	11.8	9.4	11.4	2.3	3.1	12.2	5.6	37.8	383
VB 520.38.1.55.S	60	1 3/8 - 1 1/2	23.4	20.5	18.1	2.3	3.1	24	5.6	50.4	680
VB 520.44.1.55.S	60	1 1/2 - 1 3/4	23.4	20.5	18.1	2.3	3.1	24	5.6	50.4	680
VB 520.52.1.55.S	60	1 3/4 - 2	23.4	20.5	18.1	2.3	3.1	24	5.6	50.4	680
VB 520.52.1.75.S	82.5	1 3/4 - 2	23.4	20.5	18.1	2.9	3.9	24	5.6	52.6	726
VB 630.58.1.75.S	82.5	1 3/4 - 2 1/4	29.5	24.8	22.4	2.9	3.9	30.3	8	71.5	1265
VB 710.68.1.100.S	110	2 1/2 - 2 5/8	31.5	28	25.6	3.4	4.7	32.3	8	75.2	1605
VB 800.76.1.125.S	137.5	2 3/4 - 3	35	31.5	29.5	3.4	4.7	36.2	8	84.6	2200

Also Available in Double Sheave Models:

VB 355.22.2.14.S	15	7/8	16.1	14	13	1.4	1.9	16.6	3.6	35	190
VB 240.28.2.20.S	22	1 - 1 1/8	11.8	9.4	10	1.5	1.9	12.2	3.3	28.9	120
VB 300.32.2.20.S	22	1 1/8 - 1 1/4	14.4	11.8	11.3	1.5	1.9	14.8	3.3	31.4	130

Minimum Ultimate Strength = 4 x WLL

WLL= Working Load Limit on head fitting.

- The dimensions in this table are indicative only. A drawing will always be submitted prior to production and will be the leading document when discussing dimensions.
- Blocks shown here are standard models; inquiries for custom versions are welcome.
- Refer to wire rope manufacturers D/d ratio guideline.
- Standard provided with bronze bearing. Roller bearing optional.



SEE OUR WARNING & SAFETY
INFORMATION ON PAGES 134 - 146

