



BOP HOISTS





AIR HOISTS

JDN UH ULTRA-LOW MONORAIL HOISTS

CAPACITIES: 1 T UP TO 100 T

CAPACITIES: 1 T UP TO 100 T AIR PRESSURE: 6 BAR

Where loads have to be lifted and transported in extremely reduced spaces the JDN Ultra-Low Monorail Hoists provide the ideal solution. For example the Ultra-Low Monorail Hoist with a load capacity of 6 t has a headroom of only 230 mm.

STANDARD FEATURES

- Ideally suited for working in hazardous areas (explosion risk)
- Insensitive to humidity, dust and temperatures from -20°C up to +70°C
- Extremely low headroom
- Low air consumption
- Available with increased spark protection



INNOVATION AND VALUES

J.D. NEUHAUS – MORE THAN PRODUCTS

As a family-run company in its seventh generation, our commitment to clear values helps us achieve the standard of "Permanent Excellence" that we have held ourselves to for over 275 years.

The three value pairs of tradition and innovation, performance and longevity as well as partnership and passion create the foundation for our daily activities. They shape our partnership with the people who work for us, as well as with our

partners and customers. They are found in the quality and German engineering of our products, and in the way we work with you and find new solutions thanks to our innovative spirit.

Our thinking is guided by sustainability, which we believe our future urgently needs and, of course, deserves.



TECHNICAL DATA

TYPE		UH 1	UH2	UH 4	UH 6	UH 8	UH 12	UH 16	UH 25
Capacity	mt	1	2	4	6	8	12	16	25
	psi	85	85	85	85	85	85	85	85
Air pressure	bar	6	6	6	6	6	6	6	6
Number of chain strands		2 x 1	2 x 2	2	2	4	4	4	4
Motor output	kW	1	1	2.5	2.5	2.5	2.5	2.5	6.3
	ft/min	14.8	7.2	8.2	6.6	4.6	3	2.0	3.6
Lifting speed at full load	m/min	4.5	2.2	3.0	2.0	1.4	0.9	0.6	1.1
	ft/min	30.0	14.8	19.7	14.8	9.5	7.2	3.9	7.9
Lifting speed without load	m/min	9.0	4.5	6.0	4.5	2.9	2.2	1.2	2.4
	ft/min	29.5	14.8	23.0	14.8	10.8	6.9	4.3	7.9
Lowering speed at full load	m/min	9.0	4.5	7.0	4.5	3.3	2.1	1.3	2.4
Air consumption at full load – lifting	cfm	60.0	60.0	141.3	141.3	141.3	141.3	141.3	229.5
	m³/min	1.7	1.7	4.0	4.0	4.0	4.0	4.0	6.5
Air consumption at full load – lowering	cfm	67.1	67.1	158.9	158.9	158.9	158.9	158.9	282.5
	m³/min	1.9	1.9	4.5	4.5	4.5	4.5	4.5	8.0
Air connection		G ½	G ½	G ½	G ½	G ½	G ½	G ½	G ½
Hose dimension (Ø inside)	inch	½	½	¾	¾	¾	¾	¾	1 ½
	mm	13	13	19	19	19	19	19	35
		min.	max.						
Weight with standard lift	lbs	364*	452*	1014	1036	1190	1213	1235	3307
	kg	165*	205*	460	470	540	550	560	1500
Chain dimension	mm	7 x 21	7 x 21	13 x 36	13 x 36	13 x 36	13 x 36	13 x 36	16 x 45
	lbs/ft	0.67	0.67	2.6	2.6	2.6	2.6	2.6	3.9
Weight of chain	kg	1.0	1.0	3.8	3.8	3.8	3.8	3.8	5.8
	ft	10	10	10	10	10	10	10	10
Standard lift	kg	3	3	3	3	3	3	3	3
	ft	6.5	6.5	6.5	6.5	6.5	6.5	6.5	6.5
Length of control at standard lift	m	2	2	2	2	2	2	2	2
Noise level at full load ¹ – lifting	dB(A)	76	76	78	78	78	78	78	80
Noise level at full load ¹ – lowering	dB(A)	78	78	80	80	80	80	80	84

¹Measured at 1 m distance acc. to DIN 45635 part 20
 Group mechanism: M3 (1 Bm)
 Technical data for higher capacities on request.

*Depending on beam width



PNEUMATIC HOISTS

JDN CRANE SYSTEMS

Robust – Reliable – Low maintenance
The individual solution for crane systems
and crane kits

CUSTOM FIT FOR YOUR INDIVIDUAL NEEDS

The delivery programme comprises explosion-proof **Top running overhead travelling cranes, Under hung overhead travelling cranes, Jib cranes**, which can be designed to your individual needs, customised installations are our speciality. Depending on your requirements JDN air hoists in motor trolleys or monorail hoist systems are integrated into the crane design. An ergonomically designed pneumatic pendant control is supplied with two speed control as standard for crane and trolley travel. Infinitely variable hoist and trolley speed control is also available.

We have different JDN cranes in detail:

- Overhead cranes with single or double girder design
- Underhung cranes including low headroom design

- Jib cranes
- Cranes with in line mechanically linked synchronised hoists
- Cranes with parallel operating hoists
- Capacities up to 100 t
- Crane spans up to 36 m

Additionally we offer **Crane kits for Explosion-proof air cranes** with capacities up to 10t. J.D. Neuhaus can offer crane manufacturers crane component kits complete with pneumatic crane drives. With these crane kits overhead travelling cranes up to 10 t capacity can be built very simply and economically, especially for applications in hazardous areas.

The crane manufacturer provides the main girder and JDN delivers all the components that are necessary to build an air powered crane of their chosen design:

- End carriages with pneumatic drives
- Energy feeding systems
- Safety accessories
- And of course the appropriate air hoist with trolley

We remain in close contact with our users at all times through our 360° service partnerships – and we use this dialogue to continuously develop our products.

**In short: we keep our promise
“Permanent Excellence” for you.**

INNOVATION AND VALUES


J.D. NEUHAUS – MORE THAN PRODUCTS

As a family-run company in its seventh generation, our commitment to clear values helps us achieve the standard of “Permanent Excellence” that we have held ourselves to for over 275 years.

The three value pairs of tradition and innovation, performance and longevity as well as partnership and passion create the foundation for our daily activities. They shape our partnership with the people who work for us, as well as with our

partners and customers. They are found in the quality and German engineering of our products, and in the way we work with you and find new solutions thanks to our innovative spirit.

Our thinking is guided by sustainability, which we believe our future urgently needs and, of course, deserves.

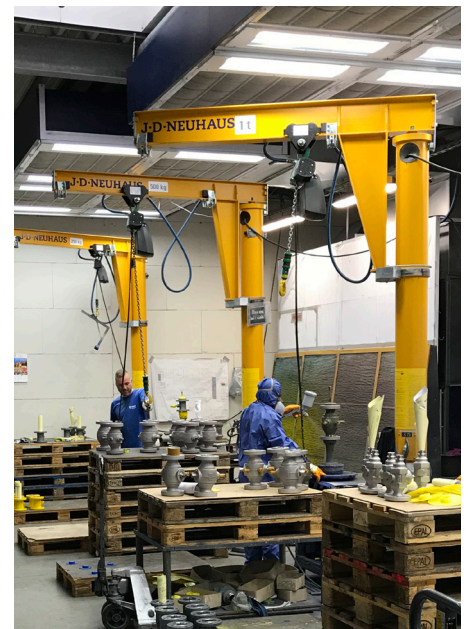



JDN-ACCESSORIES TAILORED TO YOUR INDIVIDUAL NEEDS

We offer a wide range of accessories designed to ensure that JDN standard products are suitable for your specific applications.

This means, for example, that you can meet very specific safety requirements, adjust performance capacity or make operations even more convenient.

- Filter silencer
- Filter regulator
- Service unit
- Main air emergency-stop valve
- Chain box
- Special grease cartridge for oil-free operation, volume 250 ml
- Limit switch for lifting and travelling
- Booster valve (control lengths over 12 m)
- Extension arm for control on motorised trolley
- Additional suspension for chain box (for installation in trolley)
- Copper-plated load hook for increased spark protection
- Stainless steel load hook (up to 750 kg capacity)
- Stainless steel chain (reduced capacity) up to 6 TI
- Manual emergency lowering device for PROFI 3 TI–20 TI hoists
- Special paint finishes

PNEUMATIC
mechanical drive

ROBUST
to external ambient influences

NO DOWNTIME
100% on-time

EXPLOSIONS SAFE
for use in hazardous areas

COST-EFFECTIVE
thanks to low maintenance



HOISTS

JDN CONTROLS

Specially
tailored to your
requirements



You can order JDN hoists and cranes with different control options, specially tailored to your requirements.



ROPE CONTROL

SUITABLE FOR ANY CONTROL LENGTH:

This control type provides infinitely speed control for hoist lifting and lowering motions and is suitable for any required control length. The rope control option is available for all PROFI series hoists up to 20 t capacity. For larger capacity PROFI series hoists 25 TI, 30 TI, 37 TI, 50 TI and 100 TI the rope is replaced by a pull chain for greater strength.




S-CONTROL

SENSITIVE CONTROL, FOR EASY HANDLING:

This S-Control allows very sensitive regulation of the speeds. While developing the control the ergonomics were a focal point. The strong and robust design allows the user a pleasant working and a safe moving of loads. The use of non-rusting materials allows the application in areas with aggressive substances in the atmosphere.

The compact control hose has the hose relief already integrated – with a distinctly higher force. The S-control can optionally be expanded with an additional trigger guard for the lifting and lowering buttons.



E-CONTROL

LOW MAINTENANCE AND CORROSION PROOF:

The very robust brass construction distinguishes the E-type pendant control valve. Low weight and ergonomic design ensure ease of handling. Only available in single speed control version.

F-CONTROL

AVAILABLE FOR MULTI-FUNCTION USE:

The F-control is manufactured from an unbreakable synthetic material, resistant to external conditions. The ergonomically designed housing ensures ease of handling. Up to 18 different control functions can be incorporated in a single pendant control e.g key switch, two stage travelling speed, klaxon or simultaneous control of two hoist motors. As an option the F-control can also be delivered with infinitely variable speed control of hoisting and trolley travelling motions.



CONTROLS FOR JDN-AIR HOISTS IN MOTOR TROLLEY AND JDN MONORAIL HOISTS:

For controlling JDN air hoists in motor trolleys and JDN monorail hoists we recommend the four button version of the E or F-control.

CONTROLS FOR JDN AIR CRANES:

For controlling JDN air cranes the F-control is the most suitable because of its multi-function capability.

Circa 1950s



Circa 1960s



GENERATION UPON GENERATION OF QUALITY

ELEPHANT
LIFTING PRODUCTS™


FAMILY OWNED & OPERATED

Circa 1980s



Circa 2000s



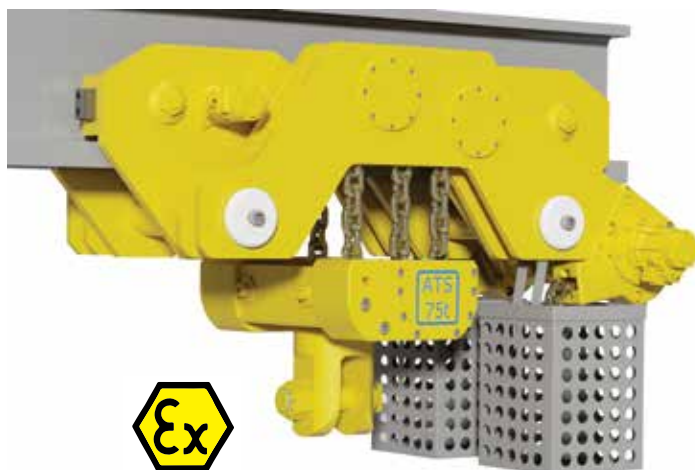


ATS UUL ULTRA LOW PROFILE LARGE CAPACITY 50t - 120ton

TECHNICAL DATA - ATS UUL ULTRA LOW PROFILE LARGE CAPACITY - 50ton - 120ton

		UUL-50 - 60	UUL-75 - 90	UUL-100 - 120
Capacity	mt	50 - 60	75 - 90	100 - 120
	T	55 - 66	82.6 - 99	110 - 132
Unit Weight with 10 foot lift	lbs.	4850	7385	10119
Weight of Chain per additional foot of lift	lbs. / ft.	33	49	66
Chain Size		23.5x66		
Number of chain strands		4	6	8
Minimum Headroom	mm	442	520	720
	inches	17.4	20.5	28.3
Air Pressure	bar	5-7		
Air Consumption	cfm	320		
Motor Power Output	kW	5x2		
	H.P.	6.7x2		
Lifting Speed at Full Load	ft./min	3.6	2.1	1.6
Lifting Speed without Load		5.25	3.6	2.6
Lowering Speed with Full Load		6.2	3.9	2.9
Traveling Speed	ft./min	39		
Air Hose Connection	inch	1.5x2		
Air Hose Dimension	inch	1.5		
Noise Level at Motorized Trolley	dB(A)	84		

* Specific Dimensions Provided Upon Request



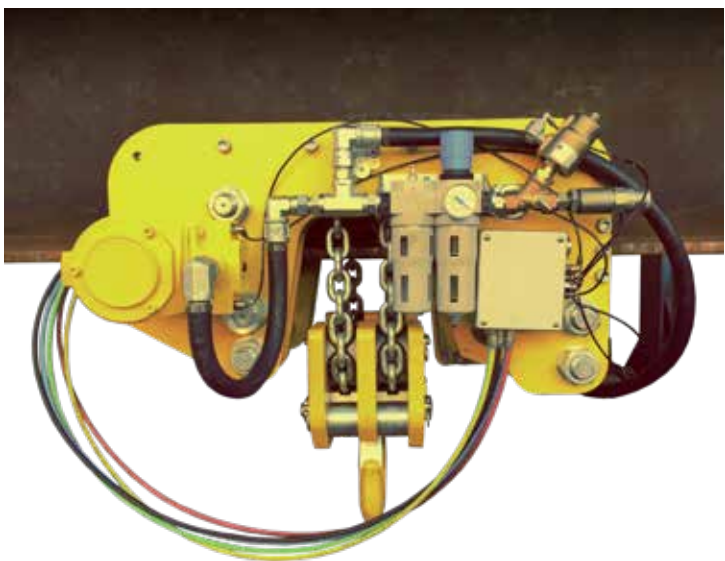

BOP HANDLING MATRIX

20t, 30t, 40t, 50t,
60t, 75t, 100t, 150t,
180t, 200t, & 240t

Application: Designed for handling Blow Out Preventers on land and offshore drilling rigs. ATS Pneumatic's BOP systems have been engineered to meet or exceed current regulations set forth for the oilwell drilling industry.

- Standard Hoists are Atex approved, EX II 2 GD IIC T4 (X) / EX II 2 GD IIB T4 (X) / EX II 2 GD IIC T4 (X)
- Copper platings and stainless steel components can be offered for increased spark resistance
- Please see monorail hoist information on pages 78 and 79 of this catalog
- Can be used in pairs, or even sets of four
- Can be controlled via a synchronized control console that allows for operation of any one hoist, or combination of multiple units simultaneously
- Can be offered with integral wireless load cells
- ABS and DNV load test witness can be arranged
- Bottom blocks have water drain ports, allowing corrosive sea water to drain from the block
- The sheave for the load chain has an exterior access point for lubrication
- Filter lubricator station mounted on unit
- Corrosion resistant marine packages are available with special platings and paint finishes
- Galvanized steel and stainless steel chain containers are available



