



CHAIN HOISTS



CoreLifting.com





Specifications for Hoists and Trolleys




Hurricane 360° hand chain hoist

For the ultimate flexibility in a hand chain hoist, the CM Hurricane 360° is the choice for a wide range of applications. The patented hand chain cover rotates a full 360 degrees to allow loads to be lifted, pulled, or positioned from virtually any angle.

- **Standard Load Limiter** - For simple, automatic overload protection.
- **Braking Power** - Weston-Style braking system provides reliable positive load control.
- **Powder Coated Finish** - For corrosion protection.
- **Heat Treated Steel Gearing** - All internal gears & pinions are heat treated steel for high strength and long life.
- **Chain Guide & Stripper** - Assures load chain alignment.
- **Precision 4-Pocket Liftwheel** - Fully machined for better chain fit and reduced wear allowing for accurate movement of the load chain.
- **Hardened Steel Chain** - Alloy steel load chain assures high strength and long wear life.
- **Minimal Maintenance** - Easily disassembled, requiring no special tools.
- **Meets ASME B30.16** - And European CE Standard
- **5-Year Warranty** - Against defects in materials and workmanship.
- **Fast & Easy Parts Access** - Genuine CM Hurricane 360° parts are available in Total Repair Kits and convenient bulk packaging.



**Sealed Ball Bearings
and Sliding Bushings**



**Weston-Style
Brake System**

***WARNING**

Overloading and improper use can result in injury.

To avoid injury:


- Do not exceed working load limit, load rating capacity
- Do not use to lift people or loads over people.
- use only alloy chain for overhead lifting.
- Read and follow all instructions.




Hurricane 360⁰ hand chain hoist-specifications

SPECIFICATIONS


Product Code	Load Rating TONS (kg)	Lift		Net Weight LBS	Hand Chain Pull to Lift Rated Load LBS (kg)	Hand Chain Overhauled to Lift Load One Foot FT (m)	Dimensions in inches (mm)												
		ft	m				A	B	C	D	E	F	G	H	I	K	L	M	N
5623A	1/2 (500)	10	3	23	44 (20)	30 (9.1)	11.811 (300)	0.669 (17)	0.945 (24)	5.236 (133)	5.827 (148)	5.827 (148)	5.472 (139)	8.110 (206)	0.945 (24)	2.402 (61)	3.425 (87)	4.331 (110)	0.551 (14)
5624A		15	4.5	28															
5625A		20	6	33															
5651A		30	9	43															
5626A	1 (1000)	10	3	26	54 (24)	49 (14.9)	13.189 (335)	0.866 (22)	1.142 (29)	6.142 (156)	6.890 (175)	6.575 (167)	6.457 (164)	9.528 (242)	0.945 (24)	2.756 (70)	3.819 (97)	4.921 (125)	0.748 (19)
5627A		15	4.5	33															
5628A		20	6	41															
5653A		30	9	58															
5629A	2 (2000)	10	3	45	74 (34)	71 (21.6)	15.551 (395)	1.181 (30)	1.378 (35)	7.165 (182)	7.992 (203)	7.638 (194)	7.559 (192)	11.142 (283)	1.220 (31)	3.268 (83)	4.370 (111)	6.142 (156)	0.866 (22)
5630A		15	4.5	48															
5631A		20	6	51															
5635A	3 (3000)	10	3	68	92 (42)	87 (26)	20.472 (520)	1.496 (38)	1.575 (40)	8.661 (220)	9.843 (250)	8.622 (219)	8.858 (225)	13.189 (335)	1.339 (34)	3.740 (95)	4.882 (124)	7.008 (178)	1.181 (30)
5636A		15	4.5	79															
5637A		20	6	90															
5639A	5 (5000)	10	3	122	76 (34)	174 (53)	25.748 (654)	1.772 (45)	1.850 (47)	8.661 (220)	9.843 (250)	8.622 (219)	9.528 (242)	13.858 (352)	0.827 (21)	3.740 (95)	4.882 (124)	11.220 (285)	1.457 (37)
5640A		15	4.5	142															
5641A		20	6	162															
5643A	10 (10000)	10	3	210	102 (46)	261 (79.3)	32.480 (825)	2.677 (68)	2.677 (68)	8.661 (220)	15.079 (383)	8.622 (219)	12.835 (326)	17.165 (436)	5.354 (136)	3.740 (95)	4.882 (124)	15.787 (401)	1.969 (50)
5644A		15	4.5	240															
5645A		20	6	270															

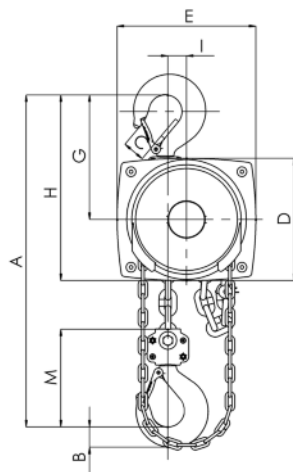




Single Reeved



Double Reeved

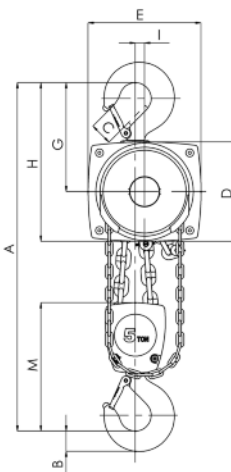

Triple Reeved

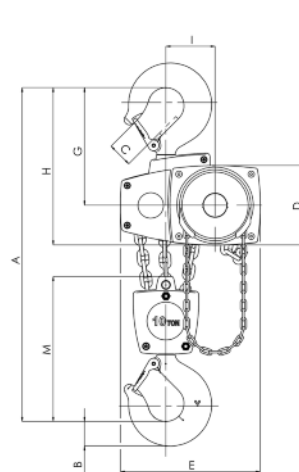

Cyclone hand chain hoist

One of the most popular and reliable hoists ever designed.

- Most interchangeability of parts in the industry
- Standard Load Limiter for simple, automatic overload protection
- Enclosed contoured Weston-type automatic brake for positive load control
- High-efficiency spur gearing for greater lift with minimum effort
- Rugged Hoistaloy chain for added strength and durability
- Fully machined, forged liftwheel pockets for easier lifting and smooth free chaining
- High-strength aluminum alloy castings in frame and covers
- Inspected over 75 times to meet or exceed HMI and ASME/ANSI performance and safety standards
- Standard hand chain drop is 2 feet less than lift, (example: 8 foot lift hoist has 6 foot hand chain drop)
- Lifetime warranty
- Metric rated
- Made in U.S.A.

Options Include:

- Fabric chain bags
- Metal chain containers
- Zinc-plated load and hand chain
- Unwelded hand chain
- Latchlok hooks
- Bronze hooks
- Bullard hooks
- Eye-type suspension



***WARNING**

Overloading and improper use can result in injury.


To avoid injury:

- Do not exceed working load limit, load rating capacity
- Do not use to lift people or loads over people.
- use only alloy chain for overhead lifting.
- Read and follow all instructions.


The Cyclone combines superior engineering, efficiency and durability. Available in a variety of capacities from 1/4 ton to 10 tons.







Cyclone hand chain hoist

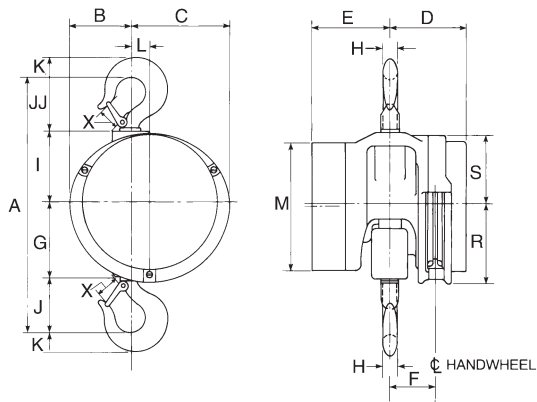


1/4 - 2 ton

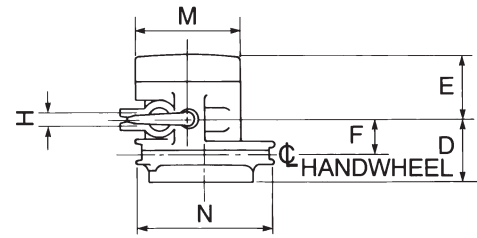

3 - 4 ton

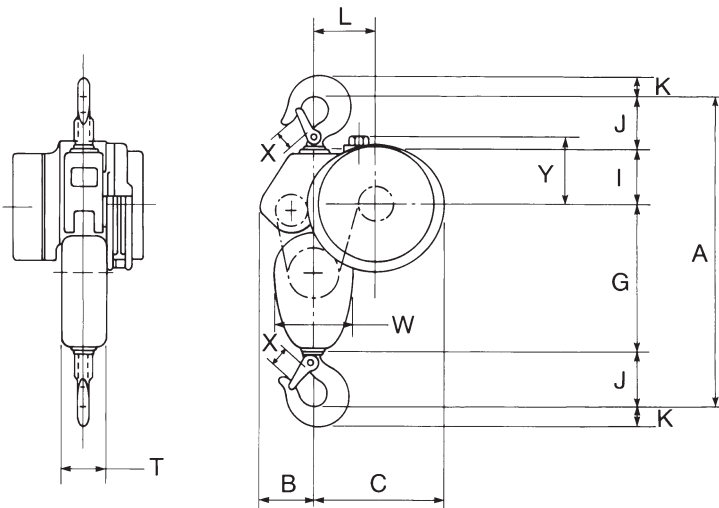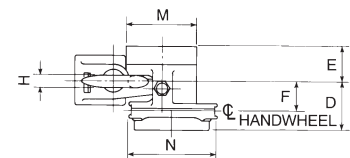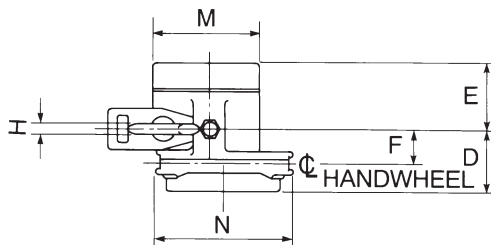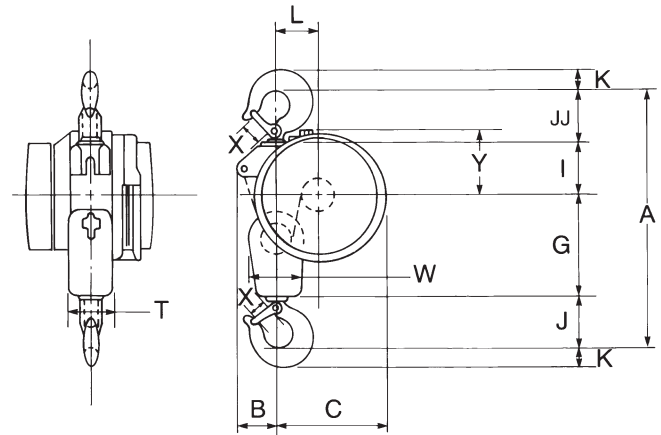

5 - 6 ton

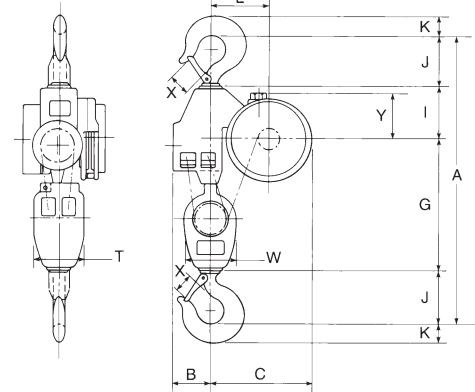

8 - 10 ton

Cyclone hand chain hoist-Specifications

Specifications

Rated capacity* (tons)	Product code	Standard lift† (ft.)	Reeving	Minimum distance between hooks (in.)	Chain overhauled to lift load one foot (ft.)	Chain pull to lift full load (lbs.)	Shipping weight (lbs.)
1/4	4621	10	1	12 ⁷ / ₈	22 ¹ / ₂	23	40
1/2	4622	10	1	12 ⁷ / ₈	22 ¹ / ₂	46	40
1	4624	10	1	14	30	69	43
1 1/2	4625	10	1	17 ⁵ / ₁₆	40 ¹ / ₂	80	69
2	4626	10	1	17 ⁵ / ₁₆	52	83	68
3	4627	10	2	21 ¹ / ₂	81	85	103
4	4628	10	2	21 ¹ / ₂	104	88	103
5	4629	10	3	24 ¹ / ₄	156	75	138
6	4630	10	3	25 ¹ / ₄	156	90	142
8	4631	10	4	34 ¹ / ₂	208	89	247
10	4632	10	5	35 ¹ / ₂	260	95	250

† Can be supplied with longer lifts

Clearance dimensions (in.)

Dimension	Rated capacity*(tons)								
	1/4	1/2	1	1 1/2 & 2	3 & 4	5	6	8	10
A	12 ⁷ / ₈	12 ⁷ / ₈	14	17 ⁵ / ₁₆	21 ¹ / ₂	24 ¹ / ₄	25 ¹ / ₄	34 ¹ / ₂	35 ¹ / ₂
B	3 ¹¹ / ₁₆	3 ¹¹ / ₁₆	3 ¹ / ₄	4 ³ / ₁₆	3 ⁵ / ₁₆	4 ³ / ₁₆	4 ³ / ₁₆	4 ³ / ₄	4 ³ / ₄
C	7 ³ / ₁₆	7 ³ / ₁₆	7 ³ / ₁₆	6 ¹¹ / ₁₆	8 ¹⁵ / ₁₆	10 ⁵ / ₁₆	10 ⁵ / ₁₆	12 ³ / ₄	12 ³ / ₄
D	4 ¹ / ₈	4 ¹ / ₈	4 ¹ / ₈	5 ¹ / ₁₆	5 ¹ / ₁₆	4 ⁷ / ₈	4 ⁷ / ₈	5 ¹³ / ₁₆	5 ¹³ / ₁₆
E	3 ¹ / ₄	3 ¹ / ₄	3 ¹ / ₄	4 ¹³ / ₁₆	4 ¹³ / ₁₆	5	5	4 ¹ / ₁₆	4 ¹ / ₁₆
F	2 ¹ / ₁₆	2 ¹ / ₁₆	2 ¹ / ₁₆	3 ¹ / ₈	3	2 ¹⁵ / ₁₆	2 ¹⁵ / ₁₆	3 ³ / ₄	3 ³ / ₄
G	3 ⁷ / ₈	3 ⁷ / ₈	3 ³ / ₄	5 ³ / ₁₆	8 ¹ / ₄	11 ¹³ / ₁₆	11 ¹³ / ₁₆	17 ³ / ₁₆	17 ³ / ₁₆
H	1 ¹ / ₁₆	1 ¹ / ₁₆	1 ³ / ₁₆	1 ¹ / ₈	1 ¹ / ₄	1 ¹ / ₄	1 ³ / ₈	1 ¹¹ / ₁₆	1 ¹³ / ₁₆
I	3 ³ / ₄	3 ³ / ₄	3 ³ / ₄	4 ¹³ / ₁₆	4 ¹ / ₄	4 ³ / ₁₆	4 ³ / ₁₆	6 ¹ / ₁₆	6 ¹ / ₁₆
J	2 ⁵ / ₈	2 ⁵ / ₈	2 ¹⁵ / ₁₆	3 ⁵ / ₈	4 ¹ / ₈	4 ¹ / ₈	4 ⁵ / ₈	5 ⁵ / ₈	6 ¹ / ₈
JJ	2 ⁵ / ₈	2 ⁵ / ₈	3 ⁹ / ₁₆	3 ¹¹ / ₁₆	4 ⁷ / ₈	—	—	—	—
K	1 ⁵ / ₁₆	1 ⁵ / ₁₆	1 ¹ / ₈	1 ¹ / ₂	1 ¹¹ / ₁₆	1 ¹¹ / ₁₆	1 ⁷ / ₈	2 ¹ / ₄	2 ⁹ / ₁₆
L	1 ³ / ₄	1 ³ / ₄	1 ³ / ₄	1 ¹ / ₄	3 ¹ / ₂	4 ⁷ / ₈	4 ⁷ / ₈	7 ⁵ / ₁₆	7 ⁵ / ₁₆
M	7 ¹ / ₁₆	7 ¹ / ₁₆	7 ¹ / ₁₆	8 ⁵ / ₈	8 ⁵ / ₈	8 ⁵ / ₈	8 ⁵ / ₈	8 ⁵ / ₈	8 ⁵ / ₈
N	—	—	—	—	10 ⁷ / ₈	10 ⁷ / ₈	10 ⁷ / ₈	10 ⁷ / ₈	10 ⁷ / ₈
R	5 ⁷ / ₁₆	5 ⁷ / ₁₆	5 ⁷ / ₁₆	5 ⁷ / ₁₆	—	—	—	—	—
S	4 ¹¹ / ₁₆	4 ¹¹ / ₁₆	4 ¹¹ / ₁₆	4 ¹¹ / ₁₆	—	—	—	—	—
T	—	—	—	—	3 ⁷ / ₈	4	4	6 ³ / ₈	6 ³ / ₈
W	—	—	—	—	4 ¹ / ₂	6 ¹ / ₄	6 ¹ / ₄	6 ⁷ / ₁₆	6 ⁷ / ₁₆
X	1 ¹ / ₃₂	1 ¹ / ₃₂	1 ¹ / ₈	1 ⁵ / ₁₆	1 ⁵ / ₈	1 ⁵ / ₈	1 ³ / ₄	2 ¹ / ₁₆	2 ⁵ / ₁₆
Y	—	—	—	—	5 ¹ / ₈	5 ⁷ / ₈	5 ⁷ / ₈	5 ⁹ / ₁₆	5 ⁹ / ₁₆

* WARNING

Overloading and improper use can result in injury.

To avoid injury:

- Do not exceed working load limit, load rating capacity
- Do not use to lift people or loads over people.
- Use only alloy chain for overhead lifting.
- Read and follow all instructions.

Cyclone Army type trolley hoist

Same quality and performance as the Cyclone in a compact, low headroom integral trolley mount. Ideal for applications requiring a moveable hoist including:

- Rugged steel loadbars connected directly to hoist frame
- Reduced headroom, side clearances and end approach for easy maneuvering of heavy loads in tight places
- Standard Load Limiter automatic overload protection
- Plain and geared trolley mounts in capacities from 1/4 to 12 tons
- Universal tread trolley wheels for operation on sloped or flat flanged beams
- Standard hand chain drop 2 feet less than lift (example: 8 foot lift hoist has 6 foot hand chain drop)
- Chain containers, zinc-plated load and hand chain, aluminum unwelded hand chain, Latchlok hooks, bronze hooks, bullard hooks, larger beam trolleys, trolley guards, and units without Load Limiter optional, depending on capacity
- Lifetime warranty
- Metric rated
- Made in U.S.A.



*WARNING

Overloading and improper use can result in injury.

To avoid injury:

- Do not exceed working load limit, load rating capacity
- Do not use to lift people or loads over people.
- use only alloy chain for overhead lifting.
- Read and follow all instructions.


Specifications

Rated capacity* (tons)	Product code		Standard lift (ft.)	Reeving	American standard depth (in.)†	Beam adjustment ranges flange width (in.)†	Chain pull to lift capacity loads (lbs.)	Chain overhauled to lift load one foot (ft.)	Min. headroom (in.)	Min. radius curve (in.)	Shipping weight (lbs.)	
	Plain trolley	Geared trolley									Plain trolley	Geared trolley
1/4	4521	4541	10	1	4-12**	2 5/8-5 1/2	23	22 1/2	11 3/4	30	68	110
1/2	4522	4542	10	1	4-12**	2 5/8-5 1/2	46	22 1/2	11 3/4	30	68	110
1	4524	4544	10	1	4-12**	2 5/8-5 1/2	69	30	11 3/4	30	81	133
1 1/2	4525	4545	10	1	6-15	3 3/8-5 5/8	80	40 1/2	15 5/16	30	140	168
2	4526	4546	10	1	6-15	3 3/8-5 5/8	83	52	15 5/16	30	140	168
3	4527	4547	10	2	7-15	3 5/8-5 5/8	85	81	18 7/8	48	189	237
4	4528	4548	10	2	7-15	3 5/8-5 5/8	87	104	18 7/8	48	189	237
5	4529	4549	10	3	8-18	4-6 1/4	74	156	23 1/2	60	278	310
6	4530	4550	10	3	8-18	4-6 1/4	89	156	24	60	283	315
8	4531	4551	10	4	12-24	5-8	91	208	28 1/4	72	526	601
10	4532	4552	10	5	12-24	5-8	93	260	28 1/4	72	535	611
12	4533	4553	10	6	15-24	5 1/2-8	95	312	30 3/8	96	1068	1098

** For 1/4 through 1 ton geared trolleys - minimum beam size S6 x 12.5 (3 3/8 flange width)


† Universal tread track wheels designed to operate on either sloped or flat flange beam, rails or tracks

Cyclone Army type trolley hoist-Specifications

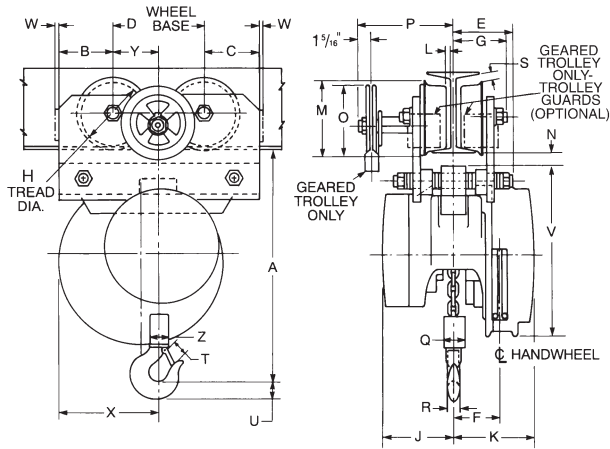

1/4-6 TON

1/4 - 6 ton

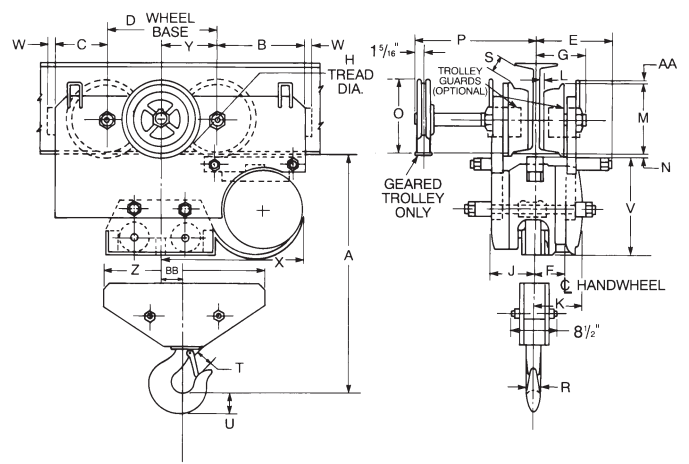

8 - 12 ton

Clearance dimensions (in.)

Rated capacity* (tons)


Dimension	1/4, 1/2 & 1		1 1/2 & 2		3 & 4		5		6		8		10		12	
	Plain	Geared	Plain	Geared	Plain	Geared	Plain	Geared	Plain	Geared	Plain	Geared	Plain	Geared	Plain	Geared
A	11 3/4	11 13/16	15 5/16	15 5/16	18 7/8	18 7/8	23 1/2	23 1/2	24	24	28 1/4	28 1/4	28 1/4	28 1/4	30 3/8	30 3/8
B	4 3/16	4 3/8	3 11/16	3 11/16	5 3/4	5 3/4	6 1/2	6 1/2	6 1/2	6 1/2	8 15/16	8 15/16	8 15/16	8 15/16	10 7/8	10 7/8
C	2 9/16	2 9/16	3 11/16	3 11/16	3 7/16	3 7/16	3 3/4	3 3/4	3 3/4	3 3/4	5 1/4	5 1/4	5 1/4	5 1/4	7 3/16	7 3/16
D	6	6	6	6	6 7/8	6 7/8	7 3/4	7 3/4	7 3/4	7 3/4	11	11	11	11	11	11
E	4 1/2	4 15/16	5	5	5 7/16	5 7/16	6 1/8	6 1/8	6 1/8	6 1/8	7 1/4	7 1/4	7 1/4	7 1/4	7 1/4	7 1/4
F	2 1/16	2 1/16	3 1/8	3 1/8	3	3	2 13/16	2 13/16	2 13/16	2 13/16	3	3	3	3	3	3
G	3	3 3/4	3 5/8	3 3/4	4 5/16	4 5/16	4 15/16	4 15/16	4 15/16	4 15/16	5 9/16	5 9/16	5 9/16	5 9/16	5 13/16	5 13/16
H	3 1/8	4	4 3/4	4	5	5	6	6	6	6	8	8	8	8	8	8
J	3 1/4	3 1/4	4 13/16	4 13/16	4 13/16	4 13/16	5	5	5	5	4 13/16	4 13/16	4 13/16	4 13/16	4 13/16	4 13/16
K	4 1/8	4 1/8	5 1/16	5 1/16	5 1/16	5 1/16	4 7/8	4 7/8	4 7/8	4 7/8	5 1/16	5 1/16	5 1/16	5 1/16	5 1/16	5 1/16
L	5/16	5/16	1/2	5/16	1/4	1/4	3/8	3/8	3/8	3/8	1/2	1/2	1/2	1/2	1 1/16	1 1/16
M	4	4 3/4	5 9/16	4 3/4	5 7/8	5 7/8	7	7	7	7	9 7/16	9 7/16	9 7/16	9 7/16	9 1/2	9 1/2
N	1/2	9/16	9/16	9/16	1 1/16	1 1/16	1 1/16	1 1/16	1 1/16	1 1/16	1 1/2	1 1/2	1 1/2	1 1/2	7/16	7/16
O	—	5 9/16	—	5 9/16	6 1/8	6 1/8	6 3/4	6 3/4	6 3/4	6 3/4	7 9/16	7 9/16	7 9/16	7 9/16	7 3/16	7 3/16
P	—	10	—	10	8 15/16	8 15/16	10 7/16	10 7/16	10 7/16	10 7/16	11 7/16	11 7/16	11 7/16	11 7/16	11 11/16	11 11/16
Q	2	2	2 1/2	2 1/2	3 7/8	3 7/8	4	4	4	4	11 15/16	11 15/16	—	—	—	—
R	11/16	11/16	1 1/8	1 1/8	1 1/4	1 1/4	1 1/4	1 1/4	1 3/8	1 3/8	11 3/16	11 3/16	11 3/16	11 3/16	2 3/8	2 3/8
S	1/16	15/16	3/16	15/16	15/16	15/16	3/4	3/4	3/4	3/4	2 3/16	2 3/16	2 3/16	2 3/16	5 1/16	5 1/16
T	1	1	1 3/8	1 3/8	1 5/8	1 5/8	1 5/8	1 5/8	1 3/4	1 3/4	2 5/16	2 5/16	2 5/16	2 5/16	3	3
U	7/8	7/8	1 1/8	1 1/8	1 11/16	1 11/16	1 11/16	1 11/16	1 7/8	1 7/8	2 9/16	2 9/16	2 9/16	2 9/16	3	3
V	10 1/8	10 1/8	11 3/8	11 3/8	11 3/8	11 3/8	11 3/8	1 3/8	11 3/8	11 3/8	11 5/8	11 5/8	11 5/8	11 5/8	11 5/8	11 5/8
W	1/4	3/8	3/8	3/8	1/2	1/2	5/8	5/8	5/8	5/8	5/8	5/8	5/8	5/8	5/8	5/8
X	7 3/16	7 3/16	6 11/16	6 11/16	8 15/16	8 15/16	10 5/16	10 5/16	10 5/16	10 5/16	14 7/16	14 7/16	14 7/16	14 7/16	16 3/8	16 3/8
Y	3	3	3	3	3 7/16	3 7/16	3 7/8	3 7/8	3 7/8	3 7/8	5 1/2	5 1/2	5 1/2	5 1/2	5 1/2	5 1/2
Z	2	2	2 1/2	2 1/2	4 1/2	4 1/2	6 1/4	6 1/4	6 1/4	6 1/4	13 15/16	13 15/16	18 3/16	18 3/16	21 11/16	21 11/16
AA	—	—	—	—	—	—	—	—	—	—	3/8	3/8	3/8	3/8	3/8	3/8
BB	—	—	—	—	—	—	—	—	—	—	1 15/16	1 15/16	0	0	0	0

Note: Dimensions are based on minimum beam and may vary with larger beams.

Cyclone trolley hoist for low headroom

Cyclone and trolley all in one unit for low headroom applications features:

- Crowned tread and flanged wheels to minimize rolling friction
- Simple, efficient design
- Reduced headroom, side clearances and end approach for easy maneuvering of loads in tight places
- Plain trolley mounts in capacities from 1/2 to 6 tons
- Geared trolley mounts in capacities from 1 1/2 to 6 tons
- Standard hand chain drop 2 feet less than lift (example: 8 foot lift hoist has 6 foot hand chain drop)
- Chain containers, zinc-plated load and hand chain, aluminum unwelded hand chain, Latchlok hooks, bronze hooks, bullard hooks, larger beam trolleys, trolley guards and units without Load Limiter optional, depending on capacity
- Standard Load Limiter/automatic overload protection
- Lifetime warranty
- Metric rated
- Made in U.S.A.

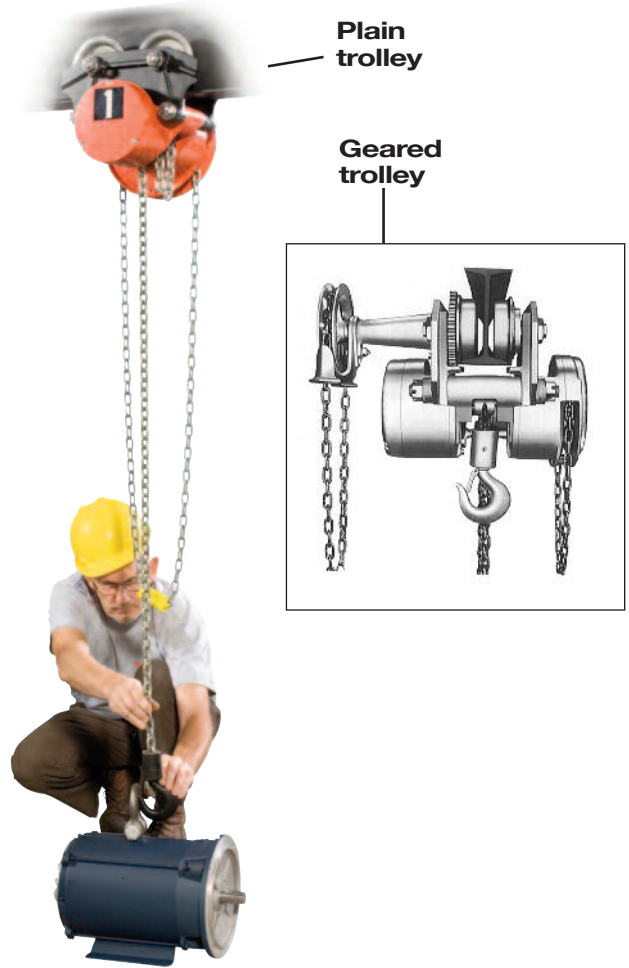

Specifications

Rated capacity* (tons)	Product code		Std. lift (ft.)	Reeving	American standard depth (in.)††	Beam adjustment ranges flange width (in.)††	Chain pull to lift full load (lbs.)	Chain overhauled to lift load one foot (ft.)	Min. headroom (in.)	Min. radius curve (in.)	Shipping weight (lbs.)	
	Plain trolley	Geared trolley									Plain trolley	Geared trolley
1/2	4832	—	10	1	6-12**†	3 3/8-5	46	22 1/2	8 7/8	36	91	—
1	4834	—	10	1	6-12**†	3 3/8-5	69	30	9 1/4	36	96	—
1 1/2	4835	4925	10	1	7-15**†	3 5/8-5 1/2	80	40 1/2	12 1/2	48	190	214
2	4836	4926	10	1	7-15†	3 5/8-5 1/2	83	52	12 1/2	48	190	220
3	4837	4927	10	2	7-15†	3 5/8-5 1/2	85	81	14 1/8	48	210	240
4	4838	4928	10	2	8-24†	4-7	88	104	16 3/4	96	315	379
5	4839	4929	10	3	8-24†	4-7	75	156	18 1/4	96	338	360
6	4840	4930	10	3	8-24†	4-7	90	156	18 3/4	96	387	357

** 1/2 and 1 ton also available for 4" and 5" S-beam, and 1 1/2 and 2 ton for 6" S-beam without extra charge

† Universal tread trackwheels designed to operate on either sloped or flat flange beams, rails, or tracks Also can be used on flat flange beams within the same range of flange widths, provided beam depth will accommodate wheel diameter (check clearance diagram)

†† Applies to minimum size S-beam within adjustability range


***WARNING**

Overloading and improper use can result in injury.


To avoid injury:

- Do not exceed working load limit, load rating capacity
- Do not use to lift people or loads over people.
- use only alloy chain for overhead lifting.
- Read and follow all instructions.

Cyclone trolley hoist for low headroom-Specifications

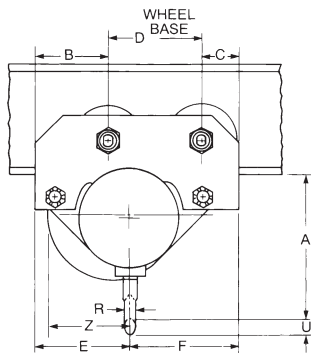

Plain trolley

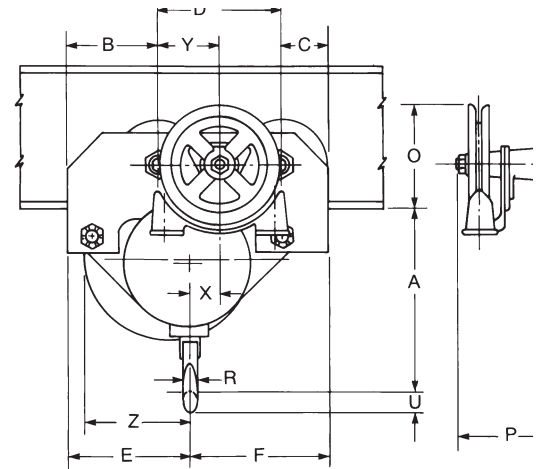

Geared trolley

Clearance dimensions (in.)

Dimension	Rated capacity* (tons)						
	1/2	1	1 1/2 & 2	3	4	5	6
A	8 ⁷ / ₈	9 ¹ / ₄	12 ¹ / ₂	14 ¹ / ₈	16 ³ / ₄	18 ¹ / ₄	18 ³ / ₄
B	3 ⁵ / ₈	3 ⁵ / ₈	6	6	7 ³ / ₈	7 ³ / ₈	7 ³ / ₈
C	3 ⁵ / ₈	3 ⁵ / ₈	3 ¹ / ₈	3 ¹ / ₈	4	4	4
D	6 ¹ / ₂	6 ¹ / ₂	7 ³ / ₄	7 ³ / ₄	9	9	9
E	6 ⁷ / ₈	6 ³ / ₄	7 ⁵ / ₈	10 ¹ / ₂	11	11 ⁷ / ₈	11 ⁷ / ₈
F	6 ³ / ₄	6 ⁷ / ₈	9 ¹ / ₄	6 ³ / ₈	9 ³ / ₈	8 ¹ / ₂	8 ¹ / ₂
G	3 ³ / ₄	3 ³ / ₄	5 ¹ / ₈	5 ¹ / ₈	5 ⁷ / ₈	5 ⁷ / ₈	5 ⁷ / ₈
H	4 ³ / ₄	4 ³ / ₄	4 ⁵ / ₈	4 ⁵ / ₈	5 ⁷ / ₈	5 ⁷ / ₈	5 ⁷ / ₈
J	6	6	9 ⁵ / ₁₆	9 ⁵ / ₁₆	10 ⁹ / ₁₆	10 ⁹ / ₁₆	10 ⁹ / ₁₆
K	8 ¹ / ₈	8 ¹ / ₈	9 ⁵ / ₈	9 ⁵ / ₈	11	11	11
L	1 ¹ / ₂	1 ¹ / ₂	1 ¹ / ₂	1 ¹ / ₂	1 ¹ / ₂	1 ¹ / ₂	1 ¹ / ₂
M	5 ⁷ / ₁₆	5 ⁷ / ₁₆	5 ³ / ₈	5 ³ / ₈	6 ³ / ₄	6 ³ / ₄	6 ³ / ₄
N	1	1	1	1	1 ¹ / ₈	1 ¹ / ₈	1 ¹ / ₈
O	—	—	6 ³ / ₄	6 ³ / ₄	6 ¹ / ₂	6 ¹ / ₂	6 ¹ / ₂
P	—	—	4 ⁷ / ₈	4 ⁷ / ₈	4 ¹ / ₄	4 ¹ / ₄	4 ¹ / ₄
R	1 ¹ / ₁₆	1 ³ / ₁₆	1 ¹ / ₈	1 ¹ / ₄	1 ¹ / ₄	1 ¹ / ₄	1 ³ / ₈
S	5 ¹ / ₁₆	5 ¹ / ₁₆	1 ³ / ₈	1 ³ / ₈	1 ¹ / ₁₆	1 ¹ / ₁₆	1 ¹ / ₁₆
T	1 ¹ / ₃₂	1 ¹ / ₈	1 ⁵ / ₁₆	1 ⁵ / ₈	1 ⁵ / ₈	1 ⁵ / ₈	1 ³ / ₄
U	1 ⁵ / ₁₆	1 ¹ / ₈	1 ¹ / ₂	1 ¹¹ / ₁₆	1 ¹¹ / ₁₆	1 ¹¹ / ₁₆	1 ⁷ / ₈
W	—	—	5 ⁵ / ₈	5 ⁵ / ₈	7	7	7
X	—	—	2 ¹ / ₄	5 ⁵ / ₈	7 ⁵ / ₈	—	—
Y	—	—	3 ⁷ / ₈	3 ⁷ / ₈	4 ¹ / ₂	4 ¹ / ₂	4 ¹ / ₂
Z	7 ³ / ₈	7 ¹ / ₄	6 ⁵ / ₈	9 ¹ / ₂	9 ¹ / ₂	10 ³ / ₈	10 ³ / ₈

Note: Dimensions G, L, M, O, P, S & W are shown for minimum S-beam and increase proportionally for larger beams. Dimension N is shown for minimum S-beam and decreases proportionally for larger beams.

Cyclone Fabric Chain Bags



Cyclone, Army type and low headroom trolley hoist optional fabric chain bags

Product code		Rated capacity* (tons)	Maximum length of lift (ft.)	Bag diameter (in.)	Bag length (in.)	Approx. weight (lbs.)
Cyclone and Army type	Low headroom trolley hoist					
2482	2493	1/4-1/2	18	7	7 1/2 x 7 1/2	3
2483	2488	1/4-1/2	18.1-36	10	7 1/2 x 7 1/2	3
2484	2495	1/4-1/2	36.1-54	13	7 1/2 x 7 1/2	3
2485	2496	1/4-1/2	54.1-78	16	7 1/2 x 7 1/2	4
2486	2497	1/4-1/2	78.1-93	18	7 1/2 x 7 1/2	4
2487	2498	1/4-1/2	93.1-129	20	7 1/2 x 7 1/2	4
2482	2493	1	11	7	7 1/2 x 7 1/2	3
2483	2494	1	11.1-24	10	7 1/2 x 7 1/2	3
2484	2495	1	24.1-37	13	7 1/2 x 7 1/2	3
2485	2496	1	37.1-55	16	7 1/2 x 7 1/2	4
2486	2497	1	55.1-66	18	7 1/2 x 7 1/2	4
2487	2498	1	66.1-92	20	7 1/2 x 7 1/2	4
2488	2488	1 1/2-2	13	10	7 1/2 x 7 1/2	3
2489	2489	1 1/2-2	13.1-20	13	7 1/2 x 7 1/2	3
2490	2490	1 1/2-2	20.1-29	16	7 1/2 x 7 1/2	4
2491	2491	1 1/2-2	29.1-35	18	7 1/2 x 7 1/2	4
2492	2492	1 1/2-2	35.1-49	20	7 1/2 x 7 1/2	4
2489	2489	3-4	10	13	7 1/2 x 7 1/2	3
2490	2490	3-4	10.1-15	16	7 1/2 x 7 1/2	4
2491	2491	3-4	15.1-18	18	7 1/2 x 7 1/2	4
2492	2492	3-4	18.1-25	20	7 1/2 x 7 1/2	4
2490	2490	5-6	10	16	7 1/2 x 7 1/2	4
2491	2491	5-6	10.2-12	18	7 1/2 x 7 1/2	4
2492	2492	5-6	12.1-17	20	7 1/2 x 7 1/2	4
2491	2491	8	8	18	7 1/2 x 7 1/2	4
2492	2492	8	8.1-12	20	7 1/2 x 7 1/2	4
2492	2492	10	10	20	7 1/2 x 7 1/2	4



Cyclone Chain Containers

Cyclone, Army type and low headroom trolley hoist optional metal chain containers

Product code		Rated capacity* (tons)	Maximum length of lift (ft.)	Bucket length (in.)	Bucket diameter (in.)	Approximate weight (lbs.)
Cyclone and Army type	Low headroom trolley hoist					
4603S-373S	4614S-329S	1/4-1/2	9	8	5	3
4603S-373S	4614S-330S	1/4-1/2	9.1-18	11	5	4
4603S-375S	4614S-331S	1/4-1/2	18.1-27	14	5	4
4603S-376S	4614S-332S	1/4-1/2	27.1-36	17	5	5
4603S-377S	4614S-333S	1/4-1/2	45	20	5	6
4603S-378S	4614S-334S	1/4-1/2	45.1-54	23	5	6
4603S-379S	4614S-335S	1/4-1/2	54.1-78	31	5	8
4603S-380S	4614S-336S	1/4-1/2	78.1-93	36	5	9
4603S-381S	4614S-337S	1/4-1/2	93.1-129	48	5	12
4603S-382S	4614S-339S	1	11	11	5	4
4603S-383S	4614S-340S	1	11.1-18	14	5	4
4603S-384S	4614S-341S	1	18.1-24	17	5	5
4603S-385S	4614S-342S	1	24.1-31	20	5	6
4603S-386S	4614S-343S	1	31.1-37	23	5	6
4603S-387S	4614S-344S	1	37.1-55	31	5	8
4603S-388S	4614S-345S	1	55.1-66	36	5	9
4603S-389S	4614S-346S	1	66.1-92	48	5	12
4603S-352S	4614S-352S	1 1/2-2	9	14	5	4
4603S-353S	4614S-353S	1 1/2-2	9.1-13	17	5	5
4603S-354S	4614S-354S	1 1/2-2	13.1-16	20	5	6
4603S-355S	4614S-355S	1 1/2-2	16.1-20	23	5	6
4603S-356S	4614S-356S	1 1/2-2	20.1-29	31	5	8
4603S-357S	4614S-357S	1 1/2-2	29.1-35	36	5	9
4603S-358S	4614S-358S	1 1/2-2	35.1-49	48	5	12
4603S-394S	—	3-4	8	20	5	6
4603S-360S	4614S-360S	3-4	10	23	5	6
4603S-361S	4614S-361S	3-4	10.1-15	31	5	8
4603S-362S	4614S-362S	3-4	15.1-18	36	5	9
4603S-363S	4614S-363S	3-4	18.1-25	48	5	12
4603S-367S	4614S-367S	5-6	10	31	5	8
4603S-368S	4614S-368S	5-6	10.1-12	36	5	9
4603S-369S	4614S-369S	5-6	12.1-17	48	5	12
4603S-395S	—	8	8	36	5	9
4603S-396S	—	8	8.1-12	48	5	12
4603S-397S	—	10	10	48	5	12

Series 622 hand chain hoist


- Simple, efficient, economical design
- Equipped with hardened load chain for flexibility and long wear
- Compact design, low headroom and lightweight steel construction for easy installation, even in confined spaces
- Weston-type load brake requires no lubrication
- Hand wheel cover with guide slots minimizes jamming and slipping
- Forged swivel hooks with latches reduce twisting of chain and unintentional unhooking of load when chain is slack
- Standard hand chain drop is 2 feet less than lift (example: 8 foot lift hoist has 6 foot hand chain drop)
- One-year warranty
- Metric rated
- Imported

Specifications

Product code	Rated capacity* (tons)	Standard lift (ft.)	Chain pull to lift rated load (lbs.)	Hand chain overhauled to lift load one foot (ft.)	Approx. shipping weight (lbs.)
2255	1/2	10	53	29	18
2208	1/2	15	53	29	25
2231	1/2	20	53	29	30
2263	1/2	30	53	29	38
2256	1	10	77	37	26
2210	1	15	77	37	30
2262	1	20	77	37	38
2264	1	30	77	37	48
2258	2	10	82	80	61
2213	2	15	82	80	71
2233	2	20	82	80	80
2272	2	30	85	80	85
2259	3	10	65	154	89
2223	3	15	65	154	99
2214	3	20	65	154	109
2260	5	10	105	147	91
2257	5	15	105	147	107
2234	5	20	105	147	123
2277	10	10	109	289	170



Series 622 hand chain hoist-specifications

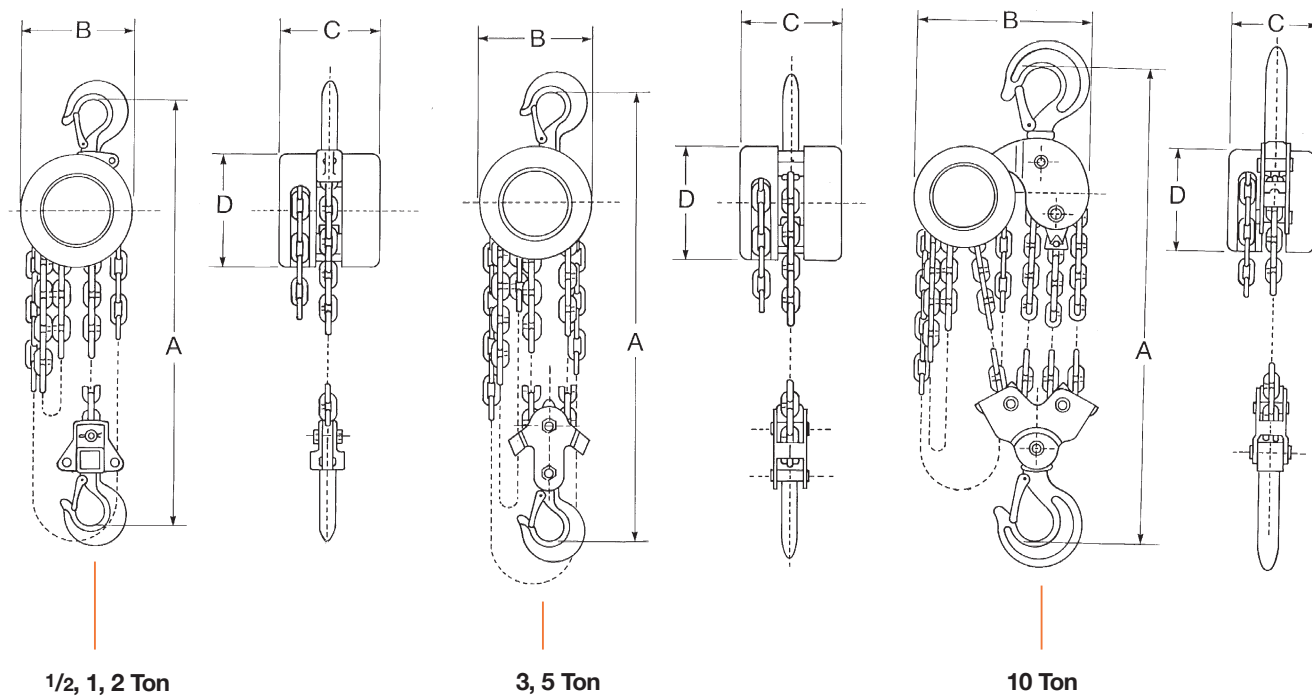

***WARNING**

Overloading and improper use can result in injury.

To avoid injury:

- Do not exceed working load limit, load rating capacity
- Do not use to lift people or loads over people.
- use only alloy chain for overhead lifting.
- Read and follow all instructions.

Clearance dimensions (in.)

Dimension	Rated capacity* (tons)					
	1/2	1	2	3	5	10
A (Headroom)	11 ⁵ / ₈	13	18 ¹ / ₈	21 ²⁹ / ₃₂	23 ⁷ / ₈	27 ⁹ / ₁₆
B (Width)	4 ¹⁵ / ₁₆	5 ¹⁹ / ₃₂	8 ⁵ / ₁₆	8 ⁵ / ₁₆	8 ⁵ / ₁₆	14 ³ / ₃₂
C (Depth)	4 ⁵ / ₁₆	5 ¹ / ₁₆	6 ⁵ / ₈	6 ⁵ / ₈	6 ⁵ / ₈	6 ⁵ / ₈
D (Diameter)	4 ¹⁵ / ₁₆	5 ¹⁹ / ₃₂	8 ⁵ / ₁₆	8 ⁵ / ₁₆	8 ⁵ / ₁₆	8 ⁵ / ₁₆
Hook opening (upper)	1 ¹ / ₁₆	1 ¹ / ₃₂	1 ¹ / ₄	1 ⁵ / ₁₆	1 ¹³ / ₁₆	2 ¹ / ₂
Hook opening (lower)	1 ¹ / ₁₆	1 ¹ / ₃₂	1 ¹ / ₄	1 ⁵ / ₁₆	1 ¹³ / ₁₆	2 ¹ / ₂

**CHESTER
HOIST**

By Columbus McKinnon

HOISTS & TROLLEYS

HAND CHAIN HOISTS

POWERED CHAIN HOISTS

TROLLEYS

END TRUCKS &
COMPONENTS





ABOUT US

A CLOSER LOOK AT CHESTER HOIST

The roots of Chester Hoist date back to 1881 when Mr. Hugh Wright started the Wright Hoist Company in Lisbon, Ohio. In 1928, the Wright Hoist Company was sold to the American Chain and Cable Company, today known as ACCO, and later moved to York, Pennsylvania. In 1942, the Wright Brothers returned to Lisbon from York and followed their grandfather into the hoist business by starting the Chester Manufacturing Company. Using a design similar to their grandfather's, they began manufacturing hoists in Lisbon, Ohio, under the Chester brand name.

Since the 1940s, high quality standards and qualification testing have positioned Chester Hoist as a major supplier of hoists to the U.S. Military. In 1954, Chester introduced the Zephyr steel-frame hand chain hoist. Tested and approved to U.S. military specifications, this hoist enabled Chester to become a key hoist supplier to the U.S. Navy. That same year, a spark-resistant version of the Zephyr is introduced, marking Chester's entry into the oil and gas industry.

In 1986, Chester Hoist purchased the Coffing Worm Drive Electric Wire Rope Hoist line from the Duff-Norton Company and began manufacturing the line in Lisbon under the Chester Label. Then, in 1989, Chester Hoist began manufacturing ultra-low headroom electric chain hoists. This line, in addition to its low-headroom wire rope hoists and "Zephyr" low headroom manual hoists, makes Chester the industry leader in close headroom hoists.

Acquired by Columbus McKinnon in 1995, Chester Hoist still produces Zephyr low-headroom manual hoists. In addition to the Zephyr, Chester is known for its specially engineered hoists and trolleys used in a variety of industries.

SPECIAL APPLICATIONS **OIL & GAS PRODUCTS**

The Chester Hoist Company is a long-standing industry leader in providing solutions for the most demanding hoisting requirements of the oil and gas industry. Not only do we offer an unduplicated range of products and distribution for oil and gas applications, we also possess unique experience, knowledge and application engineering capabilities that no other manufacturer can claim. Our network of experienced distributors are located around the world, serving most of the major oil and gas producers and refiners in all major markets.

To address the needs of the oil and gas industry, many models of the Chester family of hoists are available with a variety of options, including:

- **LOW HEADROOM**
- **SPARK RESISTANCE**
- **CORROSION RESISTANCE**

For applications in oil and gas environments, Chester Hoist recommends the use of solid spark- and corrosion-resistant materials. Our standard spark-resistant components include stainless steel load chain, wire rope and hook latches as well as solid bronze hooks, hook blocks and trolley wheels with aluminum or stainless steel hand chains. We also provide a wide range of plated chains, hooks and wheels. While many of our competitors also offer plated components, these superficial coatings only offer temporary protection against sparking and corrosion.



SPECIAL APPLICATIONS **CLEAN ROOM APPLICATIONS**

Clean room environments exist in a variety of industries ranging from food processing and pharmaceuticals to electronics and biotechnology. In these environments, even the smallest particle or contaminant could adversely affect the manufacturing process, therefore equipment must meet certain standards and requirements that vary from industry to industry.

Chester hoists can be specially designed to help you meet these standards. The options we offer for our hoists can reduce or eliminate the risk of contamination from factors such as corrosion, lubricants or flaking paint. Optional features include:

- **STAINLESS STEEL LOAD CHAIN**
- **STAINLESS STEEL HAND CHAIN**
- **STAINLESS STEEL HAND CHAIN WHEELS**
- **STAINLESS STEEL LIFT WHEELS**
- **STAINLESS STEEL HOOKS**
- **STAINLESS STEEL LATCHES**
- **STAINLESS STEEL HOOK BLOCKS**
- **STAINLESS STEEL HOUSINGS**
- **GREASE-TIGHT ENCLOSURES
WITH FOOD-GRADE LUBRICANTS**
- **FOOD-GRADE EPOXY FINISH**

No matter the clean room environment, Chester has the hoists and trolleys to meet the needs of your application.



HAND CHAIN HOISTS

With more configurations than anyone in the industry, the versatility of the Chester manual hoist offering is second to none. From units specifically designed for low headroom to hoist/trolley combinations for easy maneuverability, there is a manual hoist for your job.

CHESTER ZEPHYR HAND CHAIN HOISTS & TROLLEYS 10

Hook-Suspended Hoists..... 12

Clevis-Connected Hoists and Trolleys 16

Army-Type Trolley Hoists 18

Low-Headroom Trolley Hoists 22

Swivel-Truck Low-Headroom Trolley Hoists 26

Model PT Trolleys 30

Swivel-Truck Trolleys 34

Accessories 38



ZEPHYRTM

MANUAL HOISTS & TROLLEYS

CHESTER ZEPHYR hoists are designed, built and tested to the highest quality and performance standards, meeting or exceeding the rigid specifications of the material handling industry.

The Chester Zephyr is engineered for best-in-class performance. It is compact, lightweight and features low headroom, making it ideal for operation in tight quarters. It is also designed with ergonomics in mind, helping to lessen fatigue and increase operator efficiency.

With a heavy-duty steel housing, the Zephyr has the durability needed for even the toughest lifting applications. It is shock resistant and virtually impervious to wear and tear in both normal and heavy-duty operating environments. It can also withstand extreme weather conditions, making it ideal for indoor or outdoor applications. Its simple design also makes it easy to service and maintain, ensuring reliable service and long life.

Adaptable to a variety of industries, the Chester Zephyr is a versatile hoist for any material handling application.



ZEPHYR HOOK-SUSPENDED HOISTS

CAPACITIES

1/2 to 25 Tons

LIFT

8 Feet Standard

OPTIONSSpark and Corrosion Resistance
Clean Room

Chester Zephyr steel-framed, hook-suspended hoists are designed, built and tested to meet rigid quality and performance specifications that exceed industry standards. The Zephyr is a specially engineered hoist from every standpoint and is available in capacities ranging from ¼ to 25 tons. Versatile and easy to maintain, this hoist is durable and well suited to any lifting application.

KEY FEATURES**MECHANICALLY-SEALED,
GREASE-TIGHT ENCLOSURE**

Heavy steel housings keep out most foreign material, protecting precision-machined working parts. Sealed enclosure keeps lubrication in, making the Chester Zephyr a lifetime-lubricated hoist under normal conditions. No protruding parts prevent snagging.

SHOCK RESISTANT

Stamped covers made of heavy-gauge steel, two rolled steel sections in the frame and strong alloy steel suspension provide durability and shock resistance.

EASY DISMANTLING

Using only a small wrench and screwdriver, operators can make periodic inspections or replace chains and parts with ease.

GEAR TRAIN

Center planetary system uses modified involute stub tooth form. Gear teeth are cut from solid alloy steel blanks and heat treated for added strength.

**DURABLE INTERNAL GEARS,
PINIONS & PINION SHAFTS**

Internal gears and pinions are made of nickel-chrome-molybdenum alloy steel. Internal gear is heat treated for durability and strength. Machine-cut teeth are heat treated and mounted on heavy-duty roller bearings. Gear and pinion shafts are made of rigidly mounted alloy steel and are surface hardened and ground.

PINION CAGE

Spline fitted to the steel load wheel shaft.

DRIVING SPINDLE

Made of nickel-chrome-molybdenum alloy steel with machine-cut teeth. Operates on heavy-duty bearings.

LOAD WHEEL

Heat-treated cast steel with spline fit to load shaft. Chain pockets are accurately formed, and load wheel can be reversed when new chain is installed to effect double life.

CHAIN STRIPPER

Ductile Iron.

LOAD BRAKE

Positive-action, Weston-type load brake with uniform composition lining and quiet-action, forged-alloy dual pawls.

LOAD CHAIN GUIDE

Completely shrouds load sheave, guides chain into load wheel and efficiently shields these parts from entry of foreign objects.

LOAD CHAIN

Made of durable steel. Links are precision formed to fit pockets of load wheel. Heat treated for high tensile strength and hardness.

HAND CHAIN GUIDE

Designed to eliminate fouling and permit angular pull on the hand chain.


TOP HOOK ASSEMBLY

Permits hoist to rock and swivel under load. Alloy crosshead rocks in rolled steel straps welded to frame. Alloy hook is heat treated. Drop-forged alloy steel hook will open before fracturing.

BOTTOM HOOK ASSEMBLY

Consists of forged alloy steel hook operating on thrust bearing with full swiveling action.

For Chester trolley options, see pages 34 through 41.

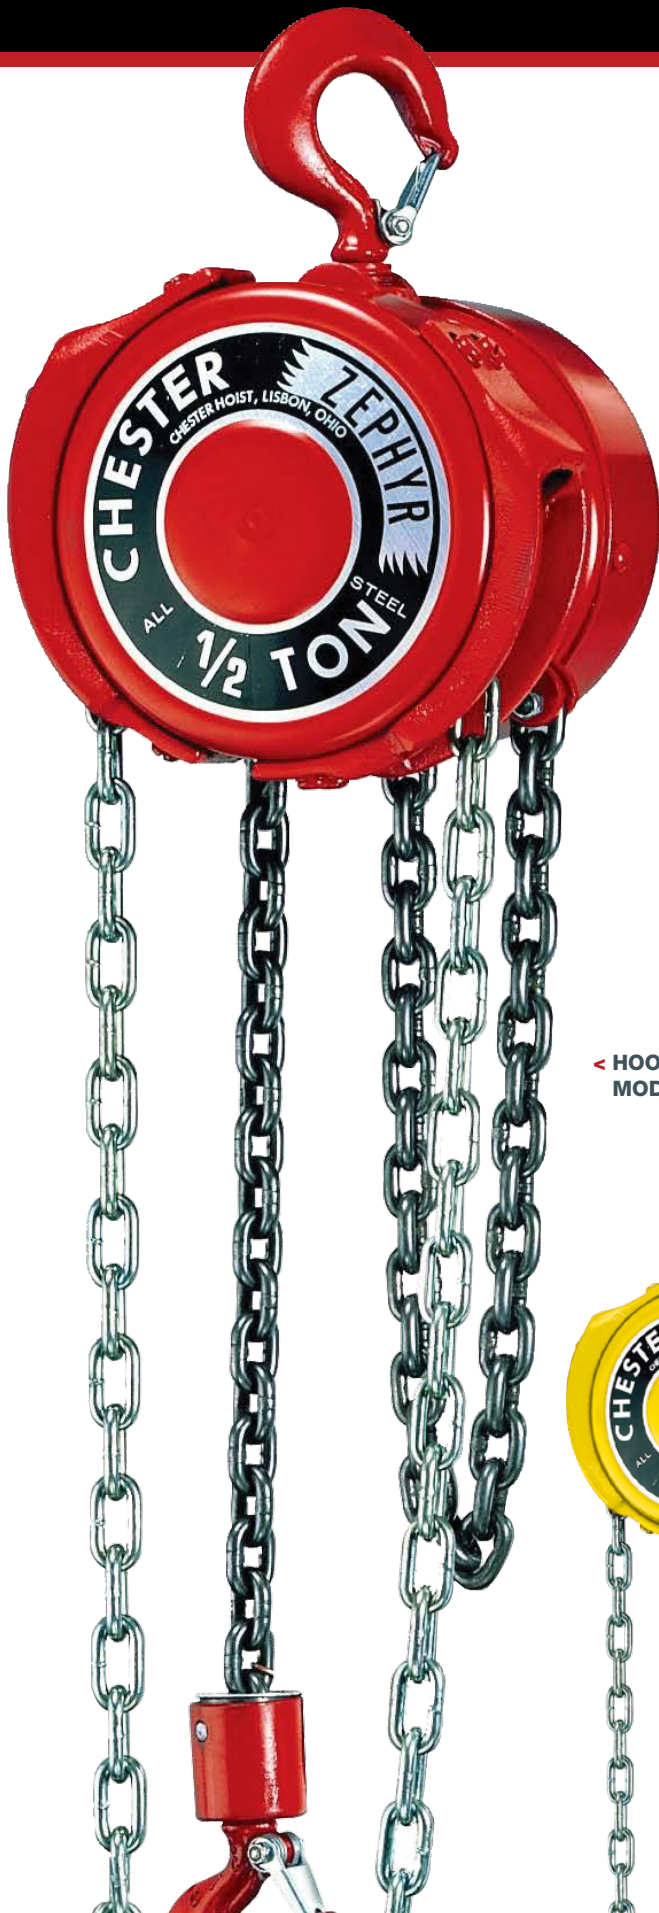◀ HOOK-SUSPENDED
MODEL◀ SPARK-RESISTANT
HOOK-SUSPENDED
MODEL

SPARK-RESISTANT OPTIONS

SOLID BRONZE TOP AND BOTTOM HOOKS,
BOTTOM BLOCK AND BRAKE RATCHET

STAINLESS STEEL LOAD CHAIN
AND HOOK LATCHES

ALUMINUM, BRONZE OR
STAINLESS STEEL HAND CHAIN

CORROSION-RESISTANT OPTIONS

SPECIAL CORROSION-RESISTANT FINISHES

Created specifically for operation in salt-laden
or other corrosive environments.


CLEAN ROOM OPTIONS

STAINLESS STEEL LOAD CHAIN, HAND CHAIN,
HAND CHAIN WHEEL, LIFT WHEEL, HOOKS,
LATCHES, HOOK BLOCK
AND HOUSINGS

GREASE-TIGHT ENCLOSURE
WITH FOOD-GRADE LUBRICANT

Clean room environments exist in many industries,
including food processing, pharmaceutical, electronics
and others. Special material options available for the
Zephyr hoist allow it to be specially built and used in a
wide range of clean room applications.

CLEAN ROOM ▶
HOOK-SUSPENDED
MODEL

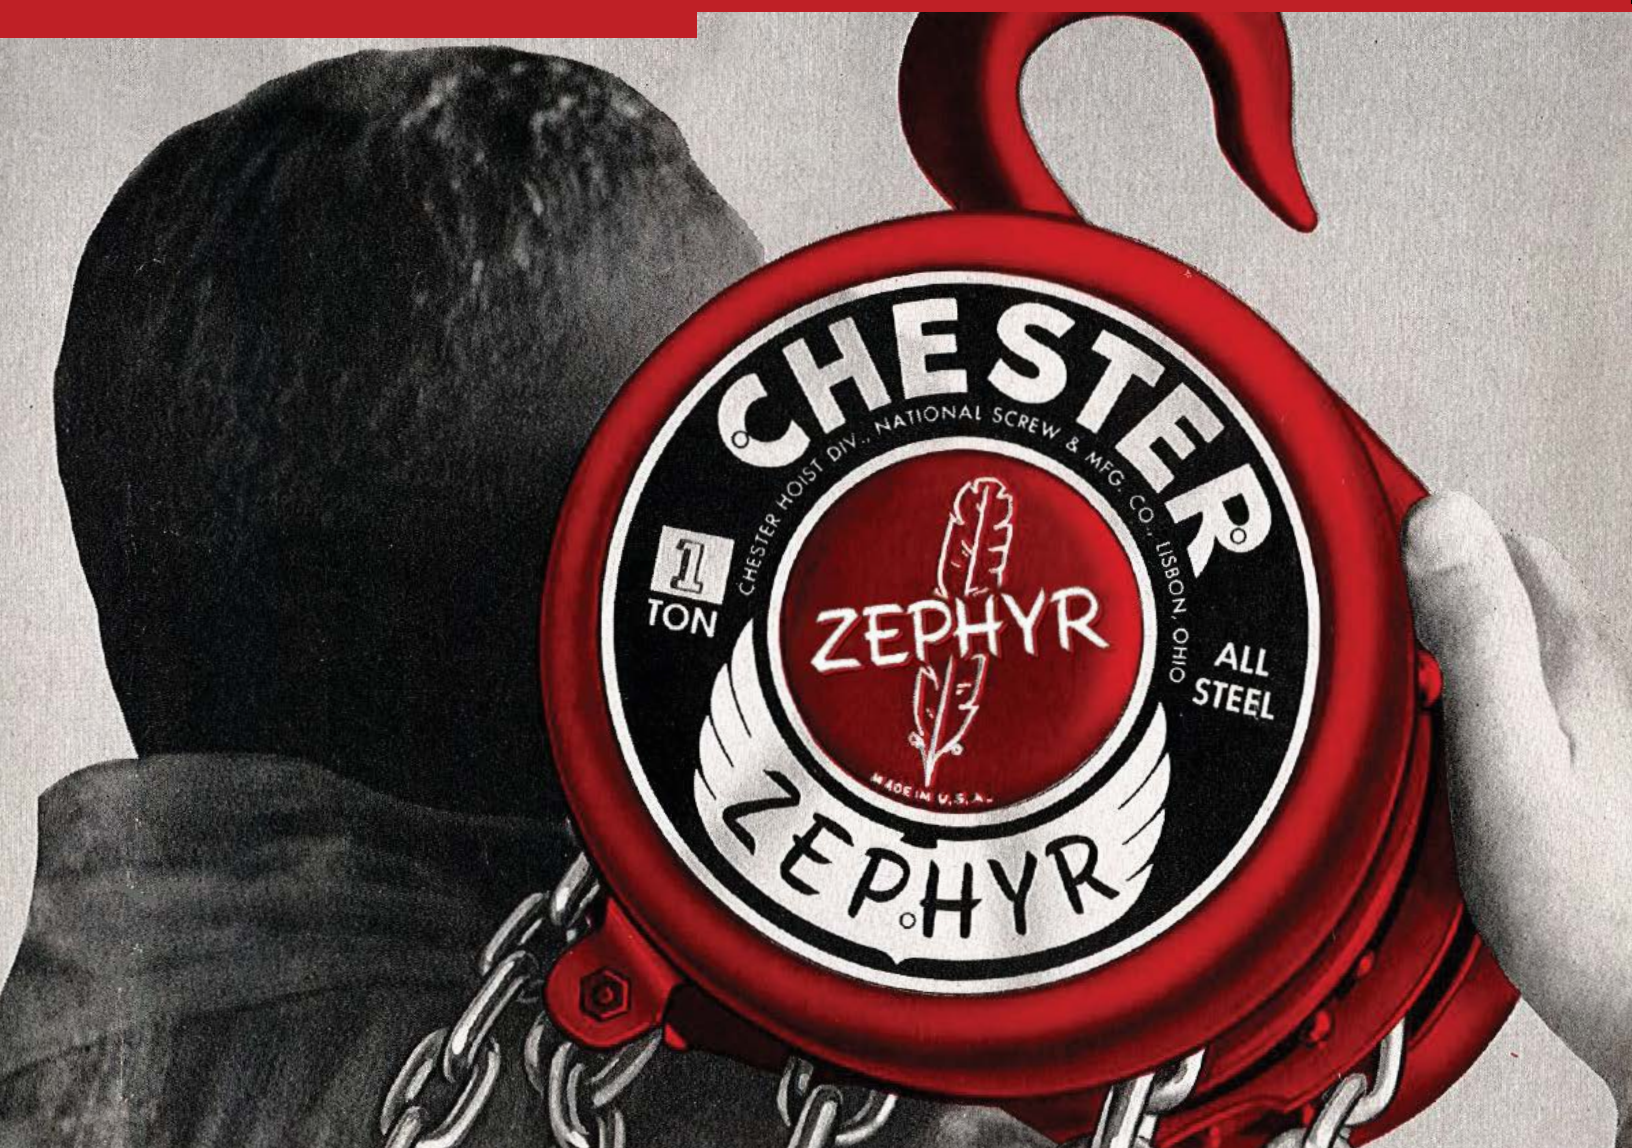

SPECIFICATIONS


Capacity (tons)	Catalog Number	Standard Lift (ft.)	Minimum Distance Between Hooks (in.)	Chain Pull to Lift Full Load (lbs.)	Chain Overhauled to Lift Load One Foot (ft.)	Strands of Chain		Length of Chain		Weight (lbs.)	
						Load	Hand	Load	Hand	Net	Gross
1/2	130-1/2	8	12-1/8	31	33	1	2	9' - 0"	14' - 0"	44	46
1	130 - 1	8	12-1/8	62	33	1	2	9' - 0"	14' - 0"	46	48
1-1/2	130 - 1-1/2	8	15-7/8	57	58	1	2	9' - 4"	14' - 6"	85	88
2	130 - 2	8	15-7/8	76	58	1	2	9' - 4"	14' - 6"	85	88
3	130 - 3	8	21-1/4	60	116	2	2	18' - 6"	15' - 6"	122	140
4	130 - 4	8	24-1/2	79	116	2	2	18' - 6"	15' - 6"	130	144
5	130 - 5	8	25-1/2	65	174	3	2	27' - 6"	15' - 6"	184	208
6	130 - 6	8	25-1/2	78	174	3	2	27' - 6"	15' - 6"	184	208
8	130 - 8	8	26-3/4	81	232	4	2	36' - 0"	16' - 0"	245	283
10	130 - 10	8	30-3/4	84	290	5	2	45' - 0"	16' - 6"	310	355
12	130 - 12	8	49-5/8	*78 (2)	*174	6	4	67' - 0"	(2) 19' - 0"	660	720
16	130 - 16	8	53-1/2	*81 (2)	*232	8	4	84' - 0"	(2) 19' - 0"	825	900
20	130 - 20	8	56-3/8	*85 (2)	*290	10	4	101' - 0"	(2) 19' - 0"	1050	1130
25	130 - 25	8	5 - 3/8	*93 (2)	*348	12	4	120' - 0"	(2) 19' - 0"	1070	1160

* One each hand chain. 12 Ton & up have two hand chains

A QUICK HISTORY

The Chester Manufacturing Company first launched the Zephyr hand chain hoist in 1956 as a lighter and more compact replacement for their "Model 41" hoist.

Because the Zephyr was designed and tested to the rigorous military standard, MIL-H-904, the hoist exceeded all applicable standards for the U.S. industrial hoist market. Building on its robust product platform, Chester introduced the first spark-resistant Zephyr hoist later that same year, which quickly became the hoist of choice for many users in the oil and gas industry.

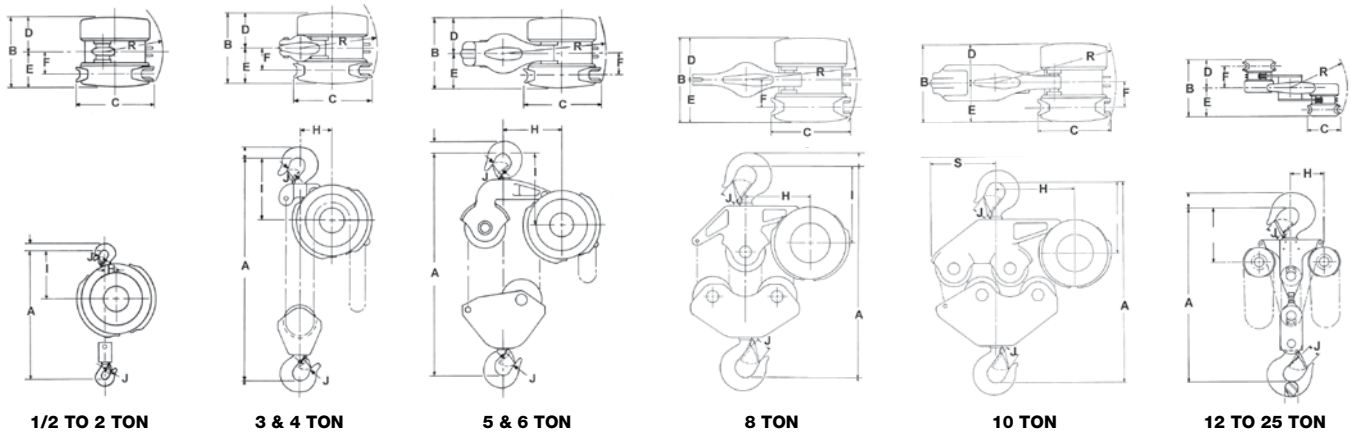

DIMENSIONS

Capacity (tons)	Dimensions (In.)										
	A	B	C	D	E	F	H	I	J	R	S
REGULAR UNITS											
1/2	12-1/8	8-1/2	8-3/4	4-1/4	4-1/4	3	1-3/8	6-7/16	1	7	—
1	12-1/8	8-1/2	8-3/4	4-1/4	4-1/4	3	1-3/8	6-7/16	1	7	—
1-1/2	15-7/8	10	11-1/2	5	5	3-1/4	1-3/4	7-5/8	1-1/8	8-1/2	—
2	15-7/8	10	11-1/2	5	5	3-1/4	1-3/4	7-5/8	1-1/8	8-1/2	—
3	23-1/2	10	11-1/2	5	5	3-1/4	4-7/8	9-1/8	1-11/32	11-1/2	—
4	24-1/2	10	11-1/2	5	5	3-1/4	4-7/8	9-5/8	1-11/16	11-1/2	—
5	25-1/2	10	11-1/2	5	5	3-1/4	6-3/8	10-1/2	1-11/16	13-1/2	—
6	25-1/2	10	11-1/2	5	5	3-1/4	6-3/8	10-1/2	1-11/16	13-1/2	—
8	26-3/4	10	11-1/2	5	5	3-1/4	8-1/2	11	2-1/16	14	—
10	30-3/4	10	11-1/2	5	5	3-1/4	10-1/4	10-5/8	2-1/4	17	9-1/4
12	49-5/8	14-5/8	11-1/2	7-5/16	7-5/16	5-9/16	11-1/8	13-9/16	3	18-1/2	—
16	53-1/2	16-3/8	11-1/2	8-3/16	8-3/16	6-7/16	11-1/8	15-1/8	3-5/8	18-3/4	—
20	56-3/8	18-1/4	11-1/2	9-1/8	9-1/8	7-3/8	11-1/8	15-1/8	3-5/8	19-3/16	—
25	56-3/8	20-1/8	11-1/2	10-1/16	10-1/16	8-5/16	11-1/8	15-1/8	3-5/8	19-11/16	—
SPARK-RESISTANT UNITS											
1/2	13	8-1/2	8-3/4	4-1/4	4-1/4	3	1-3/8	6-7/8	1	7	—
1	13	8-1/2	8-3/4	4-1/4	4-1/4	3	1-3/8	6-7/8	1	7	—
1-1/2	16-7/8	10	11-1/2	5	5	3-1/4	1-3/4	8-1/8	1-13/16	8-1/2	—
2	16-7/8	10	11-1/2	5	5	3-1/4	1-3/4	8-1/8	1-13/16	8-1/2	—
3	23-1/8	10	11-1/2	5	5	3-1/4	4-7/8	9-1/8	1-11/16	11-1/2	—
4	26-1/4	10	11-1/2	5	5	3-1/4	4-7/8	9-13/16	2-7/32	11-1/2	—
5	26-1/4	10	11-1/2	5	5	3-1/4	6-3/8	10-11/16	2-7/32	13-1/2	—
6	28-1/4	10	11-1/2	5	5	3-1/4	6-3/8	11-11/16	2-1/4	13-1/2	—
8	31-13/26	10	11-1/2	5	5	3-1/4	8-1/2	13-7/32	3-1/32	14	—
10	34-1/4	10	11-1/2	5	5	3-1/4	10-1/4	14-1/8	3-1/32	17	9-1/4
12	52-5/8	14-5/8	11-1/2	7-5/16	7-5/16	5-9/16	11-1/8	15-1/16	3-1/4	18-1/2	—
16	59	16-3/8	11-1/2	8-3/16	8-3/16	6-7/16	11-1/8	17-7/8	3-3/8	18-3/4	—
20	62-1/2	18-1/4	11-1/2	9-1/8	9-1/8	7-3/8	11-1/8	18-3/16	3-3/8	19-3/16	—
25	62-1/2	20-1/8	11-1/2	10-1/16	10-1/16	8-5/16	11-1/8	18-3/16	3-3/8	19-11/16	—

ZEPHYR**CLEVIS-CONNECTED
HOISTS & TROLLEYS****CAPACITIES**

1/2 to 10 Tons

LIFT

8 Feet Standard

TROLLEY TYPES

Plain or Geared

OPTIONSSpark & Corrosion Resistance
Clean Room



Clevis-connected hoists and trolleys are ideal for applications where headroom limitations prohibit a standard trolley suspension or when you want to prevent casual removal of a hoist from the trolley. Design also retains rock-and-swivel flexibility of standard trolley suspension.

Any Zephyr hoist may be converted to clevis connected by removing the suspension hook, replacing with it with a clevis. These clevis-connected hoists may then be paired with a Chester Model PT trolley of the same capacity. See pages 26 through 29 for more information.

KEY FEATURES

CHESTER ZEPHYR CLEVIS-CONNECTED HOISTS & TROLLEYS CONTAIN ALL OF THE SAME KEY FEATURES AS THE HOOK-SUSPENDED MODELS.

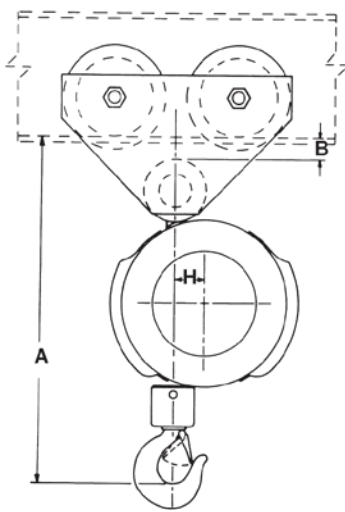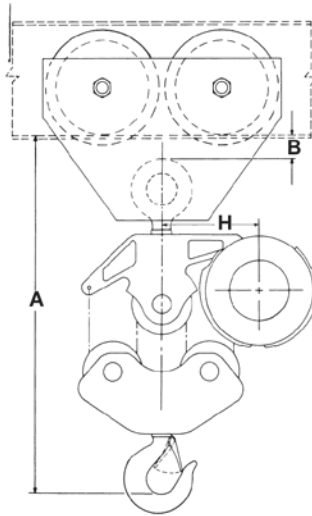

**1/2 TO 2 TON****3 TO 10 TON****SPECIFICATIONS & DIMENSIONS**

Capacity (tons)	Catalog Number	Standard Lift (ft.)	Minimum Headroom with Trolley (in.)	Adjustable For Standard I-Beam Size	Chain Pull to Lift Full Load One Foot (lbs.)	Chain Overhauled to Lift Load One Foot (ft.)	Net Weight with Trolley (lbs.)		Dimensions (in.)		
							Plain	Geared	A	B	C
REGULAR UNITS											
1/2	135 - 1/2	8	13-7/16	4 to 12	31	33	80	—	13-5/8	3/4	1-3/8
1	135 - 1	8	14-3/16	5 to 12	62	33	96	162	14-3/8	1-3/8	1-3/8
1-1/2	135 - 1-1/2	8	18-1/16	6 to 18	57	58	167	196	18-5/16	1-7/16	1-3/4
2	135 - 2	8	18-1/16	6 to 18	76	58	167	196	18-5/16	1-7/16	1-3/4
3	135 - 3	8	26	8 to 18	60	116	284	328	26-1/4	1-1/2	4-7/8
4	135 - 4	8	26-7/8	8 to 24	79	116	323	384	27-1/8	1-3/8	4-7/8
5	135 - 5	8	28-5/16	10 to 24	65	174	480	555	28-5/8	1-7/8	6-3/8
6	135 - 6	8	28-5/16	10 to 24	78	174	480	605	28-5/8	1-7/8	6-3/8
8	135 - 8	8	30-1/8	10 to 24	81	232	560	646	30-7/16	1-15/16	8-1/2
10	135 - 10	8	34	10 to 24	84	290	785	860	34-13/16	2-9/32	10-1/4
SPARK-RESISTANT UNITS											
1/2	13-7/8	8	13-7/8	4 to 12	31	33	80	—	13-5/8	3/4	1-3/8
1	14-5/8	8	14-5/8	5 to 12	62	33	96	162	14-3/8	1-3/8	1-3/8
1-1/2	18-9/16	8	18-9/16	6 to 18	57	58	167	196	18-5/16	1-7/16	1-3/4
2	18-9/16	8	18-9/16	6 to 18	76	58	167	196	18-5/16	1-7/16	1-3/4
3	—	8	—	8 to 18	60	116	284	328	26-1/4	1-1/2	4-7/8
4	27-3/4	8	27-3/4	8 to 24	79	116	323	384	27-1/8	1-3/8	4-7/8
5	28-11/16	8	28-11/16	10 to 24	65	174	480	555	28-5/8	1-7/8	6-3/8
6	29-11/16	8	29-11/16	10 to 24	78	174	480	605	28-5/8	1-7/8	6-3/8
8	32-21/32	8	32-21/32	10 to 24	81	232	560	646	30-7/16	1-15/16	8-1/2
10	35-3/4	8	35-3/4	10 to 24	84	290	785	860	34-13/16	2-9/32	10-1/4

ZEPHYR ARMY-TYPE TROLLEY HOISTS

CAPACITIES

1/2 to 10 Tons

LIFT

8 Feet Standard

TROLLEY TYPES

Plain or Geared

OPTIONS

Spark and Corrosion Resistance

Clean Room

1/2 to 2 TON CAPACITY Zephyr army-type trolley hoists are uniquely and smartly designed for a variety of applications. They are relied on for their light weight and ability to traverse minimum radius curves freely, since the trolley units are built to swivel.

Construction is ingeniously simple. A standard Zephyr spur-gear hoist is suspended on a special load bar carried at each end by a lifetime-lubricated, precision-ball-bearing-equipped, two-wheel trolley. Trolley units are adjustable to beam size and interchangeable – plain trolley may be replaced with geared unit at any time, if required. Wheels have convex-machined treads that will maintain roundness through long-term use.

3 to 10 TON CAPACITY units are compact combinations of larger-capacity Zephyr spur geared hoists with integrated four-wheel trolleys, featuring sealed and tapered roller bearings. The result is a unit with minimal dimensions that retains full operating advantages of larger-scale units. The army-type construction not only provides protection for the heavy-gauge, rolled-steel side plates, but also allows for adjustability to beam sizes and adaptability to tight minimum radius track curves. All trolley wheels are easily adjustable for bearing wear.

FEATURES & BENEFITS

CHESTER ZEPHYR ARMY-TYPE TROLLEY HOISTS CONTAIN ALL OF THE SAME KEY FEATURES AS THE HOOK-SUSPENDED MODELS.

See page 4.

OPTIONAL FEATURES

TRACK CLAMPS

LOAD LIMITERS

TROLLEY BUMPERS AND DROP STOPS

CHAIN CONTAINERS



◀ **1/2 TO 2 TON
MODELS**


**3 TO 10 TON >
MODELS**

**3 TO 10 TON >
SPARK-RESISTANT
MODELS**

SPARK-RESISTANT OPTIONS

SOLID BRONZE BOTTOM HOOK,
BOTTOM BLOCK, BRAKE RATCHET
AND TROLLEY WHEELS

STAINLESS STEEL LOAD CHAIN

ALUMINUM OR STAINLESS STEEL
HAND CHAIN

CORROSION-RESISTANT OPTIONS

SPECIAL CORROSION-RESISTANT FINISHES

Created specifically for operation in salt-laden
or other corrosive environments.

CLEAN ROOM OPTIONS

STAINLESS STEEL COMPONENTS

GREASE-TIGHT ENCLOSURE WITH
FOOD-GRADE LUBRICANT

FOOD-GRADE EPOXY FINISH

SPECIFICATIONS

Capacity (tons)	Catalog Number		Standard Lift (ft.)	Minimum Headroom (in.)	Radius Curve (in.) *	For Standard I-Beam Size **	Beam width	Weight (lbs.)			
	Plain	Geared						Net		Gross	
								Plain	Geared	Plain	Geared
1/2	1311 - 1/2	1312 - 1/2	8	10-3/4	21	S4 - S10X25.4#	2.796" - 4.661"	94	139	115	160
1	1311 - 1	1312 - 1	8	10-7/8	21	S5 - S10X25.4#	3.004" - 4.661"	109	145	130	164
1-1/2	1311 - 1-1/2	1312 - 1-1/2	8	13-1/2	30	S6 - S15X42.9#	3.332" - 5.501"	169	194	208	240
2	1311 - 2	1312 - 2	8	13-1/2	30	S6 - S15X42.9#	3.332" - 5.501"	169	194	208	240
3	1311 - 3	1312 - 3	8	19-5/8	36	S8 - S18X54.7 #	4.001" - 6.001"	220	260	246	300
4	1311 - 4	1312 - 4	8	20-1/8	36	S8 - S18X54.7 #	4.001" - 6.001"	274	295	300	340
5	1311 - 5	1312 - 5	8	23-1/2	48	S10 - S20X66#	4.661" - 6.255"	375	400	405	445
6	1311 - 6	1312 - 6	8	23-1/2	48	S10 - S20X66#	4.661" - 6.255"	375	400	405	445
8	1311 - 8	1312 - 8	8	24-5/8	84	S10 - S24X121#	4.661" - 8.005"	523	563	558	605
10	1311 - 10	1312 - 10	8	25	90	S12 - S24X121#	5" - 8.005"	673	703	725	773


Zephyr Army Type Hoists are available for wide flange sections, monorail runways, or I-beams outside the normal adjustment range. Consult factory for details.

* Radius must be specified on each order. Wheels may require modification for some curves.


** Beams listed are for proper wheel clearance only. The customer must verify his selected beam is adequate for his application.

ZEPHYR

ARMY-TYPE TROLLEY HOISTS

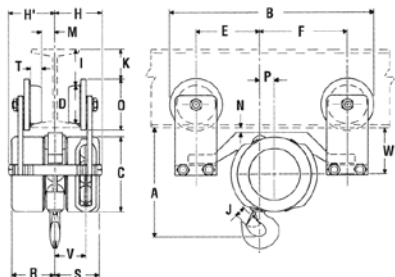

**1/2 TO 2 TON
PLAIN**








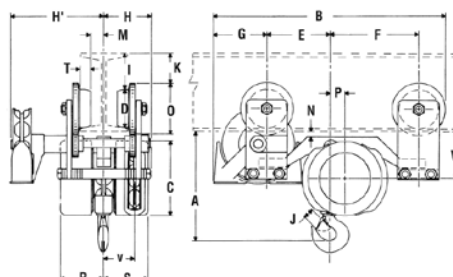


**1 TO 2 TON
GEARED**

DIMENSIONS

Capacity (tons)	Dimensions (In.)																				
	A	B	C	D	E	F	H	H'	I	J	K	L	M	N	O	P	R	S	T	V	W
PLAIN TROLLEY HOIST																					
1/2	10-7/8	18-3/8	7-1/4	2-7/8	6-1/8	8-5/8	4-1/4	—	13/16	1	7/16	—	1/2	5/8	3-5/8	1-3/8	4-1/4	4-1/4	7/8	3	4-9/16
1	10-7/8	19-3/4	7-1/4	3-3/4	6-1/8	8-5/8	4-5/8	—	15/16	1	5/16	—	1/2	5/8	5	1-3/8	4-1/4	4-1/4	1-1/16	3	4-9/16
1-1/2	13-1/2	24-1/2	9-3/4	4-1/2	7-1/2	11	5	—	1	1-1/8	5/16	—	11/16	7/16	6	1-3/4	5	5	1-7/64	3-1/4	5-7/16
2	13-1/2	24-1/2	9-3/4	4-1/2	7-1/2	11	5	—	1	1-1/8	5/16	—	11/16	7/16	6	1-3/4	5	5	1-7/64	3-1/4	5-7/16
PLAIN TROLLEY HOIST, SPARK-RESISTANT																					
1/2	11-1/8	18-3/8	7-1/4	2-7/8	6-1/8	8-5/8	4-1/4	—	13/16	1	7/16	—	1/2	5/8	3-5/8	1-3/8	4-1/4	4-1/4	7/8	3	4-9/16
1	11-1/8	19-3/4	7-1/4	3-3/4	6-1/8	8-5/8	4-5/8	—	15/16	1	5/16	—	1/2	5/8	5	1-3/8	4-1/4	4-1/4	1-1/16	3	4-9/16
1-1/2	14-1/2	24-1/2	9-3/4	4-1/2	7-1/2	11	5	—	1	1-13/32	5/16	—	11/16	7/16	6	1-3/4	5	5	1-7/64	3-1/4	5-7/16
2	14-1/2	24-1/2	9-3/4	4-1/2	7-1/2	11	5	—	1	1-13/32	5/16	—	11/16	7/16	6	1-3/4	5	5	1-7/64	3-1/4	5-7/16

Capacity (tons)	Dimensions (In.)																				
	A	B	C	D	E	F	G	H	H'	I	J	K	M	N	O	P	R	S	T	V	W
GEARED TROLLEY HOIST																					
1	10-7/8	22-1/2	7-1/4	3-3/4	6-1/8	8-5/8	5-1/4	4-13/16	8-5/8	15/16	1	5/16	1/2	5/8	5	1-3/8	4-1/4	4-1/4	1-1/16	3	4-9/16
1-1/2	13-1/2	27-1/4	9-3/4	4-1/2	7-1/2	11	5-3/4	4-9/16	8-7/8	1	1-1/8	5/16	11/16	7/16	6	1-3/4	5	5	1-7/64	3-1/4	5-7/16
2	13-1/2	27-1/4	9-3/4	4-1/2	7-1/2	11	5-3/4	4-9/16	8-7/8	1	1-1/8	5/16	11/16	7/16	6	1-3/4	5	5	1-7/64	3-1/4	5-7/16
GEARED TROLLEY HOIST, SPARK-RESISTANT																					
1	11-1/8	22-1/2	7-1/4	3-3/4	6-1/8	8-5/8	5-1/4	4-13/16	8-5/8	15/16	1	5/16	1/2	5/8	5	1-3/8	4-1/4	4-1/4	1-1/16	3	4-9/16
1-1/2	14-1/2	27-1/4	9-3/4	4-1/2	7-1/2	11	5-3/4	4-9/16	8-7/8	1	1	5/16	11/16	7/16	6	1-3/4	5	5	1-7/64	3-1/4	5-7/16
2	14-1/2	27-1/4	9-3/4	4-1/2	7-1/2	11	5-3/4	4-9/16	8-7/8	1	1-13/32	5/16	11/16	7/16	6	1-3/4	5	5	1-7/64	3-1/4	5-7/16

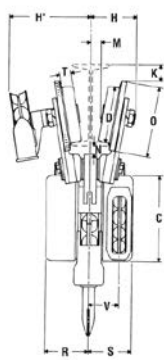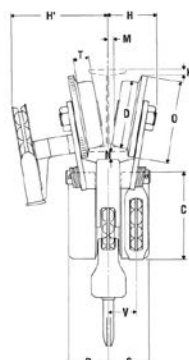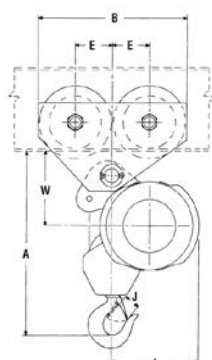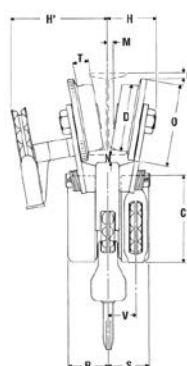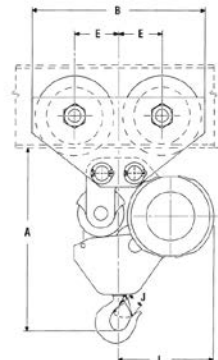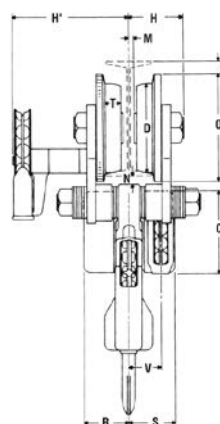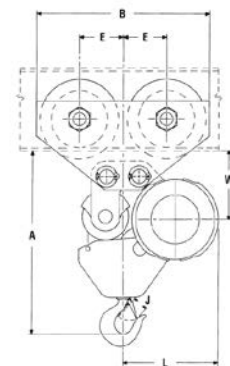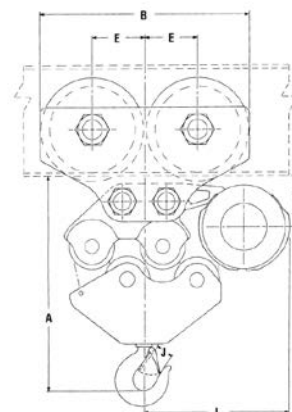
3 & 4 TON
PLAIN & GEARED

5 & 6 TON
PLAIN & GEARED

8 TON
PLAIN & GEARED

10 TON
PLAIN & GEARED


DIMENSIONS

Capacity (tons)	Dimensions (In.)																				
	A	B	C	D	E	F	H	H'	I	J	K	L	M	N	O	P	R	S	T	V	W
PLAIN & GEARED TROLLEY HOIST																					
3	19-5/8	16-3/4	9-3/4	6-3/8	4-1/4	—	5-1/8	11	—	1-11/32	5/8	11	3/4	1-1/8	8	—	5	5	1-5/16	3-1/4	8-1/4
4	20-1/8	16-3/4	9-3/4	6-3/8	4-1/4	—	5-1/8	11	—	1-11/16	5/8	11	3/4	1-1/8	8	—	5	5	1-5/16	3-1/4	8-1/4
5	23-1/2	19-1/2	9-3/4	7-3/16	5	—	5-3/4	13-1/16	—	1-11/16	1-5/8	11-7/8	1-1/8	1	9	—	5	5	1-7/16	3-1/4	8-5/8
6	23-1/2	19-1/2	9-3/4	7-3/16	5	—	5-3/4	13-1/16	—	1-11/16	1-5/8	11-7/8	1-1/8	1	9	—	5	5	1-7/16	3-1/4	8-5/8
8	24-5/8	21	9-3/4	8-1/4	5-1/4	—	6-1/4	13-1/2	—	2-1/16	3/8	14	1/2	1-3/4	10	—	5	5	1-11/16	3-1/4	8-5/8
10	25	23-3/4	9-3/4	9-3/4	6	—	6-1/4	12-3/4	—	2-1/4	7/8	16-1/2	1/2	3/4	11-11/16	—	5	5	1-3/4	3-1/4	6-1/2
PLAIN & GEARED TROLLEY HOIST , SPARK-RESISTANT																					
3	22-1/4	16-3/4	9-3/4	6-3/8	4-1/4	—	5-1/8	11	—	1-11/32	5/8	11	3/4	1-1/8	8	—	5	5	1-5/16	3-1/4	8-1/4
4	23-3/8	16-3/4	9-3/4	6-3/8	4-1/4	—	5-1/8	11	—	1-11/16	5/8	11	3/4	1-1/8	8	—	5	5	1-5/16	3-1/4	8-1/4
5	24-3/4	19-1/2	9-3/4	7-3/16	5	—	5-3/4	13-1/16	—	1-11/16	1-5/8	11-7/8	1-1/8	1	9	—	5	5	1-7/16	3-1/4	8-5/8
6	25-1/4	19-1/2	9-3/4	7-3/16	5	—	5-3/4	13-1/16	—	1-11/16	1-5/8	11-7/8	1-1/8	1	9	—	5	5	1-7/16	3-1/4	8-5/8
8	29-9/16	21	9-3/4	8-1/4	5-1/4	—	6-1/4	13-1/2	—	2-1/16	3/8	14	1/2	1-3/4	10	—	5	5	1-11/16	3-1/4	8-5/8
10	30-3/8	23-3/4	9-3/4	9-3/4	6	—	6-1/4	12-3/4	—	2-1/4	7/8	16-1/2	1/2	3/4	11-11/16	—	5	5	1-3/4	3-1/4	6-1/2

For 3 through 10 Ton, dimensions H, H' and K vary directly as the beam varies.

ZEPHYR LOW-HEADROOM TROLLEY HOISTS

CAPACITIES

1-1/2 to 24 Tons

LIFT

8 Feet Standard

OPTIONS

Spark & Corrosion Resistance
Clean Room

Chester Zephyr low-headroom trolley hoists, as the name implies, are designed for applications where head room is very limited, preventing the use of standard hoists. They are ideal for existing structures with low ceilings as well as new construction where low ceilings are required. These low-headroom hoists are equipped with concentrically machined, cast iron, precision bearing trolley wheels.


Each Zephyr low-headroom hoist is custom built to fit the beam size, flange width and curve radius for the specific application.

KEY FEATURES

CHESTER ZEPHYR LOW-HEADROOM TROLLEY HOISTS CONTAIN ALL OF THE SAME KEY FEATURES AS THE HOOK-SUSPENDED MODELS.

POSITIVE ENGAGEMENT RACK & PINION OR SPROCKET & ROLLER CHAIN TROLLEY DRIVES

Available for use on inclined monorails or for shipboard use to provide increased control over the trolley to prevent unintended movement.

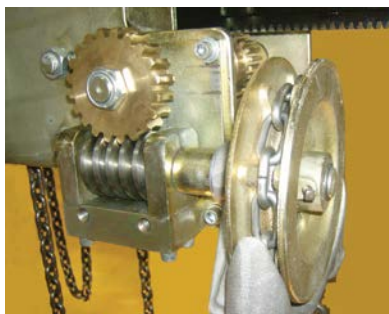

▲ RACK & PINION TROLLEY DRIVE

SPECIFICATIONS

Capacity (short tons)	Catalog Number		Standard Lift (ft.)	Load Chain Length (2 Chains per Hoist)	Minimum Radius Curve ††	Minimum Distance from Bottom of I-Beam to Hook (in.)	Chain Pull to Lift Full Load (lbs.)	Chain Overhauled to Lift Load One Foot (ft.)	Weight (lbs.)	
	Plain Trolley	Geared Trolley							Net	Gross
1-1/2	1421 - 1-1/2	1422 - 1-1/2	8	9'-6"	6'-6"	6-1/4	41	87	207	230
2	1421 - 2	1422 - 2	8	9'-6"	6'-6"	6-1/4	54	87	210	233
3	1421 - 3	1422 - 3	8	18'-3"	6'-6"	7-3/8	42	176	305	335
4	1421 - 4	1422 - 4	8	18'-3"	7'-6"	8	56	176	308	340
5	1421 - 5	1422 - 5	8	10'	8'-6"	8-3/4	79	165	574	633
6	1421 - 6	1422 - 6	8	10'	8'-6"	8-3/4	94	165	574	633
8	1421 - 8	1422 - 8	8	19'	9'-6"	11	64	355	650	773
10	1421 - 10	1422 - 10	8	19'-6"	10'	11-1/2	87	330	1022	1105
12	1421 - 12	1422 - 12	8	19'-6"	†	11-1/2	104	330	1022	1105
16	1421 - 16	1422 - 16	8	38'-6"	†	13-5/8	68	710	1600	1681
20	1421 - 20	1422 - 20	8	39'	†	17-1/4	87	731-1/2	1950	2110
24	1421 - 24	1422 - 24	8	39'	†	17-1/4	104	731-1/2	1950	2110

ALL HEADROOM DIMENSIONS DETERMINED WHILE HOIST UNDER LOAD.

† Straight track operation only recommended for these units.

†† Curves less than minimum may be fitted by special construction. Consult factory.

Curve radius must be specified on order since wheels are modified to negotiate curves.



◀ STANDARD MODEL

SPARK-RESISTANT OPTIONS

SOLID BRONZE HOOK, BOTTOM BLOCK,
BRAKE RATCHET AND TROLLEY WHEELS

STAINLESS STEEL LOAD CHAIN

ALUMINUM OR STAINLESS STEEL
HAND CHAIN

CORROSION-RESISTANT OPTIONS

SPECIAL CORROSION-RESISTANT FINISHES

Created specifically for operation in salt-laden
or other corrosive environments.

CLEAN ROOM OPTIONS

STAINLESS STEEL COMPONENTS

GREASE-TIGHT ENCLOSURE WITH
FOOD-GRADE LUBRICANT

FOOD-GRADE EPOXY FINISH

OPTIONAL FEATURES

TRACK CLAMPS

LOAD LIMITERS

CHAIN CONTAINERS


SPARK AND CORROSION RESISTANCE

POSITIVE ENGAGEMENT RACK & PINION OR
SPROCKET & ROLLER CHAIN TROLLEY DRIVES

Available for use on inclined monorails or for shipboard
use to provide increased control over the trolley to
prevent unintended movement.

◀ SPARK-RESISTANT
MODEL

ZEPHYR LOW-HEADROOM TROLLEY HOISTS

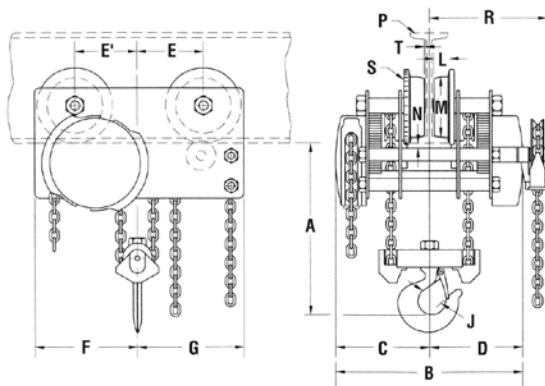
PLAIN & GEARED

**SPARK RESISTANT/EXPLOSION PROOF,
5-TON CHESTER ZEPHYR LOW-HEADROOM
TROLLEY HOIST IN USE ON AN OFFSHORE
OIL PLATFORM.**

DIMENSIONS

Capacity (tons)	Dimensions (In.)																	
	A	B	C	D	E	E'	F	G	H	J	L	M	N**	P*	Min Beam	Beam width	R	S
PLAIN & GEARED TROLLEY HOIST																		
1-1/2	6-1/4	20-3/8	10-3/16	10-3/16	5-1/8	5-1/8	8-3/4	8-1/4	5/8	1-1/8	1-1/8	4-1/2	1/2	6" I @ 12.5#	S6x12.5#	3.332"	13-1/16	6
2	6-1/4	20-3/8	10-3/16	10-3/16	5-1/8	5-1/8	8-3/4	8-1/4	5/8	1-1/8	1-1/8	4-1/2	1/2	6" I @ 12.5#	S6x12.5#	3.332"	13-1/16	6
3	7-3/8	20-3/8	10-3/16	10-3/16	6-1/2	6-5/8	10-5/8	10-5/8	9/16	1-11/32	1-11/32	6-3/8	1/2	8" I @ 18.4#	S8x18.4#	4.001"	13-1/16	8
4	8	20-3/8	10-3/16	10-3/16	6-1/2	6-5/8	10-5/8	10-5/8	9/16	1-11/16	1-11/32	6-3/8	1/2	8" I @ 18.4#	S8x18.4#	4.001"	13-1/16	8
5	8-3/4	26-1/4	13-1/8	13-1/8	7-3/8	7-3/8	12	12	29/32	1-11/16	1-13/32	7-3/16	9/16	10" I @ 25.4#	S10x25.4#	4.661"	16-1/2	9
6	8-3/4	26-1/4	13-1/8	13-1/8	7-3/8	7-3/8	12	12	29/32	1-11/16	1-13/32	7-3/16	9/16	10" I @ 25.4#	S10x25.4#	4.661"	16-1/2	9
8	11	26-1/4	13-1/8	13-1/8	8-3/8	8-7/8	14	13-1/2	9/16	2-1/16	1-11/16	8-1/4	9/16	10" I @ 25.4#	S10x25.4#	4.661"	16-1/2	10
10	11-1/2	26-1/4	13-1/8	13-1/8	8-1/2	9-3/4	15-5/8	14-3/8	9/16	2-1/4	1-3/4	9-3/4	5/8	12" I @ 31.8#	S12x31.8#	5"	16-1/2	11-11/16
12	11-1/2	26-1/4	13-1/8	13-1/8	8-1/2	9-3/4	15-5/8	14-3/8	9/16	2-1/4	1-3/4	9-3/4	5/8	12" I @ 31.8#	S12x31.8#	5"	16-1/2	11-11/16
16	13-5/8	30-3/8	15-3/16	15-3/16	11-7/8	11-7/8	18-5/8	18-5/8	9/16	3	2	11-3/4	3/4	15" I @ 42.9#	S15x42.9#	5.501"	18-7/8	13-1/2
20	17-1/4	30-3/8	15-3/16	15-3/16	12-1/8	12-3/8	19-1/4	19	3/4	3-5/8	2	11-3/4	5/8	18" I @ 54.7#	S18x54.7#	6.001"	18-7/16	13-1/2
24	17-1/4	30-3/8	15-3/16	15-3/16	12-1/8	12-3/8	19-1/4	19	3/4	3-5/8	2	11-3/4	5/8	18" I @ 54.7#	S18x54.7#	6.001"	18-7/16	13-1/2
PLAIN & GEARED TROLLEY HOIST, SPARK-RESISTANT																		
1-1/2	7-3/8	20-3/8	10-3/16	10-3/16	5-1/8	5-1/8	8-3/4	8-1/4	5/8	1-11/32	1-1/8	4-1/2	1/2	6" I @ 12.5#	S6x12.5#	3.332"	13-1/16	6
2	7-3/8	20-3/8	10-3/16	10-3/16	5-1/8	5-1/8	8-3/4	8-1/4	5/8	1-11/32	1-1/8	4-1/2	1/2	6" I @ 12.5#	S6x12.5#	3.332"	13-1/16	6
3	8-7/16	20-3/8	10-3/16	10-3/16	6-1/2	6-5/8	10-5/8	10-5/8	9/16	1-11/16	1-11/32	6-3/8	1/2	8" I @ 18.4#	S8x18.4#	4.001"	13-1/16	8
4	9-15/16	20-3/8	10-3/16	10-3/16	6-1/2	6-5/8	10-5/8	10-5/8	9/16	2-7/32	1-11/32	6-3/8	1/2	8" I @ 18.4#	S8x18.4#	4.001"	13-1/16	8
5	10-5/16	26-1/4	13-1/8	13-1/8	7-3/8	7-3/8	12	12	29/32	2-7/32	1-13/32	7-3/16	9/16	10" I @ 25.4#	S10x25.4#	4.661"	16-1/2	9
6	11-3/8	26-1/4	13-1/8	13-1/8	7-3/8	7-3/8	12	12	29/32	2-1/4	1-13/32	7-3/16	9/16	10" I @ 25.4#	S10x25.4#	4.661"	16-1/2	9
8	14-1/16	26-1/4	13-1/8	13-1/8	8-3/8	8-7/8	14	13-1/2	9/16	3-1/32	1-11/16	8-1/4	9/16	10" I @ 25.4#	S10x25.4#	4.661"	16-1/2	10
10	14-7/16	26-1/4	13-1/8	13-1/8	8-1/2	9-3/4	15-5/8	14-3/8	9/16	3-1/32	1-3/4	9-3/4	5/8	12" I @ 31.8#	S12x31.8#	5"	16-1/2	11-11/16
12	16-1/8	26-1/4	13-1/8	13-1/8	8-1/2	9-3/4	15-5/8	14-3/8	9/16	3-1/4	1-3/4	9-3/4	5/8	12" I @ 31.8#	S12x31.8#	5"	16-1/2	11-11/16
16	19-5/16	30-3/8	15-3/16	15-3/16	11-7/8	11-7/8	18-5/8	18-5/8	9/16	3-3/8	2	11-3/4	3/4	15" I @ 42.9#	S15x42.9#	5.501"	18-7/8	13-1/2
20	20-1/4	30-3/8	15-3/16	15-3/16	12-1/8	12-3/8	19-1/4	19	3/4	3-3/8	2	11-3/4	5/8	18" I @ 54.7#	S18x54.7#	6.001"	18-7/16	13-1/2
24	20-1/4	30-3/8	15-3/16	15-3/16	12-1/8	12-3/8	19-1/4	19	3/4	3-3/8	2	11-3/4	5/8	18" I @ 54.7#	S18x54.7#	6.001"	18-7/16	13-1/2

For over 10 Ton, straight track operation is recommended.

Curve radius must be specified on orders.

Curves less than minimum radius may be fitted upon application.

* Minimum Standard I-Beam for Proper Wheel Running Clearance Only.

** At Under Beam Roller

Customer must verify their beam is adequate for the applied loads.



CHESTER

CHESTER HOIST, LISBON, OHIO

ZEPHYR

ALL

STEEL

2 TON

ZEPHYR SWIVEL-TRUCK LOW-HEADROOM TROLLEY HOISTS

CAPACITIES
1/4 to 6 Tons

LIFT
8 Feet Standard

**MINIMUM
RADIUS CURVE**
21 to 48 in.

OPTIONS
Spark & Corrosion Resistance
Clean Room

Chester Zephyr swivel-truck, low-headroom trolley hoists maintain the absolute minimum distance between the bottom of the runway beam and the hook saddle in the uppermost position, making them well suited for use in tight spaces. Hoists are available in capacities ranging from 1/4 to 6 tons with either plain or hand-gearred trolleys.

These Zephyr hoists combine the benefits of the Chester swivel truck trolley design with a compact construction. The units also incorporate the same heavy-duty steel components common to our Zephyr product line to provide the ruggedness and durability required for your application.

Zephyr swivel-truck, low-headroom trolley hoists are designed to traverse tight curves without binding or scraping and, due to their compact design, runways can be built closer to walls or projections. With extremely low headroom, these hoists are ideal for existing structures with low ceilings and as well as new construction where low ceilings are required. They are also ideal for patented monorail applications where minimum headroom is required with interlocks, turntables or switches.

Swivel-truck, low-headroom Zephyr hoists are adaptable to most monorail systems as well as other types of rails. Units are available with track clamps, load limiters, chain containers and an assortment of other options including spark and corrosion resistance, as required.

SWIVEL-TRUCK LOW-HEADROOM TROLLEY HOISTS ◀

**CHESTER
HOIST**

◀ STANDARD MODEL

SPARK-RESISTANT OPTIONS

SOLID BRONZE HOOK, BOTTOM BLOCK,
BRAKE RATCHET AND TROLLEY WHEELS

STAINLESS STEEL LOAD CHAIN

ALUMINUM OR STAINLESS STEEL
HAND CHAIN

CORROSION-RESISTANT OPTIONS

SPECIAL CORROSION-RESISTANT FINISHES

Created specifically for operation in salt-laden
or other corrosive environments.

CLEAN ROOM OPTIONS

STAINLESS STEEL COMPONENTS

GREASE-TIGHT ENCLOSURE WITH
FOOD-GRADE LUBRICANT

FOOD-GRADE EPOXY FINISH

SPECIFICATIONS


Capacity (short tons)	Catalog Number		Standard Lift (ft.)	Minimum Radius Curve (in.)	Minimum Beam Size *	Beam Width	Distance from Beam to Hook Saddle (in.)	Chain Pull to Lift Full Load (lbs.)	Chain Overhauled to Lift Load One Foot (ft.)	Weight (lbs.)	
	Plain Trolley	Geared Trolley								Net	Gross
1/4	1321 - 1/4	1322 - 1/4	8	21	S5" x 10.0#	3.004"	6-3/16	17	33	127	144
1/2	1321 - 1/2	1322 - 1/2	8	21	S5" x 10.0#	3.004"	6-3/16	35	33	127	144
1	1321 - 1	1322 - 1	8	21	S5" x 10.0#	3.004"	6-3/16	70	33	127	144
1-1/2	1321 - 1-1/2	1322 - 1-1/2	8	30	S6" x 12.5#	3.332"	6-3/4	57	66	245	267
2	1321 - 2	1322 - 2	8	30	S6" x 12.5#	3.332"	6-3/4	76	66	251	270
3	1321 - 3	1322 - 3	8	42	S8" x 18.4#	4.001"	8-1/4	42	170	345	375
4	1321 - 4	1322 - 4	8	42	S8" x 18.4#	4.001"	9-1/4	58	170	350	380
5	1321 - 5	1322 - 5	8	48	S10" x 25.4#	4.661"	9-15/16	73	170	466	496
6	1321 - 6	1322 - 6	8	48	S10" x 25.4#	4.661"	9-15/16	90	170	466	496

Beam size and curve radius must always be specified when ordering.

* Minimum beam for wheel clearance only.

Customer must verify their beam is adequate for the applied loading.

ZEPHYR SWIVEL-TRUCK LOW-HEADROOM TROLLEY HOISTS

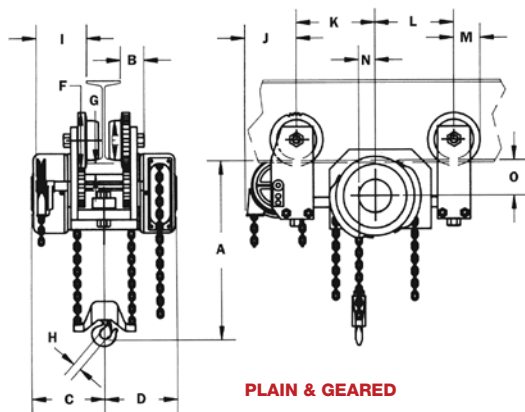
PLAIN & GEARED

MAXIMUM FLANGE WIDTHS

Capacity (tons)	Maximum Flange Width And Thickness FOR STRAIGHT TRACK	Maximum Flange Width And Thickness FOR MINIMUM RADIUS TRACK
1/4	5-3/8" W. x 1/2" Thk.	3-3/8" W. x 1/2" Thk.
1/2	5-3/8" W. x 1/2" Thk.	3-3/8" W. x 1/2" Thk.
1	5-3/8" W. x 1/2" Thk.	3-3/8" W. x 1/2" Thk.
1-1/2	6" W. x 5/8" Thk.	4" W. x 1/2" Thk.
2	6" W. x 5/8" Thk.	4" W. x 1/2" Thk.
3	6" W. x 5/8" Thk.	5-7/8" W. x 5/8" Thk.
4	6" W. x 5/8" Thk.	5-7/8" W. x 5/8" Thk.
5	8" W. x 7/8" Thk.	7-7/8" W. x 7/8" Thk.
6	8" W. x 7/8" Thk.	7-7/8" W. x 7/8" Thk.

DIMENSIONS

Capacity (tons)	Dimensions (in.)															
	A	B	C	D	E	F	Plain G	Geared G	H	I*	J*	K	L	M	N	O
PLAIN & GEARED TROLLEY HOIST																
1/4	6-3/16	2	6-9/16	6-9/16	3-3/4	5	7/8	7/8	31/32	4-11/16	3-3/4	7-1/4	6-1/2	2-1/2	1-3/8	2-15/16
1/2	6-3/16	2	6-9/16	6-9/16	3-3/4	5	7/8	7/8	31/32	4-11/16	3-3/4	7-1/4	6-1/2	2-1/2	1-3/8	2-15/16
1	6-3/16	2	6-9/16	6-9/16	3-3/4	5	7/8	7/8	31/32	4-11/16	3-3/4	7-1/4	6-1/2	2-1/2	1-3/8	2-15/16
1-1/2	6-3/4	2-3/16	8-11/16	8-11/16	4-1/2	6	5/8	5/8	1-1/8	7-3/16	6-1/4	11-3/8	7-5/8	3	3	1-7/8
2	6-3/4	2-3/16	8-11/16	8-11/16	4-1/2	6	5/8	5/8	1-1/8	7-3/16	6-1/4	11-3/8	7-5/8	3	3	1-7/8
3	8-1/4	2-9/16	9-7/8	9-7/8	6-3/8	8	15/16	15/16	1-11/32	8-1/8	6-1/8	11-9/16	7-11/16	4	3	3-7/16
4	9-1/4	2-9/16	9-7/8	9-7/8	6-3/8	8	15/16	15/16	1-11/16	8-1/8	6-1/8	11-9/16	7-11/16	4	3	3-7/16
5	9-15/16	2-13/16	10-1/8	10-1/8	7-3/16	9	7/8	7/8	1-11/16	8-1/2	6-15/16	11-9/16	8-13/16	4-1/2	3	3-7/8
6	9-15/16	2-13/16	10-1/8	10-1/8	7-3/16	9	7/8	7/8	1-11/16	8-1/2	6-15/16	11-9/16	8-13/16	4-1/2	3	3-7/8
PLAIN & GEARED TROLLEY HOIST, SPARK-RESISTANT																
1/4	6-13/16	2	6-9/16	6-9/16	3-3/4	5	7/8	7/8	31/32	4-11/16	3-3/4	7-1/4	6-1/2	2-1/2	1-3/8	2-15/16
1/2	6-13/16	2	6-9/16	6-9/16	3-3/4	5	7/8	7/8	31/32	4-11/16	3-3/4	7-1/4	6-1/2	2-1/2	1-3/8	2-15/16
1	6-13/16	2	6-9/16	6-9/16	3-3/4	5	7/8	7/8	31/32	4-11/16	3-3/4	7-1/4	6-1/2	2-1/2	1-3/8	2-15/16
1-1/2	7-7/16	2-3/16	8-11/16	8-11/16	4-1/2	6	5/8	5/8	1-1/8	7-3/16	6-1/4	11-3/8	7-5/8	3	3	1-7/8
2	7-7/16	2-3/16	8-11/16	8-11/16	4-1/2	6	5/8	5/8	1-1/8	7-3/16	6-1/4	11-3/8	7-5/8	3	3	1-7/8
3	9-9/16	2-9/16	9-7/8	9-7/8	6-3/8	8	15/16	15/16	1-11/32	8-1/8	6-1/8	11-9/16	7-11/16	4	3	3-7/16
4	10-11/16	2-9/16	9-7/8	9-7/8	6-3/8	8	15/16	15/16	1-11/16	8-1/8	6-1/8	11-9/16	7-11/16	4	3	3-7/16

* Geared units only.

Customer must take into consideration flange width and thickness. Each unit is set for a specified flange width and is not adjustable.

Dimensions shown are accurate for any "S" or "WF" beam.

Flat tread wheels (not shown) supplied for "WF" applications.

Curve radius must always be specified when ordering.

Hoists for wider flange widths than illustrated above may be possible. Consult factory.




Tiger

Product Catalogue

Tiger hoisting, clamping, winching, and height safety ranges

V1.1 | 2021 | tigerlifting.com

Chain blocks and lever hoists overview

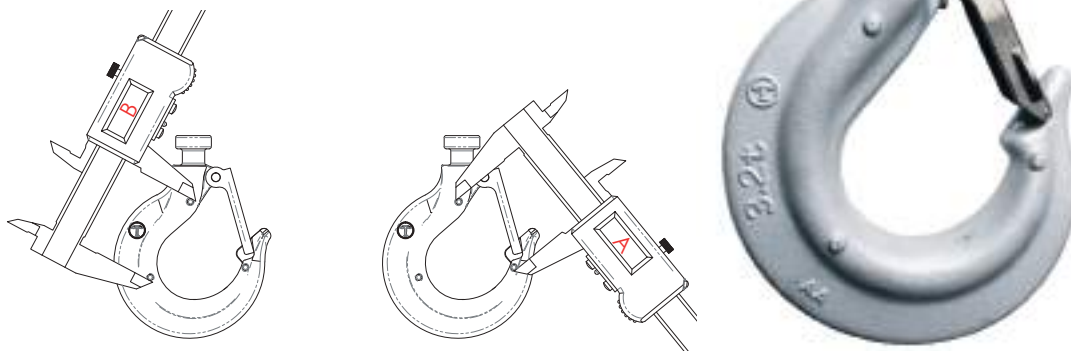

Hooks:

Our hooks incorporate our latest patented “EZ Check” feature which allows operators and inspection engineers to easily check to see if the hook has been previously overloaded or shock loaded by simply measuring between the triangle of pop marks. With this system a quick check that the A and B measurements are the same (as shown in the diagram above) will indicate if the hooks have stretched: If $A \leq B$ the hook is fine; If $A > B$ the hook needs to be replaced.

They are drop forged and heat treated alloy hooks with heavy duty spring latch kits that fully engage into the recessed nose of the hook safeguarding the load when side loading of the latch occurs and offering maximum load security. The swivel hooks are attached to the yoke using high grade nuts & bolts allowing for complete inspection during any statutory inspection or written scheme maintenance. The entire hook fitting has been protected using corrosion protected or stainless steel fixtures and fittings.

Certification:

Each unit comes fully certified with a test certificate or an EC Declaration of Conformity stating compliance with the essential health and safety requirements of the Machinery Directive 2006/42/EC. This document clearly states the proof test at 1.5 times the rated capacity and the light load test of 2 % of the rated capacity, which exceeds the requirements of the current applicable standard. Finish: Tiger hoists are finished in our high quality powder coat paint offering excellent corrosion protection.

Load chains:

Tiger only use the highest quality alloy, calibrated load chains in Grade T or VH conforming to EN818-7 and ISO 16872. Our hoists are also available with stainless steel load chain.

Finish:

Tiger hoists are finished in our high quality powder coat paint offering excellent corrosion protection

Phosphor bronze bearings:

The Tin content increases the corrosion resistance and strength of the alloy, the Phosphorus increases the wear resistance and stiffness of the alloy. Needle Bearings have been proven to be unstable and unsuitable for offshore and marine environments.



Multi fall load sheave bearings:

We have incorporated DU® self-lubricating metal polymer bearings into our multi chain fall load sheaves. Their success lies in the unique composite bearing structure comprised of a steel backing for mechanical strength and a porous sintered bronze interlayer impregnated with PTFE and lead for high wear resistance and extremely low friction properties. This makes them ideally suited to hoists used subsea. They provide improved energy efficiency due to low friction of PTFE-enriched overlay and have an extended service life with a strong wear-resistant bronze layer. There is zero maintenance as self-lubricating bearings can operate perfectly dry but have greater reliability with lubricant to avoid potential shaft/bearing seizure under boundary conditions.



Performance:

Tiger chain blocks and lever hoists have undergone a full test program that includes:

Type Testing

- Ultimate strength test, at least 4 times the Working Load Limit (WLL)
- Continuous cyclic testing of over 1500 cycles
- Chain end anchorage test, passing at least 2.5 times the WLL without any restriction of the brake or gears

Test on every hoist

- Proof loading at 1.5 times the rated capacity
- Light load testing at maximum of 2% rated capacity

Mechanical efficiency:

All major components are heat treated and precisely machined to ensure long term smooth operation. High gear ratios keep physical effort to a minimum.

Grease: High performance premium quality grease allows our hoists to be certified for use within a temperature range of -40°C to +80°C and can be customized to -60°C to +80°C, far exceeding the requirements of current standards.

Note: All such operations should be carried out in accordance with manufacturer's instructions and fully risk assessed by a competent person.

Cross hauling/fleeting operations:

Chain blocks and lever hoists fitted with our patent protected Quad Cam brake system have undergone a full and comprehensive testing regime that was drawn up by industry specialists and Tiger's mechanical engineers to provide evidence that these units can be safely used for fleeting and cross-hauling applications up to 45° without de-rating.

Brake efficiency:

Tiger hoists utilise an 8 point multi-start thread pinion shaft which doubles the lead distance compared with typical 4 point threaded shafts, increasing the brake efficiency by 100%. The rotational engagement of the brake works with the direction of the load sheave creating highly efficient braking ratios. With our fine manufacturing tolerances between the pinion shaft thread and critical brake components we have engineered out a known failure mode where contamination to the threads can lead to brake failure or slippage.



Globally patent protected

Quad cam brake design:

Our patented braking system feature has been designed by Tiger to enhance the safety of our lever hoists and chain blocks. This unique design ensures there is always permanent engagement of one of the pawls in the ratchet wheel. The reciprocating action always forces the pawl into the gear even without a pawl spring. This ensures the brake is always fully functional. With a conventional twin pawl brake mechanism (tear drop design) failure can occur if the pawl spring erodes, fractures or a shock load bounces the pawls out of the ratchet gear. Without the spring these systems rely on gravity keeping the pawls engaged and are flawed when the hoist is used at angles away from the vertical. Our quad cam pawl system is fitted to PROCB/SS20 chain blocks and PROLH/SS19 lever hoists.

**Overload protection:**


If the exact load can't be accurately determined then consider using hoists with slipping clutch overload protection. If the chain block or lever hoist is fitted with a slipping clutch overload mechanism then it is protected from overload. When the load limit is exceeded, the clutch in the chain wheel will slip, allowing the hand wheel to be rotated or handle to be operated whilst not engaging the gear box. This prevents further lifting of the load, though lowering is still possible. Load limiters can be fitted to PROCB/SS20 chain blocks and PROLH/SS19 lever hoists. Tiger chain blocks and lever hoists fitted with overload limiters are DNV GL Verification tested according to NORSOK R-002.



Adaptable chain blocks and lever hoists



360° rotation and 180° pivot for maximum flexibility



- Available for Tiger PROCB/SS20 chain blocks and PROLH/SS19 lever hoists
- All fittings meet the standards of EN1677 grade 100 at 400°C tempering
- Drop forged adaptor for maximum strength certified 4:1 FOS at all angles
- Self-locking (safety) hook, clevis shackle, reeveable egg (master) link or sling hook fitting available
- Overload protection available
- For lifting at angles (cross hauling / fleeting / drifting) with no deration
- Chain Blocks – 500kg – 10t capacity
- Lever Hoists – 500kg – 10t capacity





- Stainless steel hand chain (chain blocks)
- Corrosion protected load chain
- Marine specific friction discs
- Brake chamber protection from outside contamination
- Copper plated suspension and load hooks, load chain guides, grip rings, hand wheels and end anchorage
- Stainless steel fixings and fasteners
- Lever hoist also available using our PROLH unit and standard load chain
- Operating temperature -40°C to +80°C (temperature range of -60°C to +80°C available as an option)



Combined chain blocks and trolleys available



Ex II 2 GD e IIC T4 IIC T135°C

II	2	GD	e	IIC	T4	IIC	T135°C	T135°C	Dust Temperature Class: Maximum external surface temperature 135°C
								IIC	Groups of Dust: Protected for group IIC which includes groups IIA & IIB
								T4	Gas Temperature Class: Maximum external surface temperature 135°C
								IIC	Gas Explosive Group: Protected for group IIC which includes groups IIA & IIB
								e	Protection type: Design safety
								GD	Ex Atmosphere: Gas and Dust
								2	Category: High Safety
								II	Equipment Group: surface industries



Chain blocks



All chain blocks are manufactured from the highest quality materials precisely machined in our own factory, offering a lightweight, compact and rugged construction; producing an exceptionally strong product resistant to impact damage. The especially low headroom allows for easy installation in the most restricted environments and all units come with drop forged and heat treated alloy hooks. The highly efficient brake systems work instantly when the operation is stopped and securely holds the load. Loads are lowered under perfect control, allowing for precise operations. Tiger chain blocks easily pass the brake lock out test as per BS 3243:1990 with a 2% load of the rated capacity. PROCB and SS20 are available with forged clevis adaptor components. They can be chained to any height of lift to meet exact requirements and individual spares are readily available. The PROCB/SS20 chain block top hook can be replaced by a competent person so the block can be directly fitted to our beam trolley range of the equivalent capacity achieving the lowest possible headroom. All chain blocks meet or exceed all international standards within BS EN 13157:2004+A1:2009, ANSI/ASME B30.16, AS1418.2 and SANS 1594.

Industrial TRCB



- Range from 500kg-5.0t
- Safe and reliable twin pawl mechanical brake
- Operating temperature -25°C to +80°C
- Double cover protection for break cover



250kg PROCB

Professional PROCB



- Range from 250kg-35.0t
- Patented Quad Cam Pawl System
- DNV GL Verification tested according to NORSOK R-002
- Operating temperature -40°C to +80°C (temperature range of -60°C to +80°C available as an option)
- Double cover protection for break cover
- Tested and certified for “fleeting” “drifting” and “cross-hauling” applications up to 45° from the vertical without deration
- Suitable for underground mining use
- Available with slipping clutch overload protection
- Optional chain carrier
- Phosphor bronze bearings

Specialist SS20



- Range from 500kg-35.0t
- All the features of the PROCB as well as the following additional features:
- Suitable for use in multi-immersion applications (see p21)
- Corrosion protected load and hand chain
- Marine specific friction discs
- Marine chain bags available on request
- Fully corrosion protected body and components to ensure reliable long term use
- Stainless steel fixings and fasteners
- New technology high performance grease
- Winged design latches for easier operation
- Ultra-low operating temperature units available

See our technical sheet for full details:





Double Cover Protection on all our chain blocks: both the hand chain wheel cover and the ratchet brake cover are designed to offer protection to the brake chamber in the harshest environments from foreign objects.



Our chain end anchors will hold a load of at least 2.5 times the rated capacity when supporting the full load without restraint from other components e.g. brake or gearing. This prevents accidents, by acting as a stop when the lift length of the load chain is exceeded when lowered. The image shows our special strong and contoured design used on our PROCB and SS20 ranges.



For chain blocks to be used up to an angle of 45 degrees, it's critical that the hand chain leaves and enters the hand wheel without twisting, snagging or jamming. Thanks to our specially designed deep-profile chain block hand wheel this is achievable as it helps to seat the chain no matter what angle or direction of pull.



Our specialist SS20 has unique corrosion protection of all the internal parts including load and hand chain, ensuring over 1500 hours continuous protection under ASTM B117 Salt spray conditions.



Recessed forgings offer full protection to the load chain anchor bolts on all our bottom hooks. Load sheave protected design on all multi fall hooks.



Optional chain carrier.

Available with clevis adaptor fittings (see page 16) and load limiters on request.

Industrial TRCB




Product Code	Capacity (tonne)	Effort (kg)	Dimensions (mm)							Load Chain		Standard HOL (m)	Weight @ std HOL (kg)	Weight for extra metre HOL (kg)
			A	B	C	D	E	F1	F2	Diameter (mm)	No. of falls			
TRC-0050	0.5	21	93	66	305	52	78	24	38	6.3	1	3	10.5	1.9
TRC-0100	1.0	25	93	66	340	63	87	28	45	6.3	1	3	11.5	1.9
TRC-0150	1.5	32	98	73	385	78	102	34	51	7.1	1	3	16.0	2.1
TRC-0200	2.0	34	101	79	420	87	113	35	53	8.0	1	3	20.0	2.4
TRC-030T	3.0	34	98	73	488	60	148	36	56	7.1	2	3	23.0	3.2
TRC-0500	5.0	37	101	79	575	122	209	49	70	8.0	3	3	37.5	5.2

Professional PROCB

Product Code	Capacity (tonne)	Effort (kg)	Dimensions (mm)							Load Chain		Standard HOL (m)	Weight @ std HOL (kg)	Weight for extra metre HOL (kg)
			A	B	C	D	E	F1	F2	Diameter (mm)	No. of falls			
CB-0025	0.25	17	64	40	240	36	60	22	31	4.0	1	3	3.8	0.5
CB-0050	0.5	21	93	66	305	52	78	24	38	6.3	1	3	10.5	1.9
CB-0100	1.0	25	93	66	340	63	87	28	45	6.3	1	3	11.5	1.9
CB-0150	1.5	32	98	73	385	78	102	34	51	7.1	1	3	16.0	2.1
CB-0200	2.0	34	101	79	420	87	113	35	53	8.0	1	3	20.0	2.4
CB-020L	2.0	42	98	73	399	78	102	35	53	7.1	1	3	16.5	2.1
CB-0300	3.0	38	109	84	500	98	157	36	56	10.0	1	3	30.5	3.2
CB-030T	3.0	34	98	73	488	60	148	36	56	7.1	2	3	23.0	3.2
CB-0500	5.0	37	101	79	575	122	209	49	70	8.0	3	3	37.5	5.2
CB-0600	6.0	38	109	84	635	86	220	49	70	10.0	2	3	45.5	5.3
CB-0800	8.0	34	109	84	610	153	263	51	78	10.0	3	3	61.0	7.5
CB-1000	10.0	40	109	84	660	153	263	54	87	10.0	3	3	64.0	7.5
CB-1500	15.0	41	109	84	840	225	378	59	81	10.0	5	3	128.5	11.8
CB-2000	20.0	43	161	90	1050	148	360	81	110	10.0	6	3	178.5	14.2
CB-200T	20.0	43	161	161	1050	383	383	81	110	10.0	6	3	210.5	15.2
CB-3000	30.0	42	220	220	1200	390	390	91	135	10.0	10	3	307.0	23.8
CB-3500	35.0	40	240	240	1200	390	390	91	135	10.0	12	3	365.0	27.0

Specialist SS20 (also used for ROV compatible chain block)

Product Code	Capacity (tonne)	Effort (kg)	Dimensions (mm)							Load Chain		Standard HOL (m)	Weight @ std HOL (kg)	Weight for extra metre HOL (kg)
			A	B	C	D	E	F1	F2	Diameter (mm)	No. of falls			
SCB-0050	0.5	21	93	66	305	52	78	24	38	6.3	1	3	10.5	1.9
SCB-0100	1.0	25	93	66	340	63	87	28	45	6.3	1	3	11.5	1.9
SCB-0150	1.5	32	98	73	385	78	102	34	51	7.1	1	3	16.0	2.1
SCB-0200	2.0	34	101	79	420	87	113	35	53	8.0	1	3	20.0	2.4
SCB-0300	3.0	38	109	84	500	98	157	36	56	10.0	1	3	30.5	3.2
SCB-0500	5.0	37	101	79	575	122	209	49	70	8.0	3	3	37.5	5.2
SCB-0600	6.0	38	109	84	635	86	220	49	70	10.0	2	3	45.5	5.3
SCB-0800	8.0	34	109	84	610	153	263	51	78	10.0	3	3	61.0	7.5
SCB-1000	10.0	40	109	84	660	153	263	54	87	10.0	3	3	64.0	7.5
SCB-1500	15.0	41	109	84	840	225	378	59	81	10.0	5	3	128.5	11.8
SCB-2000	20.0	43	161	90	1050	148	360	81	110	10.0	6	3	178.5	14.2
SCB-3000	30.0	42	220	220	1200	390	390	91	135	10.0	10	3	307.0	23.8

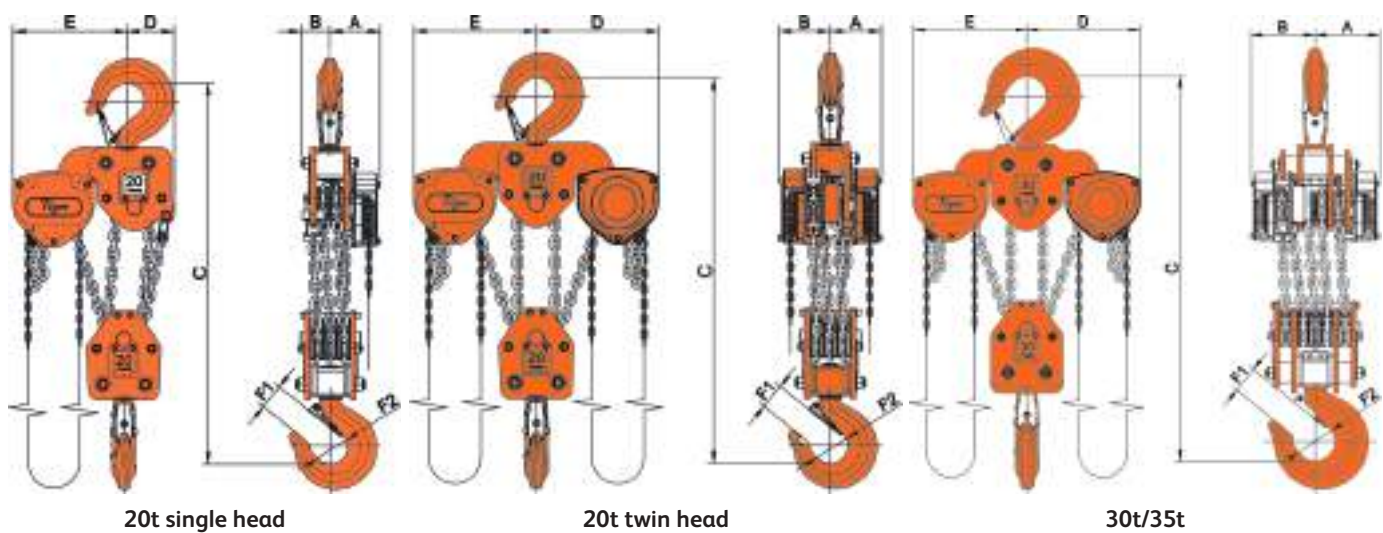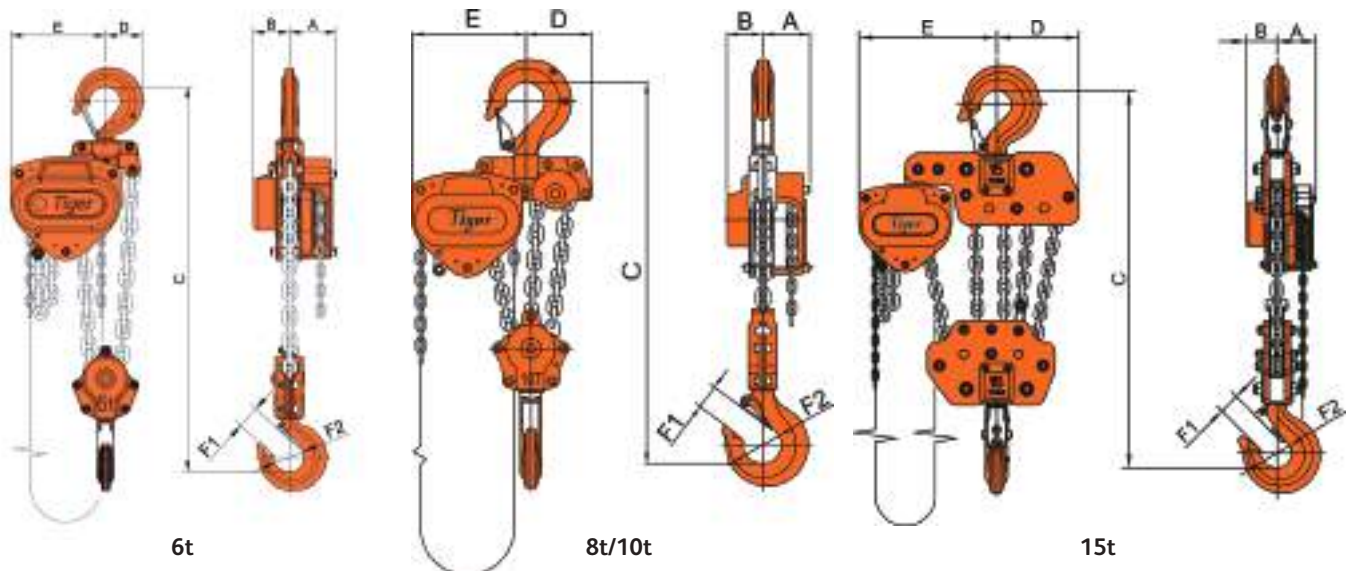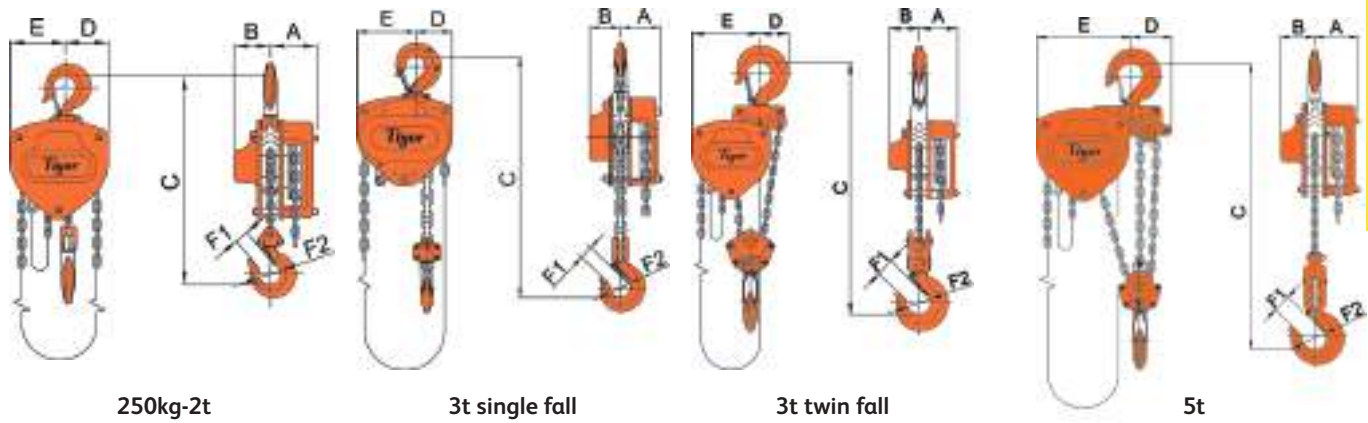

ROV compatible chain block



The Tiger ROV compatible chain block is available in various different interface options all in accordance with BS ISO 13628-8:2002 ROV Interfaces on Subsea production systems. Tested and finished in accordance with Annexes B & K of BS ISO 13628-1:2005:

1. Hydraulic Hot Stab connection type A and B
2. Rotary Torque Receptacle Classes 1,2 & 3
3. D Handle, T-bar or Fishtail Direct Drive manual connection
4. QD Direct Drive Couplings

Available as a 3.0 tonne, 10 tonne, 15 tonne and 20 tonne (single head six fall) capacity chain blocks, chained up to project specific heights of lift (HOL) that can be pre-set to meet the exact starting point required within the rigging drawings. These units use our specialist SS20 chain block- see page 26 for details.



Tiger ROV compatible chain blocks fitted with one piece construction gears



Stainless steel chain bucket option

Bespoke products for special applications also available – let us know what you need.



QD direct drive couplings



Manual D handle interface



One of our torque receptacle options

Quality machining

Strong impact resistant gearbox housing complete with close tolerance fit bearing that fully support the pinion shaft and planet gear to maintain smooth revolutions whilst under load, Subsea suitable bearings for top and bottom hook load sheaves are enclosed in drop forged housing assembled with stainless steel fittings.



High performance marine spec hydraulic system



New hand wheel feature



Strong impact resistant gearbox

HOISTING

Chain block data table Please see page 29 for chain block technical drawings

Product Code	Capacity (tonne)	Effort (kg)	Dimensions (mm)							Load Chain		Standard HOL (m)	Weight @ std HOL (kg)	Weight for extra metre HOL (kg)
			A	B	C	D	E	F1	F2	Diameter (mm)	No. of falls			
SCB-0300	3.0	38	109	84	550	98	157	36	56	10.0	1	3	30.5	3.2
SCB-0600	6.0	38	109	84	635	86	220	49	70	10.0	2	3	45.5	5.3
SCB-0800	8.0	34	109	84	610	153	263	51	78	10.0	3	3	61.0	7.5
SCB-1000	10.0	40	109	84	660	153	263	54	87	10.0	3	3	64.0	7.5
SCB-1500	15.0	41	109	84	840	225	378	59	81	10.0	5	3	128.5	11.8
SCB-2000	20.0	43	161	90	1050	148	360	81	110	10.0	6	3	178.5	14.2
SCB-3000	30.0	42	220	220	1200	388	388	91	135	10.0	10	3	307.0	23.8

ROV block data table

Product Code	Capacity (tonne)	Max Torque (Nm)	Revs per 300mm travel (max 125 RPM)	Time to raise 300mm at max RPM (Min:Sec)	Weight out of water (kg) (includes chain block @ std HOL)			
					Hot Stab	QD Drive	Torque Tool	Fishtail
RCB-0300	3.0	45	55	0:26	72.5	54.5	57.5	43
RCB-0600	6.0	TBA	110	0:59	87.5	TBA	TBA	TBA
RCB-0800	8.0	TBA	165	1:19	103	TBA	TBA	TBA
RCB-1000	10.0	50	165	1:19	106	84.5	87.5	76
RCB-1500	15.0	52	275	2:12	170.5	154.5	157.5	141
RCB-2000	20.0	55	340	2:43	220.5	202.0	205.0	190.5
RCB-3000	30.0	TBA	570	4:34	TBA	TBA	TBA	TBA

- 3.0t, 6.0t, 8.0t, 10.0t, 15.0t and 20.0t capacity units available
 - Fully corrosion protected
 - Compliant with BS ISO 13628-8:2002 & BS ISO 13628-1:2005
 - Stainless steel 316 framework and handle
 - Proven Subsea brake design
 - Patented Quad Cam pawl system
 - One-piece brake chamber cover
 - Heavy duty flexible chain bag c/w stainless steel mounting frame
 - 4 Point manipulator connection points
 - One piece construction pinion gears
- Compact and light weight
 - Balanced design for easy handling and installation
 - Subsea suitable bearings for top and bottom hook load sheaves
 - Marine specific friction discs
 - New hand wheel feature for on-deck height of lift adjustments
 - Bespoke chain lengths to meet exact customer requirements
 - Full individual spares back up
 - Each unit is fully tested and certified before delivery
- See our technical sheet for full details:



For chain block information please see pages 26 - 29

ROV chain block with D handle

Product Code	Dimensions (mm)									
	A	B	C	D	E	F1	F2	G	H	M
RCB-030D	221	84	550	280	310	36	56	309	405	504
RCB-060D	221	84	703	221	369	49	70	309	467	504
RCB-080D	221	84	749	179	411	51	78	309	489	504
RCB-100D	221	84	660	185	405	54	87	309	515	504
RCB-150D	221	84	840	225	520	59	81	309	570	504
RCB-200D	221	90	1050	148	515	81	110	309	650	510
RCB-300D	332	220	1200	388	545	91	135	309	680	750

ROV chain block with fishtail

Product Code	Dimensions (mm)									
	A	B	C	D	E	F1	F2	G	H	M
RCB-030F	221	84	550	280	310	36	56	309	405	536
RCB-060F	221	84	703	214	376	49	70	309	467	536
RCB-080F	221	84	749	179	411	51	78	309	189	536
RCB-100F	221	84	660	185	405	54	87	309	515	536
RCB-150F	221	84	840	225	520	59	81	309	570	536
RCB-200F	221	90	1050	148	515	81	110	309	650	542
RCB-300F	332	220	1200	388	545	91	135	309	680	780

ROV chain block with rotary torque

Product Code	Dimensions (mm)									
	A	B	C	D	E	F1	F2	G	H	M
RCB-030T	106	84	550	280	310	36	56	309	405	390
RCB-060T	106	84	703	214	376	49	70	309	467	390
RCB-080T	106	84	749	179	411	51	78	309	489	390
RCB-100T	106	84	660	185	405	54	87	309	515	390
RCB-150T	106	84	840	225	520	59	81	309	570	390
RCB-200T	158	90	1050	148	515	81	110	309	650	448
RCB-300T	216	220	1200	388	545	91	135	309	680	636


ROV chain block with hot stab

Product Code	Dimensions (mm)									
	A	B	C	D	E	F1	F2	G	H	M
RCB-030H	374	84	550	420	280	36	56	273	420	458
RCB-060H	374	84	703	354	346	49	70	273	482	
RCB-080H	374	84	749	320	380	51	78	273	503	
RCB-100H	374	84	660	300	400	54	87	273	530	458
RCB-150H	374	84	840	225	510	59	81	273	570	458
RCB-200H	374	90	1050	200	500	81	110	273	700	464
RCB-300H	485	220	1200	388	495	91	135	273	695	


ROV chain block with QD drive

Product Code	Dimensions (mm)									
	A	B	C	D	E	F1	F2	G	H	M
RCB-030H-QD	374	84	550	228	280	36	56	273	420	458
RCB-060H-QD	374	84	703	162	346	49	70	273	481	
RCB-080H-QD	374	84	749	162	380	51	78	273	503	
RCB-100H-QD	374	84	660	153	400	54	87	273	530	458
RCB-150H-QD	374	84	840	225	510	59	81	273	570	458
RCB-200H-QD	374	90	1050	148	500	81	110	273	700	458
RCB-300H-QD	485	220	1200	388	515	91	135	273	695	


For SS20 chain block information please see pages 26-29

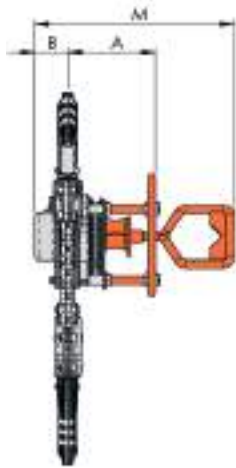



10t D handle

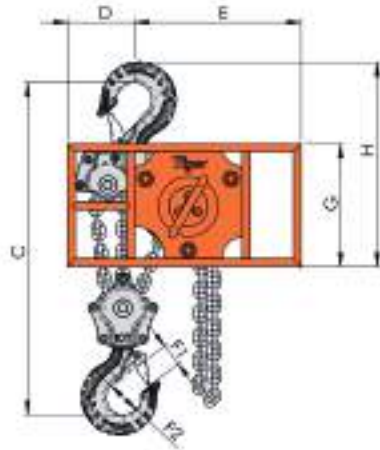

10t fishtail

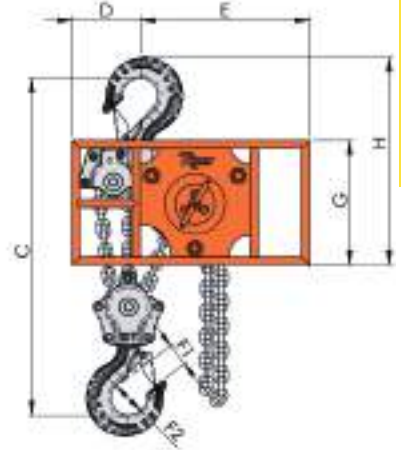

10t rotary torque

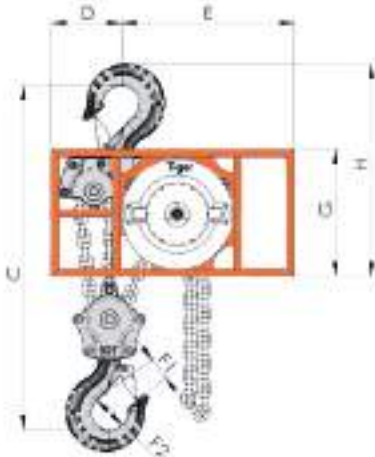
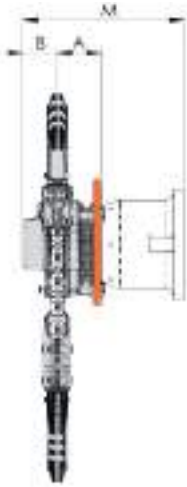


10t hot stab

Information, technical and 3D drawings available on request



10t QD drive

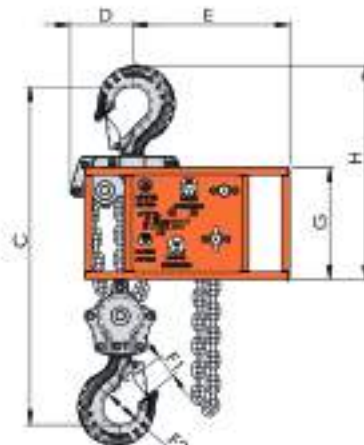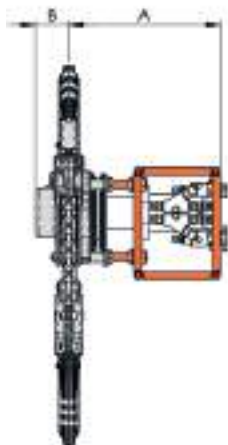


Low headroom combination chain block and trolley


- Very low headroom
- Range from 1.0t to 10.0t
- Ideal for locations where headroom is limited
- Operating temperature of -40°C to +80°C (temperature range of -60°C to +80°C available as an option)
- Can be chained to any height of lift to meet your exact requirements
- Chain carrier available
- Corrosion or spark resistant versions available
- Available with load limiter
- Available with beam locking device

Certification:


Each unit comes fully certified with a test certificate or an EC Declaration of Conformity stating compliance with the essential health and safety requirements of the Machinery Directive 2006/42/EC.




Standard product



With locking device- outside of curve



With locking device- inside of curve

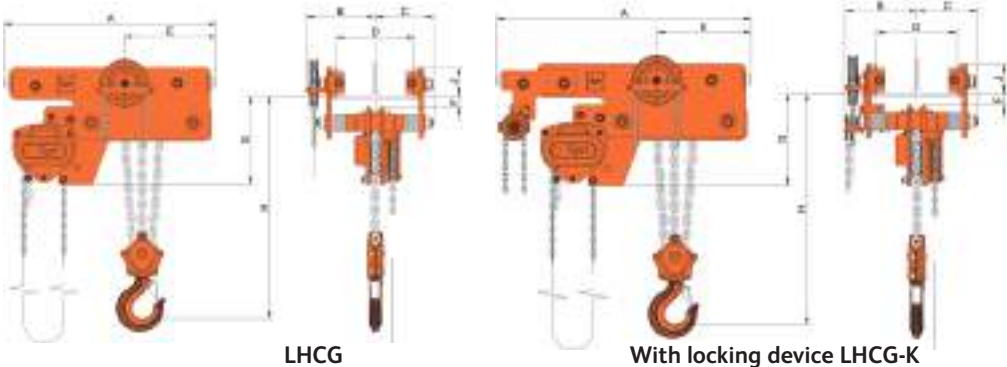

LHCG

With locking device LHCG-K

Technical data

Product Code	Capacity (tonne)	D-Track width		Dimensions (mm)								Min. Curve Ratio (M)	Net Weight (kg) @ std HOL range 1/range 2
		Range 1 (mm)	Range 2 (mm)	A	B	C	E	F	G	H	J		
LHCG-0100	1.0	62-180	62-310	458	207	138	149	24	230	210	70.5	2.2	36.5/38.1
LHCG-0200	2.0	88-180	88-310	576	207	146	179	24	299	260	79.5	3.2	62.6/64.4
LHCG-0300	3.0	88-180	88-310	698	209	153	221	32	341	305	96.5	4.0	95.2/97.7
LHCG-0600	6.0	106-194	106-310	791	216	164	274	32	344	425	117	6.0	132.1/133.7
LHCG-1000	10.0	106-320	N/A	873	283	243	377	45	364	550	118	9.0	203.0

Technical data - with optional locking device

Product Code	Capacity (tonne)	D-Track width		Dimensions (mm)								Min. Curves Ratio (M) Locking at the outside of I Beam	Min. Curves Ratio (M) Locking at the inside of I Beam	Net Weight (kg) @ std HOL range 1/range 2
		Range 1 (mm)	Range 2 (mm)	A	B	C	E	F	G	H	J			
LHCG-0100-K	1.0	62-180	62-310	572	207	138	149	24	230	210	70.5	2.2	3.0	44.2/45.8
LHCG-0200-K	2.0	88-180	88-310	678	207	146	179	24	299	260	79.5	3.2	4.5	70.9/72.7
LHCG-0300-K	3.0	88-180	88-310	814	209	153	221	32	341	305	96.5	4.0	5.5	105.4/107.9
LHCG-0600-K	6.0	106-194	106-310	924	216	164	274	32	344	425	117	6.0	8.0	143.4/145.0
LHCG-1000-K	10.0	106-320	N/A	1013	286	243	377	45	364	550	118	9.0	14.0	216.2

Standard geared trolley hand chain length -2.5m. We can change the length to suit your requirements.
Standard height of lift (HOL) of chain block - 3m. We can change this to suit your requirements.
D is the standard track width range. Allow 5mm gap between the wheel flange and beam. Please contact us for track widths outside of this range.
F is the maximum beam flange thickness.

Corrosion or spark resistant versions available.



Optional chain carrier 1t

With optional locking device

Ultra low headroom combination chain block and trolley



- Ultra low headroom
- Range from 1.0t to 12.0t
- Ideal for locations where headroom is limited
- Operating temperature of -40°C to 80°C (temperature range of -60°C to +80°C available as an option)
- Can be chained to any height of lift to meet your exact requirements
- Chain carrier available
- Corrosion or spark resistant versions available




HOISTING

Certification:

Each unit comes fully certified with a test certificate or an EC Declaration of Conformity stating compliance with the essential health and safety requirements of the Machinery Directive 2006/42/EC

Special designs available on request – an example of a recent 30t ultra low headroom design with load cell shackle is shown below:

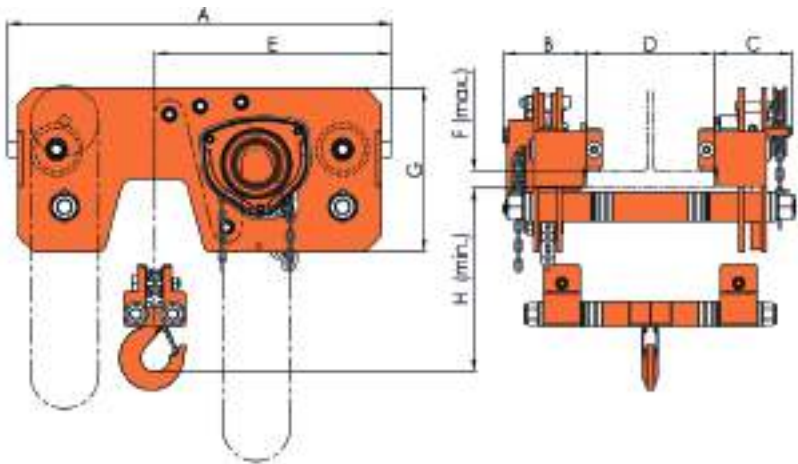


Model No	A	B	C	E	F (max.)	G	H (min.)
ULHCG-0100	585	166	159	365	26	240	115
ULHCG-0200	680	169	159	420	31	270	136
ULHCG-0300	798	183	172	484	36	300	155
ULHCG-0600	938	204	199	579	41	400	199
ULHCG-0800	1028	194	230	644	45	360	220
ULHCG-1200	1128	227	231	727	45	420	250

The beam width D is customised to customer requirements. Please contact us for more information.


Combination chain block and trolley



Corrosion or spark resistant versions available.

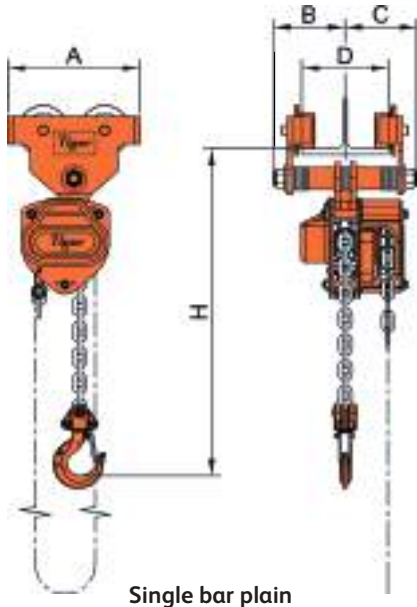

Single bar plain

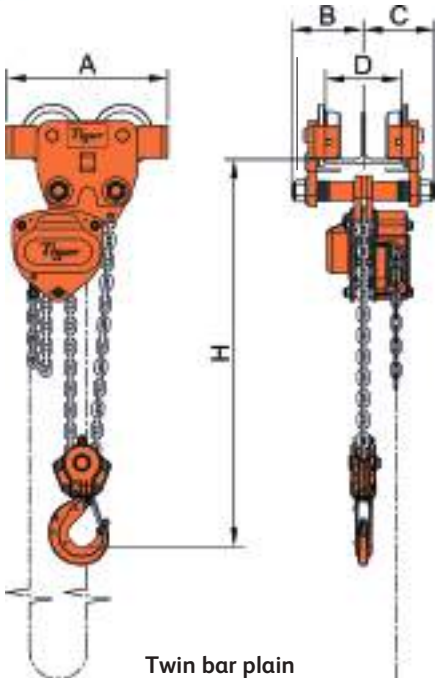

Twin bar plain



Spark resistant version


- Range from 500kg to 35.0t
- Ideal for locations where headroom is limited
- Geared and plain trolley versions available
- Can be chained up to meet your specific requirements
- Twin bar or single bar trolley options
- Corrosion or spark resistant versions available
- Chain Carrier available
- Extended beam width available




Plain/Push combination units

	Product Code	Capacity (tonne)	D-Track width		Dimensions (mm)				Min. curve ratio (m)	Net Weight (kg) @ std HOL
			Range 1 (mm)	Range 2 (mm)	A	B	C	H		
Single Bar Trolleys	CCBTPS-0050	0.5	80-128	80-203	195	106	106	310	0.8	16.0
	CCBTPS-0100	1.0	80-128	80-203	213	113	113	340	1.0	19.5
	CCBTPS-0200	2.0	112-154	112-230	236	136	136	420	1.3	33.0
	CCBTPS-0300	3.0	111-153	111-230	275	146	146	504	1.5	48.5
Twin Bar Trolleys	CCBTPT-030T	3.0	105-153	105-230	320	142	142	460	1.5	45.5
	CCBTPT-0500	5.0	126-194	126-305	352	167	166	545	1.5	69.0
	CCBTPT-1000	10.0	125-320	N/A	346	243	243	660	1.5	137.0
	CCBTPT-1500	15.0	150-320	N/A	461	276	276	827	2.7	274.0


Standard height of lift (HOL) of chain block - 3m. We can change this to suit your requirements.

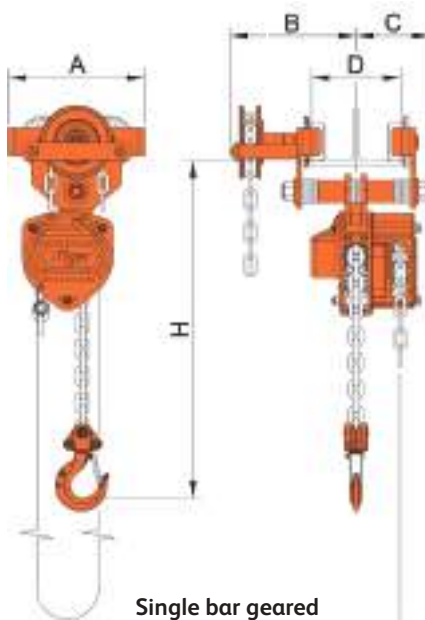


Single bar geared

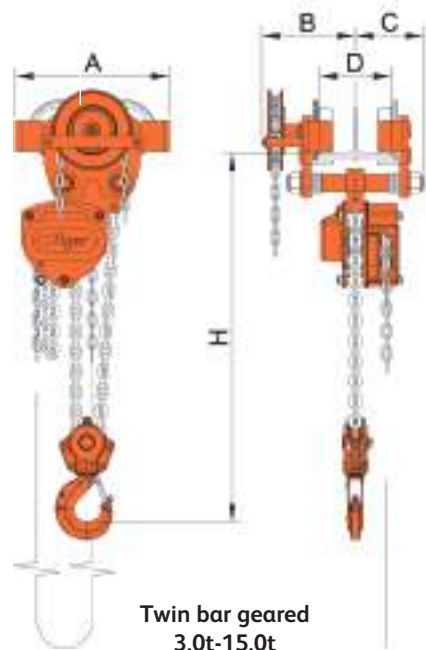

Twin bar geared
3.0t-15.0t

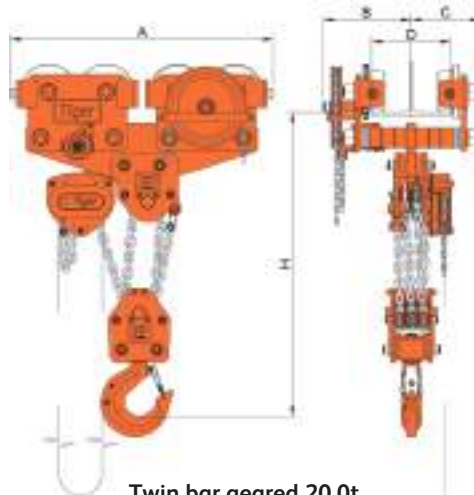

Twin bar geared 20.0t

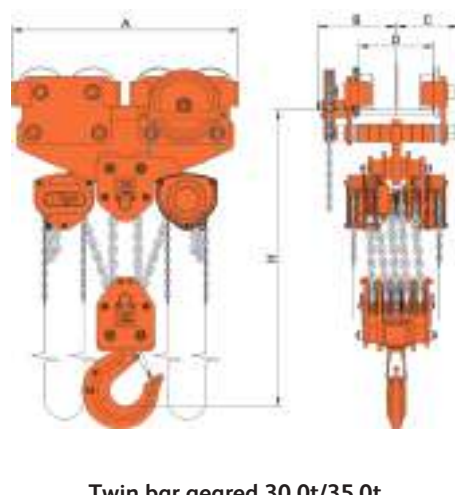

Twin bar geared 30.0t/35.0t

Geared trolley combination units

	Product Code	Capacity (tonne)	D-Track width		Dimensions (mm)				Min. curve ratio (m)	Net Weight (kg) @ std HOL
			Range 1 (mm)	Range 2 (mm)	A	B	C	H		
Single Bar Trolleys	CCBTGS-0050	0.5	80-128	80-203	195	180	106	310	0.8	20.0
	CCBTGS-0100	1.0	80-128	80-203	213	180	113	340	1.0	23.5
	CCBTGS-0200	2.0	112-154	112-230	236	195	136	420	1.3	37.5
	CCBTGS-0300	3.0	111-153	111-230	275	198	146	504	1.5	53.5
Twin Bar Trolleys	CCBTGT-030T	3.0	105-153	105-230	320	194	142	460	1.5	58.5
	CCBTGT-0500	5.0	126-194	126-305	352	218	166	545	1.5	74.5
	CCBTGT-1000N	10.0	125-320	N/A	346	282	243	660	1.5	144.0
	CCBTGT-1500N	15.0	150-320	N/A	461	342	276	827	2.7	290.0
	CCBTGT-2000N	20.0	125-320	N/A	754	284	243	950	6.0	321.0
	CCBTGT-3000N	30.0	150-320	N/A	1009	339	270	1145	6.0	621.0
	CCBTGT-3500N	35.0	150-320	N/A	1009	335	274	1145	6.0	651.0

Standard geared trolley hand chain length - 2.5m. We can change the length to suit your requirements.
Standard height of lift (HOL) of chain block - 3m. We can change this to suit your requirements.



ALL MATERIAL HANDLING
Lifting Equipment

Product Catalog #20





MA Series Hoist

Hand Chain Hoist

½ to 30 Metric ton Capacity

FEATURES

- ▶ Increased efficiency by additional pinion shaft bearing and close tolerances.
- ▶ Hook blocks are bolted, allowing complete hook inspection.
- ▶ Lightweight and durable all steel construction with powder coated finish and plated frame components to resist corrosion.
- ▶ Premium USA Made Grade 80 Zinc plated alloy load chain.
- ▶ Hand chain opening is formed with a radius for smooth operation.
- ▶ Sealed ball bearings on the chain wheel maximize efficiency and serviceability.
- ▶ Weston style mechanical load brake is self-adjusting with double pawls and is surrounded by an enclosure to limit contamination.
- ▶ Double roller guide ensures load chain tracking.
- ▶ Optional Overload Protection is a one directional clutch that will only slip in the lift direction.
- ▶ Meets: ASME/ANSI B30.16, OSHA, NASA-STD-8719.9
- ▶ ATEX rated Ex II 3 GD c IIB 54° C X for limited use in hazardous environments.

Final assembly and re-testing in the USA




Plated Frame and Guide Components with Rounded Hand Chain Entrance

Zinc Plated Chains



Before using these products; read and follow instructions in the operator's manual. Never exceed capacity. Do not use for lifting people or loads over people.



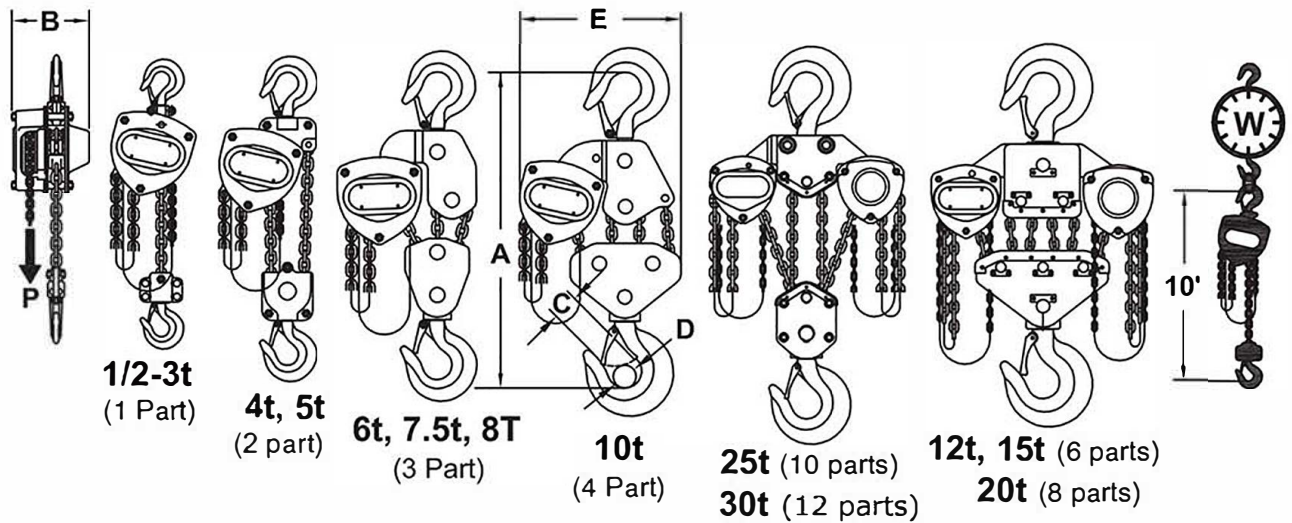

Base Model	Capacity (WLL)	Specifications (inches and pounds)							Effort "P" @WLL"	"W ft. lift"	"W 10 ft. lift"
		Parts	Chain	A	B	C	D	E			
MA005	1/2t / 1100 lbs	1	C5 x 15z	13.6	5.4	0.93	0.83	5.7	50	0.74	24
MA010	1t / 2200 lbs	1	C6 x 18z	14.8	6	1.02	0.98	6.3	63	0.92	27
MA015	1 1/2t / 3300 lbs	1	C7 x 21z	17.4	6.8	1.28	1.2	7.2	66	1.12	39
MA020	2t / 4400 lbs	1	C8 x 24z	18.5	7	1.38	1.28	8	74	1.3	43
MA030	3t / 6600 lbs	1	C10 x 28z	21.7	8.1	1.5	1.42	10	84	1.88	77
MA040	4t / 8800 lbs	2	C9 x 27z	27.1	7.4	1.67	1.57	9.8	62	2.88	90
MA050	5t / 11000 lbs	2	C9 x 27z	27.1	7.4	1.67	1.57	9.8	78	2.88	90
MA060	6t / 13200 lbs	3	C9 x 27z	29.8	7.4	1.93	1.81	16.9	63	4.13	135
MA075	7.5t / 16500 lbs	3	C9 x 27z	29.8	7.4	1.93	1.81	16.9	79	4.13	135
MA080	8T / 16000 lbs	3	C9 x 27z	29.8	7.4	1.93	1.81	16.9	79	4.13	135
MA100	10t / 22000 lbs	4	C9 x 27z	33.9	7.4	1.93	1.81	18.1	83	5.38	173
MA120	12t / 26400 lbs	6	C9 x 27z	42.9	7.9	3.19	2.95	28.3	72x2	8.26	341
MA150	15t / 33000 lbs	6	C9 x 27z	42.9	7.9	3.19	2.95	28.3	90x2	8.26	341
MA200	20t / 44000 lbs	8	C9 x 27z	46.1	7.9	3.19	2.95	33.5	98x2	10.76	418
MA250	25t / 55000 lbs	10	C9 x 27z	47.2	13.9	3.19	2.95	27.5	107x2	13.26	462
MA300	30t / 66000 lbs	12	C10 x 28z	57.1	17.8	3.19	2.95	29.5	108x2	22.56	590

(1) Shipping weight can be estimated by adding approx. 15% to "W" hanging weight.

Standard lift = 10, 15 and 20 ft. Hand chain drop is 2 ft less than lift. Custom lifts and drops are available.

Option: V= Overload Protection, one-way operation that will lower any load.

L= Self-Locking Hook Option.

How to Order, by descriptive model number

Example: Model **MA050 - 20 - 18U VL**

Base Model Lift Drop Option



Self-Locking Hook Option
(Fits into Standard Hook Block)



Before using these products; read and follow instructions in the operator's manual. Never exceed capacity. Do not use for lifting people or loads over people.

Chain Hoists

1/2 to 10 Metric ton Capacity

FEATURES (for both lever and hand chain hoists)

- ▶ Low Headroom, Light weight and durable formed steel enclosure protects from contamination and can be quickly disassembled for fast and easy maintenance. Powder coating and plated finishes on exposed components provide corrosion resistance, allowing the hoist to stay in service longer.
- ▶ Internal parts are heat treated for strength and reliability with fully enclosed gearing to protect from contamination. All gears and shafts run on caged roller bearings, including the lift wheel which is machined for smooth operation and long life.
- ▶ Weston style mechanical load brake is self adjusting with double pawls and is surrounded by an enclosure to limit contamination.
- ▶ Drop forged Alloy hooks are designed to stretch when overloaded before chain failure and equipped with a heavy duty cast steel safety latch, attached by a bolt and lock nut. The top hook mounting articulates to aid in rigging and help ensure straight line loading between hooks.
- ▶ Grade 80 Alloy load chain with zinc plating.
- ▶ Each hoist is proof tested matching the individual serial number stamped on the nameplate. An operation and spare parts manual is also supplied in English, French and Spanish.
- ▶ Meets ASME B30, OSHA and NASA-STD-8719.9
- ▶ Unchained units and bulk chain are available for customers to make their own custom lifts if assembled and tested per ASME B30 before being placed into service.
- ▶ Spare parts are stocked in USA.



S Option:



Shipyard Hook




Before using these products; read and follow instructions in the operator's manual. Never exceed capacity. Do not use for lifting people or loads over people.

Hand Chain Hoist

½ to 10 Metric ton Capacity

FEATURES

- ▶ Hand chain opening is formed with radius allowing operation from side or even above, permitting use for lifting or pulling.
- ▶ Hand chains and load chains are Zinc plated.
- ▶ Available in lifts of 10, 20 and 30 feet. Custom lifts/drops available.

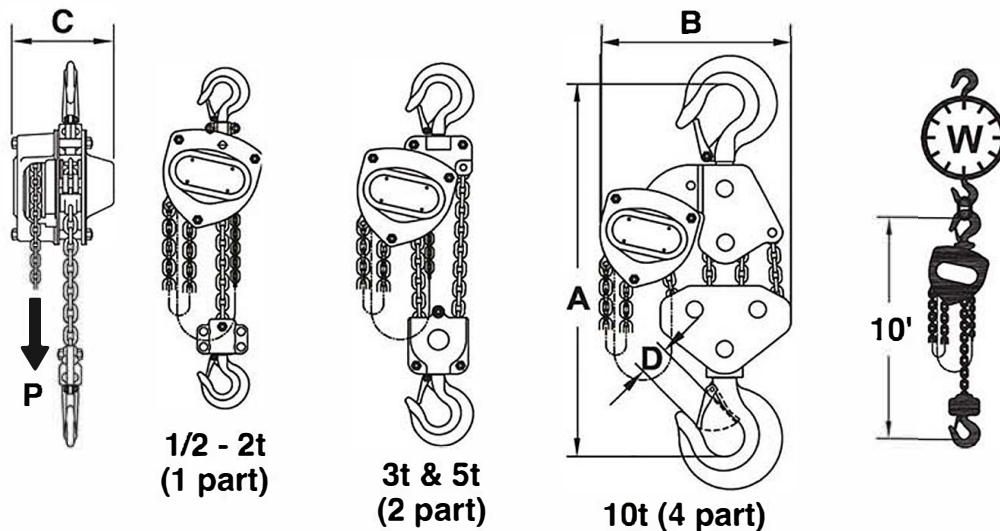

Option: V= Overload Protection

How to Order: By descriptive model number

Example: Model CB030-20-18V = 3t hoist with 20' lift 18' drop, overload protection

SPECIFICATIONS AND DIMENSIONS (inches and pounds unless noted)

Base Model#	WLL Metric ton	Weight (lbs) 10 Lift	Chain# & Size (mm)	Load Chain Lb.Ft.	Hand Chain Lb.Ft.	Effort P (lbs.) @ WLL	Falls	A	B	C	D with latch
CB005	0.5t (1100 lbs)	22	C6X18ZC	0.54	0.38	45	1	10.6	5.4	5.4	1.10
CB010	1t (2200 lbs)	26	C6X18ZC	0.54	0.38	72	1	13.4	6.4	5.8	1.02
CB015	1.5t (3300 lbs)	42	C8X24ZC	0.92	0.38	81	1	15.7	7.2	6.7	1.28
CB020	2t (4400 lbs)	44	C8X24ZC	0.92	0.38	82	1	16.3	7.6	6.7	1.26
CB030	3t (6600 lbs)	59	C8X24ZC	1.84	0.38	87	2	20.9	8.7	6.7	1.46
CB050	5t (11000 lbs)	101	C10X30ZC	2.96	0.38	98	2	25.0	11.3	7.5	1.80
CB100	10t (22000 lbs)	183	C10X30ZC	5.92	0.38	98	4	29.3	15.1	7.5	1.97



Before using these products; read and follow instructions in the operator's manual. Never exceed capacity. Do not use for lifting people or loads over people.



Mini Hoists

Mini Chain Hoist 1/4 & 1/2 Metric ton Capacity

FEATURES

- ▶ Planetary gearing is used to minimize operator effort and to reduce stress on the brake components.
- ▶ Small size allows operation and storage in tight places.
- ▶ Lightweight and durable all steel construction with plated frame components and durable chrome exterior finish to resist corrosion.
- ▶ Grade 80 Zinc plated alloy load chain.
- ▶ Sleeve bearings used to maximize serviceability and provide good efficiency.
- ▶ Self-adjusting pawl and Weston style mechanical load brake ensures positive load control.
- ▶ Meets: ASME/ANSI B30, OSHA, NASA-STD-8719.9.
- ▶ ATEX rated II 3 GD c IIB 54° C X for limited use in hazardous environments.



How to Specify Lever Model:


Example ML005-20
(1/2t Capacity, 20 ft lift)

Model	Lift
ML005	20

How to Specify Hand Chain Model:

Example MM003-20-18
(1/4t Capacity, 20 ft lift and 18 ft hand chain drop)

Model	Lift	Drop
MM003	20	18

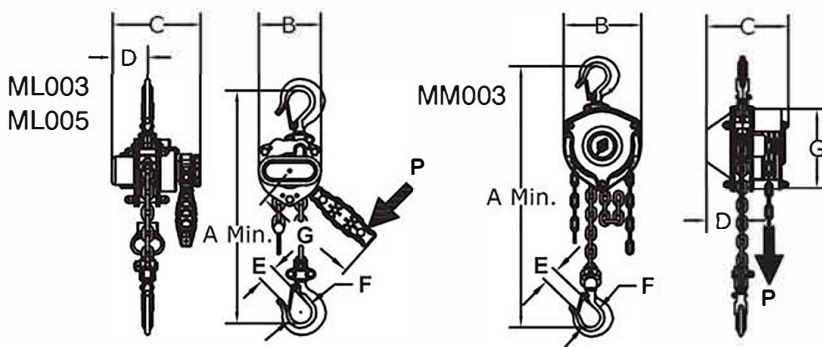

M & L Series Specifications and Dimensions (inches and pounds)

Model	Working Load Limit (WLL)		Chain	A Min.	B	C	D	E	F	G	Effort P (lbs)	W (lbs) 5' lift
	Maximum	*Minimum										
MM003	1/4t / 550 lbs	0 lbs	C4X12Z	9.1	3.9	4.3	1.9	0.6	1	4.3	26	7.7
ML003	1/4t / 550 lbs	33 lbs	C4X12Z	8.5	3	4.6	1.6	0.6	1	6.2	28	4.9
ML005	1/2t / 1100 lbs	40 lbs	C5X15Z	10	3.5	5.3	2	0.8	1.3	7.1	40	7.7

* **Lever Min. capacity** is the load required to set the automatic safety brake. The brake will stop a load even if the operator leaves the unit in free chain mode and in neutral, in a similar way as a seat belt reacts.

Standard lift is 5 & 10 ft for Lever and 8 ft for Hand Chain Hoist models. All hoists are load tested at 125% Capacity.



Before using these products; read and follow instructions in the operator's manual. Never exceed capacity. Do not use for lifting people or loads over people.