



BEAM CLAMPS & TROLLEYS



CoreLifting.com





Specifications for Hoists and Trolleys



Universal Trolley

The CM Universal Trolley (UT) is designed to fit virtually all Columbus McKinnon powered chain hoists up to 3 ton capacities.

CM Lodestar; Classic Lodestar; the new 2-ton, single-reeved Lodestar; Valustar; ShopStar; Man Guard; AirStar and AirStar 6.

COFFING JLC, EC1, EC3, and CAH Small and Large frame.

BUDGIT & YALE BEHC (Manguard), KELC (Manguard), YJL, 2200 Air and 6000 Air.

The rugged UT is competitively priced and engineered for maximum versatility and long service life. With 1, 2 and 3 ton (metric rated) capacities, the CM Universal Trolley is available as a convertible plain unit, a geared unit ideal for precise hoist positioning, and a motorized unit that's perfect for applications requiring high cycling and long distance hoist travel. The plain and geared versions of the Universal Trolley are CE Compliant, making them ideal for the global market.

BENEFITS & FEATURES

UNIVERSAL DESIGN REDUCES INVENTORY

Designed to fit most CMCO brand air and electric chain hoists up to 3 tons, the UT reduces inventory costs while increasing inventory flexibility.

THE SMART & ECONOMICAL CHOICE
With its very attractive price, the ability to be used with a multitude of hoists, and its long service life, the UT offers the greatest value of any trolley on the market today.

CONVERTIBLE

Plain trolleys equipped standard with geared trackwheels and side plate. Simply add a hand-geared kit to convert unit to a geared trolley in the field.

LONG LIFE & LOW MAINTENANCE

Dual tread wheels fit tapered or flat beams. Wheels include permanently lubricated shielded ball bearings for long life and low maintenance.

EASILY ADJUSTABLE TO FIT A WIDE RANGE OF BEAMS

The UT can be quickly and easily adjusted to fit the most popular beam flange widths. Maximum flange width of 8-5/8."

OPERATOR SAFETY

The UT features wrap-around side plates. Drop lugs provide additional security to improve operator safety and protect the wheels.

PINNED SUSPENSION BOLT

Castle nuts are pinned to ensure the bolts stay tightened, increasing operator safety.

CORROSION RESISTANT

Zinc-plated bolts, nuts and washers along with painted frames protect against corrosion and wear.

MACHINED TREAD WHEELS

Ensure a better fit to the beam for smoother operation and longer life.


CSA PENDING

LIFETIME WARRANTY


Best in the industry.



PLAIN

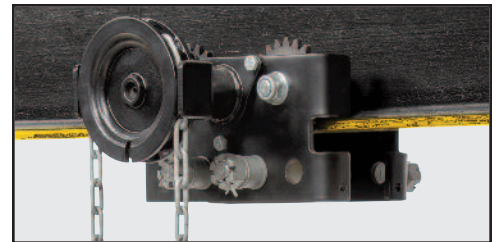

GEARED

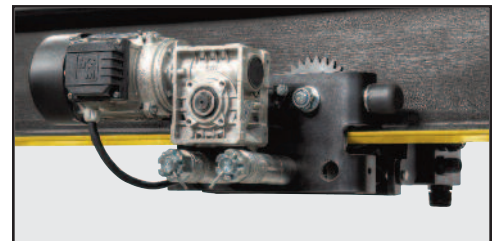

MOTORIZED

PLAIN & GEARED

CM UT plain trolleys allow for manual positioning of hoist and load, while geared units are ideal for applications where precise positioning is required. CM UT geared trolleys feature standard hand chain drop in proportion to a 20-foot-lift hoist.

MOTORIZED

CM UT motorized trolleys are best for applications requiring high cycling and long-distance hoist travel.

SPEED

15, 35 and 75 FPM traverse speed.

AC POWER SUPPLY

208-230/460 3-60 HZ. Single-speed, three-phase controls standard.

NEMA 3R WEATHER PROOFING

EASY ACCESS CONTROL BOX

Control box design allows the entire cover to be removed for easy access to components. Control box case has a white background for increased visibility when wiring up the panel or making adjustments to controls.

CONVENIENT TOOL TRAY

Electrical panel cover can be used as a tray to hold tools when repairing or servicing on the hoist.

CTP Adjustable Trolley Clamp

Capacities up to 6,600 LBS.

The heavy duty adjustable trolley clamp designed for easy installation while offering superior strength and stability throughout its long service life.

QUICK & EASY INSTALLATION

The CTP Adjustable Trolley Clamp requires no tools for installation.

THE SMART & ECONOMICAL CHOICE

With its competitive price and universal hanging clevis able to accept most hoists, the CTP is a tremendous value.


CORROSION RESISTANT

Features a zinc-plated spindle for added protection against the elements.


SAFE & SECURE

The unique locking nut handle prevents spindle from loosening.

METRIC RATED

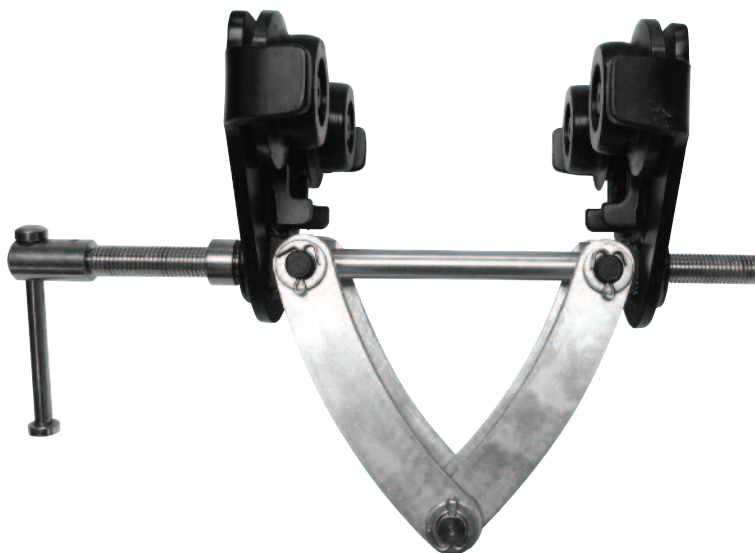

Product Code	Model	Capacity		I Beam Width (in.)	Minimum Radius Curve (in.)	Wheel Diameter (in.)
		Lbs.	Ton			
05500024	CTP/A 1T	2200	1	2-1/4 to 6	24	2.36
05500025	CTP/A 2T	4400	2	3 to 7-7/8	35	3.27
05500026	CTP/B 2T	4400	2	7-7/8 to 11-7/8	35	3.27
05500027	CTP/A 3T	6600	3	3 to 7-7/8	45	4.37
05500028	CTP/B 3T	6600	3	7-7/8 to 12-1/2	45	4.37

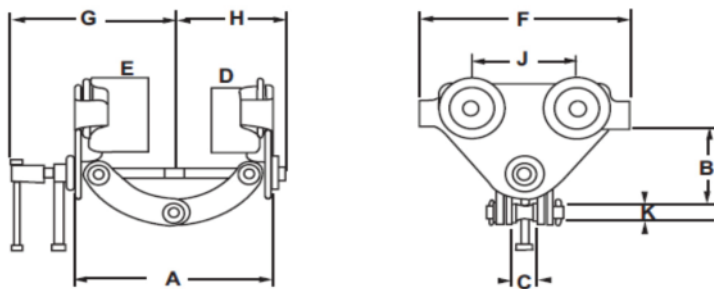


DIMENSION CHART

Model	Part Number	Working Load Limit	Jaw Capacity	Wheel Diameter	Minimum Curve Radius	A		B		C	D	E	F	G	H	J	K	Weight
						Min	Max	Min	Max									
		Bl	in.	in.	in.	in.	in.	in.	in.	in.	in.	in.	in.	in.	in.	in.	in.	lb.
CTP/A 1T	005500024	2,200	2-3/8"- 5-7/8"	2.362	24"	3.74	7.283	3.228	4.291	1.026	2.598	2.874	6.299	6.020	4.134	2.952	0.787	5.5
CTP/A 2T	005500025	4,400	3"-7-7/8"	3.267	35"	4.921	9.843	4.173	6.102	1.653	3.543	3.937	10.236	8.070	5.471	5.118	0.787	21.8
CTP/B 2T	005500026	4,400	7-7/8"-11-7/8"	3.267	35"	4.921	9.843	5.365	7.519	1.653	3.543	3.937	10.236	10.039	7.441	5.118	0.787	22.7
CTP/A 3T	005500027	6,600	3"-7-7/8"	4.37	45"	5.315	10.236	5.039	6.732	1.969	4.331	4.921	12.207	8.661	6.102	5.906	0.866	38.6
CTP/B 3T	005500028	6,600	7-7/8"-11-7/8"	4.37	45"	5.315	10.236	5.905	8.346	1.969	4.331	4.921	12.207	11.02	8.464	5.906	0.866	43

CM Series 632 close radius trolley

With revolutionary advances, this shorter, more compact trolley is 50% lighter than competitive trolleys, yet every bit as tough.

- Negotiates radius curves as tight as 7 to 10 inches
- Made of highest quality rolled steel
- Unique double row, ball bearing wheel design for greater wear capacity
- Larger V-bars available for wider flange adjustment
- For low headroom applications
- Bearings pre-packed with lifetime lubricant
- Exclusive Dial-Fit collar quickly adapts trolley to wide range of beams and patented rails
- Dust covers shield and protect bearings
- Trolleys available for larger beams, rails or tracks; contact CM
- Cast iron trolley guards available (except for 3 ton)
- Lifetime warranty
- Made in U.S.A.

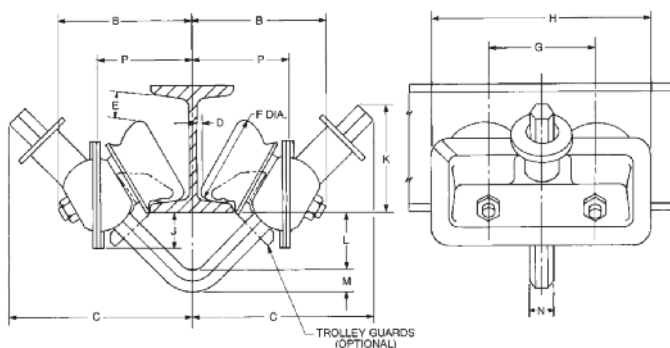

Clearance dimensions (in.)

Dimension	Rated capacity* (tons)			
	1/4 & 1/2	1	1 1/2 & 2	3
Min. radius curve (in.)	7	7	10	10
B	4 1/4	4 3/8	5 5/8	6 3/16
C	5 7/8	6	7 1/2	8 1/16
D	3/16	3/16	3/8	1 1/16
E	13/16	13/16	2 3/16	4 1/16
F	2 3/4	2 3/4	3 1/2	3 1/2
G	3 3/8	3 3/8	4 1/2	4 1/2
H	7	7	9	9
J	1 1/8	1 1/8	1 1/2	1 5/8
K	3 3/8	3 1/2	4 3/8	4 13/16
L	1 13/16	1 5/8	2	2 5/8
M	1 1/16	7/8	1 1/8	1 1/8
N	7/8	1	1 1/4	1 1/4
P	3	3 1/8	3 7/8	4 15/16

Dimensions given are for minimum S-beam and will vary with larger beams.

*WARNING

Overloading and improper use can result in injury.

To avoid injury:

- Do not exceed working load limit, load rating capacity
- Do not use to lift people or loads over people.
- use only alloy chain for overhead lifting.
- Read and follow all instructions.

Specifications

Rated capacity* (tons)	Product code	Adj. for standard S-beams		Tread diameter (in.)	Net weight (lbs.)	Shipping weight (lbs.)	Minimum radius curve (in.)
		Depth of beam (in.)	Flange width (in.)				
1/4-1/2	3222	4-12	2 5/8-5 1/16	2 3/4	9	10	7
1	3224	4-12	2 5/8-5 1/16	2 3/4	10	12	7
1 1/2-2	3226	6-15	3 3/8-5 5/8	3 1/2	23	25	10
3	3230	8-18	4-6 1/4	3 1/2	29	33	10

All capacities can be supplied for S-beams larger than listed and also for wide flange beams, rails or tracks with approximately equivalent flange widths.

Series 84A plain or geared trolley

Manufactured for heavy duty, industrial grade applications. CM Series 84A trolleys feature fully sealed, precision bearings, heavy duty side frames and fully machined wheel tread for superior performance and **long life — with minimal maintenance.**

- Available in capacities from 1/4 through 25 ton with 30 through 50 ton trolleys available as tandem construction.
- Lifetime lubricated, precision ball bearings on trolleys through 3 ton capacity. Trolleys with capacities 4 tons and greater are equipped with eight sealed, Timken tapered roller bearings and grease fittings.
- Heavy rolled steel side frames extend beyond the wheels to provide these trolleys with superior strength, rigidity and added protection for the trackwheels. Units with capacities from 1/4 through 12 tons employ universal wheel treads for use on flat or tapered beam flanges. Units with capacities from 16 through 25 tons operate on American Standard I-beams with tapered flanges. For patented track, consult factory.
- Trolley wheels are fully machined from alloy cast iron and hardened for high strength and long life.
- Alloy steel axles and equalizer pins are heat treated for maximum strength and wear life.
- Geared versions have fully machined trackwheel gears and incorporate a swinging chain guide which keeps the hand chain aligned and free from jamming.
- Available to fit a broad range of wider flange beams and patented track applications not listed - contact factory.
- Made in the USA
- Spark resistant models available — add suffix "SR"






Specifications

Product code		Rated capacity (tons)	Beam height (in.)	Flange width (in.)	Minimum radius curve (in.)	Approximate net weight	
						Plain	† Geared
1641-0025	1642-0025	1/4	4 - 12	2.66 - 5.00	20	23	38
1641-0050	1642-0050	1/2	4 - 12	2.66 - 5.00	20	23	38
1641-0100	1642-0100	1	5 - 12	3.00 - 6.00	24	43	62
1641-0150	1642-0150	1 1/2	5 - 12	3.00 - 6.00	24	45	65
1641-0200	1642-0200	2	6 - 18	3.33 - 6.25	30	67	90
1641-0300	1642-0300	3	6 - 18	3.33 - 6.25	30	70	93
1641-0400	1642-0400	4	8 - 24	4.00 - 7.00	36	155	184
1641-0500	1642-0500	5	8 - 24	4.00 - 7.00	36	160	188
1641-0600	1642-0600	6	8 - 24	4.00 - 7.00	36	160	188
1641-0800	1642-0800	8	10 - 24	4.62 - 8.00	60	300	347
1641-1000	1642-1000	10	10 - 24	4.62 - 8.00	60	310	360
1641-1200	1642-1200	12	10 - 24	4.62 - 8.00	60	310	360
1631-1600	1632-1600	16	18 - 24	6.00 - 8.00	96	800	895
1631-2000	1632-2000	20	18 - 24	6.00 - 8.00	96	845	955
1631-2500	1632-2500	25	18 - 24	6.00 - 8.00	120	1045	1200

For wide flange beam adaptation, patented track or for beams larger than standard - contact factory.

† Weight less hand chain. **8 Ft. standard zinc plated hand chain drop on geared trolley.** Specify curve on order.

Series 84A plain or geared trolley-specifications

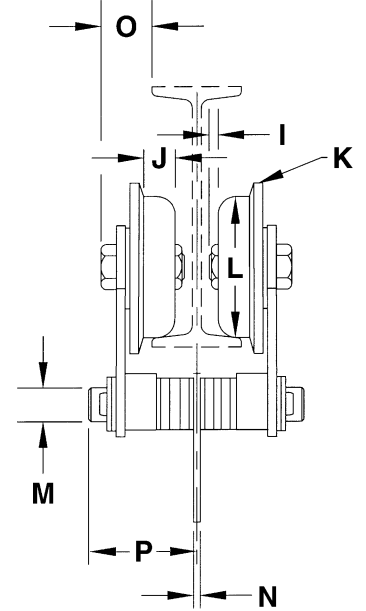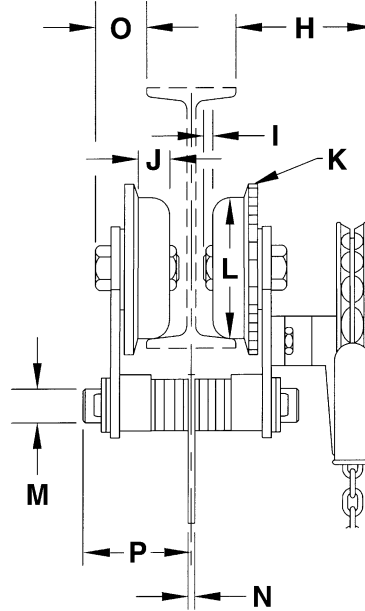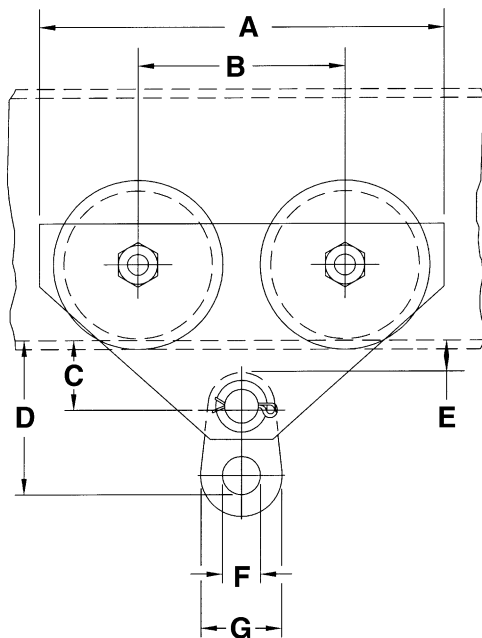

Cap. (tons)	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P
1/4	11 1/2	6	1 7/8	4 7/8	7/8	1 3/4	2 3/4	6	—	7/8	4	2 7/8	1	1/4	2	4 1/8
1/2	11 1/2	6	1 7/8	4 7/8	7/8	1 3/4	2 3/4	6	—	7/8	4	2 7/8	1	1/4	2	4 1/8
1	13 1/4	6 3/4	2 1/4	5 3/8	1	1 3/4	3	6 1/8	—	1 1/8	5	3 3/4	1 1/4	1/4	1 3/4	4 3/4
1 1/2	13 1/4	6 3/4	2 1/4	5 3/8	1	2	3 1/4	6 1/8	—	1 1/8	5	3 3/4	1 1/4	3/8	1 3/4	4 3/4
2	15 5/8	7 5/8	2 5/8	6 3/4	1 1/8	2 1/8	3 5/8	6 1/8	—	1 1/8	6	4 1/2	1 1/2	3/8	2 1/8	5 1/4
3	15 5/8	7 5/8	2 5/8	6 7/8	1 1/8	2 1/4	4	6 1/8	—	1 1/8	6	4 1/2	1 1/2	1/2	2 1/8	5 1/4
4	18 3/4	8 1/2	3 1/4	8 3/8	1 1/4	2 3/4	4 3/4	8 1/8	1/8	1 3/8	8	6 3/8	2	5/8	2 5/8	6 1/8
5	18 3/4	8 1/2	3 1/4	8 5/8	1 1/4	3	5 1/2	8 1/8	1/8	1 3/8	8	6 3/8	2	5/8	2 5/8	6 1/8
6	18 3/4	8 1/2	3 1/4	8 5/8	1 1/4	3	5 1/2	8 1/8	1/8	1 3/8	8	6 3/8	2	5/8	2 5/8	6 1/8
8	23 5/8	10 5/8	3 7/8	10 5/8	1 3/8	3 1/2	6 1/2	9	1/8	1 11/16	10	8 1/4	2 1/2	3/4	3 1/4	6 7/8
10	23 5/8	10 5/8	3 7/8	11 1/8	1 3/8	4 1/2	8	9	1/8	1 11/16	10	8 1/4	2 1/2	1	3 1/4	6 7/8
12	23 5/8	10 5/8	3 7/8	11 1/8	1 3/8	4 1/2	8	9	1/8	1 11/16	10	8 1/4	2 1/2	1	3 1/4	6 7/8
16	28 1/4	14	5 7/8	15 1/4	2 1/2	4	9	14 1/2	5/16	2	13 1/2	11 3/4	3 1/4	1 1/2	7	8
20	28 1/4	14	5 7/8	16 5/8	2 1/2	4	10	14 1/2	5/16	2	13 1/2	11 3/4	3 1/4	1 3/4	7	8 1/4
25	28 1/4	14	5 7/8	16 3/4	2 1/8	4	10	14 1/2	5/16	2	13 1/2	11 3/4	3 1/4	1 3/4	7	8 1/4

Notes: All dimensions are in inches.

Wheels with convex treads are standard on all capacities.

20, 25, 30 and 40 ton trolleys can be furnished in tandem construction - Dimensions for 30 through 50 ton units available upon request.


Dimensions shown are for minimum beam size and will vary proportionately for larger beams.

CBT Trolley

Plain or Geared Trolleys – Versatile, Economical, and Reliable

The smooth rolling CM Hoist CBT is the economical choice for most applications. The trolley features steel wrap around side plates, dual tread wheels and lifetime lubricated shielded ball bearings. The CBT Model by CM Hoist is available in plain and geared models.

- **Capacities** - Rated loads from 1/4 to 5 Ton (Metric Rated). In plain and geared models.
- **Economical** - Excellent low cost choice for manual and powered hoists.
- **Rugged** - Designed to provide superior performance and long, efficient service.
- **Low Rolling Effort** - Geared models have standard 6-foot hand chain drop. Other hand chain drops available.
- **Universal Hanging Clevis** - Accepts most hook mounted hoists.
- **Adjustable** - Trolley easily adjusts to fit any beam flange within range of adjustment, up to an 8.7" flange width.
- **Wrap-Around Side Plates** - Lugs provide additional security to increase operator safety and act as bumpers to protect wheels.
- **Dual Tread Wheels** - Will fit either tapered or flat beam flange within range of adjustment. Wheels include permanently lubricated, shielded ball bearings for long life and low maintenance.
- **Lifetime Warranty**

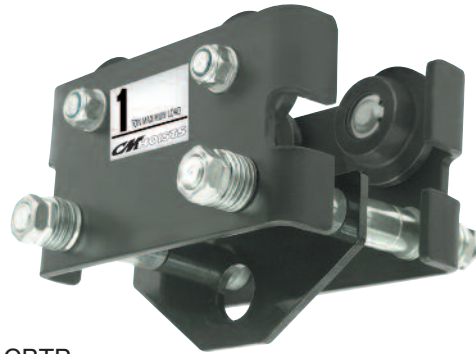

CBTP
(Plain Trolley)
1/4 To 5 Ton



CBTG
(Geared Trolley)
1 To 5 Ton

SPECIFICATIONS - Model CBT

Capacity *	Plain Product Code**	Geared Product Code**	Standard Beam Height (In.)	I-Beam Width (In.)	Minimum Radius Curve (In)	Wheel Tread Diameter (In)	Wt. (Lb.)
1/4	CBT(P)-0025		4-24	2.0-8.7	27	2.36	19
1/2	CBT(P)-0050		4-24	2.0-8.7	27	2.36	19
1	CBT(P)-0100	CBT(G)-0100	5-24	2.3-8.7	36	2.36	26
1 1/2	CBT(P)-0150	CBT(G)-0150	6-24	2.3-8.7	45	3.15	46
2	CBT(P)-0200	CBT(G)-0200	6-24	2.3-8.7	45	3.15	46
3	CBT(P)-0300	CBT(G)-0300	8-24	3.0-8.7	55	4.41	86
5	CBT(P)-0500	CBT(G)-0500	10-24	3.5-8.7	70	4.92	130


* Metric Rated

**When ordering specify "P" for plain trolley or "G" for geared trolley

CBT Trolley - Specifications

Dimensional Drawing - 602

Model CBTP/CBTG 1/4-5 Metric Ton

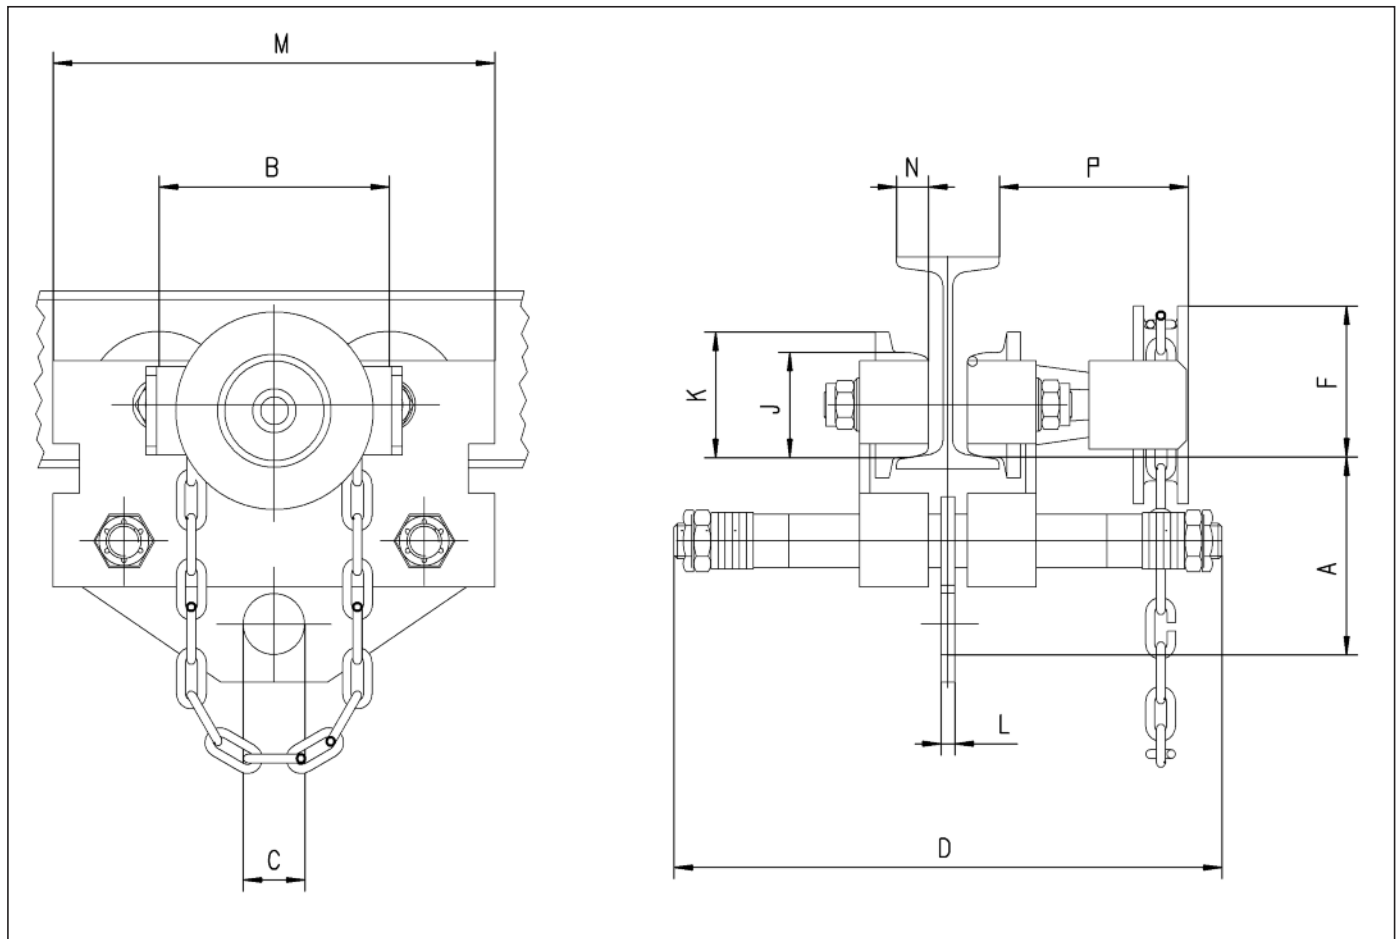

Clearance Dimensions (In.)

Model CBT

Capacity (Ton)	A	B	C	D	CBTG F	J	K	CBTG K	L	M	N	CBTG P
1/4	3.94	3.54	1.18	11.81	-	2.36	2.83	-	.31	7.56	.71	-
1/2	3.94	3.54	1.18	11.81	-	2.36	2.83	-	.31	7.56	.71	-
1	4.33	5.12	1.38	12.20	3.60	2.36	2.83	3.03	.31	9.84	.71	4.33
1 1/2	5.12	5.91	1.89	12.60	3.56	3.15	3.78	3.86	.47	11.81	.79	4.33
2	5.12	5.91	1.89	12.60	3.56	3.15	3.78	3.86	.47	11.81	.79	4.33
3	6.18	7.09	2.36	13.39	4.23	4.41	5.20	5.24	.55	14.57	1.14	4.33
5	7.09	8.23	2.76	13.78	5.89	4.92	5.63	5.87	.79	17.32	1.26	4.33

CM Series 633 wide range trolley

Simple, rugged, built for trouble-free service and ease of operation across a wide range of beam applications.
Series 633 features:

- Rugged steel side plates formed to include bumpers and trolley guards
- Frames connected by steel equalizer pin, secured by two nuts on each side
- Universal tread flanged trackwheels equipped with shielded ball bearings
- Easy rolling on American standard shapes, wide flange shapes or patented rail
- Hardened wheels and axles for added strength and durability
- Spacer washers can be shifted inside or outside for easy adjustment to wide range of beams
- To be used with hook suspended hoist
- Suspension plate for easy attachment is standard
- Bearings pre-packed with lifetime lubricant
- One-year warranty
- Imported
- Metric Rated





Clearance dimensions (in.)

Dimension	Rated capacity* (tons)				
	1/2	1	2	3	5
Min. radius curve (in.)	35	35	59	71	94
A	8 1/2	10 13/16	12 7/32	14 13/16	18 1/8
B**	2 5/32	2 13/32	2 11/16	3 1/16	3 21/32
C	5 1/16	6 9/16	6 25/32	7 13/32	8
D**	1/16	7/16	13/32	1/2	9/16
E**	-1/4	1 1/32	2 5/32	1 7/16	2 3/16
F	2 9/32	3 15/32	3 5/16	5 1/8	6 1/8
G	4	4 7/8	5 1/2	6 9/16	7 7/8
H**	3	4 11/32	4 29/32	6 1/8	7 9/32
J**	1 1/32	1 1/32	2 5/32	1 3/16	2 1/8
K	1 3/4	2 3/32	2 1/2	3 13/32	3 13/32
L	1/2	1/2	5/8	5/8	13/16
M**	1 5/16	3 1/32	5/16	1 5/16	1 7/16
N**	4 3/32	5 1/16	5 13/16	7 7/16	9 15/16
P	1 7/32	1 3/4	2 5/32	2 9/16	3 23/32
Q	1 9/32	1 9/32	1 3/16	1 3/8	1 25/32
R	3 1/32	1 5/32	1 5/8	1 31/32	2 9/16

**Dimensions given are for minimum S-beam and will vary with larger beams.

Specifications

Rated capacity* (tons)	Product code	Adj. for standard S-beams			Net weight (lbs.)	Shipping weight (lbs.)
		Depth of beam (in.)	Flange width (in.)	Tread diameter (in.)		
1/2	3302	3-15	2 1/2-5 5/8	2 9/32	15	17
1	3304	5-24	3-8	3 15/32	34	36
2	3306	6-24	3 5/8-8	3 15/16	50	53
3	3307	8-24	4-8	5 1/8	95	100
5	3309	10-24	4 5/8-8	6 1/8	172	175

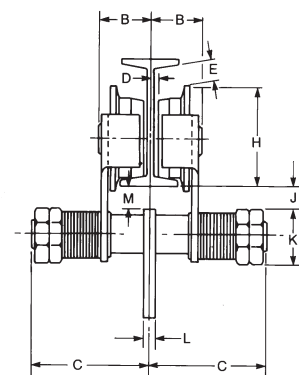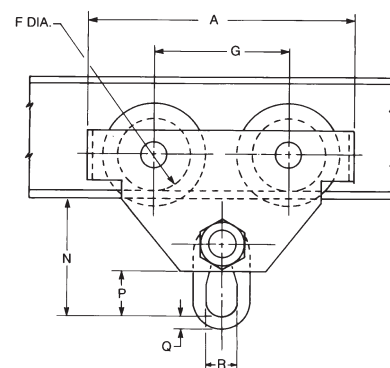

RailStar motor driven trolley



- Fits wide range of beam sizes for maximum versatility
- Universal use with any hook suspended single speed hoists that are equipped with reversing contactor
- Steel spur gearing for optimum strength and smooth operation
- Durable hardened cast iron trackwheels that operate on standard S-beams or flat flanged beams
- Lifetime lubricated double row ball bearings for high efficiency, low maintenance
- Cast iron control enclosure
- Four-button control station included for operating single speed hoist. Drop proportioned to 20' lift
- Steel plate side frames
- 115 volt control circuit on 1 phase units
48 volt control circuit on 3 phase units
- Trolley guards standard
- One-year warranty
- Metric rated
- Imported



Clearance dimensions (in.)

Dimension	Rated capacity* (tons)	
	1/8 - 2	3
A	12 ³ / ₄	14 ¹ / ₈
B	6 ³ / ₈	6 ³ / ₄
C**	4 ¹³ / ₁₆	5 ¹ / ₄
D	3 ⁹ / ₁₆	3 ¹⁵ / ₁₆
E	2 ⁹ / ₁₆	2 ¹⁵ / ₁₆
F**	4 ³ / ₄	5 ³ / ₁₆
G**	6	6 ⁵ / ₁₆
H**	17 ft.	17 ft.
J	7 ¹ / ₂	9 ¹⁵ / ₁₆
K	4 ¹ / ₈	4 ¹¹ / ₁₆
SINGLE PHASE L	12 ³ / ₄	15 ³ / ₁₆
THREE PHASE L	11 ⁷ / ₁₆	13 ⁷ / ₈
M**	1 ¹ / ₂	2 ¹⁵ / ₁₆
N**	3/8	3/4
P**	1 ⁷ / ₁₆	1 ⁹ / ₁₆
Q**	5 ¹ / ₈	5 ⁷ / ₈
R	1/2	3/4
S	1 ¹ / ₁₆	1 ¹ / ₁₆
T**	8 ⁷ / ₈	9 ⁹ / ₁₆

**Dimensions given are for minimum S-beam and will vary with larger beams.

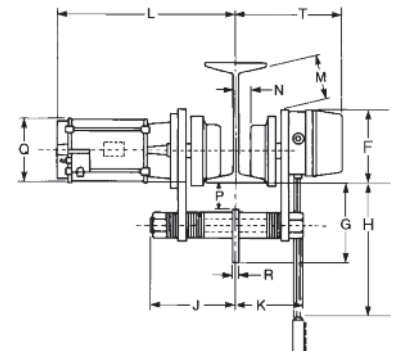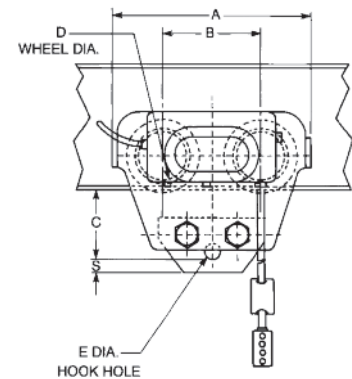

Specifications

Rated capacity (tons)	Product Code	Operating Voltage		Phase	Travel Speed		Motor H.P.	Min. beam size	Max. beam size	Shipping weight (lbs)
		50 hertz	60 hertz		50 hertz (F.P.M.)	60 hertz (F.P.M.)				
1/8-2	0300	220/380-415	220-240/440-480	3	65	78	1/3	S6x12.5	S18x54.7	108
1/8-2	0301	n/a	110-120	1	n/a	78	1/3	S6x12.5	S18x54.7	113
3	0302	220/380-415	220-240/440-480	3	65	78	3/4	S8x18.4	S24x79.9	185
3	0303	n/a	110-120	1	n/a	78	3/4	S8x18.4	S24x79.9	190

Note: Three phase units are reconnectable for high and low range voltage

*WARNING

Overloading and improper use can result in injury.

To avoid injury:

- Do not exceed working load limit, load rating capacity
- Do not use to lift people or loads over people.
- use only alloy chain for overhead lifting.
- Read and follow all instructions.


Tractor drive

Power tractor drives push-type hoists, trolleys and underhung cranes. Easy installation without removing or modifying existing equipment. This drive also features:

- Compact design
- Capacities up to 5 tons available in 230/460-3-60 operation
- Monorail trolley track or twin unit synchronized drives available
- Direct drive with right angle worm gear reducer
- Enclosed aluminum housing for lubrication of gears and bearings
- Steel plate construction with tie-rods for easy adjustment
- Squirrel cage motor with permanently lubricated bearings
- Fully machined trolley wheels with universal tread operate on tapered or flat flange beams
- Adjusts to standard I-beams or flat flange beams up to 8 inches wide
- Standard magnetic reversing contactor with mechanical interlock inside NEMA 1 enclosure
- One-year warranty
- Made in U.S.A.

Options

- 575 volt 3 phase 60 hertz operation
- 2, 4, 6 & 8 button push-button station
- Additional push-button cable length (10' standard)
- NEMA 12, 4 or 4X control enclosures
- Motor brake
- Soft start (recommended for speeds above 70 F.P.M.)
- Two speed or variable controls
- Transformer for 115 volt control power
- Tow bar
- For other beams, options or custom designs, consult factory

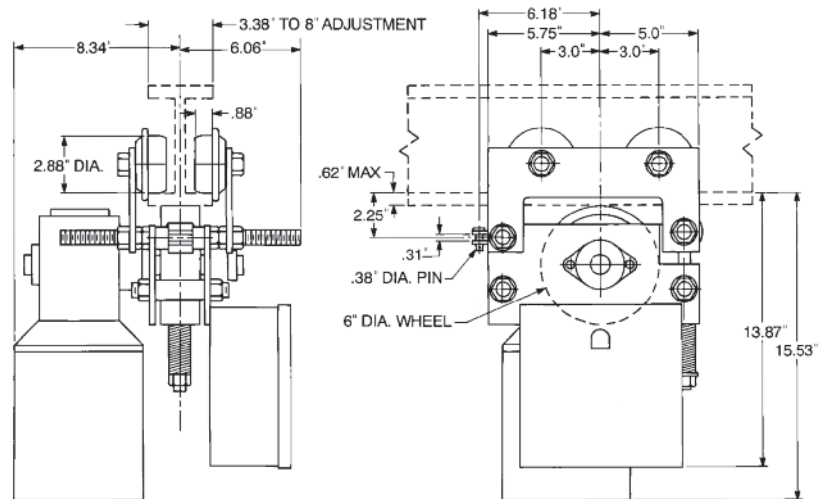

Rated capacity* (tons)	Product code	Speed (F.P.M.)	Motor H.P.	Motor RPM	Std. beam size (in.)	Min. radius curve (in.)	Approx. Max. flange thickness (in.)	shipping wt. (lbs.)
1	TD 235	35	1/4	900	3.38-8	36	.62	110
1	TD 255	55	1/4	900	3.38-8	36	.62	110
1	TD 270	70	1/4	900	3.38-8	36	.62	110
1	TD 2105	105	1/4	900	3.38-8	36	.62	110
1 1/2	TD 335	35	1/4	900	3.38-8	36	.62	110
1 1/2	TD 355	55	1/4	900	3.38-8	36	.62	110
1 1/2	TD 370	70	1/4	900	3.38-8	36	.62	110
1 1/2	TD 3105	105	1/4	900	3.38-8	36	.62	110
2 1/2	TD 535	35	1/4	900	3.38-8	36	.62	110
2 1/2	TD 555	55	1/4	900	3.38-8	36	.62	110
2 1/2	TD 570	70	1/4	900	3.38-8	36	.62	110
3	TD 635	35	1/4	900	3.38-8	36	.62	110
3	TD 655	55	1/4	900	3.38-8	36	.62	110
5	TD 1035	35	1/4	900	3.38-8	36	.62	110

**CHESTER
HOIST**

By Columbus McKinnon

HOISTS & TROLLEYS

HAND CHAIN HOISTS

POWERED CHAIN HOISTS

TROLLEYS

END TRUCKS &
COMPONENTS



HAND-PROPELLED, OVERHEAD I-BEAM PT TROLLEYS

CAPACITIES

1/4 to 50 Tons

**BEAM ADJUSTMENT
RANGE**

2.66 to 8 in.

**MINIMUM
RADIUS CURVE**

20 to 120 in.

OPTIONSSpark & Corrosion Resistance
Clean Room

For easy hoist attachment and ease of movement, Chester offers a wide variety of manually operated plain and geared trolleys. These trolleys feature concentrically machined wheels for easy rolling motion as well as high-quality, anti-friction bearings to assure minimal effort is needed for positioning. All capacities feature heavy rolled steel side plates complete with bumper/drop stops as standard to provide a full face bumper to contact beam end stops.

KEY FEATURES**MINIMUM MANUAL EFFORT & EASY MAINTENANCE**

Lifetime-lubricated precision ball bearings in ¼- to 3-ton capacities reduce manual effort and allow for easy maintenance. In 4- to 25-ton capacities, each trolley is equipped with eight sealed and tapered roller bearings that absorb the radial and thrust loads exerted in these heavier sizes while also allowing for ease of use and maintenance.

STABLE AND RIGID CONSTRUCTION


Heavy rolled-steel side plates are shaped to provide stability and rigidity.

LOAD EQUALIZATION & SMOOTH OPERATION

Steel equalizing pins connect the two halves of each trolley, providing load equalization and smooth operation.

DURABLE, SMOOTH-RUNNING TROLLEY WHEELS


Trolley wheels are long-wearing alloy cast iron. Wheel treads are machined to provide smoothest possible rolling motion. Steel axles are rigidly supported in the side frame. Steel trolley blocks reinforce the side plates as well as the equalizing pin.

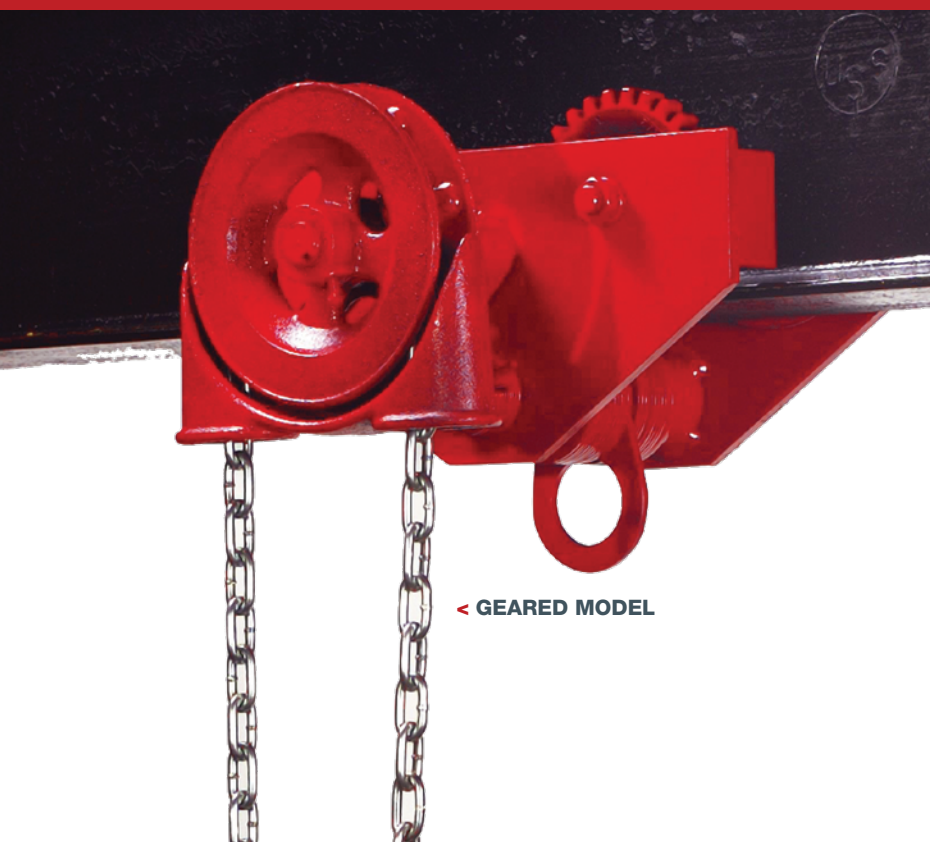

◀ GEARED MODEL



◀ PLAIN MODEL

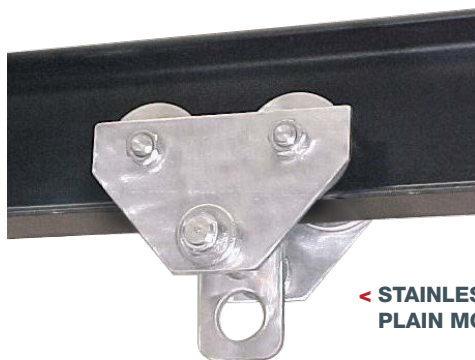◀ STAINLESS-STEEL
PLAIN MODEL◀ SPARK-RESISTANT
GEARED MODEL**SPARK-RESISTANT OPTIONS****SOLID BRONZE WHEELS**

Concentrically machined for smooth rolling motion.

STAINLESS STEEL DROP STOPS**ALUMINUM HAND CHAIN GUARD****ALUMINUM OR STAINLESS STEEL
HAND CHAIN****CORROSION-RESISTANT OPTIONS****SPECIAL CORROSION-RESISTANT FINISHES**

Created specifically for operation in salt-laden or other corrosive environments.

CLEAN ROOM OPTIONS**FOOD-GRADE EPOXY PAINT****STAINLESS STEEL WHEELS****STAINLESS STEEL BEARINGS****STAINLESS STEEL HAND CHAIN****COMPLETE STAINLESS STEEL UNITS
AVAILABLE FOR SOME CAPACITIES**

"THE ULTIMATE CLEAN ROOM TROLLEY"

HAND-PROPELLED, OVERHEAD I-BEAM PT TROLLEYS

SPECIFICATIONS

Capacity (tons)	Catalog Number		Spark-Resistant Plain Trolley	Spark-Resistant Geared Trolley	Beam Adjustment Range (in.) *	Min. Beam Height (in.) **	Hand Chain Reach from Beam (Geared Trolleys) (ft.)	Minimum Radius Curve (in.) ***	Pounds of Push to Move Plain Trolley, Fully Loaded (lbs.)	Net Weight (lbs.)	
	Plain Trolley	Geared Trolley								Plain Trolley	Geared Trolley
1/4	1641-0025	—	1641-0025SR	—	2.66 to 5.0	4	8	20	7	23	38
1/2	1641-0050	—	1641-0050SR	—	2.66 to 5.0	4	8	20	14	23	38
1	1641-0100	1642-0100	1641-0100SR	1642-0100SR	3 to 6	5	8	24	18	43	62
1-1/2	1641-0150	1642-0150	1641-0150SR	1642-0150SR	3 to 6	5	8	24	28	45	65
2	1641-0200	1642-0200	1641-0200SR	1642-0200SR	3.33 to 6.25	6	8	30	38	67	90
3	1641-0300	1642-0300	1641-0300SR	1642-0300SR	3.33 to 6.25	6	8	30	44	70	93
4	1641-0400	1642-0400	1641-0400SR	1642-0400SR	4 to 7	8	8	36	59	155	184
5	1641-0500	1642-0500	1641-0500SR	1642-0500SR	4 to 7	8	8	36	61	160	188
6	1641-0600	1642-0600	1641-0600SR	1642-0600SR	4 to 7	8	8	36	73	160	188
8	1641-0800	1642-0800	1641-0800SR	1642-0800SR	4.62 to 8	10	8	60	85	300	347
10	1641-1000	1642-1000	1641-1000SR	1642-1000SR	4.62 to 8	10	8	60	90	310	360
12	1641-1200	1642-1200	1641-1200SR	1642-1200SR	4.62 to 8	10	8	60	110	310	360
16	1641-1600	1642-1600	1641-1600SR	1642-1600SR	6 to 8	12	8	96	120	600	650
20	1641-2000	1642-2000	1641-2000SR	1642-2000SR	6 to 8	12	8	96	156	610	660
25	1631-2500	1632-2500	1631-2500SR	1632-2500SR	6 to 8	18	8	120	195	1045	1200
30	1641-3000	1642-3000	1641-3000SR	1642-3000SR	7 to 8	24	8	—	240	1520	1615
40	1641-4000	1642-4000	1641-4000SR	1642-4000SR	7 to 8	24	8	—	312	1776	1886
50	1631-5000	1632-5000	1631-5000SR	1632-5000SR	7 to 8	24	8	—	390	2676	2831

* NOTE: Consult factory for beams outside of this standard range.

** NOTE: Beam height shown is for proper wheel running clearance only. The customer must verify their chosen beam is adequate for the intended application and loads. Consult factory for beams smaller than the minimum specified.

***NOTE: Minimum radius applies to minimum flange width and may vary with beam. For curve applications consult factory.


Curves must be specified when ordering.

1/4 through 20 ton units are supplied straight sided with universal wheels for operation on flat or tapered beams.

For patented track applications consult factory.

25 and 50 ton units are supplied with canted side plates for operation on standard American tapered I-beams.

For other beams consult factory.

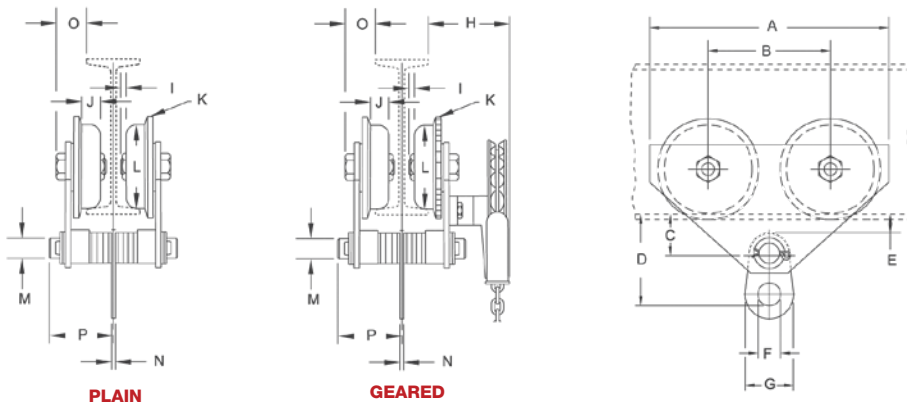

PLAIN

GEARED

DIMENSIONS

Capacity (tons)	Dimensions (In.)															
	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P
PLAIN & GEARED TROLLEY																
1/4	11-1/2	6	1-7/8	4-7/8	7/8	1-3/4	2-3/4	6	0	7/8	4	2-7/8	1	1/4	2	4-1/8
1/2	13-1/4	6-3/4	2-1/4	5-3/8	1	1-3/4	3	6-1/8	0	1-1/8	5	3-3/4	1-1/4	1/4	1-3/4	4-3/4
1	13-1/4	6-3/4	2-1/4	5-5/8	1	2	3-1/4	6-1/8	0	1-1/8	5	3-3/4	1-1/4	3/8	1-3/4	4-3/4
1-1/2	13-1/4	6-3/4	2-1/4	5-5/8	1	2	3-1/4	6-1/8	0	1-1/8	5	3-3/4	1-1/4	3/8	1-3/4	4-3/4
2	15-5/8	7-5/8	2-5/8	6-3/4	1-1/8	2-1/8	3-5/8	6-1/8	0	1-1/8	6	4-1/2	1-1/2	3/8	2-1/8	5-1/4
3	15-5/8	7-5/8	2-5/8	6-7/8	1-1/8	2-1/4	4	6-1/8	0	1-1/8	6	4-1/2	1-1/2	1/2	2-1/8	5-1/4
4	18-3/4	8-1/2	3-1/4	8-3/8	1-1/4	2-3/4	4-3/4	8-1/8	1/8	1-3/8	8	6-3/8	2	5/8	2-5/8	6-1/8
5	18-3/4	8-1/2	3-1/4	8-5/8	1-1/4	3	5-1/2	8-1/8	1/8	1-3/8	8	6-3/8	2	5/8	2-5/8	6-1/8
6	18-3/4	8-1/2	3-1/4	8-5/8	1-1/4	3	5-1/2	8-1/8	1/8	1-3/8	8	6-3/8	2	5/8	2-5/8	6-1/8
8	23-5/8	10-5/8	3-7/8	10-5/8	1-3/8	3-1/2	6-1/2	9	1/8	1-11/16	10	8-1/4	2-1/2	3/4	3-1/4	6-7/8
10	23-5/8	10-5/8	3-7/8	11-1/8	1-3/8	4-1/2	8	9	1/8	1-11/16	10	8-1/4	2-1/2	1	3-1/4	6-7/8
12	23-5/8	10-5/8	3-7/8	11-1/8	1-3/8	4-1/2	8	9	1/8	1-11/16	10	8-1/4	2-1/2	1	3-1/4	6-7/8
16	28	12	4-3/4	13-3/4	1-7/16	4	9	10-11/16	1/4	1-3/4	11-11/16	9-3/4	3-1/4	1-1/4	4-5/8	7-5/8
20	28	12	4-3/4	16-3/4	1-7/16	4-1/2	10	10-11/16	1/4	1-3/4	11-11/16	9-3/4	3-1/4	1-1/4	4-5/8	7-5/8
25	28-1/4	14	5-7/8	16-3/4	2-1/8	4	10	14-1/2	5/16	2	13-1/2	11-3/4	3-1/4	1-3/4	7	8-1/4
30	Consult Factory															
40																
50																
PLAIN & GEARED TROLLEY, SPARK-RESISTANT																
1/4	11-1/2	6	1-7/8	4-7/8	7/8	1-3/4	2-3/4	6	0	7/8	4	2-7/8	1	1/4	2	4-1/8
1/2	13-1/4	6-3/4	2-1/4	5-3/8	1	1-3/4	3	6-1/8	0	1-1/8	5	3-3/4	1-1/4	1/4	1-3/4	4-3/4
1	13-1/4	6-3/4	2-1/4	5-5/8	1	2	3-1/4	6-1/8	0	1-1/8	5	3-3/4	1-1/4	3/8	1-3/4	4-3/4
1-1/2	13-1/4	6-3/4	2-1/4	5-5/8	1	2	3-1/4	6-1/8	0	1-1/8	5	3-3/4	1-1/4	3/8	1-3/4	4-3/4
2	15-5/8	7-5/8	2-5/8	6-3/4	1-1/8	2-1/8	3-5/8	6-1/8	0	1-1/8	6	4-1/2	1-1/2	3/8	2-1/8	5-1/4
3	15-5/8	7-5/8	2-5/8	6-7/8	1-1/8	2-1/4	4	6-1/8	0	1-1/8	6	4-1/2	1-1/2	1/2	2-1/8	5-1/4
4	18-3/4	8-1/2	3-1/4	8-3/8	1-1/4	2-3/4	4-3/4	8-1/8	1/8	1-3/8	8	6-3/8	2	5/8	2-5/8	6-1/8
5	18-3/4	8-1/2	3-1/4	8-5/8	1-1/4	3	5-1/2	8-1/8	1/8	1-3/8	8	6-3/8	2	5/8	2-5/8	6-1/8
6	18-3/4	8-1/2	3-1/4	8-5/8	1-1/4	3	5-1/2	8-1/8	1/8	1-3/8	8	6-3/8	2	5/8	2-5/8	6-1/8
8	23-5/8	10-5/8	3-7/8	10-5/8	1-3/8	3-1/2	6-1/2	9	1/8	1-11/16	10	8-1/4	2-1/2	3/4	3-1/4	6-7/8
10	23-5/8	10-5/8	3-7/8	11-1/8	1-3/8	4-1/2	8	9	1/8	1-11/16	10	8-1/4	2-1/2	1	3-1/4	6-7/8
12	23-5/8	10-5/8	3-7/8	11-1/8	1-3/8	4-1/2	8	9	1/8	1-11/16	10	8-1/4	2-1/2	1	3-1/4	6-7/8
16	28	12	4-3/4	13-3/4	1-7/16	4	9	10-11/16	1/4	1-3/4	11-11/16	9-3/4	3-1/4	1-1/4	4-5/8	7-5/8
20	28	12	4-3/4	16-3/4	1-7/16	4-1/2	10	10-11/16	1/4	1-3/4	11-11/16	9-3/4	3-1/4	1-1/4	4-5/8	7-5/8
25	28-1/4	14	5-7/8	16-3/4	2-1/8	4	10	14-1/2	5/16	2	13-1/2	11-3/4	3-1/4	1-3/4	7	8-1/4
30	Consult Factory															
40																
50																

NOTE: To better illustrate wheels, bumpers have been omitted from the drawings on this page.

Wheels with convex treads are standard on all capacities 1/4 ton through 20 ton.

30, 40 & 50 ton trolleys are available furnished in tandem construction.

Consult factory for dimensions.

Dimensions vary proportionately with beam size.

HAND-PROPELLED, OVERHEAD ADJUSTABLE **SWIVEL-TRUCK TROLLEYS**

CAPACITIES

1/4 to 6 Tons

**BEAM ADJUSTMENT
RANGE**

2-5/8 to 8 in.

**MINIMUM
RADIUS CURVE**

9-7/8 to 33-7/8 in.

OPTIONSSpark & Corrosion Resistance
Wide Flange or Patented Track
Clean Room

Chester swivel-truck trolleys are the ideal choice when your application requires a trolley that can traverse the tightest curves with ease while maintaining an absolute minimum distance between the runway beam and load eye. The forged steel load eye on these swivel-truck trolleys is suspended on a special load bar carried at each end by a swiveling two-wheeled trolley unit. Design allows for easy attachment of hook-suspended Chester Zephyr hoists.

KEY FEATURES**MINIMUM MANUAL EFFORT & EASY MAINTENANCE**


Lifetime-lubricated precision ball bearings in 1/4- to 2-ton capacities reduce manual effort and allow for easy maintenance. 3- to 6-ton capacity trolleys are equipped with eight sealed and tapered roller bearings that also reduce effort and promote easy maintenance.

Trolleys may be special ordered for operation on wide flange beams or patented track. A trolley track lock, trolley bumpers and anti-drop lugs can also be ordered with these units.

DURABLE, SMOOTH-RUNNING TROLLEY WHEELS

Trolley wheels are cast iron and through hardened for long life. Wheel treads are concentrically machined to provide smoothest possible rolling motion.

OPTIONS & CONFIGURATIONS

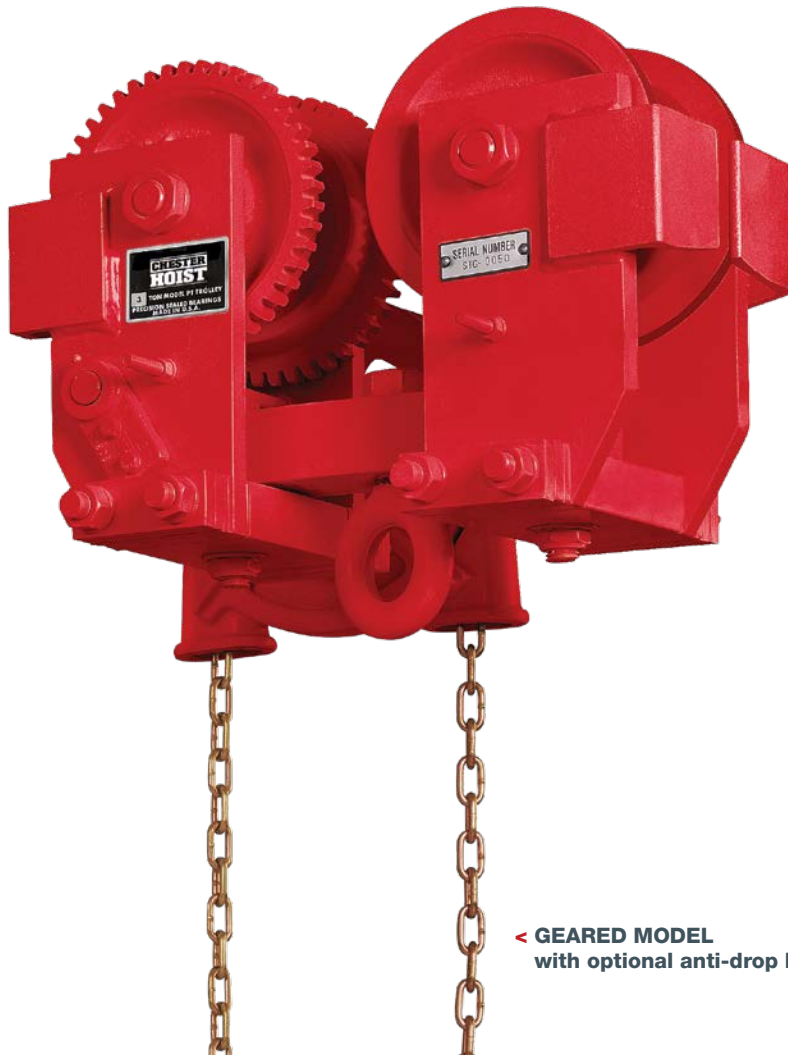

◀ **GEARED MODEL**
with optional anti-drop lugs

SPARK-RESISTANT OPTIONS

SOLID BRONZE WHEELS

Concentrically machined for smooth rolling motion.

STAINLESS STEEL DROP STOPS

ALUMINUM HAND CHAIN GUARD

ALUMINUM OR STAINLESS STEEL HAND CHAIN

CORROSION-RESISTANT OPTIONS

SPECIAL CORROSION-RESISTANT FINISHES

Created specifically for operation in salt-laden or other corrosive environments.

CLEAN ROOM OPTIONS

FOOD-GRADE EPOXY PAINT

STAINLESS STEEL WHEELS

STAINLESS STEEL BEARINGS

STAINLESS STEEL HAND CHAIN



◀ **SPARK-RESISTANT GEARED MODEL**
with optional anti-drop lugs

HAND-PROPELLED, OVERHEAD ADJUSTABLE SWIVEL-TRUCK TROLLEYS

SPECIFICATIONS

Capacity (tons)	Catalog Number		Beam Adjustment Range (in.) *	Minimum Beam Height (in.) **	Hand Chain Reach from Beam (Geared Trolleys) (ft.)	Minimum Radius Curve (in.) ***	Pounds of Push to Move Plain Trolley, Fully Loaded (lbs.)	Net Weight (lbs.)	
	Plain Trolley	Geared Trolley						Plain Trolley	Geared Trolley
1/4	1831-1/4	1832-1/4	2-5/8 to 4-5/8	4	8	9-7/8	7	45	63
1/2	1831-1/2	1832-1/2	2-5/8 to 4-5/8	4	8	9-7/8	14	45	63
1	1831-1	1832-1	3 to 4-5/8	5	8	9-7/8	18	58	75
1-1/2	1831-1-1/2	1832-1-1/2	3-5/8 to 5-1/2	6	8	19-1/2	28	83	105
2	1831-2	1832-2	3-5/8 to 5-1/2	6	8	19-1/2	38	83	105
3	1831-3	1832-3	4 to 7	8	8	15-3/8	44	155	185
4	1831-4	1832-4	4 to 7	8	8	15-3/8	59	155	185
5	1831-5	1832-5	4-5/8 to 8	10	8	33-7/8	61	274	303
6	1831-6	1832-6	4-5/8 to 8	10	8	33-7/8	73	274	303

* NOTE: Consult factory for beams outside of this standard range.

** NOTE: Beam height shown is for proper wheel running clearance only. The customer must verify their chosen beam is adequate for the intended application and loads. Consult factory for beams smaller than the minimum specified.



***NOTE: Minimum radius applies to minimum flange width and may vary with beam. For curve applications consult factory.

Curves must be specified when ordering.



Convex tread wheels are standard for standard I-beams for all capacities. Trolleys operating on patented track or wide flange beams will have flat tread wheels. Patented track and wide flange beam applications must be specified.

For patented track applications consult factory.

For other beams consult factory.



PLAIN
Units shown with optional bumpers



GEARED
Units shown with optional bumpers

DIMENSIONS

Capacity (tons)	Dimensions (In.)																			
	A	B	C	D**	E	F	G	H	I	J	K*	L*	M	N	O	P	Q	R	S	T
PLAIN TROLLEY																				
1/4	–	11-3/4	11	5/16	–	7	4-1/16	4-7/8	–	–	4-1/2	1-9/16	7/8	4-5/16	–	2-1/2	1-1/4	2-7/8	3-5/8	3/8
1/2	–	11-3/4	11	5/16	–	7	4-1/16	4-7/8	–	–	4-1/2	1-9/16	7/8	4-5/16	–	2-1/2	1-1/4	2-7/8	3-5/8	3/8
1	–	13	12	5/16	–	7	4-3/8	5-1/8	–	–	4-3/4	1-1/4	1-3/32	4-3/8	–	2-1/2	1-1/4	3-3/4	5	1
1-1/2	–	16-1/4	14-1/4	1/4	–	8-1/4	4-1/2	5-1/2	–	–	5	1-3/4	1-1/8	5	–	3	1-1/2	4-1/2	6	1
2	–	16-1/4	14-1/4	1/4	–	8-1/4	4-1/2	5-1/2	–	–	5	1-3/4	1-1/8	5	–	3	1-1/2	4-1/2	6	1
3	–	18-3/4	17-1/2	1/4	–	9-1/2	6-1/2	8-1/32	–	–	6	2-1/16	1-11/32	6	–	3-3/4	2	6-3/8	8	1-1/8
4	–	18-3/4	17-1/2	1/4	–	9-1/2	6-1/2	8-1/32	–	–	6	2-1/16	1-11/32	6	–	3-3/4	2	6-3/8	8	1-1/8
5	–	22-3/4	20-3/4	3/16	–	11-3/4	7-5/8	10-3/8	–	–	7-5/8	2-11/16	1-7/16	7-1/2	–	5-1/2	3	7-3/16	9	2-1/4
6	–	22-3/4	20-3/4	3/16	–	11-3/4	7-5/8	10-3/8	–	–	7-5/8	2-11/16	1-7/16	7-1/2	–	5-1/2	3	7-3/16	9	2-1/4
GEARED TROLLEY																				
1/4	15-3/8	12-3/4	12	1/4	5-1/8	7	4-1/16	4-7/8	4-7/19	9-1/8	4-1/2	1-9/16	7/8	4-5/16	7-7/8	2-1/2	1-1/4	2-7/8	4	3/8
1/2	15-3/8	12-3/4	12	1/4	5-1/8	7	4-1/16	4-7/8	4-7/19	9-1/8	4-1/2	1-9/16	7/8	4-5/16	7-7/8	2-1/2	1-1/4	2-7/8	4	3/8
1	15-13/16	13-1/2	12-7/8	5/16	5-5/16	7	4-3/8	5-1/8	4-7/16	9-1/8	4-3/4	1-1/4	1-3/32	4-3/8	7-7/8	2-1/2	1-1/4	3-3/4	5	1
1-1/2	17-3/4	16-1/4	14-1/4	1/4	5-7/16	8-1/4	4-1/2	5-1/2	4-13/16	8-3/4	5	1-3/4	1-1/8	5	7-7/8	3	1-1/2	4-1/2	6	1
2	17-3/4	16-1/4	14-1/4	1/4	5-7/16	8-1/4	4-1/2	5-1/2	4-13/16	8-3/4	5	1-3/4	1-1/8	5	7-7/8	3	1-1/2	4-1/2	6	1
3	20-1/4	18-3/4	17-1/2	1/4	6-5/8	9-1/2	6-1/2	8-1/32	5-7/8	9-3/4	6	2-1/16	1-11/32	6	8-1/2	3-3/4	2	6-3/8	8	1-1/8
4	20-1/4	18-3/4	17-1/2	1/4	6-5/8	9-1/2	6-1/2	8-1/32	5-7/8	9-3/4	6	2-1/16	1-11/32	6	8-1/2	3-3/4	2	6-3/8	8	1-1/8
5	25-9/16	22-1/4	20-3/4	1/4	8-7/16	11-3/4	7-5/8	10-3/8	6-13/16	11-5/16	7-5/8	2-11/16	1-7/16	7-1/2	10	5-1/2	3	7-3/16	9	2-1/4
6	25-9/16	22-1/4	20-3/4	1/4	8-7/16	11-3/4	7-5/8	10-3/8	6-13/16	11-5/16	7-5/8	2-11/16	1-7/16	7-1/2	10	5-1/2	3	7-3/16	9	2-1/4
PLAIN TROLLEY, SPARK-RESISTANT																				
1/4	–	11-3/4	11	5/16	–	7	4-1/16	4-7/8	–	–	4-1/2	1-9/16	7/8	4-5/16	–	2-1/2	1-1/4	2-7/8	3-5/8	3/8
1/2	–	11-3/4	11	5/16	–	7	4-1/16	4-7/8	–	–	4-1/2	1-9/16	7/8	4-5/16	–	2-1/2	1-1/4	2-7/8	3-5/8	3/8
1	–	13	12	5/16	–	7	4-3/8	5-1/8	–	–	4-3/4	1-1/4	1-3/32	4-3/8	–	2-1/2	1-1/4	3-3/4	5	1
1-1/2	–	16-1/4	14-1/4	1/4	–	8-1/4	4-1/2	5-1/2	–	–	5	1-3/4	1-1/8	5	–	3	1-1/2	4-1/2	6	1
2	–	16-1/4	14-1/4	1/4	–	8-1/4	4-1/2	5-1/2	–	–	5	1-3/4	1-1/8	5	–	3	1-1/2	4-1/2	6	1
3	–	18-3/4	17-1/2	1/4	–	9-1/2	6-1/2	8-1/32	–	–	6	2-1/16	1-11/32	6	–	3-3/4	2	6-3/8	8	1-1/8
4	–	18-3/4	17-1/2	1/4	–	9-1/2	6-1/2	8-1/32	–	–	6	2-1/16	1-11/32	6	–	3-3/4	2	6-3/8	8	1-1/8
5	–	22-3/4	20-3/4	3/16	–	11-3/4	7-5/8	10-3/8	–	–	7-5/8	2-11/16	1-7/16	7-1/2	–	5-1/2	3	7-3/16	9	2-1/4
6	–	22-3/4	20-3/4	3/16	–	11-3/4	7-5/8	10-3/8	–	–	7-5/8	2-11/16	1-7/16	7-1/2	–	5-1/2	3	7-3/16	9	2-1/4
GEARED TROLLEY, SPARK-RESISTANT																				
1/4	15-3/8	12-3/4	12	1/4	5-1/8	7	4-1/16	4-7/8	4-7/19	9-1/8	4-1/2	1-9/16	7/8	4-5/16	7-7/8	2-1/2	1-1/4	2-7/8	4	3/8
1/2	15-3/8	12-3/4	12	1/4	5-1/8	7	4-1/16	4-7/8	4-7/19	9-1/8	4-1/2	1-9/16	7/8	4-5/16	7-7/8	2-1/2	1-1/4	2-7/8	4	3/8
1	15-13/16	13-1/2	12-7/8	5/16	5-5/16	7	4-3/8	5-1/8	4-7/16	9-1/8	4-3/4	1-1/4	1-3/32	4-3/8	7-7/8	2-1/2	1-1/4	3-3/4	5	1
1-1/2	17-3/4	16-1/4	14-1/4	1/4	5-7/16	8-1/4	4-1/2	5-1/2	4-13/16	8-3/4	5	1-3/4	1-1/8	5	7-7/8	3	1-1/2	4-1/2	6	1
2	17-3/4	16-1/4	14-1/4	1/4	5-7/16	8-1/4	4-1/2	5-1/2	4-13/16	8-3/4	5	1-3/4	1-1/8	5	7-7/8	3	1-1/2	4-1/2	6	1
3	20-1/4	18-3/4	17-1/2	1/4	6-5/8	9-1/2	6-1/2	8-1/32	5-7/8	9-3/4	6	2-1/16	1-11/32	6	8-1/2	3-3/4	2	6-3/8	8	1-1/8
4	20-1/4	18-3/4	17-1/2	1/4	6-5/8	9-1/2	6-1/2	8-1/32	5-7/8	9-3/4	6	2-1/16	1-11/32	6	8-1/2	3-3/4	2	6-3/8	8	1-1/8
5	25-9/16	22-1/4	20-3/4	1/4	8-7/16	11-3/4	7-5/8	10-3/8	6-13/16	11-5/16	7-5/8	2-11/16	1-7/16	7-1/2	10	5-1/2	3	7-3/16	9	2-1/4
6	25-9/16	22-1/4	20-3/4	1/4	8-7/16	11-3/4	7-5/8	10-3/8	6-13/16	11-5/16	7-5/8	2-11/16	1-7/16	7-1/2	10	5-1/2	3	7-3/16	9	2-1/4

NOTE: Dimensions based on standard beams at maximum flange width.

* Dimension will vary with beam size

** Minimum under-the-beam clearance not necessarily at point indicated. Dimension will also vary with beam size

ZEPHYR ACCESSORIES

Standard and custom accessories are available for most Chester Zephyr hoist and trolley models. When accessories other than those shown in this catalog are required, contact your Columbus McKinnon sales representative.

TROLLEY TRACK LOCKS

Quick-acting trolley track locks can be supplied with any Chester Model PT trolley or Zephyr trolley hoist. Locks are available as trailer type or built into the trolley. Lever operation, or chain actuated as shown, is optional. Chester track lock jaws are made of steel and grooved to bite and hold firmly to the flange of the runway beam. Jaws will hold with a fully loaded trolley (up to 1,500 lb. in-line pull). Lock is designed to prevent additional load pressures from being applied to the trolley wheels when lock is actuated. Track clamps are available with optional stainless steel jaws and hand chain for spark-resistant applications.



OVERLOAD LIMITERS

Overload limiters are available as an option on all Chester Zephyr hand chain hoists. This “slip clutch” device will allow the hoist to lift its rated load, but is designed to prohibit lifting an overload that could cause damage to the hoist. Overload limiters do not increase the envelope dimensions of the hoist.

CHAIN CONTAINERS

Chain containers are designed to receive idle load chain as it reeves over the load sheave when lifting a load. This prevents the idle chain from interfering or marring and scratching the load or surrounding surfaces. Compact design helps maintain best possible headroom. Containers are available for most Chester hoist models.




BULK HAND CHAIN

Bulk hand chain is available in zinc-plated steel, aluminum and stainless steel to suit nearly any application. This chain can be purchased by the lineal foot and is also available in barrel lengths, providing considerable cost savings versus standard per-foot pricing.

SWINGING HAND WHEEL GUARDS

Used in conjunction with a hand wheel, swinging hand wheel guards help keep the chain seated in the pocketed hand wheel, but also pivots freely on the hand wheel shaft to allow the hand chain to move freely. Guards are available in cast iron or aluminum. Cast iron guards can be supplied with copper plating or electro-less nickel plating for special applications.

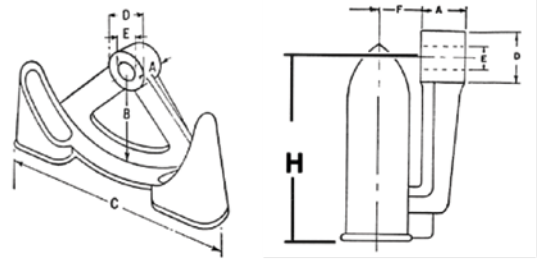


DIMENSIONS

Catalog Number	Dimensions (in.)							Net Weight (lbs.)
	A	B	C	D	E Standard Bore*	F	H	
REGULAR UNITS								
C-37175 (7 PG)	1	2-3/4	5-11/16	1-1/2	7/8	11/16	3-3/8	1-1/2
C-9121-0075 (8 PG)	1-1/4	3-3/4	8-3/4	2	7/8	1-1/8	4-1/16	3-1/2
C-9121-0100 (12 PG)	1-3/8	4-7/8	11-1/8	1- 13/16	7/8 & 1-1/4	13/16	5-3/8	5
C-9121-0150 (15 PG)	1-3/4	4-15/16	13-1/2	2-1/4	7/8 & 1-1/4	1	6-7/8	7
C-9121-1000 (20 PG)	1-3/4	7-3/8	17-1/16	2-1/4	1-1/4	1	8-1/8	11
C-9121-2500 (25 PG)	1-3/4	9	21-3/8	2-3/4	1-1/4 & 1-3/8	1	9-15/16	13

* Special dimensions can be furnished.

POCKETED HAND WHEELS

Pocketed hand wheels are designed for use with the same hand chains used on our Zephyr hand hoists. Hand chain wheels are made of durable ductile cast iron and are available in a variety of finishes, including zinc plating, nickel plating and oil-based enamel or epoxy paint.

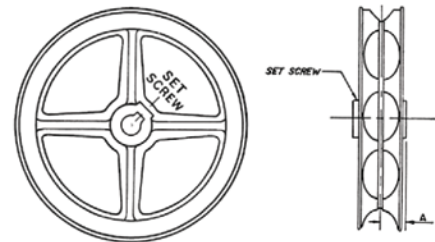

DIMENSIONS

Catalog Number	Dimensions (in.)									Net Weight (lbs.)
	Chain Size	Pitch Diameter	Outside Diameter	Regular Bore *	Max. Bore *	Regular Keyway	Length through Hub	Hub Diameter	A**	
REGULAR UNITS										
C-36072 (7 P)	5MM	4-1/16	5	7/8	1	1/4 x 1/8	1-7/32	1-3/4	39/64	3-1/4
C-9120-0075 (8 P)	1/4	5-1/4	7	7/8	1-1/4	1/4 x 1/8	1-7/8	1-11/16	1	4-1/2
C-9120-0100 (12 P)	1/4	8-1/4	9-5/16	7/8 & 1-1/4	1-1/4	1/4 x 1/8	1-29/32	1-3/4	3/4	9
C-9120-0150 (15 P)	1/4	10	11-5/16	7/8 & 1-1/4	1-3/4	1/4 x 1/8	1-7/8	2-3/8	15/16	12
C-9120-1000 (20 P)	1/4	13-3/8	14-3/8	1-1/4	1-3/4	5/16 x 5/32	1-7/8	2-3/8	15/16	22
C-9120-2500 (25 P)	1/4	16-5/8	17-3/4	1-1/4 & 1-3/8	2	5/16 x 5/32	2-3/4	2-3/4	15/16	32

* Non-Standard bore available. Contact Factory.

** Center-line of hand chain to back.



Tiger

Product Catalogue

Tiger hoisting, clamping, winching, and height safety ranges

V1.1 | 2021 | tigerlifting.com



Adjustable trolley



Plain APT

Our high quality, heavy-duty, easy to adjust trolleys allow you to suspend a lifting appliance or load and easily transport it along the length of a beam.

If you need a wider beam range or have specific head room requirements please contact us for bespoke solutions.

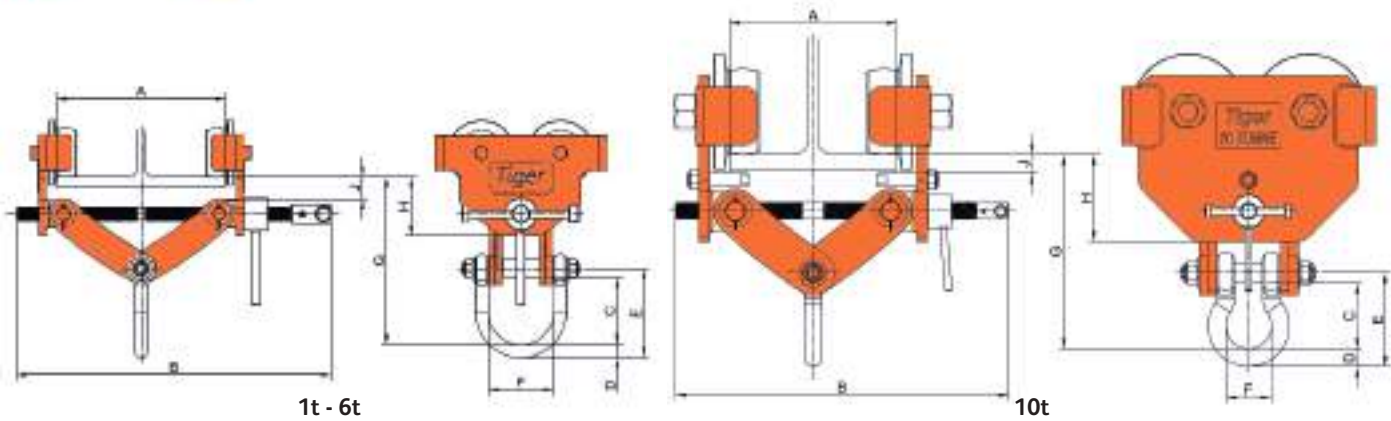

- Fitted with a screw spindle which allows easy adjustment and high clamping force to the various flange sizes within its capacity
- Designed to provide smooth and easy traversing
- The anti-drop plates design ensures extra safety and prevents damage to the wheels when contacting end rail stoppers
- Wheels run on sealed ball bearings for smoother rolling with less effort and maintenance
- Range from 1.0t to 10.0t
- Operating temperature of -40°C to +80°C (temperature range of -60°C to +80°C available as an option)
- The 5:1 factor of safety allows for use with manual or powered hoists
- These units meet and exceed all the requirements within BS EN 13157: 2004+A1:2009 and AS1418.2.


Product Code	Type	Capacity (tonne)	Track width range (mm)	Dimensions (mm)								Min. curve ratio (m)	Net Weight (kg)
			A	B	C	D	E	F	G	H	J		
APT-0100	Plain	1.0	75-210	391	83	16	110	81	255-208	73	27	1.0	9.5
APT-0200	Plain	2.0	75-210	391	94	18	123	89	276-227	79	38	1.3	13.5
APT-0300	Plain	3.0	75-210	403	105	22	141	112	288-241	99	35	1.5	23.0
APT-0600	Plain	6.0	105-305	521	111	27	151	125	358-290	115	46	1.5	35.5
APT-1000	Plain	10.0	160-305	606	119	32	170	83	407-352	157	33	2.7	110.0

Adjustable trolley




Geared AGT


HOISTING

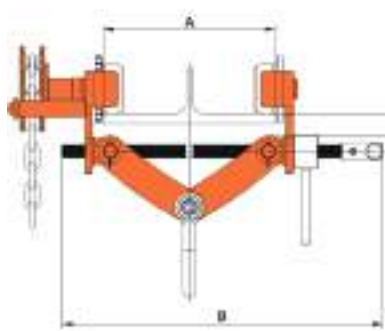

1t-6t



10t

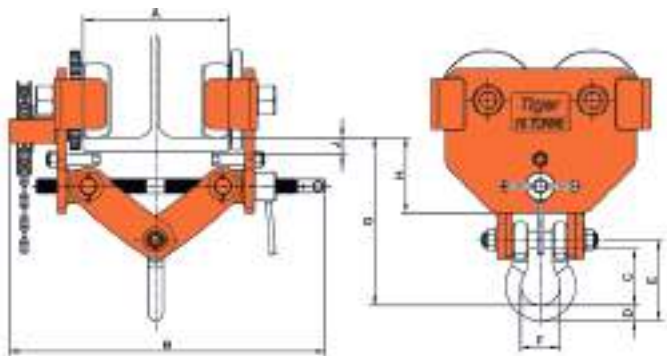

Product Code	Type	Capacity (tonne)	Track width range (mm)	Dimensions (mm)								Min. curve ratio (m)	Net Weight (kg)
			A	B	C	D	E	F	G	H	J		
AGT-0100	Geared	1.0	75-210	391	83	16	110	81	255-208	73	27	1.0	13.0
AGT-0200	Geared	2.0	75-210	391	94	18	123	89	276-227	79	38	1.3	17.0
AGT-0300	Geared	3.0	75-210	403	105	22	141	112	288-241	99	35	1.5	28.5
AGT-0600	Geared	6.0	105-305	521	111	27	151	125	358-290	115	46	1.5	40.0
AGT-1000	Geared	10.0	160-305	606	119	32	170	83	407-352	157	33	2.7	120.0

Standard geared trolley hand chain length - 2.5m. We can change the length to suit your requirements.

If you need a wider beam range or have specific head room requirements please contact us for bespoke solutions.

Trolley TP/TG



- Plain trolley range from 500kg to 10.0t
- Geared trolley range from 500kg to 35.0t
- The anti-drop plates design ensures extra safety and prevents damage to the wheels when contacting end rail stoppers
- Extended beam width available
- Corrosion or spark resistant versions available
- Tiger trolley wheels are specially designed with a convex profile eliminating potential point loading
- The wheels run on sealed ball bearings for smoother rolling with less effort and maintenance
- Operating temperature of -40°C to +80°C (temperature range of -60°C to +80°C available as an option)
- Optional beam locking device
- The 5:1 factor of safety allows for use with manual or powered hoists.

Corrosion or spark resistant versions available.




Plain trolley

If you need a wider beam range or have specific head room requirements please contact us for bespoke solutions.

Single bar

Twin bar

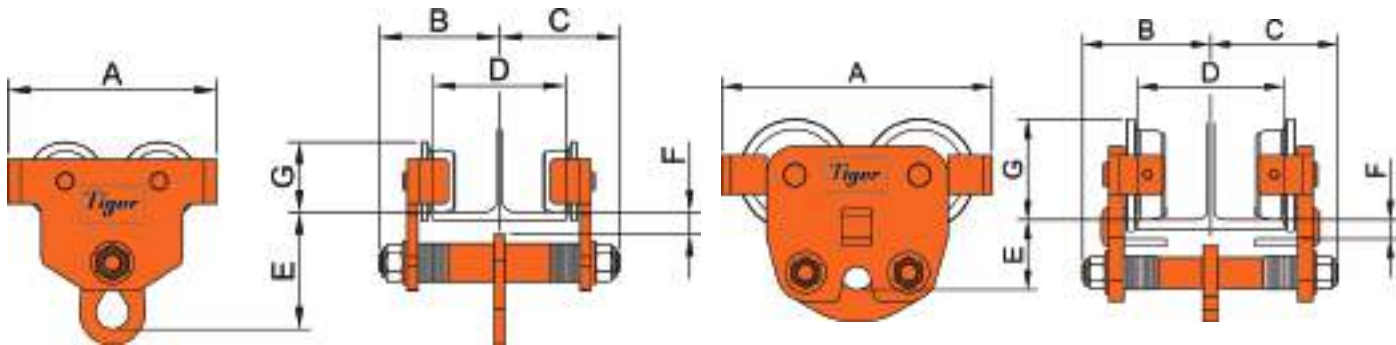


	Product Code	Capacity (tonne)	D-Track width #		Dimensions (mm)										Min. curve ratio (m)	Net Weight (kg)
			Range 1 (mm)	Range 2 (mm)	A	A+	B	C	E	F	G	H	J	K		
Single Bar Trolleys	TPS-0050	0.5	62-128	62-203	195	235	106	106	98	20	64	10	24	30	0.8	5.0
	TPS-0100	1.0	62-128	62-203	213	253	113	113	106	20	71	10	28	34	1.0	7.5
	TPS-010W	1.0	106-305	N/A	236	284	210	210	132	25	80	12	38	45	1.3	TBA
	TPS-0200	2.0	88-154	88-230	236	284	136	136	132	25	80	12	38	45	1.3	12.0
	TPS-0300	3.0	87-153	87-230	275	323	146	146	150	25	97	13	42	52	1.5	19.5
	TPS-0500	5.0	106-194	106-305	323	371	169	169	174	30	117	16	46	60	1.5	30.5
Twin Bar Trolleys*	TPT-0300	3.0	87-153	87-230	320	368	142	142	82	16	110				1.5	22.0
	TPT-0500	5.0	106-194	106-305	352	400	167	166	91	24	131				1.5	35.5
	TPT-1000	10.0	125-320	N/A	346	394	243	243	210	40	117				1.5	68.0
	TPT-1500	15.0	150-320	N/A	461	509	271	271	248	42#	182				2.7	144.0


Notes:
A+ is the width with optional bumpers
B and C are minimum widths for range 1
Trolleys with locking devices will have different beam width ranges-please contact us for details.
H is the thickness of the anchor point, J is the width of the anchor point opening and K is the height of the anchor point opening.
* 0.5-2t twin bar available as special orders-minimum order size 100 each size-please contact us for details.
A beam flange thickness up to 50 mm can be accommodated if required-please ask for more information.
Please contact us for track widths outside of these ranges.

Geared trolley


Single bar

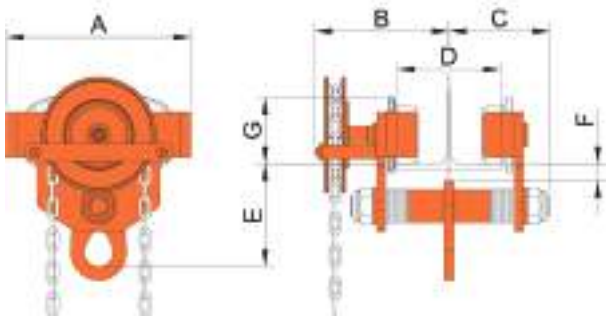

Twin bar

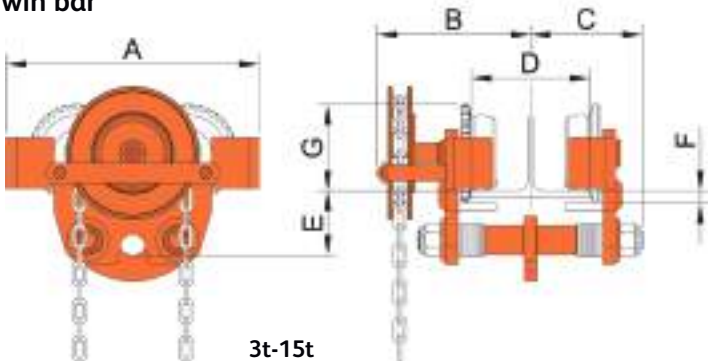

3t-15t

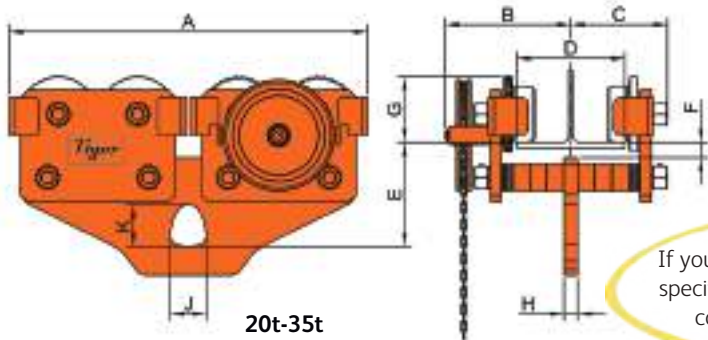

20t-35t



Optional beam locking device

Smaller minimum curve ratios may be available - contact us for details.

If you need a wider beam range or have specific head room requirements please contact us for bespoke solutions.

	Product Code	Capacity (tonne)	D-Track width #		Dimensions (mm)										Min. curve ratio (m)	Net Weight (kg)
			Range 1 (mm)	Range 2 (mm)	A	A+	B	C	E	F	G	H	J	K		
Single Bar Trolleys	TGS-0050	0.5	62-128	62-203	195	235	180	106	98	20	64	10	24	30	0.8	9.0
	TGS-0100	1.0	62-128	62-203	213	253	180	113	106	20	71	10	28	34	1.0	11.0
	TGS-010W	1.0	106-305	N/A	236	284	269	210	132	25	80	12	38	45	1.3	TBA
	TGS-0200	2.0	88-154	88-230	236	284	193	136	132	25	80	12	38	45	1.3	16.5
	TGS-0300	3.0	87-153	87-230	275	323	198	146	150	25	97	13	42	52	1.5	24.5
	TGS-0500	5.0	106-194	106-305	323	371	216	169	174	30	117	16	46	60	1.5	35.5
Twin Bar Trolleys*	TGT-0300	3.0	87-153	87-230	320	368	194	142	82	16	110				1.5	23.5
	TGT-0500	5.0	106-194	106-305	352	400	216	166	91	24	131				1.5	40.0
	TGT-1000	10.0	125-320	N/A	346	394	282	243	210	40	117				1.5	78.0
	TGT-1500	15.0	150-320	N/A	461	509	338	271	248	42 ‡	182				2.7	161.0
	TGT-2000N	20.0	125-320	N/A	706	754	282	243	231	40 ‡	117	30	85	95	6.0	160.0
	TGT-2500N	25.0	125-320	N/A	706	754	282	243	265	40 ‡	117	35	100	115	6.0	170.0
	TGT-3000N	30.0	150-320	N/A	961	1009	335	274	288	42 ‡	182	35	100	115	6.0	337.0
	TGT-3500N	35.0	150-320	N/A	961	1009	335	274	288	42 ‡	182	38	100	115	6.0	341.0

See left for notes

Industrial screw trolley

SPT/SGT




- Range from 500kg to 5.0t
- The wheels run on sealed bearings for smoother rolling with less effort and maintenance
- Geared type with hand chain length to suit your requirements
- The 4:1 factor of safety allows for use with manual or powered hoists
- The anti-drop plates design ensures extra safety, and also prevents damage to the wheels when contacting end rail stoppers

Each unit comes fully certified with a test certificate or an EC Declaration of Conformity stating compliance with the essential health and safety requirements of the Machinery Directive 2006/42/EC.



Screw push trolley

Product Code	Capacity (tonne)	Dimensions (mm)								Net Weight (kg)
		Beam Range M	A	B	C	E	F	K	L	
SPT-0050	0.5	50-220	300	210	190	33	3	25	30	7.0
SPT-0100	1.0	64-220	300	260	211	31	3	30	35	10.0
SPT-0200	2.0	88-220	310	310	236	32	3	40	47	15.5
SPT-0300	3.0	102-220	320	390	295	46	3	48	58	26.0
SPT-0500	5.0	114-220	330	450	334	47	3	60	70	38.0

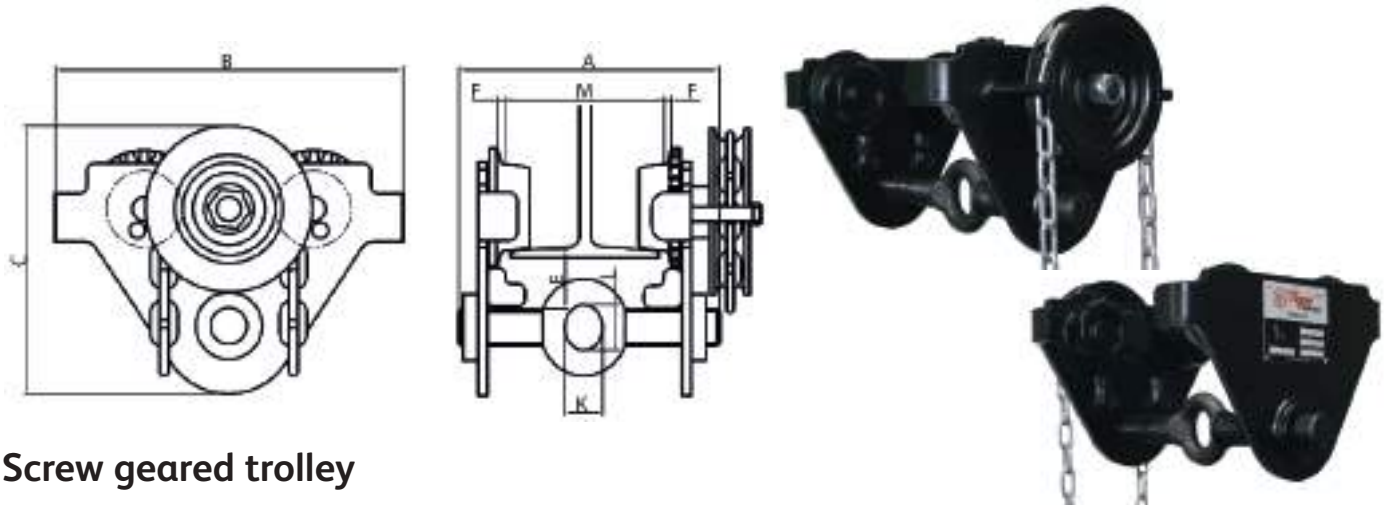

Screw geared trolley

Product Code	Capacity (tonne)	Dimensions (mm)								Net Weight (kg)
		Beam Range M	A	B	C	E	F	K	L	
SGT-0050	0.5	50-220	300	210	190	33	3	25	30	9.0
SGT-0100	1.0	64-220	300	260	211	31	3	30	35	13.0
SGT-0200	2.0	88-220	310	310	236	32	3	40	47	20.5
SGT-0300	3.0	102-220	320	390	295	46	3	48	58	30.0
SGT-0500	5.0	114-220	330	450	334	47	3	60	70	45.0

Spark resistant trolley



Ex II 2 GD c IIC T4 IIIC T135°

In many areas of industry, plants are operated with potentially explosive atmospheres. Due to the very high risk to personal and other assets, extremely strict guidelines and technical requirements are in place in explosive zones.

Tiger Spark Resistant products are manufactured in accordance with ATEX Directive 2014/34/EU and the Machinery Directive 2006/42/EC.

Our products are lightweight and durable with a proven track record.

Plain and geared trolleys available.

- Range from 500kg to 35.0t
- Solid bronze trolley wheels
- Rubber buffers for trolleys
- Copper plated hand wheel and stainless steel hand chain (geared trolley)
- Copper plated hanging plate
- Special corrosion protected body
- Combination block and trolley units available
- Optional Beam locking device
- Operating temperature -40°C to +80°C (temperature range of -60°C to +80°C available as an option)



HOISTING



If you need a wider beam range or have specific head room requirements please contact us for bespoke solutions.

It is the responsibility of the user to identify which explosion proof classification is required, not the hoist manufacturer or supplier.

Certification:

Under the ATEX Directive 2014/34/EU, equipment for areas with an explosion hazard is assigned to groups, categories and temperature classes. Our products are assigned as follows:

Ex II 2 GD c IIC T4 IIIC T135°C

Suitable for gas and dust hazardous areas: Zone 1 & 2 (gas) and Zone 21 & 22

Dimension data available on pages 40 - 41

Ex II 2 GD c IIC T4 IIIC T135°C

II	2	GD	c	IIC	T4	IIIC	T135°C	
								T135°C Dust Temperature Class: Maximum external surface temperature 135°C
								IIIC Groups of Dust: Protected for group IIIC which includes groups IIIA & IIIB
								T4 Gas Temperature Class: Maximum external surface temperature 135°C
								IIC Gas Explosion Group: Protected for group IIC which includes groups IIA & IIB
								c Protection type: Design safety
								GD Ex Atmosphere: Gas and Dust
								2 Category: High Safety
								II Equipment Group: surface industries


Universal beam clamp BCU



The Tiger Universal Beam Clamp Model No BCU has been designed not only for vertical use, but also for side load applications, where conventional clamps are not suitable. This clamp is highly flexible in application and can be used for lifting, pulling or as a semi-permanent anchor point.

It can be loaded at any angle and eliminates the use of spreader beams in various lifting operations.

- Suitable for pulling and lifting at angles across the beam
- Designed for both vertical and side loading applications - can be loaded at any angle
- Full rated capacity at any lifting angle

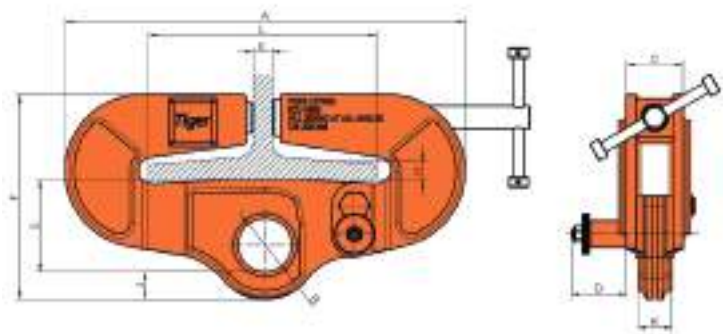

Warning: Do not exceed working load limits or use this equipment for lifting flat plate sections

- 2.0t, 3.0t, 5.0t and 10.0t capacities available
 - *NEW* 10t deep flange option (to 40mm)
 - Quick and versatile rigging point for hoisting equipment
 - Low headroom design
 - Highly flexible – for lifting, pulling or as a semi-permanent anchor point
 - Designed to accommodate a wide range of beam widths
 - Multi directional adjusting screw spindle ensures a high clamping force to the beam web
- Operating temperature -40°C to +80°C (temperature range of -60°C to +80°C available as an option)
 - Factor of safety: 5:1 for straight pulling and lifting, 4:1 at all other angles
 - Complies with ASME B30.20 and EN13155:2003+A2 :2009

If you need a wider beam range or have specific head room requirements please contact us for bespoke solutions.

Product Code	Capacity (tonne)	Dimensions (mm)											Net Weight (kg)
		A	B	C	D	E	F	G	H	J	K	L	
BCU-0200	2.0	337	58	60	68	32	203	88.5	25.5	22.5	20	76-190	10.0
BCU-0300	3.0	387	60	70	63	32	235	100	25.5	28	20	125-204	15.5
BCU-0500	5.0	524	70	74	72	32	268	120	25.5	36	44	125-305	27.0
BCU-1000	10.0	524	70	75.5	82	32	278	120	25.5	38	51.5	125-305	31.0
BCU-100D	10.0	539	76	75.5	82	47	286	120	40	38	51.5	125-305	33.0

Bulb flat bar anchor clamp BCB


The Tiger BCB bulb bar anchor is designed for attaching to bulb profiles of bulb flat bars approved for lifting applications. These are often found in ship compartments, engine rooms and overhead bridge deck structures. The bulb bar anchor provides a quick and versatile, semi-permanent lifting point. The large integrated shackle gives easy connection for all different types of lifting machines.

Each unit comes fully certified with a test certificate or an EC Declaration of Conformity stating compliance with the essential health and safety requirements of the Machinery Directive 2006/42/EC.

Please note that this model must NOT be used for lifting beams. It is a suspension point.

- 1.5t and 3.0t capacities available
- Quick and versatile rigging point for hoisting equipment when attached to bulb flat bars approved for lifting applications
- Shackle suspension point
- No tools required-integrated adjusting screw spindle
- Operating temperature -40°C to +80°C (temperature range of -60°C to +80°C available as an option)
- Up to 45° side loading with no deration
- 15° cross loading with no deration
- Factor of safety: 5:1 for straight pulling and lifting, 4:1 at other angles stated above
- These units meet and exceed all the requirements within BS EN 13155:2003+A2:2009

Product Code	Capacity (tonne)	Dimensions (mm)							Net Weight (kg)
		A	B	C	D	E	F	G	
BCB-0150	1.5	160-240	35	173-200	125-151	58	71	22	3.6
BCB-0300	3.0	240-320	42	214-241	155-182	68	94	25	6.4

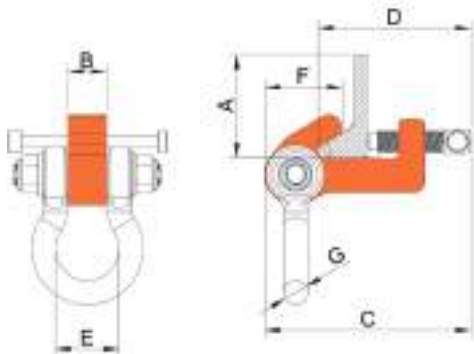


CLAMPING

Adjustable angle beam clamp BCA

This BCA clamp serves as an anchor or lifting point when attached to an overhead steel angle section approved for lifting applications. This clamp can be used up to a maximum of 15° from the vertical.

- 1.0t and 3.0t capacities available
- V shaped clamping jaws ensures safe and secure grip
- Designed to accommodate a wide range of steel angle sections
- No tools required – integrated adjusting screw spindle
- Operating temperature -40°C to +80°C (temperature range of -60°C to +80°C available as an option)
- Shackle suspension point
- Factor of safety: 5:1 for straight pulling and lifting, 4:1 at other angles stated
- These units meet and exceed all the requirements within BS EN 13155:2003+A2:2009 and AS4991

Product Code	Capacity (tonne)	Dimensions									Net Weight (kg)
		A	B	C	D	E	G	H	J	K	
BCA-0100	1.0	6	76.5	81	83	206	15	258	16	38-101	5.5
BCA-0300	3.0	10	106.5	112	104	343	25	490	22	101-203	23.5

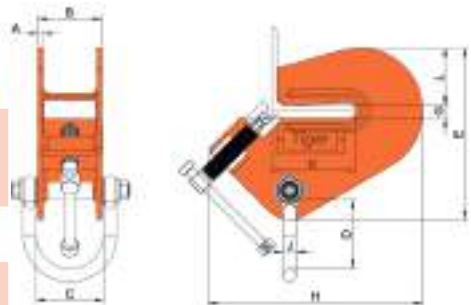

Fixed jaw heavy duty beam clamp with shackle BCF



- Range from 1.0t to 30.0t
- *NEW* 6.0t and 10.0t models available to suit extra wide flange beams
- Quick and versatile rigging point for hoisting equipment
- Shackle suspension point
- Suitable for pulling and lifting at angles across the beam
- Up to 90° side loading with no deration
- 15° cross loading with no deration
- Highly flexible- for lifting, pulling or as a semi-permanent anchor point
- Evenly distributed loads achieved through maximum jaw surface area
- Multi directional adjusting screw spindle ensures a high clamping force to the various flange sizes within its capacity
- Beam width range 75mm to 457mm
- Optional locking device for 1t -10t (as standard on 15t - 30t)
- Operating temperature -40°C to +80°C (temperature range of -60°C to +80°C available as an option)
- Factor of safety: 5:1 for straight pulling and lifting, 4:1 at other angles stated above
- These units meet and exceed all the requirements within BS EN 13155:2003 + A2:2009 and AS4991

No deration up to 90° has been established for Tiger BCF model clamps and applies only for overhead beam attachments. It DOES NOT apply when used for lifting beams.

We advise that structural calculations are carried out on all beams and supporting steel work by qualified engineering departments to ensure safe operation.

Spark resistant beam clamp



Ex II 2 GD c IIC T4 IIIC T135°

In many areas of industry, plants are operated with potentially explosive atmospheres. Due to the very high risk to personal and other assets, extremely strict guidelines and technical requirements are in place in explosive zones.

Tiger Spark Resistant products are manufactured in accordance with ATEX Directive 2014/34/EU and the Machinery Directive 2006/42/EC.

Suitable for gas and dust hazardous areas: Zone 1 & 2 (gas) and Zone 21 & 22 (dust).

- Copper plated suspension shackle and adjusting bar
- Special corrosion protected coated body
- Optional beam locking device

Certification:

Under the ATEX Directive 2014/34/EU , equipment for areas with an explosion hazard are assigned to groups, categories and temperature classes. Our products are assigned as follows: Ex II 2 GD c IIC T4 IIIC T135°C

Ex II 2 GD c IIC T4 IIIC T135°C

II	2	GD	c	IIC	T4	IIIC	T135°C	
							T135°C	Dust Temperature Class: Maximum external surface temperature 135°C
							IIIC	Groups of Dust: Protected for group IIIC which includes groups IIIA & IIIB
							T4	Gas Temperature Class: Maximum external surface temperature 135°C
							IIC	Gas Explosion Group: Protected for group IIC which includes groups IIA & IIB
							c	Protection type: Design safety
							GD	Ex Atmosphere: Gas and Dust
							2	Category: High Safety
							II	Equipment Group: surface industries



Adjustable double ended clamp also available




Available with jaw protection




If you need a wider beam range or have specific head room requirements please contact us for bespoke solutions.

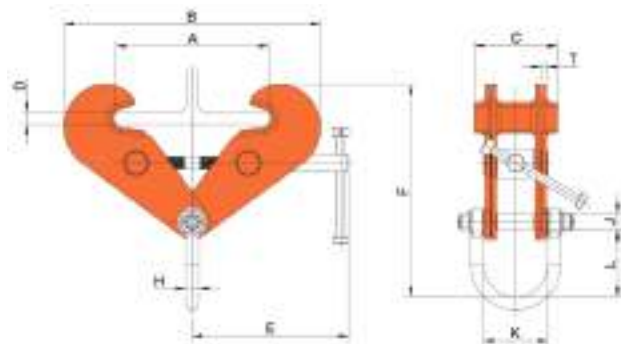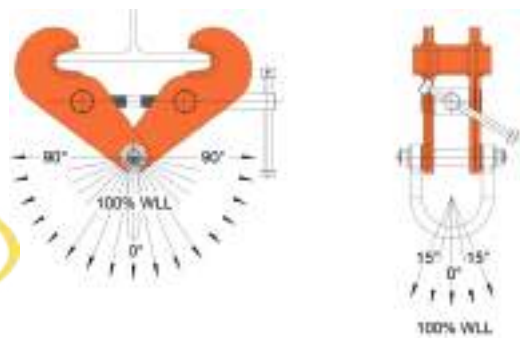


1t - 6t

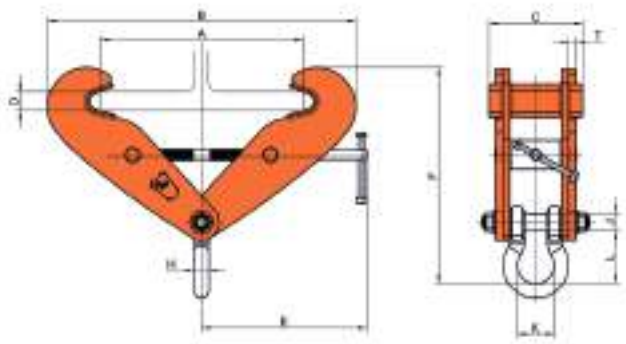

10t

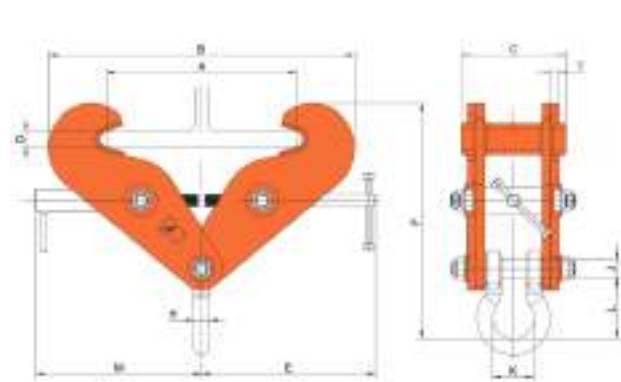

15t & 20t

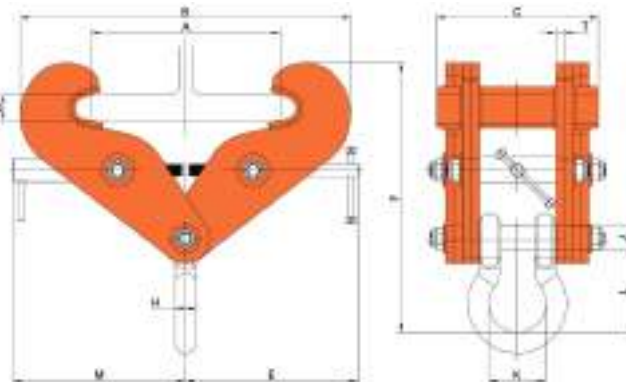

30t

Product Code	Capacity (tonne)	Dimensions (mm)												Net Weight (kg)
		A	B	C	D	E	F	H	J	K	L	M	T	
BCF-0100	1.0	75-195	206-321	105	20	195	300-266	16	21	80	84		6	5.5
BCF-0200	2.0	75-195	206-321	105	20	195	311-276	18	21	88	95		8	6.5
BCF-0300	3.0	100-350	223-476	140	25	270	418-344	22	27	110	105		10	12.0
BCF-030S	3.0	75-190	216-325	140	20	195	310-271	22	27	110	105		10	9.5
BCF-0500	5.0	100-310	223-450	140	25	288	424-362	27	27	124	111		12	14.5
BCF-050S	5.0	75-190	216-325	140	20	195	315-276	27	27	124	111		12	11.0
BCF-0600	6.0	203-457	411-691	140	42	370	558-470	27	27	124	111		12	29.0
BCF-1000	10.0	120-350	282-527	210	30	316	460-382	32	37	83	120		16	28
BCF-100W	10.0	203-457	415-694	210	42	370	572-485	32	37	83	120		16	44.5
BCF-1500	15.0	203-457	463-742	250	36	416	644-558	38	44	99	146	400	20	76
BCF-2000	20.0	203-457	471-768	300	50	416	697-608	45	49	126	179	408	24	100.0
BCF-3000	30.0	203-457	483-800	385	63	416	742-648	50	57	138	197	416	38	152.0

Adjustable beam clamp with shackle BCS





- Range from 1.0t to 10.0t
- Quick and versatile rigging point for hoisting equipment
- Shackle suspension point
- Highly flexible – for lifting, pulling or as an anchor point
- Multi directional adjusting screw spindle for easy attachment and safe and secure grip
- Wide Beam flange adjustment range
- Operating temperature -40°C to +80°C (temperature range of -60°C to +80°C available as an option)
- Factor of safety: 5:1 for straight pulling and lifting, 4:1 at angles up to 45° (applying the appropriate reduction in WLL)
- These units meet and exceed all the requirements within BS EN 13155:2003+A2:2009 and AS4991
- Optional locking device



Optional locking device

Angle from Vertical	0°	0°-15°	15°-30°	30°-45°
Reduction Factor	Nil	17%	34%	50%
Product Code	WLL (kg)			
BCS-0100	1,000	830	660	500
BCS-0200	2,000	1,660	1,320	1,000
BCS-0300	3,000	2,500	2,000	1,500
BCS-0500	5,000	4,100	3,300	2,500
BCS-1000	10,000	8,300	6,600	5,000

The above working load limits and derations have been established for Tiger BCS model clamps and apply only for the overhead beam attachments. They DO NOT apply when used for lifting beams.

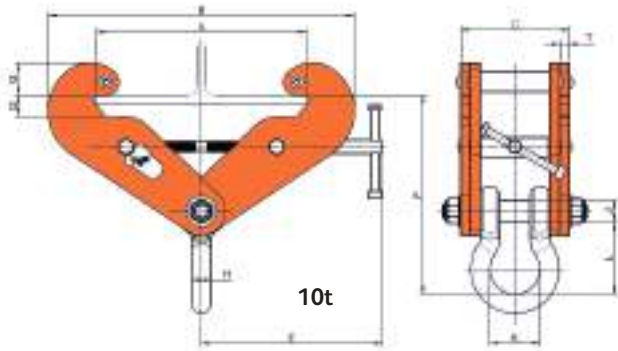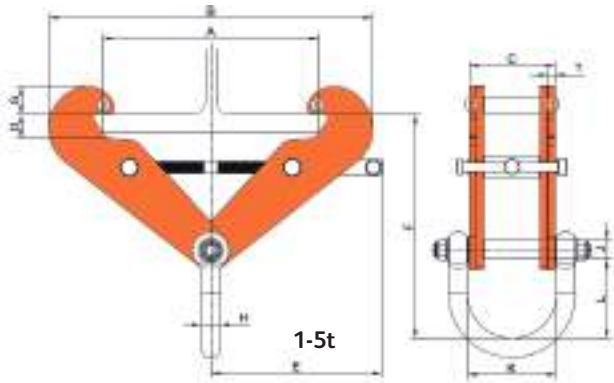


Product Code	Capacity (tonne)	Dimensions												Net Weight (kg)
		A	B	C	D	E	F	G	H	J	K	L	T	
BCS-0100	1.0	75-210	182-328	77	24	195	250-225	52-38	16	21	81	83	5	4.5
BCS-0200	2.0	75-210	182-328	85	24	195	260-236	52-38	18	21	89	94	6	5.5
BCS-0300	3.0	75-305	214-460	107	25	250	357-311	58-40	22	27	112	105	8	9.5
BCS-0500	5.0	75-305	214-460	121	25	250	363-315	58-40	27	27	125	111	10	11.0
BCS-1000	10.0	120-350	295-510	180	30	300	381-330	71-54	32	37	83	120	16	26.5

Adjustable beam clamp BC



- Range from 1.0t to 10.0t
- Quick and versatile rigging point for hoisting equipment
- Low headroom because of the built in anchor point
- Multi directional adjusting screw spindle for easy attachment and safe and secure grip
- Wide Beam flange adjustment range
- Operating temperature -40°C to +80°C (temperature range of -60°C to +80°C available as an option)
- Factor of safety: 5:1 - for straight pulling and lifting
- These units meet and exceed all the requirements within BS EN 13155:2003+A2:2009 and AS4991
- Optional locking device

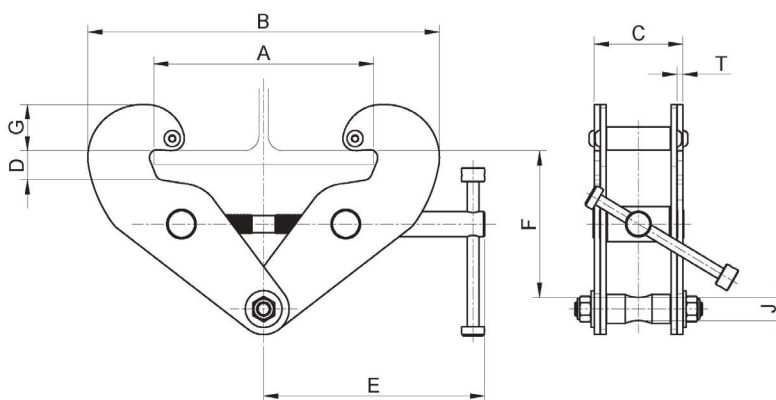

Product Code	Capacity (tonne)	Dimensions									Net Weight (kg)
		A	B	C	D	E	F	G	J	T	
BC-0100	1.0	75-210	182-328	77	24	195	144-117	52-38	20	5	4.0
BC-0200	2.0	75-210	182-328	85	24	195	144-117	52-38	20	6	4.5
BC-0300	3.0	75-305	214-460	107	25	250	224-179	58-40	22	8	8.0
BC-0500	5.0	75-305	214-460	121	25	250	224-175	58-40	28	10	10.0
BC-1000	10.0	120-350	295-510	182	30	300	222-171	71-54	43	16	24.5



Safety screw cam clamp CSS

The Tiger CSS safety screw cam clamp with Double Eye Anchor Points & Safety Torque Feature is suitable for many applications. This screw cam clamp is for all-purpose uses, such as lifting, lateral pulling and turning over materials. Adequacy of tightening can be visually confirmed by the visual torque safety feature.


- Spherical universal designed screw cam provides an extra powerful clamping force on a workpiece even when vibrations occur during operation
- Cam holder and collar have phosphorescent (glow-in-the-dark) paint for easy recognition of adequate torque tightening



Product Code	Capacity (tonne)	Jaw Opening (mm)	Dimensions (mm)										Net Weight (kg)
			L	L2	H	H1	H2	D1	D2	T1	T2	S	
CSS-0050	0.5	0-25	158	89	121	72	30	27	27	46	13	17	1.9
CSS-0100	1.0	0-40	208	121	161	94	45	32	32	54	14	21	3.6
CSS-0200	2.0	0-40	227	121	177	105	45	36	32	60	18	21	4.8
CSS-0320	3.2	0-40	252	136	196	119	50	45	35	64	20	21	7.0
CSS-0630	6.3	0-50	291	151	225	132	55	50	41	90	43	21	17.0

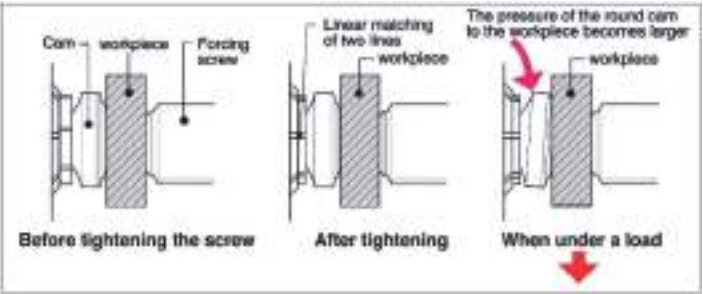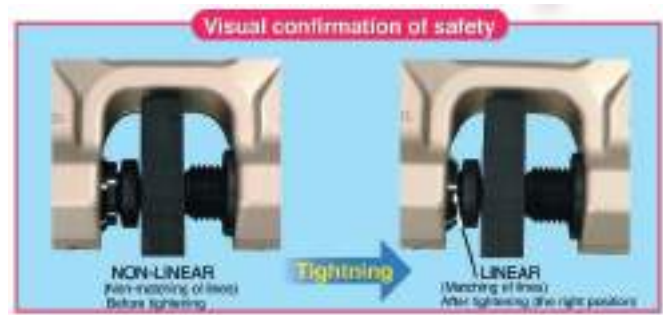

Examples of use:

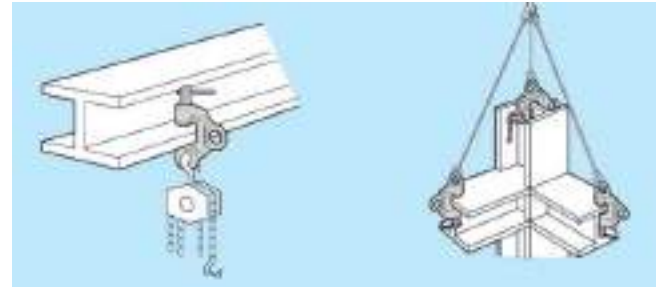

Always lift work pieces at two or more points for safety





ALL MATERIAL HANDLING
Lifting Equipment

Product Catalog #20





The Easiest Trolley Installation Ever

FEATURES

- ▶ ½ to 5t installation and adjustment by rotating the threaded hanger shaft.
- ▶ 10-30t installation from one side. Hanger shafts are fixed mounted to the opposite side plate.
- ▶ Trolleys up to 5t have a 5:1 design factor for use with powered or manual hoist. Trolleys 10t and greater have a 4:1 design factor and must be derated for use with powered hoist.
- ▶ Machined cast iron wheels with universal tread designed to fit flat or tapered beam flanges.
- ▶ Low headroom design with precision sealed “lubed for life” bearings assure smooth operation.
- ▶ Durable all steel construction with standard safety lugs.
- ▶ Geared trolley hand chain comes standard with 20 feet of drop.
- ▶ Meets: ASME/ANSI B30.16, OSHA, NASA-STD-8719.9, EU Directives: 2006/42/EC
- ▶ ATEX rated Ex II 3 GD c IIB 54° C X for limited use in hazardous environments.

Options:

- ▶ Extended hand chain drop (standard with 20 ft)
- ▶ Wide Flange Kits for ½-5t with 12” flange adjustment (may be ordered separately)




* Wide Flange Kit Specifications And Dimensions (inches & lbs)

WLL	For Model	Trolley w/Kit Weight (lbs)	B w/Kit	C w/Kit	Shaft Kit weight (lbs)	Wide Shaft Kit (Order Separately)
½t	PT005	19.1	14.8	6.3-12.01	5.1 lbs	PT005-FLG-12
1t	PT010	25.1	15.2		6.0 lbs	PT010-FLG-12
	GT010	36.1				
2t	PT020	42.2	15.6		9.0 lbs	PT020-FLG-12
	GT020	53.2				
3t	PT030	72.6	16.1		12.8 lbs	PT030-FLG-12
	GT030	85.6				
5t	PT050	97.8	16.3		17.9 lbs	PT050-FLG-12
	GT050	111.8				

* Refer to page 16 drawings




Before using these products; read and follow instructions in the operator's manual. Never exceed capacity. Do not use for lifting people or loads over people.

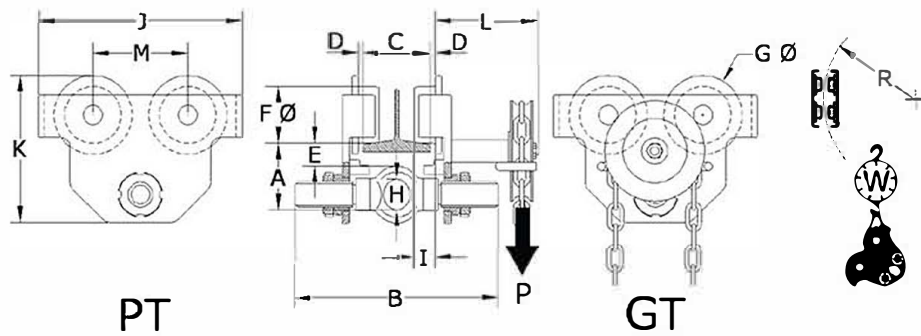

1/2 to 5 Metric ton PT & GT SERIES SPECIFICATIONS and DIMENSIONS (Inches and Pounds)

Base Model	WLL (5:1)	A	B1	B2	Standard C1	Wide Flg Kit C2	D	E	F	G	H	I	J	K	L	M	P* (lbs)	R Min	W1 (lbs)	W2 (Lbs)
PT005	1/2t	3.3	11.5	14.8	1.97-8.66	6.30-12.01	0-0.12	1.5	2.3	3.4	1.2	0.9	8.9	6.8	----	4.0	----	36	18	19
PT010	1t	3.7	11.8	15.2	2.28-8.66	6.30-12.01	0-0.12	1.7	2.4	3.7	1.4	0.9	9.9	7.4	----	4.8	----	40	24	25
GT010-20															4.5		18		35	36
PT020	2t	4.4	12.2	15.6	2.60-8.66	6.30-12.01	0-0.12	1.6	3.2	4.6	1.9	1.0	11.8	8.9	----	5.5	----	48	40	42
GT020-20															4.5		34		51	53
PT030	3t	5.8	12.8	16.1	2.91-8.66	6.30-12.01	0-0.12	2.5	3.9	5.5	2.3	1.3	14.2	11.4	----	6.3	----	52	69	72
GT030-20															5.3		27		83	85
PT050	5t	6.3	13.0	16.3	3.54-8.66	6.30-12.01	0-0.12	2.2	4.3	5.9	2.8	1.5	15.4	12.3	----	6.7	----	56	94	97
GT050-20															5.4		36		108	111

* Effort

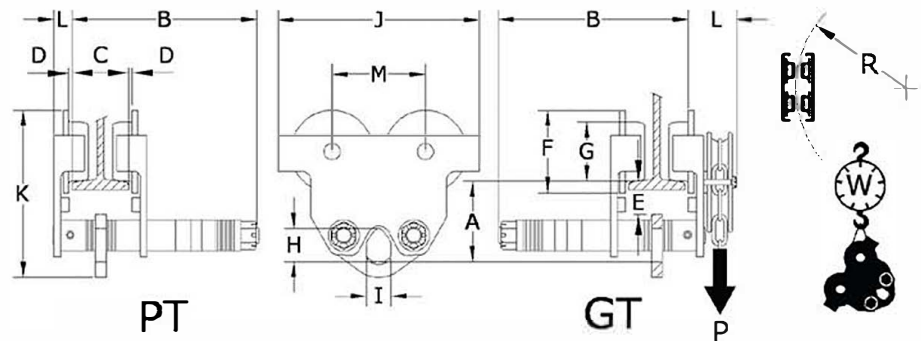

10 TO 30 Metric ton PT & GT SERIES SPECIFICATIONS (inches and pounds)


Base Model	WLL (4:1)	A	B	C	D	E	F	G	H	I	J	K	L	M	Effort P (lbs)	R Min	W (lbs)
PT100	10t	7.5	15.5	4.9-12	0.08-0.13	1.8	7.0	5.4	4.4	2.8	18.1	15.5	1.8	7.9	----	79	198
GT100-20													4.3		54		
PT160	16t	9.3	17.1	5.4-12	0.08-0.13	2.4	8.9	6.6	5.4	3.7	22.6	19.6	3.0	10.7	----	138	427
GT160-20													6.0		54		
GT200-20	20t	9.2	17.1	5.4-12	0.08-0.13	2.3	8.9	6.9	5.4	3.7	22.6	19.6	6.0	10.7	56	138	458
GT300-20	30t	11.2	17.8	6.9-12	0.08-0.13	2.7	11.2	9.1	6.1	4.1	28.7	24.4	6.2	13.5	56	236	848



PTL & GTL Trolley

Army Style Low Headroom Trolley

½ to 10 Metric ton Capacity

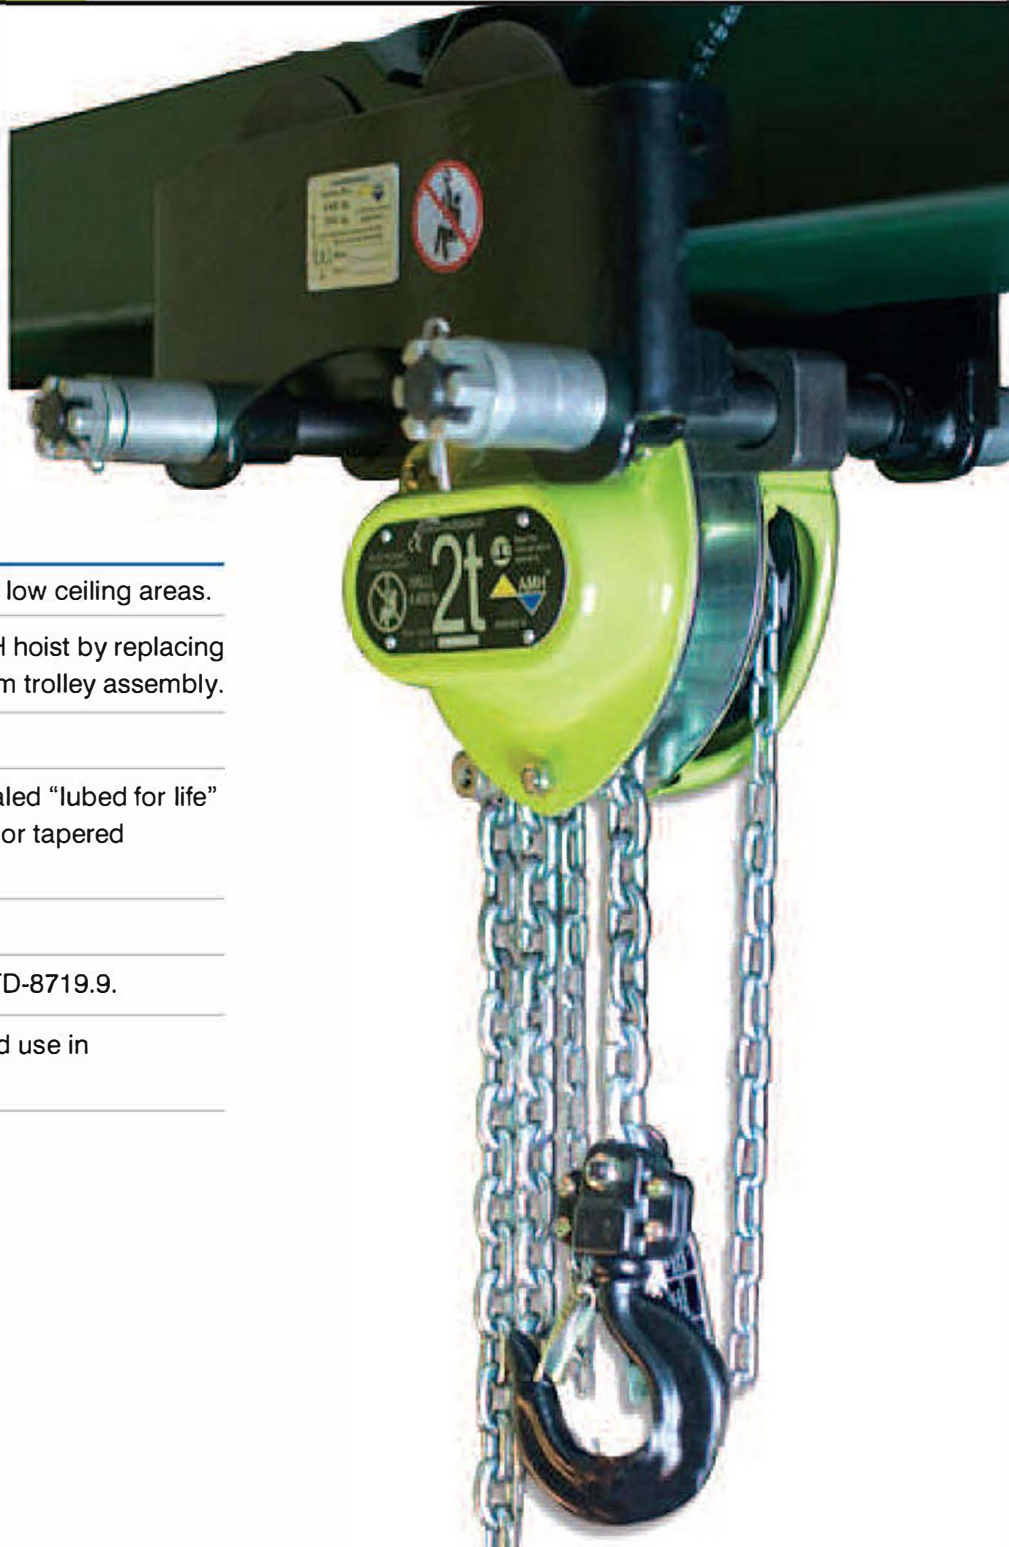


FEATURES

- ▶ Low headroom design increases lift height in low ceiling areas.
- ▶ Direct mount to any standard MA model AMH hoist by replacing the top hook assembly with the low headroom trolley assembly.
- ▶ Durable all steel construction.
- ▶ Machined cast iron wheels with precision sealed “lubed for life” bearings and universal tread design to fit flat or tapered beam flanges.
- ▶ Standard hand chain drop is 20 feet.
- ▶ Meets: ASME/ANSI B30.16, OSHA, NASA-STD-8719.9.
- ▶ ATEX rated Ex II 3 GD c IIB 54°C X for limited use in hazardous environments.
- ▶ **Options:** Extended hand chain drop.



Before using these products; read and follow instructions in the operator's manual. Never exceed capacity. Do not use for lifting people or loads over people.

Hoist and
Trolley Kit must
be purchased
separately.

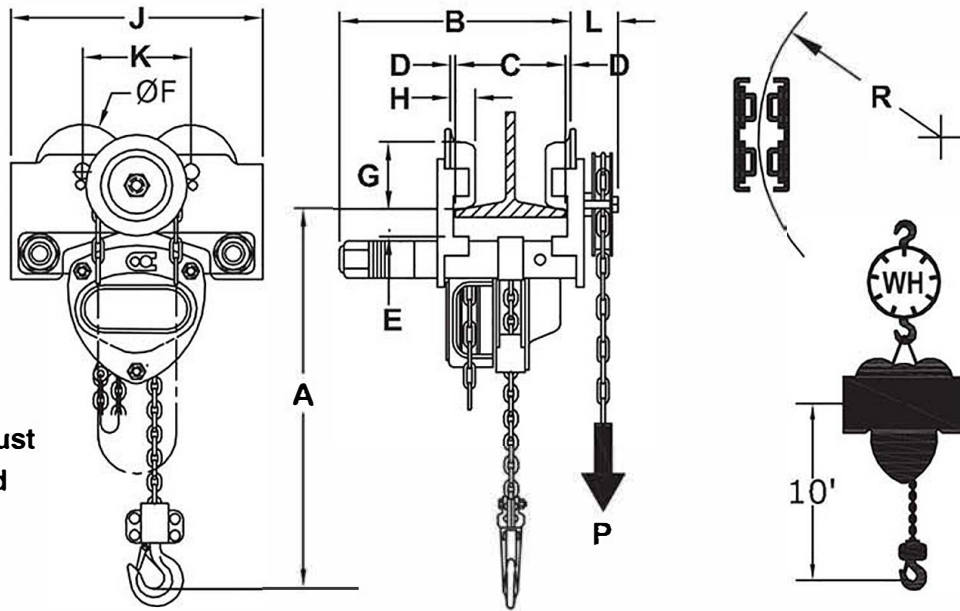

PTL & GTL SERIES SPECIFICATION AND DIMENSIONS (inches and pounds)

Model	WLL	A	B	C	D	E	F	G	H	J	K	L	P (lbs)	R Min	Includes Hoist W(lbs)
PTL005	1/2t	11.6	9.8	2.0-8.0	0.06-0.12	1.2	3.1	2.2	0.7	10.2	3.9	3.0	----	31	46
GTL005-20													6		57
PTL010	1t	13.0	14.0	2.5-12.0	0.06-0.12	1.5	3.8	2.7	0.8	11.5	5.0	3.1	----	35	51
GTL010-20													11		62
PTL020	2t	16.1	14.3	3.5-12.0	0.06-0.12	1.5	4.3	3.1	0.9	14.2	5.4	3.3	----	39	86
GTL020-20													20		97
PTL030	3t	19.0	14.7	3.9-12.0	0.06-0.12	1.7	5.2	3.9	1.1	16.9	6.2	3.4	----	47	158
GTL030-20													21		169
PTL050	5t	25.2	15.0	4.5-12.0	0.06-0.12	1.6	5.7	4.3	1.4	17.6	6.8	3.7	----	51	222
GTL050-20													31		233
PTL075	7.5t	26.9	15.6	4.9-12.0	0.08-0.14	1.8	7.0	5.4	1.6	25.2	7.9	4.3	----	79	324
GTL075-20													42		335
PTL100	10t	30.8	15.6	4.9-12.0	0.08-0.14	1.8	7.0	5.4	1.6	25.2	7.9	4.3	----	79	342
GTL100-20													54		353

How to Order, by descriptive model number

Example: Model GTL050 - 20

Base
Model

Drop

If assembly to a hoist is required then note on the order.




BC Clamp

Beam Clamps 1 to 10 Metric ton Capacity

FEATURES

- ▶ 5:1 design factor for use with powered or manual hoist.
- ▶ The easy way to install a fixed hoist mount or rigging point.
- ▶ Simple installation by hand, no tools required.
- ▶ Compact and portable low headroom design.
- ▶ Available with (BCD model) or without (BC model) a movable shackle.
- ▶ "Theatrical Black" color. All parts are a matte black color.
- ▶ Meets OSHA, ASME B30, NASA-STD-8719.9 and EU Directives: 2006/42/EC

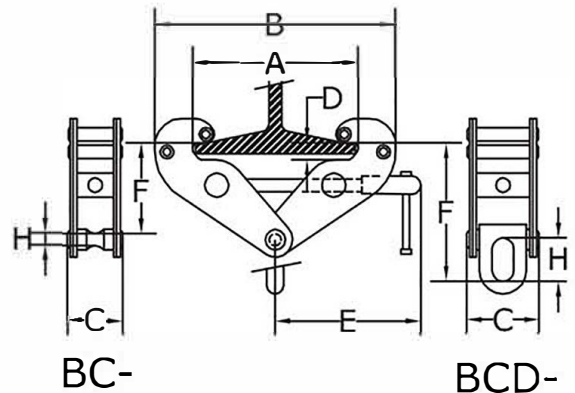

SPECIFICATION (Inches & Lbs)		(WLL) Capacity from Vertical				A" Adjustment	B" Max	C"	D"	E"	F" Max	H"	Weight Lbs.
		@0°	@15°	@30°	@45°								
1t	BC-01	2,200	0	0	0	3.1 - 9.6	14.6	3.7	0.75	7.8	5.6	0.8	7.7
	BCD-01	2,200	1,800	1,500	1,100					8.6	7.8	1.7	9.0
2t	BC-02	4,400	0	0	0	3.1 - 9.6	14.6	4.0	0.75	7.8	5.6	0.8	9.9
	BCD-02	4,400	3,700	2,900	2,200					8.6	7.8	1.7	11.00
3t	BC-03	6,600	0	0	0	3.5 - 13.0	19.7	5.2	1.12	10.4	7.8	0.9	20.9
	BCD-03	6,600	5,500	4,400	3,300					10.9	11.00	2.4	22.4
5t	BC-05	11,000	0	0	0	3.5 - 13.0	19.7	5.6	1.41	10.4	8.2	0.9	24.2
	BCD-05	11,000	9,100	7,300	5,500					10.9	11.00	2.4	26.2
10t	BC-10	22,000	0	0	0	3.5 - 13.8	20.6	7.1	1.50	11.2	8.4	1.5	35.2
	BCD-10	22,000	18,300	14,500	11,000					11.9	13.00	3.6	40.5



Before using these products; read and follow instructions in the operator's manual. Never exceed capacity. Do not use for lifting people or loads over people.