



# **INDUSTRIAL CHAIN & FITTINGS**

**Grade 30 & 43**



**IMPORTED**

CoreLifting.com



# Hardware Chain

## Grade 43 High Test Chain (NACM)

Grade 43 Chain features both high tensile strength and resistance to wear needed by modern hauling and heavy duty trucking, farm and construction firms. Working load limits exceed those of ordinary low carbon or general utility chain. Order unit is foot.

**NOT FOR OVERHEAD LIFTING**



### Full Drum


| Stock #      |         |         | Trade Size |    | Wire Dia. (In.) | Inside Link Dim. (Inches) |                 | Ft. Per Drum | Net Wt. (Lbs.) | Working Load Limit |        |
|--------------|---------|---------|------------|----|-----------------|---------------------------|-----------------|--------------|----------------|--------------------|--------|
| Self-Colored | Zinc    | HDG     | In.        | MM |                 | Length (Nominal)          | Width (Nominal) |              |                | Lbs.               | Kgs.   |
| 5031213      | 5031233 | 5630247 | 1/4        | 7  | 0.274           | 1.236                     | 0.491           | 800          | 508            | 2,600              | 1,180  |
| 5031313      | 5031333 | 5630347 | 5/16       | 8  | 0.328           | 1.285                     | 0.493           | 550          | 512            | 3,900              | 1,770  |
| 5031413      | 5031433 | 5630447 | 3/8        | 10 | 0.392           | 1.374                     | 0.567           | 400          | 544            | 5,400              | 2,450  |
| 5031613      | 5031633 | 5630647 | 1/2        | 13 | 0.509           | 1.782                     | 0.770           | 200          | 460            | 9,200              | 4,174  |
| 5030813      | ---     | 5630847 | 5/8        | 16 | 0.625           | 2.016                     | 0.876           | 150          | 554            | 13,000             | 5,897  |
| 5030913      | ---     | 5030947 | 3/4        | 20 | 0.781           | 2.613                     | 1.020           | 100          | 542            | 20,200             | 9,163  |
| 5031013      | ---     | 5031047 | 7/8        | 22 | 0.906           | 2.661                     | 1.261           | 75           | 582            | 24,500             | 11,113 |
| 5301113      | ---     | 5301147 | 1          | 26 | 1.031           | 2.878                     | 1.432           | 60           | 606            | 30,000             | 13,608 |

### Half Drum

| Stock #      |         |         | Trade Size |    | Wire Dia. (In.) | Inside Link Dim. (Inches) |                 | Ft. Per Drum | Net Wt. (Lbs.) | Working Load Limit |       |
|--------------|---------|---------|------------|----|-----------------|---------------------------|-----------------|--------------|----------------|--------------------|-------|
| Self-Colored | Zinc    | HDG     | In.        | MM |                 | Length (Nominal)          | Width (Nominal) |              |                | Lbs.               | Kgs.  |
| 5031214      | 5031234 | 5630248 | 1/4        | 7  | 0.274           | 1.236                     | 0.491           | 400          | 254            | 2,600              | 1,180 |
| 5031314      | 5031334 | 5630348 | 5/16       | 8  | 0.328           | 1.285                     | 0.493           | 275          | 256            | 3,900              | 1,770 |
| 5031414      | 5031434 | 5630448 | 3/8        | 10 | 0.392           | 1.374                     | 0.567           | 200          | 272            | 5,400              | 2,450 |
| 5031614      | 5031634 | 5630648 | 1/2        | 13 | 0.509           | 1.782                     | 0.770           | 100          | 230            | 9,200              | 4,174 |

### 5 Gallon Square Pail

| Stock #      |  | Trade Size |    | Wire Dia. (In.) | Inside Link Dim. (Inches) |                 | Ft. Per Pail | Net Wt. (Lbs.) | Working Load Limit |       |
|--------------|--|------------|----|-----------------|---------------------------|-----------------|--------------|----------------|--------------------|-------|
| Self-Colored |  | In.        | MM |                 | Length (Nominal)          | Width (Nominal) |              |                | Lbs.               | Kgs.  |
| 5431215      |  | 1/4        | 7  | 0.274           | 1.236                     | 0.491           | 150          | 96             | 2,600              | 1,180 |
| 5431315      |  | 5/16       | 8  | 0.328           | 1.285                     | 0.493           | 100          | 93             | 3,900              | 1,770 |
| 5431415      |  | 3/8        | 10 | 0.392           | 1.374                     | 0.567           | 75           | 102            | 5,400              | 2,450 |

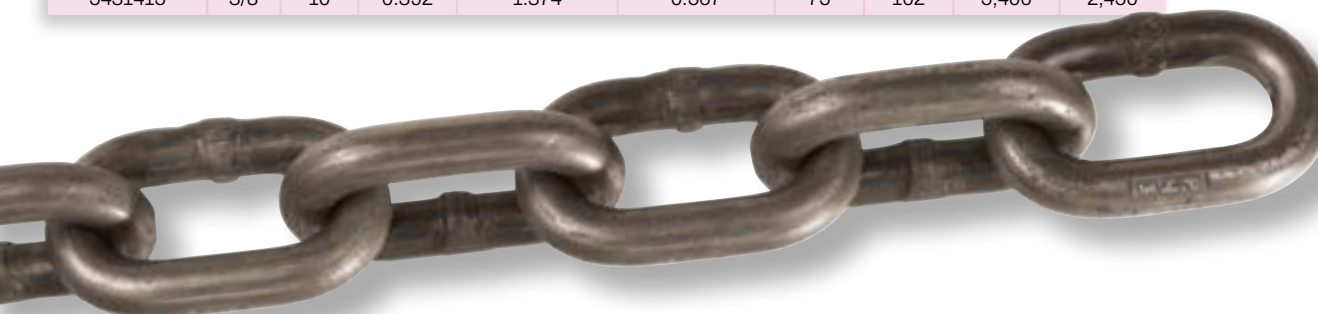

## Grade 43 High Test Chain (NACM) Cont.

### Box

| Stock # | Trade Size |    | Wire Dia.<br>(In.) | Inside Link Dim. (Inches) |                    | Ft. Per Box | Net Wt.<br>(Lbs.) | Working Load Limit |       |
|---------|------------|----|--------------------|---------------------------|--------------------|-------------|-------------------|--------------------|-------|
|         | Inches     | MM |                    | Length<br>(Nominal)       | Width<br>(Nominal) |             |                   | Lbs.               | Kgs.  |
| 5453415 | 3/8        | 10 | 0.392              | 1.374                     | 0.567              | 100         | 140               | 5,400              | 2,450 |



## Grade 43 Import High Test Chain (NACM)

A general utility chain for farm, industrial and home applications such as: log chain, cargo lashing, pipeline hanging, tailgate, guard rail, tow and switch chain.

Order unit is foot. **NOT FOR OVERHEAD LIFTING**

### Full Drum

| Stock #      |         | Trade Size |    | Wire Dia.<br>(In.) | Inside Link Dim. (Inches) |                 | Ft. Per Drum | Net Wt.<br>(Lbs.) | Working Load Limit |       |
|--------------|---------|------------|----|--------------------|---------------------------|-----------------|--------------|-------------------|--------------------|-------|
| Self-Colored | Zinc    | In.        | MM |                    | Length<br>(Nominal)       | Width<br>(Min.) |              |                   | Lbs.               | Kgs.  |
| 6713202      | 6702203 | 1/4        | 7  | 0.276              | 1.240                     | 0.480           | 800          | 508               | 2,600              | 1,180 |
| 6735302      | 6724303 | 5/16       | 8  | 0.343              | 1.290                     | 0.480           | 550          | 503               | 3,900              | 1,770 |
| 6757402      | 6746403 | 3/8        | 10 | 0.406              | 1.380                     | 0.550           | 400          | 544               | 5,400              | 2,450 |



### 5 Gallon Square Pail

| Stock # | Trade Size |    | Wire Dia.<br>(In.) | Inside Link Dim.<br>(Inches) |                 | Ft. Per<br>Pail | Net<br>Wt.<br>(Lbs.) | Working<br>Load Limit |       |
|---------|------------|----|--------------------|------------------------------|-----------------|-----------------|----------------------|-----------------------|-------|
| Zinc    | In.        | MM |                    | Length<br>(Nominal)          | Width<br>(Min.) |                 |                      | Lbs.                  | Kgs.  |
| 6202207 | 1/4        | 7  | 0.276              | 1.240                        | 0.480           | 150             | 96                   | 2,600                 | 1,180 |
| 6224307 | 5/16       | 8  | 0.343              | 1.290                        | 0.480           | 100             | 93                   | 3,900                 | 1,770 |
| 6246407 | 3/8        | 10 | 0.406              | 1.380                        | 0.550           | 75              | 102                  | 5,400                 | 2,450 |



DO NOT EXCEED CAPACITY!  
See the SAFETY GUIDELINES section before using these products. Pages 122-133.



## G43 Import High Test Chain (Short Link)

Order unit is foot. **NOT FOR OVERHEAD LIFTING**

### Full Drum

| Stock #      |            | Trade Size (In.) | Wire Dia. (In.) | Inside Dimensions (Inches) |                 | Qty. Per Drum | Net Wt. (Lbs.) | Working Load Limit |       |
|--------------|------------|------------------|-----------------|----------------------------|-----------------|---------------|----------------|--------------------|-------|
| Self-Colored | HDG        |                  |                 | Length (Nominal)           | Width (Minimum) |               |                | Lbs.               | Kgs.  |
| H0216-0400   | H0216-0415 | 1/4              | 0.281           | 0.980                      | 0.410           | 800           | 600            | 2,600              | 1,180 |
| H0216-0500   | H0216-0515 | 5/16             | 0.343           | 1.100                      | 0.480           | 550           | 633            | 3,900              | 1,770 |
| H0216-0600   | H0216-0615 | 3/8              | 0.406           | 1.340                      | 0.570           | 400           | 640            | 5,400              | 2,450 |
| H0216-0800   | H0216-0815 | 1/2              | 0.531           | 1.500                      | 0.750           | 200           | 540            | 9,200              | 4,174 |

### Half Drum

| Stock #    | Trade Size (In.) | Wire Dia. (In.) | Inside Dimensions (Inches) |                 | Qty. Per Drum | Net Wt. (Lbs.) | Working Load Limit |       |
|------------|------------------|-----------------|----------------------------|-----------------|---------------|----------------|--------------------|-------|
|            |                  |                 | Length (Nominal)           | Width (Minimum) |               |                | Lbs.               | Kgs.  |
| H0214-0400 | 1/4              | 0.281           | 0.980                      | 0.410           | 400           | 300            | 2,600              | 1,180 |
| H0214-0500 | 5/16             | 0.343           | 1.100                      | 0.480           | 275           | 316            | 3,900              | 1,770 |
| H0214-0600 | 3/8              | 0.406           | 1.340                      | 0.570           | 200           | 320            | 5,400              | 2,450 |
| H0214-0800 | 1/2              | 0.531           | 1.500                      | 0.750           | 100           | 270            | 9,200              | 4,174 |

### 5 Gallon Pail

| Stock #      |            | Trade Size (In.) | Wire Dia. (In.) | Inside Dimensions (Inches) |                 | Qty. Per Pail | Net Wt. (Lbs.) | Working Load Limit |       |
|--------------|------------|------------------|-----------------|----------------------------|-----------------|---------------|----------------|--------------------|-------|
| Self-Colored | Zinc       |                  |                 | Length (Nominal)           | Width (Minimum) |               |                | Lbs.               | Kgs.  |
| H0210-0405   | H0210-0411 | 1/4              | 0.281           | 0.980                      | 0.410           | 150           | 105            | 2,600              | 1,180 |
| H0210-0505   | H0210-0511 | 5/16             | 0.343           | 1.100                      | 0.480           | 100           | 119            | 3,900              | 1,770 |
| H0210-0605   | H0210-0611 | 3/8              | 0.406           | 1.340                      | 0.570           | 75            | 124            | 5,400              | 2,450 |
| H0210-0805   | ---        | 1/2              | 0.531           | 1.500                      | 0.750           | 40            | 114            | 9,200              | 4,174 |



## Grade 30 Proof Coil Chain (NACM)

**NOT FOR  
OVERHEAD  
LIFTING.**

A general utility chain for farm, industrial and home applications such as: log chain, cargo lashing, pipeline hanging, tailgate, guard rail, tow and switch chain. Order unit is foot.

### Full Drum

| Stock #      |         |         | Trade Size |     | Wire Dia.<br>(In.) | Inside Link Dim.<br>(Inches) |                    | Ft. Per Drum | Net Wt.<br>(Lbs.) | Working Load Limit |       |
|--------------|---------|---------|------------|-----|--------------------|------------------------------|--------------------|--------------|-------------------|--------------------|-------|
| Self-Colored | Zinc    | HDG     | In.        | MM  |                    | Length<br>(Nominal)          | Width<br>(Nominal) |              |                   | Lbs.               | Kgs.  |
| 5011113      | 5011133 | 5610147 | 3/16       | 5.5 | 0.204              | 0.977                        | 0.411              | 800          | 320               | 800                | 363   |
| 5011213      | 5011233 | 5610247 | 1/4        | 7   | 0.267              | 1.236                        | 0.491              | 800          | 508               | 1,300              | 590   |
| 5011313      | 5011333 | 5610347 | 5/16       | 8   | 0.311              | 1.296                        | 0.493              | 550          | 512               | 1,900              | 862   |
| 5011413      | 5011433 | 5610447 | 3/8        | 10  | 0.392              | 1.374                        | 0.566              | 400          | 544               | 2,650              | 1,202 |
| 5011613      | 5011633 | 5610647 | 1/2        | 13  | 0.509              | 1.782                        | 0.771              | 200          | 460               | 4,500              | 2,042 |
| 5010813      | 5010833 | 5610847 | 5/8        | 16  | 0.625              | 2.016                        | 0.876              | 150          | 554               | 6,900              | 3,131 |
| 5010913      | ---     | 5010947 | 3/4        | 20  | 0.781              | 2.610                        | 1.020              | 100          | 542               | 10,600             | 4,808 |
| 5011013      | ---     | 5011047 | 7/8        | 22  | 0.906              | 2.570                        | 1.261              | 75           | 573               | 12,800             | 5,806 |
| 5101113      | ---     | 5101147 | 1          | 26  | 1.031              | 2.900                        | 1.422              | 60           | 606               | 17,900             | 8,119 |

### Half Drum

| Stock #      |         |         | Trade Size |     | Wire Dia.<br>(In.) | Inside Link Dim.<br>(Inches) |                    | Ft. Per Drum | Net Wt.<br>(Lbs.) | Working Load Limit |       |
|--------------|---------|---------|------------|-----|--------------------|------------------------------|--------------------|--------------|-------------------|--------------------|-------|
| Self-Colored | Zinc    | HDG     | In.        | MM  |                    | Length<br>(Nominal)          | Width<br>(Nominal) |              |                   | Lbs.               | Kgs.  |
| 5011114      | 5011134 | 5610148 | 3/16       | 5.5 | 0.204              | 0.977                        | 0.411              | 400          | 160               | 800                | 363   |
| 5011214      | 5011234 | 5610248 | 1/4        | 7   | 0.267              | 1.236                        | 0.491              | 400          | 254               | 1,300              | 590   |
| 5011314      | 5011334 | 5610348 | 5/16       | 8   | 0.311              | 1.296                        | 0.493              | 275          | 256               | 1,900              | 862   |
| 5011414      | 5011434 | 5610448 | 3/8        | 10  | 0.392              | 1.374                        | 0.566              | 200          | 272               | 2,650              | 1,202 |
| 5011614      | 5011634 | 5610648 | 1/2        | 13  | 0.509              | 1.782                        | 0.771              | 100          | 230               | 4,500              | 2,042 |

### 5 Gallon Square Pail

| Stock # |         | Trade Size |     | Wire Dia.<br>(In.) | Inside Link Dim.<br>(Inches) |                    | Ft. Per Pail | Net Wt.<br>(Lbs.) | Working Load Limit |       |
|---------|---------|------------|-----|--------------------|------------------------------|--------------------|--------------|-------------------|--------------------|-------|
| Zinc    | HDG     | In.        | MM  |                    | Length<br>(Nominal)          | Width<br>(Nominal) |              |                   | Lbs.               | Kgs.  |
| 5411135 | 5411165 | 3/16       | 5.5 | 0.204              | 0.977                        | 0.411              | 250          | 100               | 800                | 363   |
| 5411235 | 5411265 | 1/4        | 7   | 0.267              | 1.236                        | 0.491              | 141          | 90                | 1,300              | 590   |
| 5411335 | 5411365 | 5/16       | 8   | 0.311              | 1.296                        | 0.493              | 92           | 86                | 1,900              | 862   |
| 5411435 | 5411465 | 3/8        | 10  | 0.392              | 1.374                        | 0.566              | 63           | 86                | 2,650              | 1,202 |
| 5411635 | ---     | 1/2        | 13  | 0.509              | 1.782                        | 0.771              | 35           | 81                | 4,500              | 2,042 |

### Box

| Stock # | Trade Size |     | Wire Dia.<br>(In.) | Inside Link Dim. (Inches) |                    | Ft. Per<br>Box | Net<br>Wt.<br>(Lbs.) | Working<br>Load Limit |      |
|---------|------------|-----|--------------------|---------------------------|--------------------|----------------|----------------------|-----------------------|------|
| Zinc    | Inches     | MM  |                    | Length<br>(Nominal)       | Width<br>(Nominal) |                |                      | Lbs.                  | Kgs. |
| 5451135 | 3/16       | 5.5 | 0.204              | 0.977                     | 0.411              | 375            | 155                  | 800                   | 363  |
| 5451235 | 1/4        | 7   | 0.267              | 1.240                     | 0.491              | 225            | 146                  | 1,300                 | 590  |
| 5451335 | 5/16       | 8   | 0.311              | 1.296                     | 0.493              | 150            | 122                  | 1,900                 | 862  |



**DO NOT EXCEED CAPACITY!**  
See the **SAFETY GUIDELINES** section before using these products. Pages 122-133.

# Hardware Chain

## Grade 30 Import Proof Coil Chain (Long Link)

A general utility chain for farm, industrial and home applications such as: log chain, cargo lashing, pipeline hanging, tailgate, guard rail, tow and switch chain. Order unit is foot.

**NOT FOR OVERHEAD LIFTING**

### Full Drum

| Stock #      |            |            | Trade Size |     | Wire Dia.<br>(In.) | Inside Link Dim.<br>(Inches) |                    | Ft. Per Drum | Net Wt.<br>(Lbs.) | WLL   |       |
|--------------|------------|------------|------------|-----|--------------------|------------------------------|--------------------|--------------|-------------------|-------|-------|
| Self-Colored | Zinc       | HDG        | In.        | MM  |                    | Length<br>(Nominal)          | Width<br>(Nominal) |              |                   | Lbs.  | Kgs.  |
| H0117-0300   | H0117-0311 | H0117-0315 | 3/16       | 5.5 | 0.21               | 0.96                         | 0.34               | 1500         | 525               | 800   | 363   |
| H0117-0400   | H0117-0411 | H0117-0415 | 1/4        | 7   | 0.27               | 1.24                         | 0.41               | 800          | 448               | 1,300 | 590   |
| H0117-0500   | H0117-0511 | H0117-0515 | 5/16       | 8   | 0.31               | 1.30                         | 0.50               | 550          | 457               | 1,900 | 862   |
| H0117-0600   | H0117-0611 | H0117-0615 | 3/8        | 10  | 0.37               | 1.37                         | 0.61               | 400          | 568               | 2,650 | 1,202 |
| H0117-0800   | H0117-0811 | H0117-0815 | 1/2        | 13  | 0.52               | 1.80                         | 0.78               | 200          | 524               | 4,500 | 2,042 |



### Half Drum

| Stock #    |  | Trade Size |     | Wire Dia.<br>(In.) | Inside Link Dim.<br>(Inches) |                    | Ft. Per Drum | Net Wt.<br>(Lbs.) | Working Load Limit |       |
|------------|--|------------|-----|--------------------|------------------------------|--------------------|--------------|-------------------|--------------------|-------|
| Zinc       |  | In.        | MM  |                    | Length<br>(Nominal)          | Width<br>(Nominal) |              |                   | Lbs.               | Kgs.  |
| H0115-0311 |  | 3/16       | 5.5 | 0.21               | 0.96                         | 0.34               | 800          | 263               | 800                | 363   |
| H0115-0411 |  | 1/4        | 7   | 0.27               | 1.24                         | 0.41               | 400          | 224               | 1,300              | 590   |
| H0115-0511 |  | 5/16       | 8   | 0.31               | 1.30                         | 0.50               | 275          | 228               | 1,900              | 862   |
| H0115-0611 |  | 3/8        | 10  | 0.37               | 1.37                         | 0.61               | 200          | 266               | 2,650              | 1,202 |

### 5 Gallon Square Pail

| Stock #    |  | Trade Size |     | Wire Dia.<br>(In.) | Inside Link Dim.<br>(Inches) |                    | Ft. Per Pail | Net Wt.<br>(Lbs.) | Working Load Limit |       |
|------------|--|------------|-----|--------------------|------------------------------|--------------------|--------------|-------------------|--------------------|-------|
| Zinc       |  | In.        | MM  |                    | Length<br>(Nominal)          | Width<br>(Nominal) |              |                   | Lbs.               | Kgs.  |
| H0111-0211 |  | 1/8        | 4   | 0.16               | 0.94                         | 0.25               | 500          | 110               | 400                | 181   |
| H0111-0311 |  | 3/16       | 5.5 | 0.21               | 0.96                         | 0.34               | 250          | 88                | 800                | 363   |
| H0111-0411 |  | 1/4        | 7   | 0.27               | 1.24                         | 0.41               | 141          | 79                | 1,300              | 590   |
| H0111-0511 |  | 5/16       | 8   | 0.31               | 1.30                         | 0.50               | 92           | 76                | 1,900              | 862   |
| H0111-0611 |  | 3/8        | 10  | 0.37               | 1.37                         | 0.61               | 63           | 89                | 2,650              | 1,202 |





## Grade 30 Import Proof Coil Chain (Long Link) cont.

Order unit is foot. **NOT FOR OVERHEAD LIFTING**



### 5 Gallon Round Pail

| Stock #      |            |            | Trade Size |     | Wire Dia.<br>(Inches) | Inside Link Dim.<br>(Inches) |                    | Ft. Per Pail | Net Wt.<br>(Lbs.) | Working Load Limit |       |
|--------------|------------|------------|------------|-----|-----------------------|------------------------------|--------------------|--------------|-------------------|--------------------|-------|
| Self Colored | Zinc       | HDG        | Inches     | MM  |                       | Length<br>(Nominal)          | Width<br>(Nominal) |              |                   | Lbs.               | Kgs.  |
| -            | H0110-0211 | H0110-0215 | 1/8        | 4   | 0.16                  | 0.94                         | 0.25               | 500          | 110               | 400                | 181   |
| H0110-0300   | H0110-0311 | H0110-0315 | 3/16       | 5.5 | 0.21                  | 0.96                         | 0.34               | 250          | 88                | 800                | 363   |
| H0110-0400   | H0110-0411 | H0110-0415 | 1/4        | 7   | 0.27                  | 1.24                         | 0.41               | 141          | 79                | 1,300              | 590   |
| H0110-0500   | H0110-0511 | H0110-0515 | 5/16       | 8   | 0.31                  | 1.30                         | 0.50               | 92           | 76                | 1,900              | 862   |
| H0110-0600   | H0110-0611 | H0110-0615 | 3/8        | 10  | 0.37                  | 1.37                         | 0.61               | 63           | 89                | 2,650              | 1,202 |
| H0110-0800   | H0110-0811 | H0110-0815 | 1/2        | 13  | 0.52                  | 1.80                         | 0.78               | 40           | 105               | 4,500              | 2,042 |

### 12" Reel

| Stock #    | Trade Size |        | Wire Dia.<br>(Inches) | Inside Link Dim.<br>(Inches) |                    | Ft. Per Reel | Net Wt.<br>(Lbs.) | Working Load Limit |       |
|------------|------------|--------|-----------------------|------------------------------|--------------------|--------------|-------------------|--------------------|-------|
|            | Zinc       | Inches | MM                    | Length<br>(Nominal)          | Width<br>(Nominal) |              |                   | Lbs.               | Kgs.  |
| H0107-0311 |            | 3/16   | 5.5                   | 0.21                         | 0.96               | 100          | 35                | 800                | 363   |
| H0107-0411 |            | 1/4    | 7                     | 0.27                         | 1.24               | 75           | 42                | 1,300              | 590   |
| H0107-0511 |            | 5/16   | 8                     | 0.31                         | 1.30               | 70           | 58                | 1,900              | 862   |
| H0107-0611 |            | 3/8    | 10                    | 0.37                         | 1.37               | 45           | 64                | 2,650              | 1,202 |



DO NOT EXCEED CAPACITY!  
See the SAFETY GUIDELINES section before using these products. Pages 122-133.

### G30 Import Proof Coil Chain (Short Link)

Order unit is foot. **NOT FOR OVERHEAD LIFTING**

#### Full Drum

| Stock #      |            |            | Trade Size (In.) | Wire Dia. (In.) | Inside Dimensions (Inches) |                 | Qty. Per Drum | Net Wt. (Lbs.) | Working Load Limit |       |
|--------------|------------|------------|------------------|-----------------|----------------------------|-----------------|---------------|----------------|--------------------|-------|
| Self-Colored | Zinc       | HDG        |                  |                 | Length (Nominal)           | Width (Minimal) |               |                | Lbs.               | Kgs.  |
| H0116-0300   | H0116-0311 | H0116-0315 | 3/16             | 0.218           | 0.990                      | 0.420           | 1500          | 615            | 800                | 363   |
| H0116-0400   | H0116-0411 | H0116-0415 | 1/4              | 0.281           | 1.040                      | 0.490           | 800           | 608            | 1,300              | 590   |
| H0116-0500   | H0116-0511 | H0116-0515 | 5/16             | 0.343           | 1.140                      | 0.490           | 550           | 561            | 1,900              | 862   |
| H0116-0600   | H0116-0611 | H0116-0615 | 3/8              | 0.406           | 1.280                      | 0.610           | 400           | 568            | 2,650              | 1,202 |
| H0116-0800   | H0116-0811 | H0116-0815 | 1/2              | 0.531           | 1.560                      | 0.810           | 200           | 524            | 4,500              | 2,042 |

#### Half Drum

| Stock #      |            |            | Trade Size (In.) | Wire Dia. (In.) | Inside Dimensions (Inches) |                 | Qty. Per Drum | Net Wt. (Lbs.) | Working Load Limit |       |
|--------------|------------|------------|------------------|-----------------|----------------------------|-----------------|---------------|----------------|--------------------|-------|
| Self-Colored | Zinc       | HDG        |                  |                 | Length (Nominal)           | Width (Minimal) |               |                | Lbs.               | Kgs.  |
| ---          | ---        | H0114-0215 | 1/8              | 0.156           | 0.940                      | 0.250           | 1000          | 230            | 400                | 181   |
| H0114-0300   | H0114-0311 | H0114-0315 | 3/16             | 0.218           | 0.990                      | 0.420           | 750           | 308            | 800                | 363   |
| H0114-0400   | H0114-0411 | H0114-0415 | 1/4              | 0.281           | 1.040                      | 0.490           | 400           | 304            | 1,300              | 590   |
| H0114-0500   | H0114-0511 | H0114-0515 | 5/16             | 0.343           | 1.140                      | 0.490           | 275           | 281            | 1,900              | 862   |
| H0114-0600   | H0114-0611 | H0114-0615 | 3/8              | 0.406           | 1.280                      | 0.610           | 200           | 284            | 2,650              | 1,202 |
| ---          | H0114-0811 | H0114-0815 | 1/2              | 0.531           | 1.560                      | 0.810           | 100           | 262            | 4,500              | 2,042 |




# Chain Accessories

|                                            |       |
|--------------------------------------------|-------|
| Clevis & Eye Type Hooks.....               | 86    |
| Transport Hooks & Links.....               | 87    |
| Hooks, Shackles & Links .....              | 88    |
| Repair Lap Links.....                      | 88    |
| Shuts, Links, Clips &<br>S-hooks.....      | 89-90 |
| Pulleys, Screw Eyes &<br>Rope Access.....  | 91    |
| Snap & Swivels .....                       | 92-93 |
| Stainless Steel Chain<br>Accessories ..... | 94    |



### G43 Clevis Grab Hook

| Stock #    |         |         | Chain Size<br>(In.) | Dimensions<br>(Inches) |       |       |       | Qty.<br>Per<br>Pkg | Lbs.<br>Per<br>Each | Working Load<br>Limit |       |
|------------|---------|---------|---------------------|------------------------|-------|-------|-------|--------------------|---------------------|-----------------------|-------|
| UPC Tagged |         | Bulk    |                     | A                      | B     | C     | C     |                    |                     | Lbs.                  | Kgs.  |
| Self Color | Zinc    |         |                     |                        |       |       |       |                    |                     |                       |       |
| 8023215    | 8023230 | 8023235 | 1/4                 | 0.360                  | 0.400 | 0.380 | 1.970 | 10                 | 0.47                | 2,600                 | 1,179 |
| 8023315    | 8023330 | 8023335 | 5/16                | 0.400                  | 0.440 | 0.440 | 2.260 | 10                 | 0.75                | 3,900                 | 1,769 |
| 8023415    | 8023430 | 8023435 | 3/8                 | 0.480                  | 0.500 | 0.470 | 2.630 | 10                 | 1.10                | 5,400                 | 2,450 |
| 8023615    | 8023630 | 8023635 | 1/2                 | 0.750                  | 0.660 | 0.630 | 3.190 | 10                 | 2.52                | 9,200                 | 4,173 |

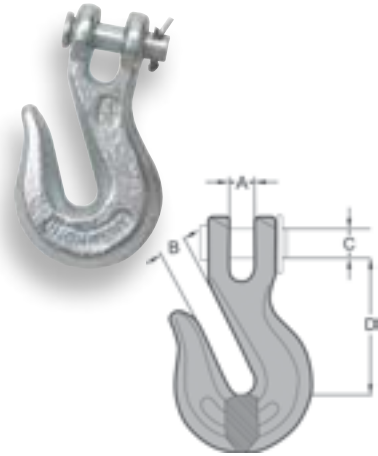

### G43 Clevis Slip Hook - w/Latch

| Stock #    |         | Chain Size<br>(Inches) | Dimensions<br>(Inches) |       |       |       | Qty.<br>Per<br>Pkg. | Lbs.<br>Per<br>Each | Working Load<br>Limit |       |
|------------|---------|------------------------|------------------------|-------|-------|-------|---------------------|---------------------|-----------------------|-------|
| UPC Tagged | Bulk    |                        | A                      | B     | C     | D     |                     |                     | Lbs.                  | Kgs.  |
| Zinc       |         |                        |                        |       |       |       |                     |                     |                       |       |
| 8016266    | 8016275 | 1/4                    | 0.440                  | 0.790 | 0.380 | 2.560 | 10                  | 0.59                | 2,600                 | 1,179 |
| 8016366    | 8016375 | 5/16                   | 0.500                  | 0.930 | 0.440 | 2.870 | 10                  | 0.93                | 3,900                 | 1,769 |
| 8016466    | 8016475 | 3/8                    | 0.590                  | 1.140 | 0.470 | 3.250 | 10                  | 1.30                | 5,400                 | 2,450 |
| 8016666    | 8016675 | 1/2                    | 0.750                  | 1.420 | 0.630 | 4.000 | 5                   | 3.21                | 9,200                 | 4,173 |



### G43 Clevis Slip Hook

| Stock #    |         | Chain Size<br>(Inches) | Dimensions<br>(Inches) |       |       |       | Qty.<br>Per<br>Pkg. | Lbs.<br>Per<br>Each | Working Load<br>Limit |       |
|------------|---------|------------------------|------------------------|-------|-------|-------|---------------------|---------------------|-----------------------|-------|
| UPC Tagged | Bulk    |                        | A                      | B     | C     | D     |                     |                     | Lbs.                  | Kgs.  |
| Zinc       |         |                        |                        |       |       |       |                     |                     |                       |       |
| 8013230    | 8013235 | 1/4                    | 0.440                  | 0.940 | 0.370 | 2.560 | 10                  | 0.45                | 2,600                 | 1,179 |
| 8013330    | 8013335 | 5/16                   | 0.500                  | 1.060 | 0.440 | 2.870 | 10                  | 0.69                | 3,900                 | 1,769 |
| 8013430    | 8013435 | 3/8                    | 0.590                  | 1.310 | 0.470 | 3.250 | 10                  | 1.10                | 5,400                 | 2,450 |
| 8013630    | 8013635 | 1/2                    | 0.750                  | 1.690 | 0.630 | 4.000 | 10                  | 2.45                | 9,200                 | 4,173 |



### G43 Eye Grab Hook

| Stock #    |         |         | Chain Size<br>(Inches) | Dimensions<br>(Inches) |       |       | Qty.<br>Per<br>Pkg. | Lbs.<br>Per<br>Each | Working Load<br>Limit |       |
|------------|---------|---------|------------------------|------------------------|-------|-------|---------------------|---------------------|-----------------------|-------|
| UPC Tagged |         | Bulk    |                        | A                      | B     | C     |                     |                     | Lbs.                  | Kgs.  |
| Self Color | Zinc    |         |                        |                        |       |       |                     |                     |                       |       |
| 8025215    | 8025230 | 8025235 | 1/4                    | 0.310                  | 1.900 | 0.340 | 10                  | 0.28                | 2,600                 | 1,179 |
| 8025315    | 8025330 | 8025335 | 5/16                   | 0.400                  | 2.250 | 0.440 | 10                  | 0.45                | 3,900                 | 1,769 |
| 8025415    | 8025430 | 8025435 | 3/8                    | 0.440                  | 2.620 | 0.500 | 10                  | 0.79                | 5,400                 | 2,450 |



## Chain Accessories

NOT FOR OVERHEAD LIFTING

### G43 Eye Slip Hook - w/Latch


| Stock#  | Chain Size<br>(Inches) | Dimensions<br>(Inches) |       |       |       | Qty.<br>Per<br>Pkg. | Lbs.<br>Per<br>Each | Working Load Limit |       |
|---------|------------------------|------------------------|-------|-------|-------|---------------------|---------------------|--------------------|-------|
|         |                        | A                      | B     | C     | D     |                     |                     | Lbs.               | Kgs.  |
| 8011275 | 1/4                    | 0.500                  | 2.500 | 0.670 | 0.600 | 10                  | 0.42                | 2,600              | 1,179 |
| 8011375 | 5/16                   | 0.630                  | 2.830 | 0.800 | 0.690 | 10                  | 0.72                | 3,900              | 1,769 |
| 8011475 | 3/8                    | 0.740                  | 3.370 | 0.850 | 0.580 | 10                  | 1.03                | 5,400              | 2,450 |
| 8011675 | 1/2                    | 0.950                  | 4.270 | 1.360 | 1.270 | 10                  | 2.45                | 9,200              | 4,173 |



### G43 Eye Slip Hook



| Stock #    |         | Chain Size<br>(In.) | Dimensions<br>(Inches) |       |       | Qty.<br>Per<br>Pkg | Lbs.<br>Per<br>Each | Working Load Limit |       |
|------------|---------|---------------------|------------------------|-------|-------|--------------------|---------------------|--------------------|-------|
| UPC Tagged | Bulk    |                     | A                      | B     | C     |                    |                     | Lbs.               | Kgs.  |
| Zinc       |         |                     |                        |       |       |                    |                     |                    |       |
| 8011230    | 8011235 | 1/4                 | 0.500                  | 2.560 | 0.940 | 10                 | 0.40                | 2,600              | 1,179 |
| 8011330    | 8011335 | 5/16                | 0.640                  | 2.780 | 1.040 | 10                 | 0.70                | 3,900              | 1,769 |
| 8011430    | 8011435 | 3/8                 | 0.720                  | 3.360 | 1.310 | 10                 | 1.00                | 5,400              | 2,450 |
| 8011630    | 8011635 | 1/2                 | 0.960                  | 4.030 | 1.630 | 10                 | 2.40                | 9,200              | 4,173 |

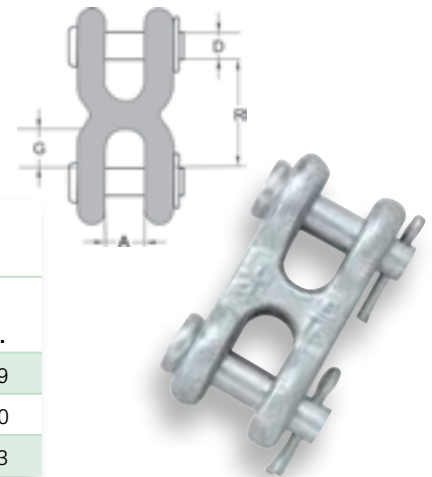

### G43 Double Clevis Link

| Stock # | Chain Size<br>(Inches) | Dimensions<br>(Inches) |       |       |       | Qty.<br>Per<br>Pkg. | Lbs.<br>Per<br>Each | Working Load Limit |       |
|---------|------------------------|------------------------|-------|-------|-------|---------------------|---------------------|--------------------|-------|
|         |                        | A                      | R     | D     | G     |                     |                     | Lbs.               | Kgs.  |
| 8027235 | 1/4-5/16               | 0.470                  | 1.180 | 0.380 | 0.430 | 10                  | 0.30                | 3,900              | 1,769 |
| 8027435 | 3/8                    | 0.530                  | 1.340 | 0.470 | 0.480 | 10                  | 0.40                | 5,400              | 2,450 |
| 8027635 | 7/16-1/2               | 0.650                  | 1.750 | 0.560 | 0.630 | 10                  | 0.98                | 9,200              | 4,173 |



### Weld-On Grab Hook


| Stock # | Chain Size<br>(Inches) | Qty. Per<br>Pkg. | Working Load Limit |       |
|---------|------------------------|------------------|--------------------|-------|
|         |                        |                  | Lbs.               | Kgs.  |
| 8023490 | 3/8                    | 10               | 5,400              | 2,450 |



DO NOT EXCEED CAPACITY!  
See the SAFETY GUIDELINES section before using these products. Pages 122-133.

## Screw Pin Chain Shackles (RR-C-271F, Type IVB, Grade A, Class 2)

| Stock#  | UPC Tagged | Trade Size (Inches) | Pin Dia. (D) | Dimensions (Inches) |       |         |         | Qty. Per Pkg. | Lbs. Per Each | WLL (Ton) |
|---------|------------|---------------------|--------------|---------------------|-------|---------|---------|---------------|---------------|-----------|
|         |            |                     |              | C                   | A     | G (Max) | B (Min) |               |               |           |
| 8060005 | HDG        | 3/16                | 1/4          | 0.375               | 0.750 | 0.625   | 0.180   | 25            | 0.05          | 1/3       |
| 8060105 |            | 1/4                 | 5/16         | 0.469               | 0.875 | 0.875   | 0.240   | 25            | 0.11          | 1/2       |
| 8060205 |            | 5/16                | 3/8          | 0.531               | 1.031 | 1.000   | 0.300   | 25            | 0.18          | 3/4       |
| 8060305 |            | 3/8                 | 7/16         | 0.656               | 1.125 | 1.250   | 0.360   | 25            | 0.30          | 1         |
| 8060505 |            | 1/2                 | 5/8          | 0.812               | 1.625 | 1.375   | 0.480   | 10            | 0.59          | 2         |
| 8060605 |            | 5/8                 | 3/4          | 1.062               | 2.000 | 1.875   | 0.590   | 10            | 1.27          | 3-1/4     |
| 8060705 |            | 3/4                 | 7/8          | 1.250               | 2.375 | 2.125   | 0.710   | 10            | 2.60          | 4-3/4     |
| 8060805 |            | 7/8                 | 1            | 1.438               | 2.812 | 2.375   | 0.830   | 5             | 3.15          | 6-1/2     |
| 8060905 |            | 1                   | 1-1/8        | 1.688               | 3.188 | 2.625   | 0.950   | 5             | 4.75          | 8-1/2     |
| 8061005 |            | 1-1/8               | 1-1/4        | 1.812               | 3.562 | 2.875   | 1.070   | 5             | 6.75          | 9-1/2     |
| 8061105 |            | 1-1/4               | 1-3/8        | 2.031               | 3.938 | 3.250   | 1.190   | 5             | 9.00          | 12        |
| 8061205 |            | 1-3/8               | 1-1/2        | 2.250               | 4.438 | 3.500   | 1.310   | 1             | 15.00         | 13-1/2    |
| 8061305 |            | 1-1/2               | 1-5/8        | 2.375               | 4.875 | 3.750   | 1.420   | 1             | 22.00         | 17        |

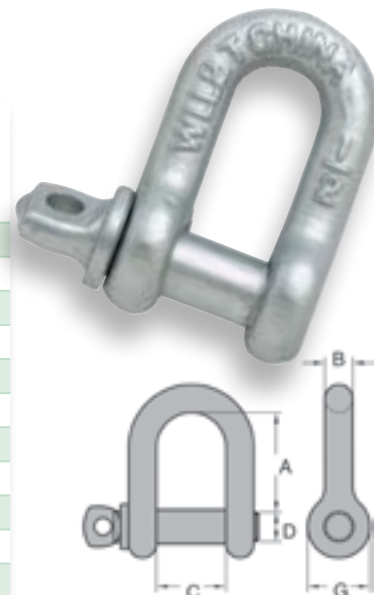

## Commercial Grade Screw Pin Anchor Shackles

| Stock#     |         | Trade<br>Size<br>(Inches) | Pin Dia.<br>(D) | Dimensions<br>(Inches) |       |       |       | Qty. Per<br>Pkg. | Lbs.<br>Per<br>Each | WLL<br>(Ton) |
|------------|---------|---------------------------|-----------------|------------------------|-------|-------|-------|------------------|---------------------|--------------|
| UPC Tagged |         |                           |                 | W                      | A     | E     | B     |                  |                     |              |
| HDG        | Zinc    |                           |                 |                        |       |       |       |                  |                     |              |
| 8065005    | 8065805 | 3/16                      | 1/4             | 0.350                  | 0.870 | 0.630 | 0.200 | 10               | 0.04                | 1/4          |
| 8065105    | 8065905 | 1/4                       | 5/16            | 0.470                  | 1.100 | 0.750 | 0.240 | 10               | 0.08                | 1/3          |
| 8065205    | 8066005 | 5/16                      | 3/8             | 0.590                  | 1.220 | 0.830 | 0.280 | 10               | 0.13                | 1/2          |
| 8065305    | 8066105 | 3/8                       | 7/16            | 0.630                  | 1.420 | 1.020 | 0.360 | 10               | 0.23                | 3/4          |
| 8065405    | ---     | 7/16                      | 1/2             | 0.630                  | 1.770 | 1.070 | 0.400 | 10               | 0.31                | 1            |
| 8065505    | ---     | 1/2                       | 5/8             | 0.870                  | 1.890 | 1.300 | 0.480 | 10               | 0.55                | 1-1/2        |
| 8065605    | ---     | 5/8                       | 3/4             | 1.100                  | 2.320 | 1.620 | 0.590 | 5                | 1.08                | 2-1/4        |
| 8065705    | ---     | 3/4                       | 7/8             | 1.300                  | 2.640 | 1.930 | 0.750 | 4                | 1.76                | 3-1/4        |



## Repair Lap Links

Lap links are used to temporarily repair low carbon steel chains and add coupling attachments. To install the lap link, you must insert the link between the two other links or an attachment, and hammer the lap link to seal it shut. Low carbon steel. For temporary chain repair and coupling of attachments with chain. Use one size larger than chain size.

| Stock #    |             |         | Trade Size (Inches) | Dimensions (Inches) |       | Qty. Per Pkg. | Lbs. Per Each | Working Load Limit |      |
|------------|-------------|---------|---------------------|---------------------|-------|---------------|---------------|--------------------|------|
| Bulk       | *UPC Tagged |         |                     | A                   | B     |               |               | Lbs.               | Kgs. |
| Self Color | Zinc        |         |                     |                     |       |               |               |                    |      |
| 8030125    | 8030135     | 4417640 | 3/16                | 1.000               | 0.505 | 100           | 0.03          | 225                | 100  |
| 8030225    | 8030235     | 4417740 | 1/4                 | 1.250               | 0.512 | 50            | 0.07          | 325                | 140  |
| 8034225    | 8034235     | ---     | 1/4                 | 2.000               | 0.680 | 50            | 0.10          | 325                | 140  |
| 8030325    | 8030335     | 4417840 | 5/16                | 1.510               | 0.730 | 50            | 0.15          | 675                | 300  |
| ---        | ---         | 4417940 | 3/8                 | 1.625               | 0.785 | 50            | 0.23          | 1,050              | 475  |
| 8034425    | 8034435     | 4417040 | 3/8                 | 2.000               | 0.840 | 50            | 0.27          | 1,000              | 450  |
| 8034625    | ---         | 8034630 | 1/2                 | 2.570               | 1.010 | 50            | 0.59          | 1525               | 690  |

\*All UPC Tagged products come 20/carton except 8034630, which comes 10/carton.



## Cold Shuts

Cold Shut Links are used to repair low carbon steel chains, as well as installing coupling attachments. After sliding the cold shut link between two other links, or an attachment, use a hammer to pound the end of the cold shut through the eye. To seal the link, you must peen the extended end of the cold shut, which prevents the link from opening. Low carbon steel. For temporary chain repair and coupling of attachments. When using chain, use one size larger than chain size.

| Stock #         |            | Trade Size<br>(Inches) | Dimensions<br>(Inches) |      | Qty.<br>Per<br>Pkg. | Lbs.<br>Per<br>Each | Working Load Limit |       |
|-----------------|------------|------------------------|------------------------|------|---------------------|---------------------|--------------------|-------|
| Bulk            | UPC Tagged |                        | A                      | B    |                     |                     | Lbs.               | Kgs.  |
| Self<br>Colored | Zinc       |                        |                        |      |                     |                     |                    |       |
| 8040115         | 8040140    | 3/16                   | 0.87                   | 0.44 | 25                  | 0.03                | 400                | 180   |
| 8040215         | 8040235    | 1/4                    | 0.83                   | 0.40 | 25                  | 0.05                | 800                | 360   |
| 8040315         | 8040335    | 5/16                   | 0.92                   | 0.45 | 25                  | 0.10                | 1,300              | 590   |
| 8040415         | 8040440    | 3/8                    | 1.21                   | 0.58 | 25                  | 0.17                | 1,900              | 860   |
| 8040615         | 8040630    | 1/2                    | 1.22                   | 0.68 | 25                  | 0.39                | 3,500              | 1,588 |



## Connecting Links

Low carbon steel. For temporary chain repair and coupling of attachments with chain.



| Stock #    | Trade Size<br>(Inches) | Dimensions (Inches) |       | Qty.<br>Per<br>Pkg. | Lbs.<br>Per<br>Each | Working Load Limit |       |
|------------|------------------------|---------------------|-------|---------------------|---------------------|--------------------|-------|
| UPC Tagged |                        | A                   | B     |                     |                     | Lbs.               | Kgs.  |
| HDG        |                        |                     |       |                     |                     |                    |       |
| 440840403  | 1/4                    | 0.880               | 0.440 | 10                  | 0.06                | 1,300              | 590   |
| 440840603  | 3/8                    | 1.200               | 0.560 | 10                  | 0.18                | 2,650              | 1,202 |

## Quick Links

Quick links are the most popular and easiest to use when repairing a chain. They are usually used to repair low carbon steel chains or add coupling attachments. Quick links are two-sided thread links that you can easily slide onto two original links and tighten the thread with a wrench. They are designed to be reusable and moveable. Low carbon steel. Fast, easy connection for a permanent or temporary connection.

| Stock#  |            | Trade<br>Size<br>(Inches) | Diameter |    | Dimensions (Inches) |                 |         | Qty.<br>Per<br>Pkg. | Lbs.<br>Per<br>Each | Working Load<br>Limit |       |
|---------|------------|---------------------------|----------|----|---------------------|-----------------|---------|---------------------|---------------------|-----------------------|-------|
|         |            |                           | Inches   | MM | Inside<br>Length    | Inside<br>Width | Opening |                     |                     | Lbs.                  | Kgs.  |
| Bulk    | UPC Tagged |                           |          |    |                     |                 |         |                     |                     |                       |       |
| Zinc    |            |                           |          |    |                     |                 |         |                     |                     |                       |       |
| 8056035 | 4421040    | 1/8                       | 0.125    | 3  | 1.20                | 0.41            | 0.18    | 20                  | 0.02                | 220                   | 100   |
| 8056135 | 4421140    | 3/16                      | 0.197    | 5  | 1.56                | 0.50            | 0.27    | 20                  | 0.05                | 616                   | 279   |
| 8056235 | 4421240    | 1/4                       | 0.240    | 6  | 1.90                | 0.63            | 0.31    | 20                  | 0.08                | 880                   | 400   |
| 8056335 | 4421340    | 5/16                      | 0.310    | 8  | 2.30                | 0.75            | 0.37    | 20                  | 0.18                | 1,540                 | 699   |
| 8056435 | 4421440    | 3/8                       | 0.390    | 9  | 2.68                | 0.81            | 0.50    | 10                  | 0.24                | 1,900                 | 862   |
| 8056635 | 4423640    | 1/2                       | 0.470    | 12 | 3.27                | 0.89            | 0.54    | 10                  | 0.53                | 2,650                 | 1,202 |



## Wide Jaw Quick Links

| Stock#     | Trade<br>Size<br>(Inches) | Diameter |    | Dimensions<br>(Inches) |                | Qty. Per<br>Pkg. | Lbs. Per<br>Each | Working<br>Load Limit |      |
|------------|---------------------------|----------|----|------------------------|----------------|------------------|------------------|-----------------------|------|
| UPC Tagged |                           | Inches   | MM | Overall<br>Length      | Jaw<br>Opening |                  |                  | Lbs.                  | Kgs. |
| Zinc       |                           |          |    |                        |                |                  |                  |                       |      |
| 4428040    | 1/8                       | 0.125    | 3  | 1-13/16                | 3/8            | 20               | 0.02             | 220                   | 100  |
| 4428140    | 3/16                      | 0.197    | 5  | 2-7/16                 | 1/2            | 20               | 0.05             | 615                   | 279  |
| 4428240    | 1/4                       | 0.240    | 6  | 2-3/4                  | 9/16           | 20               | 0.08             | 880                   | 400  |
| 4428340    | 5/16                      | 0.310    | 8  | 3-7/16                 | 11/16          | 10               | 0.18             | 1,540                 | 699  |
| 4428440    | 3/8                       | 0.350    | 9  | 3-3/4                  | 3/4            | 10               | 0.24             | 1,980                 | 898  |



**DO NOT EXCEED CAPACITY!**  
See the SAFETY GUIDELINES section before using these products. Pages 122-133.

## Spring Links


Low carbon steel. Fast, easy connection for permanent or temporary connection.

| Stock#<br>UPC Tagged | Trade Size<br>(Inches) | Diameter |    | Length<br>(Inches) | Qty. Per Pkg. | Lbs. Per Each | Working Load Limit |      |
|----------------------|------------------------|----------|----|--------------------|---------------|---------------|--------------------|------|
|                      |                        | Inches   | MM |                    |               |               | Lbs.               | Kgs. |
| 4412240              | 1/8                    | 0.155    | 4  | 1.600              | 10            | 0.03          | 70                 | 30   |
| 4412840              | 3/16                   | 0.188    | 5  | 2.000              | 10            | 0.04          | 100                | 45   |
| 4410440              | 1/4                    | 0.240    | 6  | 2.375              | 10            | 0.06          | 175                | 79   |
| 4410640              | 9/32                   | 0.276    | 7  | 2.750              | 10            | 0.09          | 225                | 102  |
| 4410240              | 5/16                   | 0.310    | 8  | 3.125              | 10            | 0.16          | 350                | 159  |
| 4426040              | 11/32                  | 0.350    | 9  | 3.500              | 10            | 0.23          | 400                | 181  |
| 4425240              | 3/8                    | 0.393    | 10 | 4.000              | 10            | 0.32          | 425                | 193  |
| 4426140              | 7/16                   | 0.433    | 11 | 4.750              | 10            | 0.45          | 750                | 340  |
| 4427140              | 1/2                    | 0.465    | 12 | 5.560              | 10            | 0.55          | 1,200              | 544  |



## Hitch Pin Clips

| Stock # |               | Trade Size | Wire Diameter<br>(Inches) | Dimensions (Inches) |                |                | Qty. Per Pkg. | Lbs. Per Each |
|---------|---------------|------------|---------------------------|---------------------|----------------|----------------|---------------|---------------|
| Bulk    | UPC (Per Bag) |            |                           | Gauge               | Overall Length | Shaft Diameter |               |               |
| Zinc    |               |            |                           |                     |                |                |               |               |
| 3440335 | 3450335       | 3          | 0.091                     | 11                  | 1.630          | 1/4 to 1/2     | 50            | 0.01          |
| 3440635 | 3450635       | 6          | 0.177                     | 5                   | 3.380          | 5/8 to 1       | 14            | 0.05          |
| 3440735 | 3450735       | 7          | 0.091                     | 11                  | 2.310          | 1/4 to 5/8     | 50            | 0.10          |
| 3440835 | 3450835       | 8          | 0.177                     | 5                   | 3.750          | 7/8 to 1-1/4   | 20            | 0.60          |
| 3440935 | 3450935       | 9          | 0.148                     | 7                   | 2.450          | 3/4 to 1-1/8   | 20            | 0.33          |
| 3441135 | ---           | 11         | 0.125                     | 8                   | 2.620          | 7-16 to 3/4    | 36            | 0.18          |
| 3441935 | 3451935       | 19         | 0.243                     | 3                   | 4.060          | 1 to 1-1/2     | 12            | 0.12          |

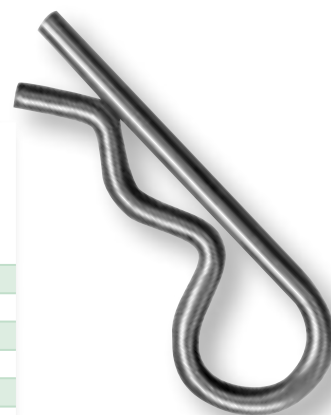


## S-Hooks - Low Carbon Steel

| Stock#  |            | Hook No. | S-Hook Type | Diameter (Inches) |               | Qty. Per Pkg. | Lbs. Per Each | Working Load Limit |      |
|---------|------------|----------|-------------|-------------------|---------------|---------------|---------------|--------------------|------|
| Bulk    | UPC Tagged |          |             | Wire Dia.         | Inside Length |               |               | Lbs.               | Kgs. |
| Zinc    |            |          |             |                   |               |               |               |                    |      |
| 7902735 | 7992735    | 27       | II          | 0.080             | 1.000         | 1,000         | 0.01          | 12                 | 5    |
| 7906335 | 7996335    | 63       | II          | 0.105             | 1.000         | 1,000         | 0.01          | 31                 | 14   |
| 7900835 | 7990835    | 8        | II          | 0.120             | 1.000         | 1,000         | 0.01          | 46                 | 21   |
| 7904335 | ---        | 43       | II          | 0.120             | 1.000         | 1,000         | 0.01          | 48                 | 22   |
| 7900935 | 7990935    | 9        | II          | 0.162             | 1.000         | 1,000         | 0.02          | 106                | 48   |
| 7949835 | 7999835    | 498      | II          | 0.120             | 1.500         | 1,000         | 0.01          | 28                 | 13   |
| 7901035 | 7991035    | 10       | I           | 0.135             | 1.500         | 1,000         | 0.02          | 25                 | 11   |
| 7900635 | 7990635    | 6        | I           | 0.192             | 1.500         | 1,000         | 0.03          | 70                 | 32   |
| 7911035 | ---        | 110      | II          | 0.192             | 1.500         | 1,000         | 0.03          | 117                | 53   |
| 7900435 | 7990435    | 4        | I           | 0.225             | 1.500         | 1,000         | 0.05          | 129                | 59   |
| 7901435 | 7991435    | 14       | I           | 0.187             | 2.000         | 1,000         | 0.04          | 53                 | 24   |
| 7953235 | 7993235    | 532      | I           | 0.249             | 2.000         | 1,000         | 0.07          | 142                | 64   |
| 7952635 | 7992635    | 526      | II          | 0.249             | 2.000         | 500           | 0.07          | 189                | 86   |
| 7962935 | 7992935    | 629      | II          | 0.312             | 2.000         | 500           | 0.12          | 375                | 170  |
| 7901735 | 7991735    | 17       | I           | 0.312             | 2.500         | 500           | 0.14          | 255                | 116  |
| 7901835 | ---        | 18       | I           | 0.375             | 2.500         | 250           | 0.21          | 457                | 207  |
| 7906635 | 7996635    | 66       | II          | 0.375             | 2.500         | 250           | 0.22          | 428                | 194  |



Type I



Type II

# Pulleys, Screw Eyes & Rope Accessories

## Swivel Eye Single Pulley

| Stock # | Trade Size (Inches) | Qty. Per Pkg. | Lbs. Per Package |
|---------|---------------------|---------------|------------------|
| Zinc    |                     |               |                  |
| 4411840 | 3/4                 | 40            | 0.07             |
| 4411540 | 1                   | 40            | 0.13             |
| 4412740 | 1-1/4               | 10            | 0.29             |
| 4410840 | 1-1/2               | 10            | 0.35             |
| 4410740 | 2                   | 10            | 0.55             |



## Fixed Eye Single Pulley

| Stock # | Trade Size (Inches) | Qty. Per Pkg. | Lbs. Per Package |
|---------|---------------------|---------------|------------------|
| Zinc    |                     |               |                  |
| 4411640 | 1                   | 40            | 0.11             |
| 4416740 | 1-1/4               | 10            | 0.25             |
| 4411240 | 2                   | 10            | 0.53             |

## Swivel Eye Double Pulley



| Stock # | Trade Size (Inches) | Qty. Per Pkg. | Lbs. Per Package |
|---------|---------------------|---------------|------------------|
| Zinc    |                     |               |                  |
| 4412640 | 1                   | 20            | 0.19             |

## Fixed Eye Double Pulley

| Stock # | Trade Size (Inches) | Qty. Per Pkg. | Lbs. Per Package |
|---------|---------------------|---------------|------------------|
| Zinc    |                     |               |                  |
| 4434040 | 1-1/4               | 10            | 0.30             |



## Screw Eyes

| Stock # | Size (Inches) | Qty. Per Pkg. | Lbs. Per Each |
|---------|---------------|---------------|---------------|
| 4416140 | 3/4 x 3-1/8   | 20            | 0.10          |
| 4416240 | 1 x 3-1/2     | 20            | 0.14          |
| 4416340 | 5/8 x 3-7/8   | 20            | 0.10          |



## Rope Accessories

### 4-1/2" Rope Cleat

Stock #: **4412540**  
Weight: 3.45 Lbs./Ea.  
Factory Package: 20/Ctn.  
Order Unit: Each



### 1/4" Screw Hook

Stock #: **4415940**  
Weight: 0.13 Lbs./Ea.  
Factory Package: 20/Ctn.  
Order Unit: Each



### 2" Hitch Ring Screw

Stock #: **4416540**  
Weight: 0.28 Lbs./Ea.  
Factory Package: 10/Ctn.  
Order Unit: Each



### 3/8 or 1/2" Rope Clamp

Stock #: **4415640**  
Weight: 0.05 Lbs./Ea.  
Factory Package: 20/Ctn.  
Order Unit: Each



### 1-1/2" Harness Ring

Stock #: **4435940**  
Weight: 0.07 Lbs./Ea.  
Factory Package: 20/Ctn.  
Order Unit: Each



### 2" Hitching Ring & Plate

Stock #: **4416640**  
Weight: 0.24 Lbs./Ea.  
Factory Package: 10/Ctn.  
Order Unit: Each



**DO NOT EXCEED CAPACITY!**  
See the SAFETY GUIDELINES section before using these products. Pages 122-133.

# CHAIN - WARNINGS AND INFORMATION



## **Refer to warnings on pages 2 - 9.**

These warnings also apply to chain and chain assemblies. Only additional warnings and information are listed below.

## **Never exceed the Working Load Limit of the chain.**

The Working Load Limit is the maximum load that should ever be applied to the chain, even when new and when the load is uniformly applied. Working Load Limit applies only to straight line pulls. When using multiple leg chain slings, the Working Load Limit of each leg will have to be reduced considerably depending on the angle of the sling legs. See page 4 for further discussion. Consult industry recommendations for information, such as ASME B 30.9.

When in doubt as to the Working Load Limit of the chain, refer to the periodic, permanently embossed grade marking on chain links. Proof Coil Chain is identified by P.C. or 30 or 3 or 28; High Test Chain by H.T. or 43 or 40 or 4; Transportation Chain by 70 or 7; Alloy Chain by 80 or 8 or 800 or 10 or 100.

## **Use only alloy chain for overhead lifting.**

Alloy chain, grade 80 or higher, is the only type of chain which can be used for overhead lifting. Use only alloy fittings, grade 80 or higher, for overhead lifting.

## **Attachments must have at least the same Working Load Limit as the chain used.**

Hooks, links, shackles, etc. must be of suitable material and strength to provide adequate safety protection.

## **Keep out from under a raised load.**

Do not move load over people. Do not ride on load. Conduct all lifting operations in such a manner that if equipment were to fail or break, no personnel would be injured. This means KEEP OUT FROM UNDER A RAISED LOAD, DO NOT OPERATE LOADS OVER PEOPLE AND KEEP OUT OF THE LINE OF FORCE.

## **Avoid shock loads.**

Avoid impacting, jerking or swinging of load. Working Load Limit will not apply in these circumstances because a shock load is generally significantly greater than the static load.

## **Inspect chain frequently.**

No product can keep operating at its rated capacity indefinitely. Closely examine each link for deformation, cracks, elongation, corrosion, rust, etc. Take chain out of service even if only one bad link is found. Eliminate twists and kinks in chain before using. Do not attempt to repair damaged or worn links in a chain. Do not attempt to weld, anneal, heat treat or hot galvanize alloy chain - its capacity will be completely destroyed. Protect chain from corrosion.

## **Destroy, rather than discard, chain that is judged to be defective.**

Chain that is not destroyed might be used again by someone not aware of the hazard associated with that use. Destroying chain is best done by cutting it up into short pieces.

## **Chain Slings.**

Only alloy chain, grade 80 or higher, can be used for overhead lifting.

Refer to OSHA standard 1910.184 and ASME standard B30.9 for design factors and other important information. Other standards and information may apply depending on specific use.

## **Consult the sources listed on page 97 for additional information.**



# CHAIN - PROOF COIL CHAIN, GRADE 30



**Caution:** Never use G30 Proof Coil Chain for overhead lifting or where its failure would cause damage to property or life.

## PROOF COIL CHAIN (GRADE 30)

| Nominal Size mm | Nominal Size Inches | Working Load Limit in Pounds | Feet per Drum | Feet per 1/2 Drum | Minimum Weight per Foot | Max. Length per 100 Links in Inches |
|-----------------|---------------------|------------------------------|---------------|-------------------|-------------------------|-------------------------------------|
| 4               | 1/8                 | 400                          | —             | 1,000             | 0.17                    | 90.5                                |
| 5.5             | 3/16                | 800                          | —             | 800               | 0.33                    | 96.4                                |
| 7               | 1/4                 | 1,300                        | 800           | 400               | 0.63                    | 124.0                               |
| 8               | 5/16                | 1,900                        | 550           | 275               | 0.93                    | 129.1                               |
| 10              | 3/8                 | 2,650                        | 400           | 200               | 1.41                    | 137.8                               |
| 13              | 1/2                 | 4,500                        | 200           | 100               | 2.40                    | 179.1                               |
| 16              | 5/8                 | 6,900                        | 150           | 75                | 3.58                    | 220.5                               |
| 20              | 3/4                 | 10,600                       | 100           | 50                | 5.48                    | 275.6                               |
| 22              | 7/8                 | 12,800                       | 80            | 40                | 7.31                    | 258.7                               |
| 26              | 1                   | 17,900                       | 60            | 30                | 9.41                    | 287.8                               |

Self colored, zinc plated, or hot galvanized. According to ASTM A413 and NACM Welded Steel Chain Specification. Proof tested to 2x the Working Load Limit.

**DO NOT USE FOR OVERHEAD LIFTING**

## DEALER PAILS, PROOF COIL CHAIN (GRADE 30)

| Nominal Size mm | Nominal Size Inches | Working Load Limit in Pounds | Feet per Pail, Approx. |
|-----------------|---------------------|------------------------------|------------------------|
| 4               | 1/8                 | 400                          | 500                    |
| 5.5             | 3/16                | 800                          | 250                    |
| 7               | 1/4                 | 1,300                        | 141                    |
| 8               | 5/16                | 1,900                        | 92                     |
| 10              | 3/8                 | 2,650                        | 63                     |
| 13              | 1/2                 | 4,500                        | 35                     |

Bright, zinc plated, or hot galvanized. According to ASTM A413 and NACM Welded Steel Chain Specification. Proof tested to 2x the Working Load Limit.

**DO NOT USE FOR OVERHEAD LIFTING**

## LONG LINK CHAIN (GRADE 30) - BUMPER MOORING CHAIN

| Nominal Size mm | Nominal Size Inches | Working Load Limit in Pounds | Feet per Drum | Inside Length* | Inside Width* | Min. Weight per Foot in Pounds |
|-----------------|---------------------|------------------------------|---------------|----------------|---------------|--------------------------------|
| 13              | 1/2                 | 4,500                        | 200           | 2.27           | 0.87          | 2.55                           |
| 16              | 5/8                 | 6,900                        | 150           | 2.56           | 1.00          | 3.50                           |
| 20              | 3/4                 | 10,600                       | 100           | 4.00           | 1.15          | 4.48                           |

Hot galvanized.

\* ± 5%



### WARNING: NEVER EXCEED WORKING LOAD LIMIT

Read important warnings and information on pages 2 - 9 and page 27.  
Never use grade 30 chain for overhead lifting.

# CHAIN - PROOF COIL CHAIN, GRADE 30



**Caution:** Never use G30 Proof Coil Chain for overhead lifting or where its failure would cause damage to property or life.

## PROOF COIL CHAIN (GRADE 30)

| Nominal Size mm | Nominal Size Inches | Working Load Limit in Pounds | Feet per Drum | Feet per 1/2 Drum | Minimum Weight per Foot | Max. Length per 100 Links in Inches |
|-----------------|---------------------|------------------------------|---------------|-------------------|-------------------------|-------------------------------------|
| 4               | 1/8                 | 400                          | —             | 1,000             | 0.17                    | 90.5                                |
| 5.5             | 3/16                | 800                          | —             | 800               | 0.33                    | 96.4                                |
| 7               | 1/4                 | 1,300                        | 800           | 400               | 0.63                    | 124.0                               |
| 8               | 5/16                | 1,900                        | 550           | 275               | 0.93                    | 129.1                               |
| 10              | 3/8                 | 2,650                        | 400           | 200               | 1.41                    | 137.8                               |
| 13              | 1/2                 | 4,500                        | 200           | 100               | 2.40                    | 179.1                               |
| 16              | 5/8                 | 6,900                        | 150           | 75                | 3.58                    | 220.5                               |
| 20              | 3/4                 | 10,600                       | 100           | 50                | 5.48                    | 275.6                               |
| 22              | 7/8                 | 12,800                       | 80            | 40                | 7.31                    | 258.7                               |
| 26              | 1                   | 17,900                       | 60            | 30                | 9.41                    | 287.8                               |

Self colored, zinc plated, or hot galvanized. According to ASTM A413 and NACM Welded Steel Chain Specification. Proof tested to 2x the Working Load Limit.

**DO NOT USE FOR OVERHEAD LIFTING**

## DEALER PAILS, PROOF COIL CHAIN (GRADE 30)

| Nominal Size mm | Nominal Size Inches | Working Load Limit in Pounds | Feet per Pail, Approx. |
|-----------------|---------------------|------------------------------|------------------------|
| 4               | 1/8                 | 400                          | 500                    |
| 5.5             | 3/16                | 800                          | 250                    |
| 7               | 1/4                 | 1,300                        | 141                    |
| 8               | 5/16                | 1,900                        | 92                     |
| 10              | 3/8                 | 2,650                        | 63                     |
| 13              | 1/2                 | 4,500                        | 35                     |

Bright, zinc plated, or hot galvanized. According to ASTM A413 and NACM Welded Steel Chain Specification. Proof tested to 2x the Working Load Limit.

**DO NOT USE FOR OVERHEAD LIFTING**

## LONG LINK CHAIN (GRADE 30) - BUMPER MOORING CHAIN

| Nominal Size mm | Nominal Size Inches | Working Load Limit in Pounds | Feet per Drum | Inside Length* | Inside Width* | Min. Weight per Foot in Pounds |
|-----------------|---------------------|------------------------------|---------------|----------------|---------------|--------------------------------|
| 13              | 1/2                 | 4,500                        | 200           | 2.27           | 0.87          | 2.55                           |
| 16              | 5/8                 | 6,900                        | 150           | 2.56           | 1.00          | 3.50                           |
| 20              | 3/4                 | 10,600                       | 100           | 4.00           | 1.15          | 4.48                           |

Hot galvanized.

\* ± 5%



### WARNING: NEVER EXCEED WORKING LOAD LIMIT

Read important warnings and information on pages 2 - 9 and page 27.  
Never use grade 30 chain for overhead lifting.

## CHAIN - HIGH TEST CHAIN, GRADE 43



**Caution:** Never use G43 High Test Chain for overhead lifting or where its failure would cause damage to property or life.

### HIGH TEST CHAIN (GRADE 43)

| Nominal Size<br>mm | Nominal Size<br>Inches | Working Load Limit<br>in Pounds | Feet<br>per Drum | Feet<br>per 1/2 Drum | Minimum Weight<br>per Foot | Max. Length<br>per 100 Links<br>in Inches |
|--------------------|------------------------|---------------------------------|------------------|----------------------|----------------------------|-------------------------------------------|
| 7.0                | 1/4                    | 2,600                           | 800              | 400                  | 0.63                       | 124.0                                     |
| 8.0                | 5/16                   | 3,900                           | 550              | 275                  | 0.93                       | 129.1                                     |
| 10.0               | 3/8                    | 5,400                           | 400              | 200                  | 1.41                       | 137.8                                     |
| 13.0               | 1/2                    | 9,200                           | 200              | 100                  | 2.40                       | 179.1                                     |
| 16.0               | 5/8                    | 13,000                          | 150              | 75                   | 3.58                       | 220.5                                     |
| 20.0               | 3/4                    | 20,200                          | 100              | 50                   | 5.48                       | 275.6                                     |

Self colored or hot galvanized.

According to ASTM A413 and NACM Welded Steel Chain Specification.

Proof tested to 2X the Working Load Limit.

### DEALER PAILS, HIGH TEST CHAIN (GRADE 43) - BRIGHT

| Nominal Size<br>mm | Nominal Size<br>Inches | Working Load Limit<br>in Pounds | Approximate Feet<br>per Pail |
|--------------------|------------------------|---------------------------------|------------------------------|
| 7.0                | 1/4                    | 2,600                           | 130                          |
| 8.0                | 5/16                   | 3,900                           | 90                           |
| 10.0               | 3/8                    | 5,400                           | 64                           |

## CHAIN - TRANSPORT CHAIN, GRADE 70



**Caution:** Never use G70 Transport Chain for overhead lifting or where its failure would cause damage to property or life.

### TRANSPORT CHAIN (GRADE 70)

Yellow chromate finish. According to ASTM A413 and NACM Welded Steel Chain Specification.

Proof tested to 2x the Working Load Limit.

| Nominal Size<br>mm | Nominal Size<br>Inches | Working Load Limit<br>in Pounds | Feet per<br>Drum | Ft. per 1/2<br>Drum | Minimum Weight<br>per Foot<br>in Pounds | Max. Length<br>per 100 Links<br>in Inches |
|--------------------|------------------------|---------------------------------|------------------|---------------------|-----------------------------------------|-------------------------------------------|
| 7.0                | 1/4                    | 3,150                           | 800              | 400                 | 0.63                                    | 124.0                                     |
| 8.0                | 5/16                   | 4,700                           | 550              | 275                 | 0.93                                    | 129.1                                     |
| 10.0               | 3/8                    | 6,600                           | 400              | 200                 | 1.41                                    | 137.8                                     |
| 13.0               | 1/2                    | 11,300                          | 200              | 100                 | 2.40                                    | 179.1                                     |

Plated.

Dealer Pails on request.



# CHAIN - STAINLESS STEEL CHAIN



**DO NOT USE FOR OVERHEAD LIFTING**

## STAINLESS STEEL CHAIN

| Nominal Size<br>mm | Nominal Size<br>Inches | Working Load Limit<br>in Pounds* | Feet<br>per Drum | Minimum Weight<br>per Foot in Pounds | Max. Length per<br>100 Links in Inches |
|--------------------|------------------------|----------------------------------|------------------|--------------------------------------|----------------------------------------|
| 4.0                | 1/8                    | 500                              | 1,000            | 0.17                                 | 88.8                                   |
| 5.0                | 3/16                   | 930                              | 1,000            | 0.38                                 | 96.4                                   |
| 7.0                | 1/4                    | 1,570                            | 800              | 0.61                                 | 124.0                                  |
| 8.0                | 5/16                   | 2,400                            | 550              | 0.84                                 | 129.1                                  |
| 10.0               | 3/8                    | 3,550                            | 400              | 1.40                                 | 137.8                                  |

\*AT ROOM TEMPERATURE

# CHAIN - ALLOY STEEL CHAIN, GRADE 100



## ALLOY CHAIN (GRADE 100) - IMPORTED and DOMESTIC

According to ASTM A973 and NACM Welded Steel Chain Specification.

| Trade Size<br>mm | Trade Size<br>Inches | Working Load Limit<br>in Pounds* | Minimum Weight<br>per foot in Pounds | Max. Length<br>per 100 Links in Inches |
|------------------|----------------------|----------------------------------|--------------------------------------|----------------------------------------|
| 7                | 9/32                 | 4,300                            | 0.71                                 | 88                                     |
| 8                | 5/16                 | 5,700                            | 0.92                                 | 96                                     |
| 10               | 3/8                  | 8,800                            | 1.44                                 | 126                                    |
| 13               | 1/2                  | 15,000                           | 2.36                                 | 164                                    |
| 16               | 5/8                  | 22,600                           | 3.76                                 | 202                                    |
| 20               | 3/4                  | 35,300                           | 5.50                                 | 252                                    |
| 22               | 7/8                  | 42,700                           | 7.12                                 | 277                                    |
| 26               | 1**                  | 59,700                           | 9.65                                 | 293                                    |
| 32               | 1.1/4 G80            | 72,300                           | 15.75                                | 375                                    |

Refer to pages 36 - 39 for Grade 100 Alloy fittings.

Chain is 100% proof tested to 2x the Working Load Limit.

\* **Working Load Limit is based on single leg Grade 100 alloy sling, when utilizing Grade 100 attachments.**

\*\* Not covered by ASTM A973 or NACM Welded Steel Chain Specification.


## CHAIN SLINGS

Only chain rated Grade 80 or higher can be used for chain slings for overhead lifting.

Refer to OSHA standard 1910.184, ASME standard B30.9 and ASTM A906 specification for design factors and other important information. Other standards and information may apply. Refer to page 4 for a discussion of chain slings.



# CHAIN HOOKS



## HIGH TEST\* CLEVIS GRAB HOOKS (GRADE 43)


**DO NOT USE FOR OVERHEAD LIFTING**

| Size<br>in Inches | Working Load Limit<br>in Pounds | Approximate Weight Each<br>in Pounds | Dimension in Inches |      |      |      |
|-------------------|---------------------------------|--------------------------------------|---------------------|------|------|------|
|                   |                                 |                                      | A                   | B    | C    | D    |
| 1/4               | 2,600                           | 0.43                                 | 0.38                | 0.38 | 0.34 | 1.94 |
| 5/16              | 3,900                           | 0.72                                 | 0.44                | 0.44 | 0.41 | 2.38 |
| 3/8               | 5,400                           | 1.15                                 | 0.56                | 0.47 | 0.50 | 2.63 |
| 1/2               | 9,200                           | 2.35                                 | 0.69                | 0.63 | 0.66 | 3.50 |
| 5/8               | 13,000                          | 4.10                                 | 0.81                | 0.63 | 0.81 | 4.19 |

Forged steel, heat treated, plated.

Also available in DOMESTIC.

**\*Ultimate Load is 3 times the Working Load Limit.**



## ALLOY / GRADE 70 CLEVIS GRAB HOOKS

**DO NOT USE FOR OVERHEAD LIFTING**

| Size<br>in Inches | Working Load Limit<br>in Pounds | Approximate Weight Each<br>in Pounds | Dimension in Inches |      |      |      |
|-------------------|---------------------------------|--------------------------------------|---------------------|------|------|------|
|                   |                                 |                                      | A                   | B    | C    | D    |
| 1/4               | 3,500                           | 0.43                                 | 0.38                | 0.38 | 0.34 | 1.94 |
| 5/16              | 4,700                           | 0.72                                 | 0.44                | 0.44 | 0.41 | 2.38 |
| 3/8               | 7,100                           | 1.15                                 | 0.56                | 0.47 | 0.50 | 2.63 |
| 1/2               | 12,000                          | 2.35                                 | 0.69                | 0.63 | 0.66 | 3.50 |

Forged steel, heat treated, yellow chromate.


Meets or exceeds the performance requirements of *NACM Forged Grade 30, Grade 43, and Grade 70 Chain Hook Specifications.*



### WARNING: NEVER EXCEED WORKING LOAD LIMIT

Read important warnings and information on pages 2 - 9 and page 33.  
Never use for overhead lifting.

# CHAIN HOOKS




## HIGH TEST\* EYE GRAB HOOKS (GRADE 43)

**DO NOT USE FOR OVERHEAD LIFTING**

| Size<br>in Inches | Working Load Limit<br>in Pounds | Approximate Weight Each<br>in Pounds | Dimension in Inches |      |      |
|-------------------|---------------------------------|--------------------------------------|---------------------|------|------|
|                   |                                 |                                      | A                   | C    | D    |
| 1/4               | 2,600                           | 0.30                                 | 0.50                | 0.31 | 1.88 |
| 5/16              | 3,900                           | 0.57                                 | 0.56                | 0.44 | 2.25 |
| 3/8               | 5,400                           | 0.95                                 | 0.69                | 0.50 | 2.56 |
| 1/2               | 9,200                           | 2.14                                 | 0.88                | 0.59 | 3.50 |

Forged steel, heat treated, plated.

\*Ultimate Load is 3 times the Working Load Limit.



## HIGH TEST\* EYE SLIP HOOKS (GRADE 43)

**DO NOT USE FOR OVERHEAD LIFTING**


| Size<br>in Inches | Working Load Limit<br>in Pounds | Approximate Weight Each<br>in Pounds | Dimension in Inches |      |      |
|-------------------|---------------------------------|--------------------------------------|---------------------|------|------|
|                   |                                 |                                      | A                   | C    | D    |
| 1/4               | 2,600                           | 0.36                                 | 0.50                | 0.69 | 2.00 |
| 5/16              | 3,900                           | 0.60                                 | 0.75                | 1.00 | 2.56 |
| 3/8               | 5,400                           | 0.91                                 | 0.75                | 1.06 | 3.00 |
| 1/2               | 9,200                           | 1.94                                 | 1.06                | 1.38 | 4.13 |

Forged steel, heat treated, plated.

\*Ultimate Load is 3 times the Working Load Limit.



# CHAIN HOOKS




## HIGH TEST\* CLEVIS SLIP HOOKS (GRADE 43)

**DO NOT USE FOR OVERHEAD LIFTING**

| Size<br>in Inches | Working Load Limit<br>in Pounds | Approximate Weight Each<br>in Pounds | Dimension in Inches |      |      |      |
|-------------------|---------------------------------|--------------------------------------|---------------------|------|------|------|
|                   |                                 |                                      | A                   | B    | C    | D    |
| 1/4               | 2,600                           | 0.58                                 | 0.38                | 0.38 | 0.88 | 2.56 |
| 5/16              | 3,900                           | 0.86                                 | 0.44                | 0.44 | 1.00 | 2.81 |
| 3/8               | 5,400                           | 1.40                                 | 0.56                | 0.47 | 1.28 | 3.25 |
| 1/2               | 9,200                           | 2.20                                 | 0.63                | 0.56 | 1.38 | 4.00 |

Forged steel, heat treated, plated.

\*Ultimate Load is 3 times the Working Load Limit.



## GRADE 70 CLEVIS SLIP HOOKS

**DO NOT USE FOR OVERHEAD LIFTING**

| Size<br>in Inches | Working Load Limit<br>in Pounds | Approximate Weight Each<br>in Pounds | Dimension in Inches |      |      |      |
|-------------------|---------------------------------|--------------------------------------|---------------------|------|------|------|
|                   |                                 |                                      | A                   | B    | C    | D    |
| 1/4               | 3,150                           | 0.58                                 | 0.38                | 0.38 | 0.88 | 2.56 |
| 5/16              | 4,700                           | 0.86                                 | 0.44                | 0.44 | 1.00 | 2.81 |
| 3/8               | 6,600                           | 1.40                                 | 0.56                | 0.47 | 1.28 | 3.25 |
| 1/2               | 11,300                          | 2.20                                 | 0.63                | 0.56 | 1.38 | 4.00 |

Forged steel, heat treated, yellow chromate.

Meets the performance requirements of NACM Forged Grade 30, Grade 43, and Grade 70 Chain Hook Specifications.



### WARNING: NEVER EXCEED WORKING LOAD LIMIT

Read important warnings and information on pages 2 - 9 and page 33.  
Never use for overhead lifting.