




LOAD MONITORING





LOAD MONITORING

**Technologies that improve safety
and enable data-informed decisions
on the job site**






Cloud-based solution to monitor projects from anywhere in the world

Straightpoint LoadConnect improves safety and efficiency on your work sites and enables your team to monitor loads and stay connected on any device with an internet connection.

LoadConnect is compatible with several Crosby Straightpoint products:




kitocrosby.com/loadconnect

Radiolink Plus (RLP)



- Capable of weighing and dynamic load monitoring in capacities from 1t to 500t.
- Constructed of lightweight, aerospace grade aluminum.
- Environmentally sealed to IP67 or NEMA6.
- Frequency: Proprietary 2.4 GHz wireless.
- Update rate of 3Hz and can be easily configured to run at industry-leading speeds of up to 200Hz.
- Remote on/off from handheld display or software.
- ATEX Zones 0, 1 & 2 available.
- Design validated by FEA.
- 2-year warranty.
- DNV-GL Type Approval.
- Complies with ASME B30.26.
- Bluetooth option is available and is supplied with a free HHP app for iOS and Android.
- Battery Type: Handheld 2 x AA / Loadcell 4 x AA.
- Battery Life: Handheld - 40 hours / Loadcell 1,200 hours continuous (Loadcell 500 hours if Bluetooth).
- Display Type: 240 x 128 pixel Multi-line dot matrix with backlight.
- Operating Temperature: 14°F to 122°F.
- Accuracy: $\pm 0.1\%$ of full scale.
- System Range (max): 3,280 ft (328 ft if Bluetooth), (1,640 ft if ATEX/IECEx).

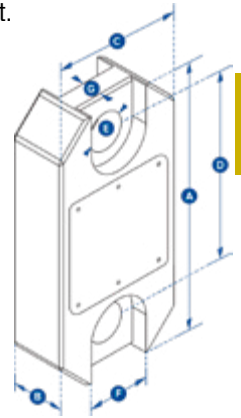

2



Straightpoint Radiolink Plus (RLP)


Stock No.	Model	Capacity (lb)	Resolution (lb)	Weight (lb)	Design Factor	Dimensions (in)							Crosby Shackle	
						A	B	C	D	ØE	F	G		
2789084	RLP1T	2200	1	3.3	12:1	8.03	1.69	4.09	5.75	0.96	1.89	0.75	G2130	1019490
2789089	RLP2T5	5500	2	3.3	7:1	8.03	1.69	4.09	5.75	0.96	1.89	0.75	G2130	1049490
2789094	RLP6T5	14300	2	5.3	7:1	9.80	1.69	4.45	6.50	1.50	2.60	1.26	G2130	1019533
2789082	RLP12T	26000	5	8.2	7:1	12.01	1.85	4.45	7.60	1.87	—	—	G2130	1019597
2789088	RLP25T	55000	10	11	5:1	13.39	2.36	4.53	8.46	2.17	—	—	G2130	1019659
2789091	RLP35T	77000	10	19	5:1	15.47	2.95	4.96	8.86	2.36	—	—	G2130	1019677
2789093	RLP55T	120000	20	28.7	5:1	16.69	2.95	7.09	9.06	2.99	—	—	G2140	1021156
2789095	RLP75T	165000	20	35.3	5:1	18.50	2.95	7.95	10.24	2.99	—	—	G2140	1021174
2789081	RLP100T	220000	100	75	5:1	23.94	3.90	10.04	12.60	4.29	—	—	G2140	1021192
2789083	RLP150T	330000	100	101.4	4:1	26.38	3.90	11.93	14.17	4.29	—	—	G2140	1021218
2789085	RLP200T	440000	200	180.8	5:1	27.56	5.67	13.78	13.78	5.71	—	—	G2140	1021234
2789087	RLP250T	550000	200	180.8	4:1	27.56	5.67	13.78	13.78	5.71	—	—	G2140	1021243
2789090	RLP300T	660000	200	260	5:1	31.73	5.91	16.77	13.78	6.30	—	—	G2140	1021252



Wireless Loadshackles (WLS)



- Capacities of 3.25t to 500t, as well as being obtainable up to 3,000t.
- Wireless range of 3,280 ft (328 ft if Bluetooth), (1,640 ft if ATEX/IECEx).
- Every Loadshackle is proof tested.
- Electronics housed in hard anodized enclosure.
- Environmentally sealed to IP67 or NEMA6.
- Battery life of 1,200 hrs from 4 x AA Alkaline batteries (500 hours if Bluetooth).
- Internal antenna.
- Remote on/off from handheld display or software.
- Supplied with a load-centering bobbin.
- 2-year warranty.
- Complies with ASME B30.26.
- Design validated by FEA.
- ATEX Zones 0, 1 & 2 available.
- Bluetooth option is available and is supplied with a free HHP App for iOS and Android.
- Handheld Plus available, but not included.
- Sizes 3.25t to 25t are Crosby 2130 shackles. Size 55t is the 2140 Crosby shackle. Sizes 85t and up are 2135 Crosby shackles.
- Design Factor: 5:1 when used with load bobbin.
- Operating Temperature: 14°F to 122°F.
- Accuracy: ±1% full scale.
- Frequency: 2.4 GHz.

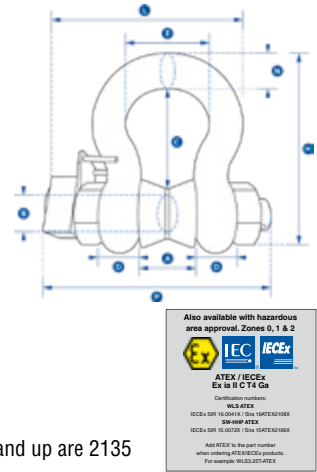


Straightpoint Wireless Loadshackles (WLS)

Stock No.	Model	Capacity (lb)	Resolution (lb)	Weight (lb)	Dimensions (in)										Crosby Shackle
					A	ØB	C	D	E	H	L	N	P		
2789186	WLS3.25T	7150	10	6.16	1.06	0.75	2.24	0.57	1.69	4.17	5.31	0.69	5.91	G2130	
2789200	WLS6.5T	14300	10	7	1.44	1.00	3.14	0.81	2.28	5.83	6.16	0.97	6.81	G2130	
2789183	WLS12T	26400	20	17.6	2.03	1.38	4.45	1.16	3.25	8.27	7.91	1.38	8.74	G2130	
2789185	WLS25T	55000	50	40	2.87	2.01	6.69	1.75	5.00	12.32	10.83	2.24	11.42	G2130	
2789199	WLS55T	120000	100	55	3.25	2.24	7.46	2.01	5.75	13.70	12.05	2.40	12.48	G2140	
2789201	WLS85T	185000	100	187	5.00	3.26	12.48	3.14	7.148	21.22	15.47	3.34	17.63	S2135	
2789172	WLS120T	260000	200	276	5.66	3.74	14.33	3.50	9.37	24.56	17.51	3.74	19.21	S2135	
2789184	WLS200T	440000	200	573	7.09	4.92	17.02	4.33	11.02	30.28	20.85	4.72	23.62	S2135	
2789188	WLS300T	660000	1000	893	8.07	5.91	19.88	4.72	12.01	35.59	23.10	5.51	25.87	S2135	
2789189	WLS400T	880000	1000	1459	9.06	6.89	21.56	6.30	12.80	39.63	26.27	6.30	30.12	S2135	

Wireless Signal Booster




- Improve RF distance.
- Takes RF signal to help around corners or 1 or 2 story floors.
- Divert signal from load cells around obstacles or buildings to a handheld or laptop.
- Increase signal range in a straight line range.
- Range 400 meters / 1312 feet.
- Connect up to 10 load cells simultaneously.
- 25 days battery life (assuming 8hr days).
- Environmental protection IP67/NEMA6.
- Included power supply for optional use.

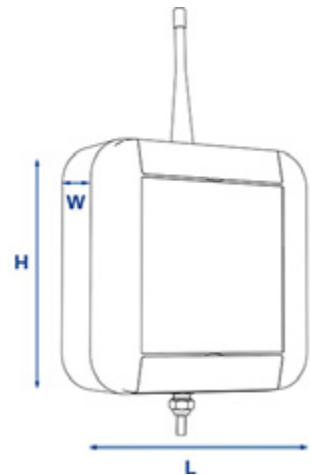


Crosby Straightpoint Wireless Signal Booster

Stock No.	Model	Capacity	Weight (lb)	Power	Battery Life	Optional Power Supply	Operational Current	Operating Temperature	Frequency	Range (ft)	Protection	Dimensions (in)		
												A	B	C
2789732	SW-R	up to 10 wireless load cells	0.66	2x D alkaline or mains adaptor	25 Days (8hrs use/day)	PSU Input Voltage 100V AC to 240V AC supplied with UK/EU/US/AUS mains plugs	70mA	-10 to +50 °C / 14 to 122 °F	2.4 GHz	1312	IP67 / NEMA6	5.9	5.9	2.17

LoadSafe (WNI)



- Industry leading wireless range up to 1000m or 3,280ft.
- High grade 17-4PH stainless steel, providing excellent strength and corrosion resistance.
- Frequency: Proprietary 2.4 GHz wireless.
- Accuracy of $\pm 0.1\%$ FS.
- Environmentally sealed to IP67 or NEMA6.
- Stocked capacities up to 1000t.
- Internal antenna.
- ATEX & IECEx version for hazardous area zones 0, 1 & 2 available.
- Battery life of 1200 hrs.
- Compact size.
- Remote on/off from handheld display or software.
- Design validated by FEA.
- Bluetooth option is available and is supplied with a free HHP App for iOS and Android.
- Handheld available, but not included.
- Design Factor: 3:1
- Battery Type: Handheld 2 x AA / Loadcell 4 x AA.
- Operating Temperature: 14°F to 122°F.
- Accuracy: $\pm 0.1\%$ of full scale.
- Battery Life: Handheld - 40 hours / Loadcell 1,200 hours continuous (Loadcell 500 hours if Bluetooth).
- System Range (max): 3,280 ft (328 ft if Bluetooth), (1,640 ft if ATEX/IECEx).



2




Straightpoint LoadSafe (WNI)

Stock No.	Model	Capacity (lb)	Resolution (lb)	Weight (lb)	Dimensions (in)							
					ØA	B	ØD	E	F	G	H	I
2789197	WNI5TC	11000	2	13.64	3.94	5.00	2.32	0.63	M18 x 2.5	5.98	6.22	0.87
2789191	WNI10TC	22000	5	13.64	3.94	5.00	2.32	0.63	M18 x 2.5	5.98	6.22	0.87
2789193	WNI25TC	55000	10	13.64	3.94	5.00	2.32	0.63	M18 x 2.5	5.98	6.22	0.87
2789196	WNI50TC	110000	20	13.64	3.94	5.00	2.32	0.63	M20 x 2.5	5.98	6.22	0.87
2789190	WNI100TC	220000	100	34	5.98	7.24	3.15	1.02	M20 x 2.5	17.01	8.19	1.30
2789192	WNI150TC	330000	100	34	5.98	7.24	3.15	1.02	M20 x 2.5	17.01	8.19	1.30
2789194	WNI300TC	660000	200	143	7.28	11.81	6.10	1.08	M20 x 2.5	17.01	9.49	1.93
2789195	WNI500TC	1100000	500	143	7.28	11.81	6.10	1.08	M20 x 2.5	17.01	9.49	1.93
2789138	WNI1000TC	2200000	1000	379	14.25	12.20	10.63	1.57	M30 x 3.5	37.40	16.61	4.02



BlueLink

- Design Factor: 5:1.
- Battery Type: 4 x AA alkaline batteries.
- Battery Life: 500 hours.
- Operating Temperature: 14°F to 122°F.
- Accuracy: $\pm 0.2\%$ of full scale.
- Range: 328 feet.
- Data Rate: 3 Hz.
- Protection: IP67 / NEMA6.

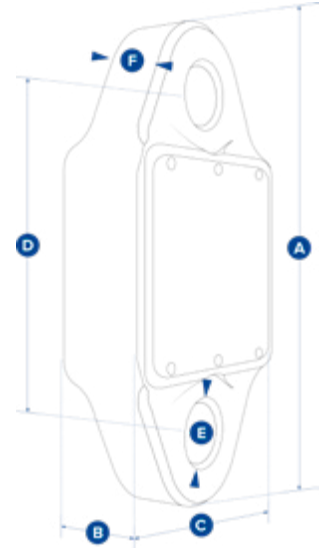

Straightpoint BlueLink (BLD)

Stock No.	Model	Capacity (lb)	Resolution (lb)	Weight (lb)	Dimensions (in)						Crosby Shackle	
					A	B	C	D	ØE	F		
2789218	BLD6T5	14300	2	3.3	8.82	1.73	4.45	6.14	1.08	1.02	G2130	1019533

Designed to replace outdated mechanical products still in the field, this 14,300 lb dynamometer, the BlueLink, is the latest Crosby Straightpoint product to feature proprietary Bluetooth wireless technology.

The Bluetooth signal effortlessly connects to any iOS or Android smartphone that has our free HHP app installed, providing the operator with a wireless range of up to 328 ft. This allows them to stand in a safe position from the load with no requirement to read a load on the loadcell itself. The app also allows the operator to log data versus time, or on events such as over- or under-load. An adjustable alarm will alert the operator on their smartphone if any overload is occurring.

Rigged using industry standard Crosby G2130 Shackles, the BlueLink has been designed to minimize headroom (6.14 in from eye to eye). With a design factor of over 5:1, its compact lightweight design does not sacrifice on strength.


Constructed from high-quality aerospace grade aluminum, which is then hard-anodized, BlueLink features an advanced internal design structure. This design provides the product with an unrivaled strength to weight ratio. The use of a separate internal sealed enclosure administers the loadcell's electronic components with IP67 or NEMA6 environmental protection, even with the battery cover plate missing. All these features makes it an industry-leading compact dynamometer, even more suitable for use in the harshest industrial or leisure environments.

The BlueLink is powered by four standard AA alkaline batteries that provide in excess of 500 hours transmission time. Its internal antenna ensures safe transmissions of loads to an accuracy of $\pm 0.2\%$ FS.

Self Indicating Dynamometer



- Large 1 in LCD display
- 0.2% high accuracy
- Overload counter
- 90db Audible set point alarm
- RS-485 serial output
- IP65 / NEMA 4X
- Design validated by F.E.A.
- 2-year warranty
- Design Factor: 6:1
- Battery Type: 9v PP3
- Battery Life: 80 hrs continuous
- Operating Temp: 4° to 122° F.
- Accuracy: +/- 0.2% of full scale.
- Display Type: 6 digit 1 in LCD.
- Protection: IP65 / NEMA 4X.

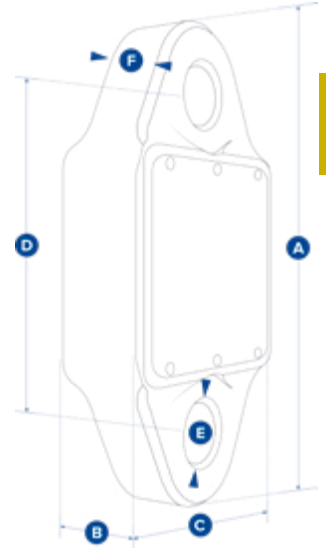

Straightpoint Self Indicating Dynamometer (SID)

Stock No.	Model	Capacity (lb)	Resolution (lb)	Weight (lb)	Dimensions (in)						Crosby Shackle	
					A	B	C	D	ØE	F		
2789709	SID6T5	14,300	2	3.3	8.82	1.73	4.45	6.14	1.08	1.3	G2130	1019533

Designed to replace outdated mechanical products still in the field, the Self Indicating Dynamometer (SID) is the latest Crosby Straightpoint product with a self-indicating display that provides accurate load measurements to prevent incidents and injuries.

The SID is a self-indicating version of the popular BlueLink and provides load monitoring solutions where close-up measurements are required, such as when operating lever and chain hoists at height or lifting vehicle motors.


The SID's advanced microprocessor-based electronics deliver high-speed read rates, extreme resistance to industrial-level noise, and unprecedented stability. It features full-function push button controls for:

- Tare and preset tare
- Selectable measurement units (lbs, kg, kN and tonnes)
- 100Hz high-speed peak hold
- Audible set-point alarm
- Overload counter

Designed for use with industry-standard Crosby G-2130 shackles, the SID's compact design minimizes headroom loss (6.14 in from eye to eye).

Constructed with high-grade aircraft-quality aluminum and with a 6:1 Design Factor, its lightweight design does not sacrifice on strength. In fact, Crosby SP link style dynamometers are, on average, 30% lighter than those of other suppliers.

Clamp On Line Tensionmeter Calibration Verification Tool

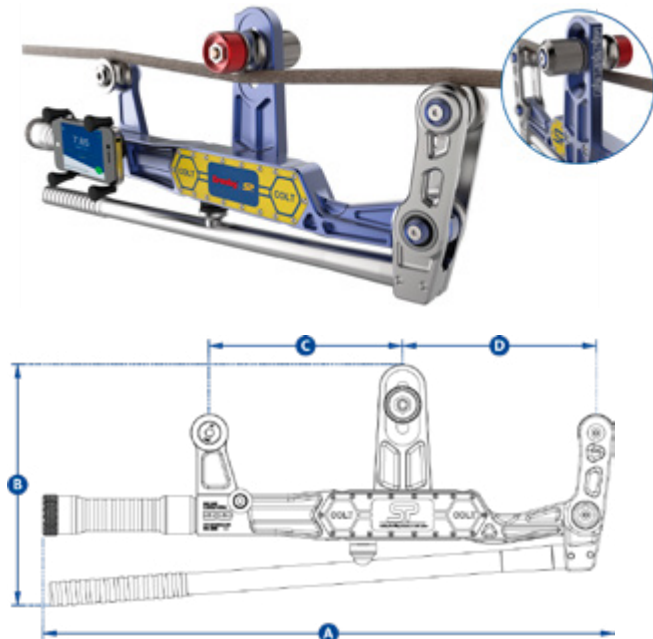

- Lightweight wire rope tension meter for fast and accurate measurement of tensions up to 11,000 lb and up to 1 in diameter.
- Constructed from aerospace grade aluminum.
- Unlimited wire rope calibration database via Android or iOS app.
- Built-in magnetic smart device holder for on board display.
- Main swivel joints fitted with high-quality bearings.
- Lever ratio of 5.3:1 allows effortless, safe, clamping onto pre-tensioned wire ropes.
- Wireless Bluetooth 4.2 enabling operator to stand a safe distance away, up to 328 ft.
- Quick intuitive adjustable center sheave makes changing wire rope sizes fast and easy.
- No easily broken external antenna.
- High waterproof resistant design IP67 or NEMA6 for all weather use.
- Long battery life of 1,000 hrs Bluetooth transmission time.
- As the library of wire rope diameters and constructions is increased each app user will benefit when they update free of charge.
- Max Line Reduction: 7/32" with a Ø3/8" wire rope
- Wire Rope Database: Infinite via Android or iOS app.
- Battery Type: 2 x 'C' cell batteries.
- Operating Temperature: -13°F to +158°F
- Accuracy: ±3% of full scale if wire rope Ø and construction known.
- COLT calibration rod is included as standard.


Straightpoint Clamp On Line Tensionmeter Calibration Verification Tool

Stock No.	Model	Capacity (lb)	Resolution (lb)	Rope Diameter (in)		Weight (lb)	Dimensions (in)			
				Min	Max		A	B	C	D
2789000	COLT5T	11000	20	3/16	1	7.7	23.20	7.90	7.90	7.90

Specifications assume COLT used on a wire rope with a fixed and flexible end.



Watch demo at kitocrosby.com/COLT-demo

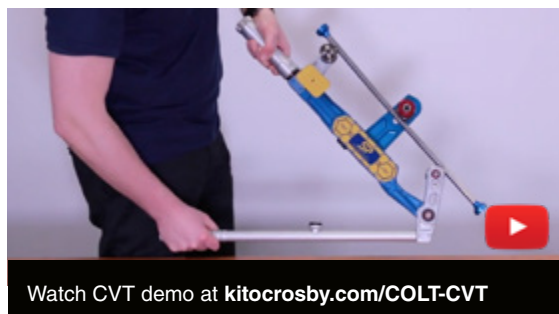


Watch CVT demo at kitocrosby.com/COLT-CVT

Optional for purchase:
Calibration verification tool (CVT)
SP - SA507 Crosby 2789225

In order to ensure the measurements of the COLT are as accurate as possible, Kito Crosby supplies a calibration verification rod.

Bolt On Line Tension Meter (BOLT)

2

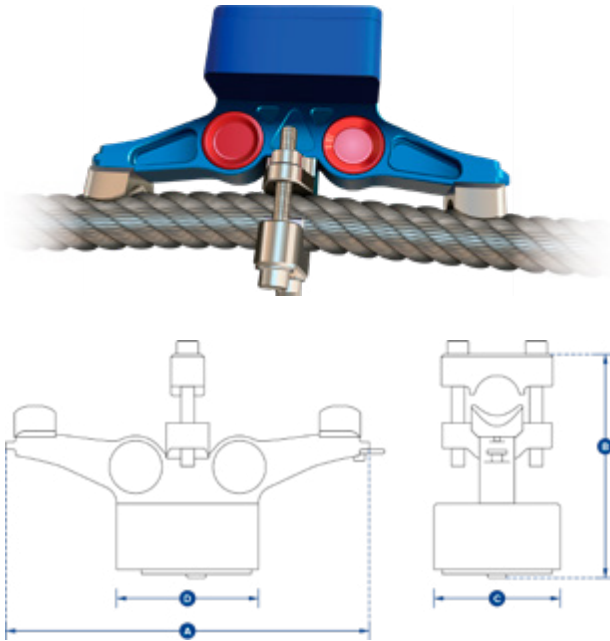

- Constructed from aerospace-grade aluminum.
- Designed to be mounted in a permanent position on wire rope or cable to accurately monitor measurements of tension up to 20,000 lb and up to 1.25in diameter.
- Proprietary 2.4 GHz wireless.
- Leading wireless range of 3,280 ft when connected to SW-HHP, enabling you to read up to four loadcells simultaneously.
- Unlimited range when connected to BaseStation to monitor remotely.
- Will provide reduced site visits, improve decision making and safely monitor line tensions from any distance from anywhere in the world.
- Unrivaled battery life of 1,200 hrs.
- Multiple drop tested from 10 feet.
- Internal antenna.
- Remote on/off from handheld display or software.
- Units: kilograms, pounds, metric tons and kilonewtons.
- Battery Type: 4 x 'AA' cell batteries.
- Operating Temperature: 14°F to +122°F.
- Protection: IP67 / NEMA6.
- Accuracy: Typically 3-5%.

Straightpoint Bolt On Line Tension Meter (BOLT)

Stock No.	Model	Capacity (lb)	Resolution (lb)	Rope Diameter (in)		Weight (lb)	Dimensions (in)		
				Min	Max		A	B	C
2789573	BOLT10T	22,000	20	5/8	1 1/4	4.6	10.20	6.26	3.50




Crosby Straightpoint Training Videos

- How to pair a loadcell (and multiple loadcells) to a handheld
- How to know the correct number of compression cells required
- How to use the backlight function on a handheld
- How to get accurate loadcell readings at various distances
- Snatch block & loadcell demonstration
- COLT calibration verification tool installation demo
- Plus many more...

Watch now at kitocrosby.com/spvideos

CableSafe

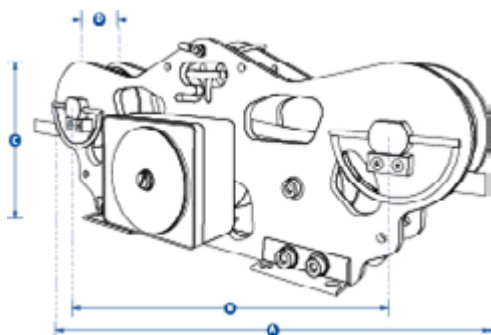

- Simple to use and set up.
- Remote monitoring using smart phone via Bluetooth.
- Rapid tension force measurement - Up to 1,968ft per minute.
- Able to be used in all weather and air quality conditions.
- Battery type: 4 x AA standard alkaline providing up to 500 hours battery life.
- Fully constructed from aerospace-grade aluminum with anodized finish.
- Five-wheel design, improving accuracy.
- Blue anodized side plates.
- Linchpins are fitted to the top sheave pins, making wire rope installation quick and simple.
- Maintenance free heavy duty bearings.
- Compatible with a wide range of synthetic rope/electrical cable diameters 5/32 in to 1 3/16 in.
- IP67 ingress protection or NEMA6 – heavy protection against dust and rain.
- Design validated by FEA.
- Accuracy: 2% of Full Scale.
- Range: 328 feet.
- Operating Temperature: 14°F to 122°F.

Straightpoint CableSafe

Stock No.	Model	Capacity (lb)	Synthetic Rope / Electrical Cable Ø (in)	Resolution (lb)	Rope Diameter (in)		Weight (lb)	Dimensions (in)			
					Min	Max		A	B	C	D
2789219	Cablesafe	22000	5/32 - 3/4	20	5/32	3/4	10	16.62	12.90	5.98	1.40
2789399	Cablesafe-WD	22000	3/8 - 1-3/16	20	3/8	1-3/16	17.6	16.62	12.90	5.98	2

In addition to the TIMH range, the CableSafe® is the continued evolution of the Crosby Straightpoint running line tensiometers. When used in the field, it will allow the user to monitor tension with exceedingly high levels of accuracy, which ensures rope/cables do not become overstretched or break.


When using a capstan winch to unwind electrical cable from a reel/spool, you will be able to integrate the CableSafe within this set-up to ensure that it is being pulled at a safe tension level. This helps the line maintain its transmissions capability, prevent it becoming a fire hazard risk, and it also stops the need of furthering work in order to remove and replace it. The contractor is gifted with decreased liability, dramatically increasing peace of mind.

Using CableSafe on cable pulls reduces liabilities on cable installations, making it ideal for the following applications:


- Measure tension when pulling electrical cables – protect against fractures or elongation
- Measuring tension on synthetic rope when erecting delicate structures using gin poles and capstan winch

Another example of best use is during the installation of cell phone towers or similar delicate structures. The product helps ensure structure-to-ground ropes which are connected to a gin pole and pulley system. Avoid the unknown through accurate monitoring, especially when risks are high.

Running Line Dynamometer (RLTM)

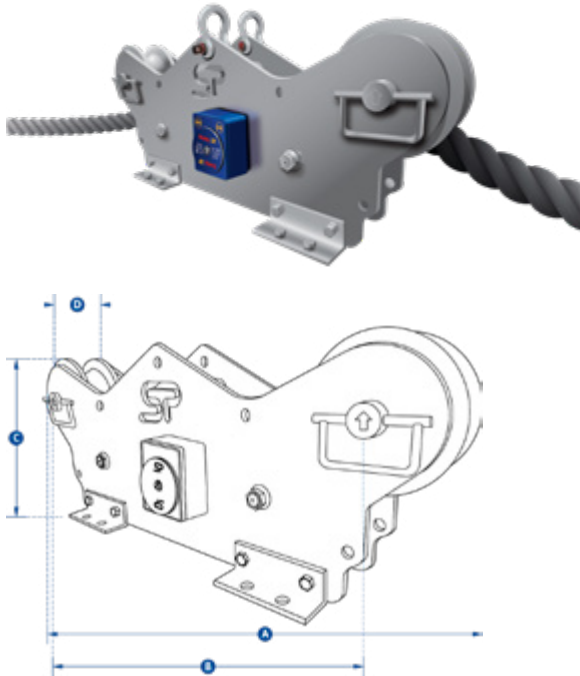

- Fully constructed from corrosion-resistant stainless steel.
- Large range of capacities to 150t and wire rope diameters up to 3½ in.
- Measures tension force at speeds up to 65ft/min.
- Five-wheel design, improving accuracy.
- Maintenance-free heavy duty bushes.
- Options for lineout and speed available.
- Software available to data log and monitor or analog outputs.
- Cabled system or wireless bluetooth option are available and is supplied with a free HHP app for iOS and Android.
- IP67 or NEMA6 Loadpin.
- Design validated by FEA.
- Battery Type: 4 x AA Alkaline.
- Battery Life: Wireless version 1,200 hours continuous.
- Operating Temperature: 14°F to 122°F.
- Accuracy: ±2% of full scale.
- Frequency: 2.4 GHz.
- System Range (max): 2,300 feet.
- Data Rate: 3 updates per second.
- Line out and speed: via SW-MWLC software.



Straightpoint Running Line Dynamometer (RLTM)

Stock No.	Model	Capacity (lb)	Resolution (lb)	Rope Diameter (in)		Weight (lb)	Maximum Speed (ft per minute)	Dimensions (in)			
				Min	Max			A	B	C	D
2789054	MTIMH10TRD	22000	20	5/32	3/4	20	164	16.62	12.90	5.98	1.40
2789136	TIMH10TRD	22000	20	1/2	3/4	198	65	34.05	26.53	12.95	4.37
2789139	TIMH25TRD	55000	50	5/8	1	190	65	34.05	26.53	12.95	4.37
2789144	TIMH56TRD	123200	100	1 1/8	1 1/2	179	65	34.05	26.53	12.95	4.37
2789146	TIMH80TRD	176000	200	1 5/8	2	168	65	34.05	26.53	12.95	4.37
2789270	TIMH150TRD	330000	500	2	3 1/2	506	65	49.20	41.33	16.37	6.02


The TIMH range is a Wireless Running Line Tensiometer or RLTM built with dockside, marine, offshore, towage and salvage applications in mind. It is particularly useful where there is no anchor or dead end on the line to rig a Straightpoint Radiolink or Loadlink digital dynamometer to measure tension force at speeds up to 20m/min or 65ft/min.



Towcell®



- Unique design fits any standard 2 inch tow hitch.
- Waterproof IP67 or NEMA6.
- Internal antenna.
- Compact size and lightweight.
- Proprietary 2.4 GHz wireless communication.
- Design validated by FEA.
- Bluetooth enabled and is supplied with a free HHP app for iOS and Android.
- Battery type: 4 x AA standard alkaline providing up to 500 hours battery life.
- Design factor: 5:1.
- Accuracy: 2% of Full Scale.
- Range (max): 328 feet.
- Operating Temperature: 14°F to 122°F.
- Data Rate: 50 Hz

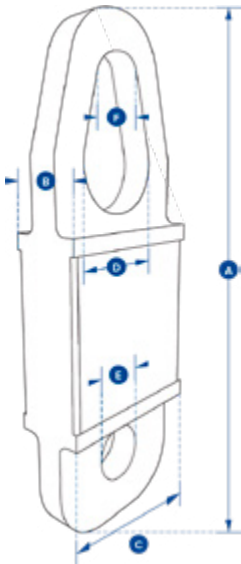

Straightpoint Towcell®

Stock No.	Model	Capacity (kN)	Resolution (kN)	Weight (lb)	Dimensions (in)					
					A	B	C	ØD	ØE	ØF
2789271	Towcell - Bluetooth	25	0.01	3	11.81	1.70	4.09	2.00	1.06	1.22

Only sold in Europe. Does not meet US towing requirements.

The Crosby Straightpoint Towcell® is a 25kN wireless loadcell, specifically engineered for the emergency services, salvage, and 4x4 industries.

The Towcell allows for increased safety and the avoidance of costly overloads by providing real-time monitoring of tensile towing forces during recovery, clearance and salvage efforts.

The Towcell is rugged, lightweight, compact, and can be installed, with ease, onto any tow bar, whether it's a standard 52mm or 2 in ball or pin assembly and is ready to use in seconds.


Modeled after the Crosby SP bestselling Radiolink Plus, the Towcell is constructed of high-quality aircraft grade aluminum. It features an advanced internal design structure, providing the product with an unrivaled strength to weight ratio. This optimal balance allows for the use of a separate internally sealed enclosure. This administers the internal electronic components with an IP67 or NEMA6 waterproof environmental protection, even with the battery cover plate missing.

Towcell utilizes an unbreakable internal antenna and boasts an unmatched battery life.

ChainSafe



- Designed to work with 3/8 in chain.
- Unmatched weight-to-strength ratio.
- Update rate of 1Hz and the Bluetooth signal effortlessly connects to any iOS or Android smartphone that has our free HHP App that will alert the operator on their smartphone if any overload is occurring.
- Bluetooth wireless range of 328ft.
- No battery change required.
- Battery life: 5 yrs based on 3 hrs use per day.
- Battery Type: Lithium Thionyl Chloride (non replaceable).
- Environmentally sealed to IP67/NEMA6.
- Internal antenna.
- Conforms to EN1677:2008.
- Fatigue tested to 30,000 cycles to 1.5x WLL.
- Design Factor: 4:1.
- Operating Temperature: 14°F to 122°F.
- Recommended Fittings: 3/8" (10mm) G100 chain fittings.

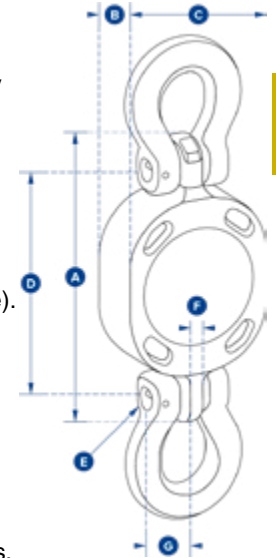

2

Straightpoint ChainSafe

Stock No.	Model	Capacity (lb)	Resolution (lb)	Weight (lb)	Dimensions (in)						
					A	B	C	D	E	F	G
2789536	ChainSafe	88,000	5	5.5	6.46	1.38	3.35	5.20	0.52	0.43	1.10

ChainSafe is designed to be fitted with an array of Kito Crosby chain fittings, and is an approved wireless tension loadcell capable of load monitoring of capacities up to 4t.

Grab Hooks:



Chain shortener:



Links:



Lashing:



Links:





Connectors:



chain fittings are not included

INSIGHT Software

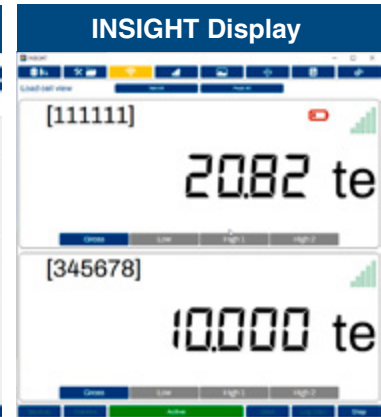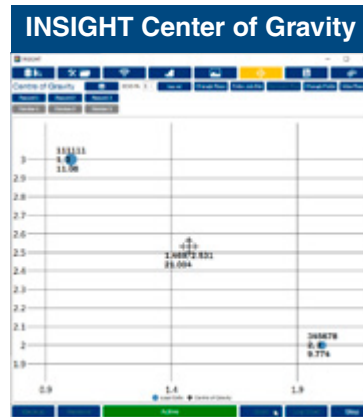

INSIGHT software, supplied with an SW-D USB wireless dongle, allows connection of up to 126 Crosby Straightpoint wireless loadcells simultaneously onto any Windows tablet or laptop.

Insight has four main features:

- Multi-channel display and data logging mode**
 View and log load data from connected loadcells plus totals loads live on screen and directly into a .csv file for later analysis at speeds of up to 200Hz.
- Visualization mode**
 For complicated lifts import a photo of the lift and drag and drop loadcell displays – make the screen look like the lift.
- Center of gravity mode**
 Connect to the Crosby SP range of wireless compression loadcells and use this feature to weigh and calculate the center of gravity of large items and structures.
- Proof load testing**
 Real time graphing of load test and auto generated test certificates.
- Logging at timed intervals, manual or on overload/underload.
- Log data at speeds up to 200Hz.
- Visual and audible alarms indicate overload, underload, low battery, and communications error.
- 100% wireless, no easily damaged cables.
- 700m or 2300ft range allows operator to stand at safe distance from test.
- Connects to any Crosby SP wireless loadcell.
- Automatically creates digitally signed pass or fail certificate.
- Real-time load v time graph display.
- Three weighings per C of G report with averages and statistical analysis to ISO19901.
- Plot loadcell positioning using measurements or GPS coordinates.
- Free extra entry fields for operator, client, wind speed, sea states, and temperature available for reporting.

INSIGHT Software

Numerous proof load testing applications worldwide require a loadcell to verify the load applied. From crane testing, using water bags to pad eye testing, using hydraulic tools, the need to document test procedure and results has never been greater, especially as users of lifting equipment call for more traceability and audit trails.

A proof test is a form of stress test to demonstrate the fitness of a load-bearing structure, and is nominally a non-destructive test. Such a structure is often subjected to loads above that expected in normal use, demonstrating safety and design margin.

This demand has increased so much, Kito Crosby offers a software package designed to connect to any of their wireless loadcells – Proof Test plus.

This impressive package allows the test engineer to wirelessly, at a safe distance, monitor a proof load test and automatically create a pass or fail certificate when testing is complete.

The report is formatted as a PDF, which may then be printed, emailed, or uploaded to the cloud, resulting in a traceable document for both test engineer and end customer.

Typical load tests using Crosby SP loadcells include:

- Bollard pull tests
- Tug tests
- Crane test (water bags, block weights)
- Pad eye or fly point testing
- Crash barrier testing
 - Lifting equipment testing
 - Slings, chains, wire rope, hooks
- Construction equipment testing
 - Shoring columns, acrow props, lintels
- Lifting and spreader beam testing
- Hydraulic cylinder load test
- Supplied with SW-D transmitter



Stock No.	2789318
Model	INSIGHT
IP rating	IP67 / NEMA6
USB Dongle Operating Temp.	-4°F to 158°F / -20°C to +70°C
Licence	RF Band License free
Frequency	2.4 GHz
Range	2,300 feet / 700 meters
Loadcell Inputs	Up to 126
PC Requirements	Intel i5 processor with 8Gb RAM
Operating System	Windows 10, Windows 11

Straightpoint LoadConnect Software (LCBS)



Crosby Straightpoint LoadConnect, connected to BaseStation, is a cloud-based solution to monitor loads and line tensions from any distance and from anywhere in the world. Stay connected, protect assets, reduce site visits, and improve safety.

- Dashboard overview.
- Live load data.
- Error reporting.
- Productivity and utilization graphs.
- Regular email reporting.
- SMS alerts.
- Connect to BOLT to monitor tension on cables.
- Connect to SP loadcells to monitor loads.

LCBS Base

How it works:



Stock No.	2789574	0000000
Model	LCBC-N	LCBS-W
Required Power Supply	9 to 28 V DC	9 to 28 V DC
Radio Frequency	2.4 GHz (License Free)	2.4 GHz (License Free)
Maximum Number of Loadcells	16	16
Range	Up to 500 meters / 1,640 feet	Up to 500 meters / 1,640 feet
Operating Temperature Range	-10°C to 50°C / 14°F to 122°F	-10°C to 50°C / 14°F to 122°F
Backup Battery Life	16 hours	16 hours
Input Option	1x 4-20mA (2 wire) OR 1x mV/V & Wireless	1x 4-20mA (2 wire) OR 1x mV/V & Wireless
Weight	2.75 kg / 6.06 lb	2.75 kg / 6.06 lb
Network Supported	4G / 3G	Wifi
Frequency Band	LTE-TDD B34/B38/B39/B40/B41 LTE-FDD B1/B2/B3/B4/B5/B7/B8/B12/B13/ B18/B19/B20/B25/B26/B28/B66 UMTS/HSPA+ B1/B2/B4/B5/B6/B8/B19	N/A
SIM Type	Micro SIM (NOT INCLUDED)	N/A
Alert Functionality	via SMS (up to 3 pre defined numbers) Optional subscription to online dashboard	Subscription to online dashboard only *(No SMS Alerts)
IP Rating	IP67 / NEMA6	IP67 / NEMA6
Dimension	560 x 260 x 90 mm - Antennas included	560 x 260 x 90 mm - Antennas included

*Data option to be enabled on the SIM card used for full functionality
User configuration is required via free software supplied

Data option to be enabled on the SIM card used for full functionality.
User configuration required via free software supplied.

Straightpoint Accessories

Kito Crosby's range of wireless accessories may be used with any Crosby SP wireless loadcells

2



Wireless Overload Alarm Module

Part N°s SP SW-OAM Crosby 2789129

This wireless relay module features audio and visual warning indicators. The set point of the unit can be triggered from a single or summed group of up to four Crosby SP wireless loadcells. It contains two relays (NO and NC). NO is for audio and visual indications, while NC is a spare and can be used to control 230V AC / 30VDC 5A systems.



Wireless Scoreboard Display

Part N°s SP SW-SD Crosby 2789132

This 100mm or 4" scoreboard LED display is wireless and operates between 100-240V AC. The numerals are viewable for up to 45m or 150ft, making it perfect for installation on a crane gantry. The SW-SD displays an individual load in metric tons or summed load of up to four Crosby Straightpoint wireless devices.



Wireless Base Station with Analog Output

Part N°s SP SW-BS Crosby 2789314

The SW-BS provides a configurable analog output for any single or summed group of up to 4 loadcells Crosby Straightpoint wireless loadcell and is ideal for integration to a PC, PLC and other data acquisition. Housed in a IP65 enclosure, the output can be selected from current 4-20mA, 2 relay outputs, RS485 ASCII (Configurable) plus an optional CANbus 2.0A or 2.0B output.



Loadcell Transmitter

Part N°s SP SA700C Crosby 2789097

The SA700C transmitter connects to strain gauge transducers such as loadcells, torque sensors and pressure transducers allowing them to form part of a Crosby Straightpoint wireless system. Load data from the SA700C can be received by multiple receivers that include SW-HHP handheld, INSIGHT software or the Crosby SP range of wireless accessories.



Wall or Cab Mount Bracket

Part N°s SP SU3282 Crosby 2789228

Constructed from stainless steel and fitted with a viewing angle adjusting mechanism, the SU3282 bracket fits either the HHP or SW-HHP handheld displays. Ideal for wall or cab mounting, leaving the operators to work safely and hands-free.



External Amplifier

Part N°s SP SA-3420 Crosby 2789096

The SA-3420 external amplifier allows the operator to convert the output of any of the SP cabled loadcell products into a three wire 4-20mA analog output. The weatherproof enclosure is fitted with stainless steel glands and is suitable for connection to a PLC, data logger, or other instrumentation.



Handheld Rubber Boot

Part N°s SP SU4045 Crosby 2789232

Drop tested to one meter at -30°C, this 70SHA rubber boot is purpose molded to fit and protect the HHP and SW-HHP handheld display against impact, especially when it is used in the harshest industrial environments.

Straightpoint HHP 2 App



- Connect up to four loadcells simultaneously.
- Set lift threshold and measure productivity per shift.
- View in eight different languages.
- Overload screen flash.
- Alarm latching.
- Set and record overload incidents
- Up to 100m or 328ft remote monitoring distance.
- Multiple weight unit measurement options (kN, metric tons, kg, lbs, custom unit).
- Peak hold and display value alongside live readings.
- Data-log report.
- Export data-log report.
- Zero and gross monitoring options.
- User defined resolution setup.

Up to four Crosby Straightpoint, Bluetooth load cells can be connected and monitored by up to eight smartphones, with the HHP2 app installed. It will enable more than one lifting professional to monitor the loads progress and safety, spotting potential dangers or issues from different vantage points.

The HHP2 app's simple and easy-to-use interface will enable the operator to use the app with the utmost efficiency. There are five different measurement units to choose from - tonnes, lbs, kN, kg and a custom unit.

The app records total loads, weights and lifts. This feature is useful when a particular measurement(s) is required for later referral. Added to this is the option to set the threshold and measure productivity for each load cell

and the device it's rigged to, a crane, for instance, for analysis to see shortfalls and improve performance.

A peak facility can be activated to display the highest force measured alongside the live load reading of four load cells simultaneously plus a total load.

Once measurements are recorded to the app using the load monitoring project record and data log feature, the operator can export the details. The report will include load, time and date, GPS coordinates and project information to either a mobile device or send it to a particular email address in csv format.

Straightpoint Handheld Plus (HHP)



- Displays up to 4 loadcells simultaneously.
- Wireless range 1000m or 3280ft (ATEX 500m or 1640ft).
- Low battery warning.
- Signal strength warning.
- Overload counter.
- User settable 90db audible overload alarm.
- Multiple display units (metric tons, lbs, kg, kN).
- 200Hz peak hold.

2

The Handheld Plus is a rugged and versatile digital handheld display. It has an extensive range of features and is suitable for all Crosby Straightpoint loadcell products.

At the heart of the ergonomically designed Handheld Plus is a powerful PCB, providing industry-leading features such as user selectable units of measure (metric tons, lbs, kg, and kN), programmable audible overload alarm (HHP & SW-HHP), peak hold, pre-set tare, and a user resettable (HHP & SW-HHP) overload counter.

This crucial overload alarm counter is a requirement for many safety and quality control departments because it keeps track of overload events, allowing the loadcell

in question to be removed from service immediately, following the calibration voiding overload event. The loadcell in question can then be sent out for proper testing and, if necessary, recalibration before re-entering service.

The HHP is suitable for connection via cable to any Crosby SP cabled loadcell product and easily adapted to any other manufacturers' loadcell product with a mv/v output.

In addition to the standard HHP the SW-HHP is suitable for connection to any Crosby SP wireless loadcell, has a range of up to 1000m/3280ft (ATEX 500m/1640ft) and is supplied as standard with the Radiolink Plus loadcell.

Stock No.	2789030	2789126	2789442
Model	HHP	SW-HHP	SW-HHP ATEX
Battery Type	2 x AA	2 x AA	4 x AA Energizer L91
Battery Life	100 hours continuous	40 hours continuous	40 hours continuous
Display Type	240 x 128 pixel Multi-line dot matrix with backlight		
Operating Temp.	-10°C to +50°C / 14°F to 122°F	-20 to +70 °C / -4 to 158 °F	-10°C to +50°C / 14°F to 122°F
Protection	IP65 / NEMA4X		
Excitation	5V	N/A	N/A
Max Sensitivity	3mV/V	N/A	N/A
Range	N/A	1000 m / 3,280 ft	500 m / 1,640 ft
Connectivity	6-way female binder 723 socket	Wireless 2.4GHz	Wireless 2.4GHz

Accessories available for the handheld:

Wall or cab mount bracket
Crosby SP part numbers
SU3282 2789228

Rugged rubber boot
Crosby SP part numbers
SU4045 2789232


Also available with hazardous area approval

ATEX / IECEx
Ex ia II CT4 Ga
Certification number:
SW-HHP ATEX
IECEx SIR 15.0072X
Sira 15ATEX2196X
When ordering
ATEX/IECEx version of
SW-HHP, order using code:
SW-HHP-ATEX
Please note:
There is no audible alarm with ATEX


Please note:
There is no audible alarm with ATEX



SubseaLink



- Manufactured for use in subsea or submersible projects.
- On board data-logging option.
- Pressure tested to depth of 6,562 ft.
- SubConn connector.
- Environmental protection IP68/NEMA6P.
- Output options include mV/V to the Crosby SP Handheld Plus, 4-20mA or 0-10v analog to a PLC, data-logger or The Multi Operation Survey System (MOSS), RS485 or an integral data-logger storing up to one million readings and powered by an internal battery.
- Constructed from 17-4PH stainless steel.
- Designed to fit with The Crosby Group ROV shackles.
- Option for ROV mounting on the SL body itself.
- Output: Options for: mV/V / 4-20mA / 0-10v / RS485 or internal data logger.
- Design Factor: 5:1
- Operating Temperature: 14°F to 122°F.
- Accuracy: $\pm 0.1\%$ of full scale.
- Max depth of use: 6,562 ft.
- Material: 17-4 PH Stainless steel.
- MTBF to WLL: Typically 50 million cycles.
- Elongation: Typically $<0.016\text{in}$ / at WLL.



Straightpoint SubseaLink (SL)

Stock No.	Model	Capacity (lb)	Weight (lb)	Dimensions (in)						Crosby Shackle	
				A	B	C	D	ØE	F		
2789352	SL6T5	14,300	15	3.74	9.45	7.09	0.98	1.18	2.87	G2130	1019533
2789353	SL12T	26,000	23	3.94	11.81	7.87	1.57	1.57	3.46	G2130	1019597
2789354	SL25T	55,000	34	5.12	13.78	9.06	1.77	2.17	3.66	G2130	1019659
2789355	SL35T	77,000	49	5.91	15.75	9.84	1.97	2.36	3.86	G2130	1019677
2789356	SL55T	120,000	75	6.61	17.72	10.24	2.56	2.95	4.45	G2130	1021156
2789357	SL85T	185,000	101	7.48	19.29	11.42	2.95	3.46	4.84	G2130	1021174
2789358	SL120T	260,000	148	8.66	21.65	13.19	3.39	3.94	5.28	G2140	1021192


Data-logger Measurement Rate	Days
1 per second	10
1 per 30 seconds	57
1 per minute	729
1 per 2 minutes	1445
1 per 30 minutes	3423
1 per hour	3600
1 per 2 hours	3694
1 per 8 hours	3769

Loadlink Plus



Optional connection to the Crosby SP Handheld Plus part no. HHP 2789459

- Capacity from 2,200 lb to 660,000 lb.
- Unmatched weight-to-strength ratio.
- 30% lighter than competing dynamometers with the same safety rating.
- Large high resolution 1 in LCD display.
- Features full function push button controls for tare, choice of units (lbs, kg, kN, and metric tons), peak hold, preset tare, audible set-point alarm, and an overload counter.
- The highest standard resolution of any digital dynamometer on the market today (5,000+ divisions).
- 100Hz peak hold.
- RS-485 serial output.
- 2-year warranty.
- DNV-GL Type Approval.
- Design validated by FEA.
- Complies with ASME B30.26.
- Battery Type: 9v PP3 Alkaline.
- Battery Life: 80 hours continuous.
- Operating Temperature: 14°F to 122°F.
- Accuracy: $\pm 0.1\%$ of full scale.
- Protection: IP65 / NEMA4X.

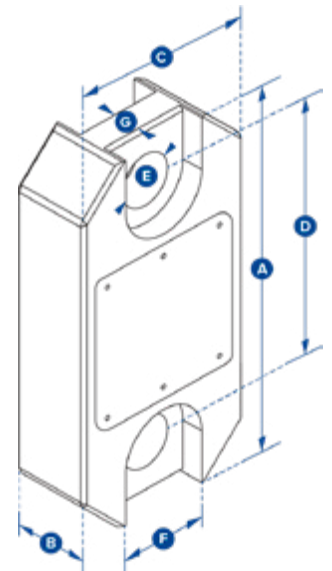


Straightpoint Loadlink Plus (LLP)

Stock No.	Model	Capacity (lb)	Resolution (lb)	Weight (lb)	Design Factor	Dimensions (in)							Crosby Shackle	
						A	B	C	D	ØE	F	G		
2789042	LLP1T	2,200	1	3.3	12:1	8.03	1.69	4.09	5.75	0.96	1.89	0.75	G2130	1019490
2789046	LLP2T5	5,500	2	3.3	7:1	8.03	1.69	4.09	5.75	0.96	1.89	0.75	G2130	1049490
2789050	LLP6T5	14,300	2	5.3	7:1	9.80	1.69	4.45	6.50	1.50	2.60	1.26	G2130	1019533
2789040	LLP12T	26,000	5	8.2	7:1	12.01	1.85	4.45	7.60	1.87	2.60	1.26	G2130	1019597
2789045	LLP25T	55,000	10	11	5:1	13.39	2.36	4.53	8.46	2.17	2.60	1.26	G2130	1019659
2789048	LLP35T	77,000	10	19	5:1	15.47	2.95	4.96	8.86	2.36	2.60	1.26	G2130	1019677
2789049	LLP55T	120,000	20	28.7	5:1	16.69	2.95	7.09	9.06	2.99	2.60	1.26	G2140	1021156
2789051	LLP75T	165,000	20	35.3	5:1	18.50	2.95	7.95	10.24	2.99	2.60	1.26	G2140	1021174
2789039	LLP100T	220,000	100	75	5:1	23.94	3.90	10.04	12.60	4.29	2.60	1.26	G2140	1021192
2789041	LLP150T	330,000	100	101.4	4:1	26.38	3.90	11.93	14.17	4.29	2.60	1.26	G2140	1021218
2789043	LLP200T	440,000	200	180.8	5:1	27.56	5.67	13.78	13.78	5.71	2.60	1.26	G2140	1021234
2789044	LLP250T	550,000	200	180.8	4:1	27.56	5.67	13.78	13.78	5.71	2.60	1.26	G2140	1021243
2789047	LLP300T	660,000	200	260	5:1	31.73	5.91	16.77	13.78	6.30	2.60	1.26	G2140	1021252

Wirelink Plus



- Available in capacities ranging from 2,200 lb to 660,000 lb.
- The non-indicating version of Crosby SP's popular Radiolink Plus and Loadlink Plus digital dynamometer tension loadcells.
- Multiple output options to include mV/V, analog out, ASCII, MODBUS RTU, and CAN-BUS.
- Constructed of lightweight, aerospace grade aluminum.
- Available with IP68 environmental protection.
- Supplied with a 10-meter cable as standard, however, usable cable length varies greatly with lengths available to 1,500 meters depending on output format.
- Options for subsea use available.
- 2-year warranty.
- DNV-GL Type Approval.
- Complies with ASME B30.26.
- Operating Temperature: 14°F to 122°F.
- Accuracy: $\pm 0.1\%$ of full scale.
- Protection: IP65 / NEMA4X.

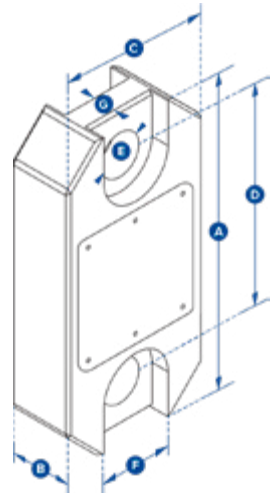

Straightpoint Wirelink Plus (WLP)

Stock No.	Model	Capacity (lb)	Resolution (lb)	Weight (lb)	Design Factor	Dimensions (in)							Crosby Shackle	
						A	B	C	D	ØE	F	G		
2789154	WLP1T	2,200	1	3.3	12:1	8.03	1.69	4.09	5.75	0.96	1.89	0.75	G2130	1019490
2789158	WLP2T5	5,500	2	3.3	7:1	8.03	1.69	4.09	5.75	0.96	1.89	0.75	G2130	1049490
2789273	WLP6T5	14,300	2	5.3	7:1	9.80	1.69	4.45	6.50	1.50	2.60	1.26	G2130	1019533
2789152	WLP12T	26,000	5	8.2	7:1	12.01	1.85	4.45	7.60	1.87	—	—	G2130	1019597
2789157	WLP25T	55,000	10	11	5:1	13.39	2.36	4.53	8.46	2.17	—	—	G2130	1019659
2789160	WLP35T	77,000	10	19	5:1	15.47	2.95	4.96	8.86	2.36	—	—	G2130	1019677
2789269	WLP55T	120,000	20	28.7	5:1	16.69	2.95	7.09	9.06	2.99	—	—	G2140	1021156
2789161	WLP75T	165,000	20	35.3	5:1	18.50	2.95	7.95	10.24	2.99	—	—	G2140	1021174
2789151	WLP100T	220,000	100	75	5:1	23.94	3.90	10.04	12.60	4.29	—	—	G2140	1021192
2789153	WLP150T	330,000	100	101.4	4:1	26.38	3.90	11.93	14.17	4.29	—	—	G2140	1021218
2789155	WLP200T	440,000	200	180.8	5:1	27.56	5.67	13.78	13.78	5.71	—	—	G2140	1021234
2789156	WLP250T	550,000	200	180.8	4:1	27.56	5.67	13.78	13.78	5.71	—	—	G2140	1021243
2789159	WLP300T	660,000	200	260	5:1	31.73	5.91	16.77	13.78	6.30	—	—	G2140	1021252

Part Number	Description
ICA1	3 wire 0-10v analogue output
ICA2	3 wire 0-5v analogue output
ICA3	4 wire +/- 10v analogue output
ICA4	3 wire 4-20mA analogue output
ICA5	2 wire 4-20mA analogue output


Loadshackle Wired



Requires connection to the Crosby Straightpoint Handheld Plus (HHP) or External Amplifier range (SA-3420) that can be configured to provide 4-20mA output for PLC or data logger integration.

- Capacities of 3.25t to 400t, as well as being obtainable up to 3,000t.
- Compact size, low headroom, lightweight.
- Every Loadshackle is proof tested.
- Utilizes the same advanced microprocessor based electronics as Crosby SP products.
- Unrivalled resolution.
- Environmentally sealed to IP67 or NEMA6.
- Advanced options available for subsea applications.
- Manufactured using Crosby 2130 Carbon and 2140 Alloy Bolt Type Anchor industry leading shackles.
- Configured with output formats to include mV/V, RS-422, RS-485, utilizing the ASCII, MODBUS RTU, and CAN-BUS protocols or supplied with integral amplifier allowing analog outputs such as 4-20mA, 0-10v, 0-5v etc.
- mv/v or analog signal options.
- Design validated by FEA.
- Design Factor: 5:1 when used with load bobbin.
- Operating Temperature: 14°F to 122°F.
- Accuracy: $\pm 1\%$ of full scale.

LOAD MONITORING

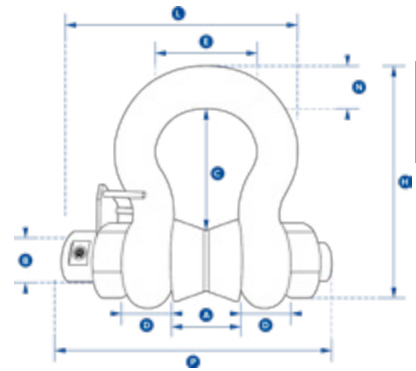


2

Straightpoint Loadshackle (SLB)


Stock No.	Model	Capacity (lb)	Resolution (lb)	Weight (lb)	Dimensions (in)									Crosby Shackle
					A	ØB	C	D	E	H	L	N	P	
2789106	SLB 3.25T	7,150	10	6.16	1.06	0.75	2.24	0.57	1.69	4.17	4.92	0.69	5.51	G2130
2789111	SLB6.5T	14,300	10	7	1.44	1	3.14	0.81	2.28	5.83	5.77	0.97	6.42	G2130
2789103	SLB12T	26,400	20	17.6	2.03	1.38	4.45	1.16	3.25	8.27	7.52	1.38	8.35	G2130
2789105	SLB25T	55,000	50	40	2.87	2.01	6.69	1.75	5	12.32	10.43	2.24	11.02	G2130
2789110	SLB55T	120,000	100	55	3.25	2.24	7.46	2.01	5.75	13.7	11.65	2.4	12.09	G2140
2789112	SLB85T	185,000	100	187	5	3.26	12.48	3.14	7.48	21.22	15.11	3.34	17.24	S2135
2789102	SLB120T	260,000	200	276	5.66	3.74	14.33	3.5	9.37	24.56	17.12	3.74	18.81	S2135
2789104	SLB200T	440,000	200	573	7.09	4.92	17.02	4.33	11.02	30.28	20.46	4.72	23.23	S2135
2789107	SLB300T	660,000	1,000	893	8.07	5.91	19.88	4.72	12.01	35.59	22.7	5.51	25.47	S2135
2789108	SLB400T	880,000	1,000	1,459	9.06	6.89	21.56	6.3	12.8	39.63	25.87	6.3	29.72	S2135



Compression Loadcell



- Ranges from 11,000 lb to 2,200,000 lb.
- High grade stainless steel, offering excellent strength and anti-corrosion properties.
- Can be supplied with optional loadcaps.
- Environmentally sealed to IP67 or NEMA6.
- Optional analog outputs.
- Lightweight, compact size.
- 30ft cable supplied as standard (other lengths available).
- Custom versions available.
- Design validated by FEA.
- Design Factor: 3:1
- Operating Temperature: 14°F to 122°F.
- Accuracy: $\pm 0.1\%$ of full scale.

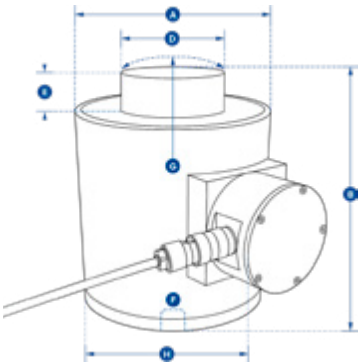


Requires connection to the Crosby Straightpoint Handheld Plus (HHP) or External Amplifier range (SA-3420) that can be configured to provide 4-20mA output for PLC or data logger integration.



Straightpoint Compression Loadcell

Stock No.	Model	Capacity (lb)	Resolution (lb)	Weight (lb)	Dimensions (in)						
					ØA	B	ØD	E	F	G	H
2789068	NI5TC	11,000	2	13.64	3.94	5.00	2.32	0.63	M18 x 2.5	5.98	6.22
2789062	NI10TC	22,000	5	13.64	3.94	5.00	2.32	0.63	M18 x 2.5	5.98	6.22
2789065	NI25TC	55,000	10	13.64	3.94	5.00	2.32	0.63	M18 x 2.5	5.98	6.22
2789067	NI50TC	110,000	20	13.64	3.94	5.00	2.32	0.63	M20 x 2.5	5.98	6.22
2789061	NI100TC	220,000	100	34	5.98	7.24	3.15	1.02	M20 x 2.5	17.01	8.03
2789063	NI150TC	330,000	100	34	5.98	7.24	3.15	1.02	M20 x 2.5	17.01	8.03
2789064	NI300TC	660,000	200	143	7.28	11.81	6.10	1.08	M20 x 2.5	17.01	9.33
2789066	NI500TC	1,100,000	500	143	7.28	11.81	6.10	1.08	M20 x 2.5	17.01	9.33
2789275	NI1000TC	2,200,000	1,000	379	14.25	12.20	10.63	1.57	M30 x 3.5	37.40	16.38

Loadpin



- Designed for use in applications where an end of line loadcell cannot be used, meaning an integrated solution is required.
- High tensile stainless steel.
- Supplied complete with an anti-rotation plate as a cabled or wireless solution.
- Built to withstand the harshest environments in industries such as marine and offshore oil and gas.
- Suitable for use in exposed situations and can also be supplied to withstand immersion in seawater at extreme depths.
- Supplied with a 32 ft cable as standard, however, usable cable length varies greatly with lengths available to 4,900 ft, depending on output format.
- Include mV/V, RS-485, utilizing the ASCII, MODBUS RTU and CAN-BUS protocols or an analog output such as 4-20mA for PLC integration.
- Design validated by FEA.
- Design Factor: 3:1.
- Operating Temperature: -4 to 158 °F.
- Accuracy: $\pm 1\%$ of full scale
- Protection: IP67 [IP68 available as an option] NEMA6 [NEMA6P available on application]

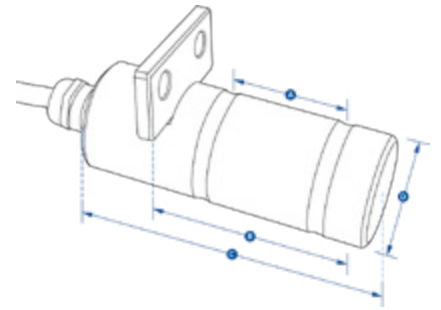

Note: Please advise cable configuration on order – radial or axial pin exit. If you require a Loadpin to a particular size and design, download the Crosby Straightpoint Loadpin questionnaire and return, POA: kitocrosby.com/loadpin



Requires connection to the Crosby Straightpoint Handheld Plus (HHP) or External Amplifier range (SA-3420) that can be configured to provide 4-20mA output for PLC or data logger integration.

Straightpoint Loadpin (LP)


Stock No.	Model	Capacity (lb)	Resolution (lb)	Weight (lb)	Dimensions (in)			
					A	B	C	ØD
2789276	LP500KG	1,100	0.5	0.4	0.94	5.00	2.76	0.79
2789277	LP1T	2,200	1	0.5	1.38	5.00	3.15	0.79
2789278	LP2.5T	5,500	2	0.9	1.77	5.00	3.94	0.98
2789279	LP3.5T	7,700	2	1.3	1.97	5.00	4.13	1.18
2789280	LP6.5T	14,000	5	2.6	2.48	7.24	4.92	1.57
2789281	LP15T	33,000	5	5	2.95	7.24	5.91	1.97
2789282	LP25T	55,000	10	10.3	3.50	11.81	7.68	2.48
2789283	LP50T	110,000	20	18	4.02	11.81	8.86	2.95
2789284	LP100T	220,000	100	24	4.33	12.20	9.06	3.46
2789285	LP250T	550,000	200	64	5.12	5.00	11.81	4.92
2789286	LP500T	1,100,000	500	172	8.86	5.00	17.32	6.69
2789287	LP750T	1,650,000	500	319	11.61	5.00	23.23	7.87
2789288	LP1000T	2,200,000	1,000	603	14.17	5.00	28.03	9.84
2789289	LP1500T	3,300,000	1,000	854	16.93	7.24	32.76	10.83



Loadblock Plus



- The highest standard resolution of any self-indicating compression loadcell on the market today (5,000+ divisions).
- Low capacity, self-indicating compression loadcell.
- Display Type: 6 digit 25mm LCD or 6 digit 1" LCD
- 100Hz peak hold.
- Compact size.
- Push button tare.
- Preset tare.
- Peak hold.
- RS485 port for connection to data-logging system allowing remote viewing.
- Audible set-point alarm and an overload counter.
- Selectable units te, lbs, kN, kg.
- Battery Type: 9v PP3.
- Battery Life: 80 hours continuous.
- Operating Temperature: 14°F to 122°F.
- Accuracy: ±0.1% of full scale.
- Protection: IP65 / NEMA4X.

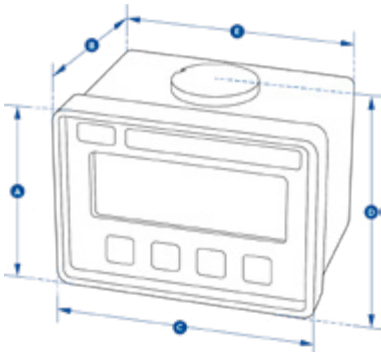

Straightpoint Loadblock Plus (LBP)

Stock No.	Model	Capacity (lb)	Resolution (lb)	Weight (lb)	Dimensions (in)				
					A	B	C	D	E
2789035	LBP250KG	550	0.2	2	3.19	3.19	4.45	3.54	4.09
2789037	LBP500KG	1,100	0.5	2	3.19	3.19	4.45	3.54	4.09
2789034	LBP1T	2,200	1	2	3.19	3.19	4.45	3.54	4.09
2789036	LBP2T	4,400	2	3.3	3.62	4.61	4.41	4.09	–
2789038	LBP5T	11,000	2	6.8	3.62	5.35	4.41	4.53	–


Miniweigher Plus



Optional connection to the Crosby SP Handheld Plus – Crosby SP Part Nos. HHP 2789459.

- Compact size and lightweight.
- Capacities from 220 lb to 11,000 lb.
- Large 1 in LCD display.
- High accuracy.
- Selectable Units te, lbs, kN, kg.
- Highest resolution of any compact digital crane scale on the market.
- Peak hold.
- Preset tare.
- Overload counter.
- 90dB audible set point alarm.
- RS-485 serial output.
- Corrosion-resistant finish.
- Battery Type: 9v PP3.
- Battery Life: 80 hours continuous.
- Display Type: 6 digit 1in LCD.
- Operating Temperature: 14°F to 122°F.
- Accuracy: $\pm 0.1\%$ of full scale.
- Protection: IP65 / NEMA4X.

LOAD MONITORING

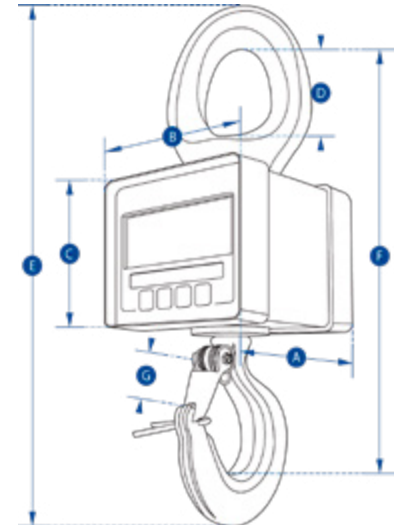

Straightpoint Miniweigher Plus (MWP)

Stock No.	Model	Capacity (lb)	Resolution (lb)	Weight (lb)	Design Factor	Dimensions (in)					F	G
						A	B	C	D	E		
2789055	MWP100KG	220	0.1	3.3	10:1	3.19	4.41	3.19	1.30	8.74	7.20	0.87
2789057	MWP250KG	550	0.2	3.3	5:1	3.19	4.41	3.19	1.30	8.74	7.20	0.87
2789059	MWP500KG	1,100	0.5	3.3	5:1	3.19	4.41	3.19	1.30	8.74	7.20	0.87
2789056	MWP1T	2,200	1	3.3	5:1	3.19	4.41	3.19	1.30	8.74	7.20	0.87
2789058	MWP2T	4,400	2	6.8	5:1	4.61	4.41	3.62	1.69	11.14	9.67	1.10
2789060	MWP5T	11,000	2	19.2	5:1	5.35	4.41	3.62	2.44	13.74	11.26	1.65