CORE VALUES | QUALITY PRODUCTS | SUPERIOR SERVICE

CORE® LIFTING PRODUCTS

HMPE HIGH PERFORMANCE ROPE

BEXCO

synthetic ropes by BEKAERT

CoreLifting.com

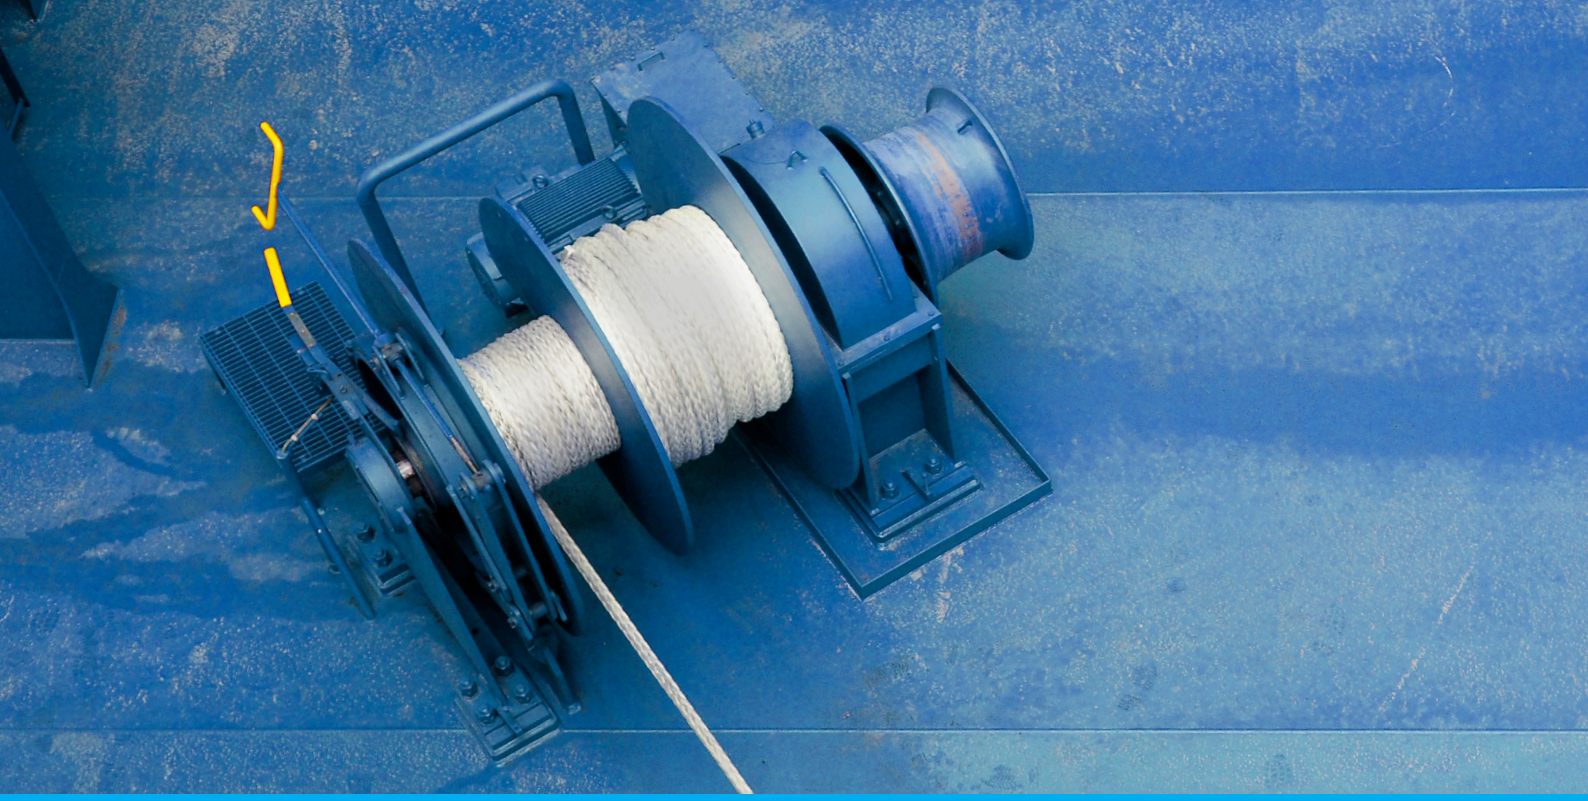

SUPERIOR LINE

SUPERIOR 12 WITH HMPE

Combining small diameters with high breaking strengths, the lightest rope with the highest breaking strengths.

GENERAL

- 12-strand braided ropes made of HMPE
- Commonly known as HMPE : High Modulus PolyEtheylene
- Superior abrasion resistance
- Very high strength and low weight to diameter ratio
- Easy in handling and operation
- Comparable to steel wire characteristics

FEATURES

- **Material**: Ultra – High Molecular Weight Polyethylene
- **Construction**: 12-strand braided
- **Treatment**: Marine finish
- **Color of Rope**: dia < 32mm: grey – dia > 32mm: white
- **Approx. Spec. Density**: 0,975 floating
- **Melting Point**: 145° C
- **Abrasion Resistance**: Excellent
- **U.V. Resistance**: Good
- **Temperature Resistance**: 70°C max continuous
- **Chemical Resistance**: Excellent
- **Dry & Wet Conditions**: Wet strength equals dry strength

APPLICATIONS Mooring, Other

SECTORS

Barges
Bulk Carriers
Container Ships
Fishing vessels (nets)
Passenger Ships

ROPES WITH HMPE FIBER (12strand)					
Dia	Circ.	Dia	Min. Break Load		Weight
mm	"	"	tf	kN	kg/100m
6	3/4	1/4	7.6	74.6	3.9
8	1	5/16	10.1	99.1	5.1
10	1 1/4	7/16	14.2	139.3	7.6
12	1 1/2	1/2	18.5	181.5	9.8
14	1 3/4	9/16	24.6	241	13.1
16	2	5/8	30.7	301	16.4
18	2 1/4	3/4	36.9	362	19.8
20	2 1/2	13/16	43.1	423	23.1
22	2 3/4	7/8	49.5	486	27.4
24	3	1	60.7	595	33.9
26	3 1/4	1 1/16	66.5	652	37.3
28	3 1/2	1 1/8	75.4	740	42.8
30	3 3/4	1 1/4	85.4	838	48.8
32	4	1 5/16	105	1029	61.7
36	4 1/2	1 1/2	123	1211	76.2
40	5	1 5/8	148	1447	92.1
44	5 1/2	1 3/4	171	1680	109.7
48	6	2	199	1953	129.2
52	6 1/2	2 1/8	226	2219	149.7
56	7	2 1/4	259	2538	171.2
60	7 1/2	2 1/2	289	2831	194.8
64	8	2 5/8	320	3139	220.4
68	8 1/2	2 3/4	354	3470	247.0
72	9	3	388	3806	274.7
76	9 1/2	3 1/8	427	4188	304.4
80	10	3 1/4	499	4896	369.0
88	11	3 5/8	576	5650	438.7
96	12	4	645	6325	514.6
104	13	4 1/4	740	7263	596.6
112	14	4 5/8	838	8220	684.9
120	15	5	941	9231	779.2
128	16	5 1/4	1050	10297	879.7
136	17	5 4/7	1164	11417	986.2
144	18	6	1283	12590	1098.8