



WORKSTATION CRANES




CoreLifting.com



WORK STATION BRIDGE CRANES AND MONORAILS

Capacities up to 4,000 lbs

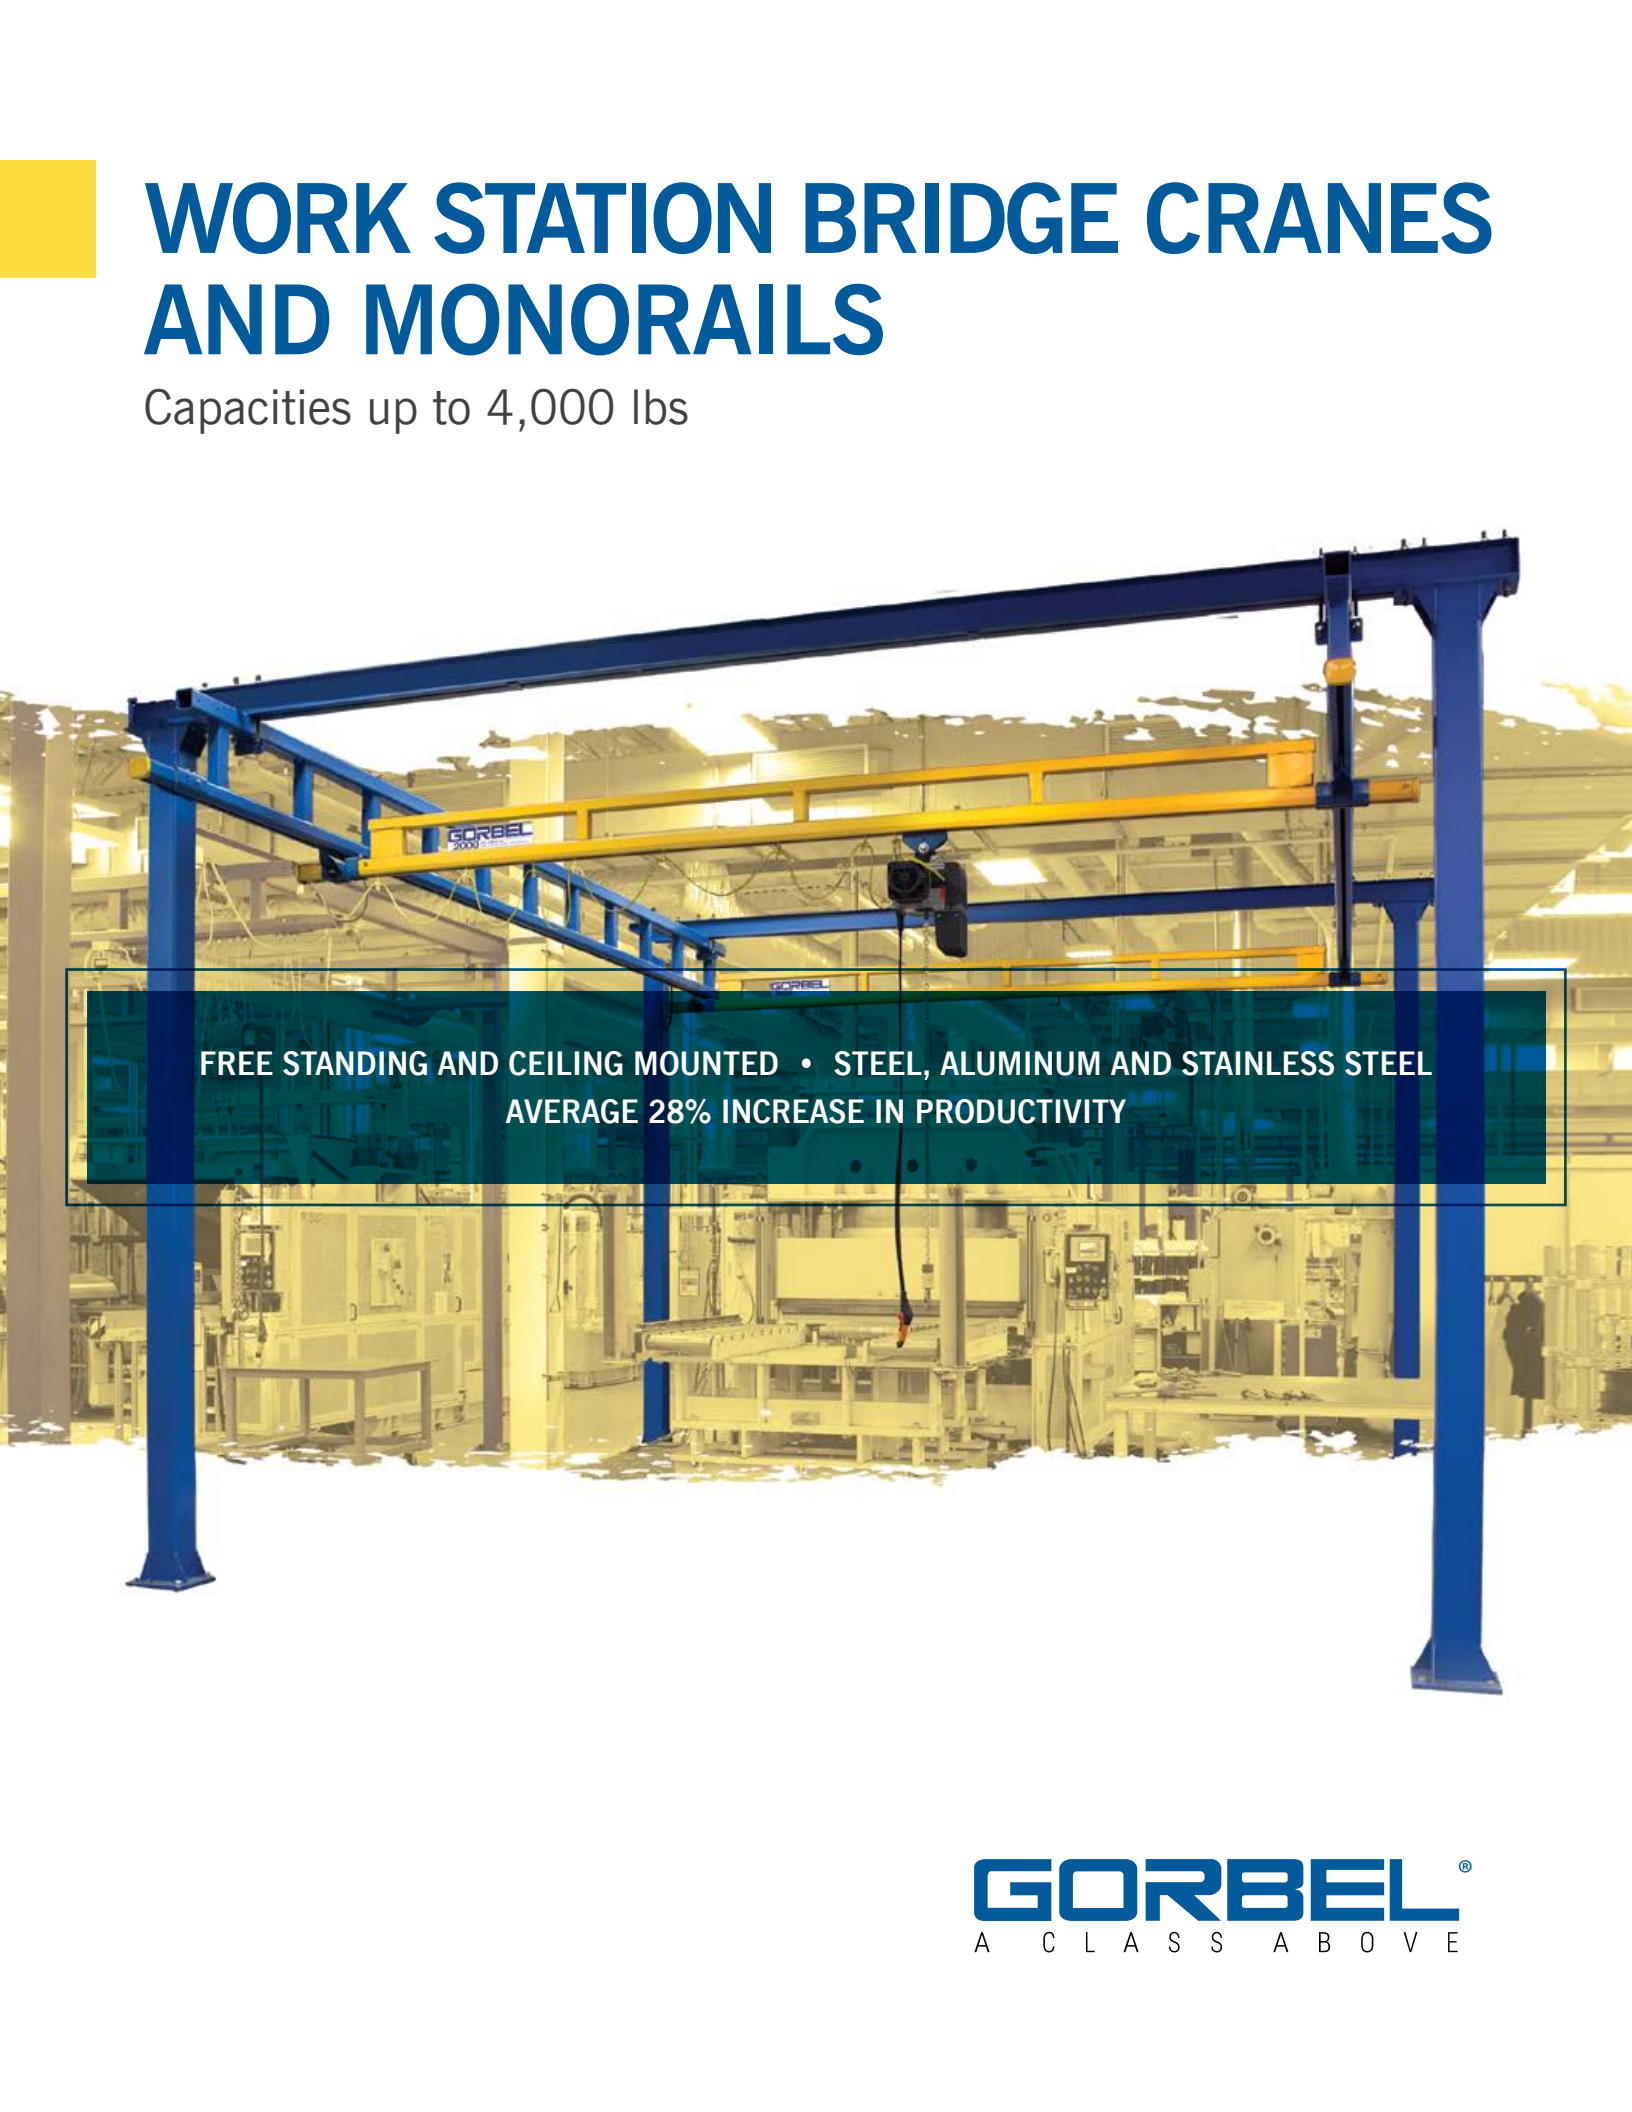A large blue GORBEL bridge crane is shown in a factory setting. The crane has a long horizontal beam supported by two vertical columns. A yellow monorail track is mounted on the beam. The background shows a factory floor with various equipment and a person in the distance.

FREE STANDING AND CEILING MOUNTED • STEEL, ALUMINUM AND STAINLESS STEEL
AVERAGE 28% INCREASE IN PRODUCTIVITY

GORBEL®
A C L A S S A B O V E

GORBEL 1000 LBS.
CAPACITY
FISHERS, NEW YORK, U.S.A. DO NOT EXCEED RATED CAPACITY

GORBEL 1000 LBS.
CAPACITY
FISHERS, NEW YORK, U.S.A. DO NOT EXCEED RATED CAPACITY

Bridgeport CNC



**GORBEL:
A CLASS ABOVE**

- **Productivity**
- **Safety**
- **Ease of installation and relocation**
- **Modular designs**
- **Designs, capacities, and spans**
- **Specially engineered systems**

Gorbel’s Crane Technology and Ergonomic Lifting products are the handling equipment you need to get the job done. Since 1977, Gorbel has specialized in overhead material handling solutions, earning a reputation for providing our customers with the highest quality products and the highest performance.

Our product line has grown to include products that improve safety and productivity in a variety of applications and industries, handling loads from 50 lbs to 50 ton.

TABLE OF CONTENTS

Why choose Gorbel?..... 2

Work station cranes
and monorails..... 3

Benefits of
enclosed track 4

Track profiles 5

How to apply
work station cranes..... 6

Case study..... 7

Work station crane
components 8

Case study..... 11

Custom crane
components 14

Options when using
multiple bridges..... 14

Custom crane
configurations..... 16

Case study..... 19

Installation guidelines 20

WHY CHOOSE GORBEL?

INDUSTRY'S BEST WARRANTY

We are proud to offer a ten year (20,000 hour) warranty on manually operated crane systems, including wheel wear. With this warranty, our customers are guaranteed years of quality, dependable service.

RELIABILITY

For over 15 years, we've had an industry leading on-time shipping percentage. We're proud that our customers can rely on us to ship their orders on time, keeping to their installation schedules.

EASE OF INSTALLATION AND RELOCATION

Gorbel's pre-engineered modular kit designs permit easy expansion and relocation. Runway lengths can be easily expanded by adding runway sections, free standing support assemblies, and additional bridges as needed.

MULTIPLE SHIPPING POINTS With manufacturing facilities in Fishers, New York; Pell City, Alabama; and Goodyear, Arizona, we are able to offer multiple shipping points, decreasing shipping costs to our customers.

EXTENSIVE DEALER NETWORK

Our network of authorized dealers extends across North America and many countries internationally, making it easier for a trained local material handling sales consultant to provide the best solution for your needs.

CUSTOMER SERVICE SUPPORT


Our Customer Service Representatives go through a rigorous training period on our products and their proper application so they are prepared to handle even the toughest application questions.

www.gorbel.com
800.821.0086




WORK STATION CRANES AND MONORAILS

Bridge cranes cover rectangular work areas, while monorail systems can be used to move loads along a linear path, cover various work area shapes, or to link work areas together. Work station bridge cranes and monorails can be used individually or can be readily adapted for more sophisticated applications by the addition of extra monorail tracks, curves, and transfers that can be easily configured into a total system.

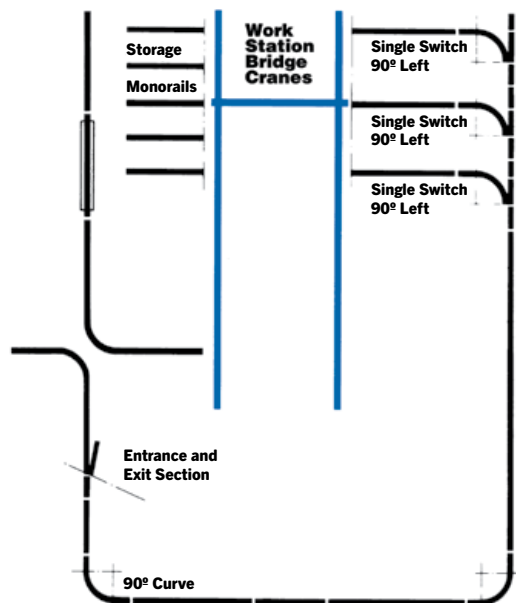

Sample system of work station crane supplemented with monorails.

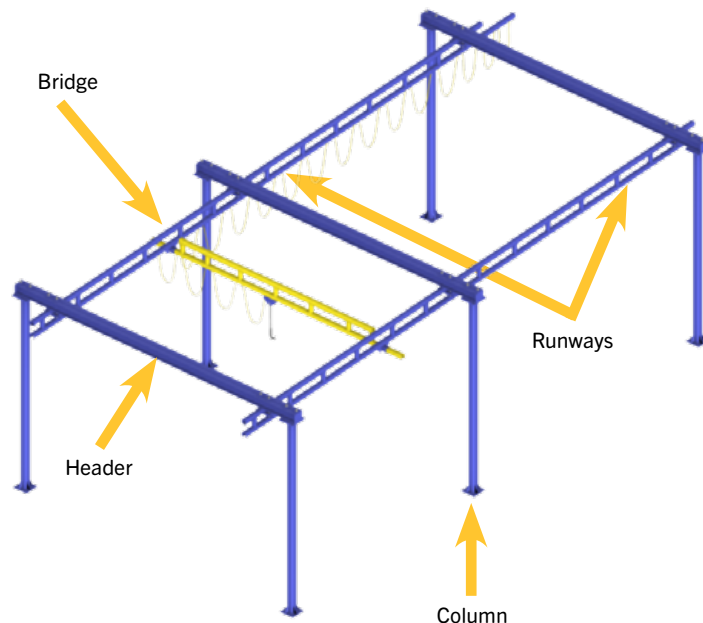

WORK STATION CRANES

Bridge: The bridge is the only part of the work station crane in motion. It supports the lifting device, and facilitates movement of your load along the X and Y axis. Bridges can be as long as 34', and are available in steel or aluminum.

Runways: The bridge's end trucks ride within the track of the crane's runways, which determine the overall coverage area of your work station crane. The track used for runways can be spliced together to span any distance.

Column (free standing only): The columns are the "legs" of a freestanding work station crane, and are bolted to the floor while supporting the columns and runways. The distance between columns is determined by your crane's overall capacity and the selected track type.

Header (free standing only): The work station crane system's header is made of back-to-back "C" channel, which allows for easy connections to the runway hanger support hardware.

MONORAILS

The Solution for True Linear Movement

Gorbel® Work Station Crane Systems can be readily adapted for more sophisticated applications by the addition of extra tracks, curves, switches, and interlocks (transfers) that can be easily integrated into a total system. The pre-engineered modular designs offer the ultimate in flexibility, in layout, and in design for your manufacturing facility.

Monorail Curve


The monorail curve is a section of track that is rolled to provide a 90° curve. The curved sections have a straight section which projects beyond the curve. The curve needs to be supported with three or four hangers, depending on track series.

Monorail Curve

THE RIGHT TRACK MAKES THE DIFFERENCE

WHY BUY ENCLOSED TRACK?

Gorbel's enclosed track design gives you easy movement and long life. Gorbel's steel and aluminum work station crane systems use enclosed track that is both strong and lightweight. The 2° taper of the running flange helps to center wheels in the track and prevents debris from settling on the rolling surface. This allows for smooth, effortless movement of trolleys and end trucks.



MAJOR ADVANTAGES:

- Enclosed track cranes are up to three times easier to move than traditional bridge cranes
- The design protects the rolling surface from the build-up of dirt and dust, making the wheels easier to move
- The smooth running surface means lower rolling resistance
- The low profile of the steel track allows the system to be installed where headroom is a problem.
- The low track weight reduces operator push-pull forces
- Long spans allow systems to be installed where support assemblies are infrequent (up to 30 feet with steel truss design). This reduces the possibility of the support columns interfering with the work cell layout
- Four distinct sizes of track – 250, 500, 1000, and 2000 series – enable you to keep bridge weights and costs to a minimum

Basic Specifications	
Capacities	To 4000 lbs.
Std. bridge lengths	To 34'
Std. runway lengths	To 124'
Std. support distances	20', 25', 30'

WHY CHOOSE GORBEL'S RIGID RUNWAY SYSTEMS OVER ARTICULATING RUNWAYS

EASY MOVEMENT AND PRECISE LOAD POSITIONING

Gorbel® Work Station Bridge Cranes are installed so that the runways are rigid, allowing no movement laterally or longitudinally. In addition, Gorbel's floating end trucks with horizontal wheels prevent binding by accommodating any imperfections in how parallel the runways were installed. The combination of these design features results in unmatched ease of positioning and movement. The bridge travels smoothly down the runways, and movement is unvarying along the way, no matter where a load is positioned on the bridge. This allows superior load positioning.

Another advantage of rigid runways is that trussed track runways double as stringers between support columns. This eliminates the need for expensive intermediate support stringers, and it lowers overall installation costs.



www.gorbel.com
800.821.0086

TRACK PROFILES

Whether your application requires long spans between supports or making the most of limited headroom, Gorbel offers track profiles that create opportunities to customize the perfect solution.

PLAIN STEEL TRACK

For use where frequent support points are available or where maximum headroom is required. The standard cold-rolled steel track profile offers a low-weight to high-strength ratio.


Maximum Support Distance	Lifting Capacity
6'	250-4000 lbs.



TRUSSED STEEL TRACK

Permits longer spans when frequent support points are not available, giving you more flexibility in crane layout. The trussed series uses the plain steel track profile but is enhanced for longer spans via a built-up truss design. This design increases the span, which decreases the need for frequent hangers. Long spans translate into fewer runway support points, longer bridge lengths, and free-standing capabilities, just another reason why Gorbel Work Station Cranes are among the most versatile to apply and easiest to install in the industry.


Maximum Support Distance	Lifting Capacity
GLCS - 20', GLCSL - 25', GLCSLX - 30'	250-4000 lbs.

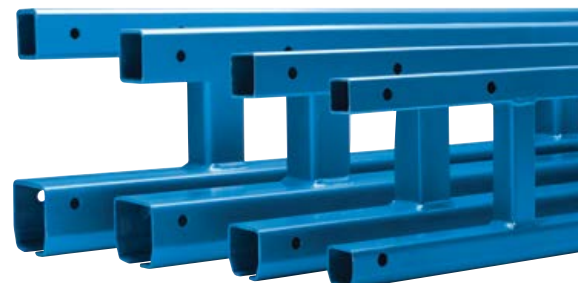

ALUMINUM TRACK

For use where lower bridge weight and easier movement are required. The patented shape of Gorbel's aluminum enclosed track provides for low weight, unparalleled spanning capability and effortless movement. Weighing as much as 44% less than trussed steel track results in easier movement, which makes for safe, productive, ergonomic work cells. Runway spans up to 20 feet and bridge lengths up to 34 feet meet a wide range of applications.

Maximum Support Distance	Lifting Capacity
20'	150-2000 lbs.

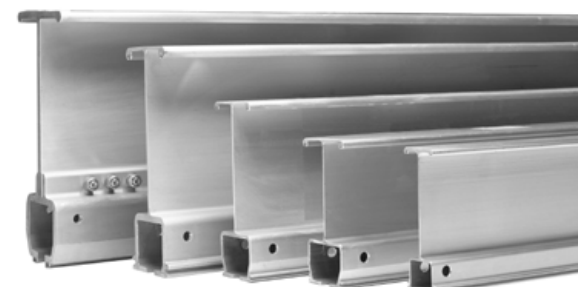

HOW TO APPLY WORK STATION CRANES

These questions and answers can help you determine which type of overhead work station crane best meets your needs.



SHOULD IT BE FREE STANDING OR CEILING MOUNTED?

Free standing floor supported systems do not put stress on the building's overhead structure. Installation is usually more straightforward, and these cranes are also easier to relocate in the future. Free standing systems require a reinforced concrete floor of at least 6 inches.

With ceiling mounted systems, supporting steel does not interfere with the handling operation. Ceiling mounted systems require a building with an adequate overhead structure to hang the crane.

WHAT CAPACITY, BRIDGE LENGTH, AND HEIGHT DO I NEED?

The general rule is "less is more".

Keep capacities to a minimum – Gorbel Work Station Cranes are designed with an adequate safety factor. If you "over-buy" capacity, the operator will need to move extra bridge dead weight, which would not be a good ergonomic solution.

Keep bridge lengths to a minimum – The less dead weight an operator has to move, the better. Short bridge lengths are better for higher cycle production areas. Longer bridges are acceptable for lower production cycle or maintenance areas.

Keep bridge heights to a minimum – Keeping the height less than 14' is desirable because it makes it easier to control and position the load.

SHOULD THE CRANE BE MANUAL OR MOTORIZED?

Ease of movement and light weight are key features of enclosed track work station crane systems. In fact, manual work station cranes do the job faster than motorized cranes. If

the operator cannot control the load throughout the operation (for instance, over a vat, a pit, or other inaccessible area), then the crane should be motorized.

WHAT IS MEANT BY RATED CAPACITY?

The rated capacity is the live load that can be lifted by the crane system. The design load for the crane system is based on the rated capacity plus 15% for the weight of the hoist and trolley (capacity x 1.15) and an additional 25% for impact (capacity x 1.25) for a total design of capacity x 1.4 (Note: 25% impact factor is good for hoist speeds up to 50 f.p.m.).

For example, a 1000 lb Gorbel crane allows you to pick up a 1000 lb load, provided the hoist weighs 150 lb or less and the hoist speed is less than 50 feet per minute.

Design load for deflection calculations is based on the rated capacity plus 15% for the weight of the hoist and trolley (capacity x 1.5). Under no conditions should the crane be loaded beyond its rated capacity. Gorbel work station cranes meet or exceed the ANSI B30.11 specifications for underhung bridge cranes.

WORK STATION CRANE HELPS DOUBLE PRODUCTIVITY

"One operator is able to do 30 cycles per shift, where before we may have only done 15."

Professional Fabricators, Inc. is a small fabrication shop in suburban Wisconsin which cuts and forms sheet metal for radiators, generators and other electrical applications. The sheet metal being handled typically measures between 4 and 5 feet wide by 8 to 10 feet long, and is between $\frac{3}{4}$ to 1 inch thick, often weighing as much as 650 pounds.

When the shop received two new laser cutting machines for its fabricating, it began searching for the best way to lift the sheet metal onto the cutting machines. It required the raw sheets to be lifted from the stack where they are delivered, turned to a machine directly behind the operator, and precisely placed on the laser cutting table.

Initially, the company tried moving the sheet metal onto the machine with a fork lift. With this method, placement was too difficult and the fork lifts were bumping into the machines. The company also tried using two operators to lift and position the sheets onto the machine. While positioning was more accurate than with the fork lift, the doubled cost of labor paired with safety hazards that come with such heavy, sharp material eliminated that option.

"Moving the sheet metal onto the cutting machines was too great of an injury risk to ignore," said Brian Moeller, Manufacturing Engineer for Professional Fabricators. "We had a lost time injury, and within a week recognized the need for something to help move the metal."

Among the options for a solution was automating the process. While it would have reduced injuries, the cost of the automation was far too high for the shop to invest in.


The company decided on two Gorbels free-standing work station cranes with 1 ton capacity aluminum bridges, one for each cell with a laser cutting machine. A one-ton capacity chain hoist with a vacuum end effector grips the sheet metal, and one operator is able to effortlessly move the heavy sheet metal from the delivered stack and place it on the cutting table.

"The Gorbels system has worked out very well," said Moeller. "One operator is able to do 30 cycles per shift now, where before we may have only done 15. Plus, there have been no injuries. Operators are very happy and there was no hesitation to use the Gorbels cranes. They aren't complicated and don't slow them down, so they use them."



SEE VIDEO OF THIS APPLICATION!

See this Gorbels solution in action by scanning the QR code below.



"Operators are very happy and there was no hesitation to use the Gorbels cranes."

See this and many more work station crane case studies at www.gorbels.com/solutions/casestudies

WORK STATION CRANE COMPONENTS

ANATOMY OF A WORK STATION CRANE

The industry's best work station cranes are built using components that are engineered, tested and crafted to provide smooth movement for years.

1

HOIST TROLLEY

Gorbel's hoist trolleys provide the connection between the lifting device and the bridge. The trolleys are designed for effortless movement along the bridge. The stamped body fits most rigid hook or eye lifting devices.

Wheels are tapered to match the 2° taper of the track. This reduces rolling resistance and wheel wear. Wheels contain ball bearings that are sealed and lubricated for life.

Trolleys are designed to operate in temperatures from +5°F to +200°F.

All trolleys meet or exceed the ANSI B30.11 specification for underhung bridge cranes.



2

END TRUCKS

Gorbel® end trucks provide the connection between the bridge and runways. They are designed for effortless movement along the runway.

Wheels are tapered to match the 2° taper of the track, which reduces rolling resistance and wheel wear. Wheels contain ball bearings that are sealed and lubricated for life.


Two horizontal wheels center the end truck within the runway which prevents binding of the bridge. As a result, the position of the load on the bridge has little effect on the amount of force needed to move the bridge along the runway.

Any slight runway track misalignment is taken up by the bridge floating in one end truck, while the other end truck is firmly clamped to the bridge.

All end trucks meet or exceed the ANSI B30.11 specification for underhung bridge cranes.



Standard End Truck

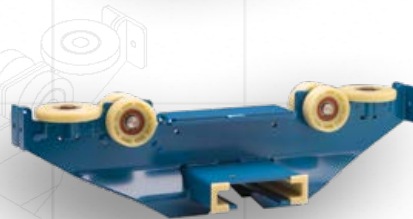

Aluminum End Truck



Extended End Truck

EXTENDED END TRUCKS

The extended end truck is designed for longer bridge lengths, and helps evenly distribute the weight of the load to maintain easy bridge movement and prevent binding.

www.gorbel.com
800.821.0086



1. HOIST TROLLEY
2. END TRUCK
3. FESTOON GLIDER
4. FESTOON TROLLEY
5. FESTOON CLAMP
6. END STOP BUMPER
7. UNIVERSAL BUMPER
(not shown)
8. STACK SECTION
9. FLAT CABLE/AIR HOSE
10. HANGER ASSEMBLY

www.gorbel.com
800.821.0086

FESTOONING: FLAT CABLE, AIR HOSE, AND CONDUCTOR BAR



FESTOON GLIDERS

Festoon gliders are used to support flat cable along the runway and bridge, and they are standard on steel runways of 63 feet or less. No tools are required to attach the festooning to the gliders.



FESTOON TROLLEYS

Gorbel® festoon trolleys (optional) are used to support flat cable or air hose along the runway or bridge. The trolleys have four wheels and a pivoting festoon saddle support. They are ideally suited for long runways (greater than 63 feet) or with round cable or air hose. With runways greater than 63 feet or with an all aluminum system, festoon trolleys are standard. Special festoon trolleys for vacuum hose are also available.



FESTOON CLAMPS

Festoon clamps anchor the festooning at the start of the runway and bridge. They also prevent the festoon gliders from exiting the track and they can provide a redundant stop for the end trucks and trolley. Festoon tow clamps are also available for systems with standard end trucks.



END STOP BUMPERS

High-impact molded end stop bumpers are provided on all runways and bridges to prevent the end trucks and trolley from exiting the track. The bumpers are bolted to the track to physically limit the travel of the end truck and trolley.



UNIVERSAL BUMPERS

(not shown on pg. 9)
A universal bumper can be used as an intermediate end stop, primarily for zoning purposes.



STACK SECTIONS

A stack section at one end of a runway serves as an extension that allows festoon carriers to be stored on the end of the runway without reducing crane coverage.

9 FLAT CABLE AND/OR AIR HOSE

A flat cable festooning system is included in all Gorbel® Work Station Bridge Cranes. Plenty of cable is provided for 3 foot loops on the runway and 1 foot 6 inch loops on the bridge. Optional air hose is also available and is supported by optional festoon trolleys. Gorbel® Work Station Cranes can utilize optional conductor bar electrification, but this results in an increase up to 40% of the amount of effort required to move the system.

LIFTING SOLUTION REDUCES EMPLOYEE BACK INJURIES

"With this Gorbelt workstation crane, there have been no injuries...biggest success."

Green Bay Packaging is a pulp and paper manufacturer using 100% recycled materials to produce a wide variety of paperboard packaging. The large rolls are slit and sized based on customer demand, and moved to a work cell in stacks where they are loaded onto skids for final shipping. The size of the rolls vary significantly, but can be as large as 3' x 5', and weigh as much as 600 lbs.

The primary problem facing the company in this application was operator injury, especially back strains. Back injuries were the leading cause of lost time injury for the company, and at one point were occurring as frequently as once per week. While most rolls are far too big for a single operator to lift, some smaller rolls may only weigh 60 pounds, which are tempting for an operator to move manually in a time saving effort.

The company began looking for a lifting solution that would be able to reduce the number of employee injuries, while at the same time handle the paper rolls without product damage.

"The two options being considered were an up-ender and a crane with a manipulator," said John Frederick of Green Bay Packaging. "The problem with the up-ender was that we couldn't handle the rolls the way we wanted to when loading the skids. The manipulator became important for stacking multiple rolls."

With the manipulator selected for tooling, Green Bay Packaging selected a 4,000 pound capacity Gorbelt work station crane, featuring dual girder bridges to support the manipulator. The crane also features tractor drives to make movement along the runways even easier for operators.

The implementation of the new process was very effective, as workers found moving even the heavier loads was easier. The manipulator inserts into the hole of the paper rolls and turns it to the proper position. Though the manipulator itself is quite heavy, the dual girders of the Gorbelt workstation crane keep the load completely stable, even when the load is not centered beneath the base of the manipulator. The tractor drives assist the operators movement on the x and y axis so that stopping and starting motion of a heavy load does not strain operators.

Of course, the primary goal the company when putting the system in the area was to reduce injuries. "There's been a huge reduction in workplace injuries," said Frederick. "Keeping our workers safe is our top priority. With this Gorbelt workstation crane, there have been no injuries, and that was this project's biggest success."



SEE VIDEO OF THIS APPLICATION!

See this Gorbelt solution in action by scanning the QR code below.



"There's been a huge reduction in workplace injuries."

See this and many more work station crane case studies at www.gorbelt.com/solutions/casestudies

WORK STATION CRANE COMPONENTS

10 HANGER ASSEMBLIES: CEILING MOUNTED

Each Gorbel® Ceiling Mounted Work Station Bridge Crane is provided with the necessary number of hanger assemblies, based on your application needs.



PLAIN STEEL TRACK

Standard hangers for plain steel track, with a 20 inch threaded rod (B7 alloy), are included with each assembly. The threaded rod can be field cut to custom lengths as required. An optional 72 inch rod can also be supplied. Two beam clips are bolted to the upper hanger bracket and are clamped to the supporting structure. The upper hanger brackets are adjustable for flange widths from 1 to 10 inches.



TRUSSED STEEL TRACK

Standard hangers for trussed steel track, with a 20 inch threaded rod (B7 alloy), are included with each assembly. The threaded rod can be field cut to custom lengths as required. An optional 72 inch rod can also be supplied. Two beam clips are bolted to the upper hanger bracket and are clamped to the supporting structure. The upper hanger brackets are adjustable for flange widths from 1 to 10 inches.



ALUMINUM TRACK

Standard hangers for aluminum track, with a 20 inch threaded rod (B7 alloy), are included with each assembly. The threaded rod can be field cut to custom lengths as required. An optional 72 inch rod can also be supplied. Two beam clips are bolted to the upper hanger bracket and are clamped to the supporting structure. The upper hanger brackets are adjustable for flange widths from 1 to 10 inches.

HANGER ASSEMBLIES: FREE STANDING

Each Gorbel® Free Standing Work Station Bridge Crane is provided with the necessary number of hanger assemblies, based on your application needs.



HANGERS FOR TRUSSED STEEL TRACK

Hangers for steel runways are included with each assembly as shown. The runways are flush mounted under the free standing support assemblies via spine clamp angles, B7 alloy threaded rods, and the appropriate hardware.



HANGERS FOR ALUMINUM TRACK

Standard hangers for aluminum runways are included with each assembly shown. The runways are flush mounted under the free standing support assemblies via beam clips, B7 alloy threaded rods, and the appropriate hardware.

www.gorbel.com
800.821.0086



SWAY BRACE FITTING (NOT SUPPLIED AS STANDARD)

Sway bracing is required on all systems except flush mounted systems to provide for a rigid-mount runway that allows the end truck to move freely. The fittings permit easy sway bracing with 1 inch standard steel pipe (pipe supplied by others). The flange is drilled to accept a 5/8 inch bolt (bolt by others) with two U-bolts (furnished). These optional fittings are not supplied as standard with crane kits.



FLUSH MOUNTED HANGERS – PARALLEL MOUNT

An optional ceiling support bracket, with beam clips, can be provided for plain track series that require flush mounting. With this bracket, the track is mounted underneath, parallel to the supporting steel. Two beam clips are bolted to the hanger bracket and are clamped to the supporting structure. When using this style, care should be taken to determine if the bridge has adequate overhead clearance. Note: to order this bracket, the flange width of the supporting structure must be supplied.



FLUSH MOUNTED HANGERS – PERPENDICULAR MOUNT

An optional ceiling support bracket, with beam clips, can be provided for plain track series that require flush mounting. With this bracket, the track is mounted underneath, perpendicular to the supporting steel. Four beam clips are bolted to the hanger bracket and are clamped to the supporting structure. When using this style, care should be taken to determine if the bridge has adequate overhead clearance. Note: to order this bracket, the flange width of the supporting structure must be supplied.

NEED A LIFTING DEVICE? COMPLETE YOUR ERGONOMIC LIFTING SOLUTIONS WITH GORBEL'S G-FORCE®

If your lifting application requires precision placement or blazing speeds, consider Gorbel's G-Force® Intelligent Lifting Device. The G-Force® uses exclusive patented technology and an industrial processor controlled servo drive system to deliver unmatched lifting precision and speed.

Gorbel's Intelligent Lifting Devices give you the best of both worlds: the responsiveness and flexibility of a human operator plus the power of a machine to maximize productivity while minimizing the risk of injury to the operator. And, they incorporate a range of speeds, making them perfect for quick, repetitive motions and slow, precise placements. The G-Force® is available in capacities to 1320 lbs with speeds to 200 feet per minute. Teachable virtual limits, speed reduction points, and float mode make it the ideal solution for a wide range of lifting applications.



OPTIONS WHEN USING MULTIPLE BRIDGES

What are your options when using multiple bridges? This section addresses the advantages and disadvantages of various multiple bridge system designs.

MIXED CAPACITY SYSTEMS

In mixed capacity systems, each bridge is sized for an individual rated load. Runways, on the other hand, are sized for the combined weight of all loads, so they use a heavier track series than any individual bridge.

Advantages:

- There are no “dead” coverage areas (areas with no bridge coverage) along the length of the system, so each bridge can travel the length of the system. (See mixed capacity system diagram)
- There are limited “dead” coverage areas between bridges, so bridges can be used side-by-side. (Compare mixed capacity system diagram with bridge buffer system diagram)
- Bridges weigh less, making the system more ergonomically friendly.

Disadvantages:

- Mixed capacity systems use larger sized runways, so they may cost more than bridge buffer systems or systems that use intermediate stops.

BRIDGE BUFFER SYSTEMS

In bridge buffer systems, bridges are sized for each individual rated load. Runways are sized for the heaviest individual load, so the runways are the same size as the largest bridge. Bridges are physically separated by wheeled, movable bridge buffers.

Advantages:

- Bridge buffer systems usually cost less than mixed capacity systems because they typically use smaller sized runways.

Disadvantages:

- The bridge buffers take up space (typically half the distance of the support centers), which creates a moving “dead” space between bridges. (See bridge buffer system diagram)

Note: When using two bridges, the dead space equals half the distance between support centers (L1 from the dimensional charts). When adding a third bridge, the dead space occupied by the additional bridge buffers equals the full distance between support centers.

SYSTEMS WITH INTERMEDIATE STOPS

In systems with intermediate stops, bridges are sized for each individual rated load. Runways are sized for the heaviest individual load, so the runways are the same size as the largest bridge. Bridges are physically separated by internal stops or bumpers. Extra hangers usually are required to eliminate overload. (See intermediate stops system diagram.)


Advantages:

- Systems with intermediate stops use smaller runways, therefore typically cost less than mixed capacity systems.
- There are fewer potential “dead” spots in the system. (Compare intermediate stops system diagram with bridge buffer system diagram)


Disadvantages:

- Each bridge on the system can travel only a portion of the length of the system. (See intermediate stops system diagram)
- Systems with intermediate stops may be more difficult to install, as additional ceiling support points must be available to accommodate the additional hangers required to prevent an overload situation.


MIXED CAPACITY SYSTEMS

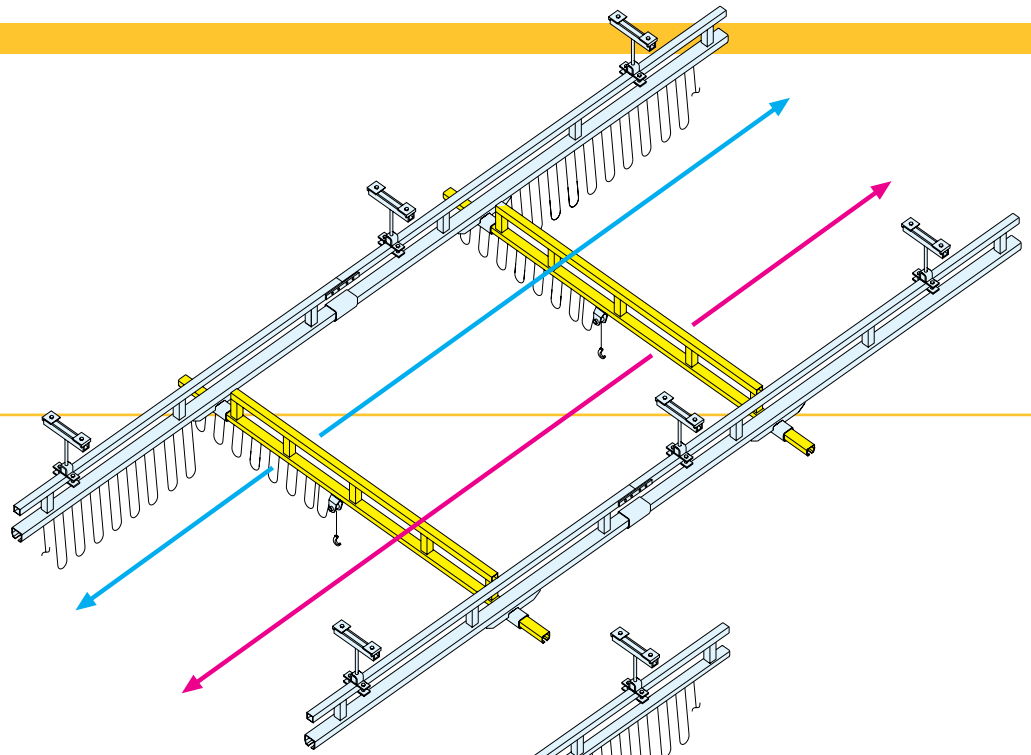

BRIDGE BUFFER SYSTEMS

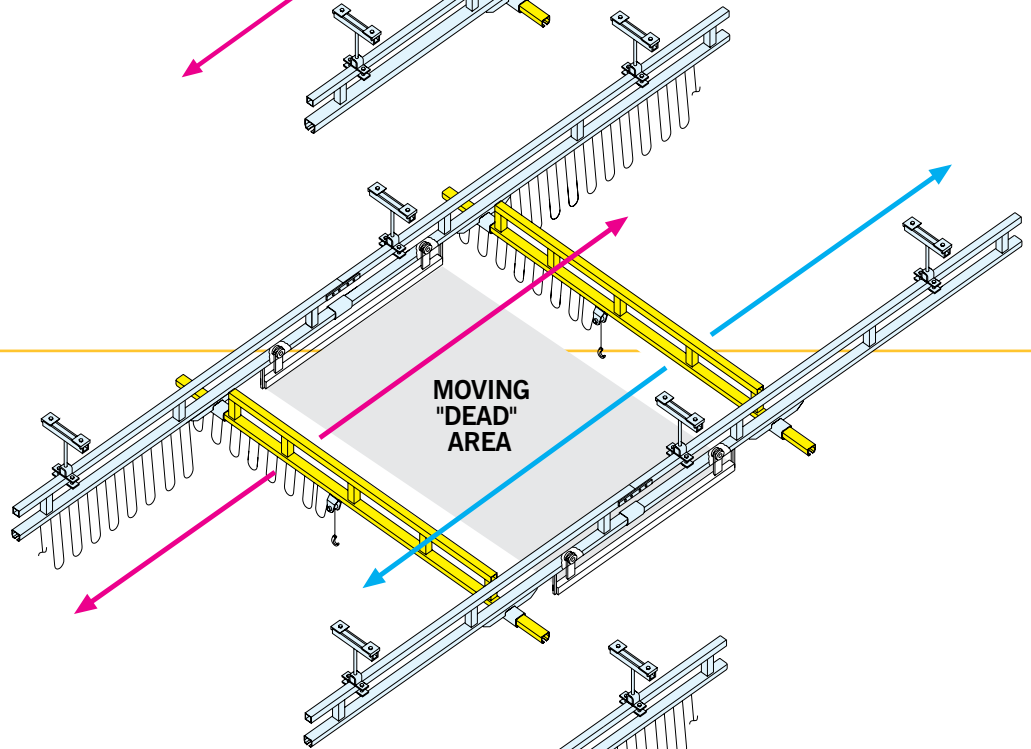

SYSTEMS WITH INTERMEDIATE STOPS

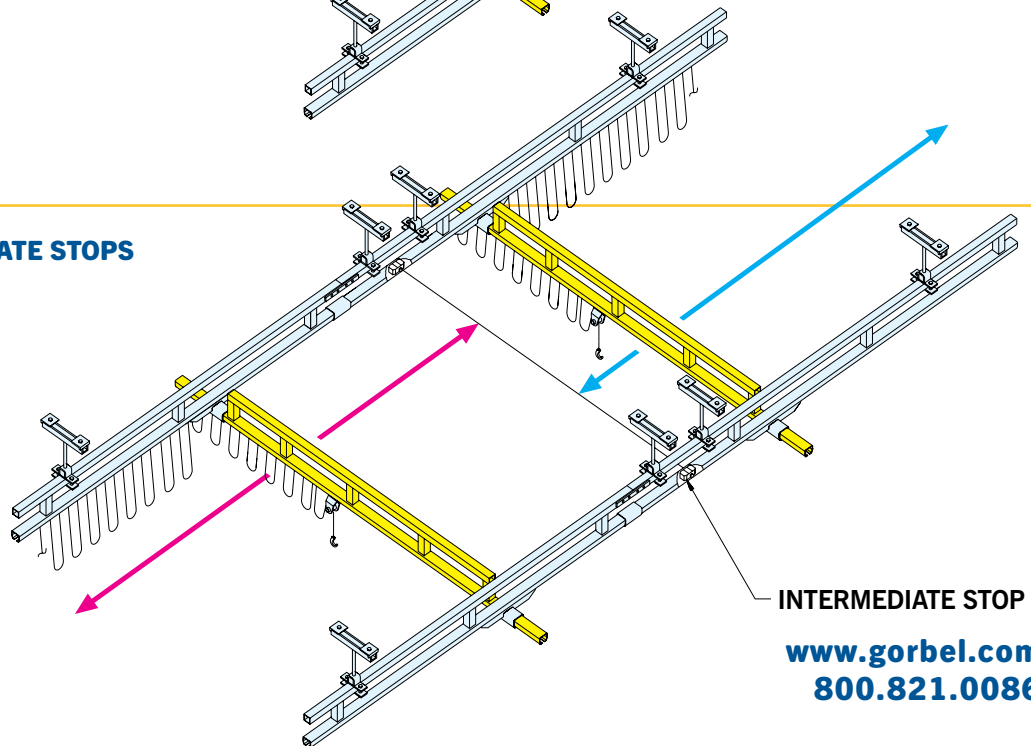

www.gorbel.com
800.821.0086

CUSTOM CRANE CONFIGURATIONS

ALUMINUM WORK STATION BRIDGE CRANES

For demanding, rapid, repetitive handling applications, the Aluminum Work Station Bridge Crane is the best ergonomic solution on the market. It is also ideal for facilities with structural limitations and challenging environments. This crane reduces bridge dead weight by up to 40%. In addition, our unique aluminum design, using high strength aluminum alloy, results in an unparalleled combination of spans, capacities, and ease of movement.

Features:

- A modular design that lets you use aluminum bridges on steel runways to provide cost effective solutions that are easy to install, expand, and field customize
- A unique track design that facilitates installation and provides precise track alignment
- Up to 40% lighter in weight than equivalent steel track systems
- Special anti-binding end trucks for free and easy movement

CANTILEVERED SUPPORTS

Increasing the effectiveness of large cranes, these support columns are used where material is delivered or removed from work cells by large overhead cranes or in applications where doors swing into the area.

Cantilevered supports can handle loads up to 4000 lbs. and are the answer any time the normal header of a free standing support assembly interferes with an operator's activity in the work cell.




Aluminum Work Station Bridge Cranes




Cantilevered Supports


www.gorbel.com
800.821.0086

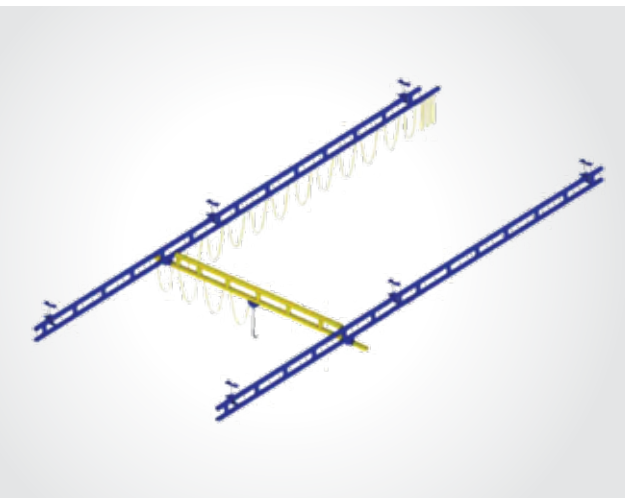

GORBEL[®]
A C L A S S A B O V E

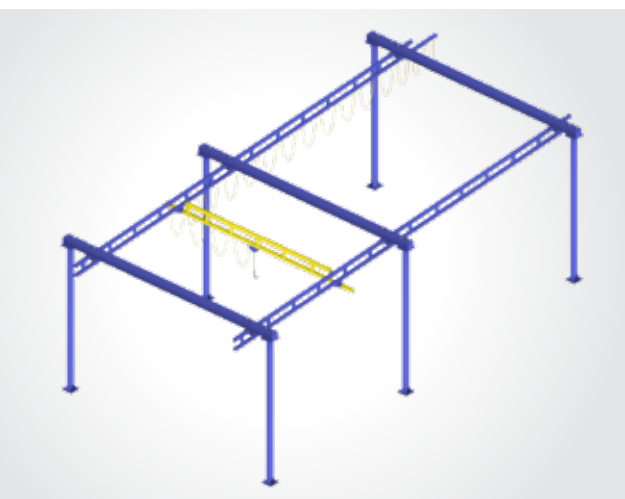

WORK STATION CRANE DIMENSIONAL INFORMATION

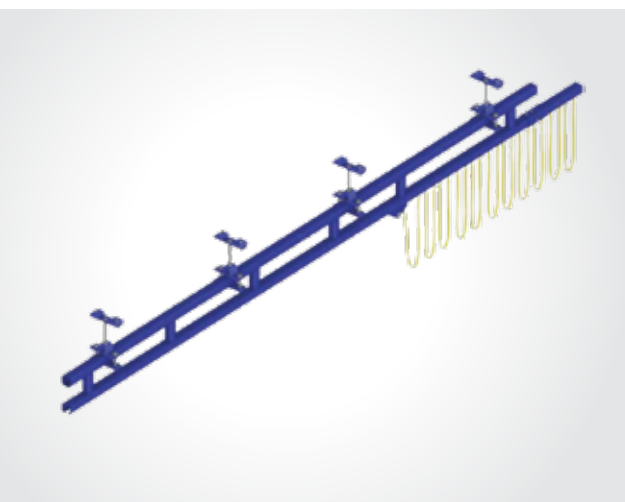

www.gorbel.com

Phone: (585) 924-6262

Toll Free Phone: (800) 821-0086

© 2025 Gorbel Inc. All Rights Reserved

INSTALLATION GUIDELINES

CAPACITY	SERIES	WEIGHT PER FOOT	MAX. L1	MAX. L2	MAX. L5	MAX. L9
250#	GLC	2.53#	6'	8"	18"	18"
	GLCS	4.92#	20'	48"	18"	48"
	AL	4.05#	20'	30"	48"	48"
	GLCSL	8.43#	25'	48"	18"	48"
500#	GLC	4.15#	6'	8"	24"	20"
	GLCS	7.44#	20'	48"	24"	48"
	AL	4.87#	20'	30"	48"	48"
	GLCSL	10.71#	25'	48"	24"	48"
	GLCSLX	11.01#	30'	48"	24"	48"
1000#	GLC	6.22#	6'	8"	24"	20"
	GLCS	12.25#	20'	48"	24"	48"
	AL	8.36#	20'	30"	48"	48"
	GLCSL	14.08#	25'	48"	24"	48"
	GLCSLX	17.47#	30'	48"	24"	48"
2000#	GLC	9.12#	6'	8"	24"	24"
	GLCS	16.89#	20'	48"	24"	48"
	AL	10.01#	20'	30"	48"	48"
	GLCSL	19.36#	25'	48"	24"	48"
	GLCSLX	20.13#	30'	48"	24"	48"
4000#	GLC	9.12#	4'	8"	24"	24"
	GLCS	20.68#	20'	48"	24"	48"
	GLCSL	26.21#	25'	48"	24"	48"
	GLCSLX	28.22#	30'	48"	24"	48"

L1 = MAXIMUM HANGER CENTERLINE

Maximum Hanger Centerline is considered from the center of a hanger to the center of the neighboring hanger.

L2 = SPLICE JOINT CENTERLINE TO HANGER CENTERLINE

Splice Joint Centerline to Hanger Centerline is considered from the center of a splice joint to the center of the nearest hanger.

L4 = BRIDGE SPAN

Bridge Span is considered from centerline to centerline of runways.
 $L4 = \text{Bridge Overall Length} - (2 \times \text{Bridge Cantilever})$

L5 = BRIDGE CANTILEVER**

Bridge Cantilever is considered from the centerline of the runway to the end of the bridge.

L9 = MAXIMUM RUNWAY CANTILEVER

Runway Cantilever is considered from the center of the end hanger to the end of the runway.

Note: Same guidelines apply for Monorails (GLMS, GLMSL, GLMSLX, ALM), with the exception of the "L5" dimension (not applicable).

Note: Typical L5 in 12". Max L5 may not be achievable (dependent on truss design of bridge).

Note: Depending on track series, anti-kick-up end trucks may be required for the following:


- bridges with $\leq 8'$ span (L4) and a bridge cantilever (L5) $\geq 12''$
- bridges with $< 10'$ span (L4) and a bridge cantilever (L5) $> 15''$
- bridges with $< 15'$ span (L4) and a bridge cantilever (L5) $> 18''$

*Anti-kick-up end trucks are not included as part of the standard crane kits.


****2000# Ceiling Mounted systems and Monorails at 10' span (L4) and bridge cantilever (L5) 15" need anti-kick-up end trucks.

Consult Gorbels® factory for information on bridges greater than 15' span (L4).

STANDARD BRIDGE CANTILEVER	Bridge Series	Bridge Overall Length					
		Steel					
		≤ 23'	28'	29'	33'	34'	
	250	12"	18"	24"	na	na	
	500	12"	18"	24"	18"	24"	
	1000	12"	18"	24"	18"	24"	
	2000	12"	18"	24"	18"	24"	
	4000	15"	18"	24"	18"	24"	
	Bridge Series	Bridge Overall Length					
Steel							
≤ 20'		23'	28'	29'	33'	34'	
250	12"	18"	18"	na	na	na	
500	12"	18"	18"	24"	18"	24"	
1000	12"	18"	18"	24"	18"	24"	
2000	12"	18"	18"	24"	18"	24"	
4000	15"	18"	18"	24"	18"	24"	

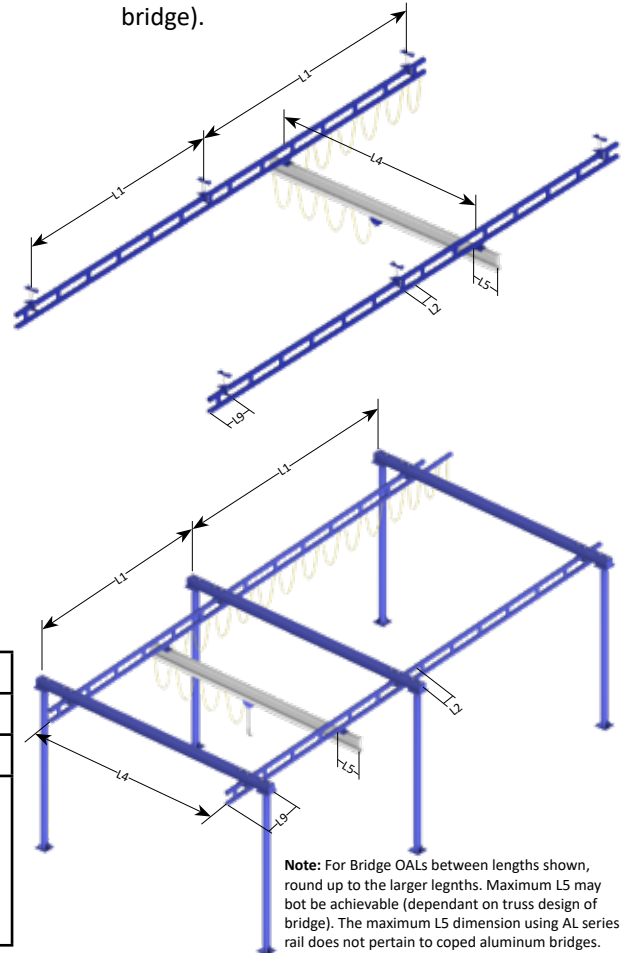

FREE STANDING WORK STATION BRIDGE CRANES STEEL RUNWAYS WITH STEEL OR ALUMINUM BRIDGE ISOMETRIC VIEW

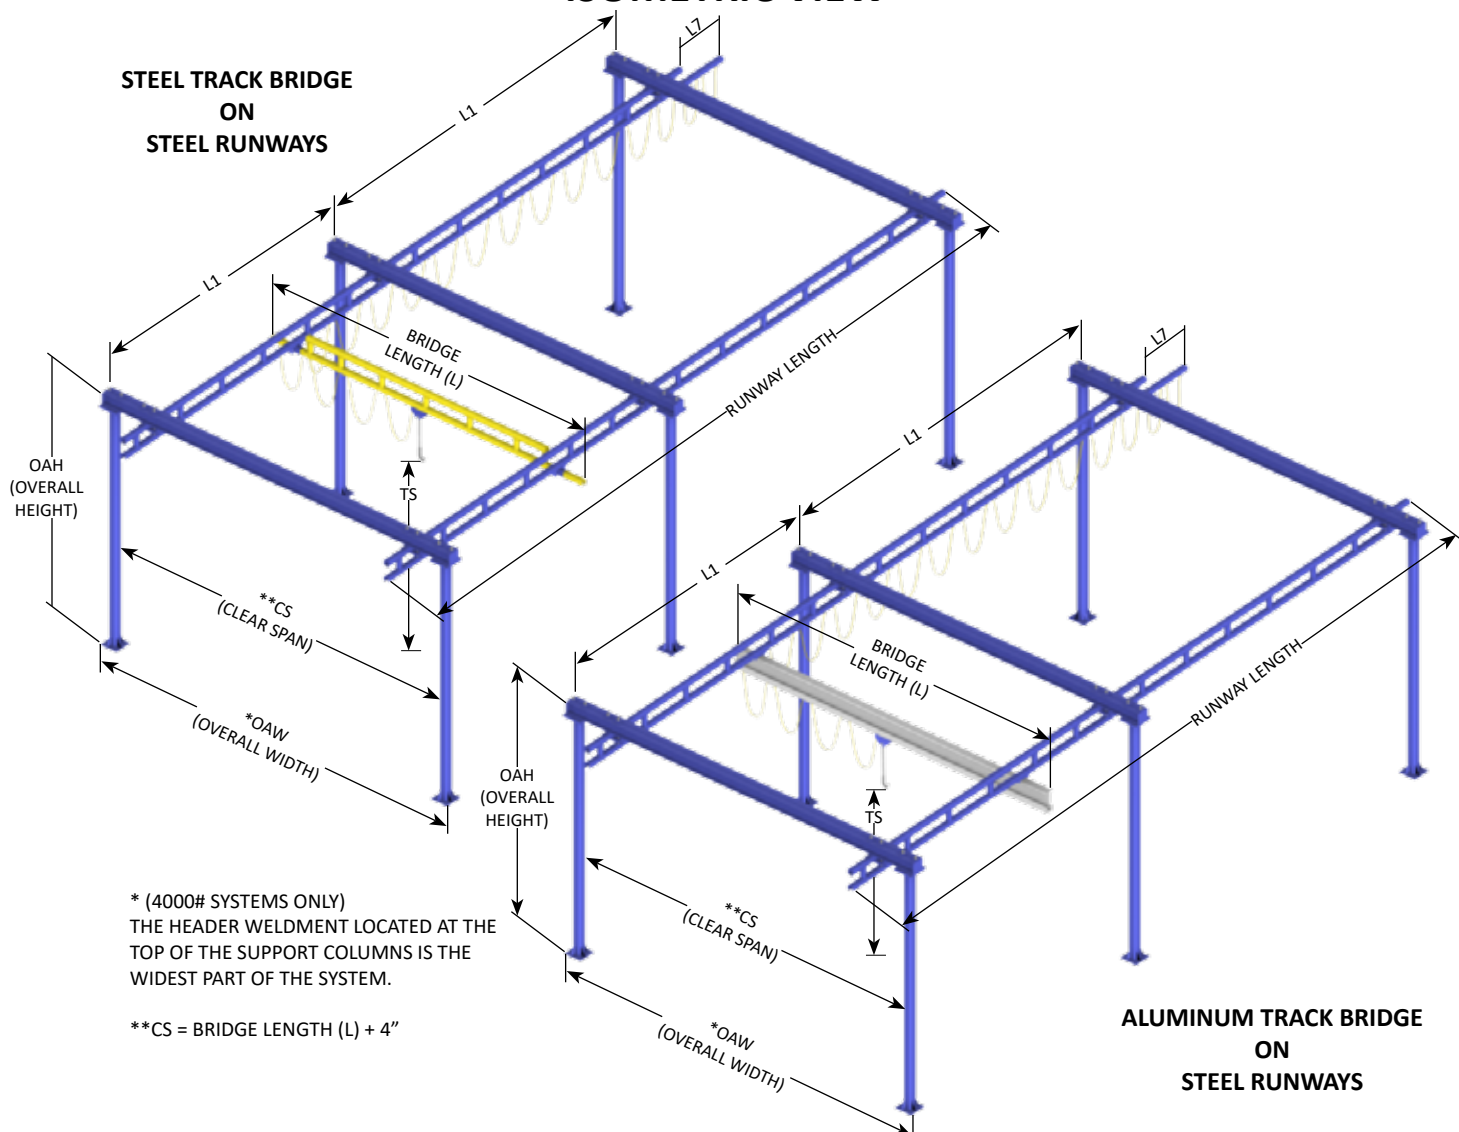

Model Number: _____

Capacity: _____ pounds

Bridge Length (L): _____ (OAL)


Runway Length: _____ (OAL)

Trolley Saddle Height: _____ (TS)


L1: _____ Are the number of support assemblies provided sufficient?
(See "SUPPORT" column on dimensional chart pages)

C: _____ inches (hoist by others)


COLUMN BASE DETAIL
FOR 3" COLUMNS



COLUMN BASE DETAIL
FOR 4" & 5" COLUMNS



COLUMN BASE DETAIL
FOR 6" & 7" COLUMNS




Gorbel® Free Standing Work Station Crane kits include: bridge, runways, the appropriate number of support assemblies, hoist trolley, end trucks, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel runway lengths greater than 63' and aluminum systems), festoon stack-up section, splice joints and hanger brackets.

Hoist and anchor bolts provided by others.

Dimensions are for reference only and are subject to change without notice.

FREE STANDING WORK STATION BRIDGE CRANES ALUMINUM RUNWAYS WITH ALUMINUM BRIDGE ISOMETRIC VIEW

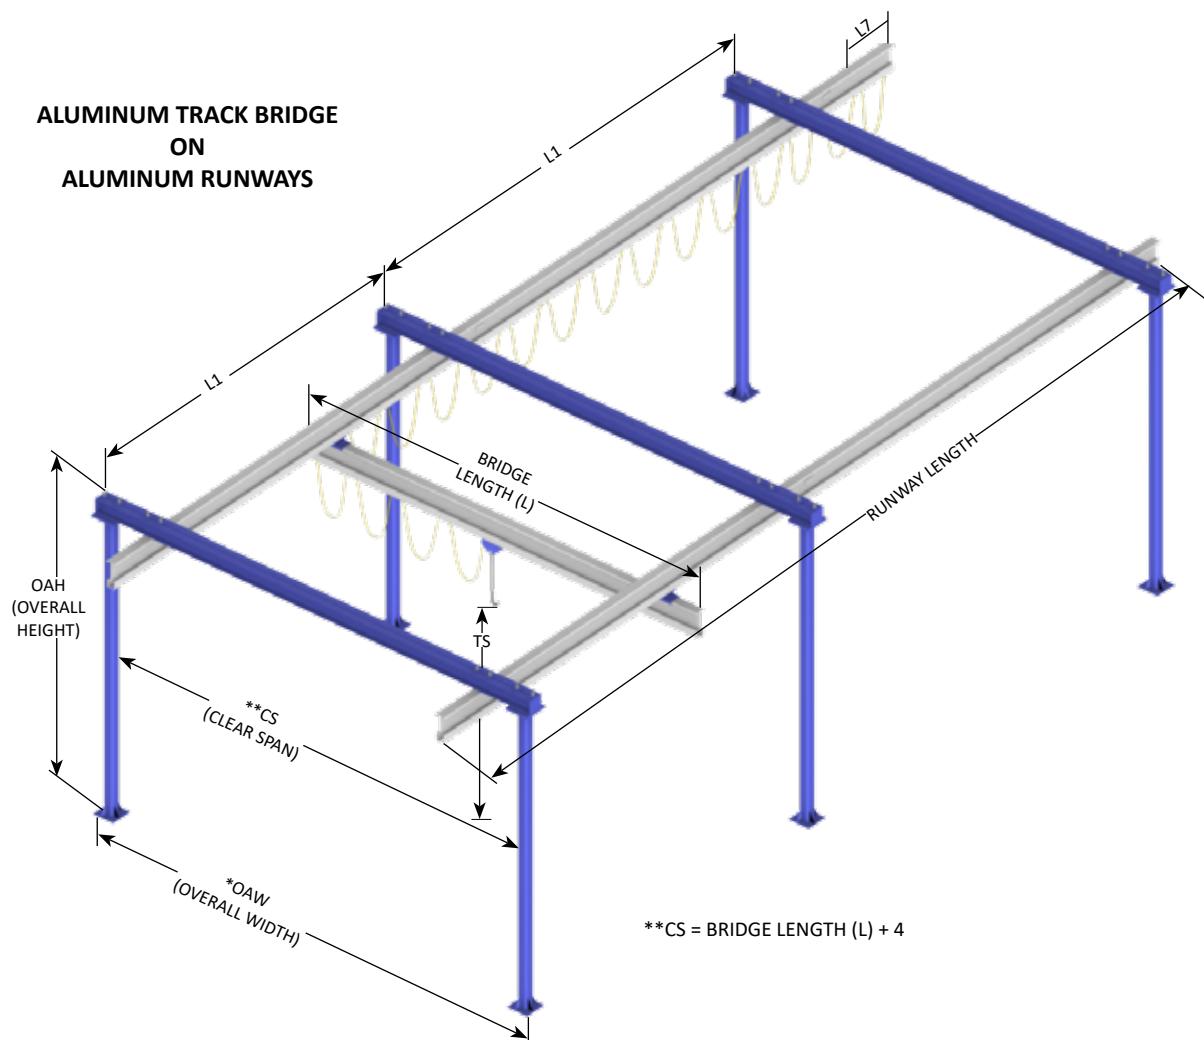

**CS = BRIDGE LENGTH (L) + 4

Model Number: _____

Capacity: _____ pounds

Bridge Length (L): _____ (OAL)


Runway Length: _____ (OAL)

Trolley Saddle Height: _____ (TS)


L1: _____ Are the number of support assemblies provided sufficient?
(See "SUPPORT" column on dimensional chart pages)

C: _____ inches (hoist by others)

COLUMN BASE DETAIL
3" COLUMNS



COLUMN BASE DETAIL
4" & 5" COLUMNS

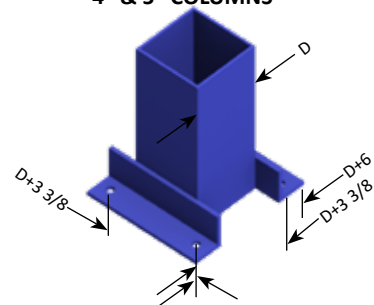

Gorbel® Free Standing Work Station Crane kits include: bridge, runways, the appropriate number of support assemblies, hoist trolley, end trucks, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel runway lengths greater than 63' and aluminum systems), festoon stack-up section, splice joints and hanger brackets.

Hoist and anchor bolts provided by others.

Dimensions are for reference only and are subject to change without notice.

FREE STANDING WORK STATION BRIDGE CRANES STEEL RUNWAYS WITH STEEL OR ALUMINUM BRIDGE

Model Number: _____

Capacity: _____ pounds

Bridge Length (L): _____ (OAL)

Runway Length: _____ (OAL)

Trolley Saddle Height: _____ (TS)






L1: _____ Are the number of support assemblies provided sufficient?
(See "SUPPORT" column on dimensional chart pages)

C: _____ inches (hoist by others)

Gorbel® Free Standing Work Station Crane kits include: bridge, runways, the appropriate number of support assemblies, hoist trolley, end trucks, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel runway lengths greater than 63' and aluminum systems), festoon stack-up section, splice joints and hanger brackets.

Hoist and anchor bolts provided by others.

Dimensions are for reference only and are subject to change without notice.

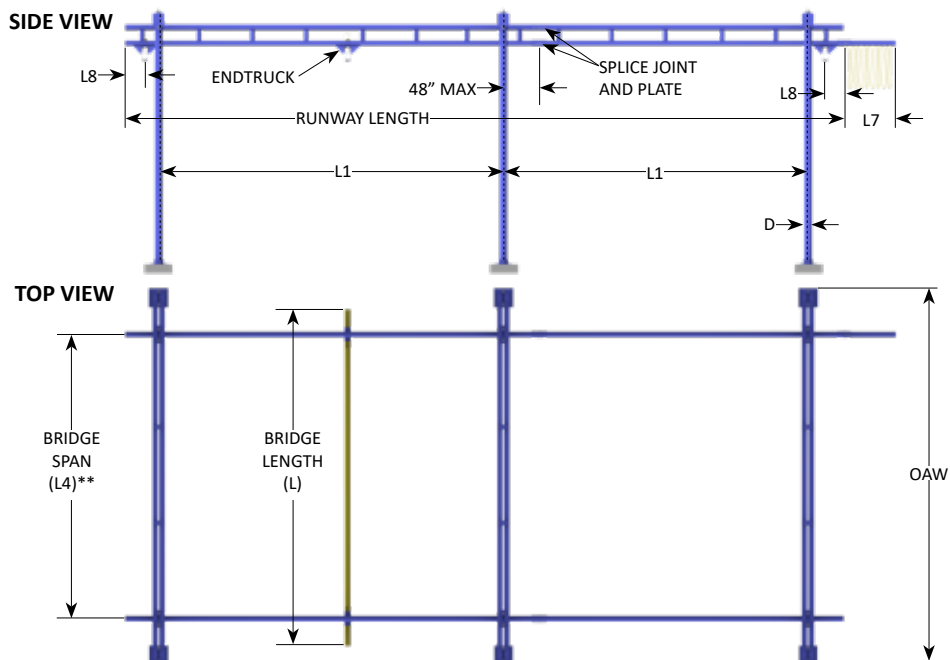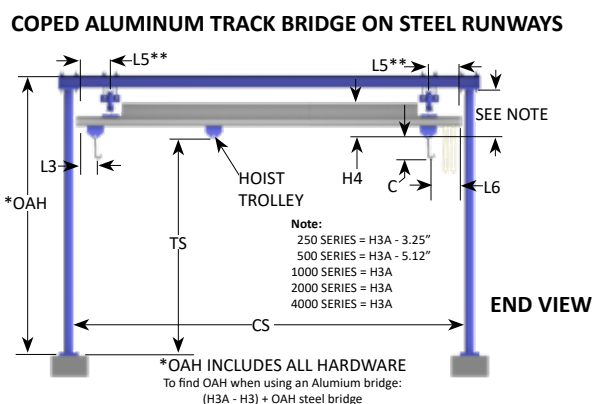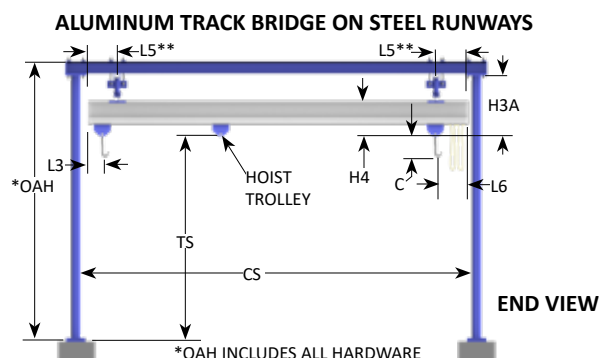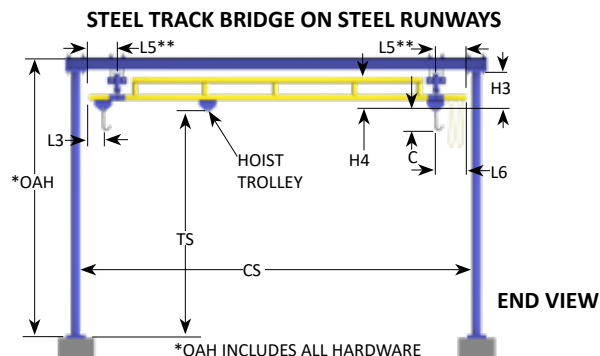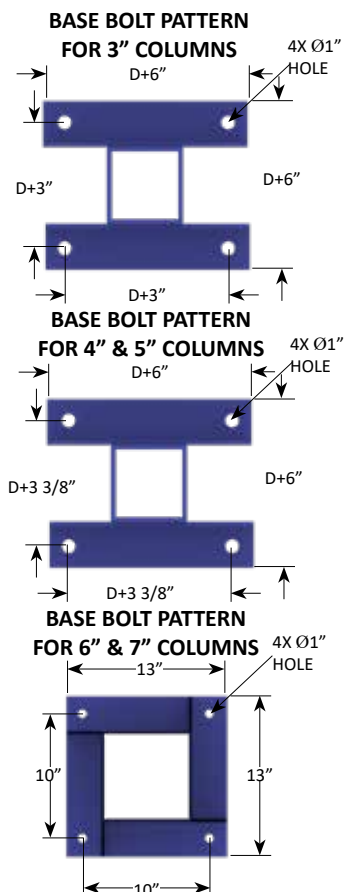

FREE STANDING WORK STATION BRIDGE CRANES ALUMINUM BRIDGE ON ALUMINUM RUNWAYS

Model Number: _____

Capacity: _____ pounds

Bridge Length (L): _____ (OAL)

Runway Length: _____ (OAL)

Trolley Saddle Height: _____ (TS)

L1: _____ Are the number of support assemblies provided sufficient?
(See "SUPPORT" column on dimensional chart pages)


C: _____ inches (hoist by others)

Gorbel® Free Standing Work Station Crane kits include: bridge, runways, the appropriate number of support assemblies, hoist trolley, end trucks, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel runway lengths greater than 63' and aluminum systems), festoon stack-up section, splice joints and hanger brackets.


Hoist and anchor bolts provided by others.

Dimensions are for reference only and are subject to change without notice.


ALUMINUM TRACK BRIDGE

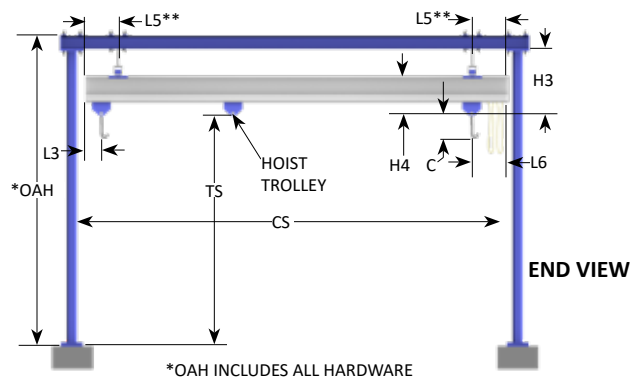


COPED ALUMINUM TRACK BRIDGE

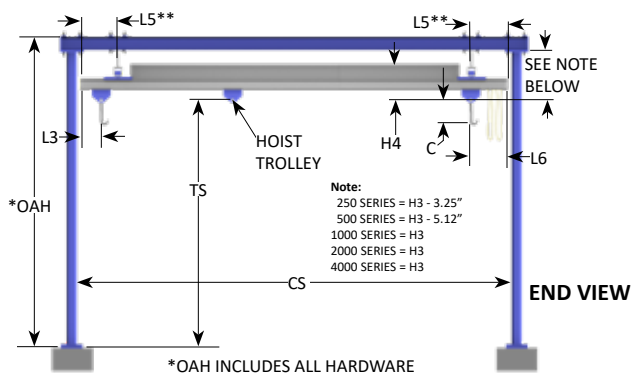


BASE BOLT PATTERN
FOR 3" COLUMNS




SIDE VIEW

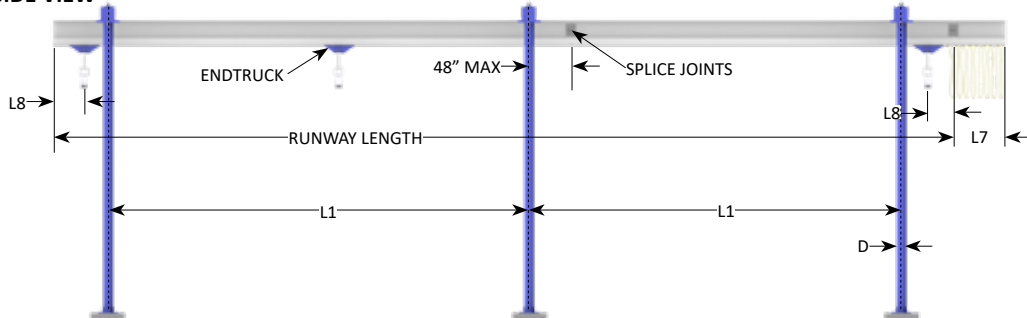

BASE BOLT PATTERN
FOR 4" & 5" COLUMNS



TOP VIEW

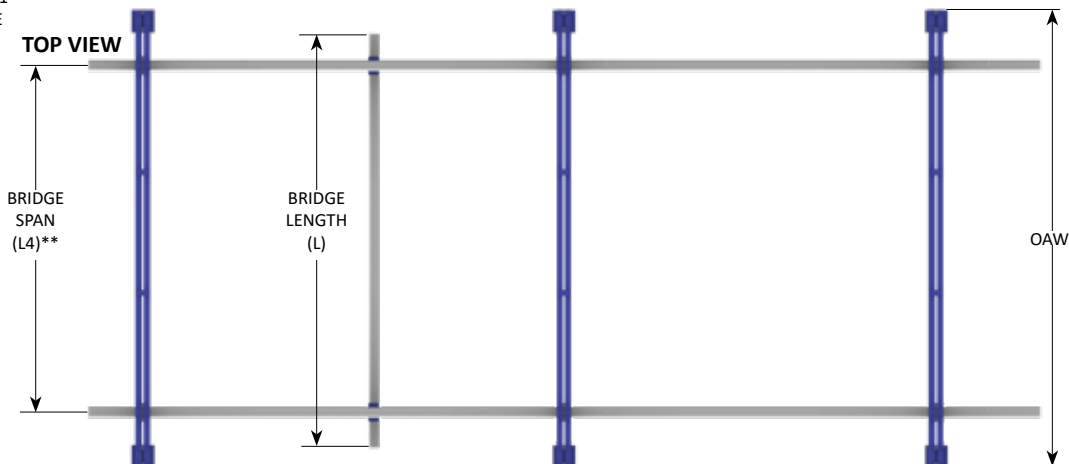

FREE STANDING WORK STATION BRIDGE CRANES

BRIDGE LENGTH (L)	RUNWAY LENGTH	TS	MODEL NUMBER	TRACK MAT.	RUNWAY			BRIDGE					SUPPORT STRUCTURE			
					MAX. L1	L7 in	L8 in	H3 in	H3A in	H4 in	L3 in	L6 in	OAW	OAH	D in	SPT*
10'	11'-6"	10'	GLCS-FS-250-10 (S or AL)-11.5-10	Steel	20'	9	10 3/4	12 7/8	20 5/8	4 3/4	5 1/8	8 3/4	11'-4"	11'-5 3/8"	3	2
		12'	GLCS-FS-250-10 (S or AL)-11.5-12	Steel	20'	9	10 3/4	12 7/8	20 5/8	4 3/4	5 1/8	8 3/4	11'-4"	13'-5 3/8"	3	2
		14'	GLCS-FS-250-10 (S or AL)-11.5-14	Steel	20'	9	10 3/4	12 7/8	20 5/8	4 3/4	5 1/8	8 3/4	11'-4"	15'-5 3/8"	3	2
	23'	10'	GLCS-FS-250-10 (S or AL)-23-10	Steel	20'	9	10 3/4	12 7/8	20 5/8	4 3/4	5 1/8	8 3/4	11'-4"	11'-5 3/8"	3	2
		10'	AL-FS-250-10-23-10	Alum	20'	13	13 1/4	20	-	10 3/4	7 1/4	16 7/8	11'-4"	12'-0 1/2"	3	2
		12'	GLCS-FS-250-10 (S or AL)-23-12	Steel	20'	9	10 3/4	12 7/8	20 5/8	4 3/4	5 1/8	8 3/4	11'-4"	13'-5 3/8"	3	2
		12'	AL-FS-250-10-23-12	Alum	20'	13	13 1/4	20	-	10 3/4	7 1/4	16 7/8	11'-4"	14'-0 1/2"	3	2
		14'	GLCS-FS-250-10 (S or AL)-23-14	Steel	20'	9	10 3/4	12 7/8	20 5/8	4 3/4	5 1/8	8 3/4	11'-4"	15'-5 3/8"	3	2
		14'	AL-FS-250-10-23-14	Alum	20'	13	13 1/4	20	-	10 3/4	7 1/4	16 7/8	11'-4"	16'-0 1/2"	3	2
	28'	10'	GLCSL-FS-250-10 (S or AL)-28-10	Steel	25'	9	10 3/4	14 7/8	22 5/8	4 3/4	5 1/8	8 3/4	11'-4"	11'-7 3/8"	3	2
		12'	GLCSL-FS-250-10 (S or AL)-28-12	Steel	25'	9	10 3/4	14 7/8	22 5/8	4 3/4	5 1/8	8 3/4	11'-4"	13'-7 3/8"	3	2
		14'	GLCSL-FS-250-10 (S or AL)-28-14	Steel	25'	9	10 3/4	14 7/8	22 5/8	4 3/4	5 1/8	8 3/4	11'-4"	15'-7 3/8"	3	2
	33'	10'	GLCS-FS-250-10 (S or AL)-33-10	Steel	20'	9	10 3/4	12 7/8	20 5/8	4 3/4	5 1/8	8 3/4	11'-4"	11'-5 3/8"	3	3
		10'	AL-FS-250-10-33-10	Alum	20'	19	13 1/4	20	-	10 3/4	7 1/4	16 7/8	11'-4"	12'-0 1/2"	3	3
		12'	GLCS-FS-250-10 (S or AL)-33-12	Steel	20'	9	10 3/4	12 7/8	20 5/8	4 3/4	5 1/8	8 3/4	11'-4"	13'-5 3/8"	3	3
		12'	AL-FS-250-10-33-12	Alum	20'	19	13 1/4	20	-	10 3/4	7 1/4	16 7/8	11'-4"	14'-0 1/2"	3	3
		14'	GLCS-FS-250-10 (S or AL)-33-14	Steel	20'	9	10 3/4	12 7/8	20 5/8	4 3/4	5 1/8	8 3/4	11'-4"	15'-5 3/8"	3	3
		14'	AL-FS-250-10-33-14	Alum	20'	19	13 1/4	20	-	10 3/4	7 1/4	16 7/8	11'-4"	16'-0 1/2"	3	3
	43'	10'	GLCS-FS-250-10 (S or AL)-43-10	Steel	20'	13	10 3/4	12 7/8	20 5/8	4 3/4	5 1/8	8 3/4	11'-4"	11'-5 3/8"	3	3
		10'	AL-FS-250-10-43-10	Alum	20'	26	13 1/4	20	-	10 3/4	7 1/4	16 7/8	11'-4"	12'-0 1/2"	3	3
		12'	GLCS-FS-250-10 (S or AL)-43-12	Steel	20'	13	10 3/4	12 7/8	20 5/8	4 3/4	5 1/8	8 3/4	11'-4"	13'-5 3/8"	3	3
		12'	AL-FS-250-10-43-12	Alum	20'	26	13 1/4	20	-	10 3/4	7 1/4	16 7/8	11'-4"	14'-0 1/2"	3	3
		14'	GLCS-FS-250-10 (S or AL)-43-14	Steel	20'	13	10 3/4	12 7/8	20 5/8	4 3/4	5 1/8	8 3/4	11'-4"	15'-5 3/8"	3	3
		14'	AL-FS-250-10-43-14	Alum	20'	26	13 1/4	20	-	10 3/4	7 1/4	16 7/8	11'-4"	16'-0 1/2"	3	3
	53'	10'	GLCS-FS-250-10 (S or AL)-53-10	Steel	20'	13	10 3/4	12 7/8	20 5/8	4 3/4	5 1/8	8 3/4	11'-4"	11'-5 3/8"	3	4
		10'	AL-FS-250-10-53-10	Alum	20'	30	13 1/4	20	-	10 3/4	7 1/4	16 7/8	11'-4"	12'-0 1/2"	3	4
		10'	GLCSL-FS-250-10 (S or AL)-53-10	Steel	25'	13	10 3/4	14 7/8	22 5/8	4 3/4	5 1/8	8 3/4	11'-4"	11'-7 3/8"	3	3
		12'	GLCS-FS-250-10 (S or AL)-53-12	Steel	20'	13	10 3/4	12 7/8	20 5/8	4 3/4	5 1/8	8 3/4	11'-4"	13'-5 3/8"	3	4
		12'	AL-FS-250-10-53-12	Alum	20'	30	13 1/4	20	-	10 3/4	7 1/4	16 7/8	11'-4"	14'-0 1/2"	3	4
		12'	GLCSL-FS-250-10 (S or AL)-53-12	Steel	25'	13	10 3/4	14 7/8	22 5/8	4 3/4	5 1/8	8 3/4	11'-4"	13'-7 3/8"	3	3
		14'	GLCS-FS-250-10 (S or AL)-53-14	Steel	20'	13	10 3/4	12 7/8	20 5/8	4 3/4	5 1/8	8 3/4	11'-4"	15'-5 3/8"	3	4
		14'	AL-FS-250-10-53-14	Alum	20'	30	13 1/4	20	-	10 3/4	7 1/4	16 7/8	11'-4"	16'-0 1/2"	3	4
		14'	GLCSL-FS-250-10 (S or AL)-53-14	Steel	25'	13	10 3/4	14 7/8	22 5/8	4 3/4	5 1/8	8 3/4	11'-4"	15'-7 3/8"	3	3
	63'	10'	GLCS-FS-250-10 (S or AL)-63-10	Steel	20'	19	10 3/4	12 7/8	20 5/8	4 3/4	5 1/8	8 3/4	11'-4"	11'-5 3/8"	3	4
		10'	AL-FS-250-10-63-10	Alum	20'	36	13 1/4	20	-	10 3/4	7 1/4	16 7/8	11'-4"	12'-0 1/2"	3	4
		12'	GLCS-FS-250-10 (S or AL)-63-12	Steel	20'	19	10 3/4	12 7/8	20 5/8	4 3/4	5 1/8	8 3/4	11'-4"	13'-5 3/8"	3	4
		12'	AL-FS-250-10-63-12	Alum	20'	36	13 1/4	20	-	10 3/4	7 1/4	16 7/8	11'-4"	14'-0 1/2"	3	4
		14'	GLCS-FS-250-10 (S or AL)-63-14	Steel	20'	19	10 3/4	12 7/8	20 5/8	4 3/4	5 1/8	8 3/4	11'-4"	15'-5 3/8"	3	4
	78'	10'	GLCSL-FS-250-10 (S or AL)-78-10	Steel	25'	46	10 3/4	14 7/8	22 5/8	4 3/4	5 1/8	15 1/8	11'-4"	11'-7 3/8"	3	4
		12'	GLCSL-FS-250-10 (S or AL)-78-12	Steel	25'	46	10 3/4	14 7/8	22 5/8	4 3/4	5 1/8	15 1/8	11'-4"	13'-7 3/8"	3	4
		14'	GLCSL-FS-250-10 (S or AL)-78-14	Steel	25'	46	10 3/4	14 7/8	22 5/8	4 3/4	5 1/8	15 1/8	11'-4"	15'-7 3/8"	3	4
	83'	10'	GLCS-FS-250-10 (S or AL)-83-10	Steel	20'	46	10 3/4	12 7/8	20 5/8	4 3/4	5 1/8	15 1/8	11'-4"	11'-5 3/8"	3	5
		10'	AL-FS-250-10-83-10	Alum	20'	46	13 1/4	20	-	10 3/4	7 1/4	16 7/8	11'-4"	12'-0 1/2"	3	5
		12'	GLCS-FS-250-10 (S or AL)-83-12	Steel	20'	46	10 3/4	12 7/8	20 5/8	4 3/4	5 1/8	15 1/8	11'-4"	13'-5 3/8"	3	5
		12'	AL-FS-250-10-83-12	Alum	20'	46	13 1/4	20	-	10 3/4	7 1/4	16 7/8	11'-4"	14'-0 1/2"	3	5
		14'	GLCS-FS-250-10 (S or AL)-83-14	Steel	20'	46	10 3/4	12 7/8	20 5/8	4 3/4	5 1/8	15 1/8	11'-4"	15'-5 3/8"	3	5
	103'	14'	AL-FS-250-10-83-14	Alum	20'	46	13 1/4	20	-	10 3/4	7 1/4	16 7/8	11'-4"	16'-0 1/2"	3	5
		10'	GLCS-FS-250-10 (S or AL)-103-10	Steel	20'	54	10 3/4	12 7/8	20 5/8	4 3/4	5 1/8	15 1/8	11'-4"	11'-5 3/8"	3	6
		10'	AL-FS-250-10-103-10	Alum	20'	54	13 1/4	20	-	10 3/4	7 1/4	16 7/8	11'-4"	12'-0 1/2"	3	6
		10'	GLCSL-FS-250-10 (S or AL)-103-10	Steel	25'	54	10 3/4	14 7/8	22 5/8	4 3/4	5 1/8	15 1/8	11'-4"	11'-7 3/8"	3	5
		12'	GLCS-FS-250-10 (S or AL)-103-12	Steel	20'	54	10 3/4	12 7/8	20 5/8	4 3/4	5 1/8	15 1/8	11'-4"	13'-5 3/8"	3	6
		12'	AL-FS-250-10-103-12	Alum	20'	54	13 1/4	20	-	10 3/4	7 1/4	16 7/8	11'-4"	14'-0 1/2"	3	6
		12'	GLCSL-FS-250-10 (S or AL)-103-12	Steel	25'	54	10 3/4	14 7/8	22 5/8	4 3/4	5 1/8	15 1/8	11'-4"	13'-7 3/8"	3	5
	14'	14'	GLCS-FS-250-10 (S or AL)-103-14	Steel	20'	54	10 3/4	12 7/8	20 5/8	4 3/4	5 1/8	15 1/8	11'-4"	15'-5 3/8"	3	6
		14'	AL-FS-250-10-103-14	Alum	20'	54	13 1/4	20	-	10 3/4	7 1/4	16 7/8	11'-4"	16'-0 1/2"	3	6
		14'	GLCSL-FS-250-10 (S or AL)-103-14	Steel	25'	54	10 3/4	14 7/8	22 5/8	4 3/4	5 1/8	15 1/8	11'-4"	15'-7 3/8"	3	5

*This column provides the total number of support assemblies based on the "L1" dimensions shown. Support assemblies are designed to AISC specifications and do not require bracing. If no movement of the support assembly is preferred, then bracing to the building steel is recommended (not included).

To Determine Hook Coverage: [Bridge Travel on Runway = Runway Length - (2xL8)] by [Hoist Trolley Travel on Bridge = Bridge Length - L3 - L6] (L6 allows for festoon stack-up).

Gorbel® Free Standing Work Station Bridge Crane Kits include: bridge, runways, the appropriate number of support assemblies, hoist trolley, end trucks, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel runway lengths greater than 63' and all aluminum systems), festoon stack-up section, splice joints and hanger brackets. Hoist and anchor bolts provided by others.

Dimensions are for reference only and are subject to change without notice.

250# CAPACITY

FREE STANDING WORK STATION BRIDGE CRANES

FREE STANDING WORK
STATION CRANES

BRIDGE LENGTH (L)	RUNWAY LENGTH	TS	MODEL NUMBER	TRACK MAT.	RUNWAY			BRIDGE					SUPPORT STRUCTURE			
					MAX. L1	L7 in	L8 in	H3 in	H3A in	H4 in	L3 in	L6 in	OAW	OAH	D in	SPT*
15'	23'	10'	GLCS-FS-250-15 (S or AL)-23-10	Steel	20'	9	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	11 1/4	16'-4"	11'-5 3/8"	3	2
		10'	AL-FS-250-15-23-10	Alum	20'	13	13 1/4	20	-	10 3/4	7 1/4	23 5/8	16'-4"	12'-0 1/2"	3	2
		12'	GLCS-FS-250-15 (S or AL)-23-12	Steel	20'	9	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	11 1/4	16'-4"	13'-5 3/8"	3	2
		12'	AL-FS-250-15-23-12	Alum	20'	13	13 1/4	20	-	10 3/4	7 1/4	23 5/8	16'-4"	14'-0 1/2"	3	2
		14'	GLCS-FS-250-15 (S or AL)-23-14	Steel	20'	9	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	11 1/4	16'-4"	15'-5 3/8"	3	2
		14'	AL-FS-250-15-23-14	Alum	20'	13	13 1/4	20	-	10 3/4	7 1/4	23 5/8	16'-4"	16'-0 1/2"	3	2
	28'	10'	GLCSL-FS-250-15 (S or AL)-28-10	Steel	25'	9	10 3/4	14 7/8	22 5/8	10 1/2	5 1/8	11 1/4	16'-4"	11'-7 3/8"	3	2
		12'	GLCSL-FS-250-15 (S or AL)-28-12	Steel	25'	9	10 3/4	14 7/8	22 5/8	10 1/2	5 1/8	11 1/4	16'-4"	13'-7 3/8"	3	2
		14'	GLCSL-FS-250-15 (S or AL)-28-14	Steel	25'	9	10 3/4	14 7/8	22 5/8	10 1/2	5 1/8	11 1/4	16'-4"	15'-7 3/8"	3	2
	33'	10'	GLCS-FS-250-15 (S or AL)-33-10	Steel	20'	9	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	11 1/4	16'-4"	11'-5 3/8"	3	3
		10'	AL-FS-250-15-33-10	Alum	20'	19	13 1/4	20	-	10 3/4	7 1/4	23 5/8	16'-4"	12'-0 1/2"	3	3
		12'	GLCS-FS-250-15 (S or AL)-33-12	Steel	20'	9	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	11 1/4	16'-4"	13'-5 3/8"	3	3
		12'	AL-FS-250-15-33-12	Alum	20'	19	13 1/4	20	-	10 3/4	7 1/4	23 5/8	16'-4"	14'-0 1/2"	3	3
		14'	GLCS-FS-250-15 (S or AL)-33-14	Steel	20'	9	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	11 1/4	16'-4"	15'-5 3/8"	3	3
		14'	AL-FS-250-15-33-14	Alum	20'	19	13 1/4	20	-	10 3/4	7 1/4	23 5/8	16'-4"	16'-0 1/2"	3	3
	43'	10'	GLCS-FS-250-15 (S or AL)-43-10	Steel	20'	11	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	11 1/4	16'-4"	11'-5 3/8"	3	3
		10'	AL-FS-250-15-43-10	Alum	20'	26	13 1/4	20	-	10 3/4	7 1/4	23 5/8	16'-4"	12'-0 1/2"	3	3
		12'	GLCS-FS-250-15 (S or AL)-43-12	Steel	20'	11	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	11 1/4	16'-4"	13'-5 3/8"	3	3
		12'	AL-FS-250-15-43-12	Alum	20'	26	13 1/4	20	-	10 3/4	7 1/4	23 5/8	16'-4"	14'-0 1/2"	3	3
		14'	GLCS-FS-250-15 (S or AL)-43-14	Steel	20'	11	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	11 1/4	16'-4"	15'-5 3/8"	3	3
		14'	AL-FS-250-15-43-14	Alum	20'	26	13 1/4	20	-	10 3/4	7 1/4	23 5/8	16'-4"	16'-0 1/2"	3	3
	53'	10'	GLCS-FS-250-15 (S or AL)-53-10	Steel	20'	13	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	11 1/4	16'-4"	11'-5 3/8"	3	4
		10'	AL-FS-250-15-53-10	Alum	20'	30	13 1/4	20	-	10 3/4	7 1/4	23 5/8	16'-4"	12'-0 1/2"	3	4
		10'	GLCSL-FS-250-15 (S or AL)-53-10	Steel	25'	13	10 3/4	14 7/8	22 5/8	10 1/2	5 1/8	11 1/4	16'-4"	11'-7 3/8"	3	3
		12'	GLCS-FS-250-15 (S or AL)-53-12	Steel	20'	13	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	11 1/4	16'-4"	13'-5 3/8"	3	4
		12'	AL-FS-250-15-53-12	Alum	20'	30	13 1/4	20	-	10 3/4	7 1/4	23 5/8	16'-4"	14'-0 1/2"	3	4
		12'	GLCSL-FS-250-15 (S or AL)-53-12	Steel	25'	13	10 3/4	14 7/8	22 5/8	10 1/2	5 1/8	11 1/4	16'-4"	13'-7 3/8"	3	3
		14'	GLCS-FS-250-15 (S or AL)-53-14	Steel	20'	13	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	11 1/4	16'-4"	15'-5 3/8"	3	4
		14'	AL-FS-250-15-53-14	Alum	20'	30	13 1/4	20	-	10 3/4	7 1/4	23 5/8	16'-4"	16'-0 1/2"	3	4
	63'	10'	GLCS-FS-250-15 (S or AL)-63-10	Steel	20'	15	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	11 1/4	16'-4"	11'-5 3/8"	3	4
		10'	AL-FS-250-15-63-10	Alum	20'	36	13 1/4	20	-	10 3/4	7 1/4	23 5/8	16'-4"	12'-0 1/2"	3	4
		12'	GLCS-FS-250-15 (S or AL)-63-12	Steel	20'	15	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	11 1/4	16'-4"	13'-5 3/8"	3	4
		12'	AL-FS-250-15-63-12	Alum	20'	36	13 1/4	20	-	10 3/4	7 1/4	23 5/8	16'-4"	14'-0 1/2"	3	4
		14'	GLCS-FS-250-15 (S or AL)-63-14	Steel	20'	15	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	11 1/4	16'-4"	15'-5 3/8"	3	4
		14'	AL-FS-250-15-63-14	Alum	20'	36	13 1/4	20	-	10 3/4	7 1/4	23 5/8	16'-4"	16'-0 1/2"	3	4
	78'	10'	GLCSL-FS-250-15 (S or AL)-78-10	Steel	25'	46	10 3/4	14 7/8	22 5/8	10 1/2	5 1/8	21 7/8	16'-4"	11'-7 3/8"	3	4
		12'	GLCSL-FS-250-15 (S or AL)-78-12	Steel	25'	46	10 3/4	14 7/8	22 5/8	10 1/2	5 1/8	21 7/8	16'-4"	13'-7 3/8"	3	4
		14'	GLCSL-FS-250-15 (S or AL)-78-14	Steel	25'	46	10 3/4	14 7/8	22 5/8	10 1/2	5 1/8	21 7/8	16'-4"	15'-7 3/8"	3	4
	83'	10'	GLCS-FS-250-15 (S or AL)-83-10	Steel	20'	46	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	21 7/8	16'-4"	11'-5 3/8"	3	5
		10'	AL-FS-250-15-83-10	Alum	20'	46	13 1/4	20	-	10 3/4	7 1/4	23 5/8	16'-4"	12'-0 1/2"	3	5
		12'	GLCS-FS-250-15 (S or AL)-83-12	Steel	20'	46	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	21 7/8	16'-4"	13'-5 3/8"	3	5
		12'	AL-FS-250-15-83-12	Alum	20'	46	13 1/4	20	-	10 3/4	7 1/4	23 5/8	16'-4"	14'-0 1/2"	3	5
		14'	GLCS-FS-250-15 (S or AL)-83-14	Steel	20'	46	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	21 7/8	16'-4"	15'-5 3/8"	3	5
		14'	AL-FS-250-15-83-14	Alum	20'	46	13 1/4	20	-	10 3/4	7 1/4	23 5/8	16'-4"	16'-0 1/2"	3	5
	103'	10'	GLCS-FS-250-15 (S or AL)-103-10	Steel	20'	54	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	21 7/8	16'-4"	11'-5 3/8"	3	6
		10'	AL-FS-250-15-103-10	Alum	20'	54	13 1/4	20	-	10 3/4	7 1/4	23 5/8	16'-4"	12'-0 1/2"	3	6
		10'	GLCSL-FS-250-15 (S or AL)-103-10	Steel	25'	54	10 3/4	14 7/8	22 5/8	10 1/2	5 1/8	21 7/8	16'-4"	11'-7 3/8"	3	5
		12'	GLCS-FS-250-15 (S or AL)-103-12	Steel	20'	54	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	21 7/8	16'-4"	13'-5 3/8"	3	6
		12'	AL-FS-250-15-103-12	Alum	20'	54	13 1/4	20	-	10 3/4	7 1/4	23 5/8	16'-4"	14'-0 1/2"	3	6
		12'	GLCSL-FS-250-15 (S or AL)-103-12	Steel	25'	54	10 3/4	14 7/8	22 5/8	10 1/2	5 1/8	21 7/8	16'-4"	13'-7 3/8"	3	5
		14'	GLCS-FS-250-15 (S or AL)-103-14	Steel	20'	54	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	21 7/8	16'-4"	15'-5 3/8"	3	6
		14'	AL-FS-250-15-103-14	Alum	20'	54	13 1/4	20	-	10 3/4	7 1/4	23 5/8	16'-4"	16'-0 1/2"	3	6
		14'	GLCSL-FS-250-15 (S or AL)-103-14	Steel	25'	54	10 3/4	14 7/8	22 5/8	10 1/2	5 1/8	21 7/8	16'-4"	15'-7 3/8"	3	5

*This column provides the total number of support assemblies based on the "L1" dimensions shown. Support assemblies are designed to AISC specifications and do not require bracing. If no movement of the support assembly is preferred, then bracing to the building steel is recommended (not included).

To Determine Hook Coverage: [Bridge Travel on Runway = Runway Length - (2xL8)] by [Hoist Trolley Travel on Bridge = Bridge Length - L3 - L6] (L6 allows for festoon stack-up).

Gorbel® Free Standing Work Station Bridge Crane Kits include: bridge, runways, the appropriate number of support assemblies, hoist trolley, end trucks, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel runway lengths greater than 63' and all aluminum systems), festoon stack-up section, splice joints and hanger brackets. Hoist and anchor bolts provided by others.

Dimensions are for reference only and are subject to change without notice.

FREE STANDING WORK STATION BRIDGE CRANES

BRIDGE LENGTH (L)	RUNWAY LENGTH	TS	MODEL NUMBER	TRACK MAT.	RUNWAY			BRIDGE					SUPPORT STRUCTURE			
					MAX. L1	L7 in	L8 in	H3 in	H3A in	H4 in	L3 in	L6 in	OAW	OAH	D in	SFT*
20'	23'	10'	GLCS-FS-250-20 (S or AL)-23-10	Steel	20'	9	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	19 1/2	21'-4"	11'-5 3/8"	3	2
		10'	AL-FS-250-20-23-10	Alum	20'	13	13 1/4	20	-	10 3/4	7 1/4	27	21'-4"	12'-0 1/2"	3	2
		12'	GLCS-FS-250-20 (S or AL)-23-12	Steel	20'	9	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	19 1/2	21'-4"	13'-5 3/8"	3	2
		12'	AL-FS-250-20-23-12	Alum	20'	13	13 1/4	20	-	10 3/4	7 1/4	27	21'-4"	14'-0 1/2"	3	2
		14'	GLCS-FS-250-20 (S or AL)-23-14	Steel	20'	9	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	19 1/2	21'-4"	15'-5 3/8"	3	2
		14'	AL-FS-250-20-23-14	Alum	20'	13	13 1/4	20	-	10 3/4	7 1/4	27	21'-4"	16'-0 1/2"	3	2
	28'	10'	GLCSL-FS-250-20 (S or AL)-28-10	Steel	25'	9	10 3/4	14 7/8	22 5/8	10 1/2	5 1/8	19 1/2	21'-4"	11'-7 3/8"	3	2
		12'	GLCSL-FS-250-20 (S or AL)-28-12	Steel	25'	9	10 3/4	14 7/8	22 5/8	10 1/2	5 1/8	19 1/2	21'-4"	13'-7 3/8"	3	2
		14'	GLCSL-FS-250-20 (S or AL)-28-14	Steel	25'	9	10 3/4	14 7/8	22 5/8	10 1/2	5 1/8	19 1/2	21'-4"	15'-7 3/8"	3	2
	33'	10'	GLCS-FS-250-20 (S or AL)-33-10	Steel	20'	9	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	19 1/2	21'-4"	11'-5 3/8"	3	3
		10'	AL-FS-250-20-33-10	Alum	20'	19	13 1/4	20	-	10 3/4	7 1/4	27	21'-4"	12'-0 1/2"	3	3
		12'	GLCS-FS-250-20 (S or AL)-33-12	Steel	20'	9	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	19 1/2	21'-4"	13'-5 3/8"	3	3
		12'	AL-FS-250-20-33-12	Alum	20'	19	13 1/4	20	-	10 3/4	7 1/4	27	21'-4"	14'-0 1/2"	3	3
		14'	GLCS-FS-250-20 (S or AL)-33-14	Steel	20'	9	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	19 1/2	21'-4"	15'-5 3/8"	3	3
		14'	AL-FS-250-20-33-14	Alum	20'	19	13 1/4	20	-	10 3/4	7 1/4	27	21'-4"	16'-0 1/2"	3	3
	43'	10'	GLCS-FS-250-20 (S or AL)-43-10	Steel	20'	11	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	19 1/2	21'-4"	11'-5 3/8"	3	3
		10'	AL-FS-250-20-43-10	Alum	20'	26	13 1/4	20	-	10 3/4	7 1/4	27	21'-4"	12'-0 1/2"	3	3
		12'	GLCS-FS-250-20 (S or AL)-43-12	Steel	20'	11	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	19 1/2	21'-4"	13'-5 3/8"	3	3
		12'	AL-FS-250-20-43-12	Alum	20'	26	13 1/4	20	-	10 3/4	7 1/4	27	21'-4"	14'-0 1/2"	3	3
		14'	GLCS-FS-250-20 (S or AL)-43-14	Steel	20'	11	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	19 1/2	21'-4"	15'-5 3/8"	3	3
		14'	AL-FS-250-20-43-14	Alum	20'	26	13 1/4	20	-	10 3/4	7 1/4	27	21'-4"	16'-0 1/2"	3	3
	53'	10'	GLCS-FS-250-20 (S or AL)-53-10	Steel	20'	13	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	19 1/2	21'-4"	11'-5 3/8"	3	4
		10'	AL-FS-250-20-53-10	Alum	20'	30	13 1/4	20	-	10 3/4	7 1/4	27	21'-4"	12'-0 1/2"	3	4
		10'	GLCSL-FS-250-20 (S or AL)-53-10	Steel	25'	13	10 3/4	14 7/8	22 5/8	10 1/2	5 1/8	19 1/2	21'-4"	11'-7 3/8"	3	3
		12'	GLCS-FS-250-20 (S or AL)-53-12	Steel	20'	13	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	19 1/2	21'-4"	13'-5 3/8"	3	4
		12'	AL-FS-250-20-53-12	Alum	20'	30	13 1/4	20	-	10 3/4	7 1/4	27	21'-4"	14'-0 1/2"	3	4
		12'	GLCSL-FS-250-20 (S or AL)-53-12	Steel	25'	13	10 3/4	14 7/8	22 5/8	10 1/2	5 1/8	19 1/2	21'-4"	13'-7 3/8"	3	3
		14'	GLCS-FS-250-20 (S or AL)-53-14	Steel	20'	13	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	19 1/2	21'-4"	15'-5 3/8"	3	4
		14'	AL-FS-250-20-53-14	Alum	20'	30	13 1/4	20	-	10 3/4	7 1/4	27	21'-4"	16'-0 1/2"	3	4
		14'	GLCSL-FS-250-20 (S or AL)-53-14	Steel	25'	13	10 3/4	14 7/8	22 5/8	10 1/2	5 1/8	19 1/2	21'-4"	15'-7 3/8"	3	3
	63'	10'	GLCS-FS-250-20 (S or AL)-63-10	Steel	20'	15	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	19 1/2	21'-4"	11'-5 3/8"	3	4
		10'	AL-FS-250-20-63-10	Alum	20'	36	13 1/4	20	-	10 3/4	7 1/4	27	21'-4"	12'-0 1/2"	3	4
		12'	GLCS-FS-250-20 (S or AL)-63-12	Steel	20'	15	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	19 1/2	21'-4"	13'-5 3/8"	3	4
		12'	AL-FS-250-20-63-12	Alum	20'	36	13 1/4	20	-	10 3/4	7 1/4	27	21'-4"	14'-0 1/2"	3	4
		14'	GLCS-FS-250-20 (S or AL)-63-14	Steel	20'	15	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	19 1/2	21'-4"	15'-5 3/8"	3	4
		14'	AL-FS-250-20-63-14	Alum	20'	36	13 1/4	20	-	10 3/4	7 1/4	27	21'-4"	16'-0 1/2"	3	4
	78'	10'	GLCSL-FS-250-20 (S or AL)-78-10	Steel	25'	46	10 3/4	14 7/8	22 5/8	10 1/2	5 1/8	25 1/4	21'-4"	11'-7 3/8"	3	4
		12'	GLCSL-FS-250-20 (S or AL)-78-12	Steel	25'	46	10 3/4	14 7/8	22 5/8	10 1/2	5 1/8	25 1/4	21'-4"	13'-7 3/8"	3	4
		14'	GLCSL-FS-250-20 (S or AL)-78-14	Steel	25'	46	10 3/4	14 7/8	22 5/8	10 1/2	5 1/8	25 1/4	21'-4"	15'-7 3/8"	3	4
	83'	10'	GLCS-FS-250-20 (S or AL)-83-10	Steel	20'	46	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	25 1/4	21'-4"	11'-5 3/8"	3	5
		10'	AL-FS-250-20-83-10	Alum	20'	46	13 1/4	20	-	10 3/4	7 1/4	27	21'-4"	12'-0 1/2"	3	5
		12'	GLCS-FS-250-20 (S or AL)-83-12	Steel	20'	46	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	25 1/4	21'-4"	13'-5 3/8"	3	5
		12'	AL-FS-250-20-83-12	Alum	20'	46	13 1/4	20	-	10 3/4	7 1/4	27	21'-4"	14'-0 1/2"	3	5
		14'	GLCS-FS-250-20 (S or AL)-83-14	Steel	20'	46	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	25 1/4	21'-4"	15'-5 3/8"	3	5
		14'	AL-FS-250-20-83-14	Alum	20'	46	13 1/4	20	-	10 3/4	7 1/4	27	21'-4"	16'-0 1/2"	3	5
	103'	10'	GLCS-FS-250-20 (S or AL)-103-10	Steel	20'	54	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	25 1/4	21'-4"	11'-5 3/8"	3	6
		10'	AL-FS-250-20-103-10	Alum	20'	54	13 1/4	20	-	10 3/4	7 1/4	27	21'-4"	12'-0 1/2"	3	6
		10'	GLCSL-FS-250-20 (S or AL)-103-10	Steel	25'	54	10 3/4	14 7/8	22 5/8	10 1/2	5 1/8	25 1/4	21'-4"	11'-7 3/8"	3	5
		12'	GLCS-FS-250-20 (S or AL)-103-12	Steel	20'	54	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	25 1/4	21'-4"	13'-5 3/8"	3	6
		12'	AL-FS-250-20-103-12	Alum	20'	54	13 1/4	20	-	10 3/4	7 1/4	27	21'-4"	14'-0 1/2"	3	6
		12'	GLCSL-FS-250-20 (S or AL)-103-12	Steel	25'	54	10 3/4	14 7/8	22 5/8	10 1/2	5 1/8	25 1/4	21'-4"	13'-7 3/8"	3	5
		14'	GLCS-FS-250-20 (S or AL)-103-14	Steel	20'	54	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	25 1/4	21'-4"	15'-5 3/8"	3	6
		14'	AL-FS-250-20-103-14	Alum	20'	54	13 1/4	20	-	10 3/4	7 1/4	27	21'-4"	16'-0 1/2"	3	6
		14'	GLCSL-FS-250-20 (S or AL)-103-14	Steel	25'	54	10 3/4	14 7/8	22 5/8	10 1/2	5 1/8	25 1/4	21'-4"	15'-7 3/8"	3	5

*This column provides the total number of support assemblies based on the "L1" dimensions shown. Support assemblies are designed to AISC specifications and do not require bracing. If no movement of the support assembly is preferred, then bracing to the building steel is recommended (not included).

To Determine Hook Coverage: [Bridge Travel on Runway = Runway Length - (2xL8)] by [Hoist Trolley Travel on Bridge = Bridge Length - L3 - L6] (L6 allows for festoon stack-up).

Gorbel® Free Standing Work Station Bridge Crane Kits include: bridge, runways, the appropriate number of support assemblies, hoist trolley, end trucks, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel runway lengths greater than 63' and all aluminum systems), festoon stack-up section, splice joints and hanger brackets. Hoist and anchor bolts provided by others.

Dimensions are for reference only and are subject to change without notice.

250# CAPACITY

FREE STANDING WORK STATION BRIDGE CRANES

BRIDGE LENGTH (L)	RUNWAY LENGTH	TS	MODEL NUMBER	TRACK MAT.	RUNWAY			BRIDGE					SUPPORT STRUCTURE			
					MAX. L1	L7 in	L8 in	H3 in	H3A in	H4 in	L3 in	L6 in	OAW	OAH	D in	SPT*
23'	23'	10'	GLCS-FS-250-23 (S or AL)-23-10	Steel	20'	9	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	19 1/2	24'-4"	11'-5 3/8"	3	2
		10'	AL-FS-250-23-23-10	Alum	20'	13	13 1/4	20	-	10 3/4	7 1/4	30 3/8	24'-4"	12'-0 1/2"	3	2
		12'	GLCS-FS-250-23 (S or AL)-23-12	Steel	20'	9	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	19 1/2	24'-4"	13'-5 3/8"	3	2
		12'	AL-FS-250-23-23-12	Alum	20'	13	13 1/4	20	-	10 3/4	7 1/4	30 3/8	24'-4"	14'-0 1/2"	3	2
		14'	GLCS-FS-250-23 (S or AL)-23-14	Steel	20'	9	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	19 1/2	24'-4"	15'-5 3/8"	3	2
		14'	AL-FS-250-23-23-14	Alum	20'	13	13 1/4	20	-	10 3/4	7 1/4	30 3/8	24'-4"	16'-0 1/2"	3	2
	28'	10'	GLCSL-FS-250-23 (S or AL)-28-10	Steel	25'	9	10 3/4	14 7/8	22 5/8	10 1/2	5 1/8	19 1/2	24'-4"	11'-7 3/8"	3	2
		12'	GLCSL-FS-250-23 (S or AL)-28-12	Steel	25'	9	10 3/4	14 7/8	22 5/8	10 1/2	5 1/8	19 1/2	24'-4"	13'-7 3/8"	3	2
		14'	GLCSL-FS-250-23 (S or AL)-28-14	Steel	25'	9	10 3/4	14 7/8	22 5/8	10 1/2	5 1/8	19 1/2	24'-4"	15'-7 3/8"	3	2
	33'	10'	GLCS-FS-250-23 (S or AL)-33-10	Steel	20'	9	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	19 1/2	24'-4"	11'-5 3/8"	3	3
		10'	AL-FS-250-23-33-10	Alum	20'	19	13 1/4	20	-	10 3/4	7 1/4	30 3/8	24'-4"	12'-0 1/2"	3	3
		12'	GLCS-FS-250-23 (S or AL)-33-12	Steel	20'	9	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	19 1/2	24'-4"	13'-5 3/8"	3	3
		12'	AL-FS-250-23-33-12	Alum	20'	19	13 1/4	20	-	10 3/4	7 1/4	30 3/8	24'-4"	14'-0 1/2"	3	3
		14'	GLCS-FS-250-23 (S or AL)-33-14	Steel	20'	9	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	19 1/2	24'-4"	15'-5 3/8"	3	3
		14'	AL-FS-250-23-33-14	Alum	20'	19	13 1/4	20	-	10 3/4	7 1/4	30 3/8	24'-4"	16'-0 1/2"	3	3
	43'	10'	GLCS-FS-250-23 (S or AL)-43-10	Steel	20'	11	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	19 1/2	24'-4"	11'-5 3/8"	3	3
		10'	AL-FS-250-23-43-10	Alum	20'	26	13 1/4	20	-	10 3/4	7 1/4	30 3/8	24'-4"	12'-0 1/2"	3	3
		12'	GLCS-FS-250-23 (S or AL)-43-12	Steel	20'	11	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	19 1/2	24'-4"	13'-5 3/8"	3	3
		12'	AL-FS-250-23-43-12	Alum	20'	26	13 1/4	20	-	10 3/4	7 1/4	30 3/8	24'-4"	14'-0 1/2"	3	3
		14'	GLCS-FS-250-23 (S or AL)-43-14	Steel	20'	11	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	19 1/2	24'-4"	15'-5 3/8"	3	3
		14'	AL-FS-250-23-43-14	Alum	20'	26	13 1/4	20	-	10 3/4	7 1/4	30 3/8	24'-4"	16'-0 1/2"	3	3
	53'	10'	GLCS-FS-250-23 (S or AL)-53-10	Steel	20'	13	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	19 1/2	24'-4"	11'-5 3/8"	3	4
		10'	AL-FS-250-23-53-10	Alum	20'	30	13 1/4	20	-	10 3/4	7 1/4	30 3/8	24'-4"	12'-0 1/2"	3	4
		10'	GLCSL-FS-250-23 (S or AL)-53-10	Steel	25'	13	10 3/4	14 7/8	22 5/8	10 1/2	5 1/8	19 1/2	24'-4"	11'-7 3/8"	3	3
		12'	GLCS-FS-250-23 (S or AL)-53-12	Steel	20'	13	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	19 1/2	24'-4"	13'-5 3/8"	3	4
		12'	AL-FS-250-23-53-12	Alum	20'	30	13 1/4	20	-	10 3/4	7 1/4	30 3/8	24'-4"	14'-0 1/2"	3	4
		12'	GLCSL-FS-250-23 (S or AL)-53-12	Steel	25'	13	10 3/4	14 7/8	22 5/8	10 1/2	5 1/8	19 1/2	24'-4"	13'-7 3/8"	3	3
		14'	GLCS-FS-250-23 (S or AL)-53-14	Steel	20'	13	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	19 1/2	24'-4"	15'-5 3/8"	3	4
		14'	AL-FS-250-23-53-14	Alum	20'	30	13 1/4	20	-	10 3/4	7 1/4	30 3/8	24'-4"	16'-0 1/2"	3	4
	63'	10'	GLCS-FS-250-23 (S or AL)-63-10	Steel	20'	15	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	19 1/2	24'-4"	11'-5 3/8"	3	4
		10'	AL-FS-250-23-63-10	Alum	20'	36	13 1/4	20	-	10 3/4	7 1/4	30 3/8	24'-4"	12'-0 1/2"	3	4
		12'	GLCS-FS-250-23 (S or AL)-63-12	Steel	20'	15	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	19 1/2	24'-4"	13'-5 3/8"	3	4
		12'	AL-FS-250-23-63-12	Alum	20'	36	13 1/4	20	-	10 3/4	7 1/4	30 3/8	24'-4"	14'-0 1/2"	3	4
		14'	GLCS-FS-250-23 (S or AL)-63-14	Steel	20'	15	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	19 1/2	24'-4"	15'-5 3/8"	3	4
		14'	AL-FS-250-23-63-14	Alum	20'	36	13 1/4	20	-	10 3/4	7 1/4	30 3/8	24'-4"	16'-0 1/2"	3	4
	78'	10'	GLCSL-FS-250-23 (S or AL)-78-10	Steel	25'	46	10 3/4	14 7/8	22 5/8	10 1/2	5 1/8	30 3/8	24'-4"	11'-7 3/8"	3	4
		12'	GLCSL-FS-250-23 (S or AL)-78-12	Steel	25'	46	10 3/4	14 7/8	22 5/8	10 1/2	5 1/8	30 3/8	24'-4"	13'-7 3/8"	3	4
		14'	GLCSL-FS-250-23 (S or AL)-78-14	Steel	25'	46	10 3/4	14 7/8	22 5/8	10 1/2	5 1/8	30 3/8	24'-4"	15'-7 3/8"	3	4
	83'	10'	GLCS-FS-250-23 (S or AL)-83-10	Steel	20'	46	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	30 3/8	24'-4"	11'-5 3/8"	3	5
		10'	AL-FS-250-23-83-10	Alum	20'	46	13 1/4	20	-	10 3/4	7 1/4	30 3/8	24'-4"	12'-0 1/2"	3	5
		12'	GLCS-FS-250-23 (S or AL)-83-12	Steel	20'	46	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	30 3/8	24'-4"	13'-5 3/8"	3	5
		12'	AL-FS-250-23-83-12	Alum	20'	46	13 1/4	20	-	10 3/4	7 1/4	30 3/8	24'-4"	14'-0 1/2"	3	5
		14'	GLCS-FS-250-23 (S or AL)-83-14	Steel	20'	46	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	30 3/8	24'-4"	15'-5 3/8"	3	5
		14'	AL-FS-250-23-83-14	Alum	20'	46	13 1/4	20	-	10 3/4	7 1/4	30 3/8	24'-4"	16'-0 1/2"	3	5
	103'	10'	GLCS-FS-250-23 (S or AL)-103-10	Steel	20'	54	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	30 3/8	24'-4"	11'-5 3/8"	3	6
		10'	AL-FS-250-23-103-10	Alum	20'	54	13 1/4	20	-	10 3/4	7 1/4	30 3/8	24'-4"	12'-0 1/2"	3	6
		10'	GLCSL-FS-250-23 (S or AL)-103-10	Steel	25'	54	10 3/4	14 7/8	22 5/8	10 1/2	5 1/8	30 3/8	24'-4"	11'-7 3/8"	3	5
		12'	GLCS-FS-250-23 (S or AL)-103-12	Steel	20'	54	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	30 3/8	24'-4"	13'-5 3/8"	3	6
		12'	AL-FS-250-23-103-12	Alum	20'	54	13 1/4	20	-	10 3/4	7 1/4	30 3/8	24'-4"	14'-0 1/2"	3	6
		12'	GLCSL-FS-250-23 (S or AL)-103-12	Steel	25'	54	10 3/4	14 7/8	22 5/8	10 1/2	5 1/8	30 3/8	24'-4"	13'-7 3/8"	3	5
		14'	GLCS-FS-250-23 (S or AL)-103-14	Steel	20'	54	10 3/4	12 7/8	20 5/8	10 1/2	5 1/8	30 3/8	24'-4"	15'-5 3/8"	3	6
		14'	AL-FS-250-23-103-14	Alum	20'	54	13 1/4	20	-	10 3/4	7 1/4	30 3/8	24'-4"	16'-0 1/2"	3	6
		14'	GLCSL-FS-250-23 (S or AL)-103-14	Steel	25'	54	10 3/4	14 7/8	22 5/8	10 1/2	5 1/8	30 3/8	24'-4"	15'-7 3/8"	3	5

*This column provides the total number of support assemblies based on the "L1" dimensions shown. Support assemblies are designed to AISC specifications and do not require bracing. If no movement of the support assembly is preferred, then bracing to the building steel is recommended (not included).

To Determine Hook Coverage: [Bridge Travel on Runway = Runway Length - (2xL8)] by [Hoist Trolley Travel on Bridge = Bridge Length - L3 - L6] (L6 allows for festoon stack-up).

Gorbel® Free Standing Work Station Bridge Crane Kits include: bridge, runways, the appropriate number of support assemblies, hoist trolley, end trucks, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel runway lengths greater than 63' and all aluminum systems), festoon stack-up section, splice joints and hanger brackets. Hoist and anchor bolts provided by others.

Dimensions are for reference only and are subject to change without notice.

FREE STANDING WORK STATION BRIDGE CRANES

BRIDGE LENGTH (L)	RUNWAY LENGTH	TS	MODEL NUMBER	TRACK MAT.	RUNWAY			BRIDGE					SUPPORT STRUCTURE			
					MAX. L1	L7 in	L8 in	H3 in	H3A in	H4 in	L3 in	L6 in	OAW	OAH	D in	SFT*
28'	23'	10'	GLCS-FS-250-28 (S or AL)-23-10	Steel	20'	9	21 3/4	15 1/4	25 1/4	12 1/2	5 1/8	28 1/2	29'-4"	11'-8 3/4"	3	2
		10'	AL-FS-250-28-23-10	Alum	20'	13	23 3/8	24 3/8	-	12 5/8	7 1/4	37 1/8	29'-4"	12'-5 7/8"	3	2
		12'	GLCS-FS-250-28 (S or AL)-23-12	Steel	20'	9	21 3/4	15 1/4	25 1/4	12 1/2	5 1/8	28 1/2	29'-4"	13'-8 3/4"	3	2
		12'	AL-FS-250-28-23-12	Alum	20'	13	23 3/8	24 3/8	-	12 5/8	7 1/4	37 1/8	29'-4"	14'-5 7/8"	3	2
		14'	GLCS-FS-250-28 (S or AL)-23-14	Steel	20'	9	21 3/4	15 1/4	25 1/4	12 1/2	5 1/8	28 1/2	29'-4"	15'-8 3/4"	3	2
		14'	AL-FS-250-28-23-14	Alum	20'	13	23 3/8	24 3/8	-	12 5/8	7 1/4	37 1/8	29'-4"	16'-5 7/8"	3	2
	28'	10'	GLCSL-FS-250-28 (S or AL)-28-10	Steel	25'	9	21 3/4	17 1/4	27 1/4	12 1/2	5 1/8	28 1/2	29'-4"	11'-10 3/4"	3	2
		12'	GLCSL-FS-250-28 (S or AL)-28-12	Steel	25'	9	21 3/4	17 1/4	27 1/4	12 1/2	5 1/8	28 1/2	29'-4"	13'-10 3/4"	3	2
		14'	GLCSL-FS-250-28 (S or AL)-28-14	Steel	25'	9	21 3/4	17 1/4	27 1/4	12 1/2	5 1/8	28 1/2	29'-4"	15'-10 3/4"	3	2
	33'	10'	GLCS-FS-250-28 (S or AL)-33-10	Steel	20'	9	21 3/4	15 1/4	25 1/4	12 1/2	5 1/8	28 1/2	29'-4"	11'-8 3/4"	3	3
		10'	AL-FS-250-28-33-10	Alum	20'	19	23 3/8	24 3/8	-	12 5/8	7 1/4	37 1/8	29'-4"	12'-5 7/8"	3	3
		12'	GLCS-FS-250-28 (S or AL)-33-12	Steel	20'	9	21 3/4	15 1/4	25 1/4	12 1/2	5 1/8	28 1/2	29'-4"	13'-8 3/4"	3	3
		12'	AL-FS-250-28-33-12	Alum	20'	19	23 3/8	24 3/8	-	12 5/8	7 1/4	37 1/8	29'-4"	14'-5 7/8"	3	3
		14'	GLCS-FS-250-28 (S or AL)-33-14	Steel	20'	9	21 3/4	15 1/4	25 1/4	12 1/2	5 1/8	28 1/2	29'-4"	15'-8 3/4"	3	3
		14'	AL-FS-250-28-33-14	Alum	20'	19	23 3/8	24 3/8	-	12 5/8	7 1/4	37 1/8	29'-4"	16'-5 7/8"	3	3
	43'	10'	GLCS-FS-250-28 (S or AL)-43-10	Steel	20'	11	21 3/4	15 1/4	25 1/4	12 1/2	5 1/8	28 1/2	29'-4"	11'-8 3/4"	3	3
		10'	AL-FS-250-28-43-10	Alum	20'	26	23 3/8	24 3/8	-	12 5/8	7 1/4	37 1/8	29'-4"	12'-5 7/8"	3	3
		12'	GLCS-FS-250-28 (S or AL)-43-12	Steel	20'	11	21 3/4	15 1/4	25 1/4	12 1/2	5 1/8	28 1/2	29'-4"	13'-8 3/4"	3	3
		12'	AL-FS-250-28-43-12	Alum	20'	26	23 3/8	24 3/8	-	12 5/8	7 1/4	37 1/8	29'-4"	14'-5 7/8"	3	3
		14'	GLCS-FS-250-28 (S or AL)-43-14	Steel	20'	11	21 3/4	15 1/4	25 1/4	12 1/2	5 1/8	28 1/2	29'-4"	15'-8 3/4"	3	3
		14'	AL-FS-250-28-43-14	Alum	20'	26	23 3/8	24 3/8	-	12 5/8	7 1/4	37 1/8	29'-4"	16'-5 7/8"	3	3
	53'	10'	GLCS-FS-250-28 (S or AL)-53-10	Steel	20'	13	21 3/4	15 1/4	25 1/4	12 1/2	5 1/8	28 1/2	29'-4"	11'-8 3/4"	3	4
		10'	AL-FS-250-28-53-10	Alum	20'	30	23 3/8	24 3/8	-	12 5/8	7 1/4	37 1/8	29'-4"	12'-5 7/8"	3	4
		10'	GLCSL-FS-250-28 (S or AL)-53-10	Steel	25'	13	21 3/4	17 1/4	27 1/4	12 1/2	5 1/8	28 1/2	29'-4"	11'-10 3/4"	3	3
		12'	GLCS-FS-250-28 (S or AL)-53-12	Steel	20'	13	21 3/4	15 1/4	25 1/4	12 1/2	5 1/8	28 1/2	29'-4"	13'-8 3/4"	3	4
		12'	AL-FS-250-28-53-12	Alum	20'	30	23 3/8	24 3/8	-	12 5/8	7 1/4	37 1/8	29'-4"	14'-5 7/8"	3	4
		12'	GLCSL-FS-250-28 (S or AL)-53-12	Steel	25'	13	21 3/4	17 1/4	27 1/4	12 1/2	5 1/8	28 1/2	29'-4"	13'-10 3/4"	3	3
		14'	GLCS-FS-250-28 (S or AL)-53-14	Steel	20'	13	21 3/4	15 1/4	25 1/4	12 1/2	5 1/8	28 1/2	29'-4"	15'-8 3/4"	3	4
		14'	AL-FS-250-28-53-14	Alum	20'	30	23 3/8	24 3/8	-	12 5/8	7 1/4	37 1/8	29'-4"	16'-5 7/8"	3	4
	63'	10'	GLCSL-FS-250-28 (S or AL)-53-14	Steel	25'	13	21 3/4	17 1/4	27 1/4	12 1/2	5 1/8	28 1/2	29'-4"	15'-10 3/4"	3	3
		10'	GLCS-FS-250-28 (S or AL)-63-10	Steel	20'	15	21 3/4	15 1/4	25 1/4	12 1/2	5 1/8	35 3/8	29'-4"	11'-8 3/4"	3	4
		10'	AL-FS-250-28-63-10	Alum	20'	36	23 3/8	24 3/8	-	12 5/8	7 1/4	37 1/8	29'-4"	12'-5 7/8"	3	4
		12'	GLCS-FS-250-28 (S or AL)-63-12	Steel	20'	15	21 3/4	15 1/4	25 1/4	12 1/2	5 1/8	35 3/8	29'-4"	13'-8 3/4"	3	4
		12'	AL-FS-250-28-63-12	Alum	20'	36	23 3/8	24 3/8	-	12 5/8	7 1/4	37 1/8	29'-4"	14'-5 7/8"	3	4
		14'	GLCS-FS-250-28 (S or AL)-63-14	Steel	20'	15	21 3/4	15 1/4	25 1/4	12 1/2	5 1/8	35 3/8	29'-4"	15'-8 3/4"	3	4
	78'	10'	AL-FS-250-28-63-14	Alum	20'	36	23 3/8	24 3/8	-	12 5/8	7 1/4	37 1/8	29'-4"	16'-5 7/8"	3	4
		10'	GLCSL-FS-250-28 (S or AL)-78-10	Steel	25'	46	21 3/4	17 1/4	27 1/4	12 1/2	5 1/8	35 3/8	29'-4"	11'-10 3/4"	3	4
		12'	GLCSL-FS-250-28 (S or AL)-78-12	Steel	25'	46	21 3/4	17 1/4	27 1/4	12 1/2	5 1/8	35 3/8	29'-4"	13'-10 3/4"	3	4
		14'	GLCSL-FS-250-28 (S or AL)-78-14	Steel	25'	46	21 3/4	17 1/4	27 1/4	12 1/2	5 1/8	35 3/8	29'-4"	15'-10 3/4"	3	4
	83'	10'	GLCS-FS-250-28 (S or AL)-83-10	Steel	20'	46	21 3/4	15 1/4	25 1/4	12 1/2	5 1/8	35 3/8	29'-4"	11'-8 3/4"	3	5
		10'	AL-FS-250-28-83-10	Alum	20'	46	23 3/8	24 3/8	-	12 5/8	7 1/4	37 1/8	29'-4"	12'-5 7/8"	3	5
		12'	GLCS-FS-250-28 (S or AL)-83-12	Steel	20'	46	21 3/4	15 1/4	25 1/4	12 1/2	5 1/8	35 3/8	29'-4"	13'-8 3/4"	3	5
		12'	AL-FS-250-28-83-12	Alum	20'	46	23 3/8	24 3/8	-	12 5/8	7 1/4	37 1/8	29'-4"	14'-5 7/8"	3	5
		14'	GLCS-FS-250-28 (S or AL)-83-14	Steel	20'	46	21 3/4	15 1/4	25 1/4	12 1/2	5 1/8	35 3/8	29'-4"	15'-8 3/4"	3	5
		14'	AL-FS-250-28-83-14	Alum	20'	46	23 3/8	24 3/8	-	12 5/8	7 1/4	37 1/8	29'-4"	16'-5 7/8"	3	5
	103'	10'	GLCS-FS-250-28 (S or AL)-103-10	Steel	20'	54	21 3/4	15 1/4	25 1/4	12 1/2	5 1/8	35 3/8	29'-4"	11'-8 3/4"	3	6
		10'	AL-FS-250-28-103-10	Alum	20'	54	23 3/8	24 3/8	-	12 5/8	7 1/4	37 1/8	29'-4"	12'-5 7/8"	3	6
		10'	GLCSL-FS-250-28 (S or AL)-103-10	Steel	25'	54	21 3/4	17 1/4	27 1/4	12 1/2	5 1/8	35 3/8	29'-4"	11'-10 3/4"	3	5
		12'	GLCS-FS-250-28 (S or AL)-103-12	Steel	20'	54	21 3/4	15 1/4	25 1/4	12 1/2	5 1/8	35 3/8	29'-4"	13'-8 3/4"	3	6
		12'	AL-FS-250-28-103-12	Alum	20'	54	23 3/8	24 3/8	-	12 5/8	7 1/4	37 1/8	29'-4"	14'-5 7/8"	3	6
		12'	GLCSL-FS-250-28 (S or AL)-103-12	Steel	25'	54	21 3/4	17 1/4	27 1/4	12 1/2	5 1/8	35 3/8	29'-4"	13'-10 3/4"	3	5
		14'	GLCS-FS-250-28 (S or AL)-103-14	Steel	20'	54	21 3/4	15 1/4	25 1/4	12 1/2	5 1/8	35 3/8	29'-4"	15'-8 3/4"	3	6
		14'	AL-FS-250-28-103-14	Alum	20'	54	23 3/8	24 3/8	-	12 5/8	7 1/4	37 1/8	29'-4"	16'-5 7/8"	3	6
		14'	GLCSL-FS-250-28 (S or AL)-103-14	Steel	25'	54	21 3/4	17 1/4	27 1/4	12 1/2	5 1/8	35 3/8	29'-4"	15'-10 3/4"	3	5

*This column provides the total number of support assemblies based on the "L1" dimensions shown. Support assemblies are designed to AISC specifications and do not require bracing. If no movement of the support assembly is preferred, then bracing to the building steel is recommended (not included).

To Determine Hook Coverage: [Bridge Travel on Runway = Runway Length - (2xL8)] by [Hoist Trolley Travel on Bridge = Bridge Length - L3 - L6] (L6 allows for festoon stack-up).

Gorbel® Free Standing Work Station Bridge Crane Kits include: bridge, runways, the appropriate number of support assemblies, hoist trolley, end trucks, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel runway lengths greater than 63' and all aluminum systems), festoon stack-up section, splice joints and hanger brackets. Hoist and anchor bolts provided by others.

Dimensions are for reference only and are subject to change without notice.

500# CAPACITY

FREE STANDING WORK STATION BRIDGE CRANES

FREE STANDING WORK
STATION CRANES

BRIDGE LENGTH (L)	RUNWAY LENGTH	TS	MODEL NUMBER	TRACK MAT.	RUNWAY			BRIDGE					SUPPORT STRUCTURE			
					MAX. L1	L7 in	L8 in	H3 in	H3A in	H4 in	L3 in	L6 in	OAW	OAH	D in	#ds
10'	11'-6"	10'	GLCS-FS-500-10 (S or AL)-11.5-10	Steel	20'	9	13 1/8	16 1/2	24	6 5/8	7 1/8	10 1/2	11'-4"	11'-9"	3	2
		12'	GLCS-FS-500-10 (S or AL)-11.5-12	Steel	20'	9	13 1/8	16 1/2	24	6 5/8	7 1/8	10 1/2	11'-6"	13'-9"	4	2
		14'	GLCS-FS-500-10 (S or AL)-11.5-14	Steel	20'	9	13 1/8	16 1/2	24	6 5/8	7 1/8	10 1/2	11'-6"	15'-9"	4	2
	23'	10'	GLCS-FS-500-10 (S or AL)-23-10	Steel	20'	9	13 1/8	16 1/2	24	6 5/8	7 1/8	10 1/2	11'-4"	11'-9"	3	2
		10'	AL-FS-500-10-23-10	Alum	20'	13	13 1/4	23 7/8	-	12 5/8	7 1/4	16 7/8	11'-4"	12'-4 3/8"	3	2
		12'	GLCS-FS-500-10 (S or AL)-23-12	Steel	20'	9	13 1/8	16 1/2	24	6 5/8	7 1/8	10 1/2	11'-6"	13'-9"	4	2
		12'	AL-FS-500-10-23-12	Alum	20'	13	13 1/4	23 7/8	-	12 5/8	7 1/4	16 7/8	11'-6"	14'-4 3/8"	4	2
		14'	GLCS-FS-500-10 (S or AL)-23-14	Steel	20'	9	13 1/8	16 1/2	24	6 5/8	7 1/8	10 1/2	11'-6"	15'-9"	4	2
		14'	AL-FS-500-10-23-14	Alum	20'	13	13 1/4	23 7/8	-	12 5/8	7 1/4	16 7/8	11'-6"	16'-4 3/8"	4	2
	28'	10'	GLCSL-FS-500-10 (S or AL)-28-10	Steel	25'	9	13 1/8	18 7/8	26 3/8	6 5/8	7 1/8	10 1/2	11'-4"	11'-11 3/8"	3	2
		12'	GLCSL-FS-500-10 (S or AL)-28-12	Steel	25'	9	13 1/8	18 7/8	26 3/8	6 5/8	7 1/8	10 1/2	11'-6"	13'-11 3/8"	4	2
		14'	GLCSL-FS-500-10 (S or AL)-28-14	Steel	25'	9	13 1/8	18 7/8	26 3/8	6 5/8	7 1/8	10 1/2	11'-6"	15'-11 3/8"	4	2
	33'	10'	GLCS-FS-500-10 (S or AL)-33-10	Steel	20'	9	13 1/8	16 1/2	24	6 5/8	7 1/8	10 1/2	11'-4"	11'-9"	3	3
		10'	AL-FS-500-10-33-10	Alum	20'	19	13 1/4	23 7/8	-	12 5/8	7 1/4	16 7/8	11'-4"	12'-4 3/8"	3	3
		12'	GLCS-FS-500-10 (S or AL)-33-12	Steel	20'	9	13 1/8	16 1/2	24	6 5/8	7 1/8	10 1/2	11'-6"	13'-9"	4	3
		12'	AL-FS-500-10-33-12	Alum	20'	19	13 1/4	23 7/8	-	12 5/8	7 1/4	16 7/8	11'-6"	14'-4 3/8"	4	3
		14'	GLCS-FS-500-10 (S or AL)-33-14	Steel	20'	9	13 1/8	16 1/2	24	6 5/8	7 1/8	10 1/2	11'-6"	15'-9"	4	3
		14'	AL-FS-500-10-33-14	Alum	20'	19	13 1/4	23 7/8	-	12 5/8	7 1/4	16 7/8	11'-6"	16'-4 3/8"	4	3
	34'	10'	GLCSLX-FS-500-10 (S or AL)-34-10	Steel	30'	9	13 1/8	20 7/8	28 3/8	6 5/8	7 1/8	10 1/2	11'-4"	12'-1 3/8"	3	2
		12'	GLCSLX-FS-500-10 (S or AL)-34-12	Steel	30'	9	13 1/8	20 7/8	28 3/8	6 5/8	7 1/8	10 1/2	11'-6"	14'-1 3/8"	4	2
		14'	GLCSLX-FS-500-10 (S or AL)-34-14	Steel	30'	9	13 1/8	20 7/8	28 3/8	6 5/8	7 1/8	10 1/2	11'-6"	16'-1 3/8"	4	2
	43'	10'	GLCS-FS-500-10 (S or AL)-43-10	Steel	20'	11	13 1/8	16 1/2	24	6 5/8	7 1/8	10 1/2	11'-4"	11'-9"	3	3
		10'	AL-FS-500-10-43-10	Alum	20'	26	13 1/4	23 7/8	-	12 5/8	7 1/4	16 7/8	11'-4"	12'-4 3/8"	3	3
		12'	GLCS-FS-500-10 (S or AL)-43-12	Steel	20'	11	13 1/8	16 1/2	24	6 5/8	7 1/8	10 1/2	11'-6"	13'-9"	4	3
		12'	AL-FS-500-10-43-12	Alum	20'	26	13 1/4	23 7/8	-	12 5/8	7 1/4	16 7/8	11'-6"	14'-4 3/8"	4	3
		14'	GLCS-FS-500-10 (S or AL)-43-14	Steel	20'	11	13 1/8	16 1/2	24	6 5/8	7 1/8	10 1/2	11'-6"	15'-9"	4	3
		14'	AL-FS-500-10-43-14	Alum	20'	26	13 1/4	23 7/8	-	12 5/8	7 1/4	16 7/8	11'-6"	16'-4 3/8"	4	3
	53'	10'	GLCS-FS-500-10 (S or AL)-53-10	Steel	20'	13	13 1/8	16 1/2	24	6 5/8	7 1/8	10 1/2	11'-4"	11'-9"	3	4
		10'	AL-FS-500-10-53-10	Alum	20'	30	13 1/4	23 7/8	-	12 5/8	7 1/4	16 7/8	11'-4"	12'-4 3/8"	3	4
		10'	GLCSL-FS-500-10 (S or AL)-53-10	Steel	25'	13	13 1/8	18 7/8	26 3/8	6 5/8	7 1/8	10 1/2	11'-4"	11'-11 3/8"	3	3
		12'	GLCS-FS-500-10 (S or AL)-53-12	Steel	20'	13	13 1/8	16 1/2	24	6 5/8	7 1/8	10 1/2	11'-6"	13'-9"	4	4
		12'	AL-FS-500-10-53-12	Alum	20'	30	13 1/4	23 7/8	-	12 5/8	7 1/4	16 7/8	11'-6"	14'-4 3/8"	4	4
		12'	GLCSL-FS-500-10 (S or AL)-53-12	Steel	25'	13	13 1/8	18 7/8	26 3/8	6 5/8	7 1/8	10 1/2	11'-6"	13'-11 3/8"	4	3
		14'	GLCS-FS-500-10 (S or AL)-53-14	Steel	20'	13	13 1/8	16 1/2	24	6 5/8	7 1/8	10 1/2	11'-6"	15'-9"	4	4
		14'	AL-FS-500-10-53-14	Alum	20'	30	13 1/4	23 7/8	-	12 5/8	7 1/4	16 7/8	11'-6"	16'-4 3/8"	4	4
		14'	GLCSL-FS-500-10 (S or AL)-53-14	Steel	25'	13	13 1/8	18 7/8	26 3/8	6 5/8	7 1/8	10 1/2	11'-6"	15'-11 3/8"	4	3
	63'	10'	GLCS-FS-500-10 (S or AL)-63-10	Steel	20'	15	13 1/8	16 1/2	24	6 5/8	7 1/8	10 1/2	11'-4"	11'-9"	3	4
		10'	AL-FS-500-10-63-10	Alum	20'	36	13 1/4	23 7/8	-	12 5/8	7 1/4	16 7/8	11'-4"	12'-4 3/8"	3	4
		12'	GLCS-FS-500-10 (S or AL)-63-12	Steel	20'	15	13 1/8	16 1/2	24	6 5/8	7 1/8	10 1/2	11'-6"	13'-9"	4	4
		12'	AL-FS-500-10-63-12	Alum	20'	36	13 1/4	23 7/8	-	12 5/8	7 1/4	16 7/8	11'-6"	14'-4 3/8"	4	4
		14'	GLCS-FS-500-10 (S or AL)-63-14	Steel	20'	15	13 1/8	16 1/2	24	6 5/8	7 1/8	10 1/2	11'-6"	15'-9"	4	4
	64'	10'	AL-FS-500-10-63-14	Alum	20'	36	13 1/4	23 7/8	-	12 5/8	7 1/4	16 7/8	11'-6"	16'-4 3/8"	4	4
		12'	GLCSLX-FS-500-10 (S or AL)-64-10	Steel	30'	36	13 1/8	20 7/8	28 3/8	6 5/8	7 1/8	16 7/8	11'-4"	12'-1 3/8"	3	3
		12'	GLCSLX-FS-500-10 (S or AL)-64-12	Steel	30'	36	13 1/8	20 7/8	28 3/8	6 5/8	7 1/8	16 7/8	11'-6"	14'-1 3/8"	4	3
	78'	10'	GLCSLX-FS-500-10 (S or AL)-64-14	Steel	30'	36	13 1/8	20 7/8	28 3/8	6 5/8	7 1/8	16 7/8	11'-6"	16'-1 3/8"	4	3
		12'	GLCSL-FS-500-10 (S or AL)-78-10	Steel	25'	46	13 1/8	18 7/8	26 3/8	6 5/8	7 1/8	16 7/8	11'-4"	11'-11 3/8"	3	4
		12'	GLCSL-FS-500-10 (S or AL)-78-12	Steel	25'	46	13 1/8	18 7/8	26 3/8	6 5/8	7 1/8	16 7/8	11'-6"	13'-11 3/8"	4	4
	83'	10'	GLCSL-FS-500-10 (S or AL)-78-14	Steel	25'	46	13 1/8	18 7/8	26 3/8	6 5/8	7 1/8	16 7/8	11'-6"	15'-11 3/8"	4	4
		10'	GLCS-FS-500-10 (S or AL)-83-10	Steel	20'	46	13 1/8	16 1/2	24	6 5/8	7 1/8	16 7/8	11'-4"	11'-9"	3	5
		10'	AL-FS-500-10-83-10	Alum	20'	46	13 1/4	23 7/8	-	12 5/8	7 1/4	16 7/8	11'-4"	12'-4 3/8"	3	5
	94'	12'	GLCS-FS-500-10 (S or AL)-83-12	Steel	20'	46	13 1/8	16 1/2	24	6 5/8	7 1/8	16 7/8	11'-6"	13'-9"	4	5
		12'	AL-FS-500-10-83-12	Alum	20'	46	13 1/4	23 7/8	-	12 5/8	7 1/4	16 7/8	11'-6"	14'-4 3/8"	4	5
		14'	GLCS-FS-500-10 (S or AL)-83-14	Steel	20'	46	13 1/8	16 1/2	24	6 5/8	7 1/8	16 7/8	11'-6"	15'-9"	4	5
		14'	AL-FS-500-10-83-14	Alum	20'	46	13 1/4	23 7/8	-	12 5/8	7 1/4	16 7/8	11'-6"	16'-4 3/8"	4	5
		10'	GLCSLX-FS-500-10 (S or AL)-94-10	Steel	30'	53	13 1/8	20 7/8	28 3/8	6 5/8	7 1/8	16 7/8	11'-4"	12'-1 3/8"	3	4
		12'	GLCSLX-FS-500-10 (S or AL)-94-12	Steel	30'	53	13 1/8	20 7/8	28 3/8	6 5/8	7 1/8	16 7/8	11'-6"	14'-1 3/8"	4	4
	103'	14'	GLCSLX-FS-500-10 (S or AL)-94-14	Steel	30'	53	13 1/8	20 7/8	28 3/8	6 5/8	7 1/8	16 7/8	11'-6"	16'-1 3/8"	4	4
		10'	GLCS-FS-500-10 (S or AL)-103-10	Steel	20'	54	13 1/8	16 1/2	24	6 5/8	7 1/8	16 7/8	11'-4"	11'-9"	3	6
		10'	AL-FS-500-10-103-10	Alum	20'	54	13 1/4	23 7/8	-	12 5/8	7 1/4	16 7/8	11'-4"	12'-4 3/8"	3	6
		10'	GLCSL-FS-500-10 (S or AL)-103-10	Steel	25'	54	13 1/8	18 7/8	26 3/8	6 5/8	7 1/8	16 7/8	11'-4"	11'-11 3/8"	3	5
		12'	GLCS-FS-500-10 (S or AL)-103-12	Steel	20'	54	13 1/8	16 1/2	24	6 5/8	7 1/8	16 7/8	11'-6"	13'-9"	4	6
		12'	AL-FS-500-10-103-12	Alum	20'	54	13 1/4	23 7/8	-	12 5/8	7 1/4	16 7/8	11'-6"	14'-4 3/8"	4	6
		12'	GLCSL-FS-500-10 (S or AL)-103-12	Steel	25'	54	13 1/8	18 7/8	26 3/8	6 5/8	7 1/8	16 7/8	11'-6"	13'-11 3/8"	4	5
		14'	GLCS-FS-500-10 (S or AL)-103-14	Steel	20'	54	13 1/8	16 1/2	24	6 5/8	7 1/8	16 7/8	11'-6"	15'-9"	4	6
		14'	AL-FS-500-10-103-14	Alum	20'	54	13 1/4	23 7/8	-	12 5/8	7 1/4	16 7/8	11'-6"	16'-4 3/8"	4	6
	124'	10'	GLCSL-FS-500-10 (S or AL)-103-14	Steel	25'	54	13 1/8	18 7/8	26 3/8	6 5/8	7 1/8	16 7/8	11'-6"	15'-11 3/8"	4	5
		10'	GLCSLX-FS-500-10 (S or AL)-124-10	Steel	30'	54	13 1/8	20 7/8	28 3/8	6 5/8	7 1/8	16 7/8	11'-4"	12'-1 3/8"	3	5
		12'	GLCSLX-FS-500-10 (S or AL)-124-12	Steel	30'	54	13 1/8	20 7/8	28 3/8	6 5/8	7 1/8	16 7/8	11'-6"	14'-1 3/8"	4	5
		14'	GLCSLX-FS-500-10 (S or AL)-124-14	Steel	30'	54	13 1/8	20 7/8	28 3/8	6 5/8	7 1/8	16 7/8	11'-6"	16'-1 3/8"	4	5

*This column provides the total number of support assemblies based on the "L1" dimensions shown. Support assemblies are designed to AISC specifications and do not require bracing. If no movement of the support assembly is preferred, then bracing to the building steel is recommended (not included).

FREE STANDING WORK STATION BRIDGE CRANES

BRIDGE LENGTH (L)	RUNWAY LENGTH	TS	MODEL NUMBER	TRACK MAT.	RUNWAY			BRIDGE					SUPPORT STRUCTURE			
					MAX. L1	L7 in	L8 in	H3 in	H3A in	H4 in	L3 in	L6 in	OAW	OAH	D in	SPT*
15'	23'	10'	GLCS-FS-500-15 (S or AL)-23-10	Steel	20'	9	13 1/8	16 1/2	24	12 3/4	7 1/8	21 3/4	16'-4"	11'-9"	3	2
		10'	AL-FS-500-15-23-10	Alum	20'	13	13 1/4	23 7/8	-	12 5/8	7 1/4	23 5/8	16'-4"	12'-4 3/8"	3	2
		12'	GLCS-FS-500-15 (S or AL)-23-12	Steel	20'	9	13 1/8	16 1/2	24	12 3/4	7 1/8	21 3/4	16'-6"	13'-9"	4	2
		12'	AL-FS-500-15-23-12	Alum	20'	13	13 1/4	23 7/8	-	12 5/8	7 1/4	23 5/8	16'-6"	14'-4 3/8"	4	2
		14'	GLCS-FS-500-15 (S or AL)-23-14	Steel	20'	9	13 1/8	16 1/2	24	12 3/4	7 1/8	21 3/4	16'-6"	15'-9"	4	2
		14'	AL-FS-500-15-23-14	Alum	20'	13	13 1/4	23 7/8	-	12 5/8	7 1/4	23 5/8	16'-6"	16'-4 3/8"	4	2
	28'	10'	GLCSL-FS-500-15 (S or AL)-28-10	Steel	25'	9	13 1/8	18 7/8	26 3/8	12 3/4	7 1/8	21 3/4	16'-4"	11'-11 3/8"	3	2
		12'	GLCSL-FS-500-15 (S or AL)-28-12	Steel	25'	9	13 1/8	18 7/8	26 3/8	12 3/4	7 1/8	21 3/4	16'-6"	13'-11 3/8"	4	2
		14'	GLCSL-FS-500-15 (S or AL)-28-14	Steel	25'	9	13 1/8	18 7/8	26 3/8	12 3/4	7 1/8	21 3/4	16'-6"	15'-11 3/8"	4	2
	33'	10'	GLCS-FS-500-15 (S or AL)-33-10	Steel	20'	9	13 1/8	16 1/2	24	12 3/4	7 1/8	21 3/4	16'-4"	11'-9"	3	3
		10'	AL-FS-500-15-33-10	Alum	20'	19	13 1/4	23 7/8	-	12 5/8	7 1/4	23 5/8	16'-4"	12'-4 3/8"	3	3
		12'	GLCS-FS-500-15 (S or AL)-33-12	Steel	20'	9	13 1/8	16 1/2	24	12 3/4	7 1/8	21 3/4	16'-6"	13'-9"	4	3
		12'	AL-FS-500-15-33-12	Alum	20'	19	13 1/4	23 7/8	-	12 5/8	7 1/4	23 5/8	16'-6"	14'-4 3/8"	4	3
		14'	GLCS-FS-500-15 (S or AL)-33-14	Steel	20'	9	13 1/8	16 1/2	24	12 3/4	7 1/8	21 3/4	16'-6"	15'-9"	4	3
		14'	AL-FS-500-15-33-14	Alum	20'	19	13 1/4	23 7/8	-	12 5/8	7 1/4	23 5/8	16'-6"	16'-4 3/8"	4	3
	34'	10'	GLCSLX-FS-500-15 (S or AL)-34-10	Steel	30'	9	13 1/8	20 7/8	28 3/8	12 3/4	7 1/8	21 3/4	16'-4"	12'-1 3/8"	3	2
		12'	GLCSLX-FS-500-15 (S or AL)-34-12	Steel	30'	9	13 1/8	20 7/8	28 3/8	12 3/4	7 1/8	21 3/4	16'-6"	14'-1 3/8"	4	2
		14'	GLCSLX-FS-500-15 (S or AL)-34-14	Steel	30'	9	13 1/8	20 7/8	28 3/8	12 3/4	7 1/8	21 3/4	16'-6"	16'-1 3/8"	4	2
	43'	10'	GLCS-FS-500-15 (S or AL)-43-10	Steel	20'	13	13 1/8	16 1/2	24	12 3/4	7 1/8	21 3/4	16'-4"	11'-9"	3	3
		10'	AL-FS-500-15-43-10	Alum	20'	26	13 1/4	23 7/8	-	12 5/8	7 1/4	23 5/8	16'-4"	12'-4 3/8"	3	3
		12'	GLCS-FS-500-15 (S or AL)-43-12	Steel	20'	13	13 1/8	16 1/2	24	12 3/4	7 1/8	21 3/4	16'-6"	13'-9"	4	3
		12'	AL-FS-500-15-43-12	Alum	20'	26	13 1/4	23 7/8	-	12 5/8	7 1/4	23 5/8	16'-6"	14'-4 3/8"	4	3
		14'	GLCS-FS-500-15 (S or AL)-43-14	Steel	20'	13	13 1/8	16 1/2	24	12 3/4	7 1/8	21 3/4	16'-6"	15'-9"	4	3
		14'	AL-FS-500-15-43-14	Alum	20'	26	13 1/4	23 7/8	-	12 5/8	7 1/4	23 5/8	16'-6"	16'-4 3/8"	4	3
	53'	10'	GLCS-FS-500-15 (S or AL)-53-10	Steel	20'	13	13 1/8	16 1/2	24	12 3/4	7 1/8	21 3/4	16'-4"	11'-9"	3	4
		10'	AL-FS-500-15-53-10	Alum	20'	30	13 1/4	23 7/8	-	12 5/8	7 1/4	23 5/8	16'-4"	12'-4 3/8"	3	4
		10'	GLCSL-FS-500-15 (S or AL)-53-10	Steel	25'	13	13 1/8	18 7/8	26 3/8	12 3/4	7 1/8	21 3/4	16'-4"	11'-11 3/8"	3	3
		12'	GLCS-FS-500-15 (S or AL)-53-12	Steel	20'	13	13 1/8	16 1/2	24	12 3/4	7 1/8	21 3/4	16'-6"	13'-9"	4	4
		12'	AL-FS-500-15-53-12	Alum	20'	30	13 1/4	23 7/8	-	12 5/8	7 1/4	23 5/8	16'-6"	14'-4 3/8"	4	4
		12'	GLCSL-FS-500-15 (S or AL)-53-12	Steel	25'	13	13 1/8	18 7/8	26 3/8	12 3/4	7 1/8	21 3/4	16'-6"	13'-11 3/8"	4	3
		14'	GLCS-FS-500-15 (S or AL)-53-14	Steel	20'	13	13 1/8	16 1/2	24	12 3/4	7 1/8	21 3/4	16'-6"	15'-9"	4	4
		14'	AL-FS-500-15-53-14	Alum	20'	30	13 1/4	23 7/8	-	12 5/8	7 1/4	23 5/8	16'-6"	16'-4 3/8"	4	4
		14'	GLCSL-FS-500-15 (S or AL)-53-14	Steel	25'	13	13 1/8	18 7/8	26 3/8	12 3/4	7 1/8	21 3/4	16'-6"	15'-11 3/8"	4	3
	63'	10'	GLCS-FS-500-15 (S or AL)-63-10	Steel	20'	19	13 1/8	16 1/2	24	12 3/4	7 1/8	21 3/4	16'-4"	11'-9"	3	4
		10'	AL-FS-500-15-63-10	Alum	20'	36	13 1/4	23 7/8	-	12 5/8	7 1/4	23 5/8	16'-4"	12'-4 3/8"	3	4
		12'	GLCS-FS-500-15 (S or AL)-63-12	Steel	20'	19	13 1/8	16 1/2	24	12 3/4	7 1/8	21 3/4	16'-6"	13'-9"	4	4
		12'	AL-FS-500-15-63-12	Alum	20'	36	13 1/4	23 7/8	-	12 5/8	7 1/4	23 5/8	16'-6"	14'-4 3/8"	4	4
		14'	GLCS-FS-500-15 (S or AL)-63-14	Steel	20'	19	13 1/8	16 1/2	24	12 3/4	7 1/8	21 3/4	16'-6"	15'-9"	4	4
		14'	AL-FS-500-15-63-14	Alum	20'	36	13 1/4	23 7/8	-	12 5/8	7 1/4	23 5/8	16'-6"	16'-4 3/8"	4	4
	64'	10'	GLCSLX-FS-500-15 (S or AL)-64-10	Steel	30'	36	13 1/8	20 7/8	28 3/8	12 3/4	7 1/8	23 5/8	16'-4"	12'-1 3/8"	3	3
		12'	GLCSLX-FS-500-15 (S or AL)-64-12	Steel	30'	36	13 1/8	20 7/8	28 3/8	12 3/4	7 1/8	23 5/8	16'-6"	14'-1 3/8"	4	3
		14'	GLCSLX-FS-500-15 (S or AL)-64-14	Steel	30'	36	13 1/8	20 7/8	28 3/8	12 3/4	7 1/8	23 5/8	16'-6"	16'-1 3/8"	4	3
	78'	10'	GLCSL-FS-500-15 (S or AL)-78-10	Steel	25'	46	13 1/8	18 7/8	26 3/8	12 3/4	7 1/8	23 5/8	16'-4"	11'-11 3/8"	3	4
		12'	GLCSL-FS-500-15 (S or AL)-78-12	Steel	25'	46	13 1/8	18 7/8	26 3/8	12 3/4	7 1/8	23 5/8	16'-6"	13'-11 3/8"	4	4
		14'	GLCSL-FS-500-15 (S or AL)-78-14	Steel	25'	46	13 1/8	18 7/8	26 3/8	12 3/4	7 1/8	23 5/8	16'-6"	15'-11 3/8"	4	4
	83'	10'	GLCS-FS-500-15 (S or AL)-83-10	Steel	20'	46	13 1/8	16 1/2	24	12 3/4	7 1/8	23 5/8	16'-4"	11'-9"	3	5
		10'	AL-FS-500-15-83-10	Alum	20'	46	13 1/4	23 7/8	-	12 5/8	7 1/4	23 5/8	16'-4"	12'-4 3/8"	3	5
		12'	GLCS-FS-500-15 (S or AL)-83-12	Steel	20'	46	13 1/8	16 1/2	24	12 3/4	7 1/8	23 5/8	16'-6"	13'-9"	4	5
		12'	AL-FS-500-15-83-12	Alum	20'	46	13 1/4	23 7/8	-	12 5/8	7 1/4	23 5/8	16'-6"	14'-4 3/8"	4	5
		14'	GLCS-FS-500-15 (S or AL)-83-14	Steel	20'	46	13 1/8	16 1/2	24	12 3/4	7 1/8	23 5/8	16'-6"	15'-9"	4	5
		14'	AL-FS-500-15-83-14	Alum	20'	46	13 1/4	23 7/8	-	12 5/8	7 1/4	23 5/8	16'-6"	16'-4 3/8"	4	5
	94'	10'	GLCSLX-FS-500-15 (S or AL)-94-10	Steel	30'	54	13 1/8	20 7/8	28 3/8	12 3/4	7 1/8	23 5/8	16'-4"	12'-1 3/8"	3	4
		12'	GLCSLX-FS-500-15 (S or AL)-94-12	Steel	30'	54	13 1/8	20 7/8	28 3/8	12 3/4	7 1/8	23 5/8	16'-6"	14'-1 3/8"	4	4
		14'	GLCSLX-FS-500-15 (S or AL)-94-14	Steel	30'	54	13 1/8	20 7/8	28 3/8	12 3/4	7 1/8	23 5/8	16'-6"	16'-1 3/8"	4	4
	103'	10'	GLCS-FS-500-15 (S or AL)-103-10	Steel	20'	54	13 1/8	16 1/2	24	12 3/4	7 1/8	23 5/8	16'-4"	11'-9"	3	6
		10'	AL-FS-500-15-103-10	Alum	20'	54	13 1/4	23 7/8	-	12 5/8	7 1/4	23 5/8	16'-4"	12'-4 3/8"	3	6
		10'	GLCSL-FS-500-15 (S or AL)-103-10	Steel	25'	54	13 1/8	18 7/8	26 3/8	12 3/4	7 1/8	23 5/8	16'-4"	11'-11 3/8"	3	5
		12'	GLCS-FS-500-15 (S or AL)-103-12	Steel	20'	54	13 1/8	16 1/2	24	12 3/4	7 1/8	23 5/8	16'-6"	13'-9"	4	6
		12'	AL-FS-500-15-103-12	Alum	20'	54	13 1/4	23 7/8	-	12 5/8	7 1/4	23 5/8	16'-6"	14'-4 3/8"	4	6
		12'	GLCSL-FS-500-15 (S or AL)-103-12	Steel	25'	54	13 1/8	18 7/8	26 3/8	12 3/4	7 1/8	23 5/8	16'-6"	13'-11 3/8"	4	5
		14'	GLCS-FS-500-15 (S or AL)-103-14	Steel	20'	54	13 1/8	16 1/2	24	12 3/4	7 1/8	23 5/8	16'-6"	15'-9"	4	6
		14'	AL-FS-500-15-103-14	Alum	20'	54	13 1/4	23 7/8	-	12 5/8	7 1/4	23 5/8	16'-6"	16'-4 3/8"	4	6
		14'	GLCSL-FS-500-15 (S or AL)-103-14	Steel	25'	54	13 1/8	18 7/8	26 3/8	12 3/4	7 1/8	23 5/8	16'-6"	15'-11 3/8"	4	5
	124'	10'	GLCSLX-FS-500-15 (S or AL)-124-10	Steel	30'	54	13 1/8	20 7/8	28 3/8	12 3/4	7 1/8	23 5/8	16'-4"	12'-1 3/8"	3	5
		12'	GLCSLX-FS-500-15 (S or AL)-124-12	Steel	30'	54	13 1/8	20 7/8	28 3/8	12 3/4	7 1/8	23 5/8	16'-6"	14'-1 3/8"	4	5
14'		GLCSLX-FS-500-15 (S or AL)-124-14	Steel	30'	54	13 1/8	20 7/8	28 3/8	12 3/4	7 1/8	23 5/8	16'-6"	16'-1 3/8"	4	5	

*This column provides the total number of support assemblies based on the "L1" dimensions shown. Support assemblies are designed to AISC specifications and do not require bracing. If no movement of the support assembly is preferred, then bracing to the building steel is recommended (not included).

To Determine Hook Coverage: [Bridge Travel on Runway = Runway Length - (2xL8)] by [Hoist Trolley Travel on Bridge = Bridge Length - L3 - L6] (L6 allows for festoon stack-up).

Gorbel® Free Standing Work Station Bridge Crane Kits include: bridge, runways, the appropriate number of support assemblies, hoist trolley, end trucks, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel runway lengths greater than 63' and all aluminum systems), festoon stack-up section, splice joints and hanger brackets. Hoist and anchor bolts provided by others.

Dimensions are for reference only and are subject to change without notice.

500# CAPACITY

FREE STANDING WORK STATION BRIDGE CRANES

BRIDGE LENGTH (L)	RUNWAY LENGTH	TS	MODEL NUMBER	TRACK MAT.	RUNWAY			BRIDGE					SUPPORT STRUCTURE			
					MAX. L1	L7 in	L8 in	H3 in	H3A in	H4 in	L3 in	L6 in	OAW	OAH	D in	*Ld
20'	23'	10'	GLCS-FS-500-20 (S or AL)-23-10	Steel	20'	9	13 1/8	16 1/2	24	12 3/4	7 1/8	21 3/4	21'-4"	11'-9"	3	2
		10'	AL-FS-500-20-23-10	Alum	20'	13	13 1/4	23 7/8	-	12 5/8	7 1/4	27	21'-4"	12'-4 3/8"	3	2
		12'	GLCS-FS-500-20 (S or AL)-23-12	Steel	20'	9	13 1/8	16 1/2	24	12 3/4	7 1/8	21 3/4	21'-6"	13'-9"	4	2
		12'	AL-FS-500-20-23-12	Alum	20'	13	13 1/4	23 7/8	-	12 5/8	7 1/4	27	21'-6"	14'-4 3/8"	4	2
		14'	GLCS-FS-500-20 (S or AL)-23-14	Steel	20'	9	13 1/8	16 1/2	24	12 3/4	7 1/8	21 3/4	21'-6"	15'-9"	4	2
		14'	AL-FS-500-20-23-14	Alum	20'	13	13 1/4	23 7/8	-	12 5/8	7 1/4	27	21'-6"	16'-4 3/8"	4	2
	28'	10'	GLCSL-FS-500-20 (S or AL)-28-10	Steel	25'	9	13 1/8	18 7/8	26 3/8	12 3/4	7 1/8	21 3/4	21'-4"	11'-11 3/8"	3	2
		12'	GLCSL-FS-500-20 (S or AL)-28-12	Steel	25'	9	13 1/8	18 7/8	26 3/8	12 3/4	7 1/8	21 3/4	21'-6"	13'-11 3/8"	4	2
		14'	GLCSL-FS-500-20 (S or AL)-28-14	Steel	25'	9	13 1/8	18 7/8	26 3/8	12 3/4	7 1/8	21 3/4	21'-6"	15'-11 3/8"	4	2
		14'	AL-FS-500-20-28-14	Alum	20'	9	13 1/8	16 1/2	24	12 3/4	7 1/8	21 3/4	21'-4"	11'-9"	3	3
	33'	10'	GLCS-FS-500-20 (S or AL)-33-10	Steel	20'	9	13 1/8	16 1/2	24	12 3/4	7 1/8	21 3/4	21'-4"	12'-4 3/8"	3	3
		10'	AL-FS-500-20-33-10	Alum	20'	19	13 1/4	23 7/8	-	12 5/8	7 1/4	27	21'-4"	13'-9"	4	3
		12'	GLCS-FS-500-20 (S or AL)-33-12	Steel	20'	9	13 1/8	16 1/2	24	12 3/4	7 1/8	21 3/4	21'-6"	14'-4 3/8"	4	3
		12'	AL-FS-500-20-33-12	Alum	20'	19	13 1/4	23 7/8	-	12 5/8	7 1/4	27	21'-6"	15'-9"	4	3
		14'	GLCS-FS-500-20 (S or AL)-33-14	Steel	20'	9	13 1/8	16 1/2	24	12 3/4	7 1/8	21 3/4	21'-6"	16'-4 3/8"	4	3
		14'	AL-FS-500-20-33-14	Alum	20'	19	13 1/4	23 7/8	-	12 5/8	7 1/4	27	21'-6"	17'-1 3/8"	4	3
	34'	10'	GLCSLX-FS-500-20 (S or AL)-34-10	Steel	30'	9	13 1/8	20 7/8	28 3/8	12 3/4	7 1/8	21 3/4	21'-4"	12'-1 3/8"	3	2
		12'	GLCSLX-FS-500-20 (S or AL)-34-12	Steel	30'	9	13 1/8	20 7/8	28 3/8	12 3/4	7 1/8	21 3/4	21'-6"	13'-1 3/8"	4	2
		14'	GLCSLX-FS-500-20 (S or AL)-34-14	Steel	30'	9	13 1/8	20 7/8	28 3/8	12 3/4	7 1/8	21 3/4	21'-6"	14'-1 3/8"	4	2
	43'	10'	GLCS-FS-500-20 (S or AL)-43-10	Steel	20'	13	13 1/8	16 1/2	24	12 3/4	7 1/8	21 3/4	21'-4"	11'-9"	3	3
		10'	AL-FS-500-20-43-10	Alum	20'	26	13 1/4	23 7/8	-	12 5/8	7 1/4	27	21'-4"	12'-4 3/8"	3	3
		12'	GLCS-FS-500-20 (S or AL)-43-12	Steel	20'	13	13 1/8	16 1/2	24	12 3/4	7 1/8	21 3/4	21'-6"	13'-9"	4	3
		12'	AL-FS-500-20-43-12	Alum	20'	26	13 1/4	23 7/8	-	12 5/8	7 1/4	27	21'-6"	14'-4 3/8"	4	3
		14'	GLCS-FS-500-20 (S or AL)-43-14	Steel	20'	13	13 1/8	16 1/2	24	12 3/4	7 1/8	21 3/4	21'-6"	15'-9"	4	3
		14'	AL-FS-500-20-43-14	Alum	20'	26	13 1/4	23 7/8	-	12 5/8	7 1/4	27	21'-6"	16'-4 3/8"	4	3
	53'	10'	GLCS-FS-500-20 (S or AL)-53-10	Steel	20'	13	13 1/8	16 1/2	24	12 3/4	7 1/8	21 3/4	21'-4"	11'-9"	3	4
		10'	AL-FS-500-20-53-10	Alum	20'	30	13 1/4	23 7/8	-	12 5/8	7 1/4	27	21'-4"	12'-4 3/8"	3	4
		12'	GLCSL-FS-500-20 (S or AL)-53-12	Steel	25'	13	13 1/8	18 7/8	26 3/8	12 3/4	7 1/8	21 3/4	21'-4"	11'-11 3/8"	3	3
		12'	GLCS-FS-500-20 (S or AL)-53-12	Steel	20'	13	13 1/8	16 1/2	24	12 3/4	7 1/8	21 3/4	21'-6"	13'-9"	4	4
		12'	AL-FS-500-20-53-12	Alum	20'	30	13 1/4	23 7/8	-	12 5/8	7 1/4	27	21'-6"	14'-4 3/8"	4	4
		12'	GLCSL-FS-500-20 (S or AL)-53-12	Steel	25'	13	13 1/8	18 7/8	26 3/8	12 3/4	7 1/8	21 3/4	21'-6"	13'-11 3/8"	4	3
		14'	GLCS-FS-500-20 (S or AL)-53-14	Steel	20'	13	13 1/8	16 1/2	24	12 3/4	7 1/8	21 3/4	21'-6"	15'-9"	4	4
		14'	AL-FS-500-20-53-14	Alum	20'	30	13 1/4	23 7/8	-	12 5/8	7 1/4	27	21'-6"	16'-4 3/8"	4	4
		14'	GLCSL-FS-500-20 (S or AL)-53-14	Steel	25'	13	13 1/8	18 7/8	26 3/8	12 3/4	7 1/8	21 3/4	21'-6"	15'-11 3/8"	4	3
		14'	AL-FS-500-20-53-14	Alum	20'	30	13 1/4	23 7/8	-	12 5/8	7 1/4	27	21'-6"	17'-1 3/8"	4	3
	63'	10'	GLCS-FS-500-20 (S or AL)-63-10	Steel	20'	19	13 1/8	16 1/2	24	12 3/4	7 1/8	21 3/4	21'-4"	11'-9"	3	4
		10'	AL-FS-500-20-63-10	Alum	20'	36	13 1/4	23 7/8	-	12 5/8	7 1/4	27	21'-4"	12'-4 3/8"	3	4
		12'	GLCS-FS-500-20 (S or AL)-63-12	Steel	20'	19	13 1/8	16 1/2	24	12 3/4	7 1/8	21 3/4	21'-6"	13'-9"	4	4
		12'	AL-FS-500-20-63-12	Alum	20'	36	13 1/4	23 7/8	-	12 5/8	7 1/4	27	21'-6"	14'-4 3/8"	4	4
		14'	GLCS-FS-500-20 (S or AL)-63-14	Steel	20'	19	13 1/8	16 1/2	24	12 3/4	7 1/8	21 3/4	21'-6"	15'-9"	4	4
		14'	AL-FS-500-20-63-14	Alum	20'	36	13 1/4	23 7/8	-	12 5/8	7 1/4	27	21'-6"	16'-4 3/8"	4	4
	64'	10'	GLCSLX-FS-500-20 (S or AL)-64-10	Steel	30'	36	13 1/8	20 7/8	28 3/8	12 3/4	7 1/8	27	21'-4"	12'-1 3/8"	3	3
		12'	GLCSLX-FS-500-20 (S or AL)-64-12	Steel	30'	36	13 1/8	20 7/8	28 3/8	12 3/4	7 1/8	27	21'-6"	14'-1 3/8"	4	3
		14'	GLCSLX-FS-500-20 (S or AL)-64-14	Steel	30'	36	13 1/8	20 7/8	28 3/8	12 3/4	7 1/8	27	21'-6"	16'-1 3/8"	4	3
	78'	10'	GLCSL-FS-500-20 (S or AL)-78-10	Steel	25'	46	13 1/8	18 7/8	26 3/8	12 3/4	7 1/8	27	21'-4"	11'-11 3/8"	3	4
		12'	GLCSL-FS-500-20 (S or AL)-78-12	Steel	25'	46	13 1/8	18 7/8	26 3/8	12 3/4	7 1/8	27	21'-6"	13'-11 3/8"	4	4
		14'	GLCSL-FS-500-20 (S or AL)-78-14	Steel	25'	46	13 1/8	18 7/8	26 3/8	12 3/4	7 1/8	27	21'-6"	15'-11 3/8"	4	4
	83'	10'	GLCS-FS-500-20 (S or AL)-83-10	Steel	20'	46	13 1/8	16 1/2	24	12 3/4	7 1/8	27	21'-4"	11'-9"	3	5
		10'	AL-FS-500-20-83-10	Alum	20'	46	13 1/4	23 7/8	-	12 5/8	7 1/4	27	21'-4"	12'-4 3/8"	3	5
		12'	GLCS-FS-500-20 (S or AL)-83-12	Steel	20'	46	13 1/8	16 1/2	24	12 3/4	7 1/8	27	21'-6"	13'-9"	4	5
		12'	AL-FS-500-20-83-12	Alum	20'	46	13 1/4	23 7/8	-	12 5/8	7 1/4	27	21'-6"	14'-4 3/8"	4	5
		14'	GLCS-FS-500-20 (S or AL)-83-14	Steel	20'	46	13 1/8	16 1/2	24	12 3/4	7 1/8	27	21'-6"	15'-9"	4	5
		14'	AL-FS-500-20-83-14	Alum	20'	46	13 1/4	23 7/8	-	12 5/8	7 1/4	27	21'-6"	16'-4 3/8"	4	5
	94'	10'	GLCSLX-FS-500-20 (S or AL)-94-10	Steel	30'	54	13 1/8	20 7/8	28 3/8	12 3/4	7 1/8	27	21'-4"	12'-1 3/8"	3	4
		12'	GLCSLX-FS-500-20 (S or AL)-94-12	Steel	30'	54	13 1/8	20 7/8	28 3/8	12 3/4	7 1/8	27	21'-6"	14'-1 3/8"	4	4
		14'	GLCSLX-FS-500-20 (S or AL)-94-14	Steel	30'	54	13 1/8	20 7/8	28 3/8	12 3/4	7 1/8	27	21'-6"	16'-1 3/8"	4	4
	103'	10'	GLCS-FS-500-20 (S or AL)-103-10	Steel	20'	54	13 1/8	16 1/2	24	12 3/4	7 1/8	27	21'-4"	11'-9"	3	6
		10'	AL-FS-500-20-103-10	Alum	20'	54	13 1/4	23 7/8	-	12 5/8	7 1/4	27	21'-4"	12'-4 3/8"	3	6
		12'	GLCSL-FS-500-20 (S or AL)-103-12	Steel	25'	54	13 1/8	18 7/8	26 3/8	12 3/4	7 1/8	27	21'-4"	11'-11 3/8"	3	5
		12'	GLCS-FS-500-20 (S or AL)-103-12	Steel	20'	54	13 1/8	16 1/2	24	12 3/4	7 1/8	27	21'-6"	13'-9"	4	6
		12'	AL-FS-500-20-103-12	Alum	20'	54	13 1/4	23 7/8	-	12 5/8	7 1/4	27	21'-6"	14'-4 3/8"	4	6
		12'	GLCSL-FS-500-20 (S or AL)-103-12	Steel	25'	54	13 1/8	18 7/8	26 3/8	12 3/4	7 1/8	27	21'-6"	13'-11 3/8"	4	5
		14'	GLCS-FS-500-20 (S or AL)-103-14	Steel	20'	54	13 1/8	16 1/2	24	12 3/4	7 1/8	27	21'-6"	15'-9"	4	6
		14'	AL-FS-500-20-103-14	Alum	20'	54	13 1/4	23 7/8	-	12 5/8	7 1/4	27	21'-6"	16'-4 3/8"	4	6
		14'	GLCSL-FS-500-20 (S or AL)-103-14	Steel	25'	54	13 1/8	18 7/8	26 3/8	12 3/4	7 1/8	27	21'-6"	15'-11 3/8"	4	5
		14'	AL-FS-500-20-103-14	Alum	20'	54	13 1/4	23 7/8	-	12 5/8	7 1/4	27	21'-6"	17'-1 3/8"	4	5
	124'	10'	GLCSLX-FS-500-20 (S or AL)-124-10	Steel	30'	54	13 1/8	20 7/8	28 3/8	12 3/4	7 1/8	27	21'-4"	12'-1 3/8"	3	5
		12'	GLCSLX-FS-500-20 (S or AL)-124-12	Steel	30'	54	13 1/8	20 7/8	28 3/8	12 3/4	7 1/8	27	21'-6"	14'-1 3/8"	4	5
		14'	GLCSLX-FS-500-20 (S or AL)-124-14	Steel	30'	54	13 1/8	20 7/8	28 3/8	12 3/4	7 1/8	27	21'-6"	16'-1 3/8"	4	5

*This column provides the total number of support assemblies based on the "L1" dimensions shown. Support assemblies are designed to AISC specifications and do not require bracing. If no movement of the support assembly is preferred, then bracing to the building steel is recommended (not included).

To Determine Hook Coverage: [Bridge Travel on Runway = Runway Length - (2xL8)] by [Hoist Trolley Travel on Bridge = Bridge Length - L3 - L6] (L6 allows for festoon stack-up).

Gorbel® Free Standing Work Station Bridge Crane Kits include: bridge, runways, the appropriate number of support assemblies, hoist trolley, end trucks, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel runway lengths greater than 63' and all aluminum systems), festoon stack-up section, splice joints and hanger brackets. Hoist and anchor bolts provided by others.

FREE STANDING WORK STATION BRIDGE CRANES

BRIDGE LENGTH (L)	RUNWAY LENGTH	TS	MODEL NUMBER	TRACK MAT.	RUNWAY			BRIDGE					SUPPORT STRUCTURE			
					MAX. L1	L7 in	L8 in	H3 in	H3A in	H4 in	L3 in	L6 in	OAW	OAH	D in	Spt*
23'	23'	10'	GLCS-FS-500-23 (S or AL)-23-10	Steel	20'	9	13 1/8	16 1/2	24	12 3/4	7 1/8	21 3/4	24'-4"	11'-9"	3	2
		10'	AL-FS-500-23-23-10	Alum	20'	13	13 1/4	23 7/8	-	12 5/8	7 1/4	30 3/8	24'-4"	12'-4 3/8"	3	2
		12'	GLCS-FS-500-23 (S or AL)-23-12	Steel	20'	9	13 1/8	16 1/2	24	12 3/4	7 1/8	21 3/4	24'-6"	13'-9"	4	2
		12'	AL-FS-500-23-23-12	Alum	20'	13	13 1/4	23 7/8	-	12 5/8	7 1/4	30 3/8	24'-6"	14'-4 3/8"	4	2
		14'	GLCS-FS-500-23 (S or AL)-23-14	Steel	20'	9	13 1/8	16 1/2	24	12 3/4	7 1/8	21 3/4	24'-6"	15'-9"	4	2
		14'	AL-FS-500-23-23-14	Alum	20'	13	13 1/4	23 7/8	-	12 5/8	7 1/4	30 3/8	24'-6"	16'-4 3/8"	4	2
	28'	10'	GLCSL-FS-500-23 (S or AL)-28-10	Steel	25'	9	13 1/8	18 7/8	26 3/8	12 3/4	7 1/8	21 3/4	24'-4"	11'-11 3/8"	3	2
		12'	GLCSL-FS-500-23 (S or AL)-28-12	Steel	25'	9	13 1/8	18 7/8	26 3/8	12 3/4	7 1/8	21 3/4	24'-6"	13'-11 3/8"	4	2
		14'	GLCSL-FS-500-23 (S or AL)-28-14	Steel	25'	9	13 1/8	18 7/8	26 3/8	12 3/4	7 1/8	21 3/4	24'-6"	15'-11 3/8"	4	2
	33'	10'	GLCS-FS-500-23 (S or AL)-33-10	Steel	20'	9	13 1/8	16 1/2	24	12 3/4	7 1/8	21 3/4	24'-4"	11'-9"	3	3
		10'	AL-FS-500-23-33-10	Alum	20'	19	13 1/4	23 7/8	-	12 5/8	7 1/4	30 3/8	24'-4"	12'-4 3/8"	3	3
		12'	GLCS-FS-500-23 (S or AL)-33-12	Steel	20'	9	13 1/8	16 1/2	24	12 3/4	7 1/8	21 3/4	24'-6"	13'-9"	4	3
		12'	AL-FS-500-23-33-12	Alum	20'	19	13 1/4	23 7/8	-	12 5/8	7 1/4	30 3/8	24'-6"	14'-4 3/8"	4	3
		14'	GLCS-FS-500-23 (S or AL)-33-14	Steel	20'	9	13 1/8	16 1/2	24	12 3/4	7 1/8	21 3/4	24'-6"	15'-9"	4	3
		14'	AL-FS-500-23-33-14	Alum	20'	19	13 1/4	23 7/8	-	12 5/8	7 1/4	30 3/8	24'-6"	16'-4 3/8"	4	3
	34'	10'	GLCSLX-FS-500-23 (S or AL)-34-10	Steel	30'	9	13 1/8	20 7/8	28 3/8	12 3/4	7 1/8	21 3/4	24'-4"	12'-1 3/8"	3	2
		12'	GLCSLX-FS-500-23 (S or AL)-34-12	Steel	30'	9	13 1/8	20 7/8	28 3/8	12 3/4	7 1/8	21 3/4	24'-6"	14'-1 3/8"	4	2
		14'	GLCSLX-FS-500-23 (S or AL)-34-14	Steel	30'	9	13 1/8	20 7/8	28 3/8	12 3/4	7 1/8	21 3/4	24'-6"	16'-1 3/8"	4	2
	43'	10'	GLCS-FS-500-23 (S or AL)-43-10	Steel	20'	13	13 1/8	16 1/2	24	12 3/4	7 1/8	21 3/4	24'-4"	11'-9"	3	3
		10'	AL-FS-500-23-43-10	Alum	20'	26	13 1/4	23 7/8	-	12 5/8	7 1/4	30 3/8	24'-4"	12'-4 3/8"	3	3
		12'	GLCS-FS-500-23 (S or AL)-43-12	Steel	20'	13	13 1/8	16 1/2	24	12 3/4	7 1/8	21 3/4	24'-6"	13'-9"	4	3
		12'	AL-FS-500-23-43-12	Alum	20'	26	13 1/4	23 7/8	-	12 5/8	7 1/4	30 3/8	24'-6"	14'-4 3/8"	4	3
		14'	GLCS-FS-500-23 (S or AL)-43-14	Steel	20'	13	13 1/8	16 1/2	24	12 3/4	7 1/8	21 3/4	24'-6"	15'-9"	4	3
		14'	AL-FS-500-23-43-14	Alum	20'	26	13 1/4	23 7/8	-	12 5/8	7 1/4	30 3/8	24'-6"	16'-4 3/8"	4	3
	53'	10'	GLCS-FS-500-23 (S or AL)-53-10	Steel	20'	13	13 1/8	16 1/2	24	12 3/4	7 1/8	21 3/4	24'-4"	11'-9"	3	4
		10'	AL-FS-500-23-53-10	Alum	20'	30	13 1/4	23 7/8	-	12 5/8	7 1/4	30 3/8	24'-4"	12'-4 3/8"	3	4
		10'	GLCSL-FS-500-23 (S or AL)-53-10	Steel	25'	13	13 1/8	18 7/8	26 3/8	12 3/4	7 1/8	21 3/4	24'-4"	11'-11 3/8"	3	3
		12'	GLCS-FS-500-23 (S or AL)-53-12	Steel	20'	13	13 1/8	16 1/2	24	12 3/4	7 1/8	21 3/4	24'-6"	13'-9"	4	4
		12'	AL-FS-500-23-53-12	Alum	20'	30	13 1/4	23 7/8	-	12 5/8	7 1/4	30 3/8	24'-6"	14'-4 3/8"	4	4
		12'	GLCSL-FS-500-23 (S or AL)-53-12	Steel	25'	13	13 1/8	18 7/8	26 3/8	12 3/4	7 1/8	21 3/4	24'-6"	13'-11 3/8"	4	3
		14'	GLCS-FS-500-23 (S or AL)-53-14	Steel	20'	13	13 1/8	16 1/2	24	12 3/4	7 1/8	21 3/4	24'-6"	15'-9"	4	4
		14'	AL-FS-500-23-53-14	Alum	20'	30	13 1/4	23 7/8	-	12 5/8	7 1/4	30 3/8	24'-6"	16'-4 3/8"	4	4
		14'	GLCSL-FS-500-23 (S or AL)-53-14	Steel	25'	13	13 1/8	18 7/8	26 3/8	12 3/4	7 1/8	21 3/4	24'-6"	15'-11 3/8"	4	3
	63'	10'	GLCS-FS-500-23 (S or AL)-63-10	Steel	20'	19	13 1/8	16 1/2	24	12 3/4	7 1/8	21 3/4	24'-4"	11'-9"	3	4
		10'	AL-FS-500-23-63-10	Alum	20'	36	13 1/4	23 7/8	-	12 5/8	7 1/4	30 3/8	24'-4"	12'-4 3/8"	3	4
		12'	GLCS-FS-500-23 (S or AL)-63-12	Steel	20'	19	13 1/8	16 1/2	24	12 3/4	7 1/8	21 3/4	24'-6"	13'-9"	4	4
		12'	AL-FS-500-23-63-12	Alum	20'	36	13 1/4	23 7/8	-	12 5/8	7 1/4	30 3/8	24'-6"	14'-4 3/8"	4	4
		14'	GLCS-FS-500-23 (S or AL)-63-14	Steel	20'	19	13 1/8	16 1/2	24	12 3/4	7 1/8	21 3/4	24'-6"	15'-9"	4	4
		14'	AL-FS-500-23-63-14	Alum	20'	36	13 1/4	23 7/8	-	12 5/8	7 1/4	30 3/8	24'-6"	16'-4 3/8"	4	4
	64'	10'	GLCSLX-FS-500-23 (S or AL)-64-10	Steel	30'	36	13 1/8	20 7/8	28 3/8	12 3/4	7 1/8	30 3/8	24'-4"	12'-1 3/8"	3	3
		12'	GLCSLX-FS-500-23 (S or AL)-64-12	Steel	30'	36	13 1/8	20 7/8	28 3/8	12 3/4	7 1/8	30 3/8	24'-6"	14'-1 3/8"	4	3
		14'	GLCSLX-FS-500-23 (S or AL)-64-14	Steel	30'	36	13 1/8	20 7/8	28 3/8	12 3/4	7 1/8	30 3/8	24'-6"	16'-1 3/8"	4	3
	78'	10'	GLCSL-FS-500-23 (S or AL)-78-10	Steel	25'	46	13 1/8	18 7/8	26 3/8	12 3/4	7 1/8	30 3/8	24'-4"	11'-11 3/8"	3	4
		12'	GLCSL-FS-500-23 (S or AL)-78-12	Steel	25'	46	13 1/8	18 7/8	26 3/8	12 3/4	7 1/8	30 3/8	24'-6"	13'-11 3/8"	4	4
		14'	GLCSL-FS-500-23 (S or AL)-78-14	Steel	25'	46	13 1/8	18 7/8	26 3/8	12 3/4	7 1/8	30 3/8	24'-6"	15'-11 3/8"	4	4
	83'	10'	GLCS-FS-500-23 (S or AL)-83-10	Steel	20'	46	13 1/8	16 1/2	24	12 3/4	7 1/8	30 3/8	24'-4"	11'-9"	3	5
		10'	AL-FS-500-23-83-10	Alum	20'	46	13 1/4	23 7/8	-	12 5/8	7 1/4	30 3/8	24'-4"	12'-4 3/8"	3	5
		12'	GLCS-FS-500-23 (S or AL)-83-12	Steel	20'	46	13 1/8	16 1/2	24	12 3/4	7 1/8	30 3/8	24'-6"	13'-9"	4	5
		12'	AL-FS-500-23-83-12	Alum	20'	46	13 1/4	23 7/8	-	12 5/8	7 1/4	30 3/8	24'-6"	14'-4 3/8"	4	5
		14'	GLCS-FS-500-23 (S or AL)-83-14	Steel	20'	46	13 1/8	16 1/2	24	12 3/4	7 1/8	30 3/8	24'-6"	15'-9"	4	5
		14'	AL-FS-500-23-83-14	Alum	20'	46	13 1/4	23 7/8	-	12 5/8	7 1/4	30 3/8	24'-6"	16'-4 3/8"	4	5
	94'	10'	GLCSLX-FS-500-23 (S or AL)-94-10	Steel	30'	54	13 1/8	20 7/8	28 3/8	12 3/4	7 1/8	30 3/8	24'-4"	12'-1 3/8"	3	4
		12'	GLCSLX-FS-500-23 (S or AL)-94-12	Steel	30'	54	13 1/8	20 7/8	28 3/8	12 3/4	7 1/8	30 3/8	24'-6"	14'-1 3/8"	4	4
		14'	GLCSLX-FS-500-23 (S or AL)-94-14	Steel	30'	54	13 1/8	20 7/8	28 3/8	12 3/4	7 1/8	30 3/8	24'-6"	16'-1 3/8"	4	4
	103'	10'	GLCS-FS-500-23 (S or AL)-103-10	Steel	20'	54	13 1/8	16 1/2	24	12 3/4	7 1/8	30 3/8	24'-4"	11'-9"	3	6
		10'	AL-FS-500-23-103-10	Alum	20'	54	13 1/4	23 7/8	-	12 5/8	7 1/4	30 3/8	24'-4"	12'-4 3/8"	3	6
		10'	GLCSL-FS-500-23 (S or AL)-103-10	Steel	25'	54	13 1/8	18 7/8	26 3/8	12 3/4	7 1/8	30 3/8	24'-4"	11'-11 3/8"	3	5
		12'	GLCS-FS-500-23 (S or AL)-103-12	Steel	20'	54	13 1/8	16 1/2	24	12 3/4	7 1/8	30 3/8	24'-6"	13'-9"	4	6
		12'	AL-FS-500-23-103-12	Alum	20'	54	13 1/4	23 7/8	-	12 5/8	7 1/4	30 3/8	24'-6"	14'-4 3/8"	4	6
		12'	GLCSL-FS-500-23 (S or AL)-103-12	Steel	25'	54	13 1/8	18 7/8	26 3/8	12 3/4	7 1/8	30 3/8	24'-6"	13'-11 3/8"	4	5
		14'	GLCS-FS-500-23 (S or AL)-103-14	Steel	20'	54	13 1/8	16 1/2	24	12 3/4	7 1/8	30 3/8	24'-6"	15'-9"	4	6
		14'	AL-FS-500-23-103-14	Alum	20'	54	13 1/4	23 7/8	-	12 5/8	7 1/4	30 3/8	24'-6"	16'-4 3/8"	4	6
	124'	10'	GLCSLX-FS-500-23 (S or AL)-124-10	Steel	30'	54	13 1/8	20 7/8	28 3/8	12 3/4	7 1/8	30 3/8	24'-4"	12'-1 3/8"	3	5
		12'	GLCSLX-FS-500-23 (S or AL)-124-12	Steel	30'	54	13 1/8	20 7/8	28 3/8	12 3/4	7 1/8	30 3/8	24'-6"	14'-1 3/8"	4	5
		14'	GLCSLX-FS-500-23 (S or AL)-124-14	Steel	30'	54	13 1/8	20 7/8	28 3/8	12 3/4	7 1/8	30 3/8	24'-6"	16'-1 3/8"	4	5

*This column provides the total number of support assemblies based on the "L1" dimensions shown. Support assemblies are designed to AISC specifications and do not require bracing. If no movement of the support assembly is preferred, then bracing to the building steel is recommended (not included).

To Determine Hook Coverage: [Bridge Travel on Runway = Runway Length - (2xL8)] by [Hoist Trolley Travel on Bridge = Bridge Length - L3 - L6] (L6 allows for festoon stack-up).

Gorbel® Free Standing Work Station Bridge Crane Kits include: bridge, runways, the appropriate number of support assemblies, hoist trolley, end trucks, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel runway lengths greater than 63' and all aluminum systems), festoon stack-up section, splice joints and hanger brackets. Hoist and anchor bolts provided by others.

Dimensions are for reference only and are subject to change without notice.

500# CAPACITY

FREE STANDING WORK STATION BRIDGE CRANES

BRIDGE LENGTH (L)	RUNWAY LENGTH	TS	MODEL NUMBER	TRACK MAT.	RUNWAY			BRIDGE					SUPPORT STRUCTURE			
					MAX. L1	L7 in	L8 in	H3 in	H3A in	H4 in	L3 in	L6 in	OAW	OAH	D in	*Ld
28'	23'	10'	GLCS-FS-500-28 (S or AL)-23-10	Steel	20'	9	23 1/4	18 3/8	22 5/8	15 1/8	7 1/8	31 1/4	29'-4"	11'-11 7/8"	3	2
		10'	AL-FS-500-28-23-10	Alum	20'	13	23 3/8	22 5/8	-	13 1/8	7 7/8	37 1/8	29'-4"	12'-4 1/8"	3	2
		12'	GLCS-FS-500-28 (S or AL)-23-12	Steel	20'	9	23 1/4	18 3/8	22 5/8	15 1/8	7 1/8	31 1/4	29'-6"	13'-11 7/8"	4	2
		12'	AL-FS-500-28-23-12	Alum	20'	13	23 3/8	22 5/8	-	13 1/8	7 7/8	37 1/8	29'-6"	14'-4 1/8"	4	2
		14'	GLCS-FS-500-28 (S or AL)-23-14	Steel	20'	9	23 1/4	18 3/8	22 5/8	15 1/8	7 1/8	31 1/4	29'-6"	15'-11 7/8"	4	2
		14'	AL-FS-500-28-23-14	Alum	20'	13	23 3/8	22 5/8	-	13 1/8	7 7/8	37 1/8	29'-6"	16'-4 1/8"	4	2
	28'	10'	GLCSL-FS-500-28 (S or AL)-28-10	Steel	25'	9	23 1/4	20 3/4	25	15 1/8	7 1/8	31 1/4	29'-4"	12'-2 1/4"	3	2
		12'	GLCSL-FS-500-28 (S or AL)-28-12	Steel	25'	9	23 1/4	20 3/4	25	15 1/8	7 1/8	31 1/4	29'-6"	14'-2 1/4"	4	2
		14'	GLCSL-FS-500-28 (S or AL)-28-14	Steel	25'	9	23 1/4	20 3/4	25	15 1/8	7 1/8	31 1/4	29'-6"	16'-2 1/4"	4	2
	33'	10'	GLCS-FS-500-28 (S or AL)-33-10	Steel	20'	9	23 1/4	18 3/8	22 5/8	15 1/8	7 1/8	31 1/4	29'-4"	11'-11 7/8"	3	3
		10'	AL-FS-500-28-33-10	Alum	20'	19	23 3/8	22 5/8	-	13 1/8	7 7/8	37 1/8	29'-4"	12'-4 1/8"	3	3
		12'	GLCS-FS-500-28 (S or AL)-33-12	Steel	20'	9	23 1/4	18 3/8	22 5/8	15 1/8	7 1/8	31 1/4	29'-6"	13'-11 7/8"	4	3
		12'	AL-FS-500-28-33-12	Alum	20'	19	23 3/8	22 5/8	-	13 1/8	7 7/8	37 1/8	29'-6"	14'-4 1/8"	4	3
		14'	GLCS-FS-500-28 (S or AL)-33-14	Steel	20'	9	23 1/4	18 3/8	22 5/8	15 1/8	7 1/8	31 1/4	29'-6"	15'-11 7/8"	4	3
		14'	AL-FS-500-28-33-14	Alum	20'	19	23 3/8	22 5/8	-	13 1/8	7 7/8	37 1/8	29'-6"	16'-4 1/8"	4	3
	34'	10'	GLCSLX-FS-500-28 (S or AL)-34-10	Steel	30'	9	23 1/4	22 3/4	27	15 1/8	7 1/8	31 1/4	29'-4"	12'-4 1/4"	3	2
		12'	GLCSLX-FS-500-28 (S or AL)-34-12	Steel	30'	9	23 1/4	22 3/4	27	15 1/8	7 1/8	31 1/4	29'-6"	14'-4 1/4"	4	2
		14'	GLCSLX-FS-500-28 (S or AL)-34-14	Steel	30'	9	23 1/4	22 3/4	27	15 1/8	7 1/8	31 1/4	29'-6"	16'-4 1/4"	4	2
	43'	10'	GLCS-FS-500-28 (S or AL)-43-10	Steel	20'	13	23 1/4	18 3/8	22 5/8	15 1/8	7 1/8	31 1/4	29'-4"	11'-11 7/8"	3	3
		10'	AL-FS-500-28-43-10	Alum	20'	26	23 3/8	22 5/8	-	13 1/8	7 7/8	37 1/8	29'-4"	12'-4 1/8"	3	3
		12'	GLCS-FS-500-28 (S or AL)-43-12	Steel	20'	13	23 1/4	18 3/8	22 5/8	15 1/8	7 1/8	31 1/4	29'-6"	13'-11 7/8"	4	3
		12'	AL-FS-500-28-43-12	Alum	20'	26	23 3/8	22 5/8	-	13 1/8	7 7/8	37 1/8	29'-6"	14'-4 1/8"	4	3
		14'	GLCS-FS-500-28 (S or AL)-43-14	Steel	20'	13	23 1/4	18 3/8	22 5/8	15 1/8	7 1/8	31 1/4	29'-6"	15'-11 7/8"	4	3
		14'	AL-FS-500-28-43-14	Alum	20'	26	23 3/8	22 5/8	-	13 1/8	7 7/8	37 1/8	29'-6"	16'-4 1/8"	4	3
	53'	10'	GLCS-FS-500-28 (S or AL)-53-10	Steel	20'	13	23 1/4	18 3/8	22 5/8	15 1/8	7 1/8	31 1/4	29'-4"	11'-11 7/8"	3	4
		10'	AL-FS-500-28-53-10	Alum	20'	30	23 3/8	22 5/8	-	13 1/8	7 7/8	37 1/8	29'-4"	12'-4 1/8"	3	4
		12'	GLCSL-FS-500-28 (S or AL)-53-10	Steel	25'	13	23 1/4	20 3/4	25	15 1/8	7 1/8	31 1/4	29'-4"	12'-2 1/4"	3	3
		12'	GLCS-FS-500-28 (S or AL)-53-12	Steel	20'	13	23 1/4	18 3/8	22 5/8	15 1/8	7 1/8	31 1/4	29'-6"	13'-11 7/8"	4	4
		12'	AL-FS-500-28-53-12	Alum	20'	30	23 3/8	22 5/8	-	13 1/8	7 7/8	37 1/8	29'-6"	14'-4 1/8"	4	4
		12'	GLCSL-FS-500-28 (S or AL)-53-12	Steel	25'	13	23 1/4	20 3/4	25	15 1/8	7 1/8	31 1/4	29'-6"	14'-2 1/4"	4	3
	53'	14'	GLCS-FS-500-28 (S or AL)-53-14	Steel	20'	13	23 1/4	18 3/8	22 5/8	15 1/8	7 1/8	31 1/4	29'-6"	15'-11 7/8"	4	4
		14'	AL-FS-500-28-53-14	Alum	20'	30	23 3/8	22 5/8	-	13 1/8	7 7/8	37 1/8	29'-6"	16'-4 1/8"	4	4
		14'	GLCSL-FS-500-28 (S or AL)-53-14	Steel	25'	13	23 1/4	20 3/4	25	15 1/8	7 1/8	31 1/4	29'-6"	16'-2 1/4"	4	3
	63'	10'	GLCS-FS-500-28 (S or AL)-63-10	Steel	20'	19	23 1/4	18 3/8	22 5/8	15 1/8	7 1/8	31 1/4	29'-4"	11'-11 7/8"	3	4
		10'	AL-FS-500-28-63-10	Alum	20'	36	23 3/8	22 5/8	-	13 1/8	7 7/8	37 1/8	29'-4"	12'-4 1/8"	3	4
		12'	GLCS-FS-500-28 (S or AL)-63-12	Steel	20'	19	23 1/4	18 3/8	22 5/8	15 1/8	7 1/8	31 1/4	29'-6"	13'-11 7/8"	4	4
		12'	AL-FS-500-28-63-12	Alum	20'	36	23 3/8	22 5/8	-	13 1/8	7 7/8	37 1/8	29'-6"	14'-4 1/8"	4	4
		14'	GLCS-FS-500-28 (S or AL)-63-14	Steel	20'	19	23 1/4	18 3/8	22 5/8	15 1/8	7 1/8	31 1/4	29'-6"	15'-11 7/8"	4	4
		14'	AL-FS-500-28-63-14	Alum	20'	36	23 3/8	22 5/8	-	13 1/8	7 7/8	37 1/8	29'-6"	16'-4 1/8"	4	4
	64'	10'	GLCSLX-FS-500-28 (S or AL)-64-10	Steel	30'	36	23 1/4	22 3/4	27	15 1/8	7 1/8	37 1/8	29'-4"	12'-4 1/4"	3	3
		12'	GLCSLX-FS-500-28 (S or AL)-64-12	Steel	30'	36	23 1/4	22 3/4	27	15 1/8	7 1/8	37 1/8	29'-6"	14'-4 1/4"	4	3
		14'	GLCSLX-FS-500-28 (S or AL)-64-14	Steel	30'	36	23 1/4	22 3/4	27	15 1/8	7 1/8	37 1/8	29'-6"	16'-4 1/4"	4	3
	78'	10'	GLCSL-FS-500-28 (S or AL)-78-10	Steel	25'	46	23 1/4	20 3/4	25	15 1/8	7 1/8	37 1/8	29'-4"	12'-2 1/4"	3	4
		12'	GLCSL-FS-500-28 (S or AL)-78-12	Steel	25'	46	23 1/4	20 3/4	25	15 1/8	7 1/8	37 1/8	29'-6"	14'-2 1/4"	4	4
		14'	GLCSL-FS-500-28 (S or AL)-78-14	Steel	25'	46	23 1/4	20 3/4	25	15 1/8	7 1/8	37 1/8	29'-6"	16'-2 1/4"	4	4
	83'	10'	GLCS-FS-500-28 (S or AL)-83-10	Steel	20'	46	23 1/4	18 3/8	22 5/8	15 1/8	7 1/8	37 1/8	29'-4"	11'-11 7/8"	3	5
		10'	AL-FS-500-28-83-10	Alum	20'	46	23 3/8	22 5/8	-	13 1/8	7 7/8	37 1/8	29'-4"	12'-4 1/8"	3	5
		12'	GLCS-FS-500-28 (S or AL)-83-12	Steel	20'	46	23 1/4	18 3/8	22 5/8	15 1/8	7 1/8	37 1/8	29'-6"	13'-11 7/8"	4	5
		12'	AL-FS-500-28-83-12	Alum	20'	46	23 3/8	22 5/8	-	13 1/8	7 7/8	37 1/8	29'-6"	14'-4 1/8"	4	5
		14'	GLCS-FS-500-28 (S or AL)-83-14	Steel	20'	46	23 1/4	18 3/8	22 5/8	15 1/8	7 1/8	37 1/8	29'-6"	15'-11 7/8"	4	5
		14'	AL-FS-500-28-83-14	Alum	20'	46	23 3/8	22 5/8	-	13 1/8	7 7/8	37 1/8	29'-6"	16'-4 1/8"	4	5
	94'	10'	GLCSLX-FS-500-28 (S or AL)-94-10	Steel	30'	54	23 1/4	22 3/4	27	15 1/8	7 1/8	37 1/8	29'-4"	12'-4 1/4"	3	4
		12'	GLCSLX-FS-500-28 (S or AL)-94-12	Steel	30'	54	23 1/4	22 3/4	27	15 1/8	7 1/8	37 1/8	29'-6"	14'-4 1/4"	4	4
		14'	GLCSLX-FS-500-28 (S or AL)-94-14	Steel	30'	54	23 1/4	22 3/4	27	15 1/8	7 1/8	37 1/8	29'-6"	16'-4 1/4"	4	4
	103'	10'	GLCS-FS-500-28 (S or AL)-103-10	Steel	20'	54	23 1/4	18 3/8	22 5/8	15 1/8	7 1/8	37 1/8	29'-4"	11'-11 7/8"	3	6
		10'	AL-FS-500-28-103-10	Alum	20'	54	23 3/8	22 5/8	-	13 1/8	7 7/8	37 1/8	29'-4"	12'-4 1/8"	3	6
		12'	GLCSL-FS-500-28 (S or AL)-103-10	Steel	25'	54	23 1/4	20 3/4	25	15 1/8	7 1/8	37 1/8	29'-4"	12'-2 1/4"	3	5
		12'	GLCS-FS-500-28 (S or AL)-103-12	Steel	20'	54	23 1/4	18 3/8	22 5/8	15 1/8	7 1/8	37 1/8	29'-6"	13'-11 7/8"	4	6
		12'	AL-FS-500-28-103-12	Alum	20'	54	23 3/8	22 5/8	-	13 1/8	7 7/8	37 1/8	29'-6"	14'-4 1/8"	4	6
		12'	GLCSL-FS-500-28 (S or AL)-103-12	Steel	25'	54	23 1/4	20 3/4	25	15 1/8	7 1/8	37 1/8	29'-6"	14'-2 1/4"	4	5
		14'	GLCS-FS-500-28 (S or AL)-103-14	Steel	20'	54	23 1/4	18 3/8	22 5/8	15 1/8	7 1/8	37 1/8	29'-6"	15'-11 7/8"	4	6
		14'	AL-FS-500-28-103-14	Alum	20'	54	23 3/8	22 5/8	-	13 1/8	7 7/8	37 1/8	29'-6"	16'-4 1/8"	4	6
	124'	10'	GLCSLX-FS-500-28 (S or AL)-124-10	Steel	30'	54	23 1/4	22 3/4	27	15 1/8	7 1/8	37 1/8	29'-4"	12'-4 1/4"	3	5
		12'	GLCSLX-FS-500-28 (S or AL)-124-12	Steel	30'	54	23 1/4	22 3/4	27	15 1/8	7 1/8	37 1/8	29'-6"	14'-4 1/4"	4	5
		14'	GLCSLX-FS-500-28 (S or AL)-124-14	Steel	30'	54	23 1/4	22 3/4	27	15 1/8	7 1/8	37 1/8	29'-6"	16'-4 1/4"	4	5

*This column provides the total number of support assemblies based on the "L1" dimensions shown. Support assemblies are designed to AISC specifications and do not require bracing. If no movement of the support assembly is preferred, then bracing to the building steel is recommended (not included).

To Determine Hook Coverage: [Bridge Travel on Runway = Runway Length - (2xL8)] by [Hoist Trolley Travel on Bridge = Bridge Length - L3 - L6] (L6 allows for festoon stack-up).

Gorbel® Free Standing Work Station Bridge Crane Kits include: bridge, runways, the appropriate number of support assemblies, hoist trolley, end trucks, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel runway lengths greater than 63' and all aluminum systems), festoon stack-up section, splice joints and hanger brackets. Hoist and anchor bolts provided by others.

Dimensions are for reference only and are subject to change without notice.

FREE STANDING WORK STATION BRIDGE CRANES

BRIDGE LENGTH (L)	RUNWAY LENGTH	TS	MODEL NUMBER	TRACK MAT.	RUNWAY			BRIDGE					SUPPORT STRUCTURE			
					MAX. L1	L7 in	L8 in	H3 in	H3A in	H4 in	L3 in	L6 in	OAW	OAH	D in	SPT*
34'	28'	10'	GLCSL-FS-500-34 (S or AL)-28-10	Steel	25'	9	23 1/4	20 3/4	25	17 1/8	7 1/8	20 1/2	35'-6"	12'-3 1/4"	4	2
		12'	GLCSL-FS-500-34 (S or AL)-28-12	Steel	25'	9	23 1/4	20 3/4	25	17 1/8	7 1/8	20 1/2	35'-6"	14'-3 1/4"	4	2
		14'	GLCSL-FS-500-34 (S or AL)-28-14	Steel	25'	9	23 1/4	20 3/4	25	17 1/8	7 1/8	20 1/2	35'-6"	16'-3 1/4"	4	2
	33'	10'	GLCS-FS-500-34 (S or AL)-33-10	Steel	20'	9	23 1/4	20 3/8	22 5/8	17 1/8	7 1/8	20 1/2	35'-6"	12'-2 7/8"	4	3
		10'	AL-FS-500-34-33-10	Alum	20'	19	23 3/8	22 5/8	-	15 1/4	7 7/8	43 7/8	35'-6"	12'-5 1/8"	4	3
		12'	GLCS-FS-500-34 (S or AL)-33-12	Steel	20'	9	23 1/4	20 3/8	22 5/8	17 1/8	7 1/8	20 1/2	35'-6"	14'-2 7/8"	4	3
		12'	AL-FS-500-34-33-12	Alum	20'	19	23 3/8	22 5/8	-	15 1/4	7 7/8	43 7/8	35'-6"	14'-5 1/8"	4	3
		14'	GLCS-FS-500-34 (S or AL)-33-14	Steel	20'	9	23 1/4	20 3/8	22 5/8	17 1/8	7 1/8	20 1/2	35'-6"	16'-2 7/8"	4	3
		14'	AL-FS-500-34-33-14	Alum	20'	19	23 3/8	22 5/8	-	15 1/4	7 7/8	43 7/8	35'-6"	16'-5 1/8"	4	3
	34'	10'	GLCSLX-FS-500-34 (S or AL)-34-10	Steel	30'	9	23 1/4	22 3/4	27	17 1/8	7 1/8	20 1/2	35'-6"	12'-5 1/4"	4	2
		12'	GLCSLX-FS-500-34 (S or AL)-34-12	Steel	30'	9	23 1/4	22 3/4	27	17 1/8	7 1/8	20 1/2	35'-6"	14'-5 1/4"	4	2
		14'	GLCSLX-FS-500-34 (S or AL)-34-14	Steel	30'	9	23 1/4	22 3/4	27	17 1/8	7 1/8	20 1/2	35'-6"	16'-5 1/4"	4	2
	43'	10'	GLCS-FS-500-34 (S or AL)-43-10	Steel	20'	13	23 1/4	20 3/8	22 5/8	17 1/8	7 1/8	20 1/2	35'-6"	12'-2 7/8"	4	3
		10'	AL-FS-500-34-43-10	Alum	20'	26	23 3/8	22 5/8	-	15 1/4	7 7/8	43 7/8	35'-6"	12'-5 1/8"	4	3
		12'	GLCS-FS-500-34 (S or AL)-43-12	Steel	20'	13	23 1/4	20 3/8	22 5/8	17 1/8	7 1/8	20 1/2	35'-6"	14'-2 7/8"	4	3
		12'	AL-FS-500-34-43-12	Alum	20'	26	23 3/8	22 5/8	-	15 1/4	7 7/8	43 7/8	35'-6"	14'-5 1/8"	4	3
		14'	GLCS-FS-500-34 (S or AL)-43-14	Steel	20'	13	23 1/4	20 3/8	22 5/8	17 1/8	7 1/8	20 1/2	35'-6"	16'-2 7/8"	4	3
		14'	AL-FS-500-34-43-14	Alum	20'	26	23 3/8	22 5/8	-	15 1/4	7 7/8	43 7/8	35'-6"	16'-5 1/8"	4	3
	53'	10'	GLCS-FS-500-34 (S or AL)-53-10	Steel	20'	13	23 1/4	20 3/8	22 5/8	17 1/8	7 1/8	20 1/2	35'-6"	12'-2 7/8"	4	4
		10'	AL-FS-500-34-53-10	Alum	20'	30	23 3/8	22 5/8	-	15 1/4	7 7/8	43 7/8	35'-6"	12'-5 1/8"	4	4
		10'	GLCSL-FS-500-34 (S or AL)-53-10	Steel	25'	13	23 1/4	20 3/4	25	17 1/8	7 1/8	20 1/2	35'-6"	12'-3 1/4"	4	3
		12'	GLCS-FS-500-34 (S or AL)-53-12	Steel	20'	13	23 1/4	20 3/8	22 5/8	17 1/8	7 1/8	20 1/2	35'-6"	14'-2 7/8"	4	4
		12'	AL-FS-500-34-53-12	Alum	20'	30	23 3/8	22 5/8	-	15 1/4	7 7/8	43 7/8	35'-6"	14'-5 1/8"	4	4
		12'	GLCSL-FS-500-34 (S or AL)-53-12	Steel	25'	13	23 1/4	20 3/4	25	17 1/8	7 1/8	20 1/2	35'-6"	14'-3 1/4"	4	3
		14'	GLCS-FS-500-34 (S or AL)-53-14	Steel	20'	13	23 1/4	20 3/8	22 5/8	17 1/8	7 1/8	20 1/2	35'-6"	16'-2 7/8"	4	4
		14'	AL-FS-500-34-53-14	Alum	20'	30	23 3/8	22 5/8	-	15 1/4	7 7/8	43 7/8	35'-6"	16'-5 1/8"	4	4
		14'	GLCSL-FS-500-34 (S or AL)-53-14	Steel	25'	13	23 1/4	20 3/4	25	17 1/8	7 1/8	20 1/2	35'-6"	16'-3 1/4"	4	3
	63'	10'	GLCS-FS-500-34 (S or AL)-63-10	Steel	20'	19	23 1/4	20 3/8	22 5/8	17 1/8	7 1/8	20 1/2	35'-6"	12'-2 7/8"	4	4
		10'	AL-FS-500-34-63-10	Alum	20'	36	23 3/8	22 5/8	-	15 1/4	7 7/8	43 7/8	35'-6"	12'-5 1/8"	4	4
		12'	GLCS-FS-500-34 (S or AL)-63-12	Steel	20'	19	23 1/4	20 3/8	22 5/8	17 1/8	7 1/8	20 1/2	35'-6"	14'-2 7/8"	4	4
		12'	AL-FS-500-34-63-12	Alum	20'	36	23 3/8	22 5/8	-	15 1/4	7 7/8	43 7/8	35'-6"	14'-5 1/8"	4	4
		14'	GLCS-FS-500-34 (S or AL)-63-14	Steel	20'	19	23 1/4	20 3/8	22 5/8	17 1/8	7 1/8	20 1/2	35'-6"	16'-2 7/8"	4	4
		14'	AL-FS-500-34-63-14	Alum	20'	36	23 3/8	22 5/8	-	15 1/4	7 7/8	43 7/8	35'-6"	16'-5 1/8"	4	4
	64'	10'	GLCSLX-FS-500-34 (S or AL)-64-10	Steel	30'	36	23 1/4	22 3/4	27	17 1/8	7 1/8	43 7/8	35'-6"	12'-5 1/4"	4	3
		12'	GLCSLX-FS-500-34 (S or AL)-64-12	Steel	30'	36	23 1/4	22 3/4	27	17 1/8	7 1/8	43 7/8	35'-6"	14'-5 1/4"	4	3
		14'	GLCSLX-FS-500-34 (S or AL)-64-14	Steel	30'	36	23 1/4	22 3/4	27	17 1/8	7 1/8	43 7/8	35'-6"	16'-5 1/4"	4	3
	78'	10'	GLCSL-FS-500-34 (S or AL)-78-10	Steel	25'	46	23 1/4	20 3/4	25	17 1/8	7 1/8	43 7/8	35'-6"	12'-3 1/4"	4	4
		12'	GLCSL-FS-500-34 (S or AL)-78-12	Steel	25'	46	23 1/4	20 3/4	25	17 1/8	7 1/8	43 7/8	35'-6"	14'-3 1/4"	4	4
		14'	GLCSL-FS-500-34 (S or AL)-78-14	Steel	25'	46	23 1/4	20 3/4	25	17 1/8	7 1/8	43 7/8	35'-6"	16'-3 1/4"	4	4
	83'	10'	GLCS-FS-500-34 (S or AL)-83-10	Steel	20'	46	23 1/4	20 3/8	22 5/8	17 1/8	7 1/8	43 7/8	35'-6"	12'-2 7/8"	4	5
		10'	AL-FS-500-34-83-10	Alum	20'	46	23 3/8	22 5/8	-	15 1/4	7 7/8	43 7/8	35'-6"	12'-5 1/8"	4	5
		12'	GLCS-FS-500-34 (S or AL)-83-12	Steel	20'	46	23 1/4	20 3/8	22 5/8	17 1/8	7 1/8	43 7/8	35'-6"	14'-2 7/8"	4	5
		12'	AL-FS-500-34-83-12	Alum	20'	46	23 3/8	22 5/8	-	15 1/4	7 7/8	43 7/8	35'-6"	14'-5 1/8"	4	5
		14'	GLCS-FS-500-34 (S or AL)-83-14	Steel	20'	46	23 1/4	20 3/8	22 5/8	17 1/8	7 1/8	43 7/8	35'-6"	16'-2 7/8"	4	5
		14'	AL-FS-500-34-83-14	Alum	20'	46	23 3/8	22 5/8	-	15 1/4	7 7/8	43 7/8	35'-6"	16'-5 1/8"	4	5
	94'	10'	GLCSLX-FS-500-34 (S or AL)-94-10	Steel	30'	54	23 1/4	22 3/4	27	17 1/8	7 1/8	43 7/8	35'-6"	12'-5 1/4"	4	4
		12'	GLCSLX-FS-500-34 (S or AL)-94-12	Steel	30'	54	23 1/4	22 3/4	27	17 1/8	7 1/8	43 7/8	35'-6"	14'-5 1/4"	4	4
		14'	GLCSLX-FS-500-34 (S or AL)-94-14	Steel	30'	54	23 1/4	22 3/4	27	17 1/8	7 1/8	43 7/8	35'-6"	16'-5 1/4"	4	4
	103'	10'	GLCS-FS-500-34 (S or AL)-103-10	Steel	20'	54	23 1/4	20 3/8	22 5/8	17 1/8	7 1/8	43 7/8	35'-6"	12'-2 7/8"	4	6
		10'	AL-FS-500-34-103-10	Alum	20'	54	23 3/8	22 5/8	-	15 1/4	7 7/8	43 7/8	35'-6"	12'-5 1/8"	4	6
		12'	GLCSL-FS-500-34 (S or AL)-103-10	Steel	25'	54	23 1/4	20 3/4	25	17 1/8	7 1/8	43 7/8	35'-6"	12'-3 1/4"	4	5
		12'	GLCS-FS-500-34 (S or AL)-103-12	Steel	20'	54	23 1/4	20 3/8	22 5/8	17 1/8	7 1/8	43 7/8	35'-6"	14'-2 7/8"	4	6
		12'	AL-FS-500-34-103-12	Alum	20'	54	23 3/8	22 5/8	-	15 1/4	7 7/8	43 7/8	35'-6"	14'-5 1/8"	4	6
		12'	GLCSL-FS-500-34 (S or AL)-103-12	Steel	25'	54	23 1/4	20 3/4	25	17 1/8	7 1/8	43 7/8	35'-6"	14'-3 1/4"	4	5
		14'	GLCS-FS-500-34 (S or AL)-103-14	Steel	20'	54	23 1/4	20 3/8	22 5/8	17 1/8	7 1/8	43 7/8	35'-6"	16'-2 7/8"	4	6
		14'	AL-FS-500-34-103-14	Alum	20'	54	23 3/8	22 5/8	-	15 1/4	7 7/8	43 7/8	35'-6"	16'-5 1/8"	4	6
	124'	10'	GLCSLX-FS-500-34 (S or AL)-124-10	Steel	30'	54	23 1/4	22 3/4	27	17 1/8	7 1/8	43 7/8	35'-6"	12'-5 1/4"	4	5
		12'	GLCSLX-FS-500-34 (S or AL)-124-12	Steel	30'	54	23 1/4	22 3/4	27	17 1/8	7 1/8	43 7/8	35'-6"	14'-5 1/4"	4	5
		14'	GLCSLX-FS-500-34 (S or AL)-124-14	Steel	30'	54	23 1/4	22 3/4	27	17 1/8	7 1/8	43 7/8	35'-6"	16'-5 1/4"	4	5

*This column provides the total number of support assemblies based on the "L1" dimensions shown. Support assemblies are designed to AISC specifications and do not require bracing. If no movement of the support assembly is preferred, then bracing to the building steel is recommended (not included).

To Determine Hook Coverage: [Bridge Travel on Runway = Runway Length - (2xL8)] by [Hoist Trolley Travel on Bridge = Bridge Length - L3 - L6] (L6 allows for festoon stack-up).

Gorbel® Free Standing Work Station Bridge Crane Kits include: bridge, runways, the appropriate number of support assemblies, hoist trolley, end trucks, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel runway lengths greater than 63' and all aluminum systems), festoon stack-up section, splice joints and hanger brackets. Hoist and anchor bolts provided by others.

Dimensions are for reference only and are subject to change without notice.

1000# CAPACITY

FREE STANDING WORK STATION BRIDGE CRANES

BRIDGE LENGTH (L)	RUNWAY LENGTH	TS	MODEL NUMBER	TRACK MAT.	RUNWAY			BRIDGE					SUPPORT STRUCTURE			
					MAX. L1	L7 in	L8 in	H3 in	H3A in	H4 in	L3 in	L6 in	OAW	OAH	D in	*LdS
10'	11'-6"	10'	GLCS-FS-1000-10 (S or AL)-11.5-10	Steel	20'	9	15	18 1/8	22 1/8	7 5/8	7 7/8	13 3/8	11'-6"	11'-10 5/8"	4	2
		12'	GLCS-FS-1000-10 (S or AL)-11.5-12	Steel	20'	9	15	18 1/8	22 1/8	7 5/8	7 7/8	13 3/8	11'-6"	13'-10 5/8"	4	2
		14'	GLCSL-FS-1000-10 (S or AL)-11.5-14	Steel	20'	9	15	18 1/8	22 1/8	7 5/8	7 7/8	13 3/8	11'-8"	15'-10 5/8"	5	2
	23'	10'	GLCS-FS-1000-10 (S or AL)-23-10	Steel	20'	9	15	18 1/8	22 1/8	7 5/8	7 7/8	13 3/8	11'-6"	11'-10 5/8"	4	2
		10'	AL-FS-1000-10-23-10	Alum	20'	13	15	22 1/8	-	13 1/8	7 7/8	17 1/2	11'-6"	12'-2 5/8"	4	2
		12'	GLCS-FS-1000-10 (S or AL)-23-12	Steel	20'	9	15	18 1/8	22 1/8	7 5/8	7 7/8	13 3/8	11'-6"	13'-10 5/8"	4	2
		12'	AL-FS-1000-10-23-12	Alum	20'	13	15	22 1/8	-	13 1/8	7 7/8	17 1/2	11'-6"	14'-2 5/8"	4	2
		14'	GLCS-FS-1000-10 (S or AL)-23-14	Steel	20'	9	15	18 1/8	22 1/8	7 5/8	7 7/8	13 3/8	11'-8"	15'-10 5/8"	5	2
		14'	AL-FS-1000-10-23-14	Alum	20'	13	15	22 1/8	-	13 1/8	7 7/8	17 1/2	11'-8"	16'-2 5/8"	5	2
	28'	10'	GLCSL-FS-1000-10 (S or AL)-28-10	Steel	25'	13	15	21	25	7 5/8	7 7/8	13 3/8	11'-6"	12'-1 1/2"	4	2
		12'	GLCSL-FS-1000-10 (S or AL)-28-12	Steel	25'	13	15	21	25	7 5/8	7 7/8	13 3/8	11'-6"	14'-1 1/2"	4	2
		14'	GLCSL-FS-1000-10 (S or AL)-28-14	Steel	25'	13	15	21	25	7 5/8	7 7/8	13 3/8	11'-8"	16'-1 1/2"	5	2
	33'	10'	GLCS-FS-1000-10 (S or AL)-33-10	Steel	20'	13	15	18 1/8	22 1/8	7 5/8	7 7/8	13 3/8	11'-6"	11'-10 5/8"	4	3
		10'	AL-FS-1000-10-33-10	Alum	20'	19	15	22 1/8	-	13 1/8	7 7/8	17 1/2	11'-6"	12'-2 5/8"	4	3
		12'	GLCS-FS-1000-10 (S or AL)-33-12	Steel	20'	13	15	18 1/8	22 1/8	7 5/8	7 7/8	13 3/8	11'-6"	13'-10 5/8"	4	3
		12'	AL-FS-1000-10-33-12	Alum	20'	19	15	22 1/8	-	13 1/8	7 7/8	17 1/2	11'-6"	14'-2 5/8"	4	3
		14'	GLCS-FS-1000-10 (S or AL)-33-14	Steel	20'	13	15	18 1/8	22 1/8	7 5/8	7 7/8	13 3/8	11'-8"	15'-10 5/8"	5	3
		14'	AL-FS-1000-10-33-14	Alum	20'	19	15	22 1/8	-	13 1/8	7 7/8	17 1/2	11'-8"	16'-2 5/8"	5	3
	34'	10'	GLCSLX-FS-1000-10 (S or AL)-34-10	Steel	30'	13	15	24 1/8	28 1/8	7 5/8	7 7/8	13 3/8	11'-6"	12'-4 5/8"	4	2
		12'	GLCSLX-FS-1000-10 (S or AL)-34-12	Steel	30'	13	15	24 1/8	28 1/8	7 5/8	7 7/8	13 3/8	11'-6"	14'-4 5/8"	4	2
		14'	GLCSLX-FS-1000-10 (S or AL)-34-14	Steel	30'	13	15	24 1/8	28 1/8	7 5/8	7 7/8	13 3/8	11'-8"	16'-4 5/8"	5	2
	43'	10'	GLCS-FS-1000-10 (S or AL)-43-10	Steel	20'	19	15	18 1/8	22 1/8	7 5/8	7 7/8	13 3/8	11'-6"	11'-10 5/8"	4	3
		10'	AL-FS-1000-10-43-10	Alum	20'	26	15	22 1/8	-	13 1/8	7 7/8	17 1/2	11'-6"	12'-2 5/8"	4	3
		12'	GLCS-FS-1000-10 (S or AL)-43-12	Steel	20'	19	15	18 1/8	22 1/8	7 5/8	7 7/8	13 3/8	11'-6"	13'-10 5/8"	4	3
		12'	AL-FS-1000-10-43-12	Alum	20'	26	15	22 1/8	-	13 1/8	7 7/8	17 1/2	11'-6"	14'-2 5/8"	4	3
		14'	GLCS-FS-1000-10 (S or AL)-43-14	Steel	20'	19	15	18 1/8	22 1/8	7 5/8	7 7/8	13 3/8	11'-8"	15'-10 5/8"	5	3
		14'	AL-FS-1000-10-43-14	Alum	20'	26	15	22 1/8	-	13 1/8	7 7/8	17 1/2	11'-8"	16'-2 5/8"	5	3
	53'	10'	GLCS-FS-1000-10 (S or AL)-53-10	Steel	20'	19	15	18 1/8	22 1/8	7 5/8	7 7/8	13 3/8	11'-6"	11'-10 5/8"	4	4
		10'	AL-FS-1000-10-53-10	Alum	20'	30	15	22 1/8	-	13 1/8	7 7/8	17 1/2	11'-6"	12'-2 5/8"	4	4
		10'	GLCSL-FS-1000-10 (S or AL)-53-10	Steel	25'	19	15	21	25	7 5/8	7 7/8	13 3/8	11'-6"	12'-1 1/2"	4	3
		12'	GLCS-FS-1000-10 (S or AL)-53-12	Steel	20'	19	15	18 1/8	22 1/8	7 5/8	7 7/8	13 3/8	11'-6"	13'-10 5/8"	4	4
		12'	AL-FS-1000-10-53-12	Alum	20'	30	15	22 1/8	-	13 1/8	7 7/8	17 1/2	11'-6"	14'-2 5/8"	4	4
		12'	GLCSL-FS-1000-10 (S or AL)-53-12	Steel	25'	19	15	21	25	7 5/8	7 7/8	13 3/8	11'-6"	14'-1 1/2"	4	3
		14'	GLCS-FS-1000-10 (S or AL)-53-14	Steel	20'	19	15	18 1/8	22 1/8	7 5/8	7 7/8	13 3/8	11'-8"	15'-10 5/8"	5	4
		14'	AL-FS-1000-10-53-14	Alum	20'	30	15	22 1/8	-	13 1/8	7 7/8	17 1/2	11'-8"	16'-2 5/8"	5	4
	63'	10'	GLCS-FS-1000-10 (S or AL)-63-10	Steel	20'	26	15	18 1/8	22 1/8	7 5/8	7 7/8	13 3/8	11'-6"	11'-10 5/8"	4	4
		10'	AL-FS-1000-10-63-10	Alum	20'	36	15	22 1/8	-	13 1/8	7 7/8	17 1/2	11'-6"	12'-2 5/8"	4	4
		12'	GLCS-FS-1000-10 (S or AL)-63-12	Steel	20'	26	15	18 1/8	22 1/8	7 5/8	7 7/8	13 3/8	11'-6"	13'-10 5/8"	4	4
		12'	AL-FS-1000-10-63-12	Alum	20'	36	15	22 1/8	-	13 1/8	7 7/8	17 1/2	11'-6"	14'-2 5/8"	4	4
		14'	GLCS-FS-1000-10 (S or AL)-63-14	Steel	20'	26	15	18 1/8	22 1/8	7 5/8	7 7/8	13 3/8	11'-8"	15'-10 5/8"	5	4
		14'	AL-FS-1000-10-63-14	Alum	20'	36	15	22 1/8	-	13 1/8	7 7/8	17 1/2	11'-8"	16'-2 5/8"	5	4
	64'	10'	GLCSLX-FS-1000-10 (S or AL)-64-10	Steel	30'	36	15	24 1/8	28 1/8	7 5/8	7 7/8	23 3/8	11'-6"	12'-4 5/8"	4	3
		12'	GLCSLX-FS-1000-10 (S or AL)-64-12	Steel	30'	36	15	24 1/8	28 1/8	7 5/8	7 7/8	23 3/8	11'-6"	14'-4 5/8"	4	3
		14'	GLCSLX-FS-1000-10 (S or AL)-64-14	Steel	30'	36	15	24 1/8	28 1/8	7 5/8	7 7/8	23 3/8	11'-8"	16'-4 5/8"	5	3
	78'	10'	GLCSL-FS-1000-10 (S or AL)-78-10	Steel	25'	46	15	21	25	7 5/8	7 7/8	23 3/8	11'-6"	12'-1 1/2"	4	4
		12'	GLCSL-FS-1000-10 (S or AL)-78-12	Steel	25'	46	15	21	25	7 5/8	7 7/8	23 3/8	11'-6"	14'-1 1/2"	4	4
		14'	GLCSL-FS-1000-10 (S or AL)-78-14	Steel	25'	46	15	21	25	7 5/8	7 7/8	23 3/8	11'-8"	16'-1 1/2"	5	4
	83'	10'	GLCS-FS-1000-10 (S or AL)-83-10	Steel	20'	46	15	18 1/8	22 1/8	7 5/8	7 7/8	23 3/8	11'-6"	11'-10 5/8"	4	5
		10'	AL-FS-1000-10-83-10	Alum	20'	46	15	22 1/8	-	13 1/8	7 7/8	17 1/2	11'-6"	12'-2 5/8"	4	5
		12'	GLCS-FS-1000-10 (S or AL)-83-12	Steel	20'	46	15	18 1/8	22 1/8	7 5/8	7 7/8	23 3/8	11'-6"	13'-10 5/8"	4	5
		12'	AL-FS-1000-10-83-12	Alum	20'	46	15	22 1/8	-	13 1/8	7 7/8	17 1/2	11'-6"	14'-2 5/8"	4	5
		14'	GLCS-FS-1000-10 (S or AL)-83-14	Steel	20'	46	15	18 1/8	22 1/8	7 5/8	7 7/8	23 3/8	11'-8"	15'-10 5/8"	5	5
		14'	AL-FS-1000-10-83-14	Alum	20'	46	15	22 1/8	-	13 1/8	7 7/8	17 1/2	11'-8"	16'-2 5/8"	5	5
	94'	10'	GLCSLX-FS-1000-10 (S or AL)-94-10	Steel	30'	54	15	24 1/8	28 1/8	7 5/8	7 7/8	23 3/8	11'-6"	12'-4 5/8"	4	4
		12'	GLCSLX-FS-1000-10 (S or AL)-94-12	Steel	30'	54	15	24 1/8	28 1/8	7 5/8	7 7/8	23 3/8	11'-6"	14'-4 5/8"	4	4
		14'	GLCSLX-FS-1000-10 (S or AL)-94-14	Steel	30'	54	15	24 1/8	28 1/8	7 5/8	7 7/8	23 3/8	11'-8"	16'-4 5/8"	5	4
	103'	10'	GLCS-FS-1000-10 (S or AL)-103-10	Steel	20'	54	15	18 1/8	22 1/8	7 5/8	7 7/8	23 3/8	11'-6"	11'-10 5/8"	4	6
		10'	AL-FS-1000-10-103-10	Alum	20'	54	15	22 1/8	-	13 1/8	7 7/8	17 1/2	11'-6"	12'-2 5/8"	4	6
		10'	GLCSL-FS-1000-10 (S or AL)-103-10	Steel	25'	54	15	21	25	7 5/8	7 7/8	23 3/8	11'-6"	12'-1 1/2"	4	5
		12'	GLCS-FS-1000-10 (S or AL)-103-12	Steel	20'	54	15	18 1/8	22 1/8	7 5/8	7 7/8	23 3/8	11'-6"	13'-10 5/8"	4	6
		12'	AL-FS-1000-10-103-12	Alum	20'	54	15	22 1/8	-	13 1/8	7 7/8	17 1/2	11'-6"	14'-2 5/8"	4	6
		12'	GLCSL-FS-1000-10 (S or AL)-103-12	Steel	25'	54	15	21	25	7 5/8	7 7/8	23 3/8	11'-6"	14'-1 1/2"	4	5
		14'	GLCS-FS-1000-10 (S or AL)-103-14	Steel	20'	54	15	18 1/8	22 1/8	7 5/8	7 7/8	23 3/8	11'-8"	15'-10 5/8"	5	6
		14'	AL-FS-1000-10-103-14	Alum	20'	54	15	22 1/8	-	13 1/8	7 7/8	17 1/2	11'-8"	16'-2 5/8"	5	6
	124'	10'	GLCSLX-FS-1000-10 (S or AL)-124-10	Steel	30'	54	15	24 1/8	28 1/8	7 5/8	7 7/8	23 3/8	11'-6"	12'-4 5/8"	4	5
		12'	GLCSLX-FS-1000-10 (S or AL)-124-12	Steel	30'	54	15	24 1/8	28 1/8	7 5/8	7 7/8	23 3/8	11'-6"	14'-4 5/8"	4	5
		14'	GLCSLX-FS-1000-10 (S or AL)-124-14	Steel	30'	54	15	24 1/8	28 1/8	7 5/8	7 7/8	23 3/8	11'-8"	16'-4 5/8"	5	5

*This column provides the total number of support assemblies based on the "L1" dimensions shown. Support assemblies are designed to AISC specifications and do not require bracing. If no movement of the support assembly is preferred, then bracing to the building steel is recommended (not included).

To Determine Hook Coverage: [Bridge Travel on Runway = Runway Length - (2xL8)] by [Hoist Trolley Travel on Bridge = Bridge Length - L3 - L6] (L6 allows for festoon stack-up).

Gorbel® Free Standing Work Station Bridge Crane Kits include: bridge, runways, the appropriate number of support assemblies, hoist trolley, end trucks, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel runway lengths greater than 63' and all aluminum systems), festoon stack-up section, splice joints and hanger brackets. Hoist and anchor bolts provided by others.

Dimensions are for reference only and are subject to change without notice.

FREE STANDING WORK STATION BRIDGE CRANES

BRIDGE LENGTH (L)	RUNWAY LENGTH	TS	MODEL NUMBER	TRACK MAT.	RUNWAY			BRIDGE					SUPPORT STRUCTURE			
					MAX. L1	L7 in	L8 in	H3 in	H3A in	H4 in	L3 in	L6 in	OAW	OAH	D in	Spt #
15'	23'	10'	GLCS-FS-1000-15 (S or AL)-23-10	Steel	20'	9	15	18 1/8	22 1/8	14 1/8	7 7/8	23 3/8	16'-6"	11'-10 5/8"	4	2
		10'	AL-FS-1000-15-23-10	Alum	20'	13	15	22 1/8	-	13 1/8	7 7/8	24 1/4	16'-6"	12'-2 5/8"	4	2
		12'	GLCS-FS-1000-15 (S or AL)-23-12	Steel	20'	9	15	18 1/8	22 1/8	14 1/8	7 7/8	23 3/8	16'-6"	13'-10 5/8"	4	2
		12'	AL-FS-1000-15-23-12	Alum	20'	13	15	22 1/8	-	13 1/8	7 7/8	24 1/4	16'-6"	14'-2 5/8"	4	2
		14'	GLCS-FS-1000-15 (S or AL)-23-14	Steel	20'	9	15	18 1/8	22 1/8	14 1/8	7 7/8	23 3/8	16'-8"	15'-10 5/8"	5	2
		14'	AL-FS-1000-15-23-14	Alum	20'	13	15	22 1/8	-	13 1/8	7 7/8	24 1/4	16'-8"	16'-2 5/8"	5	2
	28'	10'	GLCSL-FS-1000-15 (S or AL)-28-10	Steel	25'	13	15	21	25	14 1/8	7 7/8	23 3/8	16'-6"	12'-1 1/2"	4	2
		12'	GLCSL-FS-1000-15 (S or AL)-28-12	Steel	25'	13	15	21	25	14 1/8	7 7/8	23 3/8	16'-6"	14'-1 1/2"	4	2
		14'	GLCSL-FS-1000-15 (S or AL)-28-14	Steel	25'	13	15	21	25	14 1/8	7 7/8	23 3/8	16'-8"	16'-1 1/2"	5	2
	33'	10'	GLCS-FS-1000-15 (S or AL)-33-10	Steel	20'	13	15	18 1/8	22 1/8	14 1/8	7 7/8	23 3/8	16'-6"	11'-10 5/8"	4	3
		10'	AL-FS-1000-15-33-10	Alum	20'	19	15	22 1/8	-	13 1/8	7 7/8	24 1/4	16'-6"	12'-2 5/8"	4	3
		12'	GLCS-FS-1000-15 (S or AL)-33-12	Steel	20'	13	15	18 1/8	22 1/8	14 1/8	7 7/8	23 3/8	16'-6"	13'-10 5/8"	4	3
		12'	AL-FS-1000-15-33-12	Alum	20'	19	15	22 1/8	-	13 1/8	7 7/8	24 1/4	16'-6"	14'-2 5/8"	4	3
		14'	GLCS-FS-1000-15 (S or AL)-33-14	Steel	20'	13	15	18 1/8	22 1/8	14 1/8	7 7/8	23 3/8	16'-8"	15'-10 5/8"	5	3
		14'	AL-FS-1000-15-33-14	Alum	20'	19	15	22 1/8	-	13 1/8	7 7/8	24 1/4	16'-8"	16'-2 5/8"	5	3
	34'	10'	GLCSLX-FS-1000-15 (S or AL)-34-10	Steel	30'	13	15	24 1/8	28 1/8	14 1/8	7 7/8	23 3/8	16'-6"	12'-4 5/8"	4	2
		12'	GLCSLX-FS-1000-15 (S or AL)-34-12	Steel	30'	13	15	24 1/8	28 1/8	14 1/8	7 7/8	23 3/8	16'-6"	14'-4 5/8"	4	2
		14'	GLCSLX-FS-1000-15 (S or AL)-34-14	Steel	30'	13	15	24 1/8	28 1/8	14 1/8	7 7/8	23 3/8	16'-8"	16'-4 5/8"	5	2
	43'	10'	GLCS-FS-1000-15 (S or AL)-43-10	Steel	20'	19	15	18 1/8	22 1/8	14 1/8	7 7/8	23 3/8	16'-6"	11'-10 5/8"	4	3
		10'	AL-FS-1000-15-43-10	Alum	20'	26	15	22 1/8	-	13 1/8	7 7/8	24 1/4	16'-6"	12'-2 5/8"	4	3
		12'	GLCS-FS-1000-15 (S or AL)-43-12	Steel	20'	19	15	18 1/8	22 1/8	14 1/8	7 7/8	23 3/8	16'-6"	13'-10 5/8"	4	3
		12'	AL-FS-1000-15-43-12	Alum	20'	26	15	22 1/8	-	13 1/8	7 7/8	24 1/4	16'-6"	14'-2 5/8"	4	3
		14'	GLCS-FS-1000-15 (S or AL)-43-14	Steel	20'	19	15	18 1/8	22 1/8	14 1/8	7 7/8	23 3/8	16'-8"	15'-10 5/8"	5	3
		14'	AL-FS-1000-15-43-14	Alum	20'	26	15	22 1/8	-	13 1/8	7 7/8	24 1/4	16'-8"	16'-2 5/8"	5	3
	53'	10'	GLCS-FS-1000-15 (S or AL)-53-10	Steel	20'	19	15	18 1/8	22 1/8	14 1/8	7 7/8	23 3/8	16'-6"	11'-10 5/8"	4	4
		10'	AL-FS-1000-15-53-10	Alum	20'	30	15	22 1/8	-	13 1/8	7 7/8	24 1/4	16'-6"	12'-2 5/8"	4	4
		10'	GLCSL-FS-1000-15 (S or AL)-53-10	Steel	25'	19	15	21	25	14 1/8	7 7/8	23 3/8	16'-6"	12'-1 1/2"	4	3
		12'	GLCS-FS-1000-15 (S or AL)-53-12	Steel	20'	19	15	18 1/8	22 1/8	14 1/8	7 7/8	23 3/8	16'-6"	13'-10 5/8"	4	4
		12'	AL-FS-1000-15-53-12	Alum	20'	30	15	22 1/8	-	13 1/8	7 7/8	24 1/4	16'-6"	14'-2 5/8"	4	4
		12'	GLCSL-FS-1000-15 (S or AL)-53-12	Steel	25'	19	15	21	25	14 1/8	7 7/8	23 3/8	16'-6"	14'-1 1/2"	4	3
		14'	GLCS-FS-1000-15 (S or AL)-53-14	Steel	20'	19	15	18 1/8	22 1/8	14 1/8	7 7/8	23 3/8	16'-8"	15'-10 5/8"	5	4
		14'	AL-FS-1000-15-53-14	Alum	20'	30	15	22 1/8	-	13 1/8	7 7/8	24 1/4	16'-8"	16'-2 5/8"	5	4
		14'	GLCSL-FS-1000-15 (S or AL)-53-14	Steel	25'	19	15	21	25	14 1/8	7 7/8	23 3/8	16'-8"	16'-1 1/2"	5	3
	63'	10'	GLCS-FS-1000-15 (S or AL)-63-10	Steel	20'	26	15	18 1/8	22 1/8	14 1/8	7 7/8	23 3/8	16'-6"	11'-10 5/8"	4	4
		10'	AL-FS-1000-15-63-10	Alum	20'	36	15	22 1/8	-	13 1/8	7 7/8	24 1/4	16'-6"	12'-2 5/8"	4	4
		12'	GLCS-FS-1000-15 (S or AL)-63-12	Steel	20'	26	15	18 1/8	22 1/8	14 1/8	7 7/8	23 3/8	16'-6"	13'-10 5/8"	4	4
		12'	AL-FS-1000-15-63-12	Alum	20'	36	15	22 1/8	-	13 1/8	7 7/8	24 1/4	16'-6"	14'-2 5/8"	4	4
		14'	GLCS-FS-1000-15 (S or AL)-63-14	Steel	20'	26	15	18 1/8	22 1/8	14 1/8	7 7/8	23 3/8	16'-8"	15'-10 5/8"	5	4
		14'	AL-FS-1000-15-63-14	Alum	20'	36	15	22 1/8	-	13 1/8	7 7/8	24 1/4	16'-8"	16'-2 5/8"	5	4
	64'	10'	GLCSLX-FS-1000-15 (S or AL)-64-10	Steel	30'	36	15	24 1/8	28 1/8	14 1/8	7 7/8	24 1/4	16'-6"	12'-4 5/8"	4	3
		12'	GLCSLX-FS-1000-15 (S or AL)-64-12	Steel	30'	36	15	24 1/8	28 1/8	14 1/8	7 7/8	24 1/4	16'-6"	14'-4 5/8"	4	3
		14'	GLCSLX-FS-1000-15 (S or AL)-64-14	Steel	30'	36	15	24 1/8	28 1/8	14 1/8	7 7/8	24 1/4	16'-8"	16'-4 5/8"	5	3
	78'	10'	GLCSL-FS-1000-15 (S or AL)-78-10	Steel	25'	46	15	21	25	14 1/8	7 7/8	24 1/4	16'-6"	12'-1 1/2"	4	4
		12'	GLCSL-FS-1000-15 (S or AL)-78-12	Steel	25'	46	15	21	25	14 1/8	7 7/8	24 1/4	16'-6"	14'-1 1/2"	4	4
		14'	GLCSL-FS-1000-15 (S or AL)-78-14	Steel	25'	46	15	21	25	14 1/8	7 7/8	24 1/4	16'-8"	16'-1 1/2"	5	4
	83'	10'	GLCS-FS-1000-15 (S or AL)-83-10	Steel	20'	46	15	18 1/8	22 1/8	14 1/8	7 7/8	24 1/4	16'-6"	11'-10 5/8"	4	5
		10'	AL-FS-1000-15-83-10	Alum	20'	46	15	22 1/8	-	13 1/8	7 7/8	24 1/4	16'-6"	12'-2 5/8"	4	5
		12'	GLCS-FS-1000-15 (S or AL)-83-12	Steel	20'	46	15	18 1/8	22 1/8	14 1/8	7 7/8	24 1/4	16'-6"	13'-10 5/8"	4	5
		12'	AL-FS-1000-15-83-12	Alum	20'	46	15	22 1/8	-	13 1/8	7 7/8	24 1/4	16'-6"	14'-2 5/8"	4	5
		14'	GLCS-FS-1000-15 (S or AL)-83-14	Steel	20'	46	15	18 1/8	22 1/8	14 1/8	7 7/8	24 1/4	16'-8"	15'-10 5/8"	5	5
		14'	AL-FS-1000-15-83-14	Alum	20'	46	15	22 1/8	-	13 1/8	7 7/8	24 1/4	16'-8"	16'-2 5/8"	5	5
	94'	10'	GLCSLX-FS-1000-15 (S or AL)-94-10	Steel	30'	54	15	24 1/8	28 1/8	14 1/8	7 7/8	24 1/4	16'-6"	12'-4 5/8"	4	4
		12'	GLCSLX-FS-1000-15 (S or AL)-94-12	Steel	30'	54	15	24 1/8	28 1/8	14 1/8	7 7/8	24 1/4	16'-6"	14'-4 5/8"	4	4
		14'	GLCSLX-FS-1000-15 (S or AL)-94-14	Steel	30'	54	15	24 1/8	28 1/8	14 1/8	7 7/8	24 1/4	16'-8"	16'-4 5/8"	5	4
	103'	10'	GLCS-FS-1000-15 (S or AL)-103-10	Steel	20'	54	15	18 1/8	22 1/8	14 1/8	7 7/8	24 1/4	16'-6"	11'-10 5/8"	4	6
		10'	AL-FS-1000-15-103-10	Alum	20'	54	15	22 1/8	-	13 1/8	7 7/8	24 1/4	16'-6"	12'-2 5/8"	4	6
		10'	GLCSL-FS-1000-15 (S or AL)-103-10	Steel	25'	54	15	21	25	14 1/8	7 7/8	24 1/4	16'-6"	12'-1 1/2"	4	5
		12'	GLCS-FS-1000-15 (S or AL)-103-12	Steel	20'	54	15	18 1/8	22 1/8	14 1/8	7 7/8	24 1/4	16'-6"	13'-10 5/8"	4	6
		12'	AL-FS-1000-15-103-12	Alum	20'	54	15	22 1/8	-	13 1/8	7 7/8	24 1/4	16'-6"	14'-2 5/8"	4	6
		12'	GLCSL-FS-1000-15 (S or AL)-103-12	Steel	25'	54	15	21	25	14 1/8	7 7/8	24 1/4	16'-6"	14'-1 1/2"	4	5
		14'	GLCS-FS-1000-15 (S or AL)-103-14	Steel	20'	54	15	18 1/8	22 1/8	14 1/8	7 7/8	24 1/4	16'-8"	15'-10 5/8"	5	6
		14'	AL-FS-1000-15-103-14	Alum	20'	54	15	22 1/8	-	13 1/8	7 7/8	24 1/4	16'-8"	16'-2 5/8"	5	6
		14'	GLCSL-FS-1000-15 (S or AL)-103-14	Steel	25'	54	15	21	25	14 1/8	7 7/8	24 1/4	16'-8"	16'-1 1/2"	5	5
	124'	10'	GLCSLX-FS-1000-15 (S or AL)-124-10	Steel	30'	54	15	24 1/8	28 1/8	14 1/8	7 7/8	24 1/4	16'-6"	12'-4 5/8"	4	5
		12'	GLCSLX-FS-1000-15 (S or AL)-124-12	Steel	30'	54	15	24 1/8	28 1/8	14 1/8	7 7/8	24 1/4	16'-6"	14'-4 5/8"	4	5
		14'	GLCSLX-FS-1000-15 (S or AL)-124-14	Steel	30'	54	15	24 1/8	28 1/8	14 1/8	7 7/8	24 1/4	16'-8"	16'-4 5/8"	5	5

*This column provides the total number of support assemblies based on the "L1" dimensions shown. Support assemblies are designed to AISC specifications and do not require bracing. If no movement of the support assembly is preferred, then bracing to the building steel is recommended (not included).

To Determine Hook Coverage: [Bridge Travel on Runway = Runway Length - (2xL8)] by [Hoist Trolley Travel on Bridge = Bridge Length - L3 - L6] (L6 allows for festoon stack-up).

Gorbel® Free Standing Work Station Bridge Crane Kits include: bridge, runways, the appropriate number of support assemblies, hoist trolley, end trucks, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel runway lengths greater than 63' and all aluminum systems), festoon stack-up section, splice joints and hanger brackets. Hoist and anchor bolts provided by others.

Dimensions are for reference only and are subject to change without notice.

1000# CAPACITY

FREE STANDING WORK STATION BRIDGE CRANES

BRIDGE LENGTH (L)	RUNWAY LENGTH	TS	MODEL NUMBER	TRACK MAT.	RUNWAY			BRIDGE					SUPPORT STRUCTURE			
					MAX. L1	L7 in	L8 in	H3 in	H3A in	H4 in	L3 in	L6 in	OAW	OAH	D in	#ds
20'	23'	10'	GLCS-FS-1000-20 (S or AL)-23-10	Steel	20'	9	15	18 1/8	22 1/8	14 1/8	7 7/8	23 3/8	21'-6"	11'-10 5/8"	4	2
		10'	AL-FS-1000-20-23-10	Alum	20'	13	15	22 1/8	-	13 1/8	7 7/8	27 5/8	21'-6"	12'-2 5/8"	4	2
		12'	GLCS-FS-1000-20 (S or AL)-23-12	Steel	20'	9	15	18 1/8	22 1/8	14 1/8	7 7/8	23 3/8	21'-6"	13'-10 5/8"	4	2
		12'	AL-FS-1000-20-23-12	Alum	20'	13	15	22 1/8	-	13 1/8	7 7/8	27 5/8	21'-6"	14'-2 5/8"	4	2
		14'	GLCS-FS-1000-20 (S or AL)-23-14	Steel	20'	9	15	18 1/8	22 1/8	14 1/8	7 7/8	23 3/8	21'-8"	15'-10 5/8"	5	2
		14'	AL-FS-1000-20-23-14	Alum	20'	13	15	22 1/8	-	13 1/8	7 7/8	27 5/8	21'-8"	16'-2 5/8"	5	2
	28'	10'	GLCSL-FS-1000-20 (S or AL)-28-10	Steel	25'	13	15	21	25	14 1/8	7 7/8	23 3/8	21'-6"	12'-1 1/2"	4	2
		12'	GLCSL-FS-1000-20 (S or AL)-28-12	Steel	25'	13	15	21	25	14 1/8	7 7/8	23 3/8	21'-6"	14'-1 1/2"	4	2
		14'	GLCSL-FS-1000-20 (S or AL)-28-14	Steel	25'	13	15	21	25	14 1/8	7 7/8	23 3/8	21'-8"	16'-1 1/2"	5	2
	33'	10'	GLCS-FS-1000-20 (S or AL)-33-10	Steel	20'	13	15	18 1/8	22 1/8	14 1/8	7 7/8	23 3/8	21'-6"	11'-10 5/8"	4	3
		10'	AL-FS-1000-20-33-10	Alum	20'	19	15	22 1/8	-	13 1/8	7 7/8	27 5/8	21'-6"	12'-2 5/8"	4	3
		12'	GLCS-FS-1000-20 (S or AL)-33-12	Steel	20'	13	15	18 1/8	22 1/8	14 1/8	7 7/8	23 3/8	21'-6"	13'-10 5/8"	4	3
		12'	AL-FS-1000-20-33-12	Alum	20'	19	15	22 1/8	-	13 1/8	7 7/8	27 5/8	21'-6"	14'-2 5/8"	4	3
		14'	GLCS-FS-1000-20 (S or AL)-33-14	Steel	20'	13	15	18 1/8	22 1/8	14 1/8	7 7/8	23 3/8	21'-8"	15'-10 5/8"	5	3
		14'	AL-FS-1000-20-33-14	Alum	20'	19	15	22 1/8	-	13 1/8	7 7/8	27 5/8	21'-8"	16'-2 5/8"	5	3
	34'	10'	GLCSLX-FS-1000-20 (S or AL)-34-10	Steel	30'	13	15	24 1/8	28 1/8	14 1/8	7 7/8	23 3/8	21'-6"	12'-4 5/8"	4	2
		12'	GLCSLX-FS-1000-20 (S or AL)-34-12	Steel	30'	13	15	24 1/8	28 1/8	14 1/8	7 7/8	23 3/8	21'-6"	14'-4 5/8"	4	2
		14'	GLCSLX-FS-1000-20 (S or AL)-34-14	Steel	30'	13	15	24 1/8	28 1/8	14 1/8	7 7/8	23 3/8	21'-8"	16'-5 5/8"	5	2
	43'	10'	GLCS-FS-1000-20 (S or AL)-43-10	Steel	20'	19	15	18 1/8	22 1/8	14 1/8	7 7/8	23 3/8	21'-6"	11'-10 5/8"	4	3
		10'	AL-FS-1000-20-43-10	Alum	20'	26	15	22 1/8	-	13 1/8	7 7/8	27 5/8	21'-6"	12'-2 5/8"	4	3
		12'	GLCS-FS-1000-20 (S or AL)-43-12	Steel	20'	19	15	18 1/8	22 1/8	14 1/8	7 7/8	23 3/8	21'-6"	13'-10 5/8"	4	3
		12'	AL-FS-1000-20-43-12	Alum	20'	26	15	22 1/8	-	13 1/8	7 7/8	27 5/8	21'-6"	14'-2 5/8"	4	3
		14'	GLCS-FS-1000-20 (S or AL)-43-14	Steel	20'	19	15	18 1/8	22 1/8	14 1/8	7 7/8	23 3/8	21'-8"	15'-10 5/8"	5	3
		14'	AL-FS-1000-20-43-14	Alum	20'	26	15	22 1/8	-	13 1/8	7 7/8	27 5/8	21'-8"	16'-2 5/8"	5	3
	53'	10'	GLCS-FS-1000-20 (S or AL)-53-10	Steel	20'	19	15	18 1/8	22 1/8	14 1/8	7 7/8	23 3/8	21'-6"	11'-10 5/8"	4	4
		10'	AL-FS-1000-20-53-10	Alum	20'	30	15	22 1/8	-	13 1/8	7 7/8	27 5/8	21'-6"	12'-2 5/8"	4	4
		10'	GLCSL-FS-1000-20 (S or AL)-53-10	Steel	25'	19	15	21	25	14 1/8	7 7/8	23 3/8	21'-6"	12'-1 1/2"	4	3
		12'	GLCS-FS-1000-20 (S or AL)-53-12	Steel	20'	19	15	18 1/8	22 1/8	14 1/8	7 7/8	23 3/8	21'-6"	13'-10 5/8"	4	4
		12'	AL-FS-1000-20-53-12	Alum	20'	30	15	22 1/8	-	13 1/8	7 7/8	27 5/8	21'-6"	14'-2 5/8"	4	4
		12'	GLCSL-FS-1000-20 (S or AL)-53-12	Steel	25'	19	15	21	25	14 1/8	7 7/8	23 3/8	21'-6"	14'-1 1/2"	4	3
		14'	GLCS-FS-1000-20 (S or AL)-53-14	Steel	20'	19	15	18 1/8	22 1/8	14 1/8	7 7/8	23 3/8	21'-8"	15'-10 5/8"	5	4
		14'	AL-FS-1000-20-53-14	Alum	20'	30	15	22 1/8	-	13 1/8	7 7/8	27 5/8	21'-8"	16'-2 5/8"	5	4
		14'	GLCSL-FS-1000-20 (S or AL)-53-14	Steel	25'	19	15	21	25	14 1/8	7 7/8	23 3/8	21'-8"	16'-1 1/2"	5	3
	63'	10'	GLCS-FS-1000-20 (S or AL)-63-10	Steel	20'	26	15	18 1/8	22 1/8	14 1/8	7 7/8	23 3/8	21'-6"	11'-10 5/8"	4	4
		10'	AL-FS-1000-20-63-10	Alum	20'	36	15	22 1/8	-	13 1/8	7 7/8	27 5/8	21'-6"	12'-2 5/8"	4	4
		12'	GLCS-FS-1000-20 (S or AL)-63-12	Steel	20'	26	15	18 1/8	22 1/8	14 1/8	7 7/8	23 3/8	21'-6"	13'-10 5/8"	4	4
		12'	AL-FS-1000-20-63-12	Alum	20'	36	15	22 1/8	-	13 1/8	7 7/8	27 5/8	21'-6"	14'-2 5/8"	4	4
		14'	GLCS-FS-1000-20 (S or AL)-63-14	Steel	20'	26	15	18 1/8	22 1/8	14 1/8	7 7/8	23 3/8	21'-8"	15'-10 5/8"	5	4
		14'	AL-FS-1000-20-63-14	Alum	20'	36	15	22 1/8	-	13 1/8	7 7/8	27 5/8	21'-8"	16'-2 5/8"	5	4
	64'	10'	GLCSLX-FS-1000-20 (S or AL)-64-10	Steel	30'	36	15	24 1/8	28 1/8	14 1/8	7 7/8	27 5/8	21'-6"	12'-4 5/8"	4	3
		12'	GLCSLX-FS-1000-20 (S or AL)-64-12	Steel	30'	36	15	24 1/8	28 1/8	14 1/8	7 7/8	27 5/8	21'-6"	14'-4 5/8"	4	3
		14'	GLCSLX-FS-1000-20 (S or AL)-64-14	Steel	30'	36	15	24 1/8	28 1/8	14 1/8	7 7/8	27 5/8	21'-8"	16'-5 5/8"	5	3
	78'	10'	GLCSL-FS-1000-20 (S or AL)-78-10	Steel	25'	46	15	21	25	14 1/8	7 7/8	27 5/8	21'-6"	12'-1 1/2"	4	4
		12'	GLCSL-FS-1000-20 (S or AL)-78-12	Steel	25'	46	15	21	25	14 1/8	7 7/8	27 5/8	21'-6"	14'-1 1/2"	4	4
		14'	GLCSL-FS-1000-20 (S or AL)-78-14	Steel	25'	46	15	21	25	14 1/8	7 7/8	27 5/8	21'-8"	16'-1 1/2"	5	4
	83'	10'	GLCS-FS-1000-20 (S or AL)-83-10	Steel	20'	46	15	18 1/8	22 1/8	14 1/8	7 7/8	27 5/8	21'-6"	11'-10 5/8"	4	5
		10'	AL-FS-1000-20-83-10	Alum	20'	46	15	22 1/8	-	13 1/8	7 7/8	27 5/8	21'-6"	12'-2 5/8"	4	5
		12'	GLCS-FS-1000-20 (S or AL)-83-12	Steel	20'	46	15	18 1/8	22 1/8	14 1/8	7 7/8	27 5/8	21'-6"	13'-10 5/8"	4	5
		12'	AL-FS-1000-20-83-12	Alum	20'	46	15	22 1/8	-	13 1/8	7 7/8	27 5/8	21'-6"	14'-2 5/8"	4	5
		14'	GLCS-FS-1000-20 (S or AL)-83-14	Steel	20'	46	15	18 1/8	22 1/8	14 1/8	7 7/8	27 5/8	21'-8"	15'-10 5/8"	5	5
		14'	AL-FS-1000-20-83-14	Alum	20'	46	15	22 1/8	-	13 1/8	7 7/8	27 5/8	21'-8"	16'-2 5/8"	5	5
	94'	10'	GLCSLX-FS-1000-20 (S or AL)-94-10	Steel	30'	54	15	24 1/8	28 1/8	14 1/8	7 7/8	27 5/8	21'-6"	12'-4 5/8"	4	4
		12'	GLCSLX-FS-1000-20 (S or AL)-94-12	Steel	30'	54	15	24 1/8	28 1/8	14 1/8	7 7/8	27 5/8	21'-6"	14'-4 5/8"	4	4
		14'	GLCSLX-FS-1000-20 (S or AL)-94-14	Steel	30'	54	15	24 1/8	28 1/8	14 1/8	7 7/8	27 5/8	21'-8"	16'-5 5/8"	5	4
	103'	10'	GLCS-FS-1000-20 (S or AL)-103-10	Steel	20'	54	15	18 1/8	22 1/8	14 1/8	7 7/8	27 5/8	21'-6"	11'-10 5/8"	4	6
		10'	AL-FS-1000-20-103-10	Alum	20'	54	15	22 1/8	-	13 1/8	7 7/8	27 5/8	21'-6"	12'-2 5/8"	4	6
		10'	GLCSL-FS-1000-20 (S or AL)-103-10	Steel	25'	54	15	21	25	14 1/8	7 7/8	27 5/8	21'-6"	12'-1 1/2"	4	5
		12'	GLCS-FS-1000-20 (S or AL)-103-12	Steel	20'	54	15	18 1/8	22 1/8	14 1/8	7 7/8	27 5/8	21'-6"	13'-10 5/8"	4	6
		12'	AL-FS-1000-20-103-12	Alum	20'	54	15	22 1/8	-	13 1/8	7 7/8	27 5/8	21'-6"	14'-2 5/8"	4	6
		12'	GLCSL-FS-1000-20 (S or AL)-103-12	Steel	25'	54	15	21	25	14 1/8	7 7/8	27 5/8	21'-6"	14'-1 1/2"	4	5
		14'	GLCS-FS-1000-20 (S or AL)-103-14	Steel	20'	54	15	18 1/8	22 1/8	14 1/8	7 7/8	27 5/8	21'-8"	15'-10 5/8"	5	6
		14'	AL-FS-1000-20-103-14	Alum	20'	54	15	22 1/8	-	13 1/8	7 7/8	27 5/8	21'-8"	16'-2 5/8"	5	6
		14'	GLCSL-FS-1000-20 (S or AL)-103-14	Steel	25'	54	15	21	25	14 1/8	7 7/8	27 5/8	21'-8"	16'-1 1/2"	5	5
	124'	10'	GLCSLX-FS-1000-20 (S or AL)-124-10	Steel	30'	54	15	24 1/8	28 1/8	14 1/8	7 7/8	27 5/8	21'-6"	12'-4 5/8"	4	5
		12'	GLCSLX-FS-1000-20 (S or AL)-124-12	Steel	30'	54	15	24 1/8	28 1/8	14 1/8	7 7/8	27 5/8	21'-6"	14'-4 5/8"	4	5
		14'	GLCSLX-FS-1000-20 (S or AL)-124-14	Steel	30'	54	15	24 1/8	28 1/8	14 1/8	7 7/8	27 5/8	21'-8"	16'-5 5/8"	5	5

*This column provides the total number of support assemblies based on the "L1" dimensions shown. Support assemblies are designed to AISC specifications and do not require bracing. If no movement of the support assembly is preferred, then bracing to the building steel is recommended (not included).

To Determine Hook Coverage: [Bridge Travel on Runway = Runway Length - (2xL8)] by [Hoist Trolley Travel on Bridge = Bridge Length - L3 - L6] (L6 allows for festoon stack-up).

Gorbel® Free Standing Work Station Bridge Crane Kits include: bridge, runways, the appropriate number of support assemblies, hoist trolley, end trucks, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel runway lengths greater than 63' and all aluminum systems), festoon stack-up section, splice joints and hanger brackets. Hoist and anchor bolts provided by others.

Dimensions are for reference only and are subject to change without notice.

FREE STANDING WORK STATION BRIDGE CRANES

BRIDGE LENGTH (L)	RUNWAY LENGTH	TS	MODEL NUMBER	TRACK MAT.	RUNWAY			BRIDGE					SUPPORT STRUCTURE			
					MAX. L1	L7 in	L8 in	H3 in	H3A in	H4 in	L3 in	L6 in	OAW	OAH	D in	Spt*
23'	23'	10'	GLCS-FS-1000-23 (S or AL)-23-10	Steel	20'	9	15	18 1/8	22 1/8	14 1/8	7 7/8	23 3/8	24'-6"	11'-11 5/8"	4	2
		10'	AL-FS-1000-23-23-10	Alum	20'	13	15	22 1/8	-	13 1/8	7 7/8	31	24'-6"	12'-3 5/8"	4	2
		12'	GLCS-FS-1000-23 (S or AL)-23-12	Steel	20'	9	15	18 1/8	22 1/8	14 1/8	7 7/8	23 3/8	24'-6"	13'-11 5/8"	4	2
		12'	AL-FS-1000-23-23-12	Alum	20'	13	15	22 1/8	-	13 1/8	7 7/8	31	24'-6"	14'-3 5/8"	4	2
		14'	GLCS-FS-1000-23 (S or AL)-23-14	Steel	20'	9	15	18 1/8	22 1/8	14 1/8	7 7/8	23 3/8	24'-8"	15'-11 5/8"	5	2
		14'	AL-FS-1000-23-23-14	Alum	20'	13	15	22 1/8	-	13 1/8	7 7/8	31	24'-8"	16'-3 5/8"	5	2
	28'	10'	GLCSL-FS-1000-23 (S or AL)-28-10	Steel	25'	13	15	21	25	14 1/8	7 7/8	23 3/8	24'-6"	12'-2 1/2"	4	2
		12'	GLCSL-FS-1000-23 (S or AL)-28-12	Steel	25'	13	15	21	25	14 1/8	7 7/8	23 3/8	24'-6"	14'-2 1/2"	4	2
		14'	GLCSL-FS-1000-23 (S or AL)-28-14	Steel	25'	13	15	21	25	14 1/8	7 7/8	23 3/8	24'-8"	16'-2 1/2"	5	2
	33'	10'	GLCS-FS-1000-23 (S or AL)-33-10	Steel	20'	13	15	18 1/8	22 1/8	14 1/8	7 7/8	23 3/8	24'-6"	11'-11 5/8"	4	3
		10'	AL-FS-1000-23-33-10	Alum	20'	19	15	22 1/8	-	13 1/8	7 7/8	31	24'-6"	12'-3 5/8"	4	3
		12'	GLCS-FS-1000-23 (S or AL)-33-12	Steel	20'	13	15	18 1/8	22 1/8	14 1/8	7 7/8	23 3/8	24'-6"	13'-11 5/8"	4	3
		12'	AL-FS-1000-23-33-12	Alum	20'	19	15	22 1/8	-	13 1/8	7 7/8	31	24'-6"	14'-3 5/8"	4	3
		14'	GLCS-FS-1000-23 (S or AL)-33-14	Steel	20'	13	15	18 1/8	22 1/8	14 1/8	7 7/8	23 3/8	24'-8"	15'-11 5/8"	5	3
		14'	AL-FS-1000-23-33-14	Alum	20'	19	15	22 1/8	-	13 1/8	7 7/8	31	24'-8"	16'-3 5/8"	5	3
	34'	10'	GLCSLX-FS-1000-23 (S or AL)-34-10	Steel	30'	13	15	24 1/8	28 1/8	14 1/8	7 7/8	23 3/8	24'-6"	12'-5 5/8"	4	2
		12'	GLCSLX-FS-1000-23 (S or AL)-34-12	Steel	30'	13	15	24 1/8	28 1/8	14 1/8	7 7/8	23 3/8	24'-6"	14'-5 5/8"	4	2
		14'	GLCSLX-FS-1000-23 (S or AL)-34-14	Steel	30'	13	15	24 1/8	28 1/8	14 1/8	7 7/8	23 3/8	24'-8"	16'-5 5/8"	5	2
	43'	10'	GLCS-FS-1000-23 (S or AL)-43-10	Steel	20'	19	15	18 1/8	22 1/8	14 1/8	7 7/8	23 3/8	24'-6"	11'-11 5/8"	4	3
		10'	AL-FS-1000-23-43-10	Alum	20'	26	15	22 1/8	-	13 1/8	7 7/8	31	24'-6"	12'-3 5/8"	4	3
		12'	GLCS-FS-1000-23 (S or AL)-43-12	Steel	20'	19	15	18 1/8	22 1/8	14 1/8	7 7/8	23 3/8	24'-6"	13'-11 5/8"	4	3
		12'	AL-FS-1000-23-43-12	Alum	20'	26	15	22 1/8	-	13 1/8	7 7/8	31	24'-6"	14'-3 5/8"	4	3
		14'	GLCS-FS-1000-23 (S or AL)-43-14	Steel	20'	19	15	18 1/8	22 1/8	14 1/8	7 7/8	23 3/8	24'-8"	15'-11 5/8"	5	3
		14'	AL-FS-1000-23-43-14	Alum	20'	26	15	22 1/8	-	13 1/8	7 7/8	31	24'-8"	16'-3 5/8"	5	3
	53'	10'	GLCS-FS-1000-23 (S or AL)-53-10	Steel	20'	19	15	18 1/8	22 1/8	14 1/8	7 7/8	23 3/8	24'-6"	11'-11 5/8"	4	4
		10'	AL-FS-1000-23-53-10	Alum	20'	30	15	22 1/8	-	13 1/8	7 7/8	31	24'-6"	12'-3 5/8"	4	4
		12'	GLCSL-FS-1000-23 (S or AL)-53-10	Steel	25'	19	15	21	25	14 1/8	7 7/8	23 3/8	24'-6"	12'-2 1/2"	4	3
		12'	GLCS-FS-1000-23 (S or AL)-53-12	Steel	20'	19	15	18 1/8	22 1/8	14 1/8	7 7/8	23 3/8	24'-6"	13'-11 5/8"	4	4
		12'	AL-FS-1000-23-53-12	Alum	20'	30	15	22 1/8	-	13 1/8	7 7/8	31	24'-6"	14'-3 5/8"	4	4
		12'	GLCSL-FS-1000-23 (S or AL)-53-12	Steel	25'	19	15	21	25	14 1/8	7 7/8	23 3/8	24'-6"	14'-2 1/2"	4	3
	63'	14'	GLCS-FS-1000-23 (S or AL)-53-14	Steel	20'	19	15	18 1/8	22 1/8	14 1/8	7 7/8	23 3/8	24'-8"	15'-11 5/8"	5	4
		14'	AL-FS-1000-23-53-14	Alum	20'	30	15	22 1/8	-	13 1/8	7 7/8	31	24'-8"	16'-3 5/8"	5	4
		14'	GLCSL-FS-1000-23 (S or AL)-53-14	Steel	25'	19	15	21	25	14 1/8	7 7/8	23 3/8	24'-8"	16'-2 1/2"	5	3
		10'	GLCS-FS-1000-23 (S or AL)-63-10	Steel	20'	26	15	18 1/8	22 1/8	14 1/8	7 7/8	23 3/8	24'-6"	11'-11 5/8"	4	4
		10'	AL-FS-1000-23-63-10	Alum	20'	36	15	22 1/8	-	13 1/8	7 7/8	31	24'-6"	12'-3 5/8"	4	4
		12'	GLCS-FS-1000-23 (S or AL)-63-12	Steel	20'	26	15	18 1/8	22 1/8	14 1/8	7 7/8	23 3/8	24'-6"	13'-11 5/8"	4	4
	64'	12'	AL-FS-1000-23-63-12	Alum	20'	36	15	22 1/8	-	13 1/8	7 7/8	31	24'-6"	14'-3 5/8"	4	4
		14'	GLCS-FS-1000-23 (S or AL)-63-14	Steel	20'	26	15	18 1/8	22 1/8	14 1/8	7 7/8	23 3/8	24'-8"	15'-11 5/8"	5	4
		14'	AL-FS-1000-23-63-14	Alum	20'	36	15	22 1/8	-	13 1/8	7 7/8	31	24'-8"	16'-3 5/8"	5	4
		10'	GLCSLX-FS-1000-23 (S or AL)-64-10	Steel	30'	36	15	24 1/8	28 1/8	14 1/8	7 7/8	31	24'-6"	12'-5 5/8"	4	3
		12'	GLCSLX-FS-1000-23 (S or AL)-64-12	Steel	30'	36	15	24 1/8	28 1/8	14 1/8	7 7/8	31	24'-6"	14'-5 5/8"	4	3
		14'	GLCSLX-FS-1000-23 (S or AL)-64-14	Steel	30'	36	15	24 1/8	28 1/8	14 1/8	7 7/8	31	24'-8"	16'-5 5/8"	5	3
	78'	10'	GLCSL-FS-1000-23 (S or AL)-78-10	Steel	25'	46	15	21	25	14 1/8	7 7/8	31	24'-6"	12'-2 1/2"	4	4
		12'	GLCSL-FS-1000-23 (S or AL)-78-12	Steel	25'	46	15	21	25	14 1/8	7 7/8	31	24'-6"	14'-2 1/2"	4	4
		14'	GLCSL-FS-1000-23 (S or AL)-78-14	Steel	25'	46	15	21	25	14 1/8	7 7/8	31	24'-8"	16'-2 1/2"	5	4
	83'	10'	GLCS-FS-1000-23 (S or AL)-83-10	Steel	20'	46	15	18 1/8	22 1/8	14 1/8	7 7/8	31	24'-6"	11'-11 5/8"	4	5
		10'	AL-FS-1000-23-83-10	Alum	20'	46	15	22 1/8	-	13 1/8	7 7/8	31	24'-6"	12'-3 5/8"	4	5
		12'	GLCS-FS-1000-23 (S or AL)-83-12	Steel	20'	46	15	18 1/8	22 1/8	14 1/8	7 7/8	31	24'-6"	13'-11 5/8"	4	5
		12'	AL-FS-1000-23-83-12	Alum	20'	46	15	22 1/8	-	13 1/8	7 7/8	31	24'-6"	14'-3 5/8"	4	5
		14'	GLCS-FS-1000-23 (S or AL)-83-14	Steel	20'	46	15	18 1/8	22 1/8	14 1/8	7 7/8	31	24'-8"	15'-11 5/8"	5	5
		14'	AL-FS-1000-23-83-14	Alum	20'	46	15	22 1/8	-	13 1/8	7 7/8	31	24'-8"	16'-3 5/8"	5	5
	94'	10'	GLCSLX-FS-1000-23 (S or AL)-94-10	Steel	30'	54	15	24 1/8	28 1/8	14 1/8	7 7/8	31	24'-6"	12'-5 5/8"	4	4
		12'	GLCSLX-FS-1000-23 (S or AL)-94-12	Steel	30'	54	15	24 1/8	28 1/8	14 1/8	7 7/8	31	24'-6"	14'-5 5/8"	4	4
		14'	GLCSLX-FS-1000-23 (S or AL)-94-14	Steel	30'	54	15	24 1/8	28 1/8	14 1/8	7 7/8	31	24'-8"	16'-5 5/8"	5	4
	103'	10'	GLCS-FS-1000-23 (S or AL)-103-10	Steel	20'	54	15	18 1/8	22 1/8	14 1/8	7 7/8	31	24'-6"	11'-11 5/8"	4	6
		10'	AL-FS-1000-23-103-10	Alum	20'	54	15	22 1/8	-	13 1/8	7 7/8	31	24'-6"	12'-3 5/8"	4	6
		12'	GLCSL-FS-1000-23 (S or AL)-103-10	Steel	25'	54	15	21	25	14 1/8	7 7/8	31	24'-6"	12'-2 1/2"	4	5
		12'	GLCS-FS-1000-23 (S or AL)-103-12	Steel	20'	54	15	18 1/8	22 1/8	14 1/8	7 7/8	31	24'-6"	13'-11 5/8"	4	6
		12'	AL-FS-1000-23-103-12	Alum	20'	54	15	22 1/8	-	13 1/8	7 7/8	31	24'-6"	14'-3 5/8"	4	6
		12'	GLCSL-FS-1000-23 (S or AL)-103-12	Steel	25'	54	15	21	25	14 1/8	7 7/8	31	24'-6"	14'-2 1/2"	4	5
	124'	14'	GLCS-FS-1000-23 (S or AL)-103-14	Steel	20'	54	15	18 1/8	22 1/8	14 1/8	7 7/8	31	24'-8"	15'-11 5/8"	5	6
		14'	AL-FS-1000-23-103-14	Alum	20'	54	15	22 1/8	-	13 1/8	7 7/8	31	24'-8"	16'-3 5/8"	5	6
		14'	GLCSL-FS-1000-23 (S or AL)-103-14	Steel	25'	54	15	21	25	14 1/8	7 7/8	31	24'-8"	16'-2 1/2"	5	5
		10'	GLCSLX-FS-1000-23 (S or AL)-124-10	Steel	30'	54	15	24 1/8	28 1/8	14 1/8	7 7/8	31	24'-6"	12'-5 5/8"	4	5
		12'	GLCSLX-FS-1000-23 (S or AL)-124-12	Steel	30'	54	15	24 1/8	28 1/8	14 1/8	7 7/8	31	24'-6"	14'-5 5/8"	4	5
		14'	GLCSLX-FS-1000-23 (S or AL)-124-14	Steel	30'	54	15	24 1/8	28 1/8	14 1/8	7 7/8	31	24'-8"	16'-5 5/8"	5	5

*This column provides the total number of support assemblies based on the "L1" dimensions shown. Support assemblies are designed to AISC specifications and do not require bracing. If no movement of the support assembly is preferred, then bracing to the building steel is recommended (not included).

To Determine Hook Coverage: [Bridge Travel on Runway = Runway Length - (2xL8)] by [Hoist Trolley Travel on Bridge = Bridge Length - L3 - L6] (L6 allows for festoon stack-up).

Gorbel® Free Standing Work Station Bridge Crane Kits include: bridge, runways, the appropriate number of support assemblies, hoist trolley, end trucks, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel runway lengths greater than 63' and all aluminum systems), festoon stack-up section, splice joints and hanger brackets. Hoist and anchor bolts provided by others.

Dimensions are for reference only and are subject to change without notice.

1000# CAPACITY

FREE STANDING WORK STATION BRIDGE CRANES

FREE STANDING WORK
STATION CRANES

BRIDGE LENGTH (L)	RUNWAY LENGTH	TS	MODEL NUMBER	TRACK MAT.	RUNWAY			BRIDGE					SUPPORT STRUCTURE			
					MAX. L1	L7 in	L8 in	H3 in	H3A in	H4 in	L3 in	L6 in	OAW	OAH	D in	# of
28'	23'	10'	GLCS-FS-1000-28 (S or AL)-23-10	Steel	20'	9	21 1/8	20 1/2	23 3/4	17	7 7/8	33 3/8	29'-6"	12'-1"	4	2
		10'	AL-FS-1000-28-23-10	Alum	20'	13	21	23 5/8	-	15 1/4	7 7/8	37 3/4	29'-6"	12'-5 1/8"	4	2
		12'	GLCS-FS-1000-28 (S or AL)-23-12	Steel	20'	9	21 1/8	20 1/2	23 3/4	17	7 7/8	33 3/8	29'-6"	14'-1"	4	2
		12'	AL-FS-1000-28-23-12	Alum	20'	13	21	23 5/8	-	15 1/4	7 7/8	37 3/4	29'-6"	14'-5 1/8"	4	2
		14'	GLCS-FS-1000-28 (S or AL)-23-14	Steel	20'	9	21 1/8	20 1/2	23 3/4	17	7 7/8	33 3/8	29'-8"	16'-1"	5	2
		14'	AL-FS-1000-28-23-14	Alum	20'	13	21	23 5/8	-	15 1/4	7 7/8	37 3/4	29'-8"	16'-5 1/8"	5	2
	28'	10'	GLCSL-FS-1000-28 (S or AL)-28-10	Steel	25'	9	21 1/8	23 3/8	26 5/8	17	7 7/8	33 3/8	29'-6"	12'-5 7/8"	4	2
		12'	GLCSL-FS-1000-28 (S or AL)-28-12	Steel	25'	9	21 1/8	23 3/8	26 5/8	17	7 7/8	33 3/8	29'-6"	14'-5 7/8"	4	2
		14'	GLCSL-FS-1000-28 (S or AL)-28-14	Steel	25'	9	21 1/8	23 3/8	26 5/8	17	7 7/8	33 3/8	29'-8"	16'-5 7/8"	5	2
	33'	10'	GLCS-FS-1000-28 (S or AL)-33-10	Steel	20'	9	21 1/8	20 1/2	23 3/4	17	7 7/8	33 3/8	29'-6"	12'-1"	4	3
		10'	AL-FS-1000-28-33-10	Alum	20'	19	21	23 5/8	-	15 1/4	7 7/8	37 3/4	29'-6"	12'-5 1/8"	4	3
		12'	GLCS-FS-1000-28 (S or AL)-33-12	Steel	20'	9	21 1/8	20 1/2	23 3/4	17	7 7/8	33 3/8	29'-6"	14'-1"	4	3
		12'	AL-FS-1000-28-33-12	Alum	20'	19	21	23 5/8	-	15 1/4	7 7/8	37 3/4	29'-6"	14'-5 1/8"	4	3
		14'	GLCS-FS-1000-28 (S or AL)-33-14	Steel	20'	9	21 1/8	20 1/2	23 3/4	17	7 7/8	33 3/8	29'-8"	16'-1"	5	3
		14'	AL-FS-1000-28-33-14	Alum	20'	19	21	23 5/8	-	15 1/4	7 7/8	37 3/4	29'-8"	16'-5 1/8"	5	3
	34'	10'	GLCSLX-FS-1000-28 (S or AL)-34-10	Steel	30'	9	21 1/8	26 1/2	29 3/4	17	7 7/8	33 3/8	29'-6"	12'-8"	4	2
		12'	GLCSLX-FS-1000-28 (S or AL)-34-12	Steel	30'	9	21 1/8	26 1/2	29 3/4	17	7 7/8	33 3/8	29'-6"	14'-8"	4	2
		14'	GLCSLX-FS-1000-28 (S or AL)-34-14	Steel	30'	9	21 1/8	26 1/2	29 3/4	17	7 7/8	33 3/8	29'-8"	16'-8"	5	2
	43'	10'	GLCS-FS-1000-28 (S or AL)-43-10	Steel	20'	13	21 1/8	20 1/2	23 3/4	17	7 7/8	33 3/8	29'-6"	12'-1"	4	3
		10'	AL-FS-1000-28-43-10	Alum	20'	26	21	23 5/8	-	15 1/4	7 7/8	37 3/4	29'-6"	12'-5 1/8"	4	3
		12'	GLCS-FS-1000-28 (S or AL)-43-12	Steel	20'	13	21 1/8	20 1/2	23 3/4	17	7 7/8	33 3/8	29'-6"	14'-1"	4	3
		12'	AL-FS-1000-28-43-12	Alum	20'	26	21	23 5/8	-	15 1/4	7 7/8	37 3/4	29'-6"	14'-5 1/8"	4	3
		14'	GLCS-FS-1000-28 (S or AL)-43-14	Steel	20'	13	21 1/8	20 1/2	23 3/4	17	7 7/8	33 3/8	29'-8"	16'-1"	5	3
		14'	AL-FS-1000-28-43-14	Alum	20'	26	21	23 5/8	-	15 1/4	7 7/8	37 3/4	29'-8"	16'-5 1/8"	5	3
	53'	10'	GLCS-FS-1000-28 (S or AL)-53-10	Steel	20'	13	21 1/8	20 1/2	23 3/4	17	7 7/8	33 3/8	29'-6"	12'-1"	4	4
		10'	AL-FS-1000-28-53-10	Alum	20'	30	21	23 5/8	-	15 1/4	7 7/8	37 3/4	29'-6"	12'-5 1/8"	4	4
		12'	GLCSL-FS-1000-28 (S or AL)-53-10	Steel	25'	13	21 1/8	23 3/8	26 5/8	17	7 7/8	33 3/8	29'-6"	12'-5 7/8"	4	3
		12'	GLCS-FS-1000-28 (S or AL)-53-12	Steel	20'	13	21 1/8	20 1/2	23 3/4	17	7 7/8	33 3/8	29'-6"	14'-1"	4	4
		12'	AL-FS-1000-28-53-12	Alum	20'	30	21	23 5/8	-	15 1/4	7 7/8	37 3/4	29'-6"	14'-5 1/8"	4	4
		12'	GLCSL-FS-1000-28 (S or AL)-53-12	Steel	25'	13	21 1/8	23 3/8	26 5/8	17	7 7/8	33 3/8	29'-6"	14'-5 7/8"	4	3
	53'	14'	GLCS-FS-1000-28 (S or AL)-53-14	Steel	20'	13	21 1/8	20 1/2	23 3/4	17	7 7/8	33 3/8	29'-8"	16'-1"	5	4
		14'	AL-FS-1000-28-53-14	Alum	20'	30	21	23 5/8	-	15 1/4	7 7/8	37 3/4	29'-8"	16'-5 1/8"	5	4
		14'	GLCSL-FS-1000-28 (S or AL)-53-14	Steel	25'	13	21 1/8	23 3/8	26 5/8	17	7 7/8	33 3/8	29'-8"	16'-5 7/8"	5	3
	63'	10'	GLCS-FS-1000-28 (S or AL)-63-10	Steel	20'	19	21 1/8	20 1/2	23 3/4	17	7 7/8	33 3/8	29'-6"	12'-1"	4	4
		10'	AL-FS-1000-28-63-10	Alum	20'	36	21	23 5/8	-	15 1/4	7 7/8	37 3/4	29'-6"	12'-5 1/8"	4	4
		12'	GLCS-FS-1000-28 (S or AL)-63-12	Steel	20'	19	21 1/8	20 1/2	23 3/4	17	7 7/8	33 3/8	29'-6"	14'-1"	4	4
		12'	AL-FS-1000-28-63-12	Alum	20'	36	21	23 5/8	-	15 1/4	7 7/8	37 3/4	29'-6"	14'-5 1/8"	4	4
		14'	GLCS-FS-1000-28 (S or AL)-63-14	Steel	20'	19	21 1/8	20 1/2	23 3/4	17	7 7/8	33 3/8	29'-8"	16'-1"	5	4
		14'	AL-FS-1000-28-63-14	Alum	20'	36	21	23 5/8	-	15 1/4	7 7/8	37 3/4	29'-8"	16'-5 1/8"	5	4
	64'	10'	GLCSLX-FS-1000-28 (S or AL)-64-10	Steel	30'	36	21 1/8	26 1/2	29 3/4	17	7 7/8	37 3/4	29'-6"	12'-8"	4	3
		12'	GLCSLX-FS-1000-28 (S or AL)-64-12	Steel	30'	36	21 1/8	26 1/2	29 3/4	17	7 7/8	37 3/4	29'-6"	14'-8"	4	3
		14'	GLCSLX-FS-1000-28 (S or AL)-64-14	Steel	30'	36	21 1/8	26 1/2	29 3/4	17	7 7/8	37 3/4	29'-8"	16'-8"	5	3
	78'	10'	GLCSL-FS-1000-28 (S or AL)-78-10	Steel	25'	46	21 1/8	23 3/8	26 5/8	17	7 7/8	37 3/4	29'-6"	12'-5 7/8"	4	4
		12'	GLCSL-FS-1000-28 (S or AL)-78-12	Steel	25'	46	21 1/8	23 3/8	26 5/8	17	7 7/8	37 3/4	29'-6"	14'-5 7/8"	4	4
		14'	GLCSL-FS-1000-28 (S or AL)-78-14	Steel	25'	46	21 1/8	23 3/8	26 5/8	17	7 7/8	37 3/4	29'-8"	16'-5 7/8"	5	4
	83'	10'	GLCS-FS-1000-28 (S or AL)-83-10	Steel	20'	46	21 1/8	20 1/2	23 3/4	17	7 7/8	37 3/4	29'-6"	12'-1"	4	5
		10'	AL-FS-1000-28-83-10	Alum	20'	46	21	23 5/8	-	15 1/4	7 7/8	37 3/4	29'-6"	12'-5 1/8"	4	5
		12'	GLCS-FS-1000-28 (S or AL)-83-12	Steel	20'	46	21 1/8	20 1/2	23 3/4	17	7 7/8	37 3/4	29'-6"	14'-1"	4	5
		12'	AL-FS-1000-28-83-12	Alum	20'	46	21	23 5/8	-	15 1/4	7 7/8	37 3/4	29'-6"	14'-5 1/8"	4	5
		14'	GLCS-FS-1000-28 (S or AL)-83-14	Steel	20'	46	21 1/8	20 1/2	23 3/4	17	7 7/8	37 3/4	29'-8"	16'-1"	5	5
		14'	AL-FS-1000-28-83-14	Alum	20'	46	21	23 5/8	-	15 1/4	7 7/8	37 3/4	29'-8"	16'-5 1/8"	5	5
	94'	10'	GLCSLX-FS-1000-28 (S or AL)-94-10	Steel	30'	54	21 1/8	26 1/2	29 3/4	17	7 7/8	37 3/4	29'-6"	12'-8"	4	4
		12'	GLCSLX-FS-1000-28 (S or AL)-94-12	Steel	30'	54	21 1/8	26 1/2	29 3/4	17	7 7/8	37 3/4	29'-6"	14'-8"	4	4
		14'	GLCSLX-FS-1000-28 (S or AL)-94-14	Steel	30'	54	21 1/8	26 1/2	29 3/4	17	7 7/8	37 3/4	29'-8"	16'-8"	5	4
	103'	10'	GLCS-FS-1000-28 (S or AL)-103-10	Steel	20'	54	21 1/8	20 1/2	23 3/4	17	7 7/8	37 3/4	29'-6"	12'-1"	4	6
		10'	AL-FS-1000-28-103-10	Alum	20'	54	21	23 5/8	-	15 1/4	7 7/8	37 3/4	29'-6"	12'-5 1/8"	4	6
		12'	GLCSL-FS-1000-28 (S or AL)-103-10	Steel	25'	54	21 1/8	23 3/8	26 5/8	17	7 7/8	37 3/4	29'-6"	12'-5 7/8"	4	5
		12'	GLCS-FS-1000-28 (S or AL)-103-12	Steel	20'	54	21 1/8	20 1/2	23 3/4	17	7 7/8	37 3/4	29'-6"	14'-1"	4	6
		12'	AL-FS-1000-28-103-12	Alum	20'	54	21	23 5/8	-	15 1/4	7 7/8	37 3/4	29'-6"	14'-5 1/8"	4	6
		12'	GLCSL-FS-1000-28 (S or AL)-103-12	Steel	25'	54	21 1/8	23 3/8	26 5/8	17	7 7/8	37 3/4	29'-6"	14'-5 7/8"	4	5
	124'	14'	GLCS-FS-1000-28 (S or AL)-103-14	Steel	20'	54	21 1/8	20 1/2	23 3/4	17	7 7/8	37 3/4	29'-8"	16'-1"	5	6
		14'	AL-FS-1000-28-103-14	Alum	20'	54	21	23 5/8	-	15 1/4	7 7/8	37 3/4	29'-8"	16'-5 1/8"	5	6
		14'	GLCSL-FS-1000-28 (S or AL)-103-14	Steel	25'	54	21 1/8	23 3/8	26 5/8	17	7 7/8	37 3/4	29'-8"	16'-5 7/8"	5	5
		10'	GLCSLX-FS-1000-28 (S or AL)-124-10	Steel	30'	54	21 1/8	26 1/2	29 3/4	17	7 7/8	37 3/4	29'-6"	12'-8"	4	5
		12'	GLCSLX-FS-1000-28 (S or AL)-124-12	Steel	30'	54	21 1/8	26 1/2	29 3/4	17	7 7/8	37 3/4	29'-6"	14'-8"	4	5
		14'	GLCSLX-FS-1000-28 (S or AL)-124-14	Steel	30'	54	21 1/8	26 1/2	29 3/4	17	7 7/8	37 3/4	29'-8"	16'-8"	5	5

*This column provides the total number of support assemblies based on the "L1" dimensions shown. Support assemblies are designed to AISC specifications and do not require bracing. If no movement of the support assembly is preferred, then bracing to the building steel is recommended (not included).

To Determine Hook Coverage: [Bridge Travel on Runway = Runway Length - (2xL8)] by [Hoist Trolley Travel on Bridge = Bridge Length - L3 - L6] (L6 allows for festoon stack-up).

Gorbel® Free Standing Work Station Bridge Crane Kits include: bridge, runways, the appropriate number of support assemblies, hoist trolley, end trucks, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel runway lengths greater than 63' and all aluminum systems), festoon stack-up section, splice joints and hanger brackets. Hoist and anchor bolts provided by others.

Dimensions are for reference only and are subject to change without notice.

FREE STANDING WORK STATION BRIDGE CRANES

BRIDGE LENGTH (L)	RUNWAY LENGTH	TS	MODEL NUMBER	TRACK MAT.	RUNWAY			BRIDGE					SUPPORT STRUCTURE			
					MAX. L1	L7 in	L8 in	H3 in	H3A in	H4 in	L3 in	L6 in	OAW	OAH	D in	Spt*
34'	28'	10'	GLCSL-FS-1000-34 (S or AL)-28-10	Steel	25'	13	21 7/8	23 3/8	26 5/8	20 1/8	7 7/8	39 3/8	35'-6"	12'-6 7/8"	4	2
		12'	GLCSL-FS-1000-34 (S or AL)-28-12	Steel	25'	13	21 7/8	23 3/8	26 5/8	20 1/8	7 7/8	39 3/8	35'-6"	14'-6 7/8"	4	2
		14'	GLCSL-FS-1000-34 (S or AL)-28-14	Steel	25'	13	21 7/8	23 3/8	26 5/8	20 1/8	7 7/8	39 3/8	35'-8"	16'-6 7/8"	5	2
	33'	10'	GLCS-FS-1000-34 (S or AL)-33-10	Steel	20'	9	21 7/8	23 1/2	23 3/4	20 1/8	7 7/8	39 3/8	35'-6"	12'-6"	4	3
		10'	AL-FS-1000-34-33-10	Alum	20'	19	21	23 5/8	-	16 3/4	7 7/8	44 1/2	35'-6"	12'-7 1/8"	4	3
		12'	GLCS-FS-1000-34 (S or AL)-33-12	Steel	20'	9	21 7/8	23 1/2	23 3/4	20 1/8	7 7/8	39 3/8	35'-6"	14'-6"	4	3
		12'	AL-FS-1000-34-33-12	Alum	20'	19	21	23 5/8	-	16 3/4	7 7/8	44 1/2	35'-6"	14'-7 1/8"	4	3
		14'	GLCS-FS-1000-34 (S or AL)-33-14	Steel	20'	9	21 7/8	23 1/2	23 3/4	20 1/8	7 7/8	39 3/8	35'-8"	16'-6"	5	3
		14'	AL-FS-1000-34-33-14	Alum	20'	19	21	23 5/8	-	16 3/4	7 7/8	44 1/2	35'-8"	16'-7 1/8"	5	3
	34'	10'	GLCSLX-FS-1000-34 (S or AL)-34-10	Steel	30'	9	21 7/8	26 1/2	29 3/4	20 1/8	7 7/8	39 3/8	35'-6"	12'-9"	4	2
		12'	GLCSLX-FS-1000-34 (S or AL)-34-12	Steel	30'	9	21 7/8	26 1/2	29 3/4	20 1/8	7 7/8	39 3/8	35'-6"	14'-9"	4	2
		14'	GLCSLX-FS-1000-34 (S or AL)-34-14	Steel	30'	9	21 7/8	26 1/2	29 3/4	20 1/8	7 7/8	39 3/8	35'-8"	16'-9"	5	2
	43'	10'	GLCS-FS-1000-34 (S or AL)-43-10	Steel	20'	13	21 7/8	23 1/2	23 3/4	20 1/8	7 7/8	39 3/8	35'-6"	12'-6"	4	3
		10'	AL-FS-1000-34-43-10	Alum	20'	26	21	23 5/8	-	16 3/4	7 7/8	44 1/2	35'-6"	12'-7 1/8"	4	3
		12'	GLCS-FS-1000-34 (S or AL)-43-12	Steel	20'	13	21 7/8	23 1/2	23 3/4	20 1/8	7 7/8	39 3/8	35'-6"	14'-6"	4	3
		12'	AL-FS-1000-34-43-12	Alum	20'	26	21	23 5/8	-	16 3/4	7 7/8	44 1/2	35'-6"	14'-7 1/8"	4	3
		14'	GLCS-FS-1000-34 (S or AL)-43-14	Steel	20'	13	21 7/8	23 1/2	23 3/4	20 1/8	7 7/8	39 3/8	35'-8"	16'-6"	5	3
		14'	AL-FS-1000-34-43-14	Alum	20'	26	21	23 5/8	-	16 3/4	7 7/8	44 1/2	35'-8"	16'-7 1/8"	5	3
	53'	10'	GLCS-FS-1000-34 (S or AL)-53-10	Steel	20'	13	21 7/8	23 1/2	23 3/4	20 1/8	7 7/8	39 3/8	35'-6"	12'-6"	4	4
		10'	AL-FS-1000-34-53-10	Alum	20'	30	21	23 5/8	-	16 3/4	7 7/8	44 1/2	35'-6"	12'-7 1/8"	4	4
		10'	GLCSL-FS-1000-34 (S or AL)-53-10	Steel	25'	13	21 7/8	23 3/8	26 5/8	20 1/8	7 7/8	39 3/8	35'-6"	12'-6 7/8"	4	3
		12'	GLCS-FS-1000-34 (S or AL)-53-12	Steel	20'	13	21 7/8	23 1/2	23 3/4	20 1/8	7 7/8	39 3/8	35'-6"	14'-6"	4	4
		12'	AL-FS-1000-34-53-12	Alum	20'	30	21	23 5/8	-	16 3/4	7 7/8	44 1/2	35'-6"	14'-7 1/8"	4	4
		12'	GLCSL-FS-1000-34 (S or AL)-53-12	Steel	25'	13	21 7/8	23 3/8	26 5/8	20 1/8	7 7/8	39 3/8	35'-6"	14'-6 7/8"	4	3
		14'	GLCS-FS-1000-34 (S or AL)-53-14	Steel	20'	13	21 7/8	23 1/2	23 3/4	20 1/8	7 7/8	39 3/8	35'-8"	16'-6"	5	4
		14'	AL-FS-1000-34-53-14	Alum	20'	30	21	23 5/8	-	16 3/4	7 7/8	44 1/2	35'-8"	16'-7 1/8"	5	4
		14'	GLCSL-FS-1000-34 (S or AL)-53-14	Steel	25'	13	21 7/8	23 3/8	26 5/8	20 1/8	7 7/8	39 3/8	35'-8"	16'-6 7/8"	5	3
	63'	10'	GLCS-FS-1000-34 (S or AL)-63-10	Steel	20'	19	21 7/8	23 1/2	23 3/4	20 1/8	7 7/8	39 3/8	35'-6"	12'-6"	4	4
		10'	AL-FS-1000-34-63-10	Alum	20'	36	21	23 5/8	-	16 3/4	7 7/8	44 1/2	35'-6"	12'-7 1/8"	4	4
		12'	GLCS-FS-1000-34 (S or AL)-63-12	Steel	20'	19	21 7/8	23 1/2	23 3/4	20 1/8	7 7/8	39 3/8	35'-6"	14'-6"	4	4
		12'	AL-FS-1000-34-63-12	Alum	20'	36	21	23 5/8	-	16 3/4	7 7/8	44 1/2	35'-6"	14'-7 1/8"	4	4
		14'	GLCS-FS-1000-34 (S or AL)-63-14	Steel	20'	19	21 7/8	23 1/2	23 3/4	20 1/8	7 7/8	39 3/8	35'-8"	16'-6"	5	4
		14'	AL-FS-1000-34-63-14	Alum	20'	36	21	23 5/8	-	16 3/4	7 7/8	44 1/2	35'-8"	16'-7 1/8"	5	4
	64'	10'	GLCSLX-FS-1000-34 (S or AL)-64-10	Steel	30'	36	21 7/8	26 1/2	29 3/4	20 1/8	7 7/8	44 1/2	35'-6"	12'-9"	4	3
		12'	GLCSLX-FS-1000-34 (S or AL)-64-12	Steel	30'	36	21 7/8	26 1/2	29 3/4	20 1/8	7 7/8	44 1/2	35'-6"	14'-9"	4	3
		14'	GLCSLX-FS-1000-34 (S or AL)-64-14	Steel	30'	36	21 7/8	26 1/2	29 3/4	20 1/8	7 7/8	44 1/2	35'-8"	16'-9"	5	3
	78'	10'	GLCSL-FS-1000-34 (S or AL)-78-10	Steel	25'	46	21 7/8	23 3/8	26 5/8	20 1/8	7 7/8	44 1/2	35'-6"	12'-6 7/8"	4	4
		12'	GLCSL-FS-1000-34 (S or AL)-78-12	Steel	25'	46	21 7/8	23 3/8	26 5/8	20 1/8	7 7/8	44 1/2	35'-6"	14'-6 7/8"	4	4
		14'	GLCSL-FS-1000-34 (S or AL)-78-14	Steel	25'	46	21 7/8	23 3/8	26 5/8	20 1/8	7 7/8	44 1/2	35'-8"	16'-6 7/8"	5	4
	83'	10'	GLCS-FS-1000-34 (S or AL)-83-10	Steel	20'	46	21 7/8	23 1/2	23 3/4	20 1/8	7 7/8	44 1/2	35'-6"	12'-6"	4	5
		10'	AL-FS-1000-34-83-10	Alum	20'	46	21	23 5/8	-	16 3/4	7 7/8	44 1/2	35'-6"	12'-7 1/8"	4	5
		12'	GLCS-FS-1000-34 (S or AL)-83-12	Steel	20'	46	21 7/8	23 1/2	23 3/4	20 1/8	7 7/8	44 1/2	35'-6"	14'-6"	4	5
		12'	AL-FS-1000-34-83-12	Alum	20'	46	21	23 5/8	-	16 3/4	7 7/8	44 1/2	35'-6"	14'-7 1/8"	4	5
		14'	GLCS-FS-1000-34 (S or AL)-83-14	Steel	20'	46	21 7/8	23 1/2	23 3/4	20 1/8	7 7/8	44 1/2	35'-8"	16'-6"	5	5
		14'	AL-FS-1000-34-83-14	Alum	20'	46	21	23 5/8	-	16 3/4	7 7/8	44 1/2	35'-8"	16'-7 1/8"	5	5
	94'	10'	GLCSLX-FS-1000-34 (S or AL)-94-10	Steel	30'	54	21 7/8	26 1/2	29 3/4	20 1/8	7 7/8	44 1/2	35'-6"	12'-9"	4	4
		12'	GLCSLX-FS-1000-34 (S or AL)-94-12	Steel	30'	54	21 7/8	26 1/2	29 3/4	20 1/8	7 7/8	44 1/2	35'-6"	14'-9"	4	4
		14'	GLCSLX-FS-1000-34 (S or AL)-94-14	Steel	30'	54	21 7/8	26 1/2	29 3/4	20 1/8	7 7/8	44 1/2	35'-8"	16'-9"	5	4
	103'	10'	GLCS-FS-1000-34 (S or AL)-103-10	Steel	20'	54	21 7/8	23 1/2	23 3/4	20 1/8	7 7/8	44 1/2	35'-6"	12'-6"	4	6
		10'	AL-FS-1000-34-103-10	Alum	20'	54	21	23 5/8	-	16 3/4	7 7/8	44 1/2	35'-6"	12'-7 1/8"	4	6
		10'	GLCSL-FS-1000-34 (S or AL)-103-10	Steel	25'	54	21 7/8	23 3/8	26 5/8	20 1/8	7 7/8	44 1/2	35'-6"	12'-6 7/8"	4	5
		12'	GLCS-FS-1000-34 (S or AL)-103-12	Steel	20'	54	21 7/8	23 1/2	23 3/4	20 1/8	7 7/8	44 1/2	35'-6"	14'-6"	4	6
		12'	AL-FS-1000-34-103-12	Alum	20'	54	21	23 5/8	-	16 3/4	7 7/8	44 1/2	35'-6"	14'-7 1/8"	4	6
		12'	GLCSL-FS-1000-34 (S or AL)-103-12	Steel	25'	54	21 7/8	23 3/8	26 5/8	20 1/8	7 7/8	44 1/2	35'-6"	14'-6 7/8"	4	5
		14'	GLCS-FS-1000-34 (S or AL)-103-14	Steel	20'	54	21 7/8	23 1/2	23 3/4	20 1/8	7 7/8	44 1/2	35'-8"	16'-6"	5	6
		14'	AL-FS-1000-34-103-14	Alum	20'	54	21	23 5/8	-	16 3/4	7 7/8	44 1/2	35'-8"	16'-7 1/8"	5	6
		14'	GLCSL-FS-1000-34 (S or AL)-103-14	Steel	25'	54	21 7/8	23 3/8	26 5/8	20 1/8	7 7/8	44 1/2	35'-8"	16'-6 7/8"	5	5
	124'	10'	GLCSLX-FS-1000-34 (S or AL)-124-10	Steel	30'	54	21 7/8	26 1/2	29 3/4	20 1/8	7 7/8	44 1/2	35'-6"	12'-9"	4	5
		12'	GLCSLX-FS-1000-34 (S or AL)-124-12	Steel	30'	54	21 7/8	26 1/2	29 3/4	20 1/8	7 7/8	44 1/2	35'-6"	14'-9"	4	5
		14'	GLCSLX-FS-1000-34 (S or AL)-124-14	Steel	30'	54	21 7/8	26 1/2	29 3/4	20 1/8	7 7/8	44 1/2	35'-8"	16'-9"	5	5

*This column provides the total number of support assemblies based on the "L1" dimensions shown. Support assemblies are designed to AISC specifications and do not require bracing. If no movement of the support assembly is preferred, then bracing to the building steel is recommended (not included).

To Determine Hook Coverage: [Bridge Travel on Runway = Runway Length - (2xL8)] by [Hoist Trolley Travel on Bridge = Bridge Length - L3 - L6] (L6 allows for festoon stack-up).

Gorbel® Free Standing Work Station Bridge Crane Kits include: bridge, runways, the appropriate number of support assemblies, hoist trolley, end trucks, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel runway lengths greater than 63' and all aluminum systems), festoon stack-up section, splice joints and hanger brackets. Hoist and anchor bolts provided by others.

Dimensions are for reference only and are subject to change without notice.

2000# CAPACITY

FREE STANDING WORK STATION BRIDGE CRANES

BRIDGE LENGTH (L)	RUNWAY LENGTH	TS	MODEL NUMBER	TRACK MAT.	RUNWAY			BRIDGE					SUPPORT STRUCTURE			
					MAX. L1	L7 in	L8 in	H3 in	H3A in	H5 in	L3 in	L6 in	OAW	OAH	D in	*LdS
10'	11'-6"	10'	GLCS-FS-2000-10 (S or AL)-11.5-10	Steel	20'	9	16 1/8	19 5/8	25	8 7/8	8 1/8	25	11'-8"	12'-0 1/8"	5	2
		12'	GLCS-FS-2000-10 (S or AL)-11.5-12	Steel	20'	9	16 1/8	19 5/8	25	8 7/8	8 1/8	25	11'-8"	15'-0 1/8"	5	2
		15'	GLCSL-FS-2000-10 (S or AL)-11.5-15	Steel	20'	9	16 1/8	19 5/8	25	8 7/8	8 1/8	25	11'-8"	16'-1 1/8"	5	2
	23'	10'	GLCS-FS-2000-10 (S or AL)-23-10	Steel	20'	9	16 1/8	19 5/8	24	8 7/8	8 1/8	24	11'-8"	12'-0 1/8"	5	2
		10'	AL-FS-2000-10-23-10	Alum	20'	13	17	25 1/4	-	13 3/8	8	17 5/8	11'-8"	12'-5 3/4"	5	2
		12'	GLCS-FS-2000-10 (S or AL)-23-12	Steel	20'	9	16 1/8	19 5/8	24	8 7/8	8 1/8	24	11'-8"	14'-0 1/8"	5	2
		12'	AL-FS-2000-10-23-12	Alum	20'	13	17	25 1/4	-	13 3/8	8	17 5/8	11'-8"	14'-5 3/4"	5	2
		14'	GLCS-FS-2000-10 (S or AL)-23-14	Steel	20'	9	16 1/8	19 5/8	24	8 7/8	8 1/8	24	11'-8"	16'-1 1/8"	5	2
		14'	AL-FS-2000-10-23-14	Alum	20'	13	17	25 1/4	-	13 3/8	8	17 5/8	11'-8"	16'-6 3/4"	5	2
	28'	10'	GLCSL-FS-2000-10 (S or AL)-28-10	Steel	25'	13	16 1/8	23	27 3/8	8 7/8	8 1/8	24	11'-8"	12'-4 1/2"	5	2
		12'	GLCSL-FS-2000-10 (S or AL)-28-12	Steel	25'	13	16 1/8	23	27 3/8	8 7/8	8 1/8	24	11'-8"	14'-4 1/2"	5	2
		14'	GLCSL-FS-2000-10 (S or AL)-28-14	Steel	25'	13	16 1/8	23	27 3/8	8 7/8	8 1/8	24	11'-8"	16'-4 1/2"	5	2
	33'	10'	GLCS-FS-2000-10 (S or AL)-33-10	Steel	20'	13	16 1/8	19 5/8	24	8 7/8	8 1/8	24	11'-8"	12'-0 1/8"	5	3
		10'	AL-FS-2000-10-33-10	Alum	20'	19	17	25 1/4	-	13 3/8	8	17 5/8	11'-8"	12'-5 3/4"	5	3
		12'	GLCS-FS-2000-10 (S or AL)-33-12	Steel	20'	13	16 1/8	19 5/8	24	8 7/8	8 1/8	24	11'-8"	14'-0 1/8"	5	3
		12'	AL-FS-2000-10-33-12	Alum	20'	19	17	25 1/4	-	13 3/8	8	17 5/8	11'-8"	14'-5 3/4"	5	3
		14'	GLCS-FS-2000-10 (S or AL)-33-14	Steel	20'	13	16 1/8	19 5/8	24	8 7/8	8 1/8	24	11'-8"	16'-1 1/8"	5	3
		14'	AL-FS-2000-10-33-14	Alum	20'	19	17	25 1/4	-	13 3/8	8	17 5/8	11'-8"	16'-6 3/4"	5	3
	34'	10'	GLCSLX-FS-2000-10 (S or AL)-34-10	Steel	30'	13	16 1/8	25 5/8	30	8 7/8	8 1/8	24	11'-8"	12'-7 1/8"	5	2
		12'	GLCSLX-FS-2000-10 (S or AL)-34-12	Steel	30'	13	16 1/8	25 5/8	30	8 7/8	8 1/8	24	11'-8"	14'-7 1/8"	5	2
		14'	GLCSLX-FS-2000-10 (S or AL)-34-14	Steel	30'	13	16 1/8	25 5/8	30	8 7/8	8 1/8	24	11'-8"	16'-7 1/8"	5	2
	43'	10'	GLCS-FS-2000-10 (S or AL)-43-10	Steel	20'	19	16 1/8	19 5/8	24	8 7/8	8 1/8	24	11'-8"	12'-0 1/8"	5	3
		10'	AL-FS-2000-10-43-10	Alum	20'	26	17	25 1/4	-	13 3/8	8	17 5/8	11'-8"	12'-5 3/4"	5	3
		12'	GLCS-FS-2000-10 (S or AL)-43-12	Steel	20'	19	16 1/8	19 5/8	24	8 7/8	8 1/8	24	11'-8"	14'-0 1/8"	5	3
		12'	AL-FS-2000-10-43-12	Alum	20'	26	17	25 1/4	-	13 3/8	8	17 5/8	11'-8"	14'-5 3/4"	5	3
		14'	GLCS-FS-2000-10 (S or AL)-43-14	Steel	20'	19	16 1/8	19 5/8	24	8 7/8	8 1/8	24	11'-8"	16'-1 1/8"	5	3
		14'	AL-FS-2000-10-43-14	Alum	20'	26	17	25 1/4	-	13 3/8	8	17 5/8	11'-8"	16'-6 3/4"	5	3
	53'	10'	GLCS-FS-2000-10 (S or AL)-53-10	Steel	20'	19	16 1/8	19 5/8	24	8 7/8	8 1/8	24	11'-8"	12'-0 1/8"	5	4
		10'	AL-FS-2000-10-53-10	Alum	20'	30	17	25 1/4	-	13 3/8	8	17 5/8	11'-8"	12'-5 3/4"	5	4
		10'	GLCSL-FS-2000-10 (S or AL)-53-10	Steel	25'	19	16 1/8	23	27 3/8	8 7/8	8 1/8	24	11'-8"	12'-4 1/2"	5	3
		12'	GLCS-FS-2000-10 (S or AL)-53-12	Steel	20'	19	16 1/8	19 5/8	24	8 7/8	8 1/8	24	11'-8"	14'-0 1/8"	5	4
		12'	AL-FS-2000-10-53-12	Alum	20'	30	17	25 1/4	-	13 3/8	8	17 5/8	11'-8"	14'-5 3/4"	5	4
		12'	GLCSL-FS-2000-10 (S or AL)-53-12	Steel	25'	19	16 1/8	23	27 3/8	8 7/8	8 1/8	24	11'-8"	14'-4 1/2"	5	3
		14'	GLCS-FS-2000-10 (S or AL)-53-14	Steel	20'	19	16 1/8	19 5/8	24	8 7/8	8 1/8	24	11'-8"	16'-1 1/8"	5	4
		14'	AL-FS-2000-10-53-14	Alum	20'	30	17	25 1/4	-	13 3/8	8	17 5/8	11'-8"	16'-6 3/4"	5	4
	63'	10'	GLCSL-FS-2000-10 (S or AL)-53-14	Steel	25'	19	16 1/8	23	27 3/8	8 7/8	8 1/8	24	11'-8"	16'-4 1/2"	5	3
		10'	GLCS-FS-2000-10 (S or AL)-63-10	Steel	20'	26	16 1/8	19 5/8	24	8 7/8	8 1/8	24	11'-8"	12'-0 1/8"	5	4
		10'	AL-FS-2000-10-63-10	Alum	20'	36	17	25 1/4	-	13 3/8	8	17 5/8	11'-8"	12'-5 3/4"	5	4
		12'	GLCS-FS-2000-10 (S or AL)-63-12	Steel	20'	26	16 1/8	19 5/8	24	8 7/8	8 1/8	24	11'-8"	14'-0 1/8"	5	4
		12'	AL-FS-2000-10-63-12	Alum	20'	36	17	25 1/4	-	13 3/8	8	17 5/8	11'-8"	14'-5 3/4"	5	4
		14'	GLCS-FS-2000-10 (S or AL)-63-14	Steel	20'	26	16 1/8	19 5/8	24	8 7/8	8 1/8	24	11'-8"	16'-1 1/8"	5	4
	64'	10'	AL-FS-2000-10-63-14	Alum	20'	36	17	25 1/4	-	13 3/8	8	17 5/8	11'-8"	16'-6 3/4"	5	4
		10'	GLCSLX-FS-2000-10 (S or AL)-64-10	Steel	30'	36	16 1/8	25 5/8	30	8 7/8	8 1/8	24	11'-8"	12'-7 1/8"	5	3
		12'	GLCSLX-FS-2000-10 (S or AL)-64-12	Steel	30'	36	16 1/8	25 5/8	30	8 7/8	8 1/8	24	11'-8"	14'-7 1/8"	5	3
	78'	10'	GLCSLX-FS-2000-10 (S or AL)-64-14	Steel	30'	36	16 1/8	25 5/8	30	8 7/8	8 1/8	24	11'-8"	16'-7 1/8"	5	3
		10'	GLCSL-FS-2000-10 (S or AL)-78-10	Steel	25'	46	16 1/8	23	27 3/8	8 7/8	8 1/8	24	11'-8"	12'-4 1/2"	5	4
		12'	GLCSL-FS-2000-10 (S or AL)-78-12	Steel	25'	46	16 1/8	23	27 3/8	8 7/8	8 1/8	24	11'-8"	14'-4 1/2"	5	4
		14'	GLCSL-FS-2000-10 (S or AL)-78-14	Steel	25'	46	16 1/8	23	27 3/8	8 7/8	8 1/8	24	11'-8"	16'-4 1/2"	5	4
	83'	10'	GLCS-FS-2000-10 (S or AL)-83-10	Steel	20'	46	16 1/8	19 5/8	24	8 7/8	8 1/8	24	11'-8"	12'-0 1/8"	5	5
		10'	AL-FS-2000-10-83-10	Alum	20'	46	17	25 1/4	-	13 3/8	8	17 5/8	11'-8"	12'-5 3/4"	5	5
		12'	GLCS-FS-2000-10 (S or AL)-83-12	Steel	20'	46	16 1/8	19 5/8	24	8 7/8	8 1/8	24	11'-8"	14'-0 1/8"	5	5
		12'	AL-FS-2000-10-83-12	Alum	20'	46	17	25 1/4	-	13 3/8	8	17 5/8	11'-8"	14'-5 3/4"	5	5
		14'	GLCS-FS-2000-10 (S or AL)-83-14	Steel	20'	46	16 1/8	19 5/8	24	8 7/8	8 1/8	24	11'-8"	16'-1 1/8"	5	5
		14'	AL-FS-2000-10-83-14	Alum	20'	46	17	25 1/4	-	13 3/8	8	17 5/8	11'-8"	16'-6 3/4"	5	5
	94'	10'	GLCSLX-FS-2000-10 (S or AL)-94-10	Steel	30'	54	16 1/8	25 5/8	30	8 7/8	8 1/8	24	11'-8"	12'-7 1/8"	5	4
		12'	GLCSLX-FS-2000-10 (S or AL)-94-12	Steel	30'	54	16 1/8	25 5/8	30	8 7/8	8 1/8	24	11'-8"	14'-7 1/8"	5	4
		14'	GLCSLX-FS-2000-10 (S or AL)-94-14	Steel	30'	54	16 1/8	25 5/8	30	8 7/8	8 1/8	24	11'-8"	16'-7 1/8"	5	4
	103'	10'	GLCS-FS-2000-10 (S or AL)-103-10	Steel	20'	54	16 1/8	19 5/8	24	8 7/8	8 1/8	24	11'-8"	12'-0 1/8"	5	6
		10'	AL-FS-2000-10-103-10	Alum	20'	54	17	25 1/4	-	13 3/8	8	17 5/8	11'-8"	12'-5 3/4"	5	6
		10'	GLCSL-FS-2000-10 (S or AL)-103-10	Steel	25'	54	16 1/8	23	27 3/8	8 7/8	8 1/8	24	11'-8"	12'-4 1/2"	5	5
		12'	GLCS-FS-2000-10 (S or AL)-103-12	Steel	20'	54	16 1/8	19 5/8	24	8 7/8	8 1/8	24	11'-8"	14'-0 1/8"	5	6
		12'	AL-FS-2000-10-103-12	Alum	20'	54	17	25 1/4	-	13 3/8	8	17 5/8	11'-8"	14'-5 3/4"	5	6
		12'	GLCSL-FS-2000-10 (S or AL)-103-12	Steel	25'	54	16 1/8	23	27 3/8	8 7/8	8 1/8	24	11'-8"	14'-4 1/2"	5	5
		14'	GLCS-FS-2000-10 (S or AL)-103-14	Steel	20'	54	16 1/8	19 5/8	24	8 7/8	8 1/8	24	11'-8"	16'-1 1/8"	5	6
		14'	AL-FS-2000-10-103-14	Alum	20'	54	17	25 1/4	-	13 3/8	8	17 5/8	11'-8"	16'-6 3/4"	5	6
	124'	10'	GLCSL-FS-2000-10 (S or AL)-103-14	Steel	25'	54	16 1/8	23	27 3/8	8 7/8	8 1/8	24	11'-8"	16'-4 1/2"	5	5
		10'	GLCSLX-FS-2000-10 (S or AL)-124-10	Steel	30'	54	16 1/8	25 5/8	30	8 7/8	8 1/8	24	11'-8"	12'-7 1/8"	5	5
		12'	GLCSLX-FS-2000-10 (S or AL)-124-12	Steel	30'	54	16 1/8	25 5/8	30	8 7/8	8 1/8	24	11'-8"	14'-7 1/8"	5	5
		14'	GLCSLX-FS-2000-10 (S or AL)-124-14	Steel	30'	54	16 1/8	25 5/8	30	8 7/8	8 1/8	24	11'-8"	16'-7 1/8"	5	5

*This column provides the total number of support assemblies based on the "L1" dimensions shown. Support assemblies are designed to AISC specifications and do not require bracing. If no movement of the support assembly is preferred, then bracing to the building steel is recommended (not included).

To Determine Hook Coverage: [Bridge Travel on Runway = Runway Length - (2xL8)] by [Hoist Trolley Travel on Bridge = Bridge Length - L3 - L6] (L6 allows for festoon stack-up).

Gorbel® Free Standing Work Station Bridge Crane Kits include: bridge, runways, the appropriate number of support assemblies, hoist trolley, end trucks, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel runway lengths greater than 63' and all aluminum systems), festoon stack-up section, splice joints and hanger brackets. Hoist and anchor bolts provided by others.

Dimensions are for reference only and are subject to change without notice.

FREE STANDING WORK STATION BRIDGE CRANES

BRIDGE LENGTH (L)	RUNWAY LENGTH	TS	MODEL NUMBER	TRACK MAT.	RUNWAY			BRIDGE					SUPPORT STRUCTURE			
					MAX. L1	L7 in	L8 in	H3 in	H3A in	H4 in	L3 in	L6 in	OAW	OAH	D in	Spt #
15'	23'	10'	GLCS-FS-2000-15 (S or AL)-23-10	Steel	20'	9	16 1/8	19 5/8	24	14 7/8	8 1/8	24	16'-8"	12'-1 1/8"	5	2
		10'	AL-FS-2000-15-23-10	Alum	20'	13	17	25 1/4	-	13 3/8	8	24 3/8	16'-8"	12'-6 3/4"	5	2
		12'	GLCS-FS-2000-15 (S or AL)-23-12	Steel	20'	9	16 1/8	19 5/8	24	14 7/8	8 1/8	24	16'-8"	14'-1 1/8"	5	2
		12'	AL-FS-2000-15-23-12	Alum	20'	13	17	25 1/4	-	13 3/8	8	24 3/8	16'-8"	14'-6 3/4"	5	2
		14'	GLCS-FS-2000-15 (S or AL)-23-14	Steel	20'	9	16 1/8	19 5/8	24	14 7/8	8 1/8	24	16'-8"	16'-1 1/8"	5	2
		14'	AL-FS-2000-15-23-14	Alum	20'	13	17	25 1/4	-	13 3/8	8	24 3/8	16'-8"	16'-6 3/4"	5	2
	28'	10'	GLCSL-FS-2000-15 (S or AL)-28-10	Steel	25'	13	16 1/8	23	27 3/8	14 7/8	8 1/8	24	16'-8"	12'-4 1/2"	5	2
		12'	GLCSL-FS-2000-15 (S or AL)-28-12	Steel	25'	13	16 1/8	23	27 3/8	14 7/8	8 1/8	24	16'-8"	14'-4 1/2"	5	2
		14'	GLCSL-FS-2000-15 (S or AL)-28-14	Steel	25'	13	16 1/8	23	27 3/8	14 7/8	8 1/8	24	16'-8"	16'-4 1/2"	5	2
	33'	10'	GLCS-FS-2000-15 (S or AL)-33-10	Steel	20'	13	16 1/8	19 5/8	24	14 7/8	8 1/8	24	16'-8"	12'-1 1/8"	5	3
		10'	AL-FS-2000-15-33-10	Alum	20'	19	17	25 1/4	-	13 3/8	8	24 3/8	16'-8"	12'-6 3/4"	5	3
		12'	GLCS-FS-2000-15 (S or AL)-33-12	Steel	20'	13	16 1/8	19 5/8	24	14 7/8	8 1/8	24	16'-8"	14'-1 1/8"	5	3
		12'	AL-FS-2000-15-33-12	Alum	20'	19	17	25 1/4	-	13 3/8	8	24 3/8	16'-8"	14'-6 3/4"	5	3
		14'	GLCS-FS-2000-15 (S or AL)-33-14	Steel	20'	13	16 1/8	19 5/8	24	14 7/8	8 1/8	24	16'-8"	16'-1 1/8"	5	3
		14'	AL-FS-2000-15-33-14	Alum	20'	19	17	25 1/4	-	13 3/8	8	24 3/8	16'-8"	16'-6 3/4"	5	3
	34'	10'	GLCSLX-FS-2000-15 (S or AL)-34-10	Steel	30'	13	16 1/8	25 5/8	30	14 7/8	8 1/8	24	16'-8"	12'-7 1/8"	5	2
		12'	GLCSLX-FS-2000-15 (S or AL)-34-12	Steel	30'	13	16 1/8	25 5/8	30	14 7/8	8 1/8	24	16'-8"	14'-7 1/8"	5	2
		14'	GLCSLX-FS-2000-15 (S or AL)-34-14	Steel	30'	13	16 1/8	25 5/8	30	14 7/8	8 1/8	24	16'-8"	16'-8 1/8"	5	2
	43'	10'	GLCS-FS-2000-15 (S or AL)-43-10	Steel	20'	19	16 1/8	19 5/8	24	14 7/8	8 1/8	24	16'-8"	12'-1 1/8"	5	3
		10'	AL-FS-2000-15-43-10	Alum	20'	26	17	25 1/4	-	13 3/8	8	24 3/8	16'-8"	12'-6 3/4"	5	3
		12'	GLCS-FS-2000-15 (S or AL)-43-12	Steel	20'	19	16 1/8	19 5/8	24	14 7/8	8 1/8	24	16'-8"	14'-1 1/8"	5	3
		12'	AL-FS-2000-15-43-12	Alum	20'	26	17	25 1/4	-	13 3/8	8	24 3/8	16'-8"	14'-6 3/4"	5	3
		14'	GLCS-FS-2000-15 (S or AL)-43-14	Steel	20'	19	16 1/8	19 5/8	24	14 7/8	8 1/8	24	16'-8"	16'-1 1/8"	5	3
		14'	AL-FS-2000-15-43-14	Alum	20'	26	17	25 1/4	-	13 3/8	8	24 3/8	16'-8"	16'-6 3/4"	5	3
	53'	10'	GLCS-FS-2000-15 (S or AL)-53-10	Steel	20'	19	16 1/8	19 5/8	24	14 7/8	8 1/8	24	16'-8"	12'-1 1/8"	5	4
		10'	AL-FS-2000-15-53-10	Alum	20'	30	17	25 1/4	-	13 3/8	8	24 3/8	16'-8"	12'-6 3/4"	5	4
		10'	GLCSL-FS-2000-15 (S or AL)-53-10	Steel	25'	19	16 1/8	23	27 3/8	14 7/8	8 1/8	24	16'-8"	12'-4 1/2"	5	3
		12'	GLCS-FS-2000-15 (S or AL)-53-12	Steel	20'	19	16 1/8	19 5/8	24	14 7/8	8 1/8	24	16'-8"	14'-1 1/8"	5	4
		12'	AL-FS-2000-15-53-12	Alum	20'	30	17	25 1/4	-	13 3/8	8	24 3/8	16'-8"	14'-6 3/4"	5	4
		12'	GLCSL-FS-2000-15 (S or AL)-53-12	Steel	25'	19	16 1/8	23	27 3/8	14 7/8	8 1/8	24	16'-8"	14'-4 1/2"	5	3
		14'	GLCS-FS-2000-15 (S or AL)-53-14	Steel	20'	19	16 1/8	19 5/8	24	14 7/8	8 1/8	24	16'-8"	16'-1 1/8"	5	4
		14'	AL-FS-2000-15-53-14	Alum	20'	30	17	25 1/4	-	13 3/8	8	24 3/8	16'-8"	16'-6 3/4"	5	4
		14'	GLCSL-FS-2000-15 (S or AL)-53-14	Steel	25'	19	16 1/8	23	27 3/8	14 7/8	8 1/8	24	16'-8"	16'-4 1/2"	5	3
	63'	10'	GLCS-FS-2000-15 (S or AL)-63-10	Steel	20'	26	16 1/8	19 5/8	24	14 7/8	8 1/8	24	16'-8"	12'-1 1/8"	5	4
		10'	AL-FS-2000-15-63-10	Alum	20'	36	17	25 1/4	-	13 3/8	8	24 3/8	16'-8"	12'-6 3/4"	5	4
		12'	GLCS-FS-2000-15 (S or AL)-63-12	Steel	20'	26	16 1/8	19 5/8	24	14 7/8	8 1/8	24	16'-8"	14'-1 1/8"	5	4
		12'	AL-FS-2000-15-63-12	Alum	20'	36	17	25 1/4	-	13 3/8	8	24 3/8	16'-8"	14'-6 3/4"	5	4
		14'	GLCS-FS-2000-15 (S or AL)-63-14	Steel	20'	26	16 1/8	19 5/8	24	14 7/8	8 1/8	24	16'-8"	16'-1 1/8"	5	4
		14'	AL-FS-2000-15-63-14	Alum	20'	36	17	25 1/4	-	13 3/8	8	24 3/8	16'-8"	16'-6 3/4"	5	4
	64'	10'	GLCSLX-FS-2000-15 (S or AL)-64-10	Steel	30'	36	16 1/8	25 5/8	30	14 7/8	8 1/8	24 3/8	16'-8"	12'-7 1/8"	5	3
		12'	GLCSLX-FS-2000-15 (S or AL)-64-12	Steel	30'	36	16 1/8	25 5/8	30	14 7/8	8 1/8	24 3/8	16'-8"	14'-7 1/8"	5	3
		14'	GLCSLX-FS-2000-15 (S or AL)-64-14	Steel	30'	36	16 1/8	25 5/8	30	14 7/8	8 1/8	24 3/8	16'-8"	16'-8 1/8"	5	3
	78'	10'	GLCSL-FS-2000-15 (S or AL)-78-10	Steel	25'	46	16 1/8	23	27 3/8	14 7/8	8 1/8	24 3/8	16'-8"	12'-4 1/2"	5	4
		12'	GLCSL-FS-2000-15 (S or AL)-78-12	Steel	25'	46	16 1/8	23	27 3/8	14 7/8	8 1/8	24 3/8	16'-8"	14'-4 1/2"	5	4
		14'	GLCSL-FS-2000-15 (S or AL)-78-14	Steel	25'	46	16 1/8	23	27 3/8	14 7/8	8 1/8	24 3/8	16'-8"	16'-4 1/2"	5	4
	83'	10'	GLCS-FS-2000-15 (S or AL)-83-10	Steel	20'	46	16 1/8	19 5/8	24	14 7/8	8 1/8	24 3/8	16'-8"	12'-1 1/8"	5	5
		10'	AL-FS-2000-15-83-10	Alum	20'	46	17	25 1/4	-	13 3/8	8	24 3/8	16'-8"	12'-6 3/4"	5	5
		12'	GLCS-FS-2000-15 (S or AL)-83-12	Steel	20'	46	16 1/8	19 5/8	24	14 7/8	8 1/8	24 3/8	16'-8"	14'-1 1/8"	5	5
		12'	AL-FS-2000-15-83-12	Alum	20'	46	17	25 1/4	-	13 3/8	8	24 3/8	16'-8"	14'-6 3/4"	5	5
		14'	GLCS-FS-2000-15 (S or AL)-83-14	Steel	20'	46	16 1/8	19 5/8	24	14 7/8	8 1/8	24 3/8	16'-8"	16'-1 1/8"	5	5
		14'	AL-FS-2000-15-83-14	Alum	20'	46	17	25 1/4	-	13 3/8	8	24 3/8	16'-8"	16'-6 3/4"	5	5
	94'	10'	GLCSLX-FS-2000-15 (S or AL)-94-10	Steel	30'	54	16 1/8	25 5/8	30	14 7/8	8 1/8	24 3/8	16'-8"	12'-7 1/8"	5	4
		12'	GLCSLX-FS-2000-15 (S or AL)-94-12	Steel	30'	54	16 1/8	25 5/8	30	14 7/8	8 1/8	24 3/8	16'-8"	14'-7 1/8"	5	4
		14'	GLCSLX-FS-2000-15 (S or AL)-94-14	Steel	30'	54	16 1/8	25 5/8	30	14 7/8	8 1/8	24 3/8	16'-8"	16'-8 1/8"	5	4
	103'	10'	GLCS-FS-2000-15 (S or AL)-103-10	Steel	20'	54	16 1/8	19 5/8	24	14 7/8	8 1/8	24 3/8	16'-8"	12'-1 1/8"	5	6
		10'	AL-FS-2000-15-103-10	Alum	20'	54	17	25 1/4	-	13 3/8	8	24 3/8	16'-8"	12'-6 3/4"	5	6
		10'	GLCSL-FS-2000-15 (S or AL)-103-10	Steel	25'	54	16 1/8	23	27 3/8	14 7/8	8 1/8	24 3/8	16'-8"	12'-4 1/2"	5	5
		12'	GLCS-FS-2000-15 (S or AL)-103-12	Steel	20'	54	16 1/8	19 5/8	24	14 7/8	8 1/8	24 3/8	16'-8"	14'-1 1/8"	5	6
		12'	AL-FS-2000-15-103-12	Alum	20'	54	17	25 1/4	-	13 3/8	8	24 3/8	16'-8"	14'-6 3/4"	5	6
		12'	GLCSL-FS-2000-15 (S or AL)-103-12	Steel	25'	54	16 1/8	23	27 3/8	14 7/8	8 1/8	24 3/8	16'-8"	14'-4 1/2"	5	5
		14'	GLCS-FS-2000-15 (S or AL)-103-14	Steel	20'	54	16 1/8	19 5/8	24	14 7/8	8 1/8	24 3/8	16'-8"	16'-1 1/8"	5	6
		14'	AL-FS-2000-15-103-14	Alum	20'	54	17	25 1/4	-	13 3/8	8	24 3/8	16'-8"	16'-6 3/4"	5	6
	124'	10'	GLCSLX-FS-2000-15 (S or AL)-124-10	Steel	30'	54	16 1/8	25 5/8	30	14 7/8	8 1/8	24 3/8	16'-8"	12'-7 1/8"	5	5
		12'	GLCSLX-FS-2000-15 (S or AL)-124-12	Steel	30'	54	16 1/8	25 5/8	30	14 7/8	8 1/8	24 3/8	16'-8"	14'-7 1/8"	5	5
		14'	GLCSLX-FS-2000-15 (S or AL)-124-14	Steel	30'	54	16 1/8	25 5/8	30	14 7/8	8 1/8	24 3/8	16'-8"	16'-8 1/8"	5	5

*This column provides the total number of support assemblies based on the "L1" dimensions shown. Support assemblies are designed to AISC specifications and do not require bracing. If no movement of the support assembly is preferred, then bracing to the building steel is recommended (not included).

To Determine Hook Coverage: [Bridge Travel on Runway = Runway Length - (2xL8)] by [Hoist Trolley Travel on Bridge = Bridge Length - L3 - L6] (L6 allows for festoon stack-up).

Gorbel® Free Standing Work Station Bridge Crane Kits include: bridge, runways, the appropriate number of support assemblies, hoist trolley, end trucks, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel runway lengths greater than 63' and all aluminum systems), festoon stack-up section, splice joints and hanger brackets. Hoist and anchor bolts provided by others.

Dimensions are for reference only and are subject to change without notice.

2000# CAPACITY

FREE STANDING WORK STATION BRIDGE CRANES

BRIDGE LENGTH (L)	RUNWAY LENGTH	TS	MODEL NUMBER	TRACK MAT.	RUNWAY			BRIDGE					SUPPORT STRUCTURE			
					MAX. L1	L7 in	L8 in	H3 in	H3A in	H4 in	L3 in	L6 in	OAW	OAH	D in	*LdS
20'	23'	10'	GLCS-FS-2000-20 (S or AL)-23-10	Steel	20'	9	16 1/8	19 5/8	24	14 7/8	8 1/8	24	21'-8"	12'-1 1/8"	5	2
		10'	AL-FS-2000-20-23-10	Alum	20'	13	17	25 1/4	-	15 1/2	8	27 3/4	21'-8"	12'-6 3/4"	5	2
		12'	GLCS-FS-2000-20 (S or AL)-23-12	Steel	20'	9	16 1/8	19 5/8	24	14 7/8	8 1/8	24	21'-8"	14'-1 1/8"	5	2
		12'	AL-FS-2000-20-23-12	Alum	20'	13	17	25 1/4	-	15 1/2	8	27 3/4	21'-8"	14'-6 3/4"	5	2
		14'	GLCS-FS-2000-20 (S or AL)-23-14	Steel	20'	9	16 1/8	19 5/8	24	14 7/8	8 1/8	24	21'-8"	16'-2 1/8"	5	2
		14'	AL-FS-2000-20-23-14	Alum	20'	13	17	25 1/4	-	15 1/2	8	27 3/4	21'-8"	16'-7 3/4"	5	2
	28'	10'	GLCSL-FS-2000-20 (S or AL)-28-10	Steel	25'	13	16 1/8	23	27 3/8	14 7/8	8 1/8	24	21'-8"	12'-4 1/2"	5	2
		12'	GLCSL-FS-2000-20 (S or AL)-28-12	Steel	25'	13	16 1/8	23	27 3/8	14 7/8	8 1/8	24	21'-8"	14'-4 1/2"	5	2
		14'	GLCSL-FS-2000-20 (S or AL)-28-14	Steel	25'	13	16 1/8	23	27 3/8	14 7/8	8 1/8	24	21'-8"	16'-5 1/2"	5	2
	33'	10'	GLCS-FS-2000-20 (S or AL)-33-10	Steel	20'	13	16 1/8	19 5/8	24	14 7/8	8 1/8	24	21'-8"	12'-1 1/8"	5	3
		10'	AL-FS-2000-20-33-10	Alum	20'	19	17	25 1/4	-	15 1/2	8	27 3/4	21'-8"	12'-6 3/4"	5	3
		12'	GLCS-FS-2000-20 (S or AL)-33-12	Steel	20'	13	16 1/8	19 5/8	24	14 7/8	8 1/8	24	21'-8"	14'-1 1/8"	5	3
		12'	AL-FS-2000-20-33-12	Alum	20'	19	17	25 1/4	-	15 1/2	8	27 3/4	21'-8"	14'-6 3/4"	5	3
		14'	GLCS-FS-2000-20 (S or AL)-33-14	Steel	20'	13	16 1/8	19 5/8	24	14 7/8	8 1/8	24	21'-8"	16'-2 1/8"	5	3
		14'	AL-FS-2000-20-33-14	Alum	20'	19	17	25 1/4	-	15 1/2	8	27 3/4	21'-8"	16'-7 3/4"	5	3
	34'	10'	GLCSLX-FS-2000-20 (S or AL)-34-10	Steel	30'	13	16 1/8	25 5/8	30	14 7/8	8 1/8	24	21'-8"	12'-7 1/8"	5	2
		12'	GLCSLX-FS-2000-20 (S or AL)-34-12	Steel	30'	13	16 1/8	25 5/8	30	14 7/8	8 1/8	24	21'-8"	14'-7 1/8"	5	2
		14'	GLCSLX-FS-2000-20 (S or AL)-34-14	Steel	30'	13	16 1/8	25 5/8	30	14 7/8	8 1/8	24	21'-8"	16'-8 1/8"	5	2
	43'	10'	GLCS-FS-2000-20 (S or AL)-43-10	Steel	20'	19	16 1/8	19 5/8	24	14 7/8	8 1/8	24	21'-8"	12'-1 1/8"	5	3
		10'	AL-FS-2000-20-43-10	Alum	20'	26	17	25 1/4	-	15 1/2	8	27 3/4	21'-8"	12'-6 3/4"	5	3
		12'	GLCS-FS-2000-20 (S or AL)-43-12	Steel	20'	19	16 1/8	19 5/8	24	14 7/8	8 1/8	24	21'-8"	14'-1 1/8"	5	3
		12'	AL-FS-2000-20-43-12	Alum	20'	26	17	25 1/4	-	15 1/2	8	27 3/4	21'-8"	14'-6 3/4"	5	3
		14'	GLCS-FS-2000-20 (S or AL)-43-14	Steel	20'	19	16 1/8	19 5/8	24	14 7/8	8 1/8	24	21'-8"	16'-2 1/8"	5	3
		14'	AL-FS-2000-20-43-14	Alum	20'	26	17	25 1/4	-	15 1/2	8	27 3/4	21'-8"	16'-7 3/4"	5	3
	53'	10'	GLCS-FS-2000-20 (S or AL)-53-10	Steel	20'	19	16 1/8	19 5/8	24	14 7/8	8 1/8	24	21'-8"	12'-1 1/8"	5	4
		10'	AL-FS-2000-20-53-10	Alum	20'	30	17	25 1/4	-	15 1/2	8	27 3/4	21'-8"	12'-6 3/4"	5	4
		10'	GLCSL-FS-2000-20 (S or AL)-53-10	Steel	25'	19	16 1/8	23	27 3/8	14 7/8	8 1/8	24	21'-8"	12'-4 1/2"	5	3
		12'	GLCS-FS-2000-20 (S or AL)-53-12	Steel	20'	19	16 1/8	19 5/8	24	14 7/8	8 1/8	24	21'-8"	14'-1 1/8"	5	4
		12'	AL-FS-2000-20-53-12	Alum	20'	30	17	25 1/4	-	15 1/2	8	27 3/4	21'-8"	14'-6 3/4"	5	4
		12'	GLCSL-FS-2000-20 (S or AL)-53-12	Steel	25'	19	16 1/8	23	27 3/8	14 7/8	8 1/8	24	21'-8"	14'-4 1/2"	5	3
		14'	GLCS-FS-2000-20 (S or AL)-53-14	Steel	20'	19	16 1/8	19 5/8	24	14 7/8	8 1/8	24	21'-8"	16'-2 1/8"	5	4
		14'	AL-FS-2000-20-53-14	Alum	20'	30	17	25 1/4	-	15 1/2	8	27 3/4	21'-8"	16'-7 3/4"	5	4
	63'	10'	GLCS-FS-2000-20 (S or AL)-63-10	Steel	20'	26	16 1/8	19 5/8	24	14 7/8	8 1/8	24	21'-8"	12'-1 1/8"	5	4
		10'	AL-FS-2000-20-63-10	Alum	20'	36	17	25 1/4	-	15 1/2	8	27 3/4	21'-8"	12'-6 3/4"	5	4
		12'	GLCS-FS-2000-20 (S or AL)-63-12	Steel	20'	26	16 1/8	19 5/8	24	14 7/8	8 1/8	24	21'-8"	14'-1 1/8"	5	4
		12'	AL-FS-2000-20-63-12	Alum	20'	36	17	25 1/4	-	15 1/2	8	27 3/4	21'-8"	14'-6 3/4"	5	4
		14'	GLCS-FS-2000-20 (S or AL)-63-14	Steel	20'	26	16 1/8	19 5/8	24	14 7/8	8 1/8	24	21'-8"	16'-2 1/8"	5	4
		14'	AL-FS-2000-20-63-14	Alum	20'	36	17	25 1/4	-	15 1/2	8	27 3/4	21'-8"	16'-7 3/4"	5	4
	64'	10'	GLCSLX-FS-2000-20 (S or AL)-64-10	Steel	30'	36	16 1/8	25 5/8	30	14 7/8	8 1/8	27 3/4	21'-8"	12'-7 1/8"	5	3
		12'	GLCSLX-FS-2000-20 (S or AL)-64-12	Steel	30'	36	16 1/8	25 5/8	30	14 7/8	8 1/8	27 3/4	21'-8"	14'-7 1/8"	5	3
		14'	GLCSLX-FS-2000-20 (S or AL)-64-14	Steel	30'	36	16 1/8	25 5/8	30	14 7/8	8 1/8	27 3/4	21'-8"	16'-8 1/8"	5	3
	78'	10'	GLCSL-FS-2000-20 (S or AL)-78-10	Steel	25'	46	16 1/8	23	27 3/8	14 7/8	8 1/8	27 3/4	21'-8"	12'-4 1/2"	5	4
		12'	GLCSL-FS-2000-20 (S or AL)-78-12	Steel	25'	46	16 1/8	23	27 3/8	14 7/8	8 1/8	27 3/4	21'-8"	14'-4 1/2"	5	4
		14'	GLCSL-FS-2000-20 (S or AL)-78-14	Steel	25'	46	16 1/8	23	27 3/8	14 7/8	8 1/8	27 3/4	21'-8"	16'-5 1/2"	5	4
	83'	10'	GLCS-FS-2000-20 (S or AL)-83-10	Steel	20'	46	16 1/8	19 5/8	24	14 7/8	8 1/8	27 3/4	21'-8"	12'-1 1/8"	5	5
		10'	AL-FS-2000-20-83-10	Alum	20'	46	17	25 1/4	-	15 1/2	8	27 3/4	21'-8"	12'-6 3/4"	5	5
		12'	GLCS-FS-2000-20 (S or AL)-83-12	Steel	20'	46	16 1/8	19 5/8	24	14 7/8	8 1/8	27 3/4	21'-8"	14'-1 1/8"	5	5
		12'	AL-FS-2000-20-83-12	Alum	20'	46	17	25 1/4	-	15 1/2	8	27 3/4	21'-8"	14'-6 3/4"	5	5
		14'	GLCS-FS-2000-20 (S or AL)-83-14	Steel	20'	46	16 1/8	19 5/8	24	14 7/8	8 1/8	27 3/4	21'-8"	16'-2 1/8"	5	5
		14'	AL-FS-2000-20-83-14	Alum	20'	46	17	25 1/4	-	15 1/2	8	27 3/4	21'-8"	16'-7 3/4"	5	5
	94'	10'	GLCSLX-FS-2000-20 (S or AL)-94-10	Steel	30'	54	16 1/8	25 5/8	30	14 7/8	8 1/8	27 3/4	21'-8"	12'-7 1/8"	5	4
		12'	GLCSLX-FS-2000-20 (S or AL)-94-12	Steel	30'	54	16 1/8	25 5/8	30	14 7/8	8 1/8	27 3/4	21'-8"	14'-7 1/8"	5	4
		14'	GLCSLX-FS-2000-20 (S or AL)-94-14	Steel	30'	54	16 1/8	25 5/8	30	14 7/8	8 1/8	27 3/4	21'-8"	16'-8 1/8"	5	4
	103'	10'	GLCS-FS-2000-20 (S or AL)-103-10	Steel	20'	54	16 1/8	19 5/8	24	14 7/8	8 1/8	27 3/4	21'-8"	12'-1 1/8"	5	6
		10'	AL-FS-2000-20-103-10	Alum	20'	54	17	25 1/4	-	15 1/2	8	27 3/4	21'-8"	12'-6 3/4"	5	6
		10'	GLCSL-FS-2000-20 (S or AL)-103-10	Steel	25'	54	16 1/8	23	27 3/8	14 7/8	8 1/8	27 3/4	21'-8"	12'-4 1/2"	5	5
		12'	GLCS-FS-2000-20 (S or AL)-103-12	Steel	20'	54	16 1/8	19 5/8	24	14 7/8	8 1/8	27 3/4	21'-8"	14'-1 1/8"	5	6
		12'	AL-FS-2000-20-103-12	Alum	20'	54	17	25 1/4	-	15 1/2	8	27 3/4	21'-8"	14'-6 3/4"	5	6
		12'	GLCSL-FS-2000-20 (S or AL)-103-12	Steel	25'	54	16 1/8	23	27 3/8	14 7/8	8 1/8	27 3/4	21'-8"	14'-4 1/2"	5	5
		14'	GLCS-FS-2000-20 (S or AL)-103-14	Steel	20'	54	16 1/8	19 5/8	24	14 7/8	8 1/8	27 3/4	21'-8"	16'-2 1/8"	5	6
		14'	AL-FS-2000-20-103-14	Alum	20'	54	17	25 1/4	-	15 1/2	8	27 3/4	21'-8"	16'-7 3/4"	5	6
	124'	10'	GLCSLX-FS-2000-20 (S or AL)-124-10	Steel	30'	54	16 1/8	25 5/8	30	14 7/8	8 1/8	27 3/4	21'-8"	12'-7 1/8"	5	5
		12'	GLCSLX-FS-2000-20 (S or AL)-124-12	Steel	30'	54	16 1/8	25 5/8	30	14 7/8	8 1/8	27 3/4	21'-8"	14'-7 1/8"	5	5
		14'	GLCSLX-FS-2000-20 (S or AL)-124-14	Steel	30'	54	16 1/8	25 5/8	30	14 7/8	8 1/8	27 3/4	21'-8"	16'-8 1/8"	5	5

*This column provides the total number of support assemblies based on the "L1" dimensions shown. Support assemblies are designed to AISC specifications and do not require bracing. If no movement of the support assembly is preferred, then bracing to the building steel is recommended (not included).

To Determine Hook Coverage: [Bridge Travel on Runway = Runway Length - (2xL8)] by [Hoist Trolley Travel on Bridge = Bridge Length - L3 - L6] (L6 allows for festoon stack-up).

Gorbel® Free Standing Work Station Bridge Crane Kits include: bridge, runways, the appropriate number of support assemblies, hoist trolley, end trucks, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel runway lengths greater than 63' and all aluminum systems), festoon stack-up section, splice joints and hanger brackets. Hoist and anchor bolts provided by others.

Dimensions are for reference only and are subject to change without notice.

FREE STANDING WORK STATION BRIDGE CRANES

BRIDGE LENGTH (L)	RUNWAY LENGTH	TS	MODEL NUMBER	TRACK MAT.	RUNWAY			BRIDGE					SUPPORT STRUCTURE			
					MAX. L1	L7 in	L8 in	H3 in	H3A in	H4 in	L3 in	L6 in	OAW	OAH	D in	Spt*
23'	23'	10'	GLCS-FS-2000-23 (S or AL)-23-10	Steel	20'	9	16 1/8	19 5/8	24	14 7/8	8 1/8	24	24'-8"	12'-1 1/8"	5	2
		10'	AL-FS-2000-23-23-10	Alum	20'	13	17	25 1/4	-	15 1/2	8	31 1/8	24'-8"	12'-6 3/4"	5	2
		12'	GLCS-FS-2000-23 (S or AL)-23-12	Steel	20'	9	16 1/8	19 5/8	24	14 7/8	8 1/8	24	24'-8"	14'-2 1/8"	5	2
		12'	AL-FS-2000-23-23-12	Alum	20'	13	17	25 1/4	-	15 1/2	8	31 1/8	24'-8"	14'-7 3/4"	5	2
		14'	GLCS-FS-2000-23 (S or AL)-23-14	Steel	20'	9	16 1/8	19 5/8	24	14 7/8	8 1/8	24	24'-8"	16'-2 1/8"	5	2
		14'	AL-FS-2000-23-23-14	Alum	20'	13	17	25 1/4	-	15 1/2	8	31 1/8	24'-8"	16'-7 3/4"	5	2
	28'	10'	GLCSL-FS-2000-23 (S or AL)-28-10	Steel	25'	13	16 1/8	23	27 3/8	14 7/8	8 1/8	24	24'-8"	12'-4 1/2"	5	2
		12'	GLCSL-FS-2000-23 (S or AL)-28-12	Steel	25'	13	16 1/8	23	27 3/8	14 7/8	8 1/8	24	24'-8"	14'-5 1/2"	5	2
		14'	GLCSL-FS-2000-23 (S or AL)-28-14	Steel	25'	13	16 1/8	23	27 3/8	14 7/8	8 1/8	24	24'-8"	16'-6 1/2"	5	2
	33'	10'	GLCS-FS-2000-23 (S or AL)-33-10	Steel	20'	13	16 1/8	19 5/8	24	14 7/8	8 1/8	24	24'-8"	12'-1 1/8"	5	3
		10'	AL-FS-2000-23-33-10	Alum	20'	19	17	25 1/4	-	15 1/2	8	31 1/8	24'-8"	12'-6 3/4"	5	3
		12'	GLCS-FS-2000-23 (S or AL)-33-12	Steel	20'	13	16 1/8	19 5/8	24	14 7/8	8 1/8	24	24'-8"	14'-2 1/8"	5	3
		12'	AL-FS-2000-23-33-12	Alum	20'	19	17	25 1/4	-	15 1/2	8	31 1/8	24'-8"	14'-7 3/4"	5	3
		14'	GLCS-FS-2000-23 (S or AL)-33-14	Steel	20'	13	16 1/8	19 5/8	24	14 7/8	8 1/8	24	24'-8"	16'-2 1/8"	5	3
		14'	AL-FS-2000-23-33-14	Alum	20'	19	17	25 1/4	-	15 1/2	8	31 1/8	24'-8"	16'-7 3/4"	5	3
	34'	10'	GLCSLX-FS-2000-23 (S or AL)-34-10	Steel	30'	13	16 1/8	25 5/8	30	14 7/8	8 1/8	24	24'-8"	12'-7 1/8"	5	2
		12'	GLCSLX-FS-2000-23 (S or AL)-34-12	Steel	30'	13	16 1/8	25 5/8	30	14 7/8	8 1/8	24	24'-8"	14'-8 1/8"	5	2
		14'	GLCSLX-FS-2000-23 (S or AL)-34-14	Steel	30'	13	16 1/8	25 5/8	30	14 7/8	8 1/8	24	24'-8"	16'-9 1/8"	5	2
	43'	10'	GLCS-FS-2000-23 (S or AL)-43-10	Steel	20'	19	16 1/8	19 5/8	24	14 7/8	8 1/8	24	24'-8"	12'-1 1/8"	5	3
		10'	AL-FS-2000-23-43-10	Alum	20'	26	17	25 1/4	-	15 1/2	8	31 1/8	24'-8"	12'-6 3/4"	5	3
		12'	GLCS-FS-2000-23 (S or AL)-43-12	Steel	20'	19	16 1/8	19 5/8	24	14 7/8	8 1/8	24	24'-8"	14'-2 1/8"	5	3
		12'	AL-FS-2000-23-43-12	Alum	20'	26	17	25 1/4	-	15 1/2	8	31 1/8	24'-8"	14'-7 3/4"	5	3
		14'	GLCS-FS-2000-23 (S or AL)-43-14	Steel	20'	19	16 1/8	19 5/8	24	14 7/8	8 1/8	24	24'-8"	16'-2 1/8"	5	3
		14'	AL-FS-2000-23-43-14	Alum	20'	26	17	25 1/4	-	15 1/2	8	31 1/8	24'-8"	16'-7 3/4"	5	3
	53'	10'	GLCS-FS-2000-23 (S or AL)-53-10	Steel	20'	19	16 1/8	19 5/8	24	14 7/8	8 1/8	24	24'-8"	12'-1 1/8"	5	4
		10'	AL-FS-2000-23-53-10	Alum	20'	30	17	25 1/4	-	15 1/2	8	31 1/8	24'-8"	12'-6 3/4"	5	4
		10'	GLCSL-FS-2000-23 (S or AL)-53-10	Steel	25'	19	16 1/8	23	27 3/8	14 7/8	8 1/8	24	24'-8"	12'-4 1/2"	5	3
		12'	GLCS-FS-2000-23 (S or AL)-53-12	Steel	20'	19	16 1/8	19 5/8	24	14 7/8	8 1/8	24	24'-8"	14'-2 1/8"	5	4
		12'	AL-FS-2000-23-53-12	Alum	20'	30	17	25 1/4	-	15 1/2	8	31 1/8	24'-8"	14'-7 3/4"	5	4
		12'	GLCSL-FS-2000-23 (S or AL)-53-12	Steel	25'	19	16 1/8	23	27 3/8	14 7/8	8 1/8	24	24'-8"	14'-5 1/2"	5	3
		14'	GLCS-FS-2000-23 (S or AL)-53-14	Steel	20'	19	16 1/8	19 5/8	24	14 7/8	8 1/8	24	24'-8"	16'-2 1/8"	5	4
		14'	AL-FS-2000-23-53-14	Alum	20'	30	17	25 1/4	-	15 1/2	8	31 1/8	24'-8"	16'-7 3/4"	5	4
		14'	GLCSL-FS-2000-23 (S or AL)-53-14	Steel	25'	19	16 1/8	23	27 3/8	14 7/8	8 1/8	24	24'-8"	16'-6 1/2"	5	3
	63'	10'	GLCS-FS-2000-23 (S or AL)-63-10	Steel	20'	26	16 1/8	19 5/8	24	14 7/8	8 1/8	24	24'-8"	12'-1 1/8"	5	4
		10'	AL-FS-2000-23-63-10	Alum	20'	36	17	25 1/4	-	15 1/2	8	31 1/8	24'-8"	12'-6 3/4"	5	4
		12'	GLCS-FS-2000-23 (S or AL)-63-12	Steel	20'	26	16 1/8	19 5/8	24	14 7/8	8 1/8	24	24'-8"	14'-2 1/8"	5	4
		12'	AL-FS-2000-23-63-12	Alum	20'	36	17	25 1/4	-	15 1/2	8	31 1/8	24'-8"	14'-7 3/4"	5	4
		14'	GLCS-FS-2000-23 (S or AL)-63-14	Steel	20'	26	16 1/8	19 5/8	24	14 7/8	8 1/8	24	24'-8"	16'-2 1/8"	5	4
		14'	AL-FS-2000-23-63-14	Alum	20'	36	17	25 1/4	-	15 1/2	8	31 1/8	24'-8"	16'-7 3/4"	5	4
	64'	10'	GLCSLX-FS-2000-23 (S or AL)-64-10	Steel	30'	36	16 1/8	25 5/8	30	14 7/8	8 1/8	31 1/8	24'-8"	12'-7 1/8"	5	3
		12'	GLCSLX-FS-2000-23 (S or AL)-64-12	Steel	30'	36	16 1/8	25 5/8	30	14 7/8	8 1/8	31 1/8	24'-8"	14'-8 1/8"	5	3
		14'	GLCSLX-FS-2000-23 (S or AL)-64-14	Steel	30'	36	16 1/8	25 5/8	30	14 7/8	8 1/8	31 1/8	24'-8"	16'-9 1/8"	5	3
	78'	10'	GLCSL-FS-2000-23 (S or AL)-78-10	Steel	25'	46	16 1/8	23	27 3/8	14 7/8	8 1/8	31 1/8	24'-8"	12'-4 1/2"	5	4
		12'	GLCSL-FS-2000-23 (S or AL)-78-12	Steel	25'	46	16 1/8	23	27 3/8	14 7/8	8 1/8	31 1/8	24'-8"	14'-5 1/2"	5	4
		14'	GLCSL-FS-2000-23 (S or AL)-78-14	Steel	25'	46	16 1/8	23	27 3/8	14 7/8	8 1/8	31 1/8	24'-8"	16'-6 1/2"	5	4
	83'	10'	GLCS-FS-2000-23 (S or AL)-83-10	Steel	20'	46	16 1/8	19 5/8	24	14 7/8	8 1/8	31 1/8	24'-8"	12'-1 1/8"	5	5
		10'	AL-FS-2000-23-83-10	Alum	20'	46	17	25 1/4	-	15 1/2	8	31 1/8	24'-8"	12'-6 3/4"	5	5
		12'	GLCS-FS-2000-23 (S or AL)-83-12	Steel	20'	46	16 1/8	19 5/8	24	14 7/8	8 1/8	31 1/8	24'-8"	14'-2 1/8"	5	5
		12'	AL-FS-2000-23-83-12	Alum	20'	46	17	25 1/4	-	15 1/2	8	31 1/8	24'-8"	14'-7 3/4"	5	5
		14'	GLCS-FS-2000-23 (S or AL)-83-14	Steel	20'	46	16 1/8	19 5/8	24	14 7/8	8 1/8	31 1/8	24'-8"	16'-2 1/8"	5	5
		14'	AL-FS-2000-23-83-14	Alum	20'	46	17	25 1/4	-	15 1/2	8	31 1/8	24'-8"	16'-7 3/4"	5	5
	94'	10'	GLCSLX-FS-2000-23 (S or AL)-94-10	Steel	30'	54	16 1/8	25 5/8	30	14 7/8	8 1/8	31 1/8	24'-8"	12'-7 1/8"	5	4
		12'	GLCSLX-FS-2000-23 (S or AL)-94-12	Steel	30'	54	16 1/8	25 5/8	30	14 7/8	8 1/8	31 1/8	24'-8"	14'-8 1/8"	5	4
		14'	GLCSLX-FS-2000-23 (S or AL)-94-14	Steel	30'	54	16 1/8	25 5/8	30	14 7/8	8 1/8	31 1/8	24'-8"	16'-9 1/8"	5	4
	103'	10'	GLCS-FS-2000-23 (S or AL)-103-10	Steel	20'	54	16 1/8	19 5/8	24	14 7/8	8 1/8	31 1/8	24'-8"	12'-1 1/8"	5	6
		10'	AL-FS-2000-23-103-10	Alum	20'	54	17	25 1/4	-	15 1/2	8	31 1/8	24'-8"	12'-6 3/4"	5	6
		10'	GLCSL-FS-2000-23 (S or AL)-103-10	Steel	25'	54	16 1/8	23	27 3/8	14 7/8	8 1/8	31 1/8	24'-8"	12'-4 1/2"	5	5
		12'	GLCS-FS-2000-23 (S or AL)-103-12	Steel	20'	54	16 1/8	19 5/8	24	14 7/8	8 1/8	31 1/8	24'-8"	14'-2 1/8"	5	6
		12'	AL-FS-2000-23-103-12	Alum	20'	54	17	25 1/4	-	15 1/2	8	31 1/8	24'-8"	14'-7 3/4"	5	6
		12'	GLCSL-FS-2000-23 (S or AL)-103-12	Steel	25'	54	16 1/8	23	27 3/8	14 7/8	8 1/8	31 1/8	24'-8"	14'-5 1/2"	5	5
		14'	GLCS-FS-2000-23 (S or AL)-103-14	Steel	20'	54	16 1/8	19 5/8	24	14 7/8	8 1/8	31 1/8	24'-8"	16'-2 1/8"	5	6
		14'	AL-FS-2000-23-103-14	Alum	20'	54	17	25 1/4	-	15 1/2	8	31 1/8	24'-8"	16'-7 3/4"	5	6
	124'	10'	GLCSLX-FS-2000-23 (S or AL)-124-10	Steel	30'	54	16 1/8	25 5/8	30	14 7/8	8 1/8	31 1/8	24'-8"	12'-7 1/8"	5	5
		12'	GLCSLX-FS-2000-23 (S or AL)-124-12	Steel	30'	54	16 1/8	25 5/8	30	14 7/8	8 1/8	31 1/8	24'-8"	14'-8 1/8"	5	5
		14'	GLCSLX-FS-2000-23 (S or AL)-124-14	Steel	30'	54	16 1/8	25 5/8	30	14 7/8	8 1/8	31 1/8	24'-8"	16'-9 1/8"	5	5

*This column provides the total number of support assemblies based on the "L1" dimensions shown. Support assemblies are designed to AISC specifications and do not require bracing. If no movement of the support assembly is preferred, then bracing to the building steel is recommended (not included).

To Determine Hook Coverage: [Bridge Travel on Runway = Runway Length - (2xL8)] by [Hoist Trolley Travel on Bridge = Bridge Length - L3 - L6] (L6 allows for festoon stack-up).

Gorbel® Free Standing Work Station Bridge Crane Kits include: bridge, runways, the appropriate number of support assemblies, hoist trolley, end trucks, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel runway lengths greater than 63' and all aluminum systems), festoon stack-up section, splice joints and hanger brackets. Hoist and anchor bolts provided by others.

Dimensions are for reference only and are subject to change without notice.

2000# CAPACITY

FREE STANDING WORK STATION BRIDGE CRANES

FREE STANDING WORK
STATION CRANES

BRIDGE LENGTH (L)	RUNWAY LENGTH	TS	MODEL NUMBER	TRACK MAT.	RUNWAY			BRIDGE					SUPPORT STRUCTURE			
					MAX. L1	L7 in	L8 in	H3 in	H3A in	H4 in	L3 in	L6 in	OAW	OAH	D in	*L5
28'	23'	10'	GLCS-FS-2000-28 (S or AL)-23-10	Steel	20'	9	25 7/8	23	26	18 1/4	8 1/8	34 1/2	29'-8"	12'-5 1/2"	5	2
		10'	AL-FS-2000-28-23-10	Alum	20'	13	21	27 1/2	-	17	8	37 7/8	29'-8"	12'-10"	5	2
		12'	GLCS-FS-2000-28 (S or AL)-23-12	Steel	20'	9	25 7/8	23	26	18 1/4	8 1/8	34 1/2	29'-8"	14'-5 1/2"	5	2
		12'	AL-FS-2000-28-23-12	Alum	20'	13	21	27 1/2	-	17	8	37 7/8	29'-8"	14'-10"	5	2
		14'	GLCS-FS-2000-28 (S or AL)-23-14	Steel	20'	9	25 7/8	23	26	18 1/4	8 1/8	34 1/2	29'-8"	16'-6 1/2"	5	2
		14'	AL-FS-2000-28-23-14	Alum	20'	13	21	27 1/2	-	17	8	37 7/8	29'-8"	16'-11"	5	2
	28'	10'	GLCSL-FS-2000-28 (S or AL)-28-10	Steel	25'	9	25 7/8	26 3/8	29 3/8	18 1/4	8 1/8	34 1/2	29'-8"	12'-8 7/8"	5	2
		12'	GLCSL-FS-2000-28 (S or AL)-28-12	Steel	25'	9	25 7/8	26 3/8	29 3/8	18 1/4	8 1/8	34 1/2	29'-8"	14'-8 7/8"	5	2
		14'	GLCSL-FS-2000-28 (S or AL)-28-14	Steel	25'	9	25 7/8	26 3/8	29 3/8	18 1/4	8 1/8	34 1/2	29'-8"	16'-9 7/8"	5	2
	33'	10'	GLCS-FS-2000-28 (S or AL)-33-10	Steel	20'	9	25 7/8	23	26	18 1/4	8 1/8	34 1/2	29'-8"	12'-5 1/2"	5	3
		10'	AL-FS-2000-28-33-10	Alum	20'	19	21	27 1/2	-	17	8	37 7/8	29'-8"	12'-10"	5	3
		12'	GLCS-FS-2000-28 (S or AL)-33-12	Steel	20'	9	25 7/8	23	26	18 1/4	8 1/8	34 1/2	29'-8"	14'-5 1/2"	5	3
		12'	AL-FS-2000-28-33-12	Alum	20'	19	21	27 1/2	-	17	8	37 7/8	29'-8"	14'-10"	5	3
		14'	GLCS-FS-2000-28 (S or AL)-33-14	Steel	20'	9	25 7/8	23	26	18 1/4	8 1/8	34 1/2	29'-8"	16'-6 1/2"	5	3
		14'	AL-FS-2000-28-33-14	Alum	20'	19	21	27 1/2	-	17	8	37 7/8	29'-8"	16'-11"	5	3
	34'	10'	GLCSLX-FS-2000-28 (S or AL)-34-10	Steel	30'	9	25 7/8	29	32	18 1/4	8 1/8	34 1/2	29'-8"	12'-11 1/2"	5	2
		12'	GLCSLX-FS-2000-28 (S or AL)-34-12	Steel	30'	9	25 7/8	29	32	18 1/4	8 1/8	34 1/2	29'-8"	14'-11 1/2"	5	2
		14'	GLCSLX-FS-2000-28 (S or AL)-34-14	Steel	30'	9	25 7/8	29	32	18 1/4	8 1/8	34 1/2	29'-8"	17'-0 1/2"	5	2
	43'	10'	GLCS-FS-2000-28 (S or AL)-43-10	Steel	20'	13	25 7/8	23	26	18 1/4	8 1/8	34 1/2	29'-8"	12'-5 1/2"	5	3
		10'	AL-FS-2000-28-43-10	Alum	20'	26	21	27 1/2	-	17	8	37 7/8	29'-8"	12'-10"	5	3
		12'	GLCS-FS-2000-28 (S or AL)-43-12	Steel	20'	13	25 7/8	23	26	18 1/4	8 1/8	34 1/2	29'-8"	14'-5 1/2"	5	3
		12'	AL-FS-2000-28-43-12	Alum	20'	26	21	27 1/2	-	17	8	37 7/8	29'-8"	14'-10"	5	3
		14'	GLCS-FS-2000-28 (S or AL)-43-14	Steel	20'	13	25 7/8	23	26	18 1/4	8 1/8	34 1/2	29'-8"	16'-6 1/2"	5	3
		14'	AL-FS-2000-28-43-14	Alum	20'	26	21	27 1/2	-	17	8	37 7/8	29'-8"	16'-11"	5	3
	53'	10'	GLCS-FS-2000-28 (S or AL)-53-10	Steel	20'	13	25 7/8	23	26	18 1/4	8 1/8	34 1/2	29'-8"	12'-5 1/2"	5	4
		10'	AL-FS-2000-28-53-10	Alum	20'	30	21	27 1/2	-	17	8	37 7/8	29'-8"	12'-10"	5	4
		12'	GLCSL-FS-2000-28 (S or AL)-53-10	Steel	25'	13	25 7/8	26 3/8	29 3/8	18 1/4	8 1/8	34 1/2	29'-8"	12'-8 7/8"	5	3
		12'	GLCS-FS-2000-28 (S or AL)-53-12	Steel	20'	13	25 7/8	23	26	18 1/4	8 1/8	34 1/2	29'-8"	14'-5 1/2"	5	4
		12'	AL-FS-2000-28-53-12	Alum	20'	30	21	27 1/2	-	17	8	37 7/8	29'-8"	14'-10"	5	4
		12'	GLCSL-FS-2000-28 (S or AL)-53-12	Steel	25'	13	25 7/8	26 3/8	29 3/8	18 1/4	8 1/8	34 1/2	29'-8"	14'-8 7/8"	5	3
	53'	14'	GLCS-FS-2000-28 (S or AL)-53-14	Steel	20'	13	25 7/8	23	26	18 1/4	8 1/8	34 1/2	29'-8"	16'-6 1/2"	5	4
		14'	AL-FS-2000-28-53-14	Alum	20'	30	21	27 1/2	-	17	8	37 7/8	29'-8"	16'-11"	5	4
		14'	GLCSL-FS-2000-28 (S or AL)-53-14	Steel	25'	13	25 7/8	26 3/8	29 3/8	18 1/4	8 1/8	34 1/2	29'-8"	16'-9 7/8"	5	3
	63'	10'	GLCS-FS-2000-28 (S or AL)-63-10	Steel	20'	19	25 7/8	23	26	18 1/4	8 1/8	34 1/2	29'-8"	12'-5 1/2"	5	4
		10'	AL-FS-2000-28-63-10	Alum	20'	36	21	27 1/2	-	17	8	37 7/8	29'-8"	12'-10"	5	4
		12'	GLCS-FS-2000-28 (S or AL)-63-12	Steel	20'	19	25 7/8	23	26	18 1/4	8 1/8	34 1/2	29'-8"	14'-5 1/2"	5	4
		12'	AL-FS-2000-28-63-12	Alum	20'	36	21	27 1/2	-	17	8	37 7/8	29'-8"	14'-10"	5	4
		14'	GLCS-FS-2000-28 (S or AL)-63-14	Steel	20'	19	25 7/8	23	26	18 1/4	8 1/8	34 1/2	29'-8"	16'-6 1/2"	5	4
		14'	AL-FS-2000-28-63-14	Alum	20'	36	21	27 1/2	-	17	8	37 7/8	29'-8"	16'-11"	5	4
	64'	10'	GLCSLX-FS-2000-28 (S or AL)-64-10	Steel	30'	36	25 7/8	29	32	18 1/4	8 1/8	37 7/8	29'-8"	12'-11 1/2"	5	3
		12'	GLCSLX-FS-2000-28 (S or AL)-64-12	Steel	30'	36	25 7/8	29	32	18 1/4	8 1/8	37 7/8	29'-8"	14'-11 1/2"	5	3
		14'	GLCSLX-FS-2000-28 (S or AL)-64-14	Steel	30'	36	25 7/8	29	32	18 1/4	8 1/8	37 7/8	29'-8"	17'-0 1/2"	5	3
	78'	10'	GLCSL-FS-2000-28 (S or AL)-78-10	Steel	25'	46	25 7/8	26 3/8	29 3/8	18 1/4	8 1/8	37 7/8	29'-8"	12'-8 7/8"	5	4
		12'	GLCSL-FS-2000-28 (S or AL)-78-12	Steel	25'	46	25 7/8	26 3/8	29 3/8	18 1/4	8 1/8	37 7/8	29'-8"	14'-8 7/8"	5	4
		14'	GLCSL-FS-2000-28 (S or AL)-78-14	Steel	25'	46	25 7/8	26 3/8	29 3/8	18 1/4	8 1/8	37 7/8	29'-8"	16'-9 7/8"	5	4
	83'	10'	GLCS-FS-2000-28 (S or AL)-83-10	Steel	20'	46	25 7/8	23	26	18 1/4	8 1/8	37 7/8	29'-8"	12'-5 1/2"	5	5
		10'	AL-FS-2000-28-83-10	Alum	20'	46	21	27 1/2	-	17	8	37 7/8	29'-8"	12'-10"	5	5
		12'	GLCS-FS-2000-28 (S or AL)-83-12	Steel	20'	46	25 7/8	23	26	18 1/4	8 1/8	37 7/8	29'-8"	14'-5 1/2"	5	5
		12'	AL-FS-2000-28-83-12	Alum	20'	46	21	27 1/2	-	17	8	37 7/8	29'-8"	14'-10"	5	5
		14'	GLCS-FS-2000-28 (S or AL)-83-14	Steel	20'	46	25 7/8	23	26	18 1/4	8 1/8	37 7/8	29'-8"	16'-6 1/2"	5	5
		14'	AL-FS-2000-28-83-14	Alum	20'	46	21	27 1/2	-	17	8	37 7/8	29'-8"	16'-11"	5	5
	94'	10'	GLCSLX-FS-2000-28 (S or AL)-94-10	Steel	30'	54	25 7/8	29	32	18 1/4	8 1/8	37 7/8	29'-8"	12'-11 1/2"	5	4
		12'	GLCSLX-FS-2000-28 (S or AL)-94-12	Steel	30'	54	25 7/8	29	32	18 1/4	8 1/8	37 7/8	29'-8"	14'-11 1/2"	5	4
		14'	GLCSLX-FS-2000-28 (S or AL)-94-14	Steel	30'	54	25 7/8	29	32	18 1/4	8 1/8	37 7/8	29'-8"	17'-0 1/2"	5	4
	103'	10'	GLCS-FS-2000-28 (S or AL)-103-10	Steel	20'	54	25 7/8	23	26	18 1/4	8 1/8	37 7/8	29'-8"	12'-5 1/2"	5	6
		10'	AL-FS-2000-28-103-10	Alum	20'	54	21	27 1/2	-	17	8	37 7/8	29'-8"	12'-10"	5	6
		12'	GLCSL-FS-2000-28 (S or AL)-103-10	Steel	25'	54	25 7/8	26 3/8	29 3/8	18 1/4	8 1/8	37 7/8	29'-8"	12'-8 7/8"	5	5
		12'	GLCS-FS-2000-28 (S or AL)-103-12	Steel	20'	54	25 7/8	23	26	18 1/4	8 1/8	37 7/8	29'-8"	14'-5 1/2"	5	6
		12'	AL-FS-2000-28-103-12	Alum	20'	54	21	27 1/2	-	17	8	37 7/8	29'-8"	14'-10"	5	6
		12'	GLCSL-FS-2000-28 (S or AL)-103-12	Steel	25'	54	25 7/8	26 3/8	29 3/8	18 1/4	8 1/8	37 7/8	29'-8"	14'-8 7/8"	5	5
		14'	GLCS-FS-2000-28 (S or AL)-103-14	Steel	20'	54	25 7/8	23	26	18 1/4	8 1/8	37 7/8	29'-8"	16'-6 1/2"	5	6
		14'	AL-FS-2000-28-103-14	Alum	20'	54	21	27 1/2	-	17	8	37 7/8	29'-8"	16'-11"	5	6
		14'	GLCSL-FS-2000-28 (S or AL)-103-14	Steel	25'	54	25 7/8	26 3/8	29 3/8	18 1/4	8 1/8	37 7/8	29'-8"	16'-9 7/8"	5	5
	124'	10'	GLCSLX-FS-2000-28 (S or AL)-124-10	Steel	30'	54	25 7/8	29	32	18 1/4	8 1/8	37 7/8	29'-8"	12'-11 1/2"	5	5
		12'	GLCSLX-FS-2000-28 (S or AL)-124-12	Steel	30'	54	25 7/8	29	32	18 1/4	8 1/8	37 7/8	29'-8"	14'-11 1/2"	5	5
		14'	GLCSLX-FS-2000-28 (S or AL)-124-14	Steel	30'	54	25 7/8	29	32	18 1/4	8 1/8	37 7/8	29'-8"	17'-0 1/2"	5	5

*This column provides the total number of support assemblies based on the "L1" dimensions shown. Support assemblies are designed to AISC specifications and do not require bracing. If no movement of the support assembly is preferred, then bracing to the building steel is recommended (not included).

To Determine Hook Coverage: [Bridge Travel on Runway = Runway Length - (2xL8)] by [Hoist Trolley Travel on Bridge = Bridge Length - L3 - L6] (L6 allows for festoon stack-up).

Gorbel® Free Standing Work Station Bridge Crane Kits include: bridge, runways, the appropriate number of support assemblies, hoist trolley, end trucks, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel runway lengths greater than 63' and all aluminum systems), festoon stack-up section, splice joints and hanger brackets. Hoist and anchor bolts provided by others.

Dimensions are for reference only and are subject to change without notice.

FREE STANDING WORK STATION BRIDGE CRANES

BRIDGE LENGTH (L)	RUNWAY LENGTH	TS	MODEL NUMBER	TRACK MAT.	RUNWAY			BRIDGE					SUPPORT STRUCTURE			
					MAX. L1	L7 in	L8 in	H3 in	H3A in	H4 in	L3 in	L6 in	OAW	OAH	D in	SPT+
34'	28'	10'	GLCSL-FS-2000-34 (S or AL)-28-10	Steel	25'	13	25 7/8	26 3/8	29 3/8	20 7/8	8 1/8	40 1/2	35'-8"	12'-9 7/8"	5	2
		12'	GLCSL-FS-2000-34 (S or AL)-28-12	Steel	25'	13	25 7/8	26 3/8	29 3/8	20 7/8	8 1/8	40 1/2	35'-8"	14'-9 7/8"	5	2
		14'	GLCSL-FS-2000-34 (S or AL)-28-14	Steel	25'	13	25 7/8	26 3/8	29 3/8	20 7/8	8 1/8	40 1/2	35'-8"	16'-11 7/8"	5	2
	33'	10'	GLCS-FS-2000-34 (S or AL)-33-10	Steel	20'	9	25 7/8	25	26	20 7/8	8 1/8	40 1/2	35'-8"	12'-8 1/2"	5	3
		10'	AL-FS-2000-34-33-10	Alum	20'	19	21	27 1/2	-	17 7/8	8	44 5/8	35'-8"	12'-11"	5	3
		12'	GLCS-FS-2000-34 (S or AL)-33-12	Steel	20'	9	25 7/8	25	26	20 7/8	8 1/8	40 1/2	35'-8"	14'-8 1/2"	5	3
		12'	AL-FS-2000-34-33-12	Alum	20'	19	21	27 1/2	-	17 7/8	8	44 5/8	35'-8"	14'-11"	5	3
		14'	GLCS-FS-2000-34 (S or AL)-33-14	Steel	20'	9	25 7/8	25	26	20 7/8	8 1/8	40 1/2	35'-8"	16'-8 1/2"	5	3
		14'	AL-FS-2000-34-33-14	Alum	20'	19	21	27 1/2	-	17 7/8	8	44 5/8	35'-8"	16'-11"	5	3
	34'	10'	GLCSLX-FS-2000-34 (S or AL)-34-10	Steel	30'	9	25 7/8	29	32	20 7/8	8 1/8	40 1/2	35'-8"	13'-2 1/2"	5	2
		12'	GLCSLX-FS-2000-34 (S or AL)-34-12	Steel	30'	9	25 7/8	29	32	20 7/8	8 1/8	40 1/2	35'-8"	15'-2 1/2"	5	2
		14'	GLCSLX-FS-2000-34 (S or AL)-34-14	Steel	30'	9	25 7/8	29	32	20 7/8	8 1/8	40 1/2	35'-8"	17'-2 1/2"	5	2
	43'	10'	GLCS-FS-2000-34 (S or AL)-43-10	Steel	20'	13	25 7/8	25	26	20 7/8	8 1/8	40 1/2	35'-8"	12'-8 1/2"	5	3
		10'	AL-FS-2000-34-43-10	Alum	20'	26	21	27 1/2	-	17 7/8	8	44 5/8	35'-8"	12'-11"	5	3
		12'	GLCS-FS-2000-34 (S or AL)-43-12	Steel	20'	13	25 7/8	25	26	20 7/8	8 1/8	40 1/2	35'-8"	14'-8 1/2"	5	3
		12'	AL-FS-2000-34-43-12	Alum	20'	26	21	27 1/2	-	17 7/8	8	44 5/8	35'-8"	14'-11"	5	3
		14'	GLCS-FS-2000-34 (S or AL)-43-14	Steel	20'	13	25 7/8	25	26	20 7/8	8 1/8	40 1/2	35'-8"	16'-8 1/2"	5	3
		14'	AL-FS-2000-34-43-14	Alum	20'	26	21	27 1/2	-	17 7/8	8	44 5/8	35'-8"	16'-11"	5	3
	53'	10'	GLCS-FS-2000-34 (S or AL)-53-10	Steel	20'	13	25 7/8	25	26	20 7/8	8 1/8	40 1/2	35'-8"	12'-8 1/2"	5	4
		10'	AL-FS-2000-34-53-10	Alum	20'	30	21	27 1/2	-	17 7/8	8	44 5/8	35'-8"	12'-11"	5	4
		10'	GLCSL-FS-2000-34 (S or AL)-53-10	Steel	25'	13	25 7/8	26 3/8	29 3/8	20 7/8	8 1/8	40 1/2	35'-8"	12'-9 7/8"	5	3
		12'	GLCS-FS-2000-34 (S or AL)-53-12	Steel	20'	13	25 7/8	25	26	20 7/8	8 1/8	40 1/2	35'-8"	14'-8 1/2"	5	4
		12'	AL-FS-2000-34-53-12	Alum	20'	30	21	27 1/2	-	17 7/8	8	44 5/8	35'-8"	14'-11"	5	4
		12'	GLCSL-FS-2000-34 (S or AL)-53-12	Steel	25'	13	25 7/8	26 3/8	29 3/8	20 7/8	8 1/8	40 1/2	35'-8"	14'-9 7/8"	5	3
		14'	GLCS-FS-2000-34 (S or AL)-53-14	Steel	20'	13	25 7/8	25	26	20 7/8	8 1/8	40 1/2	35'-8"	16'-8 1/2"	5	4
		14'	AL-FS-2000-34-53-14	Alum	20'	30	21	27 1/2	-	17 7/8	8	44 5/8	35'-8"	16'-11"	5	4
		14'	GLCSL-FS-2000-34 (S or AL)-53-14	Steel	25'	13	25 7/8	26 3/8	29 3/8	20 7/8	8 1/8	40 1/2	35'-8"	16'-11 7/8"	5	3
	63'	10'	GLCS-FS-2000-34 (S or AL)-63-10	Steel	20'	19	25 7/8	25	26	20 7/8	8 1/8	40 1/2	35'-8"	12'-8 1/2"	5	4
		10'	AL-FS-2000-34-63-10	Alum	20'	36	21	27 1/2	-	17 7/8	8	44 5/8	35'-8"	12'-11"	5	4
		12'	GLCS-FS-2000-34 (S or AL)-63-12	Steel	20'	19	25 7/8	25	26	20 7/8	8 1/8	40 1/2	35'-8"	12'-9 7/8"	5	4
		12'	AL-FS-2000-34-63-12	Alum	20'	36	21	27 1/2	-	17 7/8	8	44 5/8	35'-8"	14'-11"	5	4
		14'	GLCS-FS-2000-34 (S or AL)-63-14	Steel	20'	19	25 7/8	25	26	20 7/8	8 1/8	40 1/2	35'-8"	16'-8 1/2"	5	4
		14'	AL-FS-2000-34-63-14	Alum	20'	36	21	27 1/2	-	17 7/8	8	44 5/8	35'-8"	16'-11"	5	4
	64'	10'	GLCSLX-FS-2000-34 (S or AL)-64-10	Steel	30'	36	25 7/8	29	32	20 7/8	8 1/8	44 5/8	35'-8"	13'-2 1/2"	5	3
		12'	GLCSLX-FS-2000-34 (S or AL)-64-12	Steel	30'	36	25 7/8	29	32	20 7/8	8 1/8	44 5/8	35'-8"	15'-2 1/2"	5	3
		14'	GLCSLX-FS-2000-34 (S or AL)-64-14	Steel	30'	36	25 7/8	29	32	20 7/8	8 1/8	44 5/8	35'-8"	17'-2 1/2"	5	3
	78'	10'	GLCSL-FS-2000-34 (S or AL)-78-10	Steel	25'	46	25 7/8	26 3/8	29 3/8	20 7/8	8 1/8	44 5/8	35'-8"	12'-9 7/8"	5	4
		12'	GLCSL-FS-2000-34 (S or AL)-78-12	Steel	25'	46	25 7/8	26 3/8	29 3/8	20 7/8	8 1/8	44 5/8	35'-8"	14'-9 7/8"	5	4
		14'	GLCSL-FS-2000-34 (S or AL)-78-14	Steel	25'	46	25 7/8	26 3/8	29 3/8	20 7/8	8 1/8	44 5/8	35'-8"	16'-11 7/8"	5	4
	83'	10'	GLCS-FS-2000-34 (S or AL)-83-10	Steel	20'	46	25 7/8	25	26	20 7/8	8 1/8	44 5/8	35'-8"	12'-8 1/2"	5	5
		10'	AL-FS-2000-34-83-10	Alum	20'	46	21	27 1/2	-	17 7/8	8	44 5/8	35'-8"	12'-11"	5	5
		12'	GLCS-FS-2000-34 (S or AL)-83-12	Steel	20'	46	25 7/8	25	26	20 7/8	8 1/8	44 5/8	35'-8"	14'-8 1/2"	5	5
		12'	AL-FS-2000-34-83-12	Alum	20'	46	21	27 1/2	-	17 7/8	8	44 5/8	35'-8"	14'-11"	5	5
		14'	GLCS-FS-2000-34 (S or AL)-83-14	Steel	20'	46	25 7/8	25	26	20 7/8	8 1/8	44 5/8	35'-8"	16'-8 1/2"	5	5
		14'	AL-FS-2000-34-83-14	Alum	20'	46	21	27 1/2	-	17 7/8	8	44 5/8	35'-8"	16'-11"	5	5
	94'	10'	GLCSLX-FS-2000-34 (S or AL)-94-10	Steel	30'	54	25 7/8	29	32	20 7/8	8 1/8	44 5/8	35'-8"	13'-2 1/2"	5	4
		12'	GLCSLX-FS-2000-34 (S or AL)-94-12	Steel	30'	54	25 7/8	29	32	20 7/8	8 1/8	44 5/8	35'-8"	15'-2 1/2"	5	4
		14'	GLCSLX-FS-2000-34 (S or AL)-94-14	Steel	30'	54	25 7/8	29	32	20 7/8	8 1/8	44 5/8	35'-8"	17'-2 1/2"	5	4
	103'	10'	GLCS-FS-2000-34 (S or AL)-103-10	Steel	20'	54	25 7/8	25	26	20 7/8	8 1/8	44 5/8	35'-8"	12'-8 1/2"	5	6
		10'	AL-FS-2000-34-103-10	Alum	20'	54	21	27 1/2	-	17 7/8	8	44 5/8	35'-8"	12'-11"	5	6
		10'	GLCSL-FS-2000-34 (S or AL)-103-10	Steel	25'	54	25 7/8	26 3/8	29 3/8	20 7/8	8 1/8	44 5/8	35'-8"	12'-9 7/8"	5	5
		12'	GLCS-FS-2000-34 (S or AL)-103-12	Steel	20'	54	25 7/8	25	26	20 7/8	8 1/8	44 5/8	35'-8"	14'-8 1/2"	5	6
		12'	AL-FS-2000-34-103-12	Alum	20'	54	21	27 1/2	-	17 7/8	8	44 5/8	35'-8"	14'-11"	5	6
		12'	GLCSL-FS-2000-34 (S or AL)-103-12	Steel	25'	54	25 7/8	26 3/8	29 3/8	20 7/8	8 1/8	44 5/8	35'-8"	14'-9 7/8"	5	5
		14'	GLCS-FS-2000-34 (S or AL)-103-14	Steel	20'	54	25 7/8	25	26	20 7/8	8 1/8	44 5/8	35'-8"	16'-8 1/2"	5	6
		14'	AL-FS-2000-34-103-14	Alum	20'	54	21	27 1/2	-	17 7/8	8	44 5/8	35'-8"	16'-11"	5	6
		14'	GLCSL-FS-2000-34 (S or AL)-103-14	Steel	25'	54	25 7/8	26 3/8	29 3/8	20 7/8	8 1/8	44 5/8	35'-8"	16'-11 7/8"	5	5
	124'	10'	GLCSLX-FS-2000-34 (S or AL)-124-10	Steel	30'	54	25 7/8	29	32	20 7/8	8 1/8	44 5/8	35'-8"	13'-2 1/2"	5	5
		12'	GLCSLX-FS-2000-34 (S or AL)-124-12	Steel	30'	54	25 7/8	29	32	20 7/8	8 1/8	44 5/8	35'-8"	15'-2 1/2"	5	5
		14'	GLCSLX-FS-2000-34 (S or AL)-124-14	Steel	30'	54	25 7/8	29	32	20 7/8	8 1/8	44 5/8	35'-8"	17'-2 1/2"	5	5

*This column provides the total number of support assemblies based on the "L1" dimensions shown. Support assemblies are designed to AISC specifications and do not require bracing. If no movement of the support assembly is preferred, then bracing to the building steel is recommended (not included).

To Determine Hook Coverage: [Bridge Travel on Runway = Runway Length - (2xL8)] by [Hoist Trolley Travel on Bridge = Bridge Length - L3 - L6] (L6 allows for festoon stack-up).

Gorbel® Free Standing Work Station Bridge Crane Kits include: bridge, runways, the appropriate number of support assemblies, hoist trolley, end trucks, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel runway lengths greater than 63' and all aluminum systems), festoon stack-up section, splice joints and hanger brackets. Hoist and anchor bolts provided by others.

Dimensions are for reference only and are subject to change without notice.

4000# CAPACITY

FREE STANDING WORK STATION CRANES

FREE STANDING WORK STATION BRIDGE CRANES

BRIDGE LENGTH (L)	RUNWAY LENGTH	TS	MODEL NUMBER	TRACK MAT.	RUNWAY			BRIDGE					SUPPORT STRUCTURE			
					MAX. L1	L7 in	L8 in	H3 in	H3A in	H4 in	L3 in	L6 in	OAW	OAH	D in	Sp+*
15'	23'	10'	GLCS-FS-4000-15 (S or AL)-23-10	Steel	20'	9	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	17'-0"	12'-11 7/8"	7	2
		12'	GLCS-FS-4000-15 (S or AL)-23-12	Steel	20'	9	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	17'-0"	14'-11 7/8"	7	2
		14'	GLCS-FS-4000-15 (S or AL)-23-14	Steel	20'	9	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	17'-0"	16'-11 7/8"	7	2
	28'	10'	GLCSL-FS-4000-15 (S or AL)-28-10	Steel	25'	11	25 7/8	31 3/8	34 1/2	21 3/8	15 1/8	38 1/2	17'-0"	13'-1 7/8"	7	2
		12'	GLCSL-FS-4000-15 (S or AL)-28-12	Steel	25'	11	25 7/8	31 3/8	34 1/2	21 3/8	15 1/8	38 1/2	17'-0"	15'-1 7/8"	7	2
		14'	GLCSL-FS-4000-15 (S or AL)-28-14	Steel	25'	11	25 7/8	31 3/8	34 1/2	21 3/8	15 1/8	38 1/2	17'-0"	17'-1 7/8"	7	2
	33'	10'	GLCS-FS-4000-15 (S or AL)-33-10	Steel	20'	13	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	17'-0"	12'-11 7/8"	7	3
		12'	GLCS-FS-4000-15 (S or AL)-33-12	Steel	20'	13	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	17'-0"	14'-11 7/8"	7	3
		14'	GLCS-FS-4000-15 (S or AL)-33-14	Steel	20'	13	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	17'-0"	16'-11 7/8"	7	3
	34'	10'	GLCSLX-FS-4000-15 (S or AL)-34-10	Steel	30'	13	25 7/8	33 3/8	36 1/2	21 3/8	15 1/8	38 1/2	17'-0"	13'-3 7/8"	7	2
		12'	GLCSLX-FS-4000-15 (S or AL)-34-12	Steel	30'	13	25 7/8	33 3/8	36 1/2	21 3/8	15 1/8	38 1/2	17'-0"	15'-3 7/8"	7	2
		14'	GLCSLX-FS-4000-15 (S or AL)-34-14	Steel	30'	13	25 7/8	33 3/8	36 1/2	21 3/8	15 1/8	38 1/2	17'-0"	17'-3 7/8"	7	2
	43'	10'	GLCS-FS-4000-15 (S or AL)-43-10	Steel	20'	17	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	17'-0"	12'-11 7/8"	7	3
		12'	GLCS-FS-4000-15 (S or AL)-43-12	Steel	20'	17	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	17'-0"	14'-11 7/8"	7	3
		14'	GLCS-FS-4000-15 (S or AL)-43-14	Steel	20'	17	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	17'-0"	16'-11 7/8"	7	3
	53'	10'	GLCS-FS-4000-15 (S or AL)-53-10	Steel	20'	19	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	17'-0"	12'-11 7/8"	7	4
		12'	GLCSL-FS-4000-15 (S or AL)-53-10	Steel	25'	19	25 7/8	31 3/8	34 1/2	21 3/8	15 1/8	38 1/2	17'-0"	13'-1 7/8"	7	3
		12'	GLCS-FS-4000-15 (S or AL)-53-12	Steel	20'	19	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	17'-0"	14'-11 7/8"	7	4
		12'	GLCSL-FS-4000-15 (S or AL)-53-12	Steel	25'	19	25 7/8	31 3/8	34 1/2	21 3/8	15 1/8	38 1/2	17'-0"	15'-1 7/8"	7	3
		14'	GLCS-FS-4000-15 (S or AL)-53-14	Steel	20'	19	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	17'-0"	16'-11 7/8"	7	4
		14'	GLCSL-FS-4000-15 (S or AL)-53-14	Steel	25'	19	25 7/8	31 3/8	34 1/2	21 3/8	15 1/8	38 1/2	17'-0"	17'-1 7/8"	7	3
	63'	10'	GLCS-FS-4000-15 (S or AL)-63-10	Steel	20'	23	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	17'-0"	12'-11 7/8"	7	4
		12'	GLCS-FS-4000-15 (S or AL)-63-12	Steel	20'	23	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	17'-0"	14'-11 7/8"	7	4
		14'	GLCS-FS-4000-15 (S or AL)-63-14	Steel	20'	23	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	17'-0"	16'-11 7/8"	7	4
	64'	10'	GLCSLX-FS-4000-15 (S or AL)-64-10	Steel	30'	36	25 7/8	33 3/8	36 1/2	21 3/8	15 1/8	38 1/2	17'-0"	13'-3 7/8"	7	3
		12'	GLCSLX-FS-4000-15 (S or AL)-64-12	Steel	30'	36	25 7/8	33 3/8	36 1/2	21 3/8	15 1/8	38 1/2	17'-0"	15'-3 7/8"	7	3
		14'	GLCSLX-FS-4000-15 (S or AL)-64-14	Steel	30'	36	25 7/8	33 3/8	36 1/2	21 3/8	15 1/8	38 1/2	17'-0"	17'-3 7/8"	7	3
	78'	10'	GLCSL-FS-4000-15 (S or AL)-78-10	Steel	25'	46	25 7/8	31 3/8	34 1/2	21 3/8	15 1/8	38 1/2	17'-0"	13'-1 7/8"	7	4
		12'	GLCSL-FS-4000-15 (S or AL)-78-12	Steel	25'	46	25 7/8	31 3/8	34 1/2	21 3/8	15 1/8	38 1/2	17'-0"	15'-1 7/8"	7	4
		14'	GLCSL-FS-4000-15 (S or AL)-78-14	Steel	25'	46	25 7/8	31 3/8	34 1/2	21 3/8	15 1/8	38 1/2	17'-0"	17'-1 7/8"	7	4
	83'	10'	GLCS-FS-4000-15 (S or AL)-83-10	Steel	20'	46	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	17'-0"	12'-11 7/8"	7	5
		12'	GLCS-FS-4000-15 (S or AL)-83-12	Steel	20'	46	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	17'-0"	14'-11 7/8"	7	5
		14'	GLCS-FS-4000-15 (S or AL)-83-14	Steel	20'	46	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	17'-0"	16'-11 7/8"	7	5
	94'	10'	GLCSLX-FS-4000-15 (S or AL)-94-10	Steel	30'	53	25 7/8	33 3/8	36 1/2	21 3/8	15 1/8	38 1/2	17'-0"	13'-3 7/8"	7	4
		12'	GLCSLX-FS-4000-15 (S or AL)-94-12	Steel	30'	53	25 7/8	33 3/8	36 1/2	21 3/8	15 1/8	38 1/2	17'-0"	15'-3 7/8"	7	4
		14'	GLCSLX-FS-4000-15 (S or AL)-94-14	Steel	30'	53	25 7/8	33 3/8	36 1/2	21 3/8	15 1/8	38 1/2	17'-0"	17'-3 7/8"	7	4
	103'	10'	GLCS-FS-4000-15 (S or AL)-103-10	Steel	20'	54	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	17'-0"	12'-11 7/8"	7	6
		10'	GLCSL-FS-4000-15 (S or AL)-103-10	Steel	25'	54	25 7/8	31 3/8	34 1/2	21 3/8	15 1/8	38 1/2	17'-0"	13'-1 7/8"	7	5
		12'	GLCS-FS-4000-15 (S or AL)-103-12	Steel	20'	54	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	17'-0"	14'-11 7/8"	7	6
		12'	GLCSL-FS-4000-15 (S or AL)-103-12	Steel	25'	54	25 7/8	31 3/8	34 1/2	21 3/8	15 1/8	38 1/2	17'-0"	15'-1 7/8"	7	5
		14'	GLCS-FS-4000-15 (S or AL)-103-14	Steel	20'	54	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	17'-0"	16'-11 7/8"	7	6
	124'	10'	GLCSLX-FS-4000-15 (S or AL)-124-10	Steel	30'	54	25 7/8	33 3/8	36 1/2	21 3/8	15 1/8	38 1/2	17'-0"	17'-1 7/8"	7	5
		12'	GLCSLX-FS-4000-15 (S or AL)-124-12	Steel	30'	54	25 7/8	33 3/8	36 1/2	21 3/8	15 1/8	38 1/2	17'-0"	15'-3 7/8"	7	5
		14'	GLCSLX-FS-4000-15 (S or AL)-124-14	Steel	30'	54	25 7/8	33 3/8	36 1/2	21 3/8	15 1/8	38 1/2	17'-0"	17'-3 7/8"	7	5

*This column provides the total number of support assemblies based on the "L1" dimensions shown. Support assemblies are designed to AISC specifications and do not require bracing. If no movement of the support assembly is preferred, then bracing to the building steel is recommended (not included).

To Determine Hook Coverage: [Bridge Travel on Runway = Runway Length - (2xL8)] by [Hoist Trolley Travel on Bridge = Bridge Length - L3 - L6] (L6 allows for festoon stack-up).

Gorbel® Free Standing Work Station Bridge Crane Kits include: bridge, runways, the appropriate number of support assemblies, hoist trolley, end trucks, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel runway lengths greater than 63' and all aluminum systems), festoon stack-up section, splice joints and hanger brackets. Hoist and anchor bolts provided by others.

Dimensions are for reference only and are subject to change without notice.

FREE STANDING WORK STATION BRIDGE CRANES

BRIDGE LENGTH (L)	RUNWAY LENGTH	TS	MODEL NUMBER	TRACK MAT.	RUNWAY			BRIDGE					SUPPORT STRUCTURE			
					MAX. L1	L7 in	L8 in	H3 in	H3A in	H4 in	L3 in	L6 in	OAW	OAH	D in	Spt*
20'	23'	10'	GLCS-FS-4000-20 (S or AL)-23-10	Steel	20'	9	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	22'-0"	12'-11 7/8"	7	2
		12'	GLCS-FS-4000-20 (S or AL)-23-12	Steel	20'	9	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	22'-0"	14'-11 7/8"	7	2
		14'	GLCS-FS-4000-20 (S or AL)-23-14	Steel	20'	9	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	22'-0"	16'-11 7/8"	7	2
	28'	10'	GLCSL-FS-4000-20 (S or AL)-28-10	Steel	25'	11	25 7/8	31 3/8	34 1/2	21 3/8	15 1/8	38 1/2	22'-0"	13'-1 7/8"	7	2
		12'	GLCSL-FS-4000-20 (S or AL)-28-12	Steel	25'	11	25 7/8	31 3/8	34 1/2	21 3/8	15 1/8	38 1/2	22'-0"	15'-1 7/8"	7	2
		14'	GLCSL-FS-4000-20 (S or AL)-28-14	Steel	25'	11	25 7/8	31 3/8	34 1/2	21 3/8	15 1/8	38 1/2	22'-0"	17'-1 7/8"	7	2
	33'	10'	GLCS-FS-4000-20 (S or AL)-33-10	Steel	20'	13	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	22'-0"	12'-11 7/8"	7	3
		12'	GLCS-FS-4000-20 (S or AL)-33-12	Steel	20'	13	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	22'-0"	14'-11 7/8"	7	3
		14'	GLCS-FS-4000-20 (S or AL)-33-14	Steel	20'	13	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	22'-0"	16'-11 7/8"	7	3
	34'	10'	GLCSLX-FS-4000-20 (S or AL)-34-10	Steel	30'	13	25 7/8	33 3/8	36 1/2	21 3/8	15 1/8	38 1/2	22'-0"	13'-3 7/8"	7	2
		12'	GLCSLX-FS-4000-20 (S or AL)-34-12	Steel	30'	13	25 7/8	33 3/8	36 1/2	21 3/8	15 1/8	38 1/2	22'-0"	15'-3 7/8"	7	2
		14'	GLCSLX-FS-4000-20 (S or AL)-34-14	Steel	30'	13	25 7/8	33 3/8	36 1/2	21 3/8	15 1/8	38 1/2	22'-0"	17'-3 7/8"	7	2
	43'	10'	GLCS-FS-4000-20 (S or AL)-43-10	Steel	20'	17	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	22'-0"	12'-11 7/8"	7	3
		12'	GLCS-FS-4000-20 (S or AL)-43-12	Steel	20'	17	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	22'-0"	14'-11 7/8"	7	3
		14'	GLCS-FS-4000-20 (S or AL)-43-14	Steel	20'	17	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	22'-0"	16'-11 7/8"	7	3
	53'	10'	GLCS-FS-4000-20 (S or AL)-53-10	Steel	20'	19	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	22'-0"	12'-11 7/8"	7	4
		12'	GLCSL-FS-4000-20 (S or AL)-53-10	Steel	25'	19	25 7/8	31 3/8	34 1/2	21 3/8	15 1/8	38 1/2	22'-0"	13'-1 7/8"	7	3
		12'	GLCS-FS-4000-20 (S or AL)-53-12	Steel	20'	19	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	22'-0"	14'-11 7/8"	7	4
		12'	GLCSL-FS-4000-20 (S or AL)-53-12	Steel	25'	19	25 7/8	31 3/8	34 1/2	21 3/8	15 1/8	38 1/2	22'-0"	15'-1 7/8"	7	3
		14'	GLCS-FS-4000-20 (S or AL)-53-14	Steel	20'	19	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	22'-0"	16'-11 7/8"	7	4
	63'	10'	GLCSL-FS-4000-20 (S or AL)-63-10	Steel	20'	23	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	22'-0"	12'-11 7/8"	7	4
		12'	GLCS-FS-4000-20 (S or AL)-63-12	Steel	20'	23	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	22'-0"	14'-11 7/8"	7	4
		14'	GLCS-FS-4000-20 (S or AL)-63-14	Steel	20'	23	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	22'-0"	16'-11 7/8"	7	4
	64'	10'	GLCSLX-FS-4000-20 (S or AL)-64-10	Steel	30'	36	25 7/8	33 3/8	36 1/2	21 3/8	15 1/8	38 1/2	22'-0"	13'-3 7/8"	7	3
		12'	GLCSLX-FS-4000-20 (S or AL)-64-12	Steel	30'	36	25 7/8	33 3/8	36 1/2	21 3/8	15 1/8	38 1/2	22'-0"	15'-3 7/8"	7	3
		14'	GLCSLX-FS-4000-20 (S or AL)-64-14	Steel	30'	36	25 7/8	33 3/8	36 1/2	21 3/8	15 1/8	38 1/2	22'-0"	17'-3 7/8"	7	3
	78'	10'	GLCSL-FS-4000-20 (S or AL)-78-10	Steel	25'	46	25 7/8	31 3/8	34 1/2	21 3/8	15 1/8	38 1/2	22'-0"	13'-1 7/8"	7	4
		12'	GLCSL-FS-4000-20 (S or AL)-78-12	Steel	25'	46	25 7/8	31 3/8	34 1/2	21 3/8	15 1/8	38 1/2	22'-0"	15'-1 7/8"	7	4
		14'	GLCSL-FS-4000-20 (S or AL)-78-14	Steel	25'	46	25 7/8	31 3/8	34 1/2	21 3/8	15 1/8	38 1/2	22'-0"	17'-1 7/8"	7	4
	83'	10'	GLCS-FS-4000-20 (S or AL)-83-10	Steel	20'	46	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	22'-0"	12'-11 7/8"	7	5
		12'	GLCS-FS-4000-20 (S or AL)-83-12	Steel	20'	46	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	22'-0"	14'-11 7/8"	7	5
		14'	GLCS-FS-4000-20 (S or AL)-83-14	Steel	20'	46	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	22'-0"	16'-11 7/8"	7	5
	94'	10'	GLCSLX-FS-4000-20 (S or AL)-94-10	Steel	30'	53	25 7/8	33 3/8	36 1/2	21 3/8	15 1/8	38 1/2	22'-0"	13'-3 7/8"	7	4
		12'	GLCSLX-FS-4000-20 (S or AL)-94-12	Steel	30'	53	25 7/8	33 3/8	36 1/2	21 3/8	15 1/8	38 1/2	22'-0"	15'-3 7/8"	7	4
		14'	GLCSLX-FS-4000-20 (S or AL)-94-14	Steel	30'	53	25 7/8	33 3/8	36 1/2	21 3/8	15 1/8	38 1/2	22'-0"	17'-3 7/8"	7	4
	103'	10'	GLCS-FS-4000-20 (S or AL)-103-10	Steel	20'	54	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	22'-0"	12'-11 7/8"	7	6
		10'	GLCSL-FS-4000-20 (S or AL)-103-10	Steel	25'	54	25 7/8	31 3/8	34 1/2	21 3/8	15 1/8	38 1/2	22'-0"	13'-1 7/8"	7	5
		12'	GLCS-FS-4000-20 (S or AL)-103-12	Steel	20'	54	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	22'-0"	14'-11 7/8"	7	6
		12'	GLCSL-FS-4000-20 (S or AL)-103-12	Steel	25'	54	25 7/8	31 3/8	34 1/2	21 3/8	15 1/8	38 1/2	22'-0"	15'-1 7/8"	7	5
		14'	GLCS-FS-4000-20 (S or AL)-103-14	Steel	20'	54	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	22'-0"	16'-11 7/8"	7	6
	124'	10'	GLCSL-FS-4000-20 (S or AL)-103-14	Steel	25'	54	25 7/8	31 3/8	34 1/2	21 3/8	15 1/8	38 1/2	22'-0"	17'-1 7/8"	7	5
		10'	GLCSLX-FS-4000-20 (S or AL)-124-10	Steel	30'	54	25 7/8	33 3/8	36 1/2	21 3/8	15 1/8	38 1/2	22'-0"	13'-3 7/8"	7	5
		12'	GLCSLX-FS-4000-20 (S or AL)-124-12	Steel	30'	54	25 7/8	33 3/8	36 1/2	21 3/8	15 1/8	38 1/2	22'-0"	15'-3 7/8"	7	5
		14'	GLCSLX-FS-4000-20 (S or AL)-124-14	Steel	30'	54	25 7/8	33 3/8	36 1/2	21 3/8	15 1/8	38 1/2	22'-0"	17'-3 7/8"	7	5

*This column provides the total number of support assemblies based on the "L1" dimensions shown. Support assemblies are designed to AISC specifications and do not require bracing. If no movement of the support assembly is preferred, then bracing to the building steel is recommended (not included).

To Determine Hook Coverage: [Bridge Travel on Runway = Runway Length - (2xL8)] by [Hoist Trolley Travel on Bridge = Bridge Length - L3 - L6] (L6 allows for festoon stack-up).

Gorbel® Free Standing Work Station Bridge Crane Kits include: bridge, runways, the appropriate number of support assemblies, hoist trolley, end trucks, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel runway lengths greater than 63' and all aluminum systems), festoon stack-up section, splice joints and hanger brackets. Hoist and anchor bolts provided by others.

Dimensions are for reference only and are subject to change without notice.

4000# CAPACITY

FREE STANDING WORK STATION CRANES

FREE STANDING WORK STATION BRIDGE CRANES

BRIDGE LENGTH (L)	RUNWAY LENGTH	TS	MODEL NUMBER	TRACK MAT.	RUNWAY			BRIDGE					SUPPORT STRUCTURE			
					MAX. L1	L7 in	L8 in	H3 in	H3A in	H4 in	L3 in	L6 in	OAW	OAH	D in	SPT*
23'	23'	10'	GLCS-FS-4000-23 (S or AL)-23-10	Steel	20'	9	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	30'-0"	12'-11 7/8"	7	2
		12'	GLCS-FS-4000-23 (S or AL)-23-12	Steel	20'	9	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	30'-0"	14'-11 7/8"	7	2
		14'	GLCS-FS-4000-23 (S or AL)-23-14	Steel	20'	9	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	30'-0"	16'-11 7/8"	7	2
	28'	10'	GLCSL-FS-4000-23 (S or AL)-28-10	Steel	25'	13	25 7/8	31 3/8	34 1/2	21 3/8	15 1/8	38 1/2	30'-0"	13'-1 7/8"	7	2
		12'	GLCSL-FS-4000-23 (S or AL)-28-12	Steel	25'	13	25 7/8	31 3/8	34 1/2	21 3/8	15 1/8	38 1/2	30'-0"	15'-1 7/8"	7	2
		14'	GLCSL-FS-4000-23 (S or AL)-28-14	Steel	25'	13	25 7/8	31 3/8	34 1/2	21 3/8	15 1/8	38 1/2	30'-0"	17'-1 7/8"	7	2
	33'	10'	GLCS-FS-4000-23 (S or AL)-33-10	Steel	20'	13	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	30'-0"	12'-11 7/8"	7	3
		12'	GLCS-FS-4000-23 (S or AL)-33-12	Steel	20'	13	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	30'-0"	14'-11 7/8"	7	3
		14'	GLCS-FS-4000-23 (S or AL)-33-14	Steel	20'	13	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	30'-0"	16'-11 7/8"	7	3
	34'	10'	GLCSLX-FS-4000-23 (S or AL)-34-10	Steel	30'	13	25 7/8	33 3/8	36 1/2	21 3/8	15 1/8	38 1/2	30'-0"	13'-3 7/8"	7	2
		12'	GLCSLX-FS-4000-23 (S or AL)-34-12	Steel	30'	13	25 7/8	33 3/8	36 1/2	21 3/8	15 1/8	38 1/2	30'-0"	15'-3 7/8"	7	2
		14'	GLCSLX-FS-4000-23 (S or AL)-34-14	Steel	30'	13	25 7/8	33 3/8	36 1/2	21 3/8	15 1/8	38 1/2	30'-0"	17'-3 7/8"	7	2
	43'	10'	GLCS-FS-4000-23 (S or AL)-43-10	Steel	20'	19	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	30'-0"	12'-11 7/8"	7	3
		12'	GLCS-FS-4000-23 (S or AL)-43-12	Steel	20'	19	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	30'-0"	14'-11 7/8"	7	3
		14'	GLCS-FS-4000-23 (S or AL)-43-14	Steel	20'	19	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	30'-0"	16'-11 7/8"	7	3
	53'	10'	GLCS-FS-4000-23 (S or AL)-53-10	Steel	20'	19	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	30'-0"	12'-11 7/8"	7	4
		10'	GLCSL-FS-4000-23 (S or AL)-53-10	Steel	25'	19	25 7/8	31 3/8	34 1/2	21 3/8	15 1/8	38 1/2	30'-0"	13'-1 7/8"	7	3
		12'	GLCS-FS-4000-23 (S or AL)-53-12	Steel	20'	19	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	30'-0"	14'-11 7/8"	7	4
		12'	GLCSL-FS-4000-23 (S or AL)-53-12	Steel	25'	19	25 7/8	31 3/8	34 1/2	21 3/8	15 1/8	38 1/2	30'-0"	15'-1 7/8"	7	3
		14'	GLCS-FS-4000-23 (S or AL)-53-14	Steel	20'	19	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	30'-0"	16'-11 7/8"	7	4
		14'	GLCSL-FS-4000-23 (S or AL)-53-14	Steel	25'	19	25 7/8	31 3/8	34 1/2	21 3/8	15 1/8	38 1/2	30'-0"	17'-1 7/8"	7	3
	63'	10'	GLCS-FS-4000-23 (S or AL)-63-10	Steel	20'	26	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	30'-0"	12'-11 7/8"	7	4
		12'	GLCS-FS-4000-23 (S or AL)-63-12	Steel	20'	26	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	30'-0"	14'-11 7/8"	7	4
		14'	GLCS-FS-4000-23 (S or AL)-63-14	Steel	20'	26	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	30'-0"	16'-11 7/8"	7	4
	64'	10'	GLCSLX-FS-4000-23 (S or AL)-64-10	Steel	30'	36	25 7/8	33 3/8	36 1/2	21 3/8	15 1/8	38 1/2	30'-0"	13'-3 7/8"	7	3
		12'	GLCSLX-FS-4000-23 (S or AL)-64-12	Steel	30'	36	25 7/8	33 3/8	36 1/2	21 3/8	15 1/8	38 1/2	30'-0"	15'-3 7/8"	7	3
		14'	GLCSLX-FS-4000-23 (S or AL)-64-14	Steel	30'	36	25 7/8	33 3/8	36 1/2	21 3/8	15 1/8	38 1/2	30'-0"	17'-3 7/8"	7	3
	78'	10'	GLCSL-FS-4000-23 (S or AL)-78-10	Steel	25'	46	25 7/8	31 3/8	34 1/2	21 3/8	15 1/8	38 1/2	30'-0"	13'-1 7/8"	7	4
		12'	GLCSL-FS-4000-23 (S or AL)-78-12	Steel	25'	46	25 7/8	31 3/8	34 1/2	21 3/8	15 1/8	38 1/2	30'-0"	15'-1 7/8"	7	4
		14'	GLCSL-FS-4000-23 (S or AL)-78-14	Steel	25'	46	25 7/8	31 3/8	34 1/2	21 3/8	15 1/8	38 1/2	30'-0"	17'-1 7/8"	7	4
	83'	10'	GLCS-FS-4000-23 (S or AL)-83-10	Steel	20'	46	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	30'-0"	12'-11 7/8"	7	5
		12'	GLCS-FS-4000-23 (S or AL)-83-12	Steel	20'	46	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	30'-0"	14'-11 7/8"	7	5
		14'	GLCS-FS-4000-23 (S or AL)-83-14	Steel	20'	46	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	30'-0"	16'-11 7/8"	7	5
	94'	10'	GLCSLX-FS-4000-23 (S or AL)-94-10	Steel	30'	54	25 7/8	33 3/8	36 1/2	21 3/8	15 1/8	38 1/2	30'-0"	13'-3 7/8"	7	4
		12'	GLCSLX-FS-4000-23 (S or AL)-94-12	Steel	30'	54	25 7/8	33 3/8	36 1/2	21 3/8	15 1/8	38 1/2	30'-0"	15'-3 7/8"	7	4
		14'	GLCSLX-FS-4000-23 (S or AL)-94-14	Steel	30'	54	25 7/8	33 3/8	36 1/2	21 3/8	15 1/8	38 1/2	30'-0"	17'-3 7/8"	7	4
	103'	10'	GLCS-FS-4000-23 (S or AL)-103-10	Steel	20'	54	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	30'-0"	12'-11 7/8"	7	6
		10'	GLCSL-FS-4000-23 (S or AL)-103-10	Steel	25'	54	25 7/8	31 3/8	34 1/2	21 3/8	15 1/8	38 1/2	30'-0"	13'-1 7/8"	7	5
		12'	GLCS-FS-4000-23 (S or AL)-103-12	Steel	20'	54	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	30'-0"	14'-11 7/8"	7	6
		12'	GLCSL-FS-4000-23 (S or AL)-103-12	Steel	25'	54	25 7/8	31 3/8	34 1/2	21 3/8	15 1/8	38 1/2	30'-0"	15'-1 7/8"	7	5
		14'	GLCS-FS-4000-23 (S or AL)-103-14	Steel	20'	54	25 7/8	29 3/8	32 1/2	21 3/8	15 1/8	38 1/2	30'-0"	16'-11 7/8"	7	6
	124'	14'	GLCSL-FS-4000-23 (S or AL)-103-14	Steel	25'	54	25 7/8	31 3/8	34 1/2	21 3/8	15 1/8	38 1/2	30'-0"	17'-1 7/8"	7	5
		10'	GLCSLX-FS-4000-23 (S or AL)-124-10	Steel	30'	54	25 7/8	33 3/8	36 1/2	21 3/8	15 1/8	38 1/2	30'-0"	13'-3 7/8"	7	5
		12'	GLCSLX-FS-4000-23 (S or AL)-124-12	Steel	30'	54	25 7/8	33 3/8	36 1/2	21 3/8	15 1/8	38 1/2	30'-0"	15'-3 7/8"	7	5
	14'	GLCSLX-FS-4000-23 (S or AL)-124-14	Steel	30'	54	25 7/8	33 3/8	36 1/2	21 3/8	15 1/8	38 1/2	30'-0"	17'-3 7/8"	7	5	

*This column provides the total number of support assemblies based on the "L1" dimensions shown. Support assemblies are designed to AISC specifications and do not require bracing. If no movement of the support assembly is preferred, then bracing to the building steel is recommended (not included).

To Determine Hook Coverage: [Bridge Travel on Runway = Runway Length - (2xL8)] by [Hoist Trolley Travel on Bridge = Bridge Length - L3 - L6] (L6 allows for festoon stack-up).

Gorbel® Free Standing Work Station Bridge Crane Kits include: bridge, runways, the appropriate number of support assemblies, hoist trolley, end trucks, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel runway lengths greater than 63' and all aluminum systems), festoon stack-up section, splice joints and hanger brackets. Hoist and anchor bolts provided by others.

Dimensions are for reference only and are subject to change without notice.

FREE STANDING WORK STATION BRIDGE CRANES

BRIDGE LENGTH (L)	RUNWAY LENGTH	TS	MODEL NUMBER	TRACK MAT.	RUNWAY			BRIDGE					SUPPORT STRUCTURE			
					MAX. L1	L7 in	L8 in	H3 in	H3A in	H4 in	L3 in	L6 in	OAW	OAH	D in	Spt*
28'	23'	10'	GLCS-FS-4000-28 (S or AL)-23-10	Steel	20'	9	25 7/8	29 3/8	32 1/2	23 3/8	15 1/8	41 1/2	36'-0"	13'-0 7/8"	7	2
		12'	GLCS-FS-4000-28 (S or AL)-23-12	Steel	20'	9	25 7/8	29 3/8	32 1/2	23 3/8	15 1/8	41 1/2	36'-0"	15'-0 7/8"	7	2
		14'	GLCS-FS-4000-28 (S or AL)-23-14	Steel	20'	9	25 7/8	29 3/8	32 1/2	23 3/8	15 1/8	41 1/2	36'-0"	17'-0 7/8"	7	2
	28'	10'	GLCSL-FS-4000-28 (S or AL)-28-10	Steel	25'	9	25 7/8	31 3/8	34 1/2	23 3/8	15 1/8	41 1/2	36'-0"	13'-2 7/8"	7	2
		12'	GLCSL-FS-4000-28 (S or AL)-28-12	Steel	25'	9	25 7/8	31 3/8	34 1/2	23 3/8	15 1/8	41 1/2	36'-0"	15'-2 7/8"	7	2
		14'	GLCSL-FS-4000-28 (S or AL)-28-14	Steel	25'	9	25 7/8	31 3/8	34 1/2	23 3/8	15 1/8	41 1/2	36'-0"	17'-2 7/8"	7	2
	33'	10'	GLCS-FS-4000-28 (S or AL)-33-10	Steel	20'	9	25 7/8	29 3/8	32 1/2	23 3/8	15 1/8	41 1/2	36'-0"	13'-0 7/8"	7	3
		12'	GLCS-FS-4000-28 (S or AL)-33-12	Steel	20'	9	25 7/8	29 3/8	32 1/2	23 3/8	15 1/8	41 1/2	36'-0"	15'-0 7/8"	7	3
		14'	GLCS-FS-4000-28 (S or AL)-33-14	Steel	20'	9	25 7/8	29 3/8	32 1/2	23 3/8	15 1/8	41 1/2	36'-0"	17'-0 7/8"	7	3
	34'	10'	GLCSLX-FS-4000-28 (S or AL)-34-10	Steel	30'	9	25 7/8	33 3/8	36 1/2	23 3/8	15 1/8	41 1/2	36'-0"	13'-4 7/8"	7	2
		12'	GLCSLX-FS-4000-28 (S or AL)-34-12	Steel	30'	9	25 7/8	33 3/8	36 1/2	23 3/8	15 1/8	41 1/2	36'-0"	15'-4 7/8"	7	2
		14'	GLCSLX-FS-4000-28 (S or AL)-34-14	Steel	30'	9	25 7/8	33 3/8	36 1/2	23 3/8	15 1/8	41 1/2	36'-0"	17'-4 7/8"	7	2
	43'	10'	GLCS-FS-4000-28 (S or AL)-43-10	Steel	20'	13	25 7/8	29 3/8	32 1/2	23 3/8	15 1/8	41 1/2	36'-0"	13'-0 7/8"	7	3
		12'	GLCS-FS-4000-28 (S or AL)-43-12	Steel	20'	13	25 7/8	29 3/8	32 1/2	23 3/8	15 1/8	41 1/2	36'-0"	15'-0 7/8"	7	3
		14'	GLCS-FS-4000-28 (S or AL)-43-14	Steel	20'	13	25 7/8	29 3/8	32 1/2	23 3/8	15 1/8	41 1/2	36'-0"	17'-0 7/8"	7	3
	53'	10'	GLCS-FS-4000-28 (S or AL)-53-10	Steel	20'	13	25 7/8	29 3/8	32 1/2	23 3/8	15 1/8	41 1/2	36'-0"	13'-0 7/8"	7	4
		10'	GLCSL-FS-4000-28 (S or AL)-53-10	Steel	25'	13	25 7/8	31 3/8	34 1/2	23 3/8	15 1/8	41 1/2	36'-0"	13'-2 7/8"	7	3
		12'	GLCS-FS-4000-28 (S or AL)-53-12	Steel	20'	13	25 7/8	29 3/8	32 1/2	23 3/8	15 1/8	41 1/2	36'-0"	15'-0 7/8"	7	4
		12'	GLCSL-FS-4000-28 (S or AL)-53-12	Steel	25'	13	25 7/8	31 3/8	34 1/2	23 3/8	15 1/8	41 1/2	36'-0"	15'-2 7/8"	7	3
		14'	GLCS-FS-4000-28 (S or AL)-53-14	Steel	20'	13	25 7/8	29 3/8	32 1/2	23 3/8	15 1/8	41 1/2	36'-0"	17'-0 7/8"	7	4
		14'	GLCSL-FS-4000-28 (S or AL)-53-14	Steel	25'	13	25 7/8	31 3/8	34 1/2	23 3/8	15 1/8	41 1/2	36'-0"	17'-2 7/8"	7	3
	63'	10'	GLCS-FS-4000-28 (S or AL)-63-10	Steel	20'	19	25 7/8	29 3/8	32 1/2	23 3/8	15 1/8	41 1/2	36'-0"	13'-0 7/8"	7	4
		12'	GLCS-FS-4000-28 (S or AL)-63-12	Steel	20'	19	25 7/8	29 3/8	32 1/2	23 3/8	15 1/8	41 1/2	36'-0"	15'-0 7/8"	7	4
		14'	GLCS-FS-4000-28 (S or AL)-63-14	Steel	20'	19	25 7/8	29 3/8	32 1/2	23 3/8	15 1/8	41 1/2	36'-0"	17'-0 7/8"	7	4
	64'	10'	GLCSLX-FS-4000-28 (S or AL)-64-10	Steel	30'	36	25 7/8	33 3/8	36 1/2	23 3/8	15 1/8	44 7/8	36'-0"	13'-4 7/8"	7	3
		12'	GLCSLX-FS-4000-28 (S or AL)-64-12	Steel	30'	36	25 7/8	33 3/8	36 1/2	23 3/8	15 1/8	44 7/8	36'-0"	15'-4 7/8"	7	3
		14'	GLCSLX-FS-4000-28 (S or AL)-64-14	Steel	30'	36	25 7/8	33 3/8	36 1/2	23 3/8	15 1/8	44 7/8	36'-0"	17'-4 7/8"	7	3
	78'	10'	GLCSL-FS-4000-28 (S or AL)-78-10	Steel	25'	46	25 7/8	31 3/8	34 1/2	23 3/8	15 1/8	44 7/8	36'-0"	13'-2 7/8"	7	4
		12'	GLCSL-FS-4000-28 (S or AL)-78-12	Steel	25'	46	25 7/8	31 3/8	34 1/2	23 3/8	15 1/8	44 7/8	36'-0"	15'-2 7/8"	7	4
		14'	GLCSL-FS-4000-28 (S or AL)-78-14	Steel	25'	46	25 7/8	31 3/8	34 1/2	23 3/8	15 1/8	44 7/8	36'-0"	17'-2 7/8"	7	4
	83'	10'	GLCS-FS-4000-28 (S or AL)-83-10	Steel	20'	46	25 7/8	29 3/8	32 1/2	23 3/8	15 1/8	44 7/8	36'-0"	13'-0 7/8"	7	5
		12'	GLCS-FS-4000-28 (S or AL)-83-12	Steel	20'	46	25 7/8	29 3/8	32 1/2	23 3/8	15 1/8	44 7/8	36'-0"	15'-0 7/8"	7	5
		14'	GLCS-FS-4000-28 (S or AL)-83-14	Steel	20'	46	25 7/8	29 3/8	32 1/2	23 3/8	15 1/8	44 7/8	36'-0"	17'-0 7/8"	7	5
	94'	10'	GLCSLX-FS-4000-28 (S or AL)-94-10	Steel	30'	54	25 7/8	33 3/8	36 1/2	23 3/8	15 1/8	44 7/8	36'-0"	13'-4 7/8"	7	4
		12'	GLCSLX-FS-4000-28 (S or AL)-94-12	Steel	30'	54	25 7/8	33 3/8	36 1/2	23 3/8	15 1/8	44 7/8	36'-0"	15'-4 7/8"	7	4
		14'	GLCSLX-FS-4000-28 (S or AL)-94-14	Steel	30'	54	25 7/8	33 3/8	36 1/2	23 3/8	15 1/8	44 7/8	36'-0"	17'-4 7/8"	7	4
	103'	10'	GLCS-FS-4000-28 (S or AL)-103-10	Steel	20'	54	25 7/8	29 3/8	32 1/2	23 3/8	15 1/8	44 7/8	36'-0"	13'-0 7/8"	7	6
		10'	GLCSL-FS-4000-28 (S or AL)-103-10	Steel	25'	54	25 7/8	31 3/8	34 1/2	23 3/8	15 1/8	44 7/8	36'-0"	13'-2 7/8"	7	5
		12'	GLCS-FS-4000-28 (S or AL)-103-12	Steel	20'	54	25 7/8	29 3/8	32 1/2	23 3/8	15 1/8	44 7/8	36'-0"	15'-0 7/8"	7	6
		12'	GLCSL-FS-4000-28 (S or AL)-103-12	Steel	25'	54	25 7/8	31 3/8	34 1/2	23 3/8	15 1/8	44 7/8	36'-0"	15'-2 7/8"	7	5
		14'	GLCS-FS-4000-28 (S or AL)-103-14	Steel	20'	54	25 7/8	29 3/8	32 1/2	23 3/8	15 1/8	44 7/8	36'-0"	17'-0 7/8"	7	6
	124'	10'	GLCSLX-FS-4000-28 (S or AL)-124-10	Steel	30'	54	25 7/8	33 3/8	36 1/2	23 3/8	15 1/8	44 7/8	36'-0"	13'-4 7/8"	7	5
		12'	GLCSLX-FS-4000-28 (S or AL)-124-12	Steel	30'	54	25 7/8	33 3/8	36 1/2	23 3/8	15 1/8	44 7/8	36'-0"	15'-4 7/8"	7	5
		14'	GLCSLX-FS-4000-28 (S or AL)-124-14	Steel	30'	54	25 7/8	33 3/8	36 1/2	23 3/8	15 1/8	44 7/8	36'-0"	17'-4 7/8"	7	5

*This column provides the total number of support assemblies based on the "L1" dimensions shown. Support assemblies are designed to AISC specifications and do not require bracing. If no movement of the support assembly is preferred, then bracing to the building steel is recommended (not included).

To Determine Hook Coverage: [Bridge Travel on Runway = Runway Length - (2xL8)] by [Hoist Trolley Travel on Bridge = Bridge Length - L3 - L6] (L6 allows for festoon stack-up).

Gorbel® Free Standing Work Station Bridge Crane Kits include: bridge, runways, the appropriate number of support assemblies, hoist trolley, end trucks, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel runway lengths greater than 63' and all aluminum systems), festoon stack-up section, splice joints and hanger brackets. Hoist and anchor bolts provided by others.

Dimensions are for reference only and are subject to change without notice.

4000# CAPACITY

FREE STANDING WORK STATION BRIDGE CRANES

BRIDGE LENGTH (L)	RUNWAY LENGTH	TS	MODEL NUMBER	TRACK MAT.	RUNWAY			BRIDGE					SUPPORT STRUCTURE			
					MAX. L1	L7 in	L8 in	H3 in	H3A in	H4 in	L3 in	L6 in	OAW	OAH	D in	SPT* in
34'	28'	10'	GLCSL-FS-4000-34 (S or AL)-28-10	Steel	25'	13	25 7/8	31 3/8	34 1/2	25 3/8	15 1/8	47 1/2	36'-0"	13'-4 7/8"	7	2
		12'	GLCSL-FS-4000-34 (S or AL)-28-12	Steel	25'	13	25 7/8	31 3/8	34 1/2	25 3/8	15 1/8	47 1/2	36'-0"	15'-4 7/8"	7	2
		14'	GLCSL-FS-4000-34 (S or AL)-28-14	Steel	25'	13	25 7/8	31 3/8	34 1/2	25 3/8	15 1/8	47 1/2	36'-0"	17'-4 7/8"	7	2
	33'	10'	GLCS-FS-4000-34 (S or AL)-33-10	Steel	20'	9	25 7/8	29 3/8	32 1/2	25 3/8	15 1/8	47 1/2	36'-0"	13'-2 7/8"	7	3
		12'	GLCS-FS-4000-34 (S or AL)-33-12	Steel	20'	9	25 7/8	29 3/8	32 1/2	25 3/8	15 1/8	47 1/2	36'-0"	15'-2 7/8"	7	3
		14'	GLCS-FS-4000-34 (S or AL)-33-14	Steel	20'	9	25 7/8	29 3/8	32 1/2	25 3/8	15 1/8	47 1/2	36'-0"	17'-2 7/8"	7	3
	34'	10'	GLCSLX-FS-4000-34 (S or AL)-34-10	Steel	30'	9	25 7/8	33 3/8	36 1/2	25 3/8	15 1/8	47 1/2	36'-0"	13'-6 7/8"	7	2
		12'	GLCSLX-FS-4000-34 (S or AL)-34-12	Steel	30'	9	25 7/8	33 3/8	36 1/2	25 3/8	15 1/8	47 1/2	36'-0"	15'-6 7/8"	7	2
		14'	GLCSLX-FS-4000-34 (S or AL)-34-14	Steel	30'	9	25 7/8	33 3/8	36 1/2	25 3/8	15 1/8	47 1/2	36'-0"	17'-6 7/8"	7	2
	43'	10'	GLCS-FS-4000-34 (S or AL)-43-10	Steel	20'	13	25 7/8	29 3/8	32 1/2	25 3/8	15 1/8	47 1/2	36'-0"	13'-2 7/8"	7	3
		12'	GLCS-FS-4000-34 (S or AL)-43-12	Steel	20'	13	25 7/8	29 3/8	32 1/2	25 3/8	15 1/8	47 1/2	36'-0"	15'-2 7/8"	7	3
		14'	GLCS-FS-4000-34 (S or AL)-43-14	Steel	20'	13	25 7/8	29 3/8	32 1/2	25 3/8	15 1/8	47 1/2	36'-0"	17'-2 7/8"	7	3
	53'	10'	GLCS-FS-4000-34 (S or AL)-53-10	Steel	20'	13	25 7/8	29 3/8	32 1/2	25 3/8	15 1/8	47 1/2	36'-0"	13'-2 7/8"	7	4
		10'	GLCSL-FS-4000-34 (S or AL)-53-10	Steel	25'	13	25 7/8	31 3/8	34 1/2	25 3/8	15 1/8	47 1/2	36'-0"	13'-4 7/8"	7	3
		12'	GLCS-FS-4000-34 (S or AL)-53-12	Steel	20'	13	25 7/8	29 3/8	32 1/2	25 3/8	15 1/8	47 1/2	36'-0"	15'-2 7/8"	7	4
		12'	GLCSL-FS-4000-34 (S or AL)-53-12	Steel	25'	13	25 7/8	31 3/8	34 1/2	25 3/8	15 1/8	47 1/2	36'-0"	15'-4 7/8"	7	3
		14'	GLCS-FS-4000-34 (S or AL)-53-14	Steel	20'	13	25 7/8	29 3/8	32 1/2	25 3/8	15 1/8	47 1/2	36'-0"	17'-2 7/8"	7	4
	63'	14'	GLCSL-FS-4000-34 (S or AL)-53-14	Steel	25'	13	25 7/8	31 3/8	34 1/2	25 3/8	15 1/8	47 1/2	36'-0"	17'-4 7/8"	7	3
		10'	GLCS-FS-4000-34 (S or AL)-63-10	Steel	20'	19	25 7/8	29 3/8	32 1/2	25 3/8	15 1/8	47 1/2	36'-0"	13'-2 7/8"	7	4
		12'	GLCS-FS-4000-34 (S or AL)-63-12	Steel	20'	19	25 7/8	29 3/8	32 1/2	25 3/8	15 1/8	47 1/2	36'-0"	15'-2 7/8"	7	4
	64'	14'	GLCS-FS-4000-34 (S or AL)-63-14	Steel	20'	19	25 7/8	29 3/8	32 1/2	25 3/8	15 1/8	47 1/2	36'-0"	17'-2 7/8"	7	4
		10'	GLCSLX-FS-4000-34 (S or AL)-64-10	Steel	30'	36	25 7/8	33 3/8	36 1/2	25 3/8	15 1/8	51 5/8	36'-0"	13'-6 7/8"	7	3
		12'	GLCSLX-FS-4000-34 (S or AL)-64-12	Steel	30'	36	25 7/8	33 3/8	36 1/2	25 3/8	15 1/8	51 5/8	36'-0"	15'-6 7/8"	7	3
	78'	14'	GLCSLX-FS-4000-34 (S or AL)-64-14	Steel	30'	36	25 7/8	33 3/8	36 1/2	25 3/8	15 1/8	51 5/8	36'-0"	17'-6 7/8"	7	3
		10'	GLCSL-FS-4000-34 (S or AL)-78-10	Steel	25'	46	25 7/8	31 3/8	34 1/2	25 3/8	15 1/8	51 5/8	36'-0"	13'-4 7/8"	7	4
		12'	GLCSL-FS-4000-34 (S or AL)-78-12	Steel	25'	46	25 7/8	31 3/8	34 1/2	25 3/8	15 1/8	51 5/8	36'-0"	15'-4 7/8"	7	4
	83'	14'	GLCSL-FS-4000-34 (S or AL)-78-14	Steel	25'	46	25 7/8	31 3/8	34 1/2	25 3/8	15 1/8	51 5/8	36'-0"	17'-4 7/8"	7	4
		10'	GLCS-FS-4000-34 (S or AL)-83-10	Steel	20'	46	25 7/8	29 3/8	32 1/2	25 3/8	15 1/8	51 5/8	36'-0"	13'-2 7/8"	7	5
		12'	GLCS-FS-4000-34 (S or AL)-83-12	Steel	20'	46	25 7/8	29 3/8	32 1/2	25 3/8	15 1/8	51 5/8	36'-0"	15'-2 7/8"	7	5
	94'	14'	GLCS-FS-4000-34 (S or AL)-83-14	Steel	20'	46	25 7/8	29 3/8	32 1/2	25 3/8	15 1/8	51 5/8	36'-0"	17'-2 7/8"	7	5
		10'	GLCSLX-FS-4000-34 (S or AL)-94-10	Steel	30'	54	25 7/8	33 3/8	36 1/2	25 3/8	15 1/8	51 5/8	36'-0"	13'-6 7/8"	7	4
		12'	GLCSLX-FS-4000-34 (S or AL)-94-12	Steel	30'	54	25 7/8	33 3/8	36 1/2	25 3/8	15 1/8	51 5/8	36'-0"	15'-6 7/8"	7	4
	103'	14'	GLCSLX-FS-4000-34 (S or AL)-94-14	Steel	30'	54	25 7/8	33 3/8	36 1/2	25 3/8	15 1/8	51 5/8	36'-0"	17'-6 7/8"	7	4
		10'	GLCS-FS-4000-34 (S or AL)-103-10	Steel	20'	54	25 7/8	29 3/8	32 1/2	25 3/8	15 1/8	51 5/8	36'-0"	13'-2 7/8"	7	6
		10'	GLCSL-FS-4000-34 (S or AL)-103-10	Steel	25'	54	25 7/8	31 3/8	34 1/2	25 3/8	15 1/8	51 5/8	36'-0"	13'-4 7/8"	7	5
		12'	GLCS-FS-4000-34 (S or AL)-103-12	Steel	20'	54	25 7/8	29 3/8	32 1/2	25 3/8	15 1/8	51 5/8	36'-0"	15'-2 7/8"	7	6
		12'	GLCSL-FS-4000-34 (S or AL)-103-12	Steel	25'	54	25 7/8	31 3/8	34 1/2	25 3/8	15 1/8	51 5/8	36'-0"	15'-4 7/8"	7	5
		14'	GLCS-FS-4000-34 (S or AL)-103-14	Steel	20'	54	25 7/8	29 3/8	32 1/2	25 3/8	15 1/8	51 5/8	36'-0"	17'-2 7/8"	7	6
	124'	14'	GLCSL-FS-4000-34 (S or AL)-103-14	Steel	25'	54	25 7/8	31 3/8	34 1/2	25 3/8	15 1/8	51 5/8	36'-0"	17'-4 7/8"	7	5
		10'	GLCSLX-FS-4000-34 (S or AL)-124-10	Steel	30'	54	25 7/8	33 3/8	36 1/2	25 3/8	15 1/8	51 5/8	36'-0"	13'-6 7/8"	7	5
		12'	GLCSLX-FS-4000-34 (S or AL)-124-12	Steel	30'	54	25 7/8	33 3/8	36 1/2	25 3/8	15 1/8	51 5/8	36'-0"	15'-6 7/8"	7	5
	14'	GLCSLX-FS-4000-34 (S or AL)-124-14	Steel	30'	54	25 7/8	33 3/8	36 1/2	25 3/8	15 1/8	51 5/8	36'-0"	17'-6 7/8"	7	5	


*This column provides the total number of support assemblies based on the "L1" dimensions shown. Support assemblies are designed to AISC specifications and do not require bracing. If no movement of the support assembly is preferred, then bracing to the building steel is recommended (not included).

To Determine Hook Coverage: [Bridge Travel on Runway = Runway Length - (2xL8)] by [Hoist Trolley Travel on Bridge = Bridge Length - L3 - L6] (L6 allows for festoon stack-up).

Gorbel® Free Standing Work Station Bridge Crane Kits include: bridge, runways, the appropriate number of support assemblies, hoist trolley, end trucks, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel runway lengths greater than 63' and all aluminum systems), festoon stack-up section, splice joints and hanger brackets. Hoist and anchor bolts provided by others.

Dimensions are for reference only and are subject to change without notice.

STEEL CEILING MOUNTED WORK STATION BRIDGE CRANES ISOMETRIC VIEW

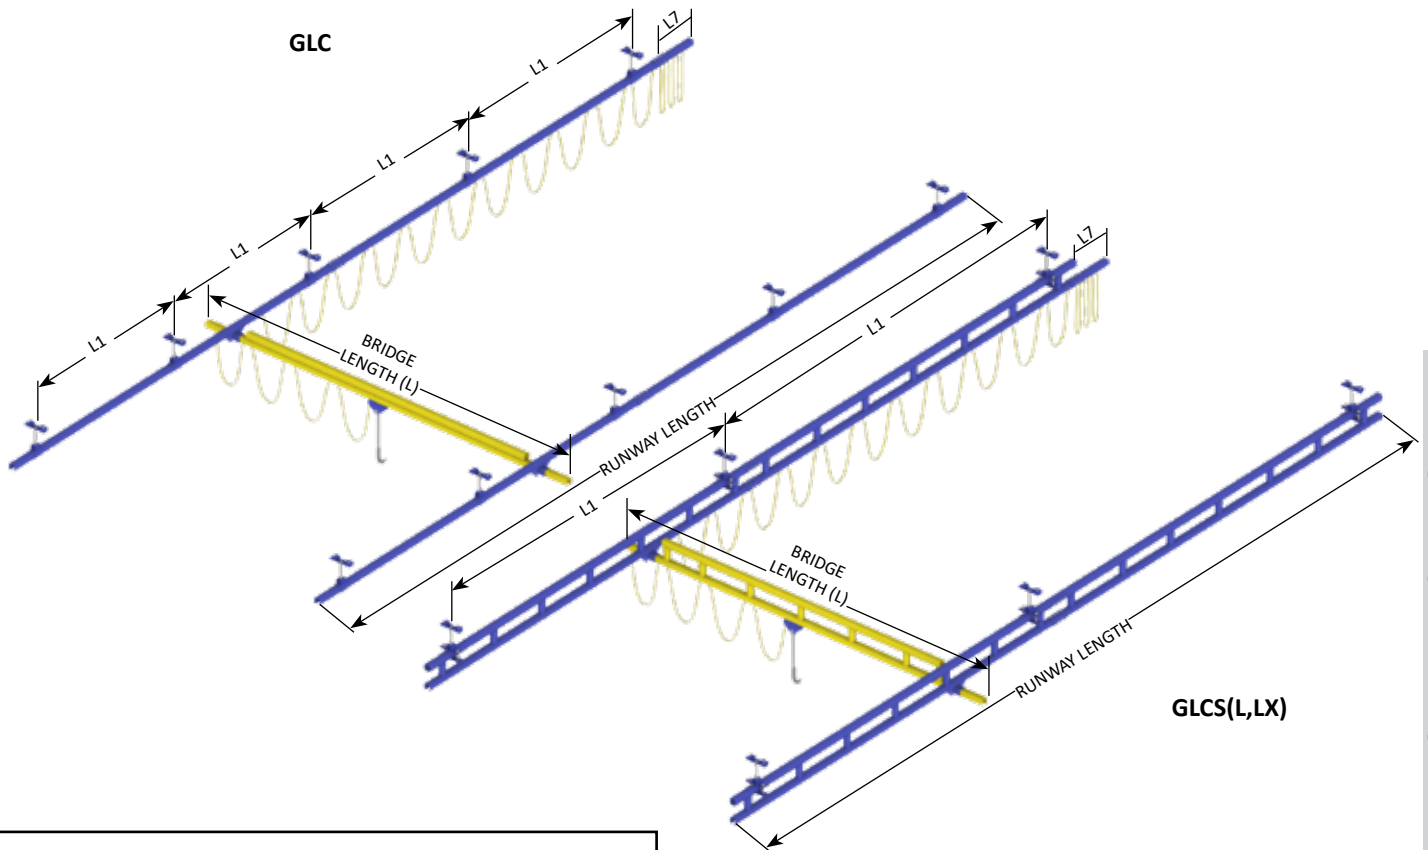

CEILING MOUNTED WORK
STATION BRIDGE CRANES

Model Number: _____

Capacity: _____ pounds

Bridge Length (L): _____ (OAL)

Runway Length: _____ (OAL)

L1: _____ Are the number of support assemblies provided sufficient?

(See "HANGERS" column on dimensional chart pages)

Type of hanger required:

- ☐ Standard hanger with up to 20 inch drop.
Support beam flange width _____ inches
- ☐ Flush mounted, parallel
Support beam flange width _____ inches
- ☐ Flush mounted, perpendicular
Support beam flange width _____ inches
- ☐ Special hangers


Note: Sway bracing is required on all systems except flush mounted systems. Sway bracing kits are available but are not included in the crane kit.

C: _____ inches (hoist by others)

Gorbel® Ceiling Mounted Bridge Cranes include: bridge, runways, hoist trolley, end trucks, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel runway lengths greater than 63 feet and all aluminum systems), festoon stack-up section, splice joints and hanger brackets. Additional hanger points or longer drops, in excess of 20 inches, can be provided at an additional cost (hoist and sway bracing by others). Sway bracing kits are available but are not included in the crane kit.

Dimension and design details subject to change without notice.

ALUMINUM CEILING MOUNTED WORK STATION BRIDGE CRANES ISOMETRIC VIEW

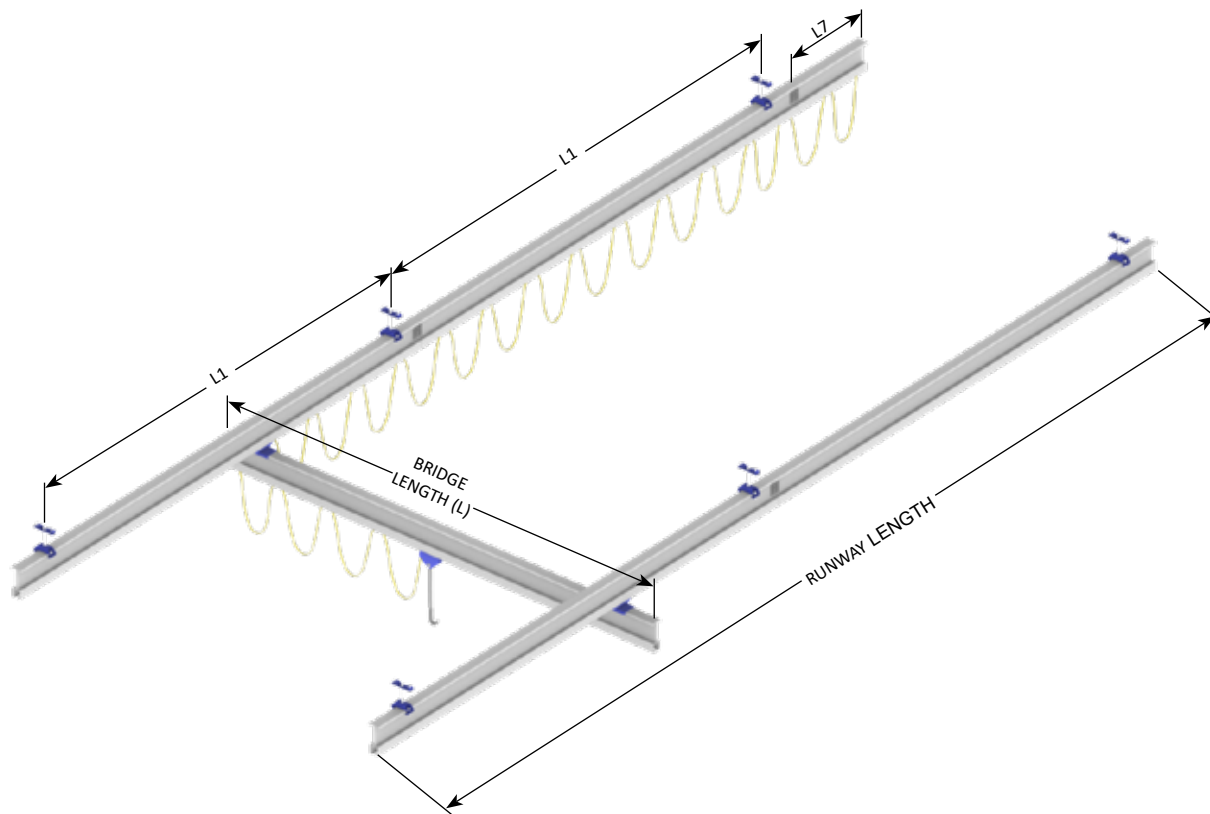

Model Number: _____

Capacity: _____ pounds

Bridge Length (L): _____ (OAL)

Runway Length: _____ (OAL)

L1: _____ Are the number of support assemblies provided sufficient?

(See "HANGERS" column on dimensional chart pages)

Type of hanger required:

- ☐ Standard hanger with up to 20 inch drop.
Support beam flange width _____ inches
- ☐ Flush mounted, parallel
Support beam flange width _____ inches
- ☐ Flush mounted, perpendicular
Support beam flange width _____ inches
- ☐ Special hangers

Note: Sway bracing is required on all systems except flush mounted systems. Sway bracing kits are available but are not included in the crane kit.

C: _____ inches (hoist by others)

Gorbel® Ceiling Mounted Bridge Cranes include: bridge, runways, hoist trolley, end trucks, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel runway lengths greater than 63 feet and all aluminum systems), festoon stack-up section, splice joints and hanger brackets. Additional hanger points or longer drops, in excess of 20 inches, can be provided at an additional cost (hoist and sway bracing by others). Sway bracing kits are available but are not included in the crane kit.

Dimension and design details subject to change without notice.

STEEL

CEILING MOUNTED WORK STATION BRIDGE CRANES

Model Number: _____

Capacity: _____ pounds

Bridge Length (L): _____ (OAL)

Runway Length: _____ (OAL)

L1: _____ Are the number of support assemblies provided sufficient?

(See "HANGERS" column on dimensional chart pages)


Type of hanger required:

- ☐ Standard hanger with up to 20 inch drop.
Support beam flange width _____ inches
- ☐ Flush mounted, parallel
Support beam flange width _____ inches
- ☐ Flush mounted, perpendicular
Support beam flange width _____ inches
- ☐ Special hangers


Note: Sway bracing is required on all systems except flush mounted systems. Sway bracing kits are available but are not included in the crane kit.

C: _____ inches (hoist by others)


STEEL TRACK BRIDGE ON STEEL RUNWAYS

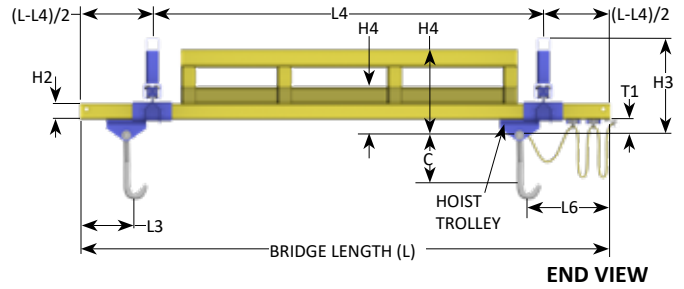

ALUMINUM TRACK BRIDGE ON STEEL RUNWAYS

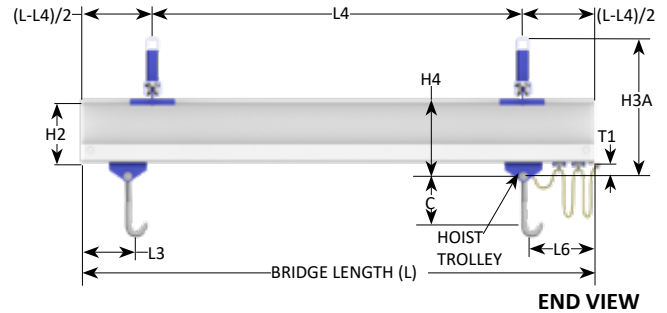


COPED ALUMIINUM TRACK BRIDGE ON STEEL RUNWAYS

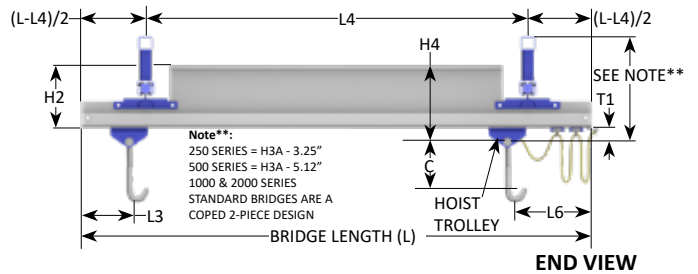


Gorbel® Ceiling Mounted Bridge Cranes include: bridge, runways, hoist trolley, end trucks, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel runway lengths greater than 63 feet and all aluminum systems), festoon stack-up section, splice joints and hanger brackets. Additional hanger points or longer drops, in excess of 20 inches, can be provided at an additional cost (hoist and sway bracing by others). Sway bracing kits are available but are not included in the crane kit.

Dimension and design details subject to change without notice.

GLC STEEL RUNWAY

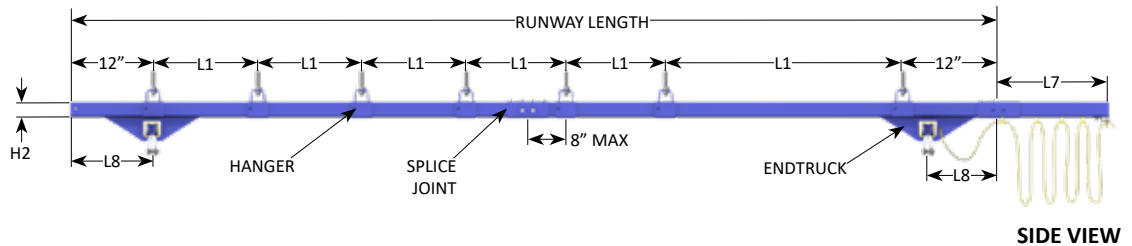

GLCS, GLCSL, GLCSLX STEEL RUNWAY

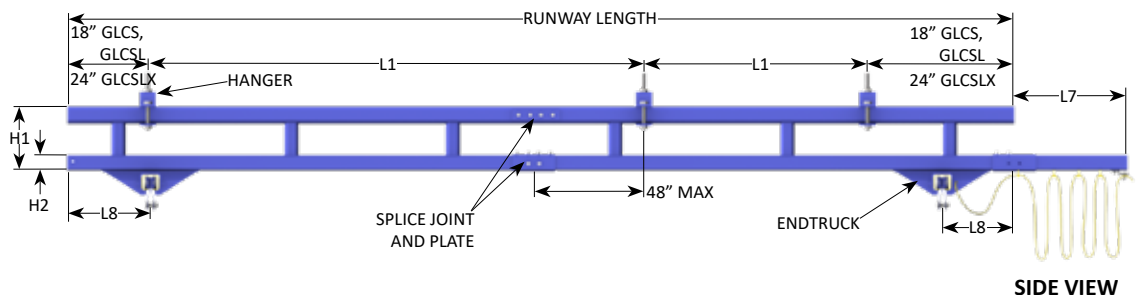

ALUMINUM CEILING MOUNTED WORK STATION BRIDGE CRANES

Model Number: _____

Capacity: _____ pounds

Bridge Length (L): _____ (OAL)

Runway Length: _____ (OAL)

L1: _____ Are the number of support assemblies provided sufficient?



(See "HANGERS" column on dimensional chart pages)

Type of hanger required:

- ☐ Standard hanger with up to 20 inch drop.
Support beam flange width _____ inches
- ☐ Flush mounted, parallel
Support beam flange width _____ inches
- ☐ Flush mounted, perpendicular
Support beam flange width _____ inches
- ☐ Special hangers

Note: Sway bracing is required on all systems except flush mounted systems. Sway bracing kits are available but are not included in the crane kit.


C: _____ inches (hoist by others)

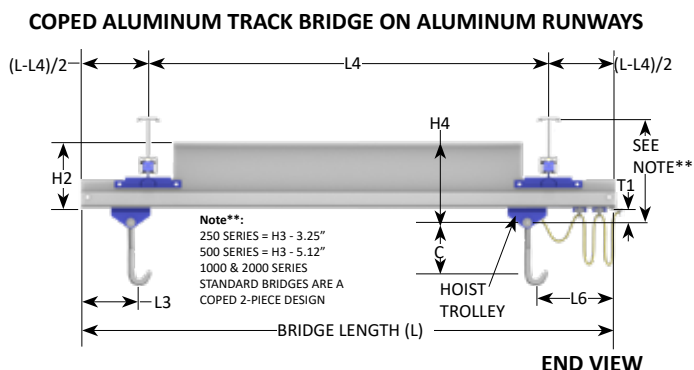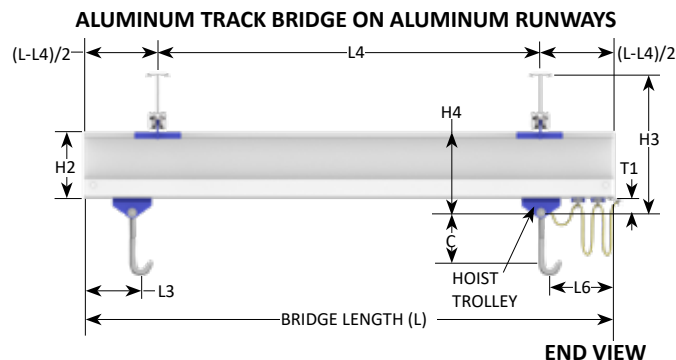

Gorbel® Ceiling Mounted Bridge Cranes include: bridge, runways, hoist trolley, end trucks, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel runway lengths greater than 63 feet and all aluminum systems), festoon stack-up section, splice joints and hanger brackets. Additional hanger points or longer drops, in excess of 20 inches, can be provided at an additional cost (hoist and sway bracing by others). Sway bracing kits are available but are not included in the crane kit.

Dimension and design details subject to change without notice.

ALUMINUM RUNWAY

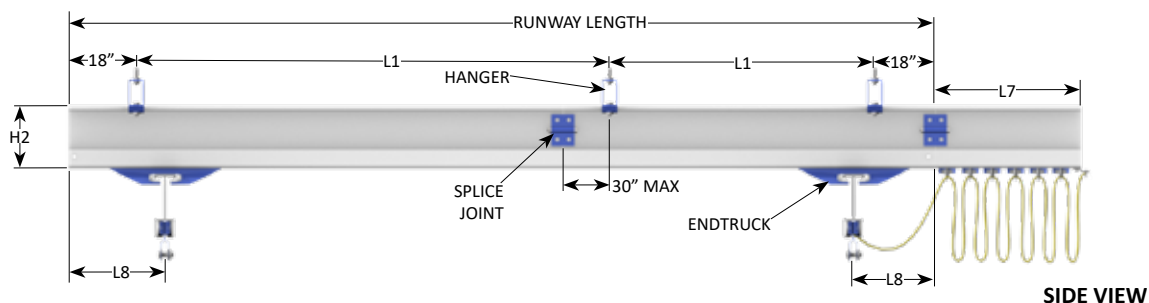

CEILING MOUNTED WORK STATION BRIDGE CRANES

BRIDGE LENGTH (L)	RUNWAY LENGTH	MODEL NUMBER	TRACK MATL.	BRIDGE									RUNWAY					
				MAX L1	T1 in	L3 in	L4 ft	L6 in	H3 in	H3A in	H4 in	H2 in	H1 in	L7 in	L8 in	HANGERS (See Note)*		
8'	11'-6"	GLC250-8 (S or AL)-11.5	Steel	6'	1 1/2	5 1/16	6'-6"	7	5 11/16	13 7/16	4 3/4	1 3/4	-	9	10 3/4	6 @ 379#		
		GLCS250-8 (S or AL)-11.5	Steel	20'	1 1/2	5 1/16	6'-6"	7	12 15/16	20 11/16	4 3/4	1 3/4	9	9	10 3/4	4 @ 462#		
		AL250-8-11.5	Alum	20'	2 11/16	7 3/16	6'-6"	13 7/8	19 15/16	-	10 11/16	8	-	9	13 1/4	4 @ 443#		
	23'	GLC250-8 (S or AL)-23	Steel	6'	1 1/2	5 1/16	6'-6"	7	5 11/16	13 7/16	4 3/4	1 3/4	-	9	10 3/4	10 @ 379#		
		GLCS250-8 (S or AL)-23	Steel	20'	1 1/2	5 1/16	6'-6"	7	12 15/16	20 11/16	4 3/4	1 3/4	9	9	10 3/4	4 @ 462#		
		AL250-8-23	Alum	20'	2 11/16	7 3/16	6'-6"	13 7/8	19 15/16	-	10 11/16	8	-	14	13 1/4	4 @ 443#		
	28'	GLCSL250-8 (S or AL)-28	Steel	25'	1 1/2	5 1/16	6'-6"	7	14 15/16	22 11/16	4 3/4	1 3/4	11	9	10 3/4	4 @ 574#		
		33'	GLC250-8 (S or AL)-33	Steel	6'	1 1/2	5 1/16	6'-6"	7	5 11/16	13 7/16	4 3/4	1 3/4	-	9	10 3/4	14 @ 379#	
			GLCS250-8 (S or AL)-33	Steel	20'	1 1/2	5 1/16	6'-6"	7	12 15/16	20 11/16	4 3/4	1 3/4	9	9	10 3/4	6 @ 462#	
	AL250-8-33		Alum	20'	2 11/16	7 3/16	6'-6"	13 7/8	19 15/16	-	10 11/16	8	-	20	13 1/4	6 @ 443#		
	43'	GLC250-8 (S or AL)-43	Steel	6'	1 1/2	5 1/16	6'-6"	7	5 11/16	13 7/16	4 3/4	1 3/4	-	13	10 3/4	18 @ 379#		
		GLCS250-8 (S or AL)-43	Steel	20'	1 1/2	5 1/16	6'-6"	7	12 15/16	20 11/16	4 3/4	1 3/4	9	13	10 3/4	6 @ 462#		
		AL250-8-43	Alum	20'	2 11/16	7 3/16	6'-6"	13 7/8	19 15/16	-	10 11/16	8	-	27	13 1/4	6 @ 443#		
	53'	GLC250-8 (S or AL)-53	Steel	6'	1 1/2	5 1/16	6'-6"	7	5 11/16	13 7/16	4 3/4	1 3/4	-	13	10 3/4	22 @ 379#		
		GLCS250-8 (S or AL)-53	Steel	20'	1 1/2	5 1/16	6'-6"	7	12 15/16	20 11/16	4 3/4	1 3/4	9	13	10 3/4	8 @ 462#		
		AL250-8-53	Alum	20'	2 11/16	7 3/16	6'-6"	13 7/8	19 15/16	-	10 11/16	8	-	30	13 1/4	8 @ 443#		
	GLCSL250-8 (S or AL)-53	Steel	25'	1 1/2	5 1/16	6'-6"	7	14 15/16	22 11/16	4 3/4	1 3/4	11	13	10 3/4	6 @ 574#			
		63'	GLC250-8 (S or AL)-63	Steel	6'	1 1/2	5 1/16	6'-6"	7	5 11/16	13 7/16	4 3/4	1 3/4	-	19	10 3/4	26 @ 379#	
			GLCS250-8 (S or AL)-63	Steel	20'	1 1/2	5 1/16	6'-6"	7	12 15/16	20 11/16	4 3/4	1 3/4	9	19	10 3/4	8 @ 462#	
	AL250-8-63		Alum	20'	2 11/16	7 3/16	6'-6"	13 7/8	19 15/16	-	10 11/16	8	-	37	13 1/4	8 @ 443#		
	78'	GLCSL250-8 (S or AL)-78	Steel	25'	1 1/2	5 1/16	6'-6"	11 3/4	14 15/16	22 11/16	4 3/4	1 3/4	11	54	10 3/4	8 @ 574#		
		83'	GLC250-8 (S or AL)-83	Steel	6'	1 1/2	5 1/16	6'-6"	11 3/4	5 11/16	13 7/16	4 3/4	1 3/4	-	54	10 3/4	34 @ 579#	
			GLCS250-8 (S or AL)-83	Steel	20'	1 1/2	5 1/16	6'-6"	11 3/4	12 15/16	20 11/16	4 3/4	1 3/4	9	54	10 3/4	10 @ 462#	
	AL250-8-83		Alum	20'	2 11/16	7 3/16	6'-6"	13 7/8	19 15/16	-	10 11/16	8	-	47	13 1/4	10 @ 443#		
	103'	GLC250-8 (S or AL)-103	Steel	6'	1 1/2	5 1/16	6'-6"	11 3/4	5 11/16	13 7/16	4 3/4	1 3/4	-	54	10 3/4	42 @ 379#		
		GLCS250-8 (S or AL)-103	Steel	20'	1 1/2	5 1/16	6'-6"	11 3/4	12 15/16	20 11/16	4 3/4	1 3/4	9	54	10 3/4	12 @ 462#		
		AL250-8-103	Alum	20'	2 11/16	7 3/16	6'-6"	13 7/8	19 15/16	-	10 11/16	8	-	53	13 1/4	12 @ 443#		
	GLCSL250-8 (S or AL)-103	Steel	25'	1 1/2	5 1/16	6'-6"	11 3/4	14 15/16	22 11/16	4 3/4	1 3/4	11	54	10 3/4	10 @ 574#			
10'	11'-6"	GLC250-10 (S or AL)-11.5	Steel	6'	1 1/2	5 1/16	8'-0"	8 1/4	5 11/16	13 7/16	4 3/4	1 3/4	-	9	10 3/4	6 @ 382#		
		GLCS250-10 (S or AL)-11.5	Steel	20'	1 1/2	5 1/16	8'-0"	8 1/4	12 15/16	20 11/16	4 3/4	1 3/4	9	9	10 3/4	4 @ 465#		
		AL250-10-11.5	Alum	20'	2 11/16	7 3/16	8'-0"	17 1/4	19 15/16	-	10 11/16	8	-	9	13 1/4	4 @ 446#		
	23'	GLC250-10 (S or AL)-23	Steel	6'	1 1/2	5 1/16	8'-0"	8 1/4	5 11/16	13 7/16	4 3/4	1 3/4	-	9	10 3/4	10 @ 382#		
		GLCS250-10 (S or AL)-23	Steel	20'	1 1/2	5 1/16	8'-0"	8 1/4	12 15/16	20 11/16	4 3/4	1 3/4	9	9	10 3/4	4 @ 465#		
		AL250-10-23	Alum	20'	2 11/16	7 3/16	8'-0"	17 1/4	19 15/16	-	10 11/16	8	-	14	13 1/4	4 @ 446#		
	28'	GLCSL250-10 (S or AL)-28	Steel	25'	1 1/2	5 1/16	8'-0"	8 1/4	14 15/16	22 11/16	4 3/4	1 3/4	11	9	10 3/4	4 @ 578#		
		33'	GLC250-10 (S or AL)-33	Steel	6'	1 1/2	5 1/16	8'-0"	8 1/4	5 11/16	13 7/16	4 3/4	1 3/4	-	9	10 3/4	14 @ 382#	
			GLCS250-10 (S or AL)-33	Steel	20'	1 1/2	5 1/16	8'-0"	8 1/4	12 15/16	20 11/16	4 3/4	1 3/4	9	9	10 3/4	6 @ 465#	
	AL250-10-33		Alum	20'	2 11/16	7 3/16	8'-0"	17 1/4	19 15/16	-	10 11/16	8	-	20	13 1/4	6 @ 446#		
	43'	GLC250-10 (S or AL)-43	Steel	6'	1 1/2	5 1/16	8'-0"	8 1/4	5 11/16	13 7/16	4 3/4	1 3/4	-	13	10 3/4	18 @ 382#		
		GLCS250-10 (S or AL)-43	Steel	20'	1 1/2	5 1/16	8'-0"	8 1/4	12 15/16	20 11/16	4 3/4	1 3/4	9	13	10 3/4	6 @ 465#		
		AL250-10-43	Alum	20'	2 11/16	7 3/16	8'-0"	17 1/4	19 15/16	-	10 11/16	8	-	27	13 1/4	6 @ 446#		
	53'	GLC250-10 (S or AL)-53	Steel	6'	1 1/2	5 1/16	8'-0"	8 1/4	5 11/16	13 7/16	4 3/4	1 3/4	-	13	10 3/4	22 @ 382#		
		GLCS250-10 (S or AL)-53	Steel	20'	1 1/2	5 1/16	8'-0"	8 1/4	12 15/16	20 11/16	4 3/4	1 3/4	9	13	10 3/4	8 @ 465#		
		AL250-10-53	Alum	20'	2 11/16	7 3/16	8'-0"	17 1/4	19 15/16	-	10 11/16	8	-	30	13 1/4	8 @ 446#		
	GLCSL250-10 (S or AL)-53	Steel	25'	1 1/2	5 1/16	8'-0"	8 1/4	14 15/16	22 11/16	4 3/4	1 3/4	11	13	10 3/4	6 @ 578#			
		63'	GLC250-10 (S or AL)-63	Steel	6'	1 1/2	5 1/16	8'-0"	8 1/4	5 11/16	13 7/16	4 3/4	1 3/4	-	19	10 3/4	26 @ 382#	
			GLCS250-10 (S or AL)-63	Steel	20'	1 1/2	5 1/16	8'-0"	8 1/4	12 15/16	20 11/16	4 3/4	1 3/4	9	19	10 3/4	8 @ 465#	
	AL250-10-63		Alum	20'	2 11/16	7 3/16	8'-0"	17 1/4	19 15/16	-	10 11/16	8	-	37	13 1/4	8 @ 446#		
	78'	GLCSL250-10 (S or AL)-78	Steel	25'	1 1/2	5 1/16	8'-0"	15 1/8	14 15/16	22 11/16	4 3/4	1 3/4	11	54	10 3/4	8 @ 578#		
		83'	GLC250-10 (S or AL)-83	Steel	6'	1 1/2	5 1/16	8'-0"	15 1/8	5 11/16	13 7/16	4 3/4	1 3/4	-	54	10 3/4	34 @ 382#	
			GLCS250-10 (S or AL)-83	Steel	20'	1 1/2	5 1/16	8'-0"	15 1/8	12 15/16	20 11/16	4 3/4	1 3/4	9	54	10 3/4	10 @ 465#	
	AL250-10-83		Alum	20'	2 11/16	7 3/16	8'-0"	17 1/4	19 15/16	-	10 11/16	8	-	47	13 1/4	10 @ 446#		
	103'	GLC250-10 (S or AL)-103	Steel	6'	1 1/2	5 1/16	8'-0"	15 1/8	5 11/16	13 7/16	4 3/4	1 3/4	-	54	10 3/4	42 @ 382#		
		GLCS250-10 (S or AL)-103	Steel	20'	1 1/2	5 1/16	8'-0"	15 1/8	12 15/16	20 11/16	4 3/4	1 3/4	9	54	10 3/4	12 @ 465#		
		AL250-10-103	Alum	20'	2 11/16	7 3/16	8'-0"	17 1/4	19 15/16	-	10 11/16	8	-	53	13 1/4	12 @ 446#		
	GLCSL250-10 (S or AL)-103	Steel	25'	1 1/2	5 1/16	8'-0"	15 1/8	14 15/16	22 11/16	4 3/4	1 3/4	11	54	10 3/4	10 @ 578#			

*This column provides the total number of support hangers with the corresponding vertical load applied by each support hanger (in pounds) based on the "L1" dimensions shown. Up to a 20" hanger drop will be provided by Gorbel. Additional hanger points or longer drops can be provided at an additional charge.

Gorbel® Ceiling Mounted Work Station Bridge Crane Kits include: bridge, runways, hoist trolley, end trucks, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel runway lengths greater than 63' and all aluminum systems), festoon stack-up section, splice joints and hanger brackets. Sway bracing is required on all systems except flush mounted systems (by others). Sway bracing kits are available but not included in the crane kit. Hoist provided by others.

Dimensions are for reference only and are subject to change without notice.

250# CAPACITY

CEILING MOUNTED WORK STATION BRIDGE CRANES

BRIDGE LENGTH (L)	RUNWAY LENGTH	MODEL NUMBER	TRACK MATL.	BRIDGE								RUNWAY				
				MAX L1	T1 in	L3 in	L4 ft	L6 in	H3 in	H3A in	H4 in	H2 in	H1 in	L7 in	L8 in	HANGERS (See Note)*
15'	23'	GLC250-15 (S or AL)-23	Steel	6'	1 1/2	5 1/16	13'-0"	10 3/4	5 11/16	13 7/16	10 1/2	13/4	-	9	10 3/4	10 @ 398#
		GLCS250-15 (S or AL)-23	Steel	20'	1 1/2	5 1/16	13'-0"	10 3/4	12 15/16	20 11/16	10 1/2	13/4	9	9	10 3/4	4 @ 481#
		AL250-15-23	Alum	20'	2 11/16	7 3/16	13'-0"	23 15/16	19 15/16	-	10 11/16	8	-	14	13 1/4	4 @ 456#
	28'	GLCSL250-15 (S or AL)-28	Steel	25'	1 1/2	5 1/16	13'-0"	10 3/4	14 15/16	22 11/16	10 1/2	13/4	11	9	10 3/4	4 @ 593#
		GLC250-15 (S or AL)-33	Steel	6'	1 1/2	5 1/16	13'-0"	10 3/4	5 11/16	13 7/16	10 1/2	13/4	-	9	10 3/4	14 @ 398#
		GLCS250-15 (S or AL)-33	Steel	20'	1 1/2	5 1/16	13'-0"	10 3/4	12 15/16	20 11/16	10 1/2	13/4	9	9	10 3/4	6 @ 481#
		AL250-15-33	Alum	20'	2 11/16	7 3/16	13'-0"	23 15/16	19 15/16	-	10 11/16	8	-	20	13 1/4	6 @ 456#
	33'	GLC250-15 (S or AL)-43	Steel	6'	1 1/2	5 1/16	13'-0"	10 3/4	5 11/16	13 7/16	10 1/2	13/4	-	13	10 3/4	18 @ 396#
		GLCS250-15 (S or AL)-43	Steel	20'	1 1/2	5 1/16	13'-0"	10 3/4	12 15/16	20 11/16	10 1/2	13/4	9	13	10 3/4	6 @ 481#
		AL250-15-43	Alum	20'	2 11/16	7 3/16	13'-0"	23 15/16	19 15/16	-	10 11/16	8	-	27	13 1/4	6 @ 456#
	53'	GLC250-15 (S or AL)-53	Steel	6'	1 1/2	5 1/16	13'-0"	10 3/4	5 11/16	13 7/16	10 1/2	13/4	-	13	10 3/4	22 @ 398#
		GLCS250-15 (S or AL)-53	Steel	20'	1 1/2	5 1/16	13'-0"	10 3/4	12 15/16	20 11/16	10 1/2	13/4	9	13	10 3/4	8 @ 481#
		AL250-15-53	Alum	20'	2 11/16	7 3/16	13'-0"	23 15/16	19 15/16	-	10 11/16	8	-	30	13 1/4	8 @ 456#
		GLCSL250-15 (S or AL)-53	Steel	25'	1 1/2	5 1/16	13'-0"	10 3/4	14 15/16	22 11/16	10 1/2	13/4	11	13	10 3/4	6 @ 593#
	63'	GLC250-15 (S or AL)-63	Steel	6'	1 1/2	5 1/16	13'-0"	10 3/4	5 11/16	13 7/16	10 1/2	13/4	-	19	10 3/4	26 @ 398#
		GLCS250-15 (S or AL)-63	Steel	20'	1 1/2	5 1/16	13'-0"	10 3/4	12 15/16	20 11/16	10 1/2	13/4	9	19	10 3/4	8 @ 481#
		AL250-15-63	Alum	20'	2 11/16	7 3/16	13'-0"	23 15/16	19 15/16	-	10 11/16	8	-	37	13 1/4	8 @ 456#
	78'	GLCSL250-15 (S or AL)-78	Steel	25'	1 1/2	5 1/16	13'-0"	21 13/16	14 15/16	22 11/16	10 1/2	13/4	11	54	10 3/4	8 @ 593#
		GLC250-15 (S or AL)-83	Steel	6'	1 1/2	5 1/16	13'-0"	21 13/16	5 11/16	13 7/16	10 1/2	13/4	-	54	10 3/4	34 @ 398#
		GLCS250-15 (S or AL)-83	Steel	20'	1 1/2	5 1/16	13'-0"	21 13/16	12 15/16	20 11/16	10 1/2	13/4	9	54	10 3/4	10 @ 481#
	103'	AL250-15-83	Alum	20'	2 11/16	7 3/16	13'-0"	23 15/16	19 15/16	-	10 11/16	8	-	47	13 1/4	10 @ 456#
		GLC250-15 (S or AL)-103	Steel	6'	1 1/2	5 1/16	13'-0"	21 13/16	5 11/16	13 7/16	10 1/2	13/4	-	54	10 3/4	42 @ 398#
		GLCS250-15 (S or AL)-103	Steel	20'	1 1/2	5 1/16	13'-0"	21 13/16	12 15/16	20 11/16	10 1/2	13/4	9	54	10 3/4	12 @ 481#
		AL250-15-103	Alum	20'	2 11/16	7 3/16	13'-0"	23 15/16	19 15/16	-	10 11/16	8	-	53	13 1/4	12 @ 456#
	103'	GLCSL250-15 (S or AL)-103	Steel	25'	1 1/2	5 1/16	13'-0"	21 13/16	14 15/16	22 11/16	10 1/2	13/4	11	54	10 3/4	10 @ 593#
20'	23'	GLC250-20 (S or AL)-23	Steel	6'	1 1/2	5 1/16	18'-0"	12	5 11/16	13 7/16	10 1/2	13/4	-	9	10 3/4	10 @ 410#
		GLCS250-20 (S or AL)-23	Steel	20'	1 1/2	5 1/16	18'-0"	12	12 15/16	20 11/16	10 1/2	13/4	9	9	10 3/4	4 @ 493#
		AL250-20-23	Alum	20'	2 11/16	7 3/16	18'-0"	27 5/16	19 15/16	-	10 11/16	8	-	14	13 1/4	4 @ 466#
	28'	GLCSL250-20 (S or AL)-28	Steel	25'	1 1/2	5 1/16	18'-0"	12	14 15/16	22 11/16	10 1/2	13/4	11	9	10 3/4	4 @ 606#
		GLC250-20 (S or AL)-33	Steel	6'	1 1/2	5 1/16	18'-0"	12	5 11/16	13 7/16	10 1/2	13/4	-	9	10 3/4	14 @ 410#
		GLCS250-20 (S or AL)-33	Steel	20'	1 1/2	5 1/16	18'-0"	12	12 15/16	20 11/16	10 1/2	13/4	9	9	10 3/4	6 @ 493#
		AL250-20-33	Alum	20'	2 11/16	7 3/16	18'-0"	27 5/16	19 15/16	-	10 11/16	8	-	20	13 1/4	6 @ 466#
	43'	GLC250-20 (S or AL)-43	Steel	6'	1 1/2	5 1/16	18'-0"	12	5 11/16	13 7/16	10 1/2	13/4	-	13	10 3/4	18 @ 410#
		GLCS250-20 (S or AL)-43	Steel	20'	1 1/2	5 1/16	18'-0"	12	12 15/16	20 11/16	10 1/2	13/4	9	13	10 3/4	6 @ 493#
		AL250-20-43	Alum	20'	2 11/16	7 3/16	18'-0"	27 5/16	19 15/16	-	10 11/16	8	-	27	13 1/4	6 @ 466#
	53'	GLC250-20 (S or AL)-53	Steel	6'	1 1/2	5 1/16	18'-0"	12	5 11/16	13 7/16	10 1/2	13/4	-	13	10 3/4	22 @ 410#
		GLCS250-20 (S or AL)-53	Steel	20'	1 1/2	5 1/16	18'-0"	12	12 15/16	20 11/16	10 1/2	13/4	9	13	10 3/4	8 @ 493#
		AL250-20-53	Alum	20'	2 11/16	7 3/16	18'-0"	27 5/16	19 15/16	-	10 11/16	8	-	30	13 1/4	8 @ 466#
		GLCSL250-20 (S or AL)-53	Steel	25'	1 1/2	5 1/16	18'-0"	12	14 15/16	22 11/16	10 1/2	13/4	11	13	10 3/4	6 @ 606#
	63'	GLC250-20 (S or AL)-63	Steel	6'	1 1/2	5 1/16	18'-0"	12	5 11/16	13 7/16	10 1/2	13/4	-	19	10 3/4	26 @ 410#
		GLCS250-20 (S or AL)-63	Steel	20'	1 1/2	5 1/16	18'-0"	12	12 15/16	20 11/16	10 1/2	13/4	9	19	10 3/4	8 @ 493#
		AL250-20-63	Alum	20'	2 11/16	7 3/16	18'-0"	27 5/16	19 15/16	-	10 11/16	8	-	37	13 1/4	8 @ 466#
	78'	GLCSL250-20 (S or AL)-78	Steel	25'	1 1/2	5 1/16	18'-0"	25 3/16	14 15/16	22 11/16	10 1/2	13/4	11	54	10 3/4	8 @ 606#
		GLC250-20 (S or AL)-83	Steel	6'	1 1/2	5 1/16	18'-0"	25 3/16	5 11/16	13 7/16	10 1/2	13/4	-	54	10 3/4	34 @ 410#
		GLCS250-20 (S or AL)-83	Steel	20'	1 1/2	5 1/16	18'-0"	25 3/16	12 15/16	20 11/16	10 1/2	13/4	9	54	10 3/4	10 @ 493#
	103'	AL250-20-83	Alum	20'	2 11/16	7 3/16	18'-0"	27 5/16	19 15/16	-	10 11/16	8	-	47	13 1/4	10 @ 466#
		GLC250-20 (S or AL)-103	Steel	6'	1 1/2	5 1/16	18'-0"	25 3/16	5 11/16	13 7/16	10 1/2	13/4	-	54	10 3/4	42 @ 410#
		GLCS250-20 (S or AL)-103	Steel	20'	1 1/2	5 1/16	18'-0"	25 3/16	12 15/16	20 11/16	10 1/2	13/4	9	54	10 3/4	12 @ 493#
		AL250-20-103	Alum	20'	2 11/16	7 3/16	18'-0"	27 5/16	19 15/16	-	10 11/16	8	-	53	13 1/4	12 @ 466#
	103'	GLCSL250-20 (S or AL)-103	Steel	25'	1 1/2	5 1/16	18'-0"	25 3/16	14 15/16	22 11/16	10 1/2	13/4	11	54	10 3/4	10 @ 606#

*This column provides the total number of support hangers with the corresponding vertical load applied by each support hanger (in pounds) based on the "L1" dimensions shown. Up to a 20" hanger drop will be provided by Gorbel. Additional hanger points or longer drops can be provided at an additional charge.

Gorbel® Ceiling Mounted Work Station Bridge Crane Kits include: bridge, runways, hoist trolley, end trucks, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel runway lengths greater than 63' and all aluminum systems), festoon stack-up section, splice joints and hanger brackets. Sway bracing is required on all systems except flush mounted systems (by others). Sway bracing kits are available but not included in the crane kit. Hoist provided by others.

Dimensions are for reference only and are subject to change without notice.

CEILING MOUNTED WORK STATION BRIDGE CRANES

BRIDGE LENGTH (L)	RUNWAY LENGTH	MODEL NUMBER	TRACK MATL.	BRIDGE								RUNWAY				
				MAX L1	T1 in	L3 in	L4 ft	L6 in	H3 in	H3A in	H4 in	H2 in	H1 in	L7 in	L8 in	HANGERS (See Note)*
23'	23'	GLC250-23 (S or AL)-23	Steel	6'	1 1/2	5 1/16	21'-0"	13 1/4	5 11/16	18 1/16	10 1/2	1 3/4	-	9	10 3/4	10 @ 417#
		GLCS250-23 (S or AL)-23	Steel	20'	1 1/2	5 1/16	21'-0"	13 1/4	12 15/16	25 5/16	10 1/2	1 3/4	9	9	10 3/4	4 @ 500#
		AL250-23-23	Alum	20'	2 11/16	7 3/16	20'-0"	30 5/8	19 15/16	-	10 11/16	8	-	14	13 1/4	4 @ 470#
	28'	GLCSL250-23 (S or AL)-28	Steel	25'	1 1/2	5 1/16	21'-0"	13 1/4	14 15/16	27 5/16	10 1/2	1 3/4	11	9	10 3/4	4 @ 613#
		GLC250-23 (S or AL)-33	Steel	6'	1 1/2	5 1/16	21'-0"	13 1/4	5 11/16	18 1/16	10 1/2	1 3/4	-	9	10 3/4	14 @ 417#
		GLCS250-23 (S or AL)-33	Steel	20'	1 1/2	5 1/16	21'-0"	13 1/4	12 15/16	25 5/16	10 1/2	1 3/4	9	9	10 3/4	6 @ 500#
		AL250-23-33	Alum	20'	2 11/16	7 3/16	20'-0"	30 5/8	19 15/16	-	10 11/16	8	-	20	13 1/4	6 @ 470#
	43'	GLC250-23 (S or AL)-43	Steel	6'	1 1/2	5 1/16	21'-0"	13 1/4	5 11/16	18 1/16	10 1/2	1 3/4	-	13	10 3/4	18 @ 417#
		GLCS250-23 (S or AL)-43	Steel	20'	1 1/2	5 1/16	21'-0"	13 1/4	12 15/16	25 5/16	10 1/2	1 3/4	9	13	10 3/4	6 @ 500#
		AL250-23-43	Alum	20'	2 11/16	7 3/16	20'-0"	30 5/8	19 15/16	-	10 11/16	8	-	27	13 1/4	6 @ 470#
	53'	GLC250-23 (S or AL)-53	Steel	6'	1 1/2	5 1/16	21'-0"	13 1/4	5 11/16	18 1/16	10 1/2	1 3/4	-	13	10 3/4	22 @ 417#
		GLCS250-23 (S or AL)-53	Steel	20'	1 1/2	5 1/16	21'-0"	13 1/4	12 15/16	25 5/16	10 1/2	1 3/4	9	13	10 3/4	8 @ 500#
		AL250-23-53	Alum	20'	2 11/16	7 3/16	20'-0"	30 5/8	19 15/16	-	10 11/16	8	-	30	13 1/4	8 @ 470#
	63'	GLCSL250-23 (S or AL)-53	Steel	25'	1 1/2	5 1/16	21'-0"	13 1/4	14 15/16	27 5/16	10 1/2	1 3/4	11	13	10 3/4	6 @ 613#
		GLC250-23 (S or AL)-63	Steel	6'	1 1/2	5 1/16	21'-0"	13 1/4	5 11/16	18 1/16	10 1/2	1 3/4	-	19	10 3/4	26 @ 417#
		GLCS250-23 (S or AL)-63	Steel	20'	1 1/2	5 1/16	21'-0"	13 1/4	12 15/16	25 5/16	10 1/2	1 3/4	9	19	10 3/4	8 @ 500#
		AL250-23-63	Alum	20'	2 11/16	7 3/16	20'-0"	30 5/8	19 15/16	-	10 11/16	8	-	37	13 1/4	8 @ 470#
	78'	GLCSL250-23 (S or AL)-78	Steel	25'	1 1/2	5 1/16	21'-0"	28 1/2	14 15/16	27 5/16	10 1/2	1 3/4	11	54	10 3/4	8 @ 613#
		GLC250-23 (S or AL)-83	Steel	6'	1 1/2	5 1/16	21'-0"	28 1/2	5 11/16	18 1/16	10 1/2	1 3/4	-	54	10 3/4	34 @ 417#
		GLCS250-23 (S or AL)-83	Steel	20'	1 1/2	5 1/16	21'-0"	28 1/2	12 15/16	25 5/16	10 1/2	1 3/4	9	54	10 3/4	10 @ 500#
	103'	AL250-23-83	Alum	20'	2 11/16	7 3/16	20'-0"	30 5/8	19 15/16	-	10 11/16	8	-	47	13 1/4	10 @ 470#
		GLC250-23 (S or AL)-103	Steel	6'	1 1/2	5 1/16	21'-0"	28 1/2	5 11/16	18 1/16	10 1/2	1 3/4	-	54	10 3/4	42 @ 417#
		GLCS250-23 (S or AL)-103	Steel	20'	1 1/2	5 1/16	21'-0"	28 1/2	12 15/16	25 5/16	10 1/2	1 3/4	9	54	10 3/4	12 @ 500#
		AL250-23-103	Alum	20'	2 11/16	7 3/16	20'-0"	30 5/8	19 15/16	-	10 11/16	8	-	53	13 1/4	12 @ 470#
		GLCSL250-23 (S or AL)-103	Steel	25'	1 1/2	5 1/16	21'-0"	28 1/2	14 15/16	27 5/16	10 1/2	1 3/4	11	54	10 3/4	10 @ 613#
28'	23'	GLC250-28 (S or AL)-23	Steel	6'	1 1/2	5 1/16	25'-0"	15 3/4	8 1/16	18 1/16	12 1/2	1 3/4	-	9	21 3/4	10 @ 471#
		GLCS250-28 (S or AL)-23	Steel	20'	1 1/2	5 1/16	25'-0"	15 3/4	15 5/16	25 5/16	12 1/2	1 3/4	9	9	21 3/4	4 @ 554#
		AL250-28-23	Alum	20'	2 11/16	7 3/16	25'-0"	37 3/8	24 3/8	-	12 11/16	10	-	14	23 3/8	4 @ 489#
	28'	GLCSL250-28 (S or AL)-28	Steel	25'	1 1/2	5 1/16	25'-0"	15 3/4	17 5/16	27 5/16	12 1/2	1 3/4	11	9	21 3/4	4 @ 667#
		GLC250-28 (S or AL)-33	Steel	6'	1 1/2	5 1/16	25'-0"	15 3/4	8 1/16	18 1/16	12 1/2	1 3/4	-	9	21 3/4	14 @ 471#
		GLCS250-28 (S or AL)-33	Steel	20'	1 1/2	5 1/16	25'-0"	15 3/4	15 5/16	25 5/16	12 1/2	1 3/4	9	9	21 3/4	6 @ 554#
		AL250-28-33	Alum	20'	2 11/16	7 3/16	25'-0"	37 3/8	24 3/8	-	12 11/16	10	-	20	23 3/8	6 @ 489#
	43'	GLC250-28 (S or AL)-43	Steel	6'	1 1/2	5 1/16	25'-0"	15 3/4	8 1/16	18 1/16	12 1/2	1 3/4	-	13	21 3/4	18 @ 471#
		GLCS250-28 (S or AL)-43	Steel	20'	1 1/2	5 1/16	25'-0"	15 3/4	15 5/16	25 5/16	12 1/2	1 3/4	9	13	21 3/4	6 @ 554#
		AL250-28-43	Alum	20'	2 11/16	7 3/16	25'-0"	37 3/8	24 3/8	-	12 11/16	10	-	27	23 3/8	6 @ 489#
	53'	GLC250-28 (S or AL)-53	Steel	6'	1 1/2	5 1/16	25'-0"	15 3/4	8 1/16	18 1/16	12 1/2	1 3/4	-	13	21 3/4	22 @ 471#
		GLCS250-28 (S or AL)-53	Steel	20'	1 1/2	5 1/16	25'-0"	15 3/4	15 5/16	25 5/16	12 1/2	1 3/4	9	13	21 3/4	8 @ 554#
		AL250-28-53	Alum	20'	2 11/16	7 3/16	25'-0"	37 3/8	24 3/8	-	12 11/16	10	-	30	23 3/8	8 @ 489#
	63'	GLCSL250-28 (S or AL)-53	Steel	25'	1 1/2	5 1/16	25'-0"	15 3/4	17 5/16	27 5/16	12 1/2	1 3/4	11	13	21 3/4	6 @ 667#
		GLC250-28 (S or AL)-63	Steel	6'	1 1/2	5 1/16	25'-0"	15 3/4	8 1/16	18 1/16	12 1/2	1 3/4	-	19	21 3/4	26 @ 471#
		GLCS250-28 (S or AL)-63	Steel	20'	1 1/2	5 1/16	25'-0"	15 3/4	15 5/16	25 5/16	12 1/2	1 3/4	9	19	21 3/4	8 @ 554#
		AL250-28-63	Alum	20'	2 11/16	7 3/16	25'-0"	37 3/8	24 3/8	-	12 11/16	10	-	37	23 3/8	8 @ 489#
	78'	GLCSL250-28 (S or AL)-78	Steel	25'	1 1/2	5 1/16	25'-0"	35 3/16	17 5/16	27 5/16	12 1/2	1 3/4	11	54	21 3/4	8 @ 667#
		GLC250-28 (S or AL)-83	Steel	6'	1 1/2	5 1/16	25'-0"	35 3/16	8 1/16	18 1/16	12 1/2	1 3/4	-	54	21 3/4	34 @ 471#
		GLCS250-28 (S or AL)-83	Steel	20'	1 1/2	5 1/16	25'-0"	35 3/16	15 5/16	25 5/16	12 1/2	1 3/4	9	54	21 3/4	10 @ 554#
	103'	AL250-28-83	Alum	20'	2 11/16	7 3/16	25'-0"	37 3/8	24 3/8	-	12 11/16	10	-	47	23 3/8	10 @ 489#
		GLC250-28 (S or AL)-103	Steel	6'	1 1/2	5 1/16	25'-0"	35 3/16	8 1/16	18 1/16	12 1/2	1 3/4	-	54	21 3/4	42 @ 471#
		GLCS250-28 (S or AL)-103	Steel	20'	1 1/2	5 1/16	25'-0"	35 3/16	15 5/16	25 5/16	12 1/2	1 3/4	9	54	21 3/4	12 @ 554#
		AL250-28-103	Alum	20'	2 11/16	7 3/16	25'-0"	37 3/8	24 3/8	-	12 11/16	10	-	53	23 3/8	12 @ 489#
		GLCSL250-28 (S or AL)-103	Steel	25'	1 1/2	5 1/16	25'-0"	35 3/16	17 5/16	27 5/16	12 1/2	1 3/4	11	54	21 3/4	10 @ 667#

*This column provides the total number of support hangers with the corresponding vertical load applied by each support hanger (in pounds) based on the "L1" dimensions shown. Up to a 20" hanger drop will be provided by Gorbel. Additional hanger points or longer drops can be provided at an additional charge.

Gorbel® Ceiling Mounted Work Station Bridge Crane Kits include: bridge, runways, hoist trolley, end trucks, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel runway lengths greater than 63' and all aluminum systems), festoon stack-up section, splice joints and hanger brackets. Sway bracing is required on all systems except flush mounted systems (by others). Sway bracing kits are available but not included in the crane kit. Hoist provided by others.

Dimensions are for reference only and are subject to change without notice.

500# CAPACITY

CEILING MOUNTED WORK STATION BRIDGE CRANES

BRIDGE LENGTH (L)	RUNWAY LENGTH	MODEL NUMBER	TRACK MATL.	BRIDGE								RUNWAY				
				MAX L1	T1 in	L3 in	L4 ft	L6 in	H3 in	H3A in	H4 in	H2 in	H1 in	L7 in	L8 in	HANGERS (See Note)*
8'	11'-6"	GLC500-8 (S or AL)-11.5	Steel	6'	2 13/16	7 1/8	6'-6"	8 11/16	8 7/8	16 3/8	6 11/16	2 3/8	-	9	13 3/16	6 @ 743#
		GLCS500-8 (S or AL)-11.5	Steel	20'	2 13/16	7 1/8	6'-6"	8 11/16	16 1/2	24	6 11/16	2 3/8	10	9	13 3/16	4 @ 867#
		AL500-8-11.5	Alum	20'	2 11/16	7 3/16	6'-6"	13 7/8	23 7/8	-	12 11/16	10	-	9	13 1/4	4 @ 810#
	23'	GLC500-8 (S or AL)-23	Steel	6'	2 13/16	7 1/8	6'-6"	8 11/16	8 7/8	16 3/8	6 11/16	2 3/8	-	9	13 3/16	10 @ 743#
		GLCS500-8 (S or AL)-23	Steel	20'	2 13/16	7 1/8	6'-6"	8 11/16	16 1/2	24	6 11/16	2 3/8	10	9	13 3/16	4 @ 867#
		AL500-8-23	Alum	20'	2 11/16	7 3/16	6'-6"	13 7/8	23 7/8	-	12 11/16	10	-	14	13 1/4	4 @ 810#
	28'	GLCSL500-8 (S or AL)-28	Steel	25'	2 13/16	7 1/8	6'-6"	8 11/16	18 7/8	26 3/8	6 11/16	2 3/8	12 3/8	9	13 3/16	4 @ 986#
		GLC500-8 (S or AL)-33	Steel	6'	2 13/16	7 1/8	6'-6"	8 11/16	8 7/8	16 3/8	6 11/16	2 3/8	-	9	13 3/16	14 @ 743#
		GLCS500-8 (S or AL)-33	Steel	20'	2 13/16	7 1/8	6'-6"	8 11/16	16 1/2	24	6 11/16	2 3/8	10	9	13 3/16	6 @ 867#
	33'	AL500-8-33	Alum	20'	2 11/16	7 3/16	6'-6"	13 7/8	23 7/8	-	12 11/16	10	-	20	13 1/4	6 @ 810#
		GLCSLX500-8 (S or AL)-34	Steel	30'	2 13/16	7 1/8	6'-6"	8 11/16	20 7/8	28 3/8	6 11/16	2 3/8	14 3/8	9	13 3/16	4 @ 1,049#
	43'	GLC500-8 (S or AL)-43	Steel	6'	2 13/16	7 1/8	6'-6"	8 11/16	8 7/8	16 3/8	6 11/16	2 3/8	-	13	13 3/16	18 @ 743#
		GLCS500-8 (S or AL)-43	Steel	20'	2 13/16	7 1/8	6'-6"	8 11/16	16 1/2	24	6 11/16	2 3/8	10	13	13 3/16	6 @ 867#
		AL500-8-43	Alum	20'	2 11/16	7 3/16	6'-6"	13 7/8	23 7/8	-	12 11/16	10	-	27	13 1/4	6 @ 810#
	53'	GLC500-8 (S or AL)-53	Steel	6'	2 13/16	7 1/8	6'-6"	8 11/16	8 7/8	16 3/8	6 11/16	2 3/8	-	13	13 3/16	22 @ 743#
		GLCS500-8 (S or AL)-53	Steel	20'	2 13/16	7 1/8	6'-6"	8 11/16	16 1/2	24	6 11/16	2 3/8	10	13	13 3/16	8 @ 867#
		AL500-8-53	Alum	20'	2 11/16	7 3/16	6'-6"	13 7/8	23 7/8	-	12 11/16	10	-	30	13 1/4	8 @ 810#
	63'	GLCSL500-8 (S or AL)-53	Steel	25'	2 13/16	7 1/8	6'-6"	8 11/16	18 7/8	26 3/8	6 11/16	2 3/8	12 3/8	13	13 3/16	6 @ 986#
		GLC500-8 (S or AL)-63	Steel	6'	2 13/16	7 1/8	6'-6"	8 11/16	8 7/8	16 3/8	6 11/16	2 3/8	-	19	13 3/16	26 @ 743#
		GLCS500-8 (S or AL)-63	Steel	20'	2 13/16	7 1/8	6'-6"	8 11/16	16 1/2	24	6 11/16	2 3/8	10	19	13 3/16	8 @ 867#
	64'	AL500-8-63	Alum	20'	2 11/16	7 3/16	6'-6"	13 7/8	23 7/8	-	12 11/16	10	-	37	13 1/4	8 @ 810#
		GLCSLX500-8 (S or AL)-64	Steel	30'	2 13/16	7 1/8	6'-6"	13 13/16	20 7/8	28 3/8	6 11/16	2 3/8	14 3/8	46	13 3/16	6 @ 1,049#
	78'	GLCSL500-8 (S or AL)-78	Steel	25'	2 13/16	7 1/8	6'-6"	13 13/16	18 7/8	26 3/8	6 11/16	2 3/8	12 3/8	54	13 3/16	8 @ 986#
		GLC500-8 (S or AL)-83	Steel	6'	2 13/16	7 1/8	6'-6"	13 13/16	8 7/8	16 3/8	6 11/16	2 3/8	-	54	13 3/16	34 @ 743#
	83'	GLCS500-8 (S or AL)-83	Steel	20'	2 13/16	7 1/8	6'-6"	13 13/16	16 1/2	24	6 11/16	2 3/8	10	54	13 3/16	10 @ 867#
		AL500-8-83	Alum	20'	2 11/16	7 3/16	6'-6"	13 7/8	23 7/8	-	12 11/16	10	-	47	13 1/4	10 @ 810#
	94'	GLCSLX500-8 (S or AL)-94	Steel	30'	2 13/16	7 1/8	6'-6"	13 13/16	20 7/8	28 3/8	6 11/16	2 3/8	14 3/8	54	13 3/16	8 @ 1,049#
		GLC500-8 (S or AL)-103	Steel	6'	2 13/16	7 1/8	6'-6"	13 13/16	8 7/8	16 3/8	6 11/16	2 3/8	-	54	13 3/16	42 @ 743#
	103'	GLCS500-8 (S or AL)-103	Steel	20'	2 13/16	7 1/8	6'-6"	13 13/16	16 1/2	24	6 11/16	2 3/8	10	54	13 3/16	12 @ 867#
		AL500-8-103	Alum	20'	2 11/16	7 3/16	6'-6"	13 7/8	23 7/8	-	12 11/16	10	-	53	13 1/4	12 @ 810#
		GLCSL500-8 (S or AL)-103	Steel	25'	2 13/16	7 1/8	6'-6"	13 13/16	18 7/8	26 3/8	6 11/16	2 3/8	12 3/8	54	13 3/16	10 @ 986#
	124'	GLCSLX500-8 (S or AL)-124	Steel	30'	2 13/16	7 1/8	6'-6"	13 13/16	20 7/8	28 3/8	6 11/16	2 3/8	14 3/8	54	13 3/16	10 @ 1,049#
10'	11'-6"	GLC500-10 (S or AL)-11.5	Steel	6'	2 13/16	7 1/8	8'-0"	9 15/16	8 7/8	16 3/8	6 11/16	2 3/8	-	9	13 3/16	6 @ 747#
		GLCS500-10 (S or AL)-11.5	Steel	20'	2 13/16	7 1/8	8'-0"	9 15/16	16 1/2	24	6 11/16	2 3/8	10	9	13 3/16	4 @ 871#
		AL500-10-11.5	Alum	20'	2 11/16	7 3/16	8'-0"	17 1/4	23 7/8	-	12 11/16	10	-	9	13 1/4	4 @ 813#
	23'	GLC500-10 (S or AL)-23	Steel	6'	2 13/16	7 1/8	8'-0"	9 15/16	8 7/8	16 3/8	6 11/16	2 3/8	-	9	13 3/16	10 @ 747#
		GLCS500-10 (S or AL)-23	Steel	20'	2 13/16	7 1/8	8'-0"	9 15/16	16 1/2	24	6 11/16	2 3/8	10	9	13 3/16	4 @ 871#
		AL500-10-23	Alum	20'	2 11/16	7 3/16	8'-0"	17 1/4	23 7/8	-	12 11/16	10	-	14	13 1/4	4 @ 813#
	28'	GLCSL500-10 (S or AL)-28	Steel	25'	2 13/16	7 1/8	8'-0"	9 15/16	18 7/8	26 3/8	6 11/16	2 3/8	12 3/8	9	13 3/16	4 @ 990#
		GLC500-10 (S or AL)-33	Steel	6'	2 13/16	7 1/8	8'-0"	9 15/16	8 7/8	16 3/8	6 11/16	2 3/8	-	9	13 3/16	14 @ 747#
		GLCS500-10 (S or AL)-33	Steel	20'	2 13/16	7 1/8	8'-0"	9 15/16	16 1/2	24	6 11/16	2 3/8	10	9	13 3/16	6 @ 871#
	33'	AL500-10-33	Alum	20'	2 11/16	7 3/16	8'-0"	17 1/4	23 7/8	-	12 11/16	10	-	20	13 1/4	6 @ 813#
		GLCSLX500-10 (S or AL)-34	Steel	30'	2 13/16	7 1/8	8'-0"	9 15/16	20 7/8	28 3/8	6 11/16	2 3/8	14 3/8	9	13 3/16	4 @ 1,053#
	43'	GLC500-10 (S or AL)-43	Steel	6'	2 13/16	7 1/8	8'-0"	9 15/16	8 7/8	16 3/8	6 11/16	2 3/8	-	13	13 3/16	18 @ 747#
		GLCS500-10 (S or AL)-43	Steel	20'	2 13/16	7 1/8	8'-0"	9 15/16	16 1/2	24	6 11/16	2 3/8	10	13	13 3/16	6 @ 871#
		AL500-10-43	Alum	20'	2 11/16	7 3/16	8'-0"	17 1/4	23 7/8	-	12 11/16	10	-	27	13 1/4	6 @ 813#
	53'	GLC500-10 (S or AL)-53	Steel	6'	2 13/16	7 1/8	8'-0"	9 15/16	8 7/8	16 3/8	6 11/16	2 3/8	-	13	13 3/16	22 @ 747#
		GLCS500-10 (S or AL)-53	Steel	20'	2 13/16	7 1/8	8'-0"	9 15/16	16 1/2	24	6 11/16	2 3/8	10	13	13 3/16	8 @ 871#
		AL500-10-53	Alum	20'	2 11/16	7 3/16	8'-0"	17 1/4	23 7/8	-	12 11/16	10	-	30	13 1/4	8 @ 813#
	63'	GLCSL500-10 (S or AL)-53	Steel	25'	2 13/16	7 1/8	8'-0"	9 15/16	18 7/8	26 3/8	6 11/16	2 3/8	12 3/8	13	13 3/16	6 @ 990#
		GLC500-10 (S or AL)-63	Steel	6'	2 13/16	7 1/8	8'-0"	9 15/16	8 7/8	16 3/8	6 11/16	2 3/8	-	19	13 3/16	26 @ 747#
		GLCS500-10 (S or AL)-63	Steel	20'	2 13/16	7 1/8	8'-0"	9 15/16	16 1/2	24	6 11/16	2 3/8	10	19	13 3/16	8 @ 871#
	64'	AL500-10-63	Alum	20'	2 11/16	7 3/16	8'-0"	17 1/4	23 7/8	-	12 11/16	10	-	37	13 1/4	8 @ 813#
		GLCSLX500-10 (S or AL)-64	Steel	30'	2 13/16	7 1/8	8'-0"	17 3/16	20 7/8	28 3/8	6 11/16	2 3/8	14 3/8	46	13 3/16	6 @ 1,053#
	78'	GLCSL500-10 (S or AL)-78	Steel	25'	2 13/16	7 1/8	8'-0"	17 3/16	18 7/8	26 3/8	6 11/16	2 3/8	12 3/8	54	13 3/16	8 @ 990#
		GLC500-10 (S or AL)-83	Steel	6'	2 13/16	7 1/8	8'-0"	17 3/16	8 7/8	16 3/8	6 11/16	2 3/8	-	54	13 3/16	34 @ 747#
	83'	GLCS500-10 (S or AL)-83	Steel	20'	2 13/16	7 1/8	8'-0"	17 3/16	16 1/2	24	6 11/16	2 3/8	10	54	13 3/16	10 @ 871#
		AL500-10-83	Alum	20'	2 11/16	7 3/16	8'-0"	17 1/4	23 7/8	-	12 11/16	10	-	47	13 1/4	10 @ 813#
	94'	GLCSLX500-10 (S or AL)-94	Steel	30'	2 13/16	7 1/8	8'-0"	17 3/16	20 7/8	28 3/8	6 11/16	2 3/8	14 3/8	54	13 3/16	8 @ 1,053#
		GLC500-10 (S or AL)-103	Steel	6'	2 13/16	7 1/8	8'-0"	17 3/16	8 7/8	16 3/8	6 11/16	2 3/8	-	54	13 3/16	42 @ 747#
	103'	GLCS500-10 (S or AL)-103	Steel	20'	2 13/16	7 1/8	8'-0"	17 3/16	16 1/2	24	6 11/16	2 3/8	10	54	13 3/16	12 @ 871#
		AL500-10-103	Alum	20'	2 11/16	7 3/16	8'-0"	17 1/4	23 7/8	-	12 11/16	10	-	53	13 1/4	12 @ 813#
		GLCSL500-10 (S or AL)-103	Steel	25'	2 13/16	7 1/8	8'-0"	17 3/16	18 7/8	26 3/8	6 11/16	2 3/8	12 3/8	54	13 3/16	10 @ 990#
	124'	GLCSLX500-10 (S or AL)-124	Steel	30'	2 13/16	7 1/8	8'-0"	17 3/16	20 7/8	28 3/8	6 11/16	2 3/8	14 3/8	54	13 3/16	10 @ 1,053#

*This column provides the total number of support hangers with the corresponding vertical load applied by each support hanger (in pounds) based on the "L1" dimensions shown. Up to a 20" hanger drop will be provided by Gorbel. Additional hanger points or longer drops can be provided at an additional charge.

Gorbel® Ceiling Mounted Work Station Bridge Crane Kits include: bridge, runways, hoist trolley, end trucks, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel runway lengths greater than 63' and all aluminum systems), festoon stack-up section, splice joints and hanger brackets. Sway bracing is required on all systems except flush mounted systems (by others). Sway bracing kits are available but not included in the crane kit. Hoist provided by others.

Dimensions are for reference only and are subject to change without notice.

CEILING MOUNTED WORK STATION BRIDGE CRANES

BRIDGE LENGTH (L)	RUNWAY LENGTH	MODEL NUMBER	TRACK MATL.	BRIDGE								RUNWAY				
				MAX L1	T1 in	L3 in	L4 ft	L6 in	H3 in	H3A in	H4 in	H2 in	H1 in	L7 in	L8 in	HANGERS (See Note)*
15'	23'	GLC500-15 (S or AL)-23	Steel	6'	2 13/16	7 1/8	13'-0"	12 7/16	8 7/8	16 3/8	12 13/16	2 3/8	-	9	13 3/16	10 @ 774#
		GLCS500-15 (S or AL)-23	Steel	20'	2 13/16	7 1/8	13'-0"	12 7/16	16 1/2	24	12 13/16	2 3/8	10	9	13 3/16	4 @ 898#
		AL500-15-23	Alum	20'	2 11/16	7 3/16	13'-0"	23 15/16	23 7/8	-	12 11/16	10	-	14	13 1/4	4 @ 825#
	28'	GLCSL500-15 (S or AL)-28	Steel	25'	2 13/16	7 1/8	13'-0"	12 7/16	18 7/8	26 3/8	12 13/16	2 3/8	12 3/8	9	13 3/16	4 @ 1,017#
		GLC500-15 (S or AL)-33	Steel	6'	2 13/16	7 1/8	13'-0"	12 7/16	8 7/8	16 3/8	12 13/16	2 3/8	-	9	13 3/16	14 @ 774#
	33'	GLCS500-15 (S or AL)-33	Steel	20'	2 13/16	7 1/8	13'-0"	12 7/16	16 1/2	24	12 13/16	2 3/8	10	9	13 3/16	6 @ 898#
		AL500-15-33	Alum	20'	2 11/16	7 3/16	13'-0"	23 15/16	23 7/8	-	12 11/16	10	-	20	13 1/4	6 @ 825#
	34'	GLCSLX500-15 (S or AL)-34	Steel	30'	2 13/16	7 1/8	13'-0"	12 7/16	20 7/8	28 3/8	12 13/16	2 3/8	14 3/8	9	13 3/16	4 @ 1,079#
		GLC500-15 (S or AL)-43	Steel	6'	2 13/16	7 1/8	13'-0"	12 7/16	8 7/8	16 3/8	12 13/16	2 3/8	-	13	13 3/16	18 @ 774#
	43'	GLCS500-15 (S or AL)-43	Steel	20'	2 13/16	7 1/8	13'-0"	12 7/16	16 1/2	24	12 13/16	2 3/8	10	13	13 3/16	6 @ 898#
		AL500-15-43	Alum	20'	2 11/16	7 3/16	13'-0"	23 15/16	23 7/8	-	12 11/16	10	-	27	13 1/4	6 @ 825#
		GLC500-15 (S or AL)-53	Steel	6'	2 13/16	7 1/8	13'-0"	12 7/16	8 7/8	16 3/8	12 13/16	2 3/8	-	13	13 3/16	22 @ 774#
	53'	GLCS500-15 (S or AL)-53	Steel	20'	2 13/16	7 1/8	13'-0"	12 7/16	16 1/2	24	12 13/16	2 3/8	10	13	13 3/16	8 @ 898#
		AL500-15-53	Alum	20'	2 11/16	7 3/16	13'-0"	23 15/16	23 7/8	-	12 11/16	10	-	30	13 1/4	8 @ 825#
		GLCSL500-15 (S or AL)-53	Steel	25'	2 13/16	7 1/8	13'-0"	12 7/16	18 7/8	26 3/8	12 13/16	2 3/8	12 3/8	13	13 3/16	6 @ 1,017#
	63'	GLC500-15 (S or AL)-63	Steel	6'	2 13/16	7 1/8	13'-0"	12 7/16	8 7/8	16 3/8	12 13/16	2 3/8	-	19	13 3/16	26 @ 774#
		GLCS500-15 (S or AL)-63	Steel	20'	2 13/16	7 1/8	13'-0"	12 7/16	16 1/2	24	12 13/16	2 3/8	10	19	13 3/16	8 @ 898#
		AL500-15-63	Alum	20'	2 11/16	7 3/16	13'-0"	23 15/16	23 7/8	-	12 11/16	10	-	37	13 1/4	8 @ 825#
	64'	GLCSLX500-15 (S or AL)-64	Steel	30'	2 13/16	7 1/8	13'-0"	23 7/8	20 7/8	28 3/8	12 13/16	2 3/8	14 3/8	46	13 3/16	6 @ 1,079#
		GLCSL500-15 (S or AL)-78	Steel	25'	2 13/16	7 1/8	13'-0"	23 7/8	18 7/8	26 3/8	12 13/16	2 3/8	12 3/8	54	13 3/16	8 @ 1,017#
20'	83'	GLC500-15 (S or AL)-83	Steel	6'	2 13/16	7 1/8	13'-0"	23 7/8	8 7/8	16 3/8	12 13/16	2 3/8	-	54	13 3/16	34 @ 774#
		GLCS500-15 (S or AL)-83	Steel	20'	2 13/16	7 1/8	13'-0"	23 7/8	16 1/2	24	12 13/16	2 3/8	10	54	13 3/16	10 @ 898#
		AL500-15-83	Alum	20'	2 11/16	7 3/16	13'-0"	23 15/16	23 7/8	-	12 11/16	10	-	47	13 1/4	10 @ 825#
	94'	GLCSLX-15 (S or AL)-94	Steel	30'	2 13/16	7 1/8	13'-0"	23 7/8	20 7/8	28 3/8	12 13/16	2 3/8	14 3/8	54	13 3/16	8 @ 1,079#
		GLC500-15 (S or AL)-103	Steel	6'	2 13/16	7 1/8	13'-0"	23 7/8	8 7/8	16 3/8	12 13/16	2 3/8	-	54	13 3/16	42 @ 774#
	103'	GLCS500-15 (S or AL)-103	Steel	20'	2 13/16	7 1/8	13'-0"	23 7/8	16 1/2	24	12 13/16	2 3/8	10	54	13 3/16	12 @ 898#
		AL500-15-103	Alum	20'	2 11/16	7 3/16	13'-0"	23 15/16	23 7/8	-	12 11/16	10	-	53	13 1/4	12 @ 825#
		GLCSL500-15 (S or AL)-103	Steel	25'	2 13/16	7 1/8	13'-0"	23 7/8	18 7/8	26 3/8	12 13/16	2 3/8	12 3/8	54	13 3/16	10 @ 1,017#
	124'	GLCSLX500-15 (S or AL)-124	Steel	30'	2 13/16	7 1/8	13'-0"	23 7/8	20 7/8	28 3/8	12 13/16	2 3/8	14 3/8	54	13 3/16	10 @ 1,079#
		GLC500-20 (S or AL)-23	Steel	6'	2 13/16	7 1/8	18'-0"	13 11/16	8 7/8	16 3/8	12 13/16	2 3/8	-	9	13 3/16	10 @ 792#
	23'	GLCS500-20 (S or AL)-23	Steel	20'	2 13/16	7 1/8	18'-0"	13 11/16	16 1/2	24	12 13/16	2 3/8	10	9	13 3/16	4 @ 916#
		AL500-20-23	Alum	20'	2 11/16	7 3/16	18'-0"	27 5/16	23 7/8	-	12 11/16	10	-	14	13 1/4	4 @ 837#
		GLCSL500-20 (S or AL)-28	Steel	25'	2 13/16	7 1/8	18'-0"	13 11/16	18 7/8	26 3/8	12 13/16	2 3/8	12 3/8	9	13 3/16	4 @ 1,035#
	33'	GLC500-20 (S or AL)-33	Steel	6'	2 13/16	7 1/8	18'-0"	13 11/16	8 7/8	16 3/8	12 13/16	2 3/8	-	9	13 3/16	14 @ 792#
		GLCS500-20 (S or AL)-33	Steel	20'	2 13/16	7 1/8	18'-0"	13 11/16	16 1/2	24	12 13/16	2 3/8	10	9	13 3/16	6 @ 916#
	34'	AL500-20-33	Alum	20'	2 11/16	7 3/16	18'-0"	27 5/16	23 7/8	-	12 11/16	10	-	20	13 1/4	6 @ 837#
		GLCSLX500-20 (S or AL)-34	Steel	30'	2 13/16	7 1/8	18'-0"	13 11/16	20 7/8	28 3/8	12 13/16	2 3/8	14 3/8	9	13 3/16	4 @ 1,098#
		GLC500-20 (S or AL)-43	Steel	6'	2 13/16	7 1/8	18'-0"	13 11/16	8 7/8	16 3/8	12 13/16	2 3/8	-	13	13 3/16	18 @ 792#
	43'	GLCS500-20 (S or AL)-43	Steel	20'	2 13/16	7 1/8	18'-0"	13 11/16	16 1/2	24	12 13/16	2 3/8	10	13	13 3/16	6 @ 916#
		AL500-20-43	Alum	20'	2 11/16	7 3/16	18'-0"	27 5/16	23 7/8	-	12 11/16	10	-	27	13 1/4	6 @ 837#
		GLC500-20 (S or AL)-53	Steel	6'	2 13/16	7 1/8	18'-0"	13 11/16	8 7/8	16 3/8	12 13/16	2 3/8	-	13	13 3/16	22 @ 792#
	53'	GLCS500-20 (S or AL)-53	Steel	20'	2 13/16	7 1/8	18'-0"	13 11/16	16 1/2	24	12 13/16	2 3/8	10	13	13 3/16	8 @ 916#
		AL500-20-53	Alum	20'	2 11/16	7 3/16	18'-0"	27 5/16	23 7/8	-	12 11/16	10	-	30	13 1/4	8 @ 837#
		GLCSL500-20 (S or AL)-53	Steel	25'	2 13/16	7 1/8	18'-0"	13 11/16	18 7/8	26 3/8	12 13/16	2 3/8	12 3/8	13	13 3/16	6 @ 1,035#
	63'	GLC500-20 (S or AL)-63	Steel	6'	2 13/16	7 1/8	18'-0"	13 11/16	8 7/8	16 3/8	12 13/16	2 3/8	-	19	13 3/16	26 @ 792#
		GLCS500-20 (S or AL)-63	Steel	20'	2 13/16	7 1/8	18'-0"	13 11/16	16 1/2	24	12 13/16	2 3/8	10	19	13 3/16	8 @ 916#
		AL500-20-63	Alum	20'	2 11/16	7 3/16	18'-0"	27 5/16	23 7/8	-	12 11/16	10	-	37	13 1/4	8 @ 837#
	64'	GLCSLX500-20 (S or AL)-64	Steel	30'	2 13/16	7 1/8	18'-0"	27 1/4	20 7/8	28 3/8	12 13/16	2 3/8	14 3/8	46	13 3/16	6 @ 1,098#
		GLCSL500-20 (S or AL)-78	Steel	25'	2 13/16	7 1/8	18'-0"	27 1/4	18 7/8	26 3/8	12 13/16	2 3/8	12 3/8	54	13 3/16	8 @ 1,035#
	83'	GLC500-20 (S or AL)-83	Steel	6'	2 13/16	7 1/8	18'-0"	27 1/4	8 7/8	16 3/8	12 13/16	2 3/8	-	54	13 3/16	34 @ 792#
		GLCS500-20 (S or AL)-83	Steel	20'	2 13/16	7 1/8	18'-0"	27 1/4	16 1/2	24	12 13/16	2 3/8	10	54	13 3/16	10 @ 916#
		AL500-20-83	Alum	20'	2 11/16	7 3/16	18'-0"	27 5/16	23 7/8	-	12 11/16	10	-	47	13 1/4	10 @ 837#
	94'	GLCSLX500-20 (S or AL)-94	Steel	30'	2 13/16	7 1/8	18'-0"	27 1/4	20 7/8	28 3/8	12 13/16	2 3/8	14 3/8	54	13 3/16	8 @ 1,098#
		GLC500-20 (S or AL)-103	Steel	6'	2 13/16	7 1/8	18'-0"	27 1/4	8 7/8	16 3/8	12 13/16	2 3/8	-	54	13 3/16	42 @ 792#
	103'	GLCS500-20 (S or AL)-103	Steel	20'	2 13/16	7 1/8	18'-0"	27 1/4	16 1/2	24	12 13/16	2 3/8	10	54	13 3/16	12 @ 916#
		AL500-20-103	Alum	20'	2 11/16	7 3/16	18'-0"	27 5/16	23 7/8	-	12 11/16	10	-	53	13 1/4	12 @ 837#
		GLCSL500-20 (S or AL)-103	Steel	25'	2 13/16	7 1/8	18'-0"	27 1/4	18 7/8	26 3/8	12 13/16	2 3/8	12 3/8	54	13 3/16	10 @ 1,035#
	124'	GLCSLX500-20 (S or AL)-124	Steel	30'	2 13/16	7 1/8	18'-0"	27 1/4	20 7/8	28 3/8	12 13/16	2 3/8	14 3/8	54	13 3/16	10 @ 1,098#

*This column provides the total number of support hangers with the corresponding vertical load applied by each support hanger (in pounds) based on the "L1" dimensions shown. Up to a 20" hanger drop will be provided by Gorbel. Additional hanger points or longer drops can be provided at an additional charge.

Gorbel® Ceiling Mounted Work Station Bridge Crane Kits include: bridge, runways, hoist trolley, end trucks, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel runway lengths greater than 63' and all aluminum systems), festoon stack-up section, splice joints and hanger brackets. Sway bracing is required on all systems except flush mounted systems (by others). Sway bracing kits are available but not included in the crane kit. Hoist provided by others.

Dimensions are for reference only and are subject to change without notice.

500# CAPACITY

CEILING MOUNTED WORK STATION BRIDGE CRANES

BRIDGE LENGTH (L)	RUNWAY LENGTH	MODEL NUMBER	TRACK MATL.	BRIDGE								RUNWAY				
				MAX L1	T1 in	L3 in	L4 ft	L6 in	H3 in	H3A in	H4 in	H2 in	H1 in	L7 in	L8 in	HANGERS (See Note)*
23'	23'	GLC500-23 (S or AL)-23	Steel	6'	2 13/16	7 1/8	21'-0"	14 15/16	8 7/8	15 1/8	12 13/16	2 3/8	-	9	13 3/16	10 @ 803#
		GLCS500-23 (S or AL)-23	Steel	20'	2 13/16	7 1/8	21'-0"	14 15/16	16 1/2	22 3/4	12 13/16	2 3/8	10	9	13 3/16	4 @ 927#
		AL500-23-23	Alum	20'	2 11/16	7 3/16	21'-0"	30 5/8	23 7/8	-	12 11/16	10	-	14	13 1/4	4 @ 841#
	28'	GLCSL500-23 (S or AL)-28	Steel	25'	2 13/16	7 1/8	21'-0"	14 15/16	18 7/8	25 1/8	12 13/16	2 3/8	12 3/8	9	13 3/16	4 @ 1,046#
		GLC500-23 (S or AL)-33	Steel	6'	2 13/16	7 1/8	21'-0"	14 15/16	8 7/8	15 1/8	12 13/16	2 3/8	-	9	13 3/16	14 @ 803#
	33'	GLCS500-23 (S or AL)-33	Steel	20'	2 13/16	7 1/8	21'-0"	14 15/16	16 1/2	22 3/4	12 13/16	2 3/8	10	9	13 3/16	6 @ 927#
		AL500-23-33	Alum	20'	2 11/16	7 3/16	21'-0"	30 5/8	23 7/8	-	12 11/16	10	-	20	13 1/4	6 @ 841#
	34'	GLCSLX500-23 (S or AL)-34	Steel	30'	2 13/16	7 1/8	21'-0"	14 15/16	20 7/8	27 1/8	12 13/16	2 3/8	14 3/8	9	13 3/16	4 @ 1,109#
		GLC500-23 (S or AL)-43	Steel	6'	2 13/16	7 1/8	21'-0"	14 15/16	8 7/8	15 1/8	12 13/16	2 3/8	-	13	13 3/16	18 @ 803#
	43'	GLCS500-23 (S or AL)-43	Steel	20'	2 13/16	7 1/8	21'-0"	14 15/16	16 1/2	22 3/4	12 13/16	2 3/8	10	13	13 3/16	6 @ 927#
		AL500-23-43	Alum	20'	2 11/16	7 3/16	21'-0"	30 5/8	23 7/8	-	12 11/16	10	-	27	13 1/4	6 @ 841#
		GLC500-23 (S or AL)-53	Steel	6'	2 13/16	7 1/8	21'-0"	14 15/16	8 7/8	15 1/8	12 13/16	2 3/8	-	13	13 3/16	22 @ 803#
	53'	GLCS500-23 (S or AL)-53	Steel	20'	2 13/16	7 1/8	21'-0"	14 15/16	16 1/2	22 3/4	12 13/16	2 3/8	10	13	13 3/16	8 @ 927#
		AL500-23-53	Alum	20'	2 11/16	7 3/16	21'-0"	30 5/8	23 7/8	-	12 11/16	10	-	30	13 1/4	8 @ 841#
		GLCSL500-23 (S or AL)-53	Steel	25'	2 13/16	7 1/8	21'-0"	14 15/16	18 7/8	25 1/8	12 13/16	2 3/8	12 3/8	13	13 3/16	6 @ 1,046#
	63'	GLC500-23 (S or AL)-63	Steel	6'	2 13/16	7 1/8	21'-0"	14 15/16	8 7/8	15 1/8	12 13/16	2 3/8	-	19	13 3/16	26 @ 803#
		GLCS500-23 (S or AL)-63	Steel	20'	2 13/16	7 1/8	21'-0"	14 15/16	16 1/2	22 3/4	12 13/16	2 3/8	10	19	13 3/16	8 @ 927#
28'	64'	AL500-23-63	Alum	20'	2 11/16	7 3/16	21'-0"	30 5/8	23 7/8	-	12 11/16	10	-	37	13 1/4	8 @ 841#
		GLCSLX500-23 (S or AL)-64	Steel	30'	2 13/16	7 1/8	21'-0"	30 9/16	20 7/8	27 1/8	12 13/16	2 3/8	14 3/8	46	13 3/16	6 @ 1,109#
	78'	GLCSL500-23 (S or AL)-78	Steel	25'	2 13/16	7 1/8	21'-0"	30 9/16	18 7/8	25 1/8	12 13/16	2 3/8	12 3/8	54	13 3/16	8 @ 1,046#
		GLC500-23 (S or AL)-83	Steel	6'	2 13/16	7 1/8	21'-0"	30 9/16	8 7/8	15 1/8	12 13/16	2 3/8	-	54	13 3/16	34 @ 803#
	83'	GLCS500-23 (S or AL)-83	Steel	20'	2 13/16	7 1/8	21'-0"	30 9/16	16 1/2	22 3/4	12 13/16	2 3/8	10	54	13 3/16	10 @ 927#
		AL500-23-83	Alum	20'	2 11/16	7 3/16	21'-0"	30 5/8	23 7/8	-	12 11/16	10	-	47	13 1/4	10 @ 841#
	94'	GLCSLX500-23 (S or AL)-94	Steel	30'	2 13/16	7 1/8	21'-0"	30 9/16	20 7/8	27 1/8	12 13/16	2 3/8	14 3/8	54	13 3/16	8 @ 1,109#
		GLC500-23 (S or AL)-103	Steel	6'	2 13/16	7 1/8	21'-0"	30 9/16	8 7/8	15 1/8	12 13/16	2 3/8	-	54	13 3/16	42 @ 803#
	103'	GLCS500-23 (S or AL)-103	Steel	20'	2 13/16	7 1/8	21'-0"	30 9/16	16 1/2	22 3/4	12 13/16	2 3/8	10	54	13 3/16	12 @ 927#
		AL500-23-103	Alum	20'	2 11/16	7 3/16	21'-0"	30 5/8	23 7/8	-	12 11/16	10	-	53	13 1/4	12 @ 841#
		GLCSL500-23 (S or AL)-103	Steel	25'	2 13/16	7 1/8	21'-0"	30 9/16	18 7/8	25 1/8	12 13/16	2 3/8	12 3/8	54	13 3/16	10 @ 1,046#
	124'	GLCSLX500-23 (S or AL)-124	Steel	30'	2 13/16	7 1/8	21'-0"	30 9/16	20 7/8	27 1/8	12 13/16	2 3/8	14 3/8	54	13 3/16	10 @ 1,109#
		GLC500-28 (S or AL)-23	Steel	6'	2 13/16	7 1/8	25'-0"	17 7/16	10 11/16	15	15 3/16	2 3/8	-	9	23 5/16	10 @ 859#
	23'	GLCS500-28 (S or AL)-23	Steel	20'	2 13/16	7 1/8	25'-0"	17 7/16	18 5/16	22 5/8	15 3/16	2 3/8	10	9	23 5/16	4 @ 983#
		AL500-28-23	Alum	20'	2 5/8	7 13/16	25'-0"	38	22 11/16	-	13 1/8	10 1/2	-	14	23 3/8	4 @ 904#
	28'	GLCSL500-28 (S or AL)-28	Steel	25'	2 13/16	7 1/8	25'-0"	17 7/16	20 11/16	25	15 3/16	2 3/8	12 3/8	9	23 5/16	4 @ 1,102#
		GLC500-28 (S or AL)-33	Steel	6'	2 13/16	7 1/8	25'-0"	17 7/16	10 11/16	15	15 3/16	2 3/8	-	9	23 5/16	14 @ 859#
	33'	GLCS500-28 (S or AL)-33	Steel	20'	2 13/16	7 1/8	25'-0"	17 7/16	18 5/16	22 5/8	15 3/16	2 3/8	10	9	23 5/16	6 @ 983#
		AL500-28-33	Alum	20'	2 5/8	7 13/16	25'-0"	38	22 11/16	-	13 1/8	10 1/2	-	20	23 3/8	6 @ 904#
	34'	GLCSLX500-28 (S or AL)-34	Steel	30'	2 13/16	7 1/8	25'-0"	17 7/16	22 11/16	27	15 3/16	2 3/8	14 3/8	9	23 5/16	4 @ 1,165#
		GLC500-28 (S or AL)-43	Steel	6'	2 13/16	7 1/8	25'-0"	17 7/16	10 11/16	15	15 3/16	2 3/8	-	13	23 5/16	18 @ 859#
	43'	GLCS500-28 (S or AL)-43	Steel	20'	2 13/16	7 1/8	25'-0"	17 7/16	18 5/16	22 5/8	15 3/16	2 3/8	10	13	23 5/16	6 @ 983#
		AL500-28-43	Alum	20'	2 5/8	7 13/16	25'-0"	38	22 11/16	-	13 1/8	10 1/2	-	27	23 3/8	6 @ 904#
	53'	GLC500-28 (S or AL)-53	Steel	6'	2 13/16	7 1/8	25'-0"	17 7/16	10 11/16	15	15 3/16	2 3/8	-	13	23 5/16	22 @ 859#
		GLCS500-28 (S or AL)-53	Steel	20'	2 13/16	7 1/8	25'-0"	17 7/16	18 5/16	22 5/8	15 3/16	2 3/8	10	13	23 5/16	8 @ 983#
		AL500-28-53	Alum	20'	2 5/8	7 13/16	25'-0"	38	22 11/16	-	13 1/8	10 1/2	-	30	23 3/8	8 @ 904#
	53'	GLCSL500-28 (S or AL)-53	Steel	25'	2 13/16	7 1/8	25'-0"	17 7/16	20 11/16	25	15 3/16	2 3/8	12 3/8	13	23 5/16	6 @ 1,102#
		GLC500-28 (S or AL)-63	Steel	6'	2 13/16	7 1/8	25'-0"	17 7/16	10 11/16	15	15 3/16	2 3/8	-	19	23 5/16	26 @ 859#
		GLCS500-28 (S or AL)-63	Steel	20'	2 13/16	7 1/8	25'-0"	17 7/16	18 5/16	22 5/8	15 3/16	2 3/8	10	19	23 5/16	8 @ 983#
	63'	AL500-28-63	Alum	20'	2 5/8	7 13/16	25'-0"	38	22 11/16	-	13 1/8	10 1/2	-	37	23 3/8	8 @ 904#
		GLCSLX500-28 (S or AL)-64	Steel	30'	2 13/16	7 1/8	25'-0"	37 5/16	22 11/16	27	15 3/16	2 3/8	14 3/8	46	23 5/16	6 @ 1,165#
	78'	GLCSL500-28 (S or AL)-78	Steel	25'	2 13/16	7 1/8	25'-0"	37 5/16	20 11/16	25	15 3/16	2 3/8	12 3/8	54	23 5/16	8 @ 1,102#
		GLC500-28 (S or AL)-83	Steel	6'	2 13/16	7 1/8	25'-0"	37 5/16	10 11/16	15	15 3/16	2 3/8	-	54	23 5/16	34 @ 859#
	83'	GLCS500-28 (S or AL)-83	Steel	20'	2 13/16	7 1/8	25'-0"	37 5/16	18 5/16	22 5/8	15 3/16	2 3/8	10	54	23 5/16	10 @ 983#
		AL500-28-83	Alum	20'	2 5/8	7 13/16	25'-0"	38	22 11/16	-	13 1/8	10 1/2	-	47	23 3/8	10 @ 904#
	94'	GLCSLX500-28 (S or AL)-94	Steel	30'	2 13/16	7 1/8	25'-0"	37 5/16	22 11/16	27	15 3/16	2 3/8	14 3/8	54	23 5/16	8 @ 1,165#
		GLC500-28 (S or AL)-103	Steel	6'	2 13/16	7 1/8	25'-0"	37 5/16	10 11/16	15	15 3/16	2 3/8	-	54	23 5/16	42 @ 859#
	103'	GLCS500-28 (S or AL)-103	Steel	20'	2 13/16	7 1/8	25'-0"	37 5/16	18 5/16	22 5/8	15 3/16	2 3/8	10	54	23 5/16	12 @ 983#
		AL500-28-103	Alum	20'	2 5/8	7 13/16	25'-0"	38	22 11/16	-	13 1/8	10 1/2	-	53	23 3/8	12 @ 904#
		GLCSL500-28 (S or AL)-103	Steel	25'	2 13/16	7 1/8	25'-0"	37 5/16	20 11/16	25	15 3/16	2 3/8	12 3/8	54	23 5/16	10 @ 1,102#
	124'	GLCSLX500-28 (S or AL)-124	Steel	30'	2 13/16	7 1/8	25'-0"	37 5/16	22 11/16	27	15 3/16	2 3/8	14 3/8	54	23 5/16	10 @ 1,165#

*This column provides the total number of support hangers with the corresponding vertical load applied by each support hanger (in pounds) based on the "L1" dimensions shown. Up to a 20" hanger drop will be provided by Gorbel. Additional hanger points or longer drops can be provided at an additional charge.

Gorbel® Ceiling Mounted Work Station Bridge Crane Kits include: bridge, runways, hoist trolley, end trucks, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel runway lengths greater than 63' and all aluminum systems), festoon stack-up section, splice joints and hanger brackets. Sway bracing is required on all systems except flush mounted systems (by others). Sway bracing kits are available but not included in the crane kit. Hoist provided by others.

Dimensions are for reference only and are subject to change without notice.

CEILING MOUNTED WORK STATION BRIDGE CRANES

BRIDGE LENGTH (L)	RUNWAY LENGTH	MODEL NUMBER	TRACK MATL.	BRIDGE									RUNWAY			
				MAX L1	T1 in	L3 in	L4 ft	L6 in	H3 in	H3A in	H4 in	H2 in	H1 in	L7 in	L8 in	HANGERS (See Note)*
34'	28'	GLCSL500-15 (S or AL)-28	Steel	25'	2 13/16	7 1/8	30'-0"	19 15/16	20 11/16	25	17 3/16	2 3/8	12 3/8	9	23 5/16	4 @ 1,133#
	33'	GLC500-15 (S or AL)-33	Steel	6'	2 13/16	7 1/8	30'-0"	19 15/16	10 11/16	15	17 3/16	2 3/8	-	9	23 5/16	14 @ 891#
		GLCS500-15 (S or AL)-33	Steel	20'	2 13/16	7 1/8	30'-0"	19 15/16	18 5/16	22 5/8	17 3/16	2 3/8	10	9	23 5/16	6 @ 1,014#
		AL500-15-33	Alum	20'	2 5/8	7 13/16	30'-0"	44 11/16	22 11/16	-	15 1/4	12 5/8	-	20	23 3/8	6 @ 935#
	34'	GLCSLX500-15 (S or AL)-34	Steel	30'	2 13/16	7 1/8	30'-0"	19 15/16	22 11/16	27	17 3/16	2 3/8	14 3/8	9	23 5/16	4 @ 1,196#
	43'	GLC500-15 (S or AL)-43	Steel	6'	2 13/16	7 1/8	30'-0"	19 15/16	10 11/16	15	17 3/16	2 3/8	-	13	23 5/16	18 @ 891#
		GLCS500-15 (S or AL)-43	Steel	20'	2 13/16	7 1/8	30'-0"	19 15/16	18 5/16	22 5/8	17 3/16	2 3/8	10	13	23 5/16	6 @ 1,014#
		AL500-15-43	Alum	20'	2 5/8	7 13/16	30'-0"	44 11/16	22 11/16	-	15 1/4	12 5/8	-	27	23 3/8	6 @ 935#
	53'	GLC500-15 (S or AL)-53	Steel	6'	2 13/16	7 1/8	30'-0"	19 15/16	10 11/16	15	17 3/16	2 3/8	-	13	23 5/16	22 @ 891#
		GLCS500-15 (S or AL)-53	Steel	20'	2 13/16	7 1/8	30'-0"	19 15/16	18 5/16	22 5/8	17 3/16	2 3/8	10	13	23 5/16	8 @ 1,014#
		AL500-15-53	Alum	20'	2 5/8	7 13/16	30'-0"	44 11/16	22 11/16	-	15 1/4	12 5/8	-	30	23 3/8	8 @ 935#
		GLCSL500-15 (S or AL)-53	Steel	25'	2 13/16	7 1/8	30'-0"	19 15/16	20 11/16	25	17 3/16	2 3/8	12 3/8	13	23 5/16	6 @ 1,133#
	63'	GLC500-15 (S or AL)-63	Steel	6'	2 13/16	7 1/8	30'-0"	19 15/16	10 11/16	15	17 3/16	2 3/8	-	19	23 5/16	26 @ 891#
		GLCS500-15 (S or AL)-63	Steel	20'	2 13/16	7 1/8	30'-0"	19 15/16	18 5/16	22 5/8	17 3/16	2 3/8	10	19	23 5/16	8 @ 1,014#
		AL500-15-63	Alum	20'	2 5/8	7 13/16	30'-0"	44 11/16	22 11/16	-	15 1/4	12 5/8	-	37	23 3/8	8 @ 935#
	64'	GLCSLX500-15 (S or AL)-64	Steel	30'	2 13/16	7 1/8	30'-0"	44	22 11/16	27	17 3/16	2 3/8	14 3/8	46	23 5/16	6 @ 1,196#
	78'	GLCSL500-15 (S or AL)-78	Steel	25'	2 13/16	7 1/8	30'-0"	44	20 11/16	25	17 3/16	2 3/8	12 3/8	54	23 5/16	8 @ 1,133#
	83'	GLC500-15 (S or AL)-83	Steel	6'	2 13/16	7 1/8	30'-0"	44	10 11/16	15	17 3/16	2 3/8	-	54	23 5/16	34 @ 891#
		GLCS500-15 (S or AL)-83	Steel	20'	2 13/16	7 1/8	30'-0"	44	18 5/16	22 5/8	17 3/16	2 3/8	10	54	23 5/16	10 @ 1,014#
		AL500-15-83	Alum	20'	2 5/8	7 13/16	30'-0"	44 11/16	22 11/16	-	15 1/4	12 5/8	-	47	23 3/8	10 @ 935#
	94'	GLCSLX-15 (S or AL)-94	Steel	30'	2 13/16	7 1/8	30'-0"	44	22 11/16	27	17 3/16	2 3/8	14 3/8	54	23 5/16	8 @ 1,196#
	103'	GLC500-15 (S or AL)-103	Steel	6'	2 13/16	7 1/8	30'-0"	44	10 11/16	15	17 3/16	2 3/8	-	54	23 5/16	42 @ 891#
		GLCS500-15 (S or AL)-103	Steel	20'	2 13/16	7 1/8	30'-0"	44	18 5/16	22 5/8	17 3/16	2 3/8	10	54	23 5/16	12 @ 1,041#
		AL500-15-103	Alum	20'	2 5/8	7 13/16	30'-0"	44 11/16	22 11/16	-	15 1/4	12 5/8	-	53	23 3/8	12 @ 935#
	124'	GLCSL500-15 (S or AL)-103	Steel	25'	2 13/16	7 1/8	30'-0"	44	20 11/16	25	17 3/16	2 3/8	12 3/8	54	23 5/16	10 @ 1,133#
		GLCSLX500-15 (S or AL)-124	Steel	30'	2 13/16	7 1/8	30'-0"	44	22 11/16	27	17 3/16	2 3/8	14 3/8	54	23 5/16	10 @ 1,196#

*This column provides the total number of support hangers with the corresponding vertical load applied by each support hanger (in pounds) based on the "L1" dimensions shown. Up to a 20" hanger drop will be provided by Gorbel. Additional hanger points or longer drops can be provided at an additional charge.

Gorbel® Ceiling Mounted Work Station Bridge Crane Kits include: bridge, runways, hoist trolley, end trucks, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel runway lengths greater than 63' and all aluminum systems), festoon stack-up section, splice joints and hanger brackets. Sway bracing is required on all systems except flush mounted systems (by others). Sway bracing kits are available but not included in the crane kit. Hoist provided by others.

Dimensions are for reference only and are subject to change without notice.

1000# CAPACITY

CEILING MOUNTED WORK STATION BRIDGE CRANES

BRIDGE LENGTH (L)	RUNWAY LENGTH	MODEL NUMBER	TRACK MATL.	BRIDGE									RUNWAY				
				MAX L1	T1 in	L3 in	L4 ft	L6 in	H3 in	H3A in	H4 in	H2 in	H1 in	L7 in	L8 in	HANGERS (See Note)*	
8'	11'-6"	GLC1000-8 (S or AL)-11.5	Steel	6'	3 1/8	7 7/8	6'-6"	10 13/16	10 3/16	14 1/8	7 5/8	3 1/16	-	9	15	6 @ 1,462#	
		GLCS1000-8 (S or AL)-11.5	Steel	20'	3 1/8	7 7/8	6'-6"	10 13/16	18 3/16	22 1/8	7 5/8	3 1/16	11 1/16	9	15	4 @ 1,670#	
		AL1000-8-11.5	Alum	20'	2 5/8	7 13/16	6'-6"	13 1/2	22 1/16	-	7 3/4	5 1/8	-	13	14 15/16	4 @ 1,585#	
	23'	GLC1000-8 (S or AL)-23	Steel	6'	3 1/8	7 7/8	6'-6"	10 13/16	10 3/16	14 1/8	7 5/8	3 1/16	-	9	15	10 @ 1,462#	
		GLCS1000-8 (S or AL)-23	Steel	20'	3 1/8	7 7/8	6'-6"	10 13/16	18 3/16	22 1/8	7 5/8	3 1/16	11 1/16	9	15	4 @ 1,670#	
		AL1000-8-23	Alum	20'	2 5/8	7 13/16	6'-6"	13 1/2	22 1/16	-	7 3/4	5 1/8	-	26	14 15/16	4 @ 1,585#	
	28'	GLCSL1000-8 (S or AL)-28	Steel	25'	3 1/8	7 7/8	6'-6"	10 13/16	21 1/16	25	7 5/8	3 1/16	13 15/16	13	15	4 @ 1,777#	
	33'	GLC1000-8 (S or AL)-33	Steel	6'	3 1/8	7 7/8	6'-6"	10 13/16	10 3/16	14 1/8	7 5/8	3 1/16	-	13	15	14 @ 1,462#	
		GLCS1000-8 (S or AL)-33	Steel	20'	3 1/8	7 7/8	6'-6"	10 13/16	18 3/16	22 1/8	7 5/8	3 1/16	11 1/16	13	15	6 @ 1,670#	
		AL1000-8-33	Alum	20'	2 5/8	7 13/16	6'-6"	13 1/2	22 1/16	-	7 3/4	5 1/8	-	39	14 15/16	6 @ 1,585#	
	34'	GLCSLX1000-8 (S or AL)-34	Steel	30'	3 1/8	7 7/8	6'-6"	10 13/16	24 3/16	28 1/8	7 5/8	3 1/16	17 1/16	13	15	4 @ 1,949	
	43'	GLC1000-8 (S or AL)-43	Steel	6'	3 1/8	7 7/8	6'-6"	10 13/16	10 3/16	14 1/8	7 5/8	3 1/16	-	19	15	18 @ 1,462#	
		GLCS1000-8 (S or AL)-43	Steel	20'	3 1/8	7 7/8	6'-6"	10 13/16	18 3/16	22 1/8	7 5/8	3 1/16	11 1/16	19	15	6 @ 1,670#	
		AL1000-8-43	Alum	20'	2 5/8	7 13/16	6'-6"	13 1/2	22 1/16	-	7 3/4	5 1/8	-	49	14 15/16	6 @ 1,585#	
	53'	GLC1000-8 (S or AL)-53	Steel	6'	3 1/8	7 7/8	6'-6"	10 13/16	10 3/16	14 1/8	7 5/8	3 1/16	-	19	15	22 @ 1,462#	
		GLCS1000-8 (S or AL)-53	Steel	20'	3 1/8	7 7/8	6'-6"	10 13/16	18 3/16	22 1/8	7 5/8	3 1/16	11 1/16	19	15	8 @ 1,670#	
		AL1000-8-53	Alum	20'	2 5/8	7 13/16	6'-6"	13 1/2	22 1/16	-	7 3/4	5 1/8	-	53	14 15/16	8 @ 1,585#	
	GLCSL1000-8 (S or AL)-53	Steel	25'	3 1/8	7 7/8	6'-6"	10 13/16	21 1/16	25	7 5/8	3 1/16	13 15/16	19	15	6 @ 1,777#		
	63'	GLC1000-8 (S or AL)-63	Steel	6'	3 1/8	7 7/8	6'-6"	10 13/16	10 3/16	14 1/8	7 5/8	3 1/16	-	26	15	26 @ 1,462#	
		GLCS1000-8 (S or AL)-63	Steel	20'	3 1/8	7 7/8	6'-6"	10 13/16	18 3/16	22 1/8	7 5/8	3 1/16	11 1/16	26	15	8 @ 1,670#	
AL1000-8-63		Alum	20'	2 5/8	7 13/16	6'-6"	13 1/2	22 1/16	-	7 3/4	5 1/8	-	53	14 15/16	8 @ 1,585#		
64'	GLCSLX1000-8 (S or AL)-64	Steel	30'	3 1/8	7 7/8	6'-6"	13 1/2	24 3/16	28 1/8	7 5/8	3 1/16	17 1/16	54	15	6 @ 1,949#		
78'	GLCSL1000-8 (S or AL)-78	Steel	25'	3 1/8	7 7/8	6'-6"	13 1/2	21 1/16	25	7 5/8	3 1/16	13 15/16	54	15	8 @ 1,777#		
83'	GLC1000-8 (S or AL)-83	Steel	6'	3 1/8	7 7/8	6'-6"	13 1/2	10 3/16	14 1/8	7 5/8	3 1/16	-	54	15	34 @ 1,462#		
	GLCS1000-8 (S or AL)-83	Steel	20'	3 1/8	7 7/8	6'-6"	13 1/2	18 3/16	22 1/8	7 5/8	3 1/16	11 1/16	54	15	10 @ 1,670#		
	AL1000-8-83	Alum	20'	2 5/8	7 13/16	6'-6"	13 1/2	22 1/16	-	7 3/4	5 1/8	-	53	14 15/16	10 @ 1,585#		
94'	GLCSLX-8 (S or AL)-94	Steel	30'	3 1/8	7 7/8	6'-6"	13 1/2	24 3/16	28 1/8	7 5/8	3 1/16	17 1/16	54	15	8 @ 1,949#		
103'	GLC1000-8 (S or AL)-103	Steel	6'	3 1/8	7 7/8	6'-6"	13 1/2	10 3/16	14 1/8	7 5/8	3 1/16	-	54	15	42 @ 1,462#		
	GLCS1000-8 (S or AL)-103	Steel	20'	3 1/8	7 7/8	6'-6"	13 1/2	18 3/16	22 1/8	7 5/8	3 1/16	11 1/16	54	15	12 @ 1,670#		
	AL1000-8-103	Alum	20'	2 5/8	7 13/16	6'-6"	13 1/2	22 1/16	-	7 3/4	5 1/8	-	53	14 15/16	12 @ 1,585#		
GLCSL1000-8 (S or AL)-103	Steel	25'	3 1/8	7 7/8	6'-6"	13 1/2	21 1/16	25	7 5/8	3 1/16	13 15/16	54	15	10 @ 1,777#			
124'	GLCSLX1000-8 (S or AL)-124	Steel	30'	3 1/8	7 7/8	6'-6"	13 1/2	24 3/16	28 1/8	7 5/8	3 1/16	17 1/16	54	15	10 @ 1,949#		
10'	11'-6"	GLC1000-10 (S or AL)-11.5	Steel	6'	3 1/8	7 7/8	8'-0"	12 13/16	10 3/16	14 1/8	7 5/8	3 1/16	-	9	15	6 @ 1,468#	
		GLCS1000-10 (S or AL)-11.5	Steel	20'	3 1/8	7 7/8	8'-0"	12 13/16	18 3/16	22 1/8	7 5/8	3 1/16	11 1/16	9	15	4 @ 1,676#	
		AL1000-10-11.5	Alum	20'	2 5/8	7 13/16	8'-0"	16 7/8	22 1/16	-	13 1/8	10 1/2	-	13	14 15/16	4 @ 1,604#	
	23'	GLC1000-10 (S or AL)-23	Steel	6'	3 1/8	7 7/8	8'-0"	12 13/16	10 3/16	14 1/8	7 5/8	3 1/16	-	9	15	10 @ 1,468#	
		GLCS1000-10 (S or AL)-23	Steel	20'	3 1/8	7 7/8	8'-0"	12 13/16	18 3/16	22 1/8	7 5/8	3 1/16	11 1/16	9	15	4 @ 1,676#	
		AL1000-10-23	Alum	20'	2 5/8	7 13/16	8'-0"	16 7/8	22 1/16	-	13 1/8	10 1/2	-	26	14 15/16	4 @ 1,604#	
	28'	GLCSL1000-10 (S or AL)-28	Steel	25'	3 1/8	7 7/8	8'-0"	12 13/16	21 1/16	25	7 5/8	3 1/16	13 15/16	13	15	4 @ 1,783#	
	33'	GLC1000-10 (S or AL)-33	Steel	6'	3 1/8	7 7/8	8'-0"	12 13/16	10 3/16	14 1/8	7 5/8	3 1/16	-	13	15	14 @ 1,468#	
		GLCS1000-10 (S or AL)-33	Steel	20'	3 1/8	7 7/8	8'-0"	12 13/16	18 3/16	22 1/8	7 5/8	3 1/16	11 1/16	13	15	6 @ 1,676#	
		AL1000-10-33	Alum	20'	2 5/8	7 13/16	8'-0"	16 7/8	22 1/16	-	13 1/8	10 1/2	-	39	14 15/16	6 @ 1,604#	
	34'	GLCSLX1000-10 (S or AL)-34	Steel	30'	3 1/8	7 7/8	8'-0"	12 13/16	24 3/16	28 1/8	7 5/8	3 1/16	17 1/16	13	15	4 @ 1,955#	
	43'	GLC1000-10 (S or AL)-43	Steel	6'	3 1/8	7 7/8	8'-0"	12 13/16	10 3/16	14 1/8	7 5/8	3 1/16	-	19	15	18 @ 1,468#	
		GLCS1000-10 (S or AL)-43	Steel	20'	3 1/8	7 7/8	8'-0"	12 13/16	18 3/16	22 1/8	7 5/8	3 1/16	11 1/16	19	15	6 @ 1,676#	
		AL1000-10-43	Alum	20'	2 5/8	7 13/16	8'-0"	16 7/8	22 1/16	-	13 1/8	10 1/2	-	49	14 15/16	6 @ 1,604#	
	53'	GLC1000-10 (S or AL)-53	Steel	6'	3 1/8	7 7/8	8'-0"	12 13/16	10 3/16	14 1/8	7 5/8	3 1/16	-	19	15	22 @ 1,468#	
		GLCS1000-10 (S or AL)-53	Steel	20'	3 1/8	7 7/8	8'-0"	12 13/16	18 3/16	22 1/8	7 5/8	3 1/16	11 1/16	19	15	8 @ 1,676#	
		AL1000-10-53	Alum	20'	2 5/8	7 13/16	8'-0"	16 7/8	22 1/16	-	13 1/8	10 1/2	-	53	14 15/16	8 @ 1,604#	
	GLCSL1000-10 (S or AL)-53	Steel	25'	3 1/8	7 7/8	8'-0"	12 13/16	21 1/16	25	7 5/8	3 1/16	13 15/16	19	15	6 @ 1,783#		
	63'	GLC1000-10 (S or AL)-63	Steel	6'	3 1/8	7 7/8	8'-0"	12 13/16	10 3/16	14 1/8	7 5/8	3 1/16	-	26	15	26 @ 1,468#	
		GLCS1000-10 (S or AL)-63	Steel	20'	3 1/8	7 7/8	8'-0"	12 13/16	18 3/16	22 1/8	7 5/8	3 1/16	11 1/16	26	15	8 @ 1,676#	
AL1000-10-63		Alum	20'	2 5/8	7 13/16	8'-0"	16 7/8	22 1/16	-	13 1/8	10 1/2	-	53	14 15/16	8 @ 1,604#		
64'	GLCSLX1000-10 (S or AL)-64	Steel	30'	3 1/8	7 7/8	8'-0"	16 7/8	24 3/16	28 1/8	7 5/8	3 1/16	17 1/16	54	15	6 @ 1,955#		
78'	GLCSL1000-10 (S or AL)-78	Steel	25'	3 1/8	7 7/8	8'-0"	16 7/8	21 1/16	25	7 5/8	3 1/16	13 15/16	54	15	8 @ 1,783#		
83'	GLC1000-10 (S or AL)-83	Steel	6'	3 1/8	7 7/8	8'-0"	16 7/8	10 3/16	14 1/8	7 5/8	3 1/16	-	54	15	34 @ 1,468#		
	GLCS1000-10 (S or AL)-83	Steel	20'	3 1/8	7 7/8	8'-0"	16 7/8	18 3/16	22 1/8	7 5/8	3 1/16	11 1/16	54	15	10 @ 1,676#		
	AL1000-10-83	Alum	20'	2 5/8	7 13/16	8'-0"	16 7/8	22 1/16	-	13 1/8	10 1/2	-	53	14 15/16	10 @ 1,604#		
94'	GLCSLX1000-10 (S or AL)-94	Steel	30'	3 1/8	7 7/8	8'-0"	16 7/8	24 3/16	28 1/8	7 5/8	3 1/16	17 1/16	54	15	8 @ 1,955#		
103'	GLC1000-10 (S or AL)-103	Steel	6'	3 1/8	7 7/8	8'-0"	16 7/8	10 3/16	14 1/8	7 5/8	3 1/16	-	54	15	42 @ 1,468#		
	GLCS1000-10 (S or AL)-103	Steel	20'	3 1/8	7 7/8	8'-0"	16 7/8	18 3/16	22 1/8	7 5/8	3 1/16	11 1/16	54	15	12 @ 1,676#		
	AL1000-10-103	Alum	20'	2 5/8	7 13/16	8'-0"	16 7/8	22 1/16	-	13 1/8	10 1/2	-	53	14 15/16	12 @ 1,604#		
GLCSL1000-10 (S or AL)-103	Steel	25'	3 1/8	7 7/8	8'-0"	16 7/8	21 1/16	25	7 5/8	3 1/16	13 15/16	54	15	10 @ 1,783#			
124'	GLCSLX1000-10 (S or AL)-124	Steel	30'	3 1/8	7 7/8	8'-0"	16 7/8	24 3/16	28 1/8	7 5/8	3 1/16	17 1/16	54	15	10 @ 1,955#		

CEILING MOUNTED WORK STATION BRIDGE CRANES

BRIDGE LENGTH (L)	RUNWAY LENGTH	MODEL NUMBER	TRACK MATL.	BRIDGE								RUNWAY				
				MAX L1	T1 in	L3 in	L4 ft	L6 in	H3 in	H3A in	H4 in	H2 in	H1 in	L7 in	L8 in	HANGERS (See Note)*
15'	23'	GLC1000-15 (S or AL)-23	Steel	6'	3 1/8	7 7/8	13'-0"	16 13/16	10 3/16	14 1/8	14 1/8	3 1/16	-	9	15	10 @ 1,517#
		GLCS1000-15 (S or AL)-23	Steel	20'	3 1/8	7 7/8	13'-0"	16 13/16	18 3/16	22 1/8	14 1/8	3 1/16	11 1/16	9	15	4 @ 1,725#
		AL1000-15-23	Alum	20'	2 5/8	7 13/16	13'-0"	23 9/16	22 1/16	-	13 1/8	10 1/2	-	26	14 15/16	4 @ 1,626#
	28'	GLCSL1000-15 (S or AL)-28	Steel	25'	3 1/8	7 7/8	13'-0"	16 13/16	21 1/16	25	14 1/8	3 1/16	13 15/16	13	15	4 @ 1,832#
		GLC1000-15 (S or AL)-33	Steel	6'	3 1/8	7 7/8	13'-0"	16 13/16	10 3/16	14 1/8	14 1/8	3 1/16	-	13	15	14 @ 1,517#
	33'	GLCS1000-15 (S or AL)-33	Steel	20'	3 1/8	7 7/8	13'-0"	16 13/16	18 3/16	22 1/8	14 1/8	3 1/16	11 1/16	13	15	6 @ 1,725#
		AL1000-15-33	Alum	20'	2 5/8	7 13/16	13'-0"	23 9/16	22 1/16	-	13 1/8	10 1/2	-	39	14 15/16	6 @ 1,626#
		GLCSLX1000-15 (S or AL)-34	Steel	30'	3 1/8	7 7/8	13'-0"	16 13/16	24 3/16	28 1/8	14 1/8	3 1/16	17 1/16	13	15	4 @ 2,004#
	43'	GLC1000-15 (S or AL)-43	Steel	6'	3 1/8	7 7/8	13'-0"	16 13/16	10 3/16	14 1/8	14 1/8	3 1/16	-	19	15	18 @ 1,517#
		GLCS1000-15 (S or AL)-43	Steel	20'	3 1/8	7 7/8	13'-0"	16 13/16	18 3/16	22 1/8	14 1/8	3 1/16	11 1/16	19	15	6 @ 1,725#
		AL1000-15-43	Alum	20'	2 5/8	7 13/16	13'-0"	23 9/16	22 1/16	-	13 1/8	10 1/2	-	49	14 15/16	6 @ 1,626#
	53'	GLC1000-15 (S or AL)-53	Steel	6'	3 1/8	7 7/8	13'-0"	16 13/16	10 3/16	14 1/8	14 1/8	3 1/16	-	19	15	22 @ 1,517#
		GLCS1000-15 (S or AL)-53	Steel	20'	3 1/8	7 7/8	13'-0"	16 13/16	18 3/16	22 1/8	14 1/8	3 1/16	11 1/16	19	15	8 @ 1,725#
		AL1000-15-53	Alum	20'	2 5/8	7 13/16	13'-0"	23 9/16	22 1/16	-	13 1/8	10 1/2	-	53	14 15/16	8 @ 1,626#
		GLCSL1000-15 (S or AL)-53	Steel	25'	3 1/8	7 7/8	13'-0"	16 13/16	22 1/16	25	14 1/8	3 1/16	13 15/16	19	15	6 @ 1,832#
	63'	GLC1000-15 (S or AL)-63	Steel	6'	3 1/8	7 7/8	13'-0"	16 13/16	10 3/16	14 1/8	14 1/8	3 1/16	-	26	15	26 @ 1,517#
		GLCS1000-15 (S or AL)-63	Steel	20'	3 1/8	7 7/8	13'-0"	16 13/16	18 3/16	22 1/8	14 1/8	3 1/16	11 1/16	26	15	8 @ 1,725#
	64'	AL1000-15-63	Alum	20'	2 5/8	7 13/16	13'-0"	23 9/16	22 1/16	-	13 1/8	10 1/2	-	53	14 15/16	8 @ 1,626#
		GLCSLX1000-15 (S or AL)-64	Steel	30'	3 1/8	7 7/8	13'-0"	23 9/16	24 3/16	28 1/8	14 1/8	3 1/16	17 1/16	54	15	6 @ 2,004#
	78'	GLCSL1000-15 (S or AL)-78	Steel	25'	3 1/8	7 7/8	13'-0"	23 9/16	22 1/16	25	14 1/8	3 1/16	13 15/16	54	15	8 @ 1,832#
		GLC1000-15 (S or AL)-83	Steel	6'	3 1/8	7 7/8	13'-0"	23 9/16	10 3/16	14 1/8	14 1/8	3 1/16	-	54	15	34 @ 1,517#
20'	83'	GLCS1000-15 (S or AL)-83	Steel	20'	3 1/8	7 7/8	13'-0"	23 9/16	18 3/16	22 1/8	14 1/8	3 1/16	11 1/16	54	15	10 @ 1,725#
		AL1000-15-83	Alum	20'	2 5/8	7 13/16	13'-0"	23 9/16	22 1/16	-	13 1/8	10 1/2	-	53	14 15/16	10 @ 1,626#
		GLCSLX1000-15 (S or AL)-94	Steel	30'	3 1/8	7 7/8	13'-0"	23 9/16	24 3/16	28 1/8	14 1/8	3 1/16	17 1/16	54	15	8 @ 2,004#
	103'	GLC1000-15 (S or AL)-103	Steel	6'	3 1/8	7 7/8	13'-0"	23 9/16	10 3/16	14 1/8	14 1/8	3 1/16	-	54	15	42 @ 1,517#
		GLCS1000-15 (S or AL)-103	Steel	20'	3 1/8	7 7/8	13'-0"	23 9/16	18 3/16	22 1/8	14 1/8	3 1/16	11 1/16	54	15	12 @ 1,725#
		AL1000-15-103	Alum	20'	2 5/8	7 13/16	13'-0"	23 9/16	22 1/16	-	13 1/8	10 1/2	-	53	14 15/16	12 @ 1,626#
		GLCSL1000-15 (S or AL)-103	Steel	25'	3 1/8	7 7/8	13'-0"	23 9/16	22 1/16	25	14 1/8	3 1/16	13 15/16	54	15	10 @ 1,832#
	124'	GLCSLX1000-15 (S or AL)-124	Steel	30'	3 1/8	7 7/8	13'-0"	23 9/16	24 3/16	28 1/8	14 1/8	3 1/16	17 1/16	54	15	10 @ 2,004#
		GLC1000-20 (S or AL)-23	Steel	6'	3 1/8	7 7/8	18'-0"	18 13/16	10 3/16	14 1/8	14 1/8	3 1/16	-	9	15	10 @ 1,548#
	23'	GLCS1000-20 (S or AL)-23	Steel	20'	3 1/8	7 7/8	18'-0"	18 13/16	18 3/16	22 1/8	14 1/8	3 1/16	11 1/16	9	15	4 @ 1,756#
		AL1000-20-23	Alum	20'	2 5/8	7 13/16	18'-0"	26 15/16	22 1/16	-	13 1/8	10 1/2	-	26	14 15/16	4 @ 1,648#
		GLCSL1000-20 (S or AL)-28	Steel	25'	3 1/8	7 7/8	18'-0"	18 13/16	21 1/16	25	14 1/8	3 1/16	13 15/16	13	15	4 @ 1,863#
	33'	GLC1000-20 (S or AL)-33	Steel	6'	3 1/8	7 7/8	18'-0"	18 13/16	10 3/16	14 1/8	14 1/8	3 1/16	-	13	15	14 @ 1,548#
		GLCS1000-20 (S or AL)-33	Steel	20'	3 1/8	7 7/8	18'-0"	18 13/16	18 3/16	22 1/8	14 1/8	3 1/16	11 1/16	13	15	6 @ 1,756#
	34'	AL1000-20-33	Alum	20'	2 5/8	7 13/16	18'-0"	26 15/16	22 1/16	-	13 1/8	10 1/2	-	39	14 15/16	6 @ 1,648#
		GLCSLX1000-20 (S or AL)-34	Steel	30'	3 1/8	7 7/8	18'-0"	18 13/16	24 3/16	28 1/8	14 1/8	3 1/16	17 1/16	13	15	4 @ 2,035#
		GLC1000-20 (S or AL)-43	Steel	6'	3 1/8	7 7/8	18'-0"	18 13/16	10 3/16	14 1/8	14 1/8	3 1/16	-	19	15	18 @ 1,548#
	43'	GLCS1000-20 (S or AL)-43	Steel	20'	3 1/8	7 7/8	18'-0"	18 13/16	18 3/16	22 1/8	14 1/8	3 1/16	11 1/16	19	15	6 @ 1,756#
		AL1000-20-43	Alum	20'	2 5/8	7 13/16	18'-0"	26 15/16	22 1/16	-	13 1/8	10 1/2	-	49	14 15/16	6 @ 1,648#
		GLCSL1000-20 (S or AL)-53	Steel	25'	3 1/8	7 7/8	18'-0"	18 13/16	21 1/16	25	14 1/8	3 1/16	13 15/16	19	15	4 @ 1,863#
	53'	GLC1000-20 (S or AL)-53	Steel	6'	3 1/8	7 7/8	18'-0"	18 13/16	10 3/16	14 1/8	14 1/8	3 1/16	-	19	15	22 @ 1,548#
		GLCS1000-20 (S or AL)-53	Steel	20'	3 1/8	7 7/8	18'-0"	18 13/16	18 3/16	22 1/8	14 1/8	3 1/16	11 1/16	19	15	8 @ 1,756#
		AL1000-20-53	Alum	20'	2 5/8	7 13/16	18'-0"	26 15/16	22 1/16	-	13 1/8	10 1/2	-	53	14 15/16	8 @ 1,648#
		GLCSL1000-20 (S or AL)-53	Steel	25'	3 1/8	7 7/8	18'-0"	18 13/16	21 1/16	25	14 1/8	3 1/16	13 15/16	19	15	6 @ 1,863#
	63'	GLC1000-20 (S or AL)-63	Steel	6'	3 1/8	7 7/8	18'-0"	18 13/16	10 3/16	14 1/8	14 1/8	3 1/16	-	26	15	26 @ 1,548#
		GLCS1000-20 (S or AL)-63	Steel	20'	3 1/8	7 7/8	18'-0"	18 13/16	18 3/16	22 1/8	14 1/8	3 1/16	11 1/16	26	15	8 @ 1,756#
	64'	AL1000-20-63	Alum	20'	2 5/8	7 13/16	18'-0"	26 15/16	22 1/16	-	13 1/8	10 1/2	-	53	14 15/16	8 @ 1,648#
		GLCSLX1000-20 (S or AL)-64	Steel	30'	3 1/8	7 7/8	18'-0"	26 15/16	24 3/16	28 1/8	14 1/8	3 1/16	17 1/16	54	15	6 @ 2,035#
	78'	GLCSL1000-20 (S or AL)-78	Steel	25'	3 1/8	7 7/8	18'-0"	26 15/16	21 1/16	25	14 1/8	3 1/16	13 15/16	54	15	8 @ 1,863#
		GLC1000-20 (S or AL)-83	Steel	6'	3 1/8	7 7/8	18'-0"	26 15/16	10 3/16	14 1/8	14 1/8	3 1/16	-	54	15	34 @ 1,548#
	83'	GLCS1000-20 (S or AL)-83	Steel	20'	3 1/8	7 7/8	18'-0"	26 15/16	18 3/16	22 1/8	14 1/8	3 1/16	11 1/16	54	15	10 @ 1,756#
		AL1000-20-83	Alum	20'	2 5/8	7 13/16	18'-0"	26 15/16	22 1/16	-	13 1/8	10 1/2	-	53	14 15/16	10 @ 1,648#
		GLCSLX1000-20 (S or AL)-94	Steel	30'	3 1/8	7 7/8	18'-0"	26 15/16	24 3/16	28 1/8	14 1/8	3 1/16	17 1/16	54	15	8 @ 2,035#
	103'	GLC1000-20 (S or AL)-103	Steel	6'	3 1/8	7 7/8	18'-0"	26 15/16	10 3/16	14 1/8	14 1/8	3 1/16	-	54	15	42 @ 1,548#
		GLCS1000-20 (S or AL)-103	Steel	20'	3 1/8	7 7/8	18'-0"	26 15/16	18 3/16	22 1/8	14 1/8	3 1/16	11 1/16	54	15	12 @ 1,756#
		AL1000-20-103	Alum	20'	2 5/8	7 13/16	18'-0"	26 15/16	22 1/16	-	13 1/8	10 1/2	-	53	14 15/16	12 @ 1,648#
		GLCSL1000-20 (S or AL)-103	Steel	25'	3 1/8	7 7/8	18'-0"	26 15/16	21 1/16	25	14 1/8	3 1/16	13 15/16	54	15	10 @ 1,863#
	124'	GLCSLX1000-20 (S or AL)-124	Steel	30'	3 1/8	7 7/8	18'-0"	26 15/16	24 3/16	28 1/8	14 1/8	3 1/16	17 1/16	54	15	10 @ 2,035#

*This column provides the total number of support hangers with the corresponding vertical load applied by each support hanger (in pounds) based on the "L1" dimensions shown. Up to a 20" hanger drop will be provided by Gorbel. Additional hanger points or longer drops can be provided at an additional charge.

Gorbel® Ceiling Mounted Work Station Bridge Crane Kits include: bridge, runways, hoist trolley, end trucks, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel runway lengths greater than 63' and all aluminum systems), festoon stack-up section, splice joints and hanger brackets. Sway bracing is required on all systems except flush mounted systems (by others). Sway bracing kits are available but not included in the crane kit. Hoist provided by others.

Dimensions are for reference only and are subject to change without notice.

1000# CAPACITY

CEILING MOUNTED WORK STATION BRIDGE CRANES

BRIDGE LENGTH (L)	RUNWAY LENGTH	MODEL NUMBER	TRACK MATL.	BRIDGE								H2 in	RUNWAY			
				MAX L1	T1 in	L3 in	L4 ft	L6 in	H3 in	H3A in	H4 in		H1 in	L7 in	L8 in	HANGERS (See Note)*
23'	23'	GLC1000-23 (S or AL)-23	Steel	6'	3 1/8	7 7/8	21'-0"	20 13/16	10 3/16	15 11/16	14 1/8	3 1/16	-	9	15	10 @ 1,566#
		GLCS1000-23 (S or AL)-23	Steel	20'	3 1/8	7 7/8	21'-0"	20 13/16	18 3/16	23 11/16	14 1/8	3 1/16	11 1/16	9	15	4 @ 1,774#
		AL1000-23-23	Alum	20'	2 5/8	7 13/16	20'-0"	30 1/4	22 1/16	-	13 1/8	10 1/2	-	26	14 15/16	4 @ 1,656#
	28'	GLCSL1000-23 (S or AL)-28	Steel	25'	3 1/8	7 7/8	21'-0"	20 13/16	21 1/16	26 9/16	14 1/8	3 1/16	13 15/16	13	15	4 @ 1,881#
		GLC1000-23 (S or AL)-33	Steel	6'	3 1/8	7 7/8	21'-0"	20 13/16	10 3/16	15 11/16	14 1/8	3 1/16	-	13	15	14 @ 1,566#
		GLCS1000-23 (S or AL)-33	Steel	20'	3 1/8	7 7/8	21'-0"	20 13/16	18 3/16	23 11/16	14 1/8	3 1/16	11 1/16	13	15	6 @ 1,774#
	33'	AL1000-23-33	Alum	20'	2 5/8	7 13/16	20'-0"	30 1/4	22 1/16	-	13 1/8	10 1/2	-	39	14 15/16	6 @ 1,656#
		GLCSLX1000-23 (S or AL)-34	Steel	30'	3 1/8	7 7/8	21'-0"	20 13/16	24 3/16	29 11/16	14 1/8	3 1/16	17 1/16	13	15	4 @ 2,053#
		GLC1000-23 (S or AL)-43	Steel	6'	3 1/8	7 7/8	21'-0"	20 13/16	10 3/16	15 11/16	14 1/8	3 1/16	-	19	15	18 @ 1,566#
	43'	GLCS1000-23 (S or AL)-43	Steel	20'	3 1/8	7 7/8	21'-0"	20 13/16	18 3/16	23 11/16	14 1/8	3 1/16	11 1/16	19	15	6 @ 1,774#
		AL1000-23-43	Alum	20'	2 5/8	7 13/16	20'-0"	30 1/4	22 1/16	-	13 1/8	10 1/2	-	49	14 15/16	6 @ 1,656#
		GLC1000-23 (S or AL)-53	Steel	6'	3 1/8	7 7/8	21'-0"	20 13/16	10 3/16	15 11/16	14 1/8	3 1/16	-	19	15	22 @ 1,566#
	53'	GLCS1000-23 (S or AL)-53	Steel	20'	3 1/8	7 7/8	21'-0"	20 13/16	18 3/16	23 11/16	14 1/8	3 1/16	11 1/16	19	15	8 @ 1,774#
		AL1000-23-53	Alum	20'	2 5/8	7 13/16	20'-0"	30 1/4	22 1/16	-	13 1/8	10 1/2	-	53	14 15/16	8 @ 1,656#
		GLCSL1000-23 (S or AL)-53	Steel	25'	3 1/8	7 7/8	21'-0"	20 13/16	21 1/16	26 9/16	14 1/8	3 1/16	13 15/16	19	15	6 @ 1,881#
	63'	GLC1000-23 (S or AL)-63	Steel	6'	3 1/8	7 7/8	21'-0"	20 13/16	10 3/16	15 11/16	14 1/8	3 1/16	-	26	15	26 @ 1,566#
GLCS1000-23 (S or AL)-63		Steel	20'	3 1/8	7 7/8	21'-0"	20 13/16	18 3/16	23 11/16	14 1/8	3 1/16	11 1/16	26	15	8 @ 1,774#	
AL1000-23-63		Alum	20'	2 5/8	7 13/16	20'-0"	30 1/4	22 1/16	-	13 1/8	10 1/2	-	53	14 15/16	8 @ 1,656#	
64'	GLCSLX1000-23 (S or AL)-64	Steel	30'	3 1/8	7 7/8	21'-0"	30 1/4	24 3/16	29 11/16	14 1/8	3 1/16	17 1/16	54	15	6 @ 2,053#	
	GLCSL1000-23 (S or AL)-78	Steel	25'	3 1/8	7 7/8	21'-0"	30 1/4	21 1/16	26 9/16	14 1/8	3 1/16	13 15/16	54	15	8 @ 1,881#	
	GLC1000-23 (S or AL)-83	Steel	6'	3 1/8	7 7/8	21'-0"	30 1/4	10 3/16	15 11/16	14 1/8	3 1/16	-	54	15	34 @ 1,566#	
83'	GLCS1000-23 (S or AL)-83	Steel	20'	3 1/8	7 7/8	21'-0"	30 1/4	18 3/16	23 11/16	14 1/8	3 1/16	11 1/16	54	15	10 @ 1,774#	
	AL1000-23-83	Alum	20'	2 5/8	7 13/16	20'-0"	30 1/4	22 1/16	-	13 1/8	10 1/2	-	53	14 15/16	10 @ 1,656#	
	GLCSLX-23 (S or AL)-94	Steel	30'	3 1/8	7 7/8	21'-0"	30 1/4	24 3/16	29 11/16	14 1/8	3 1/16	17 1/16	54	15	8 @ 2,053#	
103'	GLC1000-23 (S or AL)-103	Steel	6'	3 1/8	7 7/8	21'-0"	30 1/4	10 3/16	15 11/16	14 1/8	3 1/16	-	54	15	42 @ 1,566#	
	GLCS1000-23 (S or AL)-103	Steel	20'	3 1/8	7 7/8	21'-0"	30 1/4	18 3/16	23 11/16	14 1/8	3 1/16	11 1/16	54	15	12 @ 1,774#	
	AL1000-23-103	Alum	20'	2 5/8	7 13/16	20'-0"	30 1/4	22 1/16	-	13 1/8	10 1/2	-	53	14 15/16	12 @ 1,656#	
124'	GLCSL1000-23 (S or AL)-103	Steel	25'	3 1/8	7 7/8	21'-0"	30 1/4	21 1/16	26 9/16	14 1/8	3 1/16	13 15/16	54	15	10 @ 1,881#	
	GLCSLX1000-23 (S or AL)-124	Steel	30'	3 1/8	7 7/8	21'-0"	30 1/4	24 3/16	29 11/16	14 1/8	3 1/16	17 1/16	54	15	10 @ 2,053#	
	GLC1000-28 (S or AL)-23	Steel	6'	3 1/8	7 7/8	25'-0"	24 13/16	12 7/16	15 11/16	17	3 1/16	-	9	21 1/16	10 @ 1,614#	
28'	23'	GLCS1000-28 (S or AL)-23	Steel	20'	3 1/8	7 7/8	25'-0"	24 13/16	20 7/16	23 11/16	17	3 1/16	11 1/16	9	21 1/16	4 @ 1,821#
		AL1000-28-23	Alum	20'	2 5/8	7 13/16	25'-0"	37	23 5/8	-	15 1/4	12 5/8	-	26	21	4 @ 1,686#
		GLCSL1000-28 (S or AL)-28	Steel	25'	3 1/8	7 7/8	25'-0"	24 13/16	23 5/16	26 9/16	17	3 1/16	13 15/16	13	21 1/16	4 @ 1,928#
	33'	GLC1000-28 (S or AL)-33	Steel	6'	3 1/8	7 7/8	25'-0"	24 13/16	12 7/16	15 11/16	17	3 1/16	-	13	21 1/16	14 @ 1,614#
		GLCS1000-28 (S or AL)-33	Steel	20'	3 1/8	7 7/8	25'-0"	24 13/16	20 7/16	23 11/16	17	3 1/16	11 1/16	13	21 1/16	6 @ 1,821#
		AL1000-28-33	Alum	20'	2 5/8	7 13/16	25'-0"	37	23 5/8	-	15 1/4	12 5/8	-	30	21	6 @ 1,686#
	34'	GLCSLX1000-28 (S or AL)-34	Steel	30'	3 1/8	7 7/8	25'-0"	24 13/16	26 7/16	29 11/16	17	3 1/16	17 1/16	13	21 1/16	4 @ 2,100#
		GLC1000-28 (S or AL)-43	Steel	6'	3 1/8	7 7/8	25'-0"	24 13/16	12 7/16	15 11/16	17	3 1/16	-	19	21 1/16	18 @ 1,614#
		GLCS1000-28 (S or AL)-43	Steel	20'	3 1/8	7 7/8	25'-0"	24 13/16	20 7/16	23 11/16	17	3 1/16	11 1/16	19	21 1/16	6 @ 1,821#
	43'	AL1000-28-43	Alum	20'	2 5/8	7 13/16	25'-0"	37	23 5/8	-	15 1/4	12 5/8	-	49	21	6 @ 1,686#
		GLC1000-28 (S or AL)-53	Steel	6'	3 1/8	7 7/8	25'-0"	24 13/16	12 7/16	15 11/16	17	3 1/16	-	19	21 1/16	22 @ 1,614#
		GLCS1000-28 (S or AL)-53	Steel	20'	3 1/8	7 7/8	25'-0"	24 13/16	20 7/16	23 11/16	17	3 1/16	11 1/16	19	21 1/16	8 @ 1,821#
	53'	AL1000-28-53	Alum	20'	2 5/8	7 13/16	25'-0"	37	23 5/8	-	15 1/4	12 5/8	-	53	21	8 @ 1,686#
		GLCSL1000-28 (S or AL)-53	Steel	25'	3 1/8	7 7/8	25'-0"	24 13/16	23 5/16	26 9/16	17	3 1/16	13 15/16	19	21 1/16	6 @ 1,928#
		GLC1000-28 (S or AL)-63	Steel	6'	3 1/8	7 7/8	25'-0"	24 13/16	12 7/16	15 11/16	17	3 1/16	-	26	21 1/16	26 @ 1,614#
	63'	GLCS1000-28 (S or AL)-63	Steel	20'	3 1/8	7 7/8	25'-0"	24 13/16	20 7/16	23 11/16	17	3 1/16	11 1/16	26	21 1/16	8 @ 1,821#
AL1000-28-63		Alum	20'	2 5/8	7 13/16	25'-0"	37	23 5/8	-	15 1/4	12 5/8	-	53	21	8 @ 1,686#	
GLCSLX1000-28 (S or AL)-64		Steel	30'	3 1/8	7 7/8	25'-0"	37	26 7/16	29 11/16	17	3 1/16	17 1/16	54	21 1/16	6 @ 2,100#	
78'	GLCSL1000-28 (S or AL)-78	Steel	25'	3 1/8	7 7/8	25'-0"	37	23 5/16	26 9/16	17	3 1/16	13 15/16	54	21 1/16	8 @ 1,928#	
	GLC1000-28 (S or AL)-83	Steel	6'	3 1/8	7 7/8	25'-0"	37	12 7/16	15 11/16	17	3 1/16	-	54	21 1/16	34 @ 1,614#	
	GLCS1000-28 (S or AL)-83	Steel	20'	3 1/8	7 7/8	25'-0"	37	20 7/16	23 11/16	17	3 1/16	11 1/16	54	21 1/16	10 @ 1,821#	
83'	AL1000-28-83	Alum	20'	2 5/8	7 13/16	25'-0"	37	23 5/8	-	15 1/4	12 5/8	-	53	21	10 @ 1,686#	
	GLCSLX1000-28 (S or AL)-94	Steel	30'	3 1/8	7 7/8	25'-0"	37	26 7/16	29 11/16	17	3 1/16	17 1/16	54	21 1/16	8 @ 2,100#	
	GLC1000-28 (S or AL)-103	Steel	6'	3 1/8	7 7/8	25'-0"	37	12 7/16	15 11/16	17	3 1/16	-	54	21 1/16	42 @ 1,614#	
103'	GLCS1000-28 (S or AL)-103	Steel	20'	3 1/8	7 7/8	25'-0"	37	20 7/16	23 11/16	17	3 1/16	11 1/16	54	21 1/16	12 @ 1,821#	
	AL1000-28-103	Alum	20'	2 5/8	7 13/16	25'-0"	37	23 5/8	-	15 1/4	12 5/8	-	53	21	12 @ 1,686#	
	GLCSL1000-28 (S or AL)-103	Steel	25'	3 1/8	7 7/8	25'-0"	37	23 5/16	26 9/16	17	3 1/16	13 15/16	54	21 1/16	10 @ 1,928#	
124'	GLCSLX1000-28 (S or AL)-124	Steel	30'	3 1/8	7 7/8	25'-0"	37	26 7/16	29 11/16	17	3 1/16	17 1/16	54	21 1/16	10 @ 2,100#	

*This column provides the total number of support hangers with the corresponding vertical load applied by each support hanger (in pounds) based on the "L1" dimensions shown. Up to a 20" hanger drop will be provided by Gorbel. Additional hanger points or longer drops can be provided at an additional charge.

Gorbel® Ceiling Mounted Work Station Bridge Crane Kits include: bridge, runways, hoist trolley, end trucks, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel runway lengths greater than 63' and all aluminum systems), festoon stack-up section, splice joints and hanger brackets. Sway bracing is required on all systems except flush mounted systems (by others). Sway bracing kits are available but not included in the crane kit. Hoist provided by others.

Dimensions are for reference only and are subject to change without notice.

CEILING MOUNTED WORK STATION BRIDGE CRANES

BRIDGE LENGTH (L)	RUNWAY LENGTH	MODEL NUMBER	TRACK MATL.	BRIDGE								H2 in	RUNWAY				
				MAX L1	T1 in	L3 in	L4 ft	L6 in	H3 in	H3A in	H4 in		H1 in	L7 in	L8 in	HANGERS (See Note)*	
34'	28'	GLCSL1000-15 (S or AL)-28	Steel	25'	3 1/8	7 7/8	30'-0"	28 13/16	23 5/16	26 9/16	20 1/8	3 1/16	13 15/16	13	21 1/16	4 @ 2,014#	
	33'	GLC1000-15 (S or AL)-33	Steel	6'	3 1/8	7 7/8	30'-0"	28 13/16	12 7/16	15 11/16	20 1/8	3 1/16	-	13	21 1/16	14 @ 1,700#	
		GLCS1000-15 (S or AL)-33	Steel	20'	3 1/8	7 7/8	30'-0"	28 13/16	20 7/16	23 11/16	20 1/8	3 1/16	11 1/16	13	21 1/16	6 @ 1,907#	
		AL1000-15-33	Alum	20'	2 5/8	7 13/16	30'-0"	43 13/16	23 5/8	-	16 3/4	14 1/8	-	39	21	6 @ 1,732#	
	34'	GLCSLX1000-15 (S or AL)-34	Steel	30'	3 1/8	7 7/8	30'-0"	28 13/16	26 7/16	29 11/16	20 1/8	3 1/16	17 1/16	13	21 1/16	4 @ 2,187#	
	43'	GLC1000-15 (S or AL)-43	Steel	6'	3 1/8	7 7/8	30'-0"	28 13/16	12 7/16	15 11/16	20 1/8	3 1/16	-	19	21 1/16	18 @ 1,700#	
		GLCS1000-15 (S or AL)-43	Steel	20'	3 1/8	7 7/8	30'-0"	28 13/16	20 7/16	23 11/16	20 1/8	3 1/16	11 1/16	19	21 1/16	6 @ 1,907#	
		AL1000-15-43	Alum	20'	2 5/8	7 13/16	30'-0"	43 13/16	23 5/8	-	16 3/4	14 1/8	-	49	21	6 @ 1,732#	
	53'	GLC1000-15 (S or AL)-53	Steel	6'	3 1/8	7 7/8	30'-0"	28 13/16	12 7/16	15 11/16	20 1/8	3 1/16	-	19	21 1/16	22 @ 1,700#	
		GLCS1000-15 (S or AL)-53	Steel	20'	3 1/8	7 7/8	30'-0"	28 13/16	20 7/16	23 11/16	20 1/8	3 1/16	11 1/16	19	21 1/16	8 @ 1,907#	
		AL1000-15-53	Alum	20'	2 5/8	7 13/16	30'-0"	43 13/16	23 5/8	-	16 3/4	14 1/8	-	53	21	8 @ 1,732#	
		GLCSL1000-15 (S or AL)-53	Steel	25'	3 1/8	7 7/8	30'-0"	28 13/16	23 5/16	26 9/16	20 1/8	3 1/16	13 15/16	19	21 1/16	6 @ 2,014#	
	63'	GLC1000-15 (S or AL)-63	Steel	6'	3 1/8	7 7/8	30'-0"	28 13/16	12 7/16	15 11/16	20 1/8	3 1/16	-	26	21 1/16	26 @ 1,700#	
		GLCS1000-15 (S or AL)-63	Steel	20'	3 1/8	7 7/8	30'-0"	28 13/16	20 7/16	23 11/16	20 1/8	3 1/16	11 1/16	26	21 1/16	8 @ 1,907#	
		AL1000-15-63	Alum	20'	2 5/8	7 13/16	30'-0"	43 13/16	23 5/8	-	16 3/4	14 1/8	-	53	21	8 @ 1,732#	
	64'	GLCSLX1000-15 (S or AL)-64	Steel	30'	3 1/8	7 7/8	30'-0"	43 13/16	26 7/16	29 11/16	20 1/8	3 1/16	17 1/16	54	21 1/16	6 @ 2,187#	
78'	GLCSL1000-15 (S or AL)-78	Steel	25'	3 1/8	7 7/8	30'-0"	43 13/16	23 5/16	26 9/16	20 1/8	3 1/16	13 15/16	54	21 1/16	8 @ 2,014#		
83'	GLC1000-15 (S or AL)-83	Steel	6'	3 1/8	7 7/8	30'-0"	43 13/16	12 7/16	15 11/16	20 1/8	3 1/16	-	54	21 1/16	34 @ 1,700#		
	GLCS1000-15 (S or AL)-83	Steel	20'	3 1/8	7 7/8	30'-0"	43 13/16	20 7/16	23 11/16	20 1/8	3 1/16	11 1/16	54	21 1/16	10 @ 1,907#		
	AL1000-15-83	Alum	20'	2 5/8	7 13/16	30'-0"	43 13/16	23 5/8	-	16 3/4	14 1/8	-	53	21	10 @ 1,732#		
94'	GLCSLX15 (S or AL)-94	Steel	30'	3 1/8	7 7/8	30'-0"	43 13/16	26 7/16	29 11/16	20 1/8	3 1/16	17 1/16	54	21 1/16	8 @ 2,187#		
103'	GLC1000-15 (S or AL)-103	Steel	6'	3 1/8	7 7/8	30'-0"	43 13/16	12 7/16	15 11/16	20 1/8	3 1/16	-	54	21 1/16	42 @ 1,700#		
	GLCS1000-15 (S or AL)-103	Steel	20'	3 1/8	7 7/8	30'-0"	43 13/16	20 7/16	23 11/16	20 1/8	3 1/16	11 1/16	54	21 1/16	12 @ 1,907#		
	AL1000-15-103	Alum	20'	2 5/8	7 13/16	30'-0"	43 13/16	23 5/8	-	16 3/4	14 1/8	-	53	21	12 @ 1,732#		
	GLCSL1000-15 (S or AL)-103	Steel	25'	3 1/8	7 7/8	30'-0"	43 13/16	23 5/16	26 9/16	20 1/8	3 1/16	13 15/16	54	21 1/16	10 @ 2,014#		
124'	GLCSLX1000-15 (S or AL)-124	Steel	30'	3 1/8	7 7/8	30'-0"	43 13/16	26 7/16	29 11/16	20 1/8	3 1/16	17 1/16	54	21 1/16	10 @ 2,187#		

*This column provides the total number of support hangers with the corresponding vertical load applied by each support hanger (in pounds) based on the "L1" dimensions shown. Up to a 20" hanger drop will be provided by Gorbel. Additional hanger points or longer drops can be provided at an additional charge.

Gorbel® Ceiling Mounted Work Station Bridge Crane Kits include: bridge, runways, hoist trolley, end trucks, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel runway lengths greater than 63' and all aluminum systems), festoon stack-up section, splice joints and hanger brackets. Sway bracing is required on all systems except flush mounted systems (by others). Sway bracing kits are available but not included in the crane kit. Hoist provided by others.

Dimensions are for reference only and are subject to change without notice.

2000# CAPACITY

CEILING MOUNTED WORK STATION BRIDGE CRANES

BRIDGE LENGTH (L)	RUNWAY LENGTH	MODEL NUMBER	TRACK MATL.	BRIDGE								RUNWAY						
				MAX L1	T1 in	L3 in	L4 ft	L6 in	H3 in	H3A in	H4 in	H2 in	H1 in	L7 in	L8 in	HANGERS (See Note)*		
8'	11'-6"	GLC2000-8 (S or AL)-11.5	Steel	6'	2 7/8	8 1/16	6'-6"	11	11 1/8	15 9/16	8 7/8	3 1/2	-	9	16 1/16	6 @ 2,902#		
		GLCS2000-8 (S or AL)-11.5	Steel	20'	2 7/8	8 1/16	6'-6"	11	19 5/8	24 1/16	8 7/8	3 1/2	12	9	16 1/16	4 @ 3,185#		
		AL2000-8-11.5	Alum	20'	2 3/8	8	6'-6"	13 11/16	25 5/16	-	8 1/16	5 5/8	-	13	16 15/16	4 @ 3,026#		
	23'	GLC2000-8 (S or AL)-23	Steel	6'	2 7/8	8 1/16	6'-6"	11	11 1/8	15 9/16	8 7/8	3 1/2	-	9	16 1/16	10 @ 2,902#		
		GLCS2000-8 (S or AL)-23	Steel	20'	2 7/8	8 1/16	6'-6"	11	19 5/8	24 1/16	8 7/8	3 1/2	12	9	16 1/16	4 @ 3,185#		
		AL2000-8-23	Alum	20'	2 3/8	8	6'-6"	13 11/16	25 5/16	-	8 1/16	5 5/8	-	26	16 15/16	4 @ 3,026#		
	28'	GLCSL2000-8 (S or AL)-28	Steel	25'	2 7/8	8 1/16	6'-6"	11	23	27 7/16	8 7/8	3 1/2	15 3/8	13	16 1/16	4 @ 3,331#		
	33'	GLC2000-8 (S or AL)-33	Steel	6'	2 7/8	8 1/16	6'-6"	11	11 1/8	15 9/16	8 7/8	3 1/2	-	13	16 1/16	14 @ 2,902#		
		GLCS2000-8 (S or AL)-33	Steel	20'	2 7/8	8 1/16	6'-6"	11	19 5/8	24 1/16	8 7/8	3 1/2	12	13	16 1/16	6 @ 3,185#		
		AL2000-8-33	Alum	20'	2 3/8	8	6'-6"	13 11/16	25 5/16	-	8 1/16	5 5/8	-	39	16 15/16	6 @ 3,026#		
	34'	GLCSLX2000-8 (S or AL)-34	Steel	30'	2 7/8	8 1/16	6'-6"	11	25 5/8	30 1/16	8 7/8	3 1/2	18	13	16 1/16	4 @ 3,451#		
	43'	GLC2000-8 (S or AL)-43	Steel	6'	2 7/8	8 1/16	6'-6"	11	11 1/8	15 9/16	8 7/8	3 1/2	-	19	16 1/16	18 @ 2,902#		
		GLCS2000-8 (S or AL)-43	Steel	20'	2 7/8	8 1/16	6'-6"	11	19 5/8	24 1/16	8 7/8	3 1/2	12	19	16 1/16	6 @ 3,185#		
		AL2000-8-43	Alum	20'	2 3/8	8	6'-6"	13 11/16	25 5/16	-	8 1/16	5 5/8	-	49	16 15/16	6 @ 3,026#		
	53'	GLC2000-8 (S or AL)-53	Steel	6'	2 7/8	8 1/16	6'-6"	11	11 1/8	15 9/16	8 7/8	3 1/2	-	19	16 1/16	22 @ 2,902#		
		GLCS2000-8 (S or AL)-53	Steel	20'	2 7/8	8 1/16	6'-6"	11	19 5/8	24 1/16	8 7/8	3 1/2	12	19	16 1/16	8 @ 3,185#		
		AL2000-8-53	Alum	20'	2 3/8	8	6'-6"	13 11/16	25 5/16	-	8 1/16	5 5/8	-	53	16 15/16	8 @ 3,026#		
	GLCSL2000-8 (S or AL)-53	Steel	25'	2 7/8	8 1/16	6'-6"	11	23	27 7/16	8 7/8	3 1/2	15 3/8	19	16 1/16	6 @ 3,331#			
	63'	GLC2000-8 (S or AL)-63	Steel	6'	2 7/8	8 1/16	6'-6"	11	11 1/8	15 9/16	8 7/8	3 1/2	-	26	16 1/16	26 @ 2,902#		
		GLCS2000-8 (S or AL)-63	Steel	20'	2 7/8	8 1/16	6'-6"	11	19 5/8	24 1/16	8 7/8	3 1/2	12	26	16 1/16	8 @ 3,185#		
AL2000-8-63		Alum	20'	2 3/8	8	6'-6"	13 11/16	25 5/16	-	8 1/16	5 5/8	-	53	16 15/16	8 @ 3,026#			
64'	GLCSLX2000-8 (S or AL)-64	Steel	30'	2 7/8	8 1/16	6'-6"	13 11/16	25 5/8	30 1/16	8 7/8	3 1/2	18	54	16 1/16	6 @ 3,451#			
78'	GLCSL2000-8 (S or AL)-78	Steel	25'	2 7/8	8 1/16	6'-6"	13 11/16	23	27 7/16	8 7/8	3 1/2	15 3/8	54	16 1/16	8 @ 3,331#			
83'	GLC2000-8 (S or AL)-83	Steel	6'	2 7/8	8 1/16	6'-6"	13 11/16	11 1/8	15 9/16	8 7/8	3 1/2	-	54	16 1/16	34 @ 2,902#			
	GLCS2000-8 (S or AL)-83	Steel	20'	2 7/8	8 1/16	6'-6"	13 11/16	19 5/8	24 1/16	8 7/8	3 1/2	12	54	16 1/16	10 @ 3,185#			
	AL2000-8-83	Alum	20'	2 3/8	8	6'-6"	13 11/16	25 5/16	-	8 1/16	5 5/8	-	53	16 15/16	10 @ 3,026#			
94'	GLCSLX2000-8 (S or AL)-94	Steel	30'	2 7/8	8 1/16	6'-6"	13 11/16	25 5/8	30 1/16	8 7/8	3 1/2	18	54	16 1/16	8 @ 3,451#			
103'	GLC2000-8 (S or AL)-103	Steel	6'	2 7/8	8 1/16	6'-6"	13 11/16	11 1/8	15 9/16	8 7/8	3 1/2	-	54	16 1/16	42 @ 2,902#			
	GLCS2000-8 (S or AL)-103	Steel	20'	2 7/8	8 1/16	6'-6"	13 11/16	19 5/8	24 1/16	8 7/8	3 1/2	12	54	16 1/16	12 @ 3,185#			
	AL2000-8-103	Alum	20'	2 3/8	8	6'-6"	13 11/16	25 5/16	-	8 1/16	5 5/8	-	53	16 15/16	12 @ 3,026#			
GLCSL2000-8 (S or AL)-103	Steel	25'	2 7/8	8 1/16	6'-6"	13 11/16	23	27 7/16	8 7/8	3 1/2	15 3/8	54	16 1/16	10 @ 3,331#				
124'	GLCSLX2000-8 (S or AL)-124	Steel	30'	2 7/8	8 1/16	6'-6"	13 11/16	25 5/8	30 1/16	8 7/8	3 1/2	18	54	16 1/16	10 @ 3,451#			
10'	11'-6"	GLC2000-10 (S or AL)-11.5	Steel	6'	2 7/8	8 1/16	8'-0"	13	11 1/8	15 9/16	8 7/8	3 1/2	-	9	16 1/16	6 @ 2,913#		
		GLCS2000-10 (S or AL)-11.5	Steel	20'	2 7/8	8 1/16	8'-0"	13	19 5/8	24 1/16	8 7/8	3 1/2	12	9	16 1/16	4 @ 3,196#		
		AL2000-10-11.5	Alum	20'	2 3/8	8	8'-0"	17 1/16	25 5/16	-	13 3/8	11	-	13	16 15/16	4 @ 3,046#		
	23'	GLC2000-10 (S or AL)-23	Steel	6'	2 7/8	8 1/16	8'-0"	13	11 1/8	15 9/16	8 7/8	3 1/2	-	9	16 1/16	10 @ 2,913#		
		GLCS2000-10 (S or AL)-23	Steel	20'	2 7/8	8 1/16	8'-0"	13	19 5/8	24 1/16	8 7/8	3 1/2	12	9	16 1/16	4 @ 3,196#		
		AL2000-10-23	Alum	20'	2 3/8	8	8'-0"	17 1/16	25 5/16	-	13 3/8	11	-	26	16 15/16	4 @ 3,046#		
	28'	GLCSL2000-10 (S or AL)-28	Steel	25'	2 7/8	8 1/16	8'-0"	13	23	27 7/16	8 7/8	3 1/2	15 3/8	13	16 1/16	4 @ 3,342#		
	33'	GLC2000-10 (S or AL)-33	Steel	6'	2 7/8	8 1/16	8'-0"	13	11 1/8	15 9/16	8 7/8	3 1/2	-	13	16 1/16	14 @ 2,913#		
		GLCS2000-10 (S or AL)-33	Steel	20'	2 7/8	8 1/16	8'-0"	13	19 5/8	24 1/16	8 7/8	3 1/2	12	13	16 1/16	6 @ 3,196#		
		AL2000-10-33	Alum	20'	2 3/8	8	8'-0"	17 1/16	25 5/16	-	13 3/8	11	-	39	16 15/16	6 @ 3,046#		
	34'	GLCSLX2000-10 (S or AL)-34	Steel	30'	2 7/8	8 1/16	8'-0"	13	25 5/8	30 1/16	8 7/8	3 1/2	18	13	16 1/16	4 @ 3,462#		
	43'	GLC2000-10 (S or AL)-43	Steel	6'	2 7/8	8 1/16	8'-0"	13	11 1/8	15 9/16	8 7/8	3 1/2	-	19	16 1/16	18 @ 2,913#		
		GLCS2000-10 (S or AL)-43	Steel	20'	2 7/8	8 1/16	8'-0"	13	19 5/8	24 1/16	8 7/8	3 1/2	12	19	16 1/16	6 @ 3,196#		
		AL2000-10-43	Alum	20'	2 3/8	8	8'-0"	17 1/16	25 5/16	-	13 3/8	11	-	49	16 15/16	6 @ 3,046#		
	53'	GLC2000-10 (S or AL)-53	Steel	6'	2 7/8	8 1/16	8'-0"	13	11 1/8	15 9/16	8 7/8	3 1/2	-	19	16 1/16	22 @ 2,913#		
		GLCS2000-10 (S or AL)-53	Steel	20'	2 7/8	8 1/16	8'-0"	13	19 5/8	24 1/16	8 7/8	3 1/2	12	19	16 1/16	8 @ 3,196#		
		AL2000-10-53	Alum	20'	2 3/8	8	8'-0"	17 1/16	25 5/16	-	13 3/8	11	-	53	16 15/16	8 @ 3,046#		
	GLCSL2000-10 (S or AL)-53	Steel	25'	2 7/8	8 1/16	8'-0"	13	23	27 7/16	8 7/8	3 1/2	15 3/8	19	16 1/16	6 @ 3,342#			
	63'	GLC2000-10 (S or AL)-63	Steel	6'	2 7/8	8 1/16	8'-0"	13	11 1/8	15 9/16	8 7/8	3 1/2	-	26	16 1/16	26 @ 2,913#		
		GLCS2000-10 (S or AL)-63	Steel	20'	2 7/8	8 1/16	8'-0"	13	19 5/8	24 1/16	8 7/8	3 1/2	12	26	16 1/16	8 @ 3,196#		
AL2000-10-63		Alum	20'	2 3/8	8	8'-0"	17 1/16	25 5/16	-	13 3/8	11	-	53	16 15/16	8 @ 3,046#			
64'	GLCSLX2000-10 (S or AL)-64	Steel	30'	2 7/8	8 1/16	8'-0"	17 1/16	25 5/8	30 1/16	8 7/8	3 1/2	18	54	16 1/16	6 @ 3,462#			
78'	GLCSL2000-10 (S or AL)-78	Steel	25'	2 7/8	8 1/16	8'-0"	17 1/16	23	27 7/16	8 7/8	3 1/2	15 3/8	54	16 1/16	8 @ 3,342#			
83'	GLC2000-10 (S or AL)-83	Steel	6'	2 7/8	8 1/16	8'-0"	17 1/16	11 1/8	15 9/16	8 7/8	3 1/2	-	54	16 1/16	34 @ 2,913#			
	GLCS2000-10 (S or AL)-83	Steel	20'	2 7/8	8 1/16	8'-0"	17 1/16	19 5/8	24 1/16	8 7/8	3 1/2	12	54	16 1/16	10 @ 3,196#			
	AL2000-10-83	Alum	20'	2 3/8	8	8'-0"	17 1/16	25 5/16	-	13 3/8	11	-	53	16 15/16	10 @ 3,046#			
94'	GLCSLX2000-10 (S or AL)-94	Steel	30'	2 7/8	8 1/16	8'-0"	17 1/16	25 5/8	30 1/16	8 7/8	3 1/2	18	54	16 1/16	8 @ 3,462#			
103'	GLC2000-10 (S or AL)-103	Steel	6'	2 7/8	8 1/16	8'-0"	17 1/16	11 1/8	15 9/16	8 7/8	3 1/2	-	54	16 1/16	42 @ 2,913#			
	GLCS2000-10 (S or AL)-103	Steel	20'	2 7/8	8 1/16	8'-0"	17 1/16	19 5/8	24 1/16	8 7/8	3 1/2	12	54	16 1/16	12 @ 3,196#			
	AL2000-10-103	Alum	20'	2 3/8	8	8'-0"	17 1/16	25 5/16	-	13 3/8	11	-	53	16 15/16	12 @ 3,046#			
GLCSL2000-10 (S or AL)-103	Steel	25'	2 7/8	8 1/16	8'-0"	17 1/16	23	27 7/16	8 7/8	3 1/2	15 3/8	54	16 1/16	10 @ 3,342#				
124'	GLCSLX2000-10 (S or AL)-124	Steel	30'	2 7/8	8 1/16	8'-0"	17 1/16	25 5/8	30 1/16	8 7/8	3 1/2	18	54	16 1/16	10 @ 3,462#			

*This column provides the total number of support hangers with the corresponding vertical load applied by each support hanger (in pounds) based on the "L1" dimensions shown. Up to a 20" hanger drop will be provided by Gorbel. Additional hanger points or longer drops can be provided at an additional charge.

Gorbel® Ceiling Mounted Work Station Bridge Crane Kits include: bridge, runways, hoist trolley, end trucks, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel runway lengths greater than 63' and all aluminum systems), festoon stack-up section, splice joints and hanger brackets. Sway bracing is required on all systems except flush mounted systems (by others). Sway bracing kits are available but not included in the crane kit. Hoist provided by others.

Dimensions are for reference only and are subject to change without notice.

CEILING MOUNTED WORK STATION BRIDGE CRANES

BRIDGE LENGTH (L)	RUNWAY LENGTH	MODEL NUMBER	TRACK MATL.	BRIDGE								RUNWAY						
				MAX L1	T1 in	L3 in	L4 ft	L6 in	H3 in	H3A in	H4 in	H2 in	H1 in	L7 in	L8 in	HANGERS (See Note)*		
15'	23'	GLC2000-15 (S or AL)-23	Steel	6'	2 7/8	8 1/16	13'-0"	17	11 1/8	15 9/16	14 7/8	3 1/2	-	9	16 1/16	10 @ 2,965#		
		GLCS2000-15 (S or AL)-23	Steel	20'	2 7/8	8 1/16	13'-0"	17	19 5/8	24 1/16	14 7/8	3 1/2	12	9	16 1/16	4 @ 3,248#		
		AL2000-15-23	Alum	20'	2 3/8	8	13'-0"	23 3/4	25 5/16	-	13 3/8	11	-	26	16 15/16	4 @ 3,073#		
	28'	GLCSL2000-15 (S or AL)-28	Steel	25'	2 7/8	8 1/16	13'-0"	17	23	27 7/16	14 7/8	3 1/2	15 3/8	13	16 1/16	4 @ 3,394#		
		GLC2000-15 (S or AL)-33	Steel	6'	2 7/8	8 1/16	13'-0"	17	11 1/8	15 9/16	14 7/8	3 1/2	-	13	16 1/16	14 @ 2,965#		
		GLCS2000-15 (S or AL)-33	Steel	20'	2 7/8	8 1/16	13'-0"	17	19 5/8	24 1/16	14 7/8	3 1/2	12	13	16 1/16	6 @ 3,248#		
	33'	AL2000-15-33	Alum	20'	2 3/8	8	13'-0"	23 3/4	25 5/16	-	13 3/8	11	-	39	16 15/16	6 @ 3,073#		
		GLCSLX2000-15 (S or AL)-34	Steel	30'	2 7/8	8 1/16	13'-0"	17	25 5/8	30 1/16	14 7/8	3 1/2	18	13	16 1/16	4 @ 3,514#		
	43'	GLC2000-15 (S or AL)-43	Steel	6'	2 7/8	8 1/16	13'-0"	17	11 1/8	15 9/16	14 7/8	3 1/2	-	19	16 1/16	18 @ 2,965#		
		GLCS2000-15 (S or AL)-43	Steel	20'	2 7/8	8 1/16	13'-0"	17	19 5/8	24 1/16	14 7/8	3 1/2	12	19	16 1/16	6 @ 3,248#		
		AL2000-15-43	Alum	20'	2 3/8	8	13'-0"	23 3/4	25 5/16	-	13 3/8	11	-	49	16 15/16	6 @ 3,073#		
	53'	GLC2000-15 (S or AL)-53	Steel	6'	2 7/8	8 1/16	13'-0"	17	11 1/8	15 9/16	14 7/8	3 1/2	-	19	16 1/16	22 @ 2,965#		
		GLCS2000-15 (S or AL)-53	Steel	20'	2 7/8	8 1/16	13'-0"	17	19 5/8	24 1/16	14 7/8	3 1/2	12	19	16 1/16	8 @ 3,248#		
		AL2000-15-53	Alum	20'	2 3/8	8	13'-0"	23 3/4	25 5/16	-	13 3/8	11	-	53	16 15/16	8 @ 3,073#		
	63'	GLCSL2000-15 (S or AL)-53	Steel	25'	2 7/8	8 1/16	13'-0"	17	23	27 7/16	14 7/8	3 1/2	15 3/8	19	16 1/16	6 @ 3,394#		
		GLC2000-15 (S or AL)-63	Steel	6'	2 7/8	8 1/16	13'-0"	17	11 1/8	15 9/16	14 7/8	3 1/2	-	26	16 1/16	26 @ 2,965#		
		GLCS2000-15 (S or AL)-63	Steel	20'	2 7/8	8 1/16	13'-0"	17	19 5/8	24 1/16	14 7/8	3 1/2	12	26	16 1/16	8 @ 3,248#		
64'	AL2000-15-63	Alum	20'	2 3/8	8	13'-0"	23 3/4	25 5/16	-	13 3/8	11	-	53	16 15/16	8 @ 3,073#			
	GLCSLX2000-15 (S or AL)-64	Steel	30'	2 7/8	8 1/16	13'-0"	23 3/4	25 5/8	30 1/16	14 7/8	3 1/2	18	54	16 1/16	6 @ 3,514#			
	GLCSL2000-15 (S or AL)-78	Steel	25'	2 7/8	8 1/16	13'-0"	23 3/4	23	27 7/16	14 7/8	3 1/2	15 3/8	54	16 1/16	8 @ 3,394#			
83'	GLC2000-15 (S or AL)-83	Steel	6'	2 7/8	8 1/16	13'-0"	23 3/4	11 1/8	15 9/16	14 7/8	3 1/2	-	54	16 1/16	34 @ 2,965#			
	GLCS2000-15 (S or AL)-83	Steel	20'	2 7/8	8 1/16	13'-0"	23 3/4	19 5/8	24 1/16	14 7/8	3 1/2	12	54	16 1/16	10 @ 3,248#			
	AL2000-15-83	Alum	20'	2 3/8	8	13'-0"	23 3/4	25 5/16	-	13 3/8	11	-	53	16 15/16	10 @ 3,073#			
94'	GLCSLX-15 (S or AL)-94	Steel	30'	2 7/8	8 1/16	13'-0"	23 3/4	25 5/8	30 1/16	14 7/8	3 1/2	18	54	16 1/16	8 @ 3,514#			
	GLC2000-15 (S or AL)-103	Steel	6'	2 7/8	8 1/16	13'-0"	23 3/4	11 1/8	15 9/16	14 7/8	3 1/2	-	54	16 1/16	42 @ 2,965#			
	GLCS2000-15 (S or AL)-103	Steel	20'	2 7/8	8 1/16	13'-0"	23 3/4	19 5/8	24 1/16	14 7/8	3 1/2	12	54	16 1/16	12 @ 3,248#			
103'	AL2000-15-103	Alum	20'	2 3/8	8	13'-0"	23 3/4	25 5/16	-	13 3/8	11	-	53	16 15/16	12 @ 3,073#			
	GLCSL2000-15 (S or AL)-103	Steel	25'	2 7/8	8 1/16	13'-0"	23 3/4	23	27 7/16	14 7/8	3 1/2	15 3/8	54	16 1/16	10 @ 3,394#			
	GLCSLX2000-15 (S or AL)-124	Steel	30'	2 7/8	8 1/16	13'-0"	23 3/4	25 5/8	30 1/16	14 7/8	3 1/2	18	54	16 1/16	10 @ 3,514#			
20'	23'	GLC2000-20 (S or AL)-23	Steel	6'	2 7/8	8 1/16	18'-0"	19	11 1/8	15 9/16	14 7/8	3 1/2	-	9	16 1/16	10 @ 3,007#		
		GLCS2000-20 (S or AL)-23	Steel	20'	2 7/8	8 1/16	18'-0"	19	19 5/8	24 1/16	14 7/8	3 1/2	12	9	16 1/16	4 @ 3,290#		
		AL2000-20-23	Alum	20'	2 3/8	8	18'-0"	27 1/8	25 5/16	-	15 1/2	13 1/8	-	26	16 15/16	4 @ 3,105#		
	28'	GLCSL2000-20 (S or AL)-28	Steel	25'	2 7/8	8 1/16	18'-0"	19	23	27 7/16	14 7/8	3 1/2	15 3/8	13	16 1/16	4 @ 3,437#		
		GLC2000-20 (S or AL)-33	Steel	6'	2 7/8	8 1/16	18'-0"	19	11 1/8	15 9/16	14 7/8	3 1/2	-	13	16 1/16	14 @ 3,007#		
		GLCS2000-20 (S or AL)-33	Steel	20'	2 7/8	8 1/16	18'-0"	19	19 5/8	24 1/16	14 7/8	3 1/2	12	13	16 1/16	6 @ 3,290#		
	33'	AL2000-20-33	Alum	20'	2 3/8	8	18'-0"	27 1/8	25 5/16	-	15 1/2	13 1/8	-	39	16 15/16	6 @ 3,105#		
		GLCSLX2000-20 (S or AL)-34	Steel	30'	2 7/8	8 1/16	18'-0"	19	25 5/8	30 1/16	14 7/8	3 1/2	18	13	16 1/16	4 @ 3,556#		
	43'	GLC2000-20 (S or AL)-43	Steel	6'	2 7/8	8 1/16	18'-0"	19	11 1/8	15 9/16	14 7/8	3 1/2	-	19	16 1/16	18 @ 3,007#		
		GLCS2000-20 (S or AL)-43	Steel	20'	2 7/8	8 1/16	18'-0"	19	19 5/8	24 1/16	14 7/8	3 1/2	12	19	16 1/16	6 @ 3,290#		
		AL2000-20-43	Alum	20'	2 3/8	8	18'-0"	27 1/8	25 5/16	-	15 1/2	13 1/8	-	49	16 15/16	6 @ 3,105#		
	53'	GLC2000-20 (S or AL)-53	Steel	6'	2 7/8	8 1/16	18'-0"	19	11 1/8	15 9/16	14 7/8	3 1/2	-	19	16 1/16	22 @ 3,007#		
		GLCS2000-20 (S or AL)-53	Steel	20'	2 7/8	8 1/16	18'-0"	19	19 5/8	24 1/16	14 7/8	3 1/2	12	19	16 1/16	8 @ 3,290#		
		AL2000-20-53	Alum	20'	2 3/8	8	18'-0"	27 1/8	25 5/16	-	15 1/2	13 1/8	-	53	16 15/16	8 @ 3,105#		
	63'	GLCSL2000-20 (S or AL)-53	Steel	25'	2 7/8	8 1/16	18'-0"	19	23	27 7/16	14 7/8	3 1/2	15 3/8	19	16 1/16	6 @ 3,437#		
		GLC2000-20 (S or AL)-63	Steel	6'	2 7/8	8 1/16	18'-0"	19	11 1/8	15 9/16	14 7/8	3 1/2	-	26	16 1/16	26 @ 3,007#		
		GLCS2000-20 (S or AL)-63	Steel	20'	2 7/8	8 1/16	18'-0"	19	19 5/8	24 1/16	14 7/8	3 1/2	12	26	16 1/16	8 @ 3,290#		
64'	AL2000-20-63	Alum	20'	2 3/8	8	18'-0"	27 1/8	25 5/16	-	15 1/2	13 1/8	-	53	16 15/16	8 @ 3,105#			
	GLCSLX2000-20 (S or AL)-64	Steel	30'	2 7/8	8 1/16	18'-0"	27 1/8	25 5/8	30 1/16	14 7/8	3 1/2	18	54	16 1/16	6 @ 3,556#			
	GLCSL2000-20 (S or AL)-78	Steel	25'	2 7/8	8 1/16	18'-0"	27 1/8	23	27 7/16	14 7/8	3 1/2	15 3/8	54	16 1/16	8 @ 3,437#			
83'	GLC2000-20 (S or AL)-83	Steel	6'	2 7/8	8 1/16	18'-0"	27 1/8	11 1/8	15 9/16	14 7/8	3 1/2	-	54	16 1/16	34 @ 3,007#			
	GLCS2000-20 (S or AL)-83	Steel	20'	2 7/8	8 1/16	18'-0"	27 1/8	19 5/8	24 1/16	14 7/8	3 1/2	12	54	16 1/16	10 @ 3,290#			
	AL2000-20-83	Alum	20'	2 3/8	8	18'-0"	27 1/8	25 5/16	-	15 1/2	13 1/8	-	53	16 15/16	10 @ 3,105#			
94'	GLCSLX2000-20 (S or AL)-94	Steel	30'	2 7/8	8 1/16	18'-0"	27 1/8	25 5/8	30 1/16	14 7/8	3 1/2	18	54	16 1/16	8 @ 3,556#			
	GLC2000-20 (S or AL)-103	Steel	6'	2 7/8	8 1/16	18'-0"	27 1/8	11 1/8	15 9/16	14 7/8	3 1/2	-	54	16 1/16	42 @ 3,007#			
	GLCS2000-20 (S or AL)-103	Steel	20'	2 7/8	8 1/16	18'-0"	27 1/8	19 5/8	24 1/16	14 7/8	3 1/2	12	54	16 1/16	12 @ 3,290#			
103'	AL2000-20-103	Alum	20'	2 3/8	8	18'-0"	27 1/8	25 5/16	-	15 1/2	13 1/8	-	53	16 15/16	12 @ 3,105#			
	GLCSL2000-20 (S or AL)-103	Steel	25'	2 7/8	8 1/16	18'-0"	27 1/8	23	27 7/16	14 7/8	3 1/2	15 3/8	54	16 1/16	10 @ 3,437#			
	GLCSLX2000-20 (S or AL)-124	Steel	30'	2 7/8	8 1/16	18'-0"	27 1/8	25 5/8	30 1/16	14 7/8	3 1/2	18	54	16 1/16	10 @ 3,556#			

*This column provides the total number of support hangers with the corresponding vertical load applied by each support hanger (in pounds) based on the "L1" dimensions shown. Up to a 20" hanger drop will be provided by Gorbel. Additional hanger points or longer drops can be provided at an additional charge.

Gorbel® Ceiling Mounted Work Station Bridge Crane Kits include: bridge, runways, hoist trolley, end trucks, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel runway lengths greater than 63' and all aluminum systems), festoon stack-up section, splice joints and hanger brackets. Sway bracing is required on all systems except flush mounted systems (by others). Sway bracing kits are available but not included in the crane kit. Hoist provided by others.

Dimensions are for reference only and are subject to change without notice.

2000# CAPACITY

CEILING MOUNTED WORK STATION BRIDGE CRANES

BRIDGE LENGTH (L)	RUNWAY LENGTH	MODEL NUMBER	TRACK MATL.	BRIDGE								RUNWAY						
				MAX L1	T1 in	L3 in	L4 ft	L6 in	H3 in	H3A in	H4 in	H2 in	H1 in	L7 in	L8 in	HANGERS (See Note)*		
23'	23'	GLC2000-23 (S or AL)-23	Steel	6'	2 7/8	8 1/16	21'-0"	21	11 1/8	17 9/16	14 7/8	3 1/2	-	9	16 1/16	10 @ 3,033#		
		GLCS2000-23 (S or AL)-23	Steel	20'	2 7/8	8 1/16	21'-0"	21	19 5/8	26 1/6	14 7/8	3 1/2	12	9	16 1/16	4 @ 3,316#		
		AL2000-23-23	Alum	20'	2 3/8	8	20'-0"	30 7/16	25 5/16	-	15 1/2	13 1/8	-	26	16 15/16	4 @ 3,116#		
	28'	GLCSL2000-23 (S or AL)-28	Steel	25'	2 7/8	8 1/16	21'-0"	21	23	29 7/16	14 7/8	3 1/2	15 3/8	13	16 1/16	4 @ 3,462#		
		GLC2000-23 (S or AL)-33	Steel	6'	2 7/8	8 1/16	21'-0"	21	11 1/8	17 9/16	14 7/8	3 1/2	-	13	16 1/16	14 @ 3,033#		
		GLCS2000-23 (S or AL)-33	Steel	20'	2 7/8	8 1/16	21'-0"	21	19 5/8	26 1/6	14 7/8	3 1/2	12	13	16 1/16	6 @ 3,316#		
	33'	AL2000-23-33	Alum	20'	2 3/8	8	20'-0"	30 7/16	25 5/16	-	15 1/2	13 1/8	-	39	16 15/16	6 @ 3,116#		
		34'	GLCSLX2000-23 (S or AL)-34	Steel	30'	2 7/8	8 1/16	21'-0"	21	25 5/8	32 1/16	14 7/8	3 1/2	18	13	16 1/16	4 @ 3,582#	
			43'	GLC2000-23 (S or AL)-43	Steel	6'	2 7/8	8 1/16	21'-0"	21	11 1/8	17 9/16	14 7/8	3 1/2	-	19	16 1/16	18 @ 3,033#
	GLCS2000-23 (S or AL)-43			Steel	20'	2 7/8	8 1/16	21'-0"	21	19 5/8	26 1/6	14 7/8	3 1/2	12	19	16 1/16	6 @ 3,316#	
	AL2000-23-43	Alum		20'	2 3/8	8	20'-0"	30 7/16	25 5/16	-	15 1/2	13 1/8	-	49	16 15/16	6 @ 3,116#		
	53'	GLC2000-23 (S or AL)-53	Steel	6'	2 7/8	8 1/16	21'-0"	21	11 1/8	17 9/16	14 7/8	3 1/2	-	19	16 1/16	22 @ 3,033#		
		GLCS2000-23 (S or AL)-53	Steel	20'	2 7/8	8 1/16	21'-0"	21	19 5/8	26 1/6	14 7/8	3 1/2	12	19	16 1/16	8 @ 3,316#		
		AL2000-23-53	Alum	20'	2 3/8	8	20'-0"	30 7/16	25 5/16	-	15 1/2	13 1/8	-	53	16 15/16	8 @ 3,116#		
		GLCSL2000-23 (S or AL)-53	Steel	25'	2 7/8	8 1/16	21'-0"	21	23	29 7/16	14 7/8	3 1/2	15 3/8	19	16 1/16	6 @ 3,462#		
	63'	GLC2000-23 (S or AL)-63	Steel	6'	2 7/8	8 1/16	21'-0"	21	11 1/8	17 9/16	14 7/8	3 1/2	-	26	16 1/16	26 @ 3,033#		
		GLCS2000-23 (S or AL)-63	Steel	20'	2 7/8	8 1/16	21'-0"	21	19 5/8	26 1/6	14 7/8	3 1/2	12	26	16 1/16	8 @ 3,316#		
	64'	AL2000-23-63	Alum	20'	2 3/8	8	20'-0"	30 7/16	25 5/16	-	15 1/2	13 1/8	-	53	16 15/16	8 @ 3,116#		
GLCSLX2000-23 (S or AL)-64		Steel	30'	2 7/8	8 1/16	21'-0"	30 7/16	25 5/8	32 1/16	14 7/8	3 1/2	18	54	16 1/16	6 @ 3,582#			
78'	GLCSL2000-23 (S or AL)-78	Steel	25'	2 7/8	8 1/16	21'-0"	30 7/16	23	29 7/16	14 7/8	3 1/2	15 3/8	54	16 1/16	8 @ 3,462#			
	83'	GLC2000-23 (S or AL)-83	Steel	6'	2 7/8	8 1/16	21'-0"	30 7/16	11 1/8	17 9/16	14 7/8	3 1/2	-	54	16 1/16	34 @ 3,033#		
GLCS2000-23 (S or AL)-83		Steel	20'	2 7/8	8 1/16	21'-0"	30 7/16	19 5/8	26 1/6	14 7/8	3 1/2	12	54	16 1/16	10 @ 3,316#			
94'	AL2000-23-83	Alum	20'	2 3/8	8	20'-0"	30 7/16	25 5/16	-	15 1/2	13 1/8	-	53	16 15/16	10 @ 3,116#			
	GLCSLX23 (S or AL)-94	Steel	30'	2 7/8	8 1/16	21'-0"	30 7/16	25 5/8	32 1/16	14 7/8	3 1/2	18	54	16 1/16	8 @ 3,582#			
103'	GLC2000-23 (S or AL)-103	Steel	6'	2 7/8	8 1/16	21'-0"	30 7/16	11 1/8	17 9/16	14 7/8	3 1/2	-	54	16 1/16	42 @ 3,033#			
	GLCS2000-23 (S or AL)-103	Steel	20'	2 7/8	8 1/16	21'-0"	30 7/16	19 5/8	26 1/6	14 7/8	3 1/2	12	54	16 1/16	12 @ 3,316#			
	AL2000-23-103	Alum	20'	2 3/8	8	20'-0"	30 7/16	25 5/16	-	15 1/2	13 1/8	-	53	16 15/16	12 @ 3,116#			
	GLCSL2000-23 (S or AL)-103	Steel	25'	2 7/8	8 1/16	21'-0"	30 7/16	23	29 7/16	14 7/8	3 1/2	15 3/8	54	16 1/16	10 @ 3,462#			
124'	GLCSLX2000-23 (S or AL)-124	Steel	30'	2 7/8	8 1/16	21'-0"	30 7/16	25 5/8	32 1/16	14 7/8	3 1/2	18	54	16 1/16	10 @ 3,582#			
28'	23'	GLC2000-28 (S or AL)-23	Steel	6'	2 7/8	8 1/16	25'-0"	25	14 7/16	17 9/16	18 1/4	3 1/2	-	9	25 7/8	10 @ 3,097#		
		GLCS2000-28 (S or AL)-23	Steel	20'	2 7/8	8 1/16	25'-0"	25	22 15/16	26 1/6	18 1/4	3 1/2	12	9	25 7/8	4 @ 3,380#		
		AL2000-28-23	Alum	20'	2 3/8	8	25'-0"	37 3/16	27 1/2	-	17	14 5/8	-	26	21	4 @ 3,162#		
	28'	GLCSL2000-28 (S or AL)-28	Steel	25'	2 7/8	8 1/16	25'-0"	25	26 5/16	29 7/16	18 1/4	3 1/2	15 3/8	13	25 7/8	4 @ 3,527#		
		33'	GLC2000-28 (S or AL)-33	Steel	6'	2 7/8	8 1/16	25'-0"	25	14 7/16	17 9/16	18 1/4	3 1/2	-	13	25 7/8	14 @ 3,097#	
			GLCS2000-28 (S or AL)-33	Steel	20'	2 7/8	8 1/16	25'-0"	25	22 15/16	26 1/6	18 1/4	3 1/2	12	13	25 7/8	6 @ 3,380#	
	AL2000-28-33		Alum	20'	2 3/8	8	25'-0"	37 3/16	27 1/2	-	17	14 5/8	-	30	21	6 @ 3,162#		
	34'	GLCSLX2000-28 (S or AL)-34	Steel	30'	2 7/8	8 1/16	25'-0"	25	28 15/16	32 1/16	18 1/4	3 1/2	18	13	25 7/8	4 @ 3,646#		
		43'	GLC2000-28 (S or AL)-43	Steel	6'	2 7/8	8 1/16	25'-0"	25	14 7/16	17 9/16	18 1/4	3 1/2	-	19	25 7/8	18 @ 3,097#	
			GLCS2000-28 (S or AL)-43	Steel	20'	2 7/8	8 1/16	25'-0"	25	22 15/16	26 1/6	18 1/4	3 1/2	12	19	25 7/8	6 @ 3,380#	
	AL2000-28-43		Alum	20'	2 3/8	8	25'-0"	37 3/16	27 1/2	-	17	14 5/8	-	49	21	6 @ 3,162#		
	53'	GLC2000-28 (S or AL)-53	Steel	6'	2 7/8	8 1/16	25'-0"	25	14 7/16	17 9/16	18 1/4	3 1/2	-	19	25 7/8	22 @ 3,097#		
		GLCS2000-28 (S or AL)-53	Steel	20'	2 7/8	8 1/16	25'-0"	25	22 15/16	26 1/6	18 1/4	3 1/2	12	19	25 7/8	8 @ 3,380#		
		AL2000-28-53	Alum	20'	2 3/8	8	25'-0"	37 3/16	27 1/2	-	17	14 5/8	-	53	21	8 @ 3,162#		
	GLCSL2000-28 (S or AL)-53	Steel	25'	2 7/8	8 1/16	25'-0"	25	26 5/16	29 7/16	18 1/4	3 1/2	15 3/8	19	25 7/8	6 @ 3,527#			
	63'	GLC2000-28 (S or AL)-63	Steel	6'	2 7/8	8 1/16	25'-0"	25	14 7/16	17 9/16	18 1/4	3 1/2	-	26	25 7/8	26 @ 3,097#		
		GLCS2000-28 (S or AL)-63	Steel	20'	2 7/8	8 1/16	25'-0"	25	22 15/16	26 1/6	18 1/4	3 1/2	12	26	25 7/8	8 @ 3,380#		
	64'	AL2000-28-63	Alum	20'	2 3/8	8	25'-0"	37 3/16	27 1/2	-	17	14 5/8	-	53	21	8 @ 3,162#		
		GLCSLX2000-28 (S or AL)-64	Steel	30'	2 7/8	8 1/16	25'-0"	37 3/16	28 15/16	32 1/16	18 1/4	3 1/2	18	54	25 7/8	6 @ 3,646#		
	78'	GLCSL2000-28 (S or AL)-78	Steel	25'	2 7/8	8 1/16	25'-0"	37 3/16	26 5/16	29 7/16	18 1/4	3 1/2	15 3/8	54	25 7/8	8 @ 3,527#		
		83'	GLC2000-28 (S or AL)-83	Steel	6'	2 7/8	8 1/16	25'-0"	37 3/16	14 7/16	17 9/16	18 1/4	3 1/2	-	54	25 7/8	34 @ 3,097#	
GLCS2000-28 (S or AL)-83	Steel		20'	2 7/8	8 1/16	25'-0"	37 3/16	22 15/16	26 1/6	18 1/4	3 1/2	12	54	25 7/8	10 @ 3,380#			
94'	AL2000-28-83	Alum	20'	2 3/8	8	25'-0"	37 3/16	27 1/2	-	17	14 5/8	-	53	21	10 @ 3,162#			
	GLCSLX2000-28 (S or AL)-94	Steel	30'	2 7/8	8 1/16	25'-0"	37 3/16	28 15/16	32 1/16	18 1/4	3 1/2	18	54	25 7/8	8 @ 3,646#			
103'	GLC2000-28 (S or AL)-103	Steel	6'	2 7/8	8 1/16	25'-0"	37 3/16	14 7/16	17 9/16	18 1/4	3 1/2	-	54	25 7/8	42 @ 3,097#			
	GLCS2000-28 (S or AL)-103	Steel	20'	2 7/8	8 1/16	25'-0"	37 3/16	22 15/16	26 1/6	18 1/4	3 1/2	12	54	25 7/8	12 @ 3,380#			
	AL2000-28-103	Alum	20'	2 3/8	8	25'-0"	37 3/16	27 1/2	-	17	14 5/8	-	53	21	12 @ 3,162#			
GLCSL2000-28 (S or AL)-103	Steel	25'	2 7/8	8 1/16	25'-0"	37 3/16	26 5/16	29 7/16	18 1/4	3 1/2	15 3/8	54	25 7/8	10 @ 3,527#				
124'	GLCSLX2000-28 (S or AL)-124	Steel	30'	2 7/8	8 1/16	25'-0"	37 3/16	28 15/16	32 1/16	18 1/4	3 1/2	18	54	25 7/8	10 @ 3,646#			

*This column provides the total number of support hangers with the corresponding vertical load applied by each support hanger (in pounds) based on the "L1" dimensions shown. Up to a 20" hanger drop will be provided by Gorbel. Additional hanger points or longer drops can be provided at an additional charge.

Gorbel® Ceiling Mounted Work Station Bridge Crane Kits include: bridge, runways, hoist trolley, end trucks, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel runway lengths greater than 63' and all aluminum systems), festoon stack-up section, splice joints and hanger brackets. Sway bracing is required on all systems except flush mounted systems (by others). Sway bracing kits are available but not included in the crane kit. Hoist provided by others.

Dimensions are for reference only and are subject to change without notice.

CEILING MOUNTED WORK STATION BRIDGE CRANES

BRIDGE LENGTH (L)	RUNWAY LENGTH	MODEL NUMBER	TRACK MATL.	BRIDGE								RUNWAY				
				MAX L1	T1 in	L3 in	L4 ft	L6 in	H3 in	H3A in	H4 in	H2 in	H1 in	L7 in	L8 in	HANGERS (See Note)*
34'	28'	GLCSL2000-15 (S or AL)-28	Steel	25'	2 7/8	8 1/16	30'-0"	29	26 5/16	29 7/16	20 7/8	3 1/2	15 3/8	13	25 7/8	4 @ 3,587#
	33'	GLC2000-15 (S or AL)-33	Steel	6'	2 7/8	8 1/16	30'-0"	29	14 7/16	17 9/16	20 7/8	3 1/2	-	13	25 7/8	14 @ 3,157#
		GLCS2000-15 (S or AL)-33	Steel	20'	2 7/8	8 1/16	30'-0"	29	22 15/16	26 1/16	20 7/8	3 1/2	12	13	25 7/8	6 @ 3,440#
		AL2000-15-33	Alum	20'	2 3/8	8	30'-0"	43 7/8	27 1/2	-	17 7/8	15 1/2	-	39	21	6 @ 3,245#
	34'	GLCSLX2000-15 (S or AL)-34	Steel	30'	2 7/8	8 1/16	30'-0"	29	28 15/16	32 1/16	20 7/8	3 1/2	18	13	25 7/8	4 @ 3,706#
	43'	GLC2000-15 (S or AL)-43	Steel	6'	2 7/8	8 1/16	30'-0"	29	14 7/16	17 9/16	20 7/8	3 1/2	-	19	25 7/8	18 @ 3,157#
		GLCS2000-15 (S or AL)-43	Steel	20'	2 7/8	8 1/16	30'-0"	29	22 15/16	26 1/16	20 7/8	3 1/2	12	19	25 7/8	6 @ 3,440#
		AL2000-15-43	Alum	20'	2 3/8	8	30'-0"	43 7/8	27 1/2	-	17 7/8	15 1/2	-	49	21	6 @ 3,245#
	53'	GLC2000-15 (S or AL)-53	Steel	6'	2 7/8	8 1/16	30'-0"	29	14 7/16	17 9/16	20 7/8	3 1/2	-	19	25 7/8	22 @ 3,157#
		GLCS2000-15 (S or AL)-53	Steel	20'	2 7/8	8 1/16	30'-0"	29	22 15/16	26 1/16	20 7/8	3 1/2	12	19	25 7/8	8 @ 3,440#
		AL2000-15-53	Alum	20'	2 3/8	8	30'-0"	43 7/8	27 1/2	-	17 7/8	15 1/2	-	53	21	8 @ 3,245#
		GLCSL2000-15 (S or AL)-53	Steel	25'	2 7/8	8 1/16	30'-0"	29	26 5/16	29 7/16	20 7/8	3 1/2	15 3/8	19	25 7/8	6 @ 3,587#
	63'	GLC2000-15 (S or AL)-63	Steel	6'	2 7/8	8 1/16	30'-0"	29	14 7/16	17 9/16	20 7/8	3 1/2	-	26	25 7/8	26 @ 3,157#
		GLCS2000-15 (S or AL)-63	Steel	20'	2 7/8	8 1/16	30'-0"	29	22 15/16	26 1/16	20 7/8	3 1/2	12	26	25 7/8	8 @ 3,440#
		AL2000-15-63	Alum	20'	2 3/8	8	30'-0"	43 7/8	27 1/2	-	17 7/8	15 1/2	-	53	21	8 @ 3,245#
	64'	GLCSLX2000-15 (S or AL)-64	Steel	30'	2 7/8	8 1/16	30'-0"	43 7/8	28 15/16	32 1/16	20 7/8	3 1/2	18	54	25 7/8	6 @ 3,706#
	78'	GLCSL2000-15 (S or AL)-78	Steel	25'	2 7/8	8 1/16	30'-0"	43 7/8	26 5/16	29 7/16	20 7/8	3 1/2	15 3/8	54	25 7/8	8 @ 3,587#
	83'	GLC2000-15 (S or AL)-83	Steel	6'	2 7/8	8 1/16	30'-0"	43 7/8	14 7/16	17 9/16	20 7/8	3 1/2	-	54	25 7/8	34 @ 3,157#
		GLCS2000-15 (S or AL)-83	Steel	20'	2 7/8	8 1/16	30'-0"	43 7/8	22 15/16	26 1/16	20 7/8	3 1/2	12	54	25 7/8	10 @ 3,440#
		AL2000-15-83	Alum	20'	2 3/8	8	30'-0"	43 7/8	27 1/2	-	17 7/8	15 1/2	-	53	21	10 @ 3,245#
	94'	GLCSLX-15 (S or AL)-94	Steel	30'	2 7/8	8 1/16	30'-0"	43 7/8	28 15/16	32 1/16	20 7/8	3 1/2	18	54	25 7/8	8 @ 3,706#
	103'	GLC2000-15 (S or AL)-103	Steel	6'	2 7/8	8 1/16	30'-0"	43 7/8	14 7/16	17 9/16	20 7/8	3 1/2	-	54	25 7/8	42 @ 3,157#
		GLCS2000-15 (S or AL)-103	Steel	20'	2 7/8	8 1/16	30'-0"	43 7/8	22 15/16	26 1/16	20 7/8	3 1/2	12	54	25 7/8	12 @ 3,440#
		AL2000-15-103	Alum	20'	2 3/8	8	30'-0"	43 7/8	27 1/2	-	17 7/8	15 1/2	-	53	21	12 @ 3,245#
	124'	GLCSL2000-15 (S or AL)-103	Steel	25'	2 7/8	8 1/16	30'-0"	43 7/8	26 5/16	29 7/16	20 7/8	3 1/2	15 3/8	54	25 7/8	10 @ 3,587#
		GLCSLX2000-15 (S or AL)-124	Steel	30'	2 7/8	8 1/16	30'-0"	43 7/8	28 15/16	32 1/16	20 7/8	3 1/2	18	54	25 7/8	10 @ 3,706#

*This column provides the total number of support hangers with the corresponding vertical load applied by each support hanger (in pounds) based on the "L1" dimensions shown. Up to a 20" hanger drop will be provided by Gorbelt. Additional hanger points or longer drops can be provided at an additional charge.

Gorbelt® Ceiling Mounted Work Station Bridge Crane Kits include: bridge, runways, hoist trolley, end trucks, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel runway lengths greater than 63' and all aluminum systems), festoon stack-up section, splice joints and hanger brackets. Sway bracing is required on all systems except flush mounted systems (by others). Sway bracing kits are available but not included in the crane kit. Hoist provided by others.

Dimensions are for reference only and are subject to change without notice.

4000# CAPACITY

CEILING MOUNTED WORK STATION BRIDGE CRANES

BRIDGE LENGTH (L)	RUNWAY LENGTH	MODEL NUMBER	TRACK MATL.	BRIDGE									RUNWAY					
				MAX L1	T1 in	L3 in	L4 ft	L6 in	H3 in	H3A in	H4 in	H2 in	H1 in	L7 in	L8 in	HANGERS (See Note)*		
15'	23'	GLC4000-15 (S or AL)-23	Steel	4'	3 3/8	15 1/16	12'-6"	24	11 7/16	14 1/2	21 3/8	3 1/2	-	9	25 7/8	14 @ 5,730#		
		GLCS4000-15 (S or AL)-23	Steel	20'	3 3/8	15 1/16	12'-6"	24	29 7/16	32 1/2	21 3/8	3 1/2	18	9	25 7/8	4 @ 6,143#		
	28'	GLCSL4000-15 (S or AL)-28	Steel	25'	3 3/8	15 1/16	12'-6"	24	31 7/16	34 1/2	21 3/8	3 1/2	20	13	25 7/8	4 @ 6,385#		
	33'	GLC4000-15 (S or AL)-33	Steel	4'	3 3/8	15 1/16	12'-6"	24	11 7/16	14 1/2	21 3/8	3 1/2	-	13	25 7/8	20 @ 5,730#		
		GLCS4000-15 (S or AL)-33	Steel	20'	3 3/8	15 1/16	12'-6"	24	29 7/16	32 1/2	21 3/8	3 1/2	18	13	25 7/8	6 @ 6,143#		
	34'	GLCSLX4000-15 (S or AL)-34	Steel	30'	3 3/8	15 1/16	12'-6"	24	32 7/16	35 1/2	21 3/8	3 1/2	22	13	25 7/8	4 @ 6,652#		
	43'	GLC4000-15 (S or AL)-43	Steel	4'	3 3/8	15 1/16	12'-6"	24	11 7/16	14 1/2	21 3/8	3 1/2	-	19	25 7/8	24 @ 5,730#		
		GLCS4000-15 (S or AL)-43	Steel	20'	3 3/8	15 1/16	12'-6"	24	29 7/16	32 1/2	21 3/8	3 1/2	18	19	25 7/8	6 @ 6,143#		
	53'	GLC4000-15 (S or AL)-53	Steel	4'	3 3/8	15 1/16	12'-6"	24	11 7/16	14 1/2	21 3/8	3 1/2	-	19	25 7/8	30 @ 5,730#		
		GLCS4000-15 (S or AL)-53	Steel	20'	3 3/8	15 1/16	12'-6"	24	29 7/16	32 1/2	21 3/8	3 1/2	18	19	25 7/8	8 @ 6,143#		
		GLCSL4000-15 (S or AL)-53	Steel	25'	3 3/8	15 1/16	12'-6"	24	31 7/16	34 1/2	21 3/8	3 1/2	20	19	25 7/8	6 @ 6,385#		
	63'	GLC4000-15 (S or AL)-63	Steel	4'	3 3/8	15 1/16	12'-6"	24	11 7/16	14 1/2	21 3/8	3 1/2	-	26	25 7/8	34 @ 5,730#		
		GLCS4000-15 (S or AL)-63	Steel	20'	3 3/8	15 1/16	12'-6"	24	29 7/16	32 1/2	21 3/8	3 1/2	18	26	25 7/8	8 @ 6,143#		
	64'	GLCSLX4000-15 (S or AL)-64	Steel	30'	3 3/8	15 1/16	12'-6"	30 3/4	32 7/16	35 1/2	21 3/8	3 1/2	22	54	25 7/8	6 @ 6,652#		
78'	GLCSL4000-15 (S or AL)-78	Steel	25'	3 3/8	15 1/16	12'-6"	30 3/4	31 7/16	34 1/2	21 3/8	3 1/2	20	54	25 7/8	8 @ 6,385#			
83'	GLC4000-15 (S or AL)-83	Steel	4'	3 3/8	15 1/16	12'-6"	30 3/4	11 7/16	14 1/2	21 3/8	3 1/2	-	54	25 7/8	44 @ 5,730#			
	GLCS4000-15 (S or AL)-83	Steel	20'	3 3/8	15 1/16	12'-6"	30 3/4	29 7/16	32 1/2	21 3/8	3 1/2	18	54	25 7/8	10 @ 6,143#			
94'	GLCSLX4000-15 (S or AL)-94	Steel	30'	3 3/8	15 1/16	12'-6"	30 3/4	32 7/16	35 1/2	21 3/8	3 1/2	22	54	25 7/8	8 @ 6,652#			
103'	GLC4000-15 (S or AL)-103	Steel	4'	3 3/8	15 1/16	12'-6"	30 3/4	11 7/16	14 1/2	21 3/8	3 1/2	-	54	25 7/8	54 @ 5,730#			
	GLCS4000-15 (S or AL)-103	Steel	20'	3 3/8	15 1/16	12'-6"	30 3/4	29 7/16	32 1/2	21 3/8	3 1/2	18	54	25 7/8	12 @ 6,143#			
	GLCSL4000-15 (S or AL)-103	Steel	25'	3 3/8	15 1/16	12'-6"	30 3/4	31 7/16	34 1/2	21 3/8	3 1/2	20	54	25 7/8	10 @ 6,385#			
124'	GLCSLX4000-15 (S or AL)-124	Steel	30'	3 3/8	15 1/16	12'-6"	30 3/4	32 7/16	35 1/2	21 3/8	3 1/2	22	54	25 7/8	10 @ 6,652#			
20'	23'	GLC4000-20 (S or AL)-23	Steel	4'	3 3/8	15 1/16	17'-6"	26	11 7/16	14 1/2	21 3/8	3 1/2	-	9	25 7/8	14 @ 5,781#		
		GLCS4000-20 (S or AL)-23	Steel	20'	3 3/8	15 1/16	17'-6"	26	29 7/16	32 1/2	21 3/8	3 1/2	18	9	25 7/8	4 @ 6,195#		
	28'	GLCSL4000-20 (S or AL)-28	Steel	25'	3 3/8	15 1/16	17'-6"	26	31 7/16	34 1/2	21 3/8	3 1/2	20	13	25 7/8	4 @ 6,437#		
	33'	GLC4000-20 (S or AL)-33	Steel	4'	3 3/8	15 1/16	17'-6"	26	11 7/16	14 1/2	21 3/8	3 1/2	-	13	25 7/8	20 @ 5,781#		
		GLCS4000-20 (S or AL)-33	Steel	20'	3 3/8	15 1/16	17'-6"	26	29 7/16	32 1/2	21 3/8	3 1/2	18	13	25 7/8	6 @ 6,195#		
	34'	GLCSLX4000-20 (S or AL)-34	Steel	30'	3 3/8	15 1/16	17'-6"	26	32 7/16	35 1/2	21 3/8	3 1/2	22	13	25 7/8	4 @ 6,704#		
	43'	GLC4000-20 (S or AL)-43	Steel	4'	3 3/8	15 1/16	17'-6"	26	11 7/16	14 1/2	21 3/8	3 1/2	-	19	25 7/8	24 @ 5,781#		
		GLCS4000-20 (S or AL)-43	Steel	20'	3 3/8	15 1/16	17'-6"	26	29 7/16	32 1/2	21 3/8	3 1/2	18	19	25 7/8	6 @ 6,195#		
	53'	GLC4000-20 (S or AL)-53	Steel	4'	3 3/8	15 1/16	17'-6"	26	11 7/16	14 1/2	21 3/8	3 1/2	-	19	25 7/8	30 @ 5,781#		
		GLCS4000-20 (S or AL)-53	Steel	20'	3 3/8	15 1/16	17'-6"	26	29 7/16	32 1/2	21 3/8	3 1/2	18	19	25 7/8	8 @ 6,195#		
		GLCSL4000-20 (S or AL)-53	Steel	25'	3 3/8	15 1/16	17'-6"	26	31 7/16	34 1/2	21 3/8	3 1/2	20	19	25 7/8	6 @ 6,437#		
	63'	GLC4000-20 (S or AL)-63	Steel	4'	3 3/8	15 1/16	17'-6"	26	11 7/16	14 1/2	21 3/8	3 1/2	-	26	25 7/8	34 @ 5,781#		
		GLCS4000-20 (S or AL)-63	Steel	20'	3 3/8	15 1/16	17'-6"	26	29 7/16	32 1/2	21 3/8	3 1/2	18	26	25 7/8	8 @ 6,195#		
	64'	GLCSLX4000-20 (S or AL)-64	Steel	30'	3 3/8	15 1/16	17'-6"	34 1/8	32 7/16	35 1/2	21 3/8	3 1/2	22	54	25 7/8	6 @ 6,704#		
	78'	GLCSL4000-20 (S or AL)-78	Steel	25'	3 3/8	15 1/16	17'-6"	34 1/8	31 7/16	34 1/2	21 3/8	3 1/2	20	54	25 7/8	8 @ 6,437#		
	83'	GLC4000-20 (S or AL)-83	Steel	4'	3 3/8	15 1/16	17'-6"	34 1/8	11 7/16	14 1/2	21 3/8	3 1/2	-	54	25 7/8	44 @ 5,781#		
		GLCS4000-20 (S or AL)-83	Steel	20'	3 3/8	15 1/16	17'-6"	34 1/8	29 7/16	32 1/2	21 3/8	3 1/2	18	54	25 7/8	10 @ 6,195#		
	94'	GLCSLX4000-20 (S or AL)-94	Steel	30'	3 3/8	15 1/16	17'-6"	34 1/8	32 7/16	35 1/2	21 3/8	3 1/2	22	54	25 7/8	8 @ 6,704#		
103'	GLC4000-20 (S or AL)-103	Steel	4'	3 3/8	15 1/16	17'-6"	34 1/8	11 7/16	14 1/2	21 3/8	3 1/2	-	54	25 7/8	54 @ 5,781#			
	GLCS4000-20 (S or AL)-103	Steel	20'	3 3/8	15 1/16	17'-6"	34 1/8	29 7/16	32 1/2	21 3/8	3 1/2	18	54	25 7/8	12 @ 6,195#			
	GLCSL4000-20 (S or AL)-103	Steel	25'	3 3/8	15 1/16	17'-6"	34 1/8	31 7/16	34 1/2	21 3/8	3 1/2	20	54	25 7/8	10 @ 6,437#			
124'	GLCSLX4000-20 (S or AL)-124	Steel	30'	3 3/8	15 1/16	17'-6"	34 1/8	32 7/16	35 1/2	21 3/8	3 1/2	22	54	25 7/8	10 @ 6,704#			
23'	23'	GLC4000-23 (S or AL)-23	Steel	4'	3 3/8	15 1/16	20'-6"	28	11 7/16	14 1/2	21 3/8	3 1/2	-	9	25 7/8	14 @ 5,812#		
		GLCS4000-23 (S or AL)-23	Steel	20'	3 3/8	15 1/16	20'-6"	28	29 7/16	32 1/2	21 3/8	3 1/2	18	9	25 7/8	4 @ 6,226#		
	28'	GLCSL4000-23 (S or AL)-28	Steel	25'	3 3/8	15 1/16	20'-6"	28	31 7/16	34 1/2	21 3/8	3 1/2	20	13	25 7/8	4 @ 6,468#		
	33'	GLC4000-23 (S or AL)-33	Steel	4'	3 3/8	15 1/16	20'-6"	28	11 7/16	14 1/2	21 3/8	3 1/2	-	13	25 7/8	20 @ 5,812#		
		GLCS4000-23 (S or AL)-33	Steel	20'	3 3/8	15 1/16	20'-6"	28	29 7/16	32 1/2	21 3/8	3 1/2	18	13	25 7/8	6 @ 6,226#		
	34'	GLCSLX4000-23 (S or AL)-34	Steel	30'	3 3/8	15 1/16	20'-6"	28	32 7/16	35 1/2	21 3/8	3 1/2	22	13	25 7/8	4 @ 6,735#		
	43'	GLC4000-23 (S or AL)-43	Steel	4'	3 3/8	15 1/16	20'-6"	28	11 7/16	14 1/2	21 3/8	3 1/2	-	19	25 7/8	24 @ 5,812#		
		GLCS4000-23 (S or AL)-43	Steel	20'	3 3/8	15 1/16	20'-6"	28	29 7/16	32 1/2	21 3/8	3 1/2	18	19	25 7/8	6 @ 6,226#		
	53'	GLC4000-23 (S or AL)-53	Steel	4'	3 3/8	15 1/16	20'-6"	28	11 7/16	14 1/2	21 3/8	3 1/2	-	19	25 7/8	30 @ 5,812#		
	GLCS4000-23 (S or AL)-53	Steel	20'	3 3/8	15 1/16	20'-6"	28	29 7/16	32 1/2	21 3/8	3 1/2	18	19	25 7/8	8 @ 6,226#			
	GLCSL4000-23 (S or AL)-53	Steel	25'	3 3/8	15 1/16	20'-6"	28	31 7/16	34 1/2	21 3/8	3 1/2	20	19	25 7/8	6 @ 6,468#			

*This column provides the total number of support hangers with the corresponding vertical load applied by each support hanger (in pounds) based on the "L1" dimensions shown. Up to a 20" hanger drop will be provided by Gorbel. Additional hanger points or longer drops can be provided at an additional charge.

Gorbel® Ceiling Mounted Work Station Bridge Crane Kits include: bridge, runways, hoist trolley, end trucks, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel runway lengths greater than 63' and all aluminum systems), festoon stack-up section, splice joints and hanger brackets. Sway bracing is required on all systems except flush mounted systems (by others). Sway bracing kits are available but not included in the crane kit. Hoist provided by others.

Dimensions are for reference only and are subject to change without notice.

CEILING MOUNTED WORK STATION BRIDGE CRANES


BRIDGE LENGTH (L)	RUNWAY LENGTH	MODEL NUMBER	TRACK MATL.	BRIDGE									RUNWAY				
				MAX L1	T1 in	L3 in	L4 ft	L6 in	H3 in	H3A in	H4 in	H2 in	H1 in	L7 in	L8 in	HANGERS (See Note)*	
23'	63'	GLC4000-23 (S or AL)-63 GLCS4000-23 (S or AL)-63	Steel Steel	4' 20'	3 3/8 3 3/8	15 1/16 15 1/16	20'-6" 20'-6"	28 28	11 7/16 29 7/16	14 1/2 32 1/2	21 3/8 21 3/8	3 1/2 3 1/2	- 18	26 26	25 7/8 25 7/8	34 @ 5,812# 8 @ 6,226#	
	64'	GLCSLX4000-23 (S or AL)-64	Steel	30'	3 3/8	15 1/16	20'-6"	37 7/16	32 7/16	35 1/2	21 3/8	3 1/2	22	54	25 7/8	6 @ 6,735#	
	78'	GLCSL4000-23 (S or AL)-78	Steel	25'	3 3/8	15 1/16	20'-6"	37 7/16	31 7/16	34 1/2	21 3/8	3 1/2	20	54	25 7/8	8 @ 6,468#	
	83'	GLC4000-23 (S or AL)-83 GLCS4000-23 (S or AL)-83	Steel Steel	4' 20'	3 3/8 3 3/8	15 1/16 15 1/16	20'-6" 20'-6"	37 7/16 37 7/16	11 7/16 29 7/16	14 1/2 32 1/2	21 3/8 21 3/8	3 1/2 3 1/2	- 18	54 54	25 7/8 25 7/8	44 @ 5,812# 10 @ 6,226#	
	94'	GLCSLX-23 (S or AL)-94	Steel	30'	3 3/8	15 1/16	20'-6"	37 7/16	32 7/16	35 1/2	21 3/8	3 1/2	22	54	25 7/8	8 @ 6,735#	
	103'	GLC4000-23 (S or AL)-103 GLCS4000-23 (S or AL)-103 GLCSL4000-23 (S or AL)-103	Steel Steel Steel	4' 20' 25'	3 3/8 3 3/8 3 3/8	15 1/16 15 1/16 15 1/16	20'-6" 20'-6" 20'-6"	37 7/16 37 7/16 37 7/16	11 7/16 29 7/16 31 7/16	14 1/2 32 1/2 34 1/2	21 3/8 21 3/8 21 3/8	3 1/2 3 1/2 3 1/2	- 18 20	54 54 54	25 7/8 25 7/8 25 7/8	54 @ 5,812# 12 @ 6,226# 10 @ 6,468#	
		124'	GLCSLX4000-23 (S or AL)-124	Steel	30'	3 3/8	15 1/16	20'-6"	37 7/16	32 7/16	35 1/2	21 3/8	3 1/2	22	54	25 7/8	10 @ 6,735#
23'		GLC4000-28 (S or AL)-23 GLCS4000-28 (S or AL)-23	Steel Steel	4' 20'	3 3/8 3 3/8	15 1/16 15 1/16	25'-0" 25'-0"	32 32	11 7/16 29 7/16	14 1/2 32 1/2	23 3/8 23 3/8	3 1/2 3 1/2	- 18	9 9	25 7/8 25 7/8	14 @ 5,928# 4 @ 6,342#	
	28'	GLCSL4000-28 (S or AL)-28	Steel	25'	3 3/8	15 1/16	25'-0"	32	31 7/16	34 1/2	23 3/8	3 1/2	20	13	25 7/8	4 @ 6,583#	
28'	33'	GLC4000-28 (S or AL)-33 GLCS4000-28 (S or AL)-33	Steel Steel	4' 20'	3 3/8 3 3/8	15 1/16 15 1/16	25'-0" 25'-0"	32 32	11 7/16 29 7/16	14 1/2 32 1/2	23 3/8 23 3/8	3 1/2 3 1/2	- 18	13 13	25 7/8 25 7/8	20 @ 5,928# 6 @ 6,342#	
	34'	GLCSLX4000-28 (S or AL)-34	Steel	30'	3 3/8	15 1/16	25'-0"	32	32 7/16	35 1/2	23 3/8	3 1/2	22	13	25 7/8	4 @ 6,851#	
	43'	GLC4000-28 (S or AL)-43 GLCS4000-28 (S or AL)-43	Steel Steel	4' 20'	3 3/8 3 3/8	15 1/16 15 1/16	25'-0" 25'-0"	32 32	11 7/16 29 7/16	14 1/2 32 1/2	23 3/8 23 3/8	3 1/2 3 1/2	- 18	19 19	25 7/8 25 7/8	24 @ 5,928# 6 @ 6,342#	
		53'	GLC4000-28 (S or AL)-53 GLCS4000-28 (S or AL)-53 GLCSL4000-28 (S or AL)-53	Steel Steel Steel	4' 20' 25'	3 3/8 3 3/8 3 3/8	15 1/16 15 1/16 15 1/16	25'-0" 25'-0" 25'-0"	32 32 32	11 7/16 29 7/16 31 7/16	14 1/2 32 1/2 34 1/2	23 3/8 23 3/8 23 3/8	3 1/2 3 1/2 3 1/2	- 18 20	19 19 19	25 7/8 25 7/8 25 7/8	30 @ 5,928# 8 @ 6,342# 6 @ 6,583#
	63'		GLC4000-28 (S or AL)-63 GLCS4000-28 (S or AL)-63	Steel Steel	4' 20'	3 3/8 3 3/8	15 1/16 15 1/16	25'-0" 25'-0"	32 32	11 7/16 29 7/16	14 1/2 32 1/2	23 3/8 23 3/8	3 1/2 3 1/2	- 18	26 26	25 7/8 25 7/8	34 @ 5,928# 8 @ 6,342#
			64'	GLCSLX4000-28 (S or AL)-64	Steel	30'	3 3/8	15 1/16	25'-0"	44 3/16	32 7/16	35 1/2	23 3/8	3 1/2	22	54	25 7/8
	78'	GLCSL4000-28 (S or AL)-78	Steel	25'	3 3/8	15 1/16	25'-0"	44 3/16	31 7/16	34 1/2	23 3/8	3 1/2	20	54	25 7/8	8 @ 6,583#	
	83'	GLC4000-28 (S or AL)-83 GLCS4000-28 (S or AL)-83	Steel Steel	4' 20'	3 3/8 3 3/8	15 1/16 15 1/16	25'-0" 25'-0"	44 3/16 44 3/16	11 7/16 29 7/16	14 1/2 32 1/2	23 3/8 23 3/8	3 1/2 3 1/2	- 18	54 54	25 7/8 25 7/8	44 @ 5,928# 10 @ 6,342#	
	94'	GLCSLX4000-28 (S or AL)-94	Steel	30'	3 3/8	15 1/16	25'-0"	44 3/16	32 7/16	35 1/2	23 3/8	3 1/2	22	54	25 7/8	8 @ 6,851#	
	103'	GLC4000-28 (S or AL)-103 GLCS4000-28 (S or AL)-103 GLCSL4000-28 (S or AL)-103	Steel Steel Steel	4' 20' 25'	3 3/8 3 3/8 3 3/8	15 1/16 15 1/16 15 1/16	25'-0" 25'-0" 25'-0"	44 3/16 44 3/16 44 3/16	11 7/16 29 7/16 31 7/16	14 1/2 32 1/2 34 1/2	23 3/8 23 3/8 23 3/8	3 1/2 3 1/2 3 1/2	- 18 20	54 54 54	25 7/8 25 7/8 25 7/8	54 @ 5,928# 12 @ 6,342# 10 @ 6,583#	
		124'	GLCSLX4000-28 (S or AL)-124	Steel	30'	3 3/8	15 1/16	25'-0"	44 3/16	32 7/16	35 1/2	23 3/8	3 1/2	22	54	25 7/8	10 @ 6,851#
		28'	GLCSL4000-34 (S or AL)-28	Steel	25'	3 3/8	15 1/16	30'-0"	36	31 7/16	34 1/2	25 3/8	3 1/2	20	13	25 7/8	4 @ 6,717#
		33'	GLC4000-34 (S or AL)-33 GLCS4000-34 (S or AL)-33	Steel Steel	4' 20'	3 3/8 3 3/8	15 1/16 15 1/16	30'-0" 30'-0"	36 36	11 7/16 29 7/16	14 1/2 32 1/2	25 3/8 25 3/8	3 1/2 3 1/2	- 18	13 13	25 7/8 25 7/8	20 @ 6,062# 6 @ 6,475#
	34'		GLCSLX4000-34 (S or AL)-34	Steel	30'	3 3/8	15 1/16	30'-0"	36	32 7/16	35 1/2	25 3/8	3 1/2	22	13	25 7/8	4 @ 6,985#
34'	43'	GLC4000-34 (S or AL)-43 GLCS4000-34 (S or AL)-43	Steel Steel	4' 20'	3 3/8 3 3/8	15 1/16 15 1/16	30'-0" 30'-0"	36 36	11 7/16 29 7/16	14 1/2 32 1/2	25 3/8 25 3/8	3 1/2 3 1/2	- 19	19 19	25 7/8 25 7/8	24 @ 6,062# 6 @ 6,475#	
	53'	GLC4000-34 (S or AL)-53 GLCS4000-34 (S or AL)-53 GLCSL4000-34 (S or AL)-53	Steel Steel Steel	4' 20' 25'	3 3/8 3 3/8 3 3/8	15 1/16 15 1/16 15 1/16	30'-0" 30'-0" 30'-0"	36 36 36	11 7/16 29 7/16 31 7/16	14 1/2 32 1/2 34 1/2	25 3/8 25 3/8 25 3/8	3 1/2 3 1/2 3 1/2	- 18 20	19 19 19	25 7/8 25 7/8 25 7/8	30 @ 6,062# 8 @ 6,475# 6 @ 6,717#	
		63'	GLC4000-34 (S or AL)-63 GLCS4000-34 (S or AL)-63	Steel Steel	4' 20'	3 3/8 3 3/8	15 1/16 15 1/16	30'-0" 30'-0"	36 36	11 7/16 29 7/16	14 1/2 32 1/2	25 3/8 25 3/8	3 1/2 3 1/2	- 18	26 26	25 7/8 25 7/8	34 @ 6,062# 8 @ 6,475#
			64'	GLCSLX4000-34 (S or AL)-64	Steel	30'	3 3/8	15 1/16	30'-0"	50 7/8	32 7/16	35 1/2	25 3/8	3 1/2	22	54	25 7/8
	78'	GLCSL4000-34 (S or AL)-78	Steel	25'	3 3/8	15 1/16	30'-0"	50 7/8	31 7/16	34 1/2	25 3/8	3 1/2	20	54	25 7/8	8 @ 6,717#	
	83'	GLC4000-34 (S or AL)-83 GLCS4000-34 (S or AL)-83	Steel Steel	4' 20'	3 3/8 3 3/8	15 1/16 15 1/16	30'-0" 30'-0"	50 7/8 50 7/8	11 7/16 29 7/16	14 1/2 32 1/2	25 3/8 25 3/8	3 1/2 3 1/2	- 18	54 54	25 7/8 25 7/8	44 @ 6,062# 10 @ 6,475#	
	94'	GLCSLX4000-34 (S or AL)-94	Steel	30'	3 3/8	15 1/16	30'-0"	50 7/8	32 7/16	35 1/2	25 3/8	3 1/2	22	54	25 7/8	8 @ 6,985#	
	103'	GLC4000-34 (S or AL)-103 GLCS4000-34 (S or AL)-103 GLCSL4000-34 (S or AL)-103	Steel Steel Steel	4' 20' 25'	3 3/8 3 3/8 3 3/8	15 1/16 15 1/16 15 1/16	30'-0" 30'-0" 30'-0"	50 7/8 50 7/8 50 7/8	11 7/16 29 7/16 31 7/16	14 1/2 32 1/2 34 1/2	25 3/8 25 3/8 25 3/8	3 1/2 3 1/2 3 1/2	- 18 20	54 54 54	25 7/8 25 7/8 25 7/8	54 @ 6,062# 12 @ 6,475# 10 @ 6,717#	
		124'	GLCSLX4000-34 (S or AL)-124	Steel	30'	3 3/8	15 1/16	30'-0"	50 7/8	32 7/16	35 1/2	25 3/8	3 1/2	22	54	25 7/8	10 @ 6,985#

*This column provides the total number of support hangers with the corresponding vertical load applied by each support hanger (in pounds) based on the "L1" dimensions shown. Up to a 20" hanger drop will be provided by Gorbel. Additional hanger points or longer drops can be provided at an additional charge.

Gorbel® Ceiling Mounted Work Station Bridge Crane Kits include: bridge, runways, hoist trolley, end trucks, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel runway lengths greater than 63' and all aluminum systems), festoon stack-up section, splice joints and hanger brackets. Sway bracing is required on all systems except flush mounted systems (by others). Sway bracing kits are available but not included in the crane kit. Hoist provided by others.

Dimensions are for reference only and are subject to change without notice.

CEILING MOUNTED WORK STATION MONORAIL ISOMETRIC VIEW

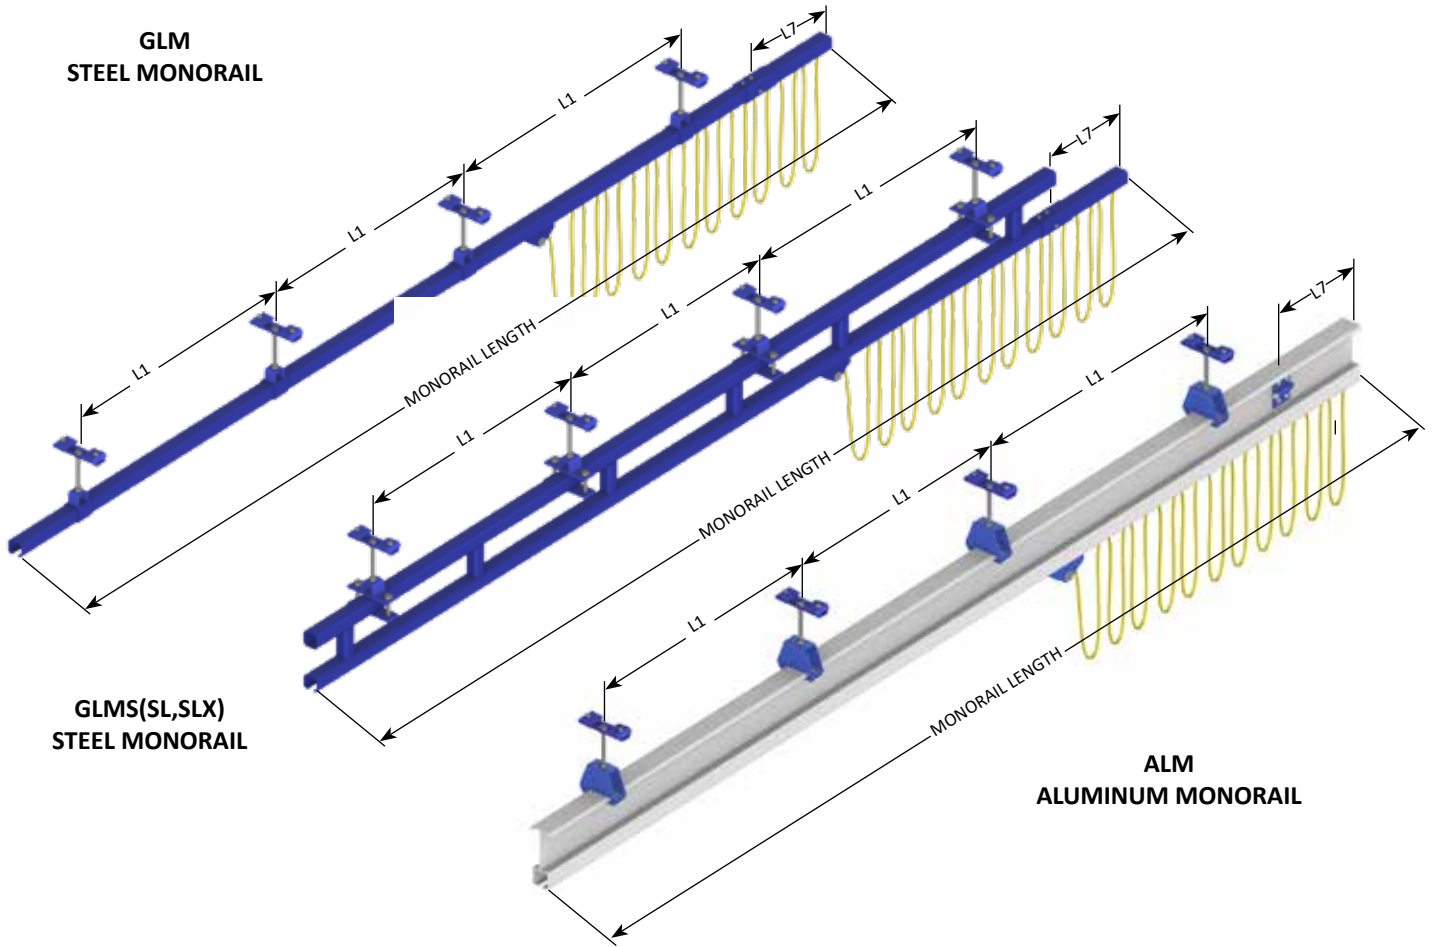

Model Number: _____

Capacity: _____ pounds

Bridge Length (L): _____ (OAL)

Runway Length: _____ (OAL)

L1: _____ Are the number of support assemblies provided sufficient?

(See "HANGERS" column on dimensional chart pages)

Type of hanger required:

- ☐ Standard hanger with up to 20 inch drop.
Support beam flange width _____ inches
- ☐ Flush mounted, parallel
Support beam flange width _____ inches
- ☐ Flush mounted, perpendicular
Support beam flange width _____ inches
- ☐ Special hangers

Note: Sway bracing is required on all systems except flush mounted systems. Sway bracing kits are available but are not included in the crane kit.


C: _____ inches (hoist by others)

Gorbel® Monorails include: monorails, hoist trolley, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel monorail lengths greater than 63 feet and all aluminum systems), festoon stack-up section, splice joints and hanger brackets. Additional hanger points or longer drops, in excess of 20 inches, can be provided at an additional cost (hoist and sway bracing by others). Sway bracing kits are available but are not included in the crane kit.


Dimension and design details subject to change without notice.

CEILING MOUNTED WORK STATION MONORAIL


GLM STEEL MONORAIL

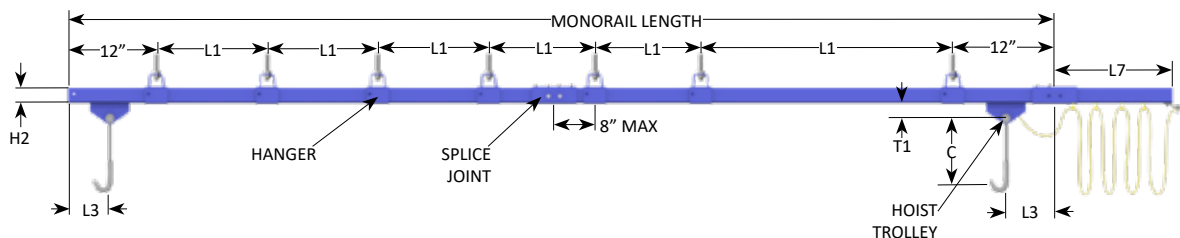

GLMS, GLMSL, GLMSLX STEEL MONORAIL

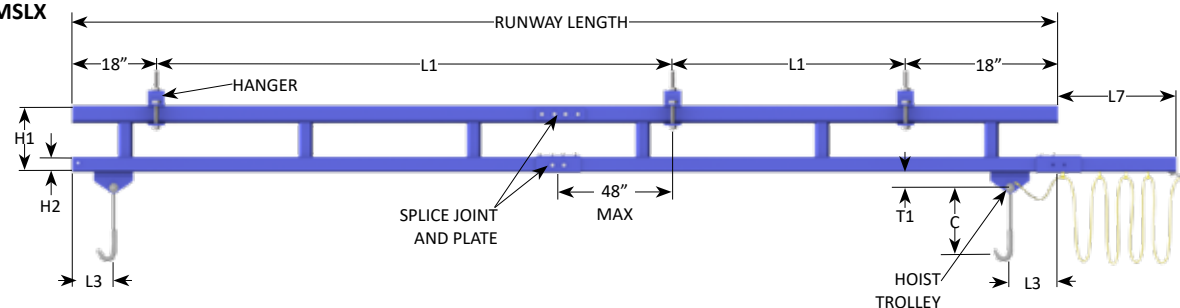

GLM STEEL MONORAIL

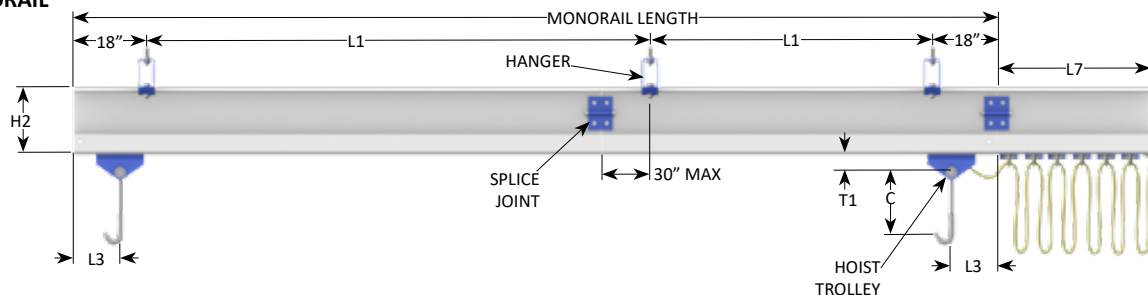

Model Number: _____

Capacity: _____ pounds

Bridge Length (L): _____ (OAL)

Runway Length: _____ (OAL)

L1: _____ Are the number of support assemblies provided sufficient?

(See "HANGERS" column on dimensional chart pages)

Type of hanger required:

- ☐ Standard hanger with up to 20 inch drop.
Support beam flange width _____ inches
- ☐ Flush mounted, parallel
Support beam flange width _____ inches
- ☐ Flush mounted, perpendicular
Support beam flange width _____ inches
- ☐ Special hangers

Note: Sway bracing is required on all systems except flush mounted systems. Sway bracing kits are available but are not included in the crane kit.

C: _____ inches (hoist by others)

Gorbel® Monorails include: monorails, hoist trolley, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel monorail lengths greater than 63 feet and all aluminum systems), festoon stack-up section, splice joints and hanger brackets. Additional hanger points or longer drops, in excess of 20 inches, can be provided at an additional cost (hoist and sway bracing by others). Sway bracing kits are available but are not included in the crane kit.

Dimension and design details subject to change without notice.

250#-500# CAPACITY

CEILING MOUNTED WORK STATION MONORAILS

250# CAPACITY	MONORAIL LENGTH	MONORAIL LENGTH	TRACK MATL.	MAX L1	T1 in	H1 in	H2 in	L3 in	L7 in	HANGERS (See Note)*
	11'-6"	GLM250-11.5	Steel	6'	1 1/2	-	1 3/4	5 1/16	9	3 @ 366#
		GLMS250-11.5	Steel	20'	1 1/2	9	1 3/4	5 1/16	9	2 @ 449#
		ALM250-11.5	Alum	20'	2 11/16	-	8	7 3/16	9	2 @ 430#
	23'	GLM250-23	Steel	6'	1 1/2	-	1 3/4	5 1/16	9	5 @ 366#
		GLMS250-23	Steel	20'	1 1/2	9	1 3/4	5 1/16	9	2 @ 449#
		ALM250-23	Alum	20'	2 11/16	-	8	7 3/16	14	2 @ 430#
	28'	GLMSL250-28	Steel	25'	1 1/2	11	1 3/4	5 1/16	9	2 @ 561#
		GLM250-33	Steel	6'	1 1/2	-	1 3/4	5 1/16	9	7 @ 366#
		GLMS250-33	Steel	20'	1 1/2	9	1 3/4	5 1/16	9	3 @ 449#
	33'	ALM250-33	Alum	20'	2 11/16	-	8	7 3/16	20	3 @ 430#
		GLM250-43	Steel	6'	1 1/2	-	1 3/4	5 1/16	13	8 @ 366#
		GLMS250-43	Steel	20'	1 1/2	9	1 3/4	5 1/16	13	3 @ 449#
	43'	ALM250-43	Alum	20'	2 11/16	-	8	7 3/16	27	3 @ 430#
		GLM250-53	Steel	6'	1 1/2	-	1 3/4	5 1/16	13	11 @ 366#
		GLMS250-53	Steel	20'	1 1/2	9	1 3/4	5 1/16	13	4 @ 449#
	53'	ALM250-53	Alum	20'	2 11/16	-	8	7 3/16	30	4 @ 430#
		GLMSL250-53	Steel	25'	1 1/2	11	1 3/4	5 1/16	13	3 @ 561#
	63'	GLM250-63	Steel	6'	1 1/2	-	1 3/4	5 1/16	19	12 @ 366#
		GLMS250-63	Steel	20'	1 1/2	9	1 3/4	5 1/16	19	4 @ 449#
		ALM250-63	Alum	20'	2 11/16	-	8	7 3/16	37	4 @ 430#
	78'	GLMSL250-78	Steel	25'	1 1/2	11	1 3/4	5 1/16	54	4 @ 561#
		GLM250-83	Steel	6'	1 1/2	-	1 3/4	5 1/16	54	16 @ 366#
		GLMS250-83	Steel	20'	1 1/2	9	1 3/4	5 1/16	54	5 @ 449#
	83'	ALM250-83	Alum	20'	2 11/16	-	8	7 3/16	47	5 @ 430#
		GLM250-103	Steel	6'	1 1/2	-	1 3/4	5 1/16	54	20 @ 366#
		GLMS250-103	Steel	20'	1 1/2	9	1 3/4	5 1/16	54	6 @ 449#
	103'	ALM250-103	Alum	20'	2 11/16	-	8	7 3/16	53	6 @ 430#
		GLMSL250-103	Steel	25'	1 1/2	11	1 3/4	5 1/16	54	5 @ 561#

500# CAPACITY	MONORAIL LENGTH	MONORAIL LENGTH	TRACK MATL.	MAX L1	T1 in	H1 in	H2 ft	L3 in	L7 in	HANGERS (See Note)*
	11'-6"	GLM500-11.5	Steel	6'	2 13/16	-	2 3/8	7 1/8	9	3 @ 725#
		GLMS500-11.5	Steel	20'	2 13/16	10	2 3/8	7 1/8	9	2 @ 849#
		ALM500-11.5	Alum	20'	2 11/16	-	10	7 3/16	9	2 @ 794#
	23'	GLM500-23	Steel	6'	2 13/16	-	2 3/8	7 1/8	9	5 @ 725#
		GLMS500-23	Steel	20'	2 13/16	10	2 3/8	7 1/8	9	2 @ 849#
		ALM500-23	Alum	20'	2 11/16	-	10	7 3/16	14	2 @ 794#
	28'	GLMSL500-28	Steel	25'	2 13/16	12 3/8	2 3/8	7 1/8	9	2 @ 968#
		GLM500-33	Steel	6'	2 13/16	-	2 3/8	7 1/8	9	7 @ 725#
		GLMS500-33	Steel	20'	2 13/16	10	2 3/8	7 1/8	9	3 @ 849#
	33'	ALM500-33	Alum	20'	2 11/16	-	10	7 3/16	20	3 @ 794#
		GLMSLX500-34	Steel	30'	2 13/16	14 3/8	2 3/8	7 1/8	9	2 @ 1,031#
		GLM500-43	Steel	6'	2 13/16	-	2 3/8	7 1/8	13	8 @ 725#
		GLMS500-43	Steel	20'	2 13/16	10	2 3/8	7 1/8	13	3 @ 849#
	43'	ALM500-43	Alum	20'	2 11/16	-	10	7 3/16	27	3 @ 794#
		GLM500-53	Steel	6'	2 13/16	-	2 3/8	7 1/8	13	11 @ 725#
		GLMS500-53	Steel	20'	2 13/16	10	2 3/8	7 1/8	13	4 @ 849#
	53'	ALM500-53	Alum	20'	2 11/16	-	10	7 3/16	30	4 @ 794#
		GLMSL500-53	Steel	25'	2 13/16	12 3/8	2 3/8	7 1/8	13	3 @ 968#
		GLM500-63	Steel	6'	2 13/16	-	2 3/8	7 1/8	19	12 @ 725#
	63'	GLMS500-63	Steel	20'	2 13/16	10	2 3/8	7 1/8	19	4 @ 849#
		ALM500-63	Alum	20'	2 11/16	-	10	7 3/16	37	4 @ 794#
	64'	GLMSLX500-64	Steel	30'	2 13/16	14 3/8	2 3/8	7 1/8	46	3 @ 1,031#
		GLMSL500-78	Steel	25'	2 13/16	12 3/8	2 3/8	7 1/8	54	4 @ 968#
		GLM500-83	Steel	6'	2 13/16	-	2 3/8	7 1/8	54	16 @ 725#
	83'	GLMS500-83	Steel	20'	2 13/16	10	2 3/8	7 1/8	54	5 @ 849#
		ALM500-83	Alum	20'	2 11/16	-	10	7 3/16	47	5 @ 794#
	94'	GLMSLX500-94	Steel	30'	2 13/16	14 3/8	2 3/8	7 1/8	54	4 @ 1,031#
		GLM500-103	Steel	6'	2 13/16	-	2 3/8	7 1/8	54	20 @ 725#
		GLMS500-103	Steel	20'	2 13/16	10	2 3/8	7 1/8	54	6 @ 849#
	103'	ALM500-103	Alum	20'	2 11/16	-	10	7 3/16	53	6 @ 794#
		GLMSL500-103	Steel	25'	2 13/16	12 3/8	2 3/8	7 1/8	54	5 @ 968#
	124'	GLMSLX500-124	Steel	30'	2 13/16	14 3/8	2 3/8	7 1/8	54	5 @ 1,031#

*This column provides the total number of support hangers with the corresponding vertical load applied by each support hanger (in pounds) based on the "L1" dimensions shown. Up to a 20" hanger drop will be provided by Gorbel. Additional hanger points or longer drops can be provided at an additional charge.

Gorbel® Monorail Kits include: monorail track, hoist trolley, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel monorail lengths greater than 63' and all aluminum systems), festoon stack-up section, splice joints and hanger brackets. Sway bracing is required on all systems except flush mounted systems (by others). Sway bracing kits are available but not included in the crane kit. Hoist provided by others.

Dimensions are for reference only and are subject to change without notice.

CEILING MOUNTED WORK STATION MONORAILS

1000# CAPACITY	MONORAIL LENGTH	MONORAIL LENGTH	TRACK MATL.	MAX L1	T1 in	H1 in	H2 ft	L3 in	L7 in	HANGERS (See Note)*
	11'-6"	GLM1000-11.5	Steel	6'	3 1/8	-	3 1/16	7 7/8	9	3 @ 1,438#
		GLMS1000-11.5	Steel	20'	3 1/8	11 1/16	3 1/16	7 7/8	9	2 @ 1,645#
		ALM1000-11.5	Alum	20'	2 5/8	-	11	7 13/16	13	2 @ 1,569#
	23'	GLM1000-23	Steel	6'	3 1/8	-	3 1/16	7 7/8	9	5 @ 1,438#
		GLMS1000-23	Steel	20'	3 1/8	11 1/16	3 1/16	7 7/8	9	2 @ 1,645#
		ALM1000-23	Alum	20'	2 5/8	-	11	7 13/16	28	2 @ 1,569#
	28'	GLMSL1000-28	Steel	25'	3 1/8	13 15/16	3 1/16	7 7/8	13	2 @ 1,752#
	33'	GLM1000-33	Steel	6'	3 1/8	-	3 1/16	7 7/8	13	7 @ 1,438#
		GLMS1000-33	Steel	20'	3 1/8	11 1/16	3 1/16	7 7/8	13	3 @ 1,645#
		ALM1000-33	Alum	20'	2 5/8	-	11	7 13/16	39	3 @ 1,569#
	34'	GLMSLX1000-34	Steel	30'	3 1/8	17 1/16	3 1/16	7 7/8	13	2 @ 1,925#
	43'	GLM1000-43	Steel	6'	3 1/8	-	3 1/16	7 7/8	19	8 @ 1,438#
		GLMS1000-43	Steel	20'	3 1/8	11 1/16	3 1/16	7 7/8	19	3 @ 1,645#
		ALM1000-43	Alum	20'	2 5/8	-	11	7 13/16	49	3 @ 1,569#
	53'	GLM1000-53	Steel	6'	3 1/8	-	3 1/16	7 7/8	19	11 @ 1,438#
		GLMS1000-53	Steel	20'	3 1/8	11 1/16	3 1/16	7 7/8	19	4 @ 1,645#
		ALM1000-53	Alum	20'	2 5/8	-	11	7 13/16	53	4 @ 1,569#
	63'	GLMSL1000-53	Steel	25'	3 1/8	13 15/16	3 1/16	7 7/8	19	3 @ 1,752#
		GLM1000-63	Steel	6'	3 1/8	-	3 1/16	7 7/8	26	12 @ 1,438#
		GLMS1000-63	Steel	20'	3 1/8	11 1/16	3 1/16	7 7/8	26	4 @ 1,645#
	64'	ALM1000-63	Alum	20'	2 5/8	-	11	7 13/16	53	4 @ 1,569#
		GLMSLX1000-64	Steel	30'	3 1/8	17 1/16	3 1/16	7 7/8	54	3 @ 1,925#
	78'	GLMSL1000-78	Steel	25'	3 1/8	13 15/16	3 1/16	7 7/8	54	4 @ 1,752#
	83'	GLM1000-83	Steel	6'	3 1/8	-	3 1/16	7 7/8	54	16 @ 1,438#
		GLMS1000-83	Steel	20'	3 1/8	11 1/16	3 1/16	7 7/8	54	5 @ 1,645#
		ALM1000-83	Alum	20'	2 5/8	-	11	7 13/16	53	5 @ 1,569#
	94'	GLMSLX1000-94	Steel	30'	3 1/8	7 1/16	3 1/16	7 7/8	54	4 @ 1,925#
	103'	GLM1000-103	Steel	6'	3 1/8	-	3 1/16	7 7/8	54	20 @ 1,438#
		GLMS1000-103	Steel	20'	3 1/8	11 1/16	3 1/16	7 7/8	54	6 @ 1,645#
		ALM1000-103	Alum	20'	2 5/8	-	11	7 13/16	53	6 @ 1,569#
	124'	GLMSL1000-103	Steel	25'	3 1/8	13 15/16	3 1/16	7 7/8	54	5 @ 1,752#
		GLMSLX1000-124	Steel	30'	3 1/8	7 1/16	3 1/16	7 7/8	54	5 @ 1,925#

2000# CAPACITY	MONORAIL LENGTH	MONORAIL LENGTH	TRACK MATL.	MAX L1	T1 in	H1 in	H2 ft	L3 in	L7 in	HANGERS (See Note)*
	11'-6"	GLM2000-11.5	Steel	6'	2 7/8	-	3 1/2	8 1/16	9	3 @ 2,855#
		GLMS2000-11.5	Steel	20'	2 7/8	12	3 1/2	8 1/16	9	2 @ 3,138#
		ALM2000-11.5	Alum	20'	2 3/8	-	13 1/4	8	13	2 @ 3,004#
	23'	GLM2000-23	Steel	6'	2 7/8	-	3 1/2	8 1/16	9	5 @ 2,855#
		GLMS2000-23	Steel	20'	2 7/8	12	3 1/2	8 1/16	9	2 @ 3,138#
		ALM2000-23	Alum	20'	2 3/8	-	13 1/4	8	26	2 @ 3,004#
	28'	GLMSL2000-28	Steel	25'	2 7/8	15 3/8	3 1/2	8 1/16	13	2 @ 3,285#
	33'	GLM2000-33	Steel	6'	2 7/8	-	3 1/2	8 1/16	13	7 @ 2,855#
		GLMS2000-33	Steel	20'	2 7/8	12	3 1/2	8 1/16	13	3 @ 3,138#
		ALM2000-33	Alum	20'	2 3/8	-	13 1/4	8	39	3 @ 3,004#
	34'	GLMSLX2000-34	Steel	30'	2 7/8	18	3 1/2	8 1/16	13	2 @ 3,404#
	43'	GLM2000-43	Steel	6'	2 7/8	-	3 1/2	8 1/16	19	8 @ 2,855#
		GLMS2000-43	Steel	20'	2 7/8	12	3 1/2	8 1/16	19	3 @ 3,138#
		ALM2000-43	Alum	20'	2 3/8	-	13 1/4	8	49	3 @ 3,004#
	53'	GLM2000-53	Steel	6'	2 7/8	-	3 1/2	8 1/16	19	11 @ 2,855#
		GLMS2000-53	Steel	20'	2 7/8	12	3 1/2	8 1/16	19	4 @ 3,138#
		ALM2000-53	Alum	20'	2 3/8	-	13 1/4	8	53	4 @ 3,004#
	63'	GLMSL2000-53	Steel	25'	2 7/8	15 3/8	3 1/2	8 1/16	19	3 @ 3,285#
		GLM2000-63	Steel	6'	2 7/8	-	3 1/2	8 1/16	26	12 @ 2,855#
		GLMS2000-63	Steel	20'	2 7/8	12	3 1/2	8 1/16	26	4 @ 3,138#
	64'	ALM2000-63	Alum	20'	2 3/8	-	13 1/4	8	53	4 @ 3,004#
		GLMSLX2000-64	Steel	30'	2 7/8	18	3 1/2	8 1/16	54	3 @ 3,404#
	78'	GLMSL2000-78	Steel	25'	2 7/8	15 3/8	3 1/2	8 1/16	54	4 @ 3,285#
	83'	GLM2000-83	Steel	6'	2 7/8	-	3 1/2	8 1/16	54	16 @ 2,855#
		GLMS2000-83	Steel	20'	2 7/8	12	3 1/2	8 1/16	54	5 @ 3,138#
		ALM2000-83	Alum	20'	2 3/8	-	13 1/4	8	53	5 @ 3,004#
	94'	GLMSLX2000-94	Steel	30'	2 7/8	18	3 1/2	8 1/16	54	4 @ 3,404#
	103'	GLM2000-103	Steel	6'	2 7/8	-	3 1/2	8 1/16	54	20 @ 2,855#
		GLMS2000-103	Steel	20'	2 7/8	12	3 1/2	8 1/16	54	6 @ 3,138#
		ALM2000-103	Alum	20'	2 3/8	-	13 1/4	8	53	6 @ 3,004#
	124'	GLMSL2000-103	Steel	25'	2 7/8	15 3/8	3 1/2	8 1/16	54	5 @ 3,285#
		GLMSLX2000-124	Steel	30'	2 7/8	18	3 1/2	8 1/16	54	5 @ 3,404#

*This column provides the total number of support hangers with the corresponding vertical load applied by each support hanger (in pounds) based on the "L1" dimensions shown. Up to a 20" hanger drop will be provided by Gorbel. Additional hanger points or longer drops can be provided at an additional charge.

Gorbel® Monorail Kits include: monorail track, hoist trolley, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel monorail lengths greater than 63' and all aluminum systems), festoon stack-up section, splice joints and hanger brackets. Sway bracing is required on all systems except flush mounted systems (by others). Sway bracing kits are available but not included in the crane kit. Hoist provided by others.

Dimensions are for reference only and are subject to change without notice.

4000# CAPACITY

CEILING MOUNTED WORK STATION MONORAILS

4000# CAPACITY	MONORAIL LENGTH	MONORAIL LENGTH	TRACK MATL.	MAX L1	T1 in	H1 in	H2 ft	L3 in	L7 in	HANGERS (See Note)*
	23'	GLM4000-23	Steel	4'	3 3/8	-	3 1/2	15 1/16	9	7 @ 5,637#
		GLMS4000-23	Steel	20'	3 3/8	18	3 1/2	15 1/16	9	2 @ 6,014#
	28'	GLMSL4000-28	Steel	25'	3 3/8	20	3 1/2	15 1/16	13	2 @ 6,256#
	33'	GLM4000-33	Steel	4'	3 3/8	-	3 1/2	15 1/16	13	10 @ 5,637#
		GLMS4000-33	Steel	20'	3 3/8	18	3 1/2	15 1/16	13	3 @ 6,014#
	34'	GLMSLX4000-34	Steel	30'	3 3/8	21	3 1/2	15 1/16	13	2 @ 6,523#
	43'	GLM4000-43	Steel	4'	3 3/8	-	3 1/2	15 1/16	19	12 @ 5,637#
		GLMS4000-43	Steel	20'	3 3/8	18	3 1/2	15 1/16	19	3 @ 6,014#
	53'	GLM4000-53	Steel	4'	3 3/8	-	3 1/2	15 1/16	19	15 @ 5,637#
		GLMS4000-53	Steel	20'	3 3/8	18	3 1/2	15 1/16	19	4 @ 6,014#
		GLMSL4000-53	Steel	25'	3 3/8	20	3 1/2	15 1/16	19	3 @ 6,523#
	63'	GLM4000-63	Steel	4'	3 3/8	-	3 1/2	15 1/16	26	17 @ 5,637#
		GLMS500-63	Steel	20'	3 3/8	18	3 1/2	15 1/16	26	4 @ 6,014#
	64'	GLMSLX4000-64	Steel	30'	3 3/8	21	3 1/2	15 1/16	54	3 @ 6,523#
	78'	GLMSL4000-78	Steel	25'	3 3/8	20	3 1/2	15 1/16	54	4 @ 6,256#
	83'	GLM4000-83	Steel	4'	3 3/8	-	3 1/2	15 1/16	54	22 @ 5,637#
		GLMS4000-83	Steel	20'	3 3/8	18	3 1/2	15 1/16	54	5 @ 6,014#
	94'	GLMSLX4000-94	Steel	30'	3 3/8	21	3 1/2	15 1/16	54	4 @ 6,523#
	103'	GLM4000-103	Steel	4'	3 3/8	-	3 1/2	15 1/16	54	27 @ 5,637#
		GLMS4000-103	Steel	20'	3 3/8	18	3 1/2	15 1/16	54	6 @ 6,014#
		GLMSL4000-103	Steel	25'	3 3/8	20	3 1/2	15 1/16	54	5 @ 6,256#
	124'	GLMSLX4000-124	Steel	30'	3 3/8	21	3 1/2	15 1/16	54	5 @ 6,523#

*This column provides the total number of support hangers with the corresponding vertical load applied by each support hanger (in pounds) based on the "L1" dimensions shown. Up to a 20" hanger drop will be provided by Gobel. Additional hanger points or longer drops can be provided at an additional charge.

Gobel® Monorail Kits include: monorail track, hoist trolley, end stops, flat wire festooning, festoon gliders (festoon trolleys on steel monorail lengths greater than 63' and all aluminum systems), festoon stack-up section, splice joints and hanger brackets. Sway bracing is required on all systems except flush mounted systems (by others). Sway bracing kits are available but not included in the crane kit. Hoist provided by others.

Dimensions are for reference only and are subject to change without notice.


FOR MORE INFORMATION

Your authorized Gorbelt® dealer can give you more information on what makes Gorbelt's Ergonomic Work Station Cranes and other material handling products "A Class Above."




Overview

Cranes



Work Station Cranes



Jib Cranes




Cleveland Tramrail




Ergonomic Study

Ergonomic Lifting



GS Series Hoist



G-Force & Easy Arm



Ergonomic Study

Fall Protection



Visit our YouTube channel for more Gantry Crane videos!

View our Gantry Video playlist on YouTube!



Fall Arrest

GORBEL®
A C L A S S A B O V E

www.gorbel.com

GORBEL
600 Fishers Run
PO Box 593
Fishers, NY 14453 USA

T 800.821.0086
T 585.924.6262
F 585.924.6273
E info@gorbel.com

