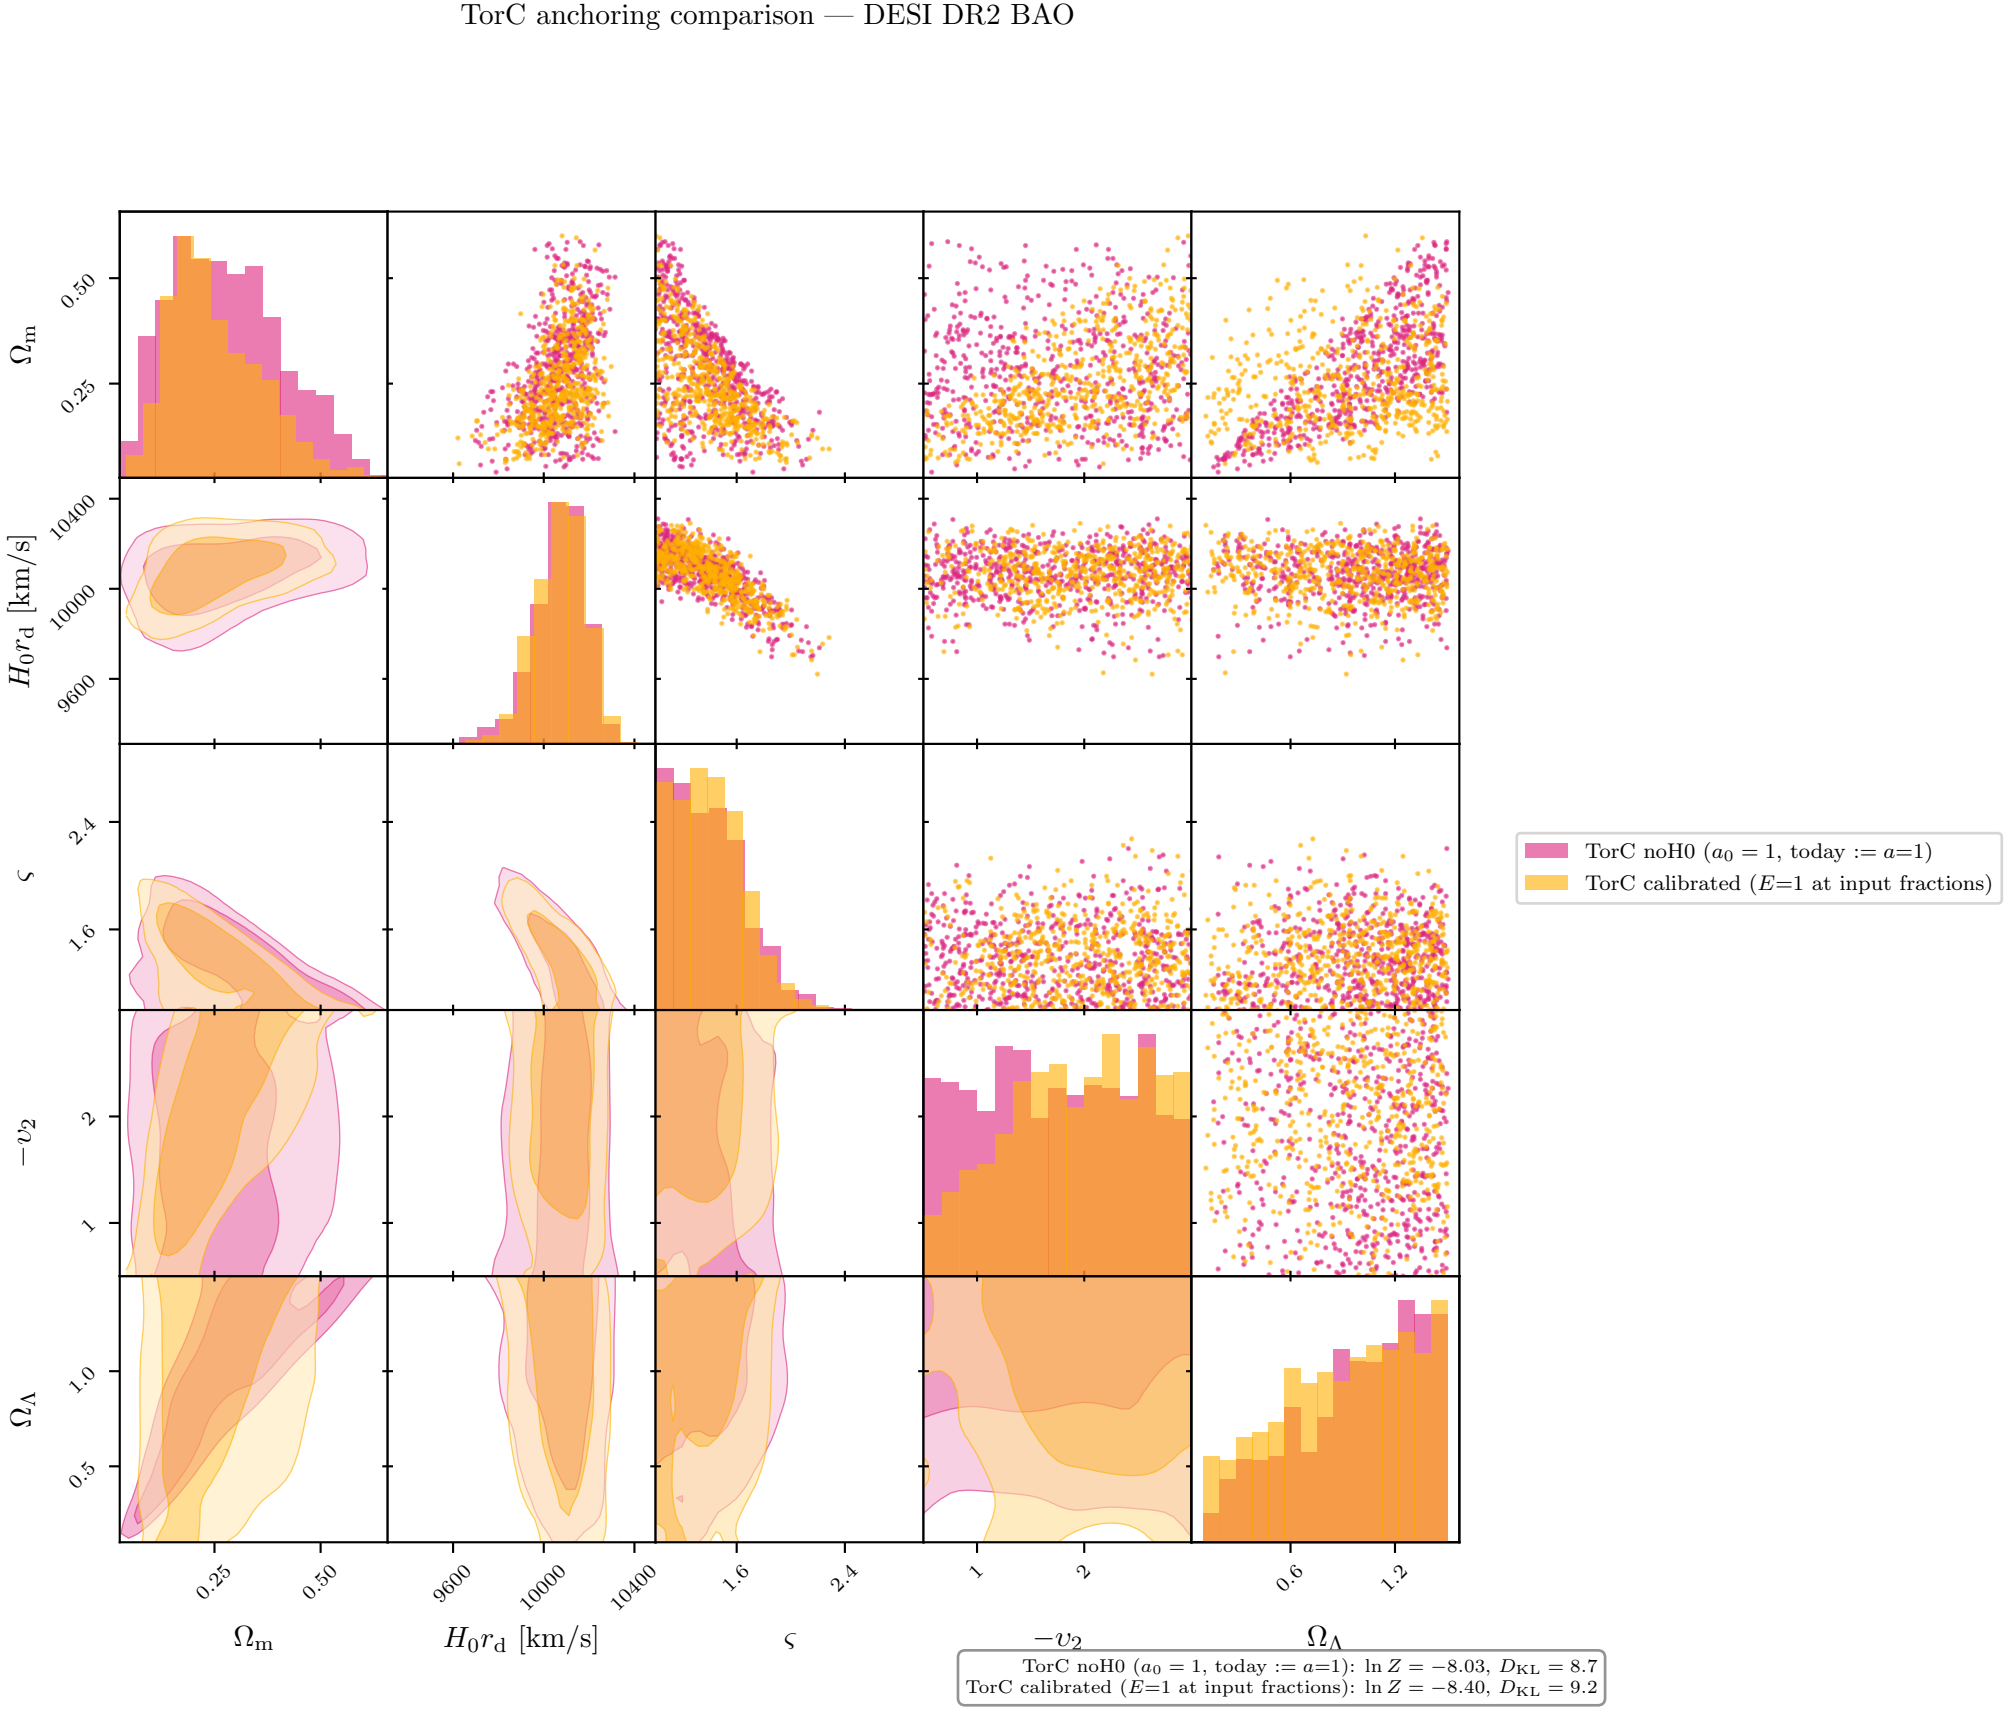

TorC anchoring comparison — DESI DR2 BAO
Ω_m
$H_0 r_d$ [km/s]
ς
$-v_2$
Ω_Λ
TorC noH0 ($a_0 = 1$, today := a=1)
TorC calibrated (E=1 at input fractions)
TorC noH0 ($a_0 = 1$, today := a=1): ln $Z = -8.03$, $D_{KL} = 8.7$
TorC calibrated (E=1 at input fractions): ln $Z = -8.40$, $D_{KL} = 9.2$