



Dallas 75229 - 1501, 11403 Mathis Dallas,
Texas 75234 United States of America.
Tel : +1 215 657 3335
Fax : +1 215 784 0343

- 100% high tenacity polyester of out sleeve and inner core
- With two ply woven heavy duty out sleeve
- Low elongation
- Each stripe is equal to 1 ton capacity
- Length available: 1m to 10m
- Safety factor available: 7:1 & 8:1
- According to EN 1492-2:2000






ISO9001:2000



Model: ASR07

ABLE ROUND SLING

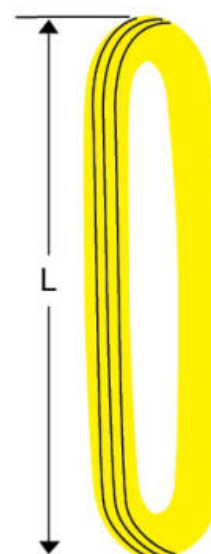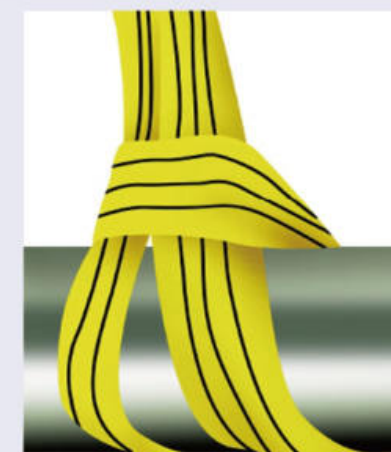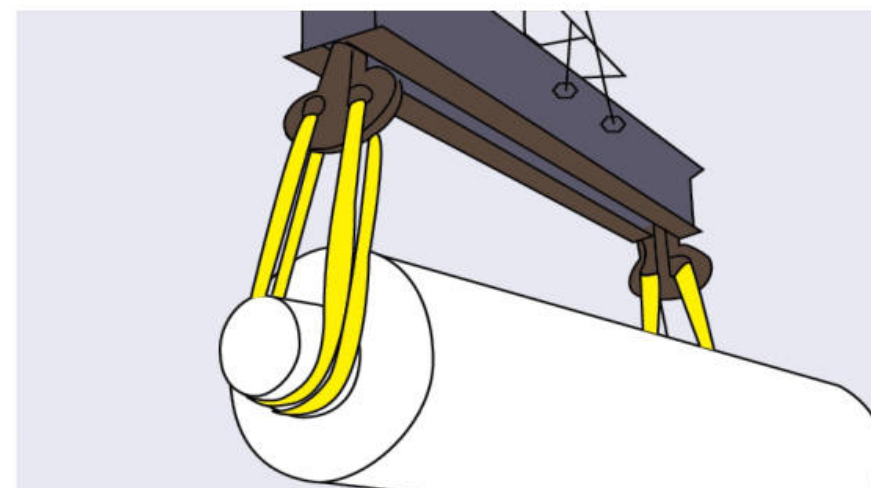

Colour	Colourcoded according to EN 1492-1	Working Load Limit with 1 Round sling							Working Load Limit with 2 Round sling			
		Straight lift	Choked lift	β					Straight lift up to 45°	Choked lift up to 45°	Straight lift up to 45°-60°	Choked lift up to 45°-60°
				0°-7°	7°-45°	45°-60°	up to 45°	45°-60°				
		1.0	0.8	2.0	1.4	1.0	0.7	0.5	1.4	1.12	1.0	0.8
Purple	WLL1T	1.0	0.8	2.0	1.4	1.0	0.7	0.5	1.4	1.12	1.0	0.8
Green	WLL2T	2.0	1.6	4.0	2.8	2.0	1.4	1.0	2.8	2.24	2.0	1.6
Yellow	WLL3T	3.0	2.4	6.0	4.2	3.0	2.1	1.5	4.2	3.36	3.0	2.4
Grey	WLL4T	4.0	3.2	8.0	5.6	4.0	2.8	2.0	5.6	4.48	4.0	3.2
Red	WLL5T	5.0	4.0	10.0	7.0	5.0	3.5	2.5	7.0	5.6	5.0	4.0
Brown	WLL6T	6.0	4.8	12.0	8.4	6.0	4.2	3.0	8.4	6.72	6.0	4.8
Blue	WLL8T	8.0	6.4	16.0	11.2	8.0	5.8	4.0	11.2	8.96	8.0	6.4
Orange	WLL10T	10.0	8.0	20.0	14.0	10.0	7.0	5.0	14.0	11.2	10.0	8.0

Notes: Bigger size up to 200T (20/30/50/80/100/200T) is available from our production upon demand.

ABLE PRODUCTS
W.L.L. 3000Kg
S/N: ASR071500
Safety Factor: 7 to 1
Round Sling

ABLE
www.ableforce.com

ABLE PRODUCTS
W.L.L. 3000Kg
S/N: ASR071500
Safety Factor: 7 to 1
Round Sling

There is no guess work in safe lifting

Ableforce INDUSTRIES
Reliability, secured.

Ableforce Manufacturing Inc.
1501, 11403 Mathis Dallas, Texas 75234 United States of America
Tel : +1 215 657 3335 Fax : +1 215 784 0343

1. Inspect the sling for any damage or wear before use.
2. Do not use the sling if it is damaged or worn.
3. Do not use the sling if it is not the correct size for the load.
4. Do not use the sling if it is not the correct type for the load.
5. Do not use the sling if it is not the correct material for the load.
6. Do not use the sling if it is not the correct color for the load.

1. Inspect the sling for any damage or wear before use.
2. Do not use the sling if it is damaged or worn.
3. Do not use the sling if it is not the correct size for the load.
4. Do not use the sling if it is not the correct type for the load.
5. Do not use the sling if it is not the correct material for the load.
6. Do not use the sling if it is not the correct color for the load.

ABLE
www.ableforce.com

PROOF TEST CERTIFICATE
Type: ASR07
Round Sling

This is to certify that the round slings have been manufactured and proof tested not less than two times of WLL, to EN1492-2:2000

Sling Material: 100% High Tenacity Polyester Fiber End Fittings: X

Serial Number/s: ASR071500 to ASR071500 Batch Number: LLA1029034

Working Load Limit: 3000kg Min. Proof Force: 21000kg

Effective Length: 6 mtrs Quantity: 500 pcs

Date of Manufacturing: 24/05/2025 Date of Testing: 29/05/2025

Tested and Approved for ABLE Products in accordance with Standard EN1492-2:2000
Ableforce Mfg Inc-USA-ISO9001 Certified Group

TESTING OFFICER
Howard Warner



ABLE round slings are easy to use, efficient in operation and gentle on surface contact. All round slings are colour coded to give easy identification of the safe working load. They come with a label giving length and tonnage. The round sling inner core is made from high tensile polyester fibre which is wound continuously without a join to provide the maximum possible strength. This core is protected by a tough woven tubular sleeve also made from polyester without side stitch. It serves to protect both the inner core of the sling and the surface of the product when lifting.