




尺寸:

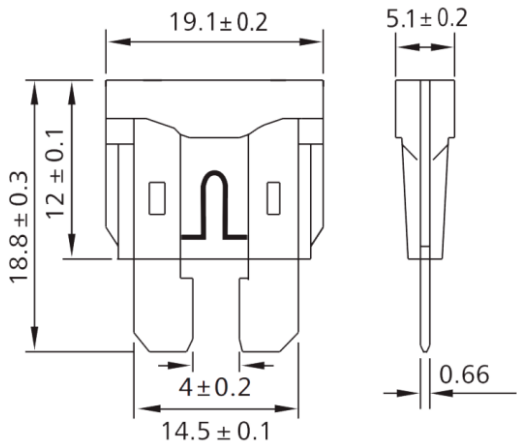

产品目录				
料号Amp code	电流 (A)	颜色 Color	Cold Resistance	I2t
AB19001	1A		123 mΩ	0.4 A²s
AB19002	2A		53.5 mΩ	1.4 A²s
AB19003	3A		31.1 mΩ	7.4 A²s
AB19005	5A		17.85 mΩ	26 A²s
AB1907.5	7.5A		10.91 mΩ	60 A²s
AB19010	10A		7.70 mΩ	115 A²s
AB19015	15A		4.80 mΩ	340 A²s
AB19020	20A		3.38 mΩ	520 A²s
AB19025	25A		2.52 mΩ	1080 A²s
AB19030	30A		1.97 mΩ	1510 A²s
AB19035	35A		1.61 mΩ	2280 A²s
AB19040	40A		1.44 mΩ	3310 A²s

测试标准Testing Standard: SAE J1284, JASO D612, ISO 8820-3,
额定电压Voltage Rating: 32 VDC
分断能力Interrupting Rating: 1000A @ 32 VDC
工作温度Operating Temperature Range: -40°C to +105°C (Ag=-40°C to +125°C)
材料 Materials: Plastic crust:plastic, Zinc piece:zinc

熔断特性:

电流额定值百分比 RATING	额定电流	熔断时间BLOWING TIME	
		最小min	最大max
110%	1A-40A	100小时	
135%	1A-2A	0.35秒	600秒
	3A-40A	0.75秒	600秒
200%	1A-2A	0.10秒	5秒
	3A-40A	0.15秒	5秒
350%	1A-2A	0.02秒	0.5秒
	3A-40A	0.08秒	0.5秒

电流时间曲线图 Time-Current Characteristics

