

HR681685

Electrical Specification @25°C

Isolation: 1500Vrms (Primary to Secondary)

Insertion Loss: -0.9dB Maximum @300KHz ~ 100MHz

Return Loss: -16dB Minimum @30MHz / -12dB Minimum @60MHz


-11dB Minimum @80MHz

Different to Common Mode Rejection: -35dB Minimum @30MHz / -33dB Minimum @50MHz


-20dB Minimum @100MHz / -20dB Minimum @150MHz

Crosstalk: -50dB Minimum @30MHz / -45dB Minimum @62MHz / -40dB Minimum @100MHz

Schematics

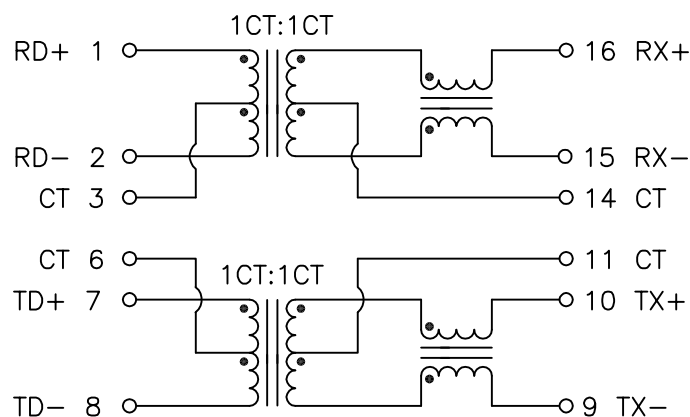

Mechanical Dimensions

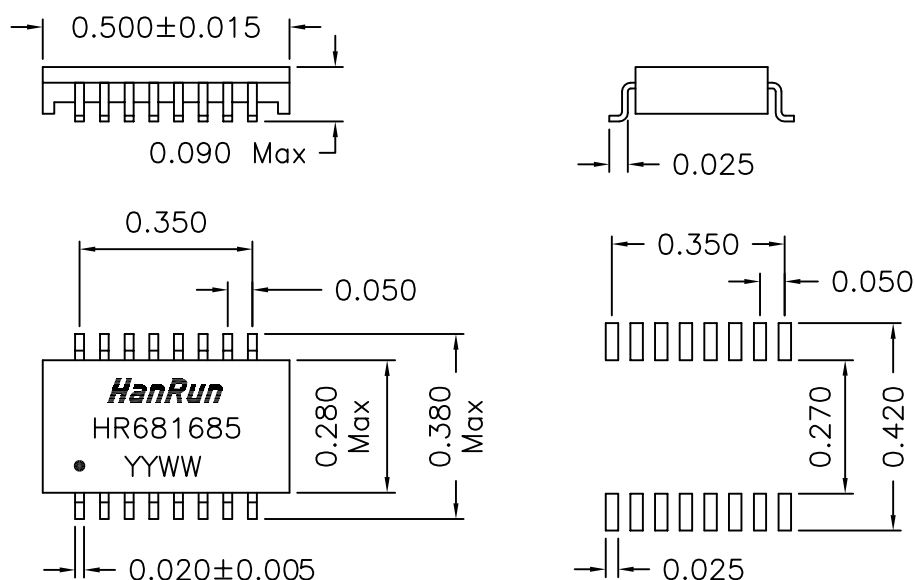

SUGGESTED PCB PAD LAYOUT

Dimensions in inches

Unless otherwise specified, Tolerance: .xxx ±0.010

REV.A/1

1 of 1