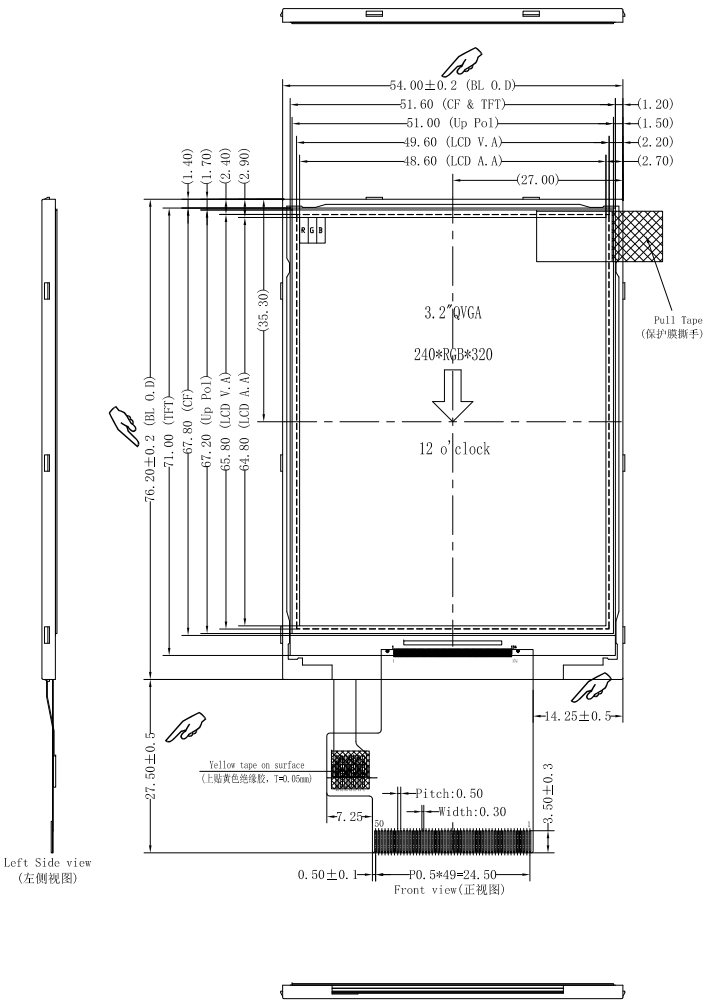
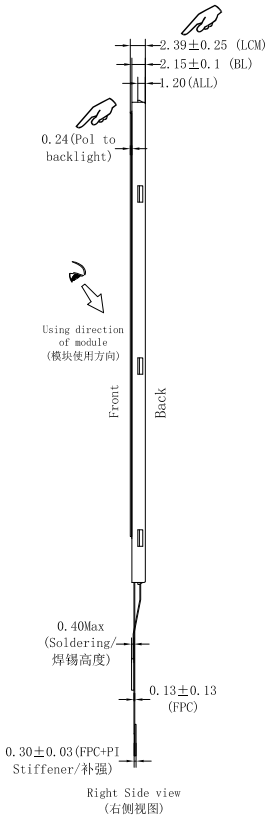
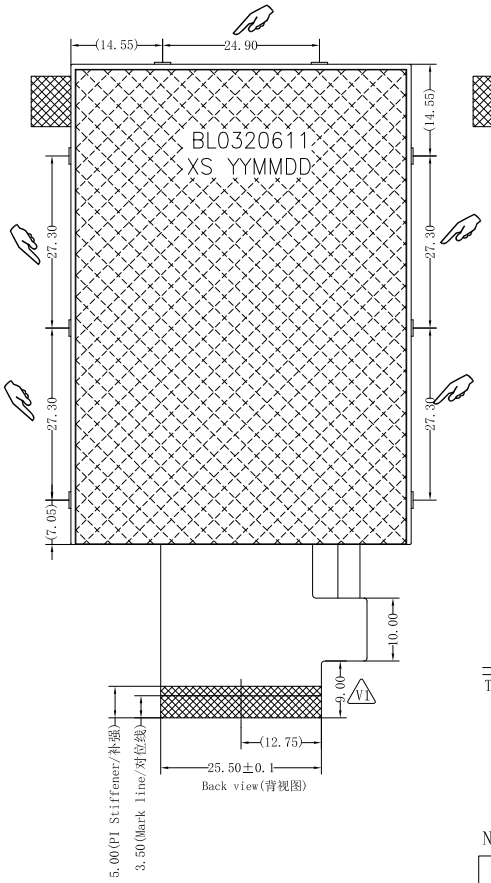
The unmarked size shall be subject to CAD(未标注尺寸以CAD为准)!

ReV.	Revision content description	Date
V0	First Issue	2023.06.20
V1	extend the length of FPC from 7mm to 9mm	2023.06.20

Note:The opening of top case must less than LCD POL 0.3mm at least, the LCD V.A is the Recommended opening of Lens.
注:上机壳开窗须小于 LCD POL 0.3mm以上, LCD V.A为上镜片建议开窗区.







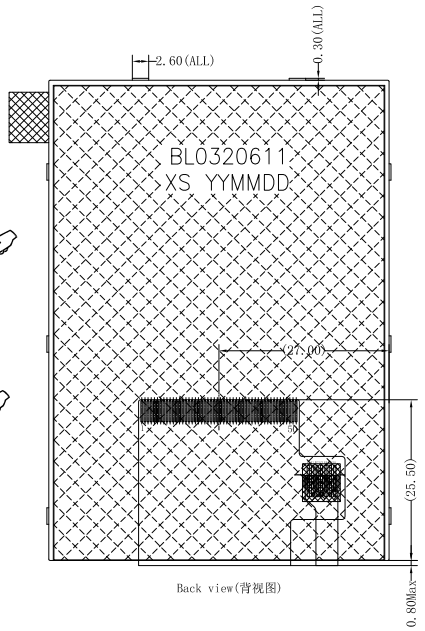


Diagram of TFT FPC bending(TFT FPC弯折示意图)

TFT FPC stretching model shipment(TF TFPC展开出货)

NO.	Pin Name
1	GND
2	XR(NC)
3	YD(NC)
4	XL(NC)
5	YU(NC)
6	IOVCC
7	IOVCC
8	VCI
9	VCI
10	IM2
11	IM1
12	IM0
13	RESET
14	CS
15	RS(SPI-SCL)
16	WR(SPI-RS)
17	RD
18	VSYNC
19	HSYNC
20	ENABLE
21	DOTCLK
22	SDA
23	DB0(B0)
24	DB01(B1)
25	DB02(B2)
26	DB03(B3)
27	DB04(B4)
28	DB05(B5)
29	DB06(G0)
30	DB07(G1)
31	DB08(G2)
32	DB09(G3)
33	DB10(G4)
34	DB11(G5)
35	DB12(R0)
36	DB13(R1)
37	DB14(R2)
38	DB15(R3)
39	DB16(R4)
40	DB17(R5)
41	SDO
42	GND
43	LEDA
44	LEDK1
45	LEDK2
46	LEDK3
47	LEDK4
48	LEDK5
49	LEDK6
50	GND


NOTE: RGB interface

RGB Interface	DB Pin in use
16(565) Bit RGB interface	DB17-DB13,DB11-DB6,DB5-DB1
18(666) Bit RGB interface	DB17-DB0

NOTE: If used RGB mode must select serial interface!

NOTES:

1. DISPLAY TYPE: 3.2", TFT-LCD, 65K/262K COLORS
2. DISPLAY MODE: NORMALLY WHITE
3. VIEWING DIRECTION: 6'O Clock
4. LCM DRIVER IC: ST7789V (COG)
 LCM Interface: 18/16/9/8 BIT MCU
 3/4-line Serial Interface
 3/4 line SPI+16/18BIT RGB
5. VCI:3.3V,IOVCC:1.65-3.3V(REF IC D.S)
5. OPERATING TEMP: -20° C TO 70° C
 STORAGE TEMP: -30° C TO 80° C
7. BACK LIGHT: 6 LED WHITE, 120 mA(constant current), (2.8~3.4)V
8. RoHS COMPLIANT.
9. " * "critical dimension;()reference dimension.



B/L Circuit

NOTE: MCU interface SET for IM PINS.

IM2	IM1	IM0	Interface type	DB Pin in use
0	0	0	DBI Tyb_ 16-bit interface	DB17-DB10,DB8-DB1
0	0	1	DBI Tyb_ 8-bit interface	DB17-DB10
0	1	0	DBI Tyb_ 18-bit interface	DB17-DB0
0	1	1	DBI Tyb_ 9-bit interface	DB17-DB9
1	0	1	3-Wire 9 BIT data serial interface	SDA SCL CS
1	1	0	4-Wire 8 BIT data serial interface	SDA SCL CS RS

NOTE: If not use PINS fix to the GND ,IOVCC or NC.

深圳市柯达科电子科技有限公司
SHENZHEN STARTEK ELECTRONICS CO.,LTD

TOLERANCE(公差)	DRAWING NAME	KD032QVTMN029	
	PARTS NO.	99032029A	
TOLERANCE UNLESS OTHERWISE SPECIFIED X.X±0.3 X.XX±0.2	Drawn		Unit
	Checked		mm
Scale 1:1	Approve		Page 1/1