CMOS/ 1.8V to 5.0V/ 5.0×3.2mm

Features
- Wide operating voltage range 1.6 to 5.5V
- ±25×10^{-6} available
- Highly reliable with seam welding
- Miniature ceramic package
- CMOS output

RoHS Compliant

Table 1

Freq. Tol.		Operating Temperature Range (°C)	Note
Code	×10^{-6}		
0	± 50	−10 to +70	Standard specifications
S	± 30		Please contact us for available frequencies.
U	± 25		
F	±100	−40 to +85	
G	± 50		
6	± 50	−40 to +105	

How to Order

KC5032A 25.0000 C M ☐ E 00
①　　　②　　③④⑤⑥⑦

① Series
② Output Frequency
③ Output Type (CMOS)
④ Supply Voltage (1.8V, 2.5V, 3.3V, 5V Compatible)
⑤ Frequency Tolerance (See Table 1)
⑥ Symmetry/ INH Function (45/ 55%, Stand-by)
⑦ Individual Specification (STD Specification is "00")
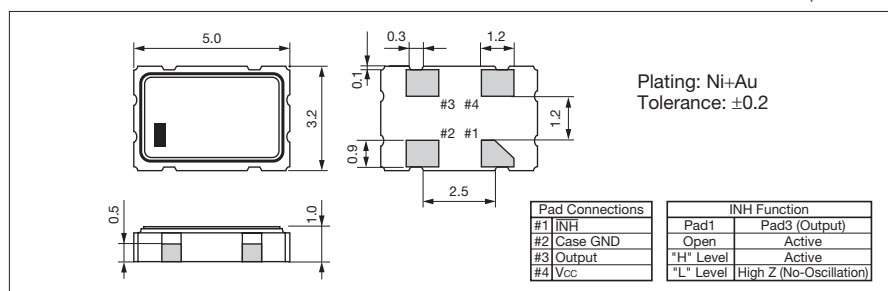 Packaging (Tape & Reel 1000 pcs./ reel)

Specifications

Item	Symbol	Conditions		Min.	Max.	Units
Output Frequency Range	fo			1.8	50	MHz
Frequency Tolerance	f_tol	Initial tolerance, Operating temperature range, Rated power supply voltage change, Load change, Aging (1 year @25°C), Shock and vibration	Op. Temp.: −40 to +85°C	−100	+100	×10^{-6}
			Op. Temp.: −10 to +70°C/ −40 to +85°C/ −40 to +105°C	−50	+50	
			Op. Temp.: −10 to +70°C	−30	+30	
			Op. Temp.: −10 to +70°C	−25	+25	
Storage Temperature Range	T_stg			−55	+125	°C
Operating Temperature Range	T_use	Standard Specification		−10	+70	°C
		Extend (Option)		−40	+85	
				−40	+105	
Max. Supply Voltage	—			−0.6	+6.5	V
Supply Voltage	Vcc			+1.6	+5.5	V
Current Consumption (Loaded) (1.6≤Vcc≤2.0V)	Icc	1.8≤fo≤20MHz		—	3.5	mA
		20<fo≤40MHz		—	4.5	
		40<fo≤50MHz		—	5.0	
Current Consumption (Loaded) (2.0<Vcc≤2.8V)		1.8≤fo≤20MHz		—	4.0	
		20<fo≤40MHz		—	5.0	
		40<fo≤50MHz		—	6.0	
Current Consumption (Loaded) (2.8≤Vcc≤3.63V)		1.8≤fo≤20MHz		—	5.0	
		20<fo≤40MHz		—	6.0	
		40<fo≤50MHz		—	7.0	
Current Consumption (Loaded) (3.63<Vcc≤5.5V)		1.8≤fo≤20MHz		—	7.0	
		20<fo≤40MHz		—	8.0	
		40<fo≤50MHz		—	9.5	
Stand-by Current	I_std			—	10	µA
Symmetry	SYM	@50% Vcc		45	55	%
Rise/ Fall Time (10% Vcc to 90% Vcc Maximum Loaded)	tr/ tf	1.6≤Vcc≤2V		—	8	ns
		2<Vcc≤2.8V		—	7	
		2.8<Vcc≤3.63V		—	6	
		4.5≤Vcc≤5.5V		—	5	
Low Level Output Voltage	VOL	IOL = 4mA		—	10% Vcc	V
High Level Output Voltage	VOH	IOH = −4mA		90% Vcc	—	V
Output Load	L_CMOS	1.6≤Vcc≤5.5V		—	15	pF
Input Voltage Range	VIN			0	Vcc	V
Low Level Input Voltage	VIL			—	30% Vcc	V
High Level Input Voltage	VIH			70% Vcc	—	V
Disable Time	t_dis			—	150	ns
Enable Time	t_ena			—	5	ms
Start-up Time	t_str	@Minimum operating voltage to be 0 sec.		—	10	ms
1 Sigma Jitter	JSigma	Measured with Wavecrest SIA-3000	1.8≤fo≤40MHz	—	8	ps
			40<fo≤50MHz	—	5	
Peak to Peak Jitter	JPK-PK	Measured with Wavecrest SIA-3000	1.8≤fo≤40MHz	—	80	ps
			40<fo≤50MHz	—	50	

Note: All electrical characteristics are defined at the maximum load and operating temperature range.
　　　Please contact us for inquiry about operating temperature range, available frequencies and other conditions.

Dimensions
(Unit: mm)

Plating: Ni+Au
Tolerance: ±0.2

Pad Connections	
#1	INH
#2	Case GND
#3	Output
#4	Vcc

INH Function		
	Pad1	Pad3 (Output)
	Open	Active
	"H" Level	Active
	"L" Level	High Z (No-Oscillation)

Recommended Land Pattern
(Unit: mm)

Note: A capacitor of value 0.01µF between Vcc and GND is recommended.

As of March 2018