



SOLO[®]

Lightweight, 100% Circular and Low Carbon footprint

500 ~ 520 Wp
Mono PERC - 72 cells

- ✓ Strong and light polymers result in a weight of only 5,5kg/m²
- ✓ 25% better carbon footprint than conventional modules
- ✓ Designed for circularity
- ✓ PFAS-free
- ✓ Take-back guarantee

25 years
Power warranty

16 years
Product warranty

Certifications & Quality Standards

IEC 61215/61730*

IEC 62716* (Ammonia)

IEC 61701* (Salt)

IEC 60068-2-68* (Sand)

ISO 9001*: Quality Management System

ISO 14001*: Environmental Management Systems

ISO 45001*: Occupational Health and Safety Management Systems * Pending



SOLO Specifications

Electrical Characteristics

Module Type	SOLO-500	SOLO-505	SOLO-510	SOLO-515	SOLO-520
Max Power (Pmax/W)	500	505	510	515	520
Voltage at Max. Power (Vmp/V)	41,1	41,4	41,7	42,0	42,3
Current at Max. Power (Imp/A)	12,18	12,23	12,27	12,32	12,36
Open Circuit Voltage (Voc/V)	50,4	50,6	50,8	51,0	51,2
Short Circuit Current (Isc/A)	12,82	12,84	12,86	12,88	12,90
Module Efficiency (%)	18,5	18,7	18,8	19,0	19,2

Specifications

Amount of cells	72
Cell type	M10 Mono PERC c-Si
Dimensions (clamping height)	2335 x 1159 x 35mm
Dimensions without mounting	2335 x 1137 x 47mm
Weight module	14,5kg
Weight module per m²	5,5kg/m²
Cable length & cross section 2 pcs	1400mm x 4mm²
Connector type	Stäubli MC4-Evo 2A
By-pass devices	6 pcs in junction boxes
Country of manufacturing	The Netherlands

Logistical Details

Number of modules per pallet	23
Weight pallet	350 kg
Dimensions pallet	2400 x 1200 x 1330mm

Operating Parameters

Operational Temperature	-40°C / +85°C
Power Output Tolerance	0~2%
Voc and Isc Tolerance	± 2%
Maximum System Voltage	1500 V DC
Fire Rating	Class C


Temperature Ratings

Temperature Coefficient Isc (%/°C)	0,024
Temperature Coefficient Voc (%/°C)	-0,24
Temperature Coefficient Pmax (%/°C)	-0,36

Mechanical Characteristics

Front Side Max. Static Loading	2400Pa
Rear Side Max. Static Loading	2400Pa
Hailstone Test	25mm at speed 80km/h


25-Year Power Warranty

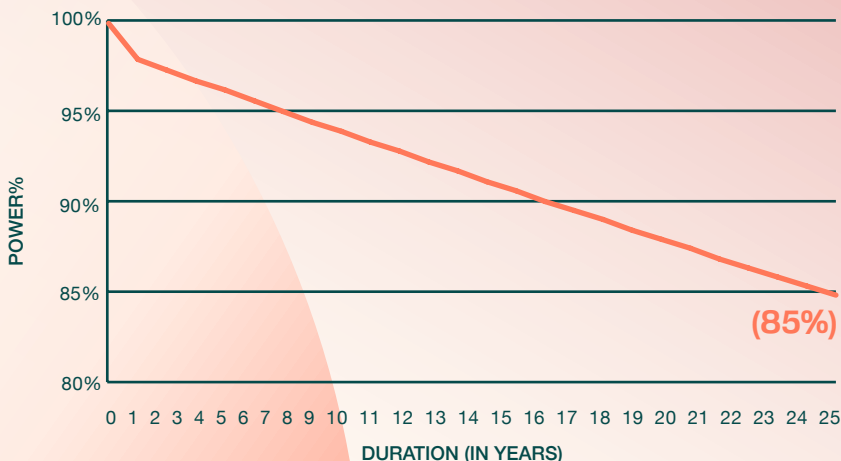




Interface clamp

Dimensions

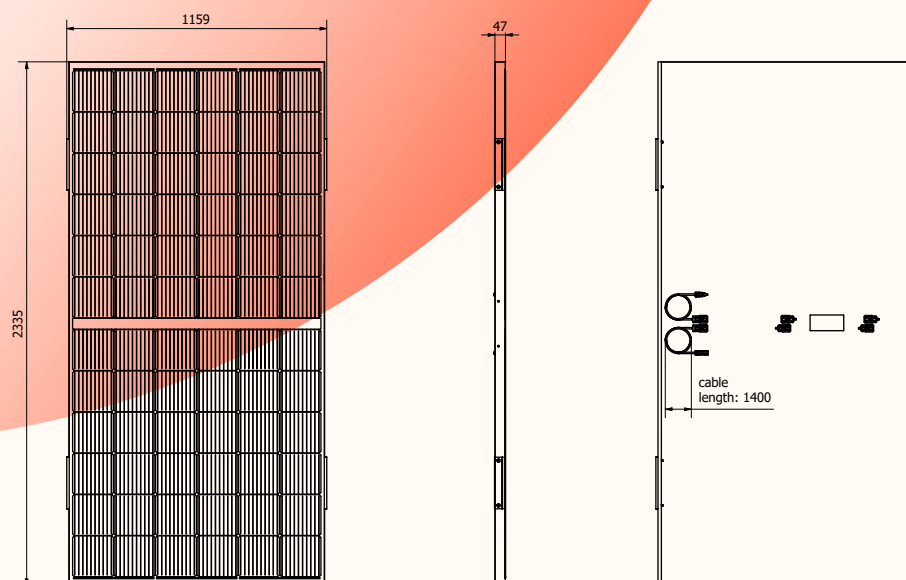


Thickness material	15mm
Clamping height	35mm
Total panel height	47mm
Max.deviation in size	± 2mm

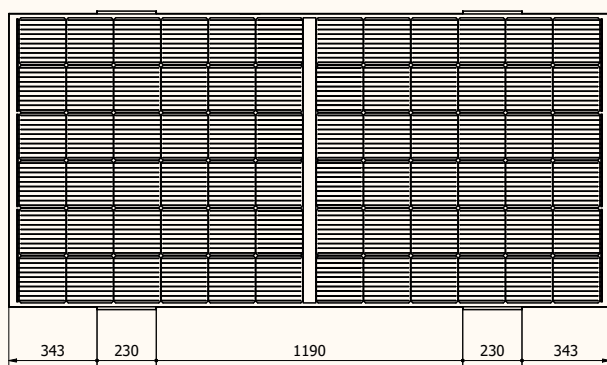

Clamping positions for 4 and 6 clamp brackets.
6 clamp brackets advised for high wind zones,
contact Solarge for more information.

Dimensions with 4/6 brackets

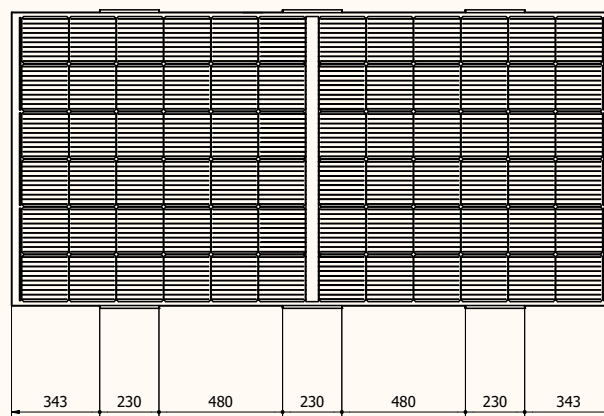




Circularity Specifications

Material Composition

Polymer	63%
Glass (fibres)	24%
Silicon* (solar cells)	8%
Copper* (wires and ribbons)	3%
Aluminium (mounting brackets)	2%
Unknown	0%

*Critical substance

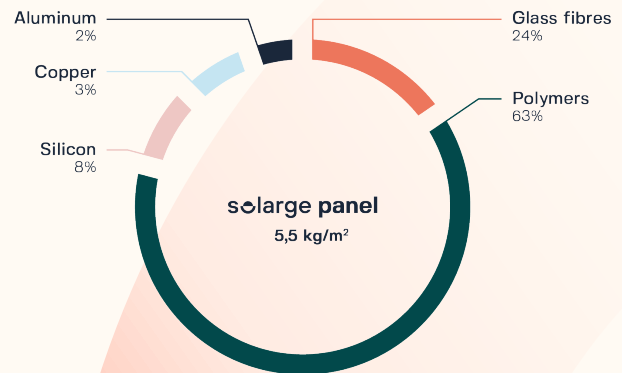

End of Life (Destination)

	SOLO
% Recovered critical materials	100%
% Recyclable (no downcycling)	98%
% Biodegradable	0%
% Reusable (mounting brackets)	2%
% Landfilled	0%
% Incinerated	0%
Refund	€1
Take back warranty	After lifespan it is guaranteed that Solarge takes back the solar panels

Source Material

	SOLO	Conventional*
% Primary	98%	100%
% Recycled	2%	0%
% Biobased/renewable	0%	0%
% Reused	0%	0%

Carbon Footprint

	SOLO	Conventional*
Kilogram CO ₂ -eq./kWp	592	1600

Toxicity & Health Impact

	SOLO	Conventional*
No antimony	+	-
No fluoropolymers (PFAS)	+	-
No emissions at silicon refining	-	-
No lead-based soldering	-	-

*Reference values for conventional glass-based solar panel [NMD_32993]



Contact

info@solarge.com

