




Section A-A



Section B-B

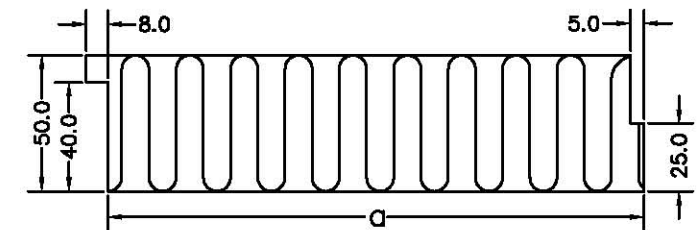

Section in Rockwool Batts

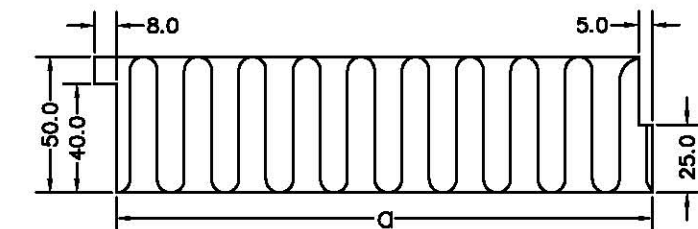

Section in Rockwool Lamel

No.	Revision	Date	By	Issued for	Date	By
Wooltype/Woolnumber		Tolerances		Remarks		
RW Batts 32kg/m <sup>3</sup>		Maximum	±10%			
① ○ ○ ○		Minimum				
RW Firebatts 110kg/m <sup>3</sup>		Maximum	±10%			
○ ○ ○ ○		Minimum				
RW Lamel no/oil 160kg/m <sup>3</sup>		Maximum	±10%			
② ○ ○ ○		Minimum				
Steeldrawing A.C5.100.		Woolcutting	±0.5	Fire class B15		
Nom. width	a	①	②	③	④	
300	297	297x45x900	305x50x75			
265	262	262x45x900	270x50x75			
200	197	197x45x900	205x50x75			
Standard ceilingpanel				By / Date		Date
Type C55				Drawn ERH/94.10.10		Rev.:
				Check.		Last Plot
				Appr.		Cad File
				Scale: --		
				Drawing no:		Rev.:
				A.C55.100		



INEXA A/S  
DK-2640 Hedehusene, Denmark  
Tel.: +45 4656 3700  
Fax: +45 4656 0466

