

24-Hour Service Hotline **400-8899-683**

TikTok



Wechat



Website



GENERAL ELEVATOR

POPULAR IN THE WORLD

PRODUCT MANUAL ➔

GENERAL ELEVATOR CO., LTD.

Add: Qidu Development Zone, Wujiang, Suzhou City, Jiangsu Province
 International Trade Dept. : +86-512-80678999
 Fax : 86-512-63812188 86-512-63818567
 Postcode : 215234
 Http://www.sge-elevator.com E-mail: sge@sge-elevator.com

ELEVATOR

ESCALATOR

Stock code
300931

Perfect Vertical Transport Solutions

General Elevator's product system covers passenger elevators, freight elevators, escalators, moving walks, elevators for existing buildings and other vertical transport solutions. We can meet your demands and provide efficient reliable product solutions for new and old buildings to contribute to smooth vertical transport of urban buildings.



A Trustworthy Partner General Elevator



- The first elevator company listed on the Growth Enterprise Market
- One of the top 10 elevator enterprises in terms of brand value
- A smart factory of Industry 4.0
- A marketing network covering more than 50 countries and regions
- A national-level experiment center certified by CNAS
- One-stop vertical passenger transportation solutions

General Elevator strives to create a more efficient urban transport life in a higher, faster and smart world. We concentrate on passenger transportation in and between buildings and create safe, convenient, reliable passenger transportation experiences for people. General Elevator Co., Ltd. (Stock Code: 300931; Abbreviated Stock Name: General Elevator), as the first elevator enterprise listed on the Growth Enterprise Market, provides customers with elevators, escalators and solutions to their maintenance, renewal and transformation and ensures the full-life-cycle value of buildings. For decades, with our innovative solutions and great engineering ability, we have taken a place among globally leading elevator companies.

With a global service network, we have offered products to many famous buildings, busy transportation hubs and shopping centers worldwide. General Elevator scales a new urban height with you.

General Elevator will concentrate on providing more digital solutions and become a world-class company which centers on customers, takes services as a fundamental task and moves forward.

Intelligent Manufacturing Geared to the Era of Industry 4.0



Closely following the development trend in the era of Industry 4.0, General Elevator makes plans for and carries out automatic intelligent manufacturing comprehensively. At present, with 5 intelligent production lines including the car panel production line, the door panel production line and the reinforcing rib production line, General Elevator has further optimized the manufacturing technologies and precision and improved the production efficiency and quality. Moreover, General Elevator has been rated as an intelligent industrial demonstration enterprise in Suzhou by the integrated information and industry management system.

General Elevator is Popular in the world



The first elevator enterprise listed on GEM

In January 2021, general Elevator Co., Ltd. was officially listed on the gem of Shenzhen Stock Exchange, becoming the first enterprise in the elevator industry in China.

NEW STARTING POINT
NEW PLATFORM
NEW FUTURE

stock name
GENERAL ELEVATOR
stock code
300931



GENERAL ELEVATOR

Passenger Elevator



Mobile spaces appreciate with the rising value of buildings

General Elevator contributes to the vertical transport of buildings worldwide. General Elevator focuses on constantly optimizing and upgrading space structures and aims to maximize the space value of buildings.

With perfect technologies, General provides the best ride experiences

Passenger elevators of General are used for transport people up and down. Adopting safe green comfortable intelligent cutting-edge technologies, the passenger elevators take the feelings of people into account and create an excellent loading space.



Realized Value

Small Machine Room Structure: dramatically save the area for machine rooms.
Machine Roomless Structure: machine roomless elevators can be used for different buildings.
Structural Optimization: optimize the elevator structure to reduce the area of shafts, the height of top floors and the depth of pits.

GEJ 072



Car standard

Ceiling (Integrated type): Mirror stainless steel, acrylic roof lamp, LED tube lamp
Ventilation: Axial fan
Car wall: Hairline stainless steel
Floor: PVC floor


Panoramic Elevator



The panoramic elevators of General have large transparent glass car walls and wide visual spaces, offer comfortable rides for passengers, add beauty to buildings and increase aesthetic value of buildings.

Multiple Models for Different Buildings

The panoramic elevators of General have multiple models for different buildings so elevators can perfectly fit in buildings. While providing smooth transport, they constitute beautiful views.



GEJ 023



Car standard

Car cover: Steel plate baked enamel, decoration light
Ceiling: Baked enamel frame, acrylic lighting decoration, LED tube light
Car wall: Hairline stainless steel, etched side and central wall, safety laminated glass
Handrail: Stainless steel tube
Floor: PVC parquet floor

GENERAL ELEVATOR



Hospital Elevator



Home Lift



GEJ 224

Car standard

Ceiling: Mirror stainless steel frame,
LED downlight
Ventilation: Axial fan
Car wall: Hairline stainless steel
Car door: Hairline stainless steel
Floor: PVC parquet floor



GEJ 047

Car optional

Ceiling: Mirror stainless steel frame,
acrylic lamp
Ventilation: Axial fan
Car wall: Hairline stainless steel
Car door: Hairline stainless steel
Floor: PVC parquet floor



ZK-L01

Car standard

Ceiling: Aluminum alloy frame +
acrylic luminescent panel
Car wall: Hairline stainless steel
Front wall: Hairline stainless steel
Floor: PVC (optional marble)

360°
Understand
the car



ZK-L02

Car standard

Ceiling: Bake finish steel plate +
linear light + downlight
Car wall: Hairline stainless steel
Front wall: Hairline stainless steel
Floor: PVC (optional marble)

360°
Understand
the car



GENERAL ELEVATOR

Freight Lift



Car Lift



GEJ 014

Car standard

Ceiling: Paint steel
Car wall/Car door: Paint steel
Door opening mode: Side-opening door
Operation panel/outer calling: Hairline stainless steel
Floor: Checkered plate

Ventilation: Circular fan
Illumination: LED Downlight
Sill: Steel plate bending



GET 003

Side opening

Landing door: Paint steel
Jamb: Paint steel



GEB 105

Checkered plate



GET 004

2-panels center opening
Landing door: Paint steel
Jamb: Paint steel



GET 105


4-panels center opening
Landing door: Paint steel
Jamb: Paint steel

Dumbwaiter Elevator



GENERAL ELEVATOR

Cabin series →

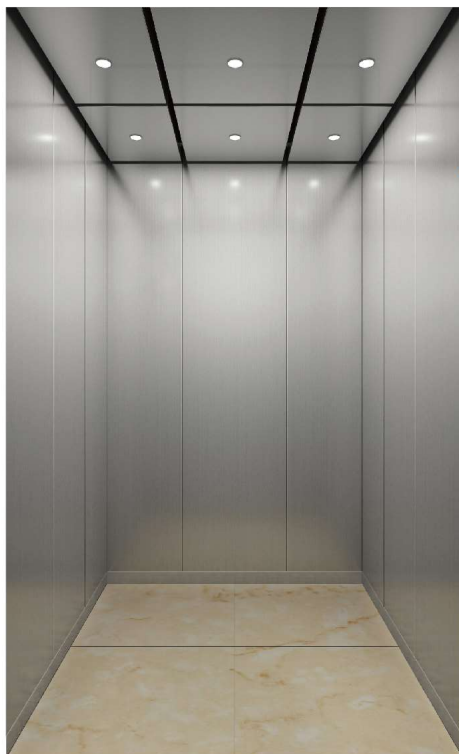


< GEJ 063

Ceiling: Mirror stainless steel, LED tube lamp
Ventilation: Axial fan
Car wall: Hairline stainless steel
Car floor: PVC floor

> GEJ 073

Ceiling: Mirror stainless steel, acrylic roof lamp, LED tube lamp
Ventilation: Axial fan
Car wall: Hairline stainless steel
Car floor: PVC floor

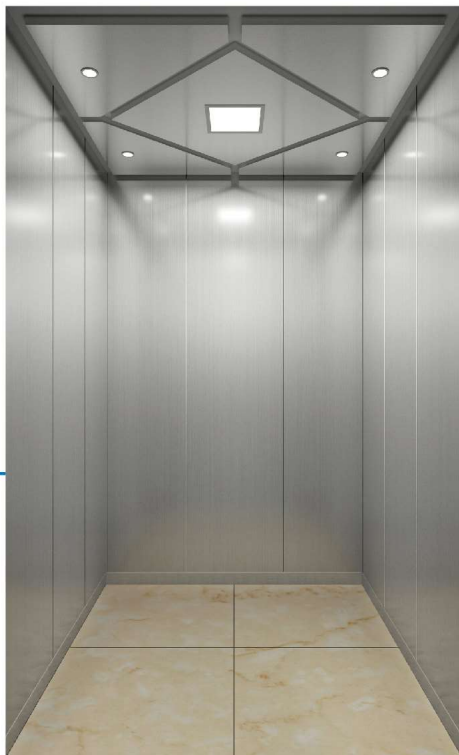

Cabin series →




< GEJ 110

Ceiling: Stainless steel mirror frame with acrylic top-board, LED tube lamp
Ventilation: Axial fan
Car wall: Hairline stainless steel
Car floor: PVC floor

> GEJ 111

Ceiling: Stainless steel mirror frame with acrylic top-board, LED tube lamp
Ventilation: Axial fan
Car wall: A combination of the hairline stainless steel and mirror etched stainless steel
Handrail: Stainless steel round handrail
Floor: PVC parquet floor

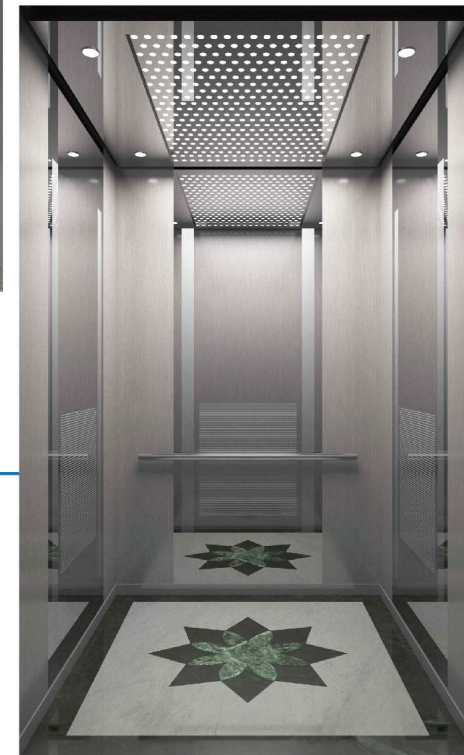

GENERAL ELEVATOR

Cabin series →



< GEJ 053


Ceiling: Mirror stainless steel, acrylic lighting decoration
Ventilation: Axial fan
Car wall: Combination of etched mirror stainless steel and hairline stainless steel
Floor: PVC parquet floor



> GEJ 203

Ceiling: Mirror stainless steel, acrylic lighting decoration, tube lamp
Ventilation: Axial fan
Car wall: Combination of hairline stainless steel and etched mirror stainless steel
Floor: PVC parquet floor

Cabin series →

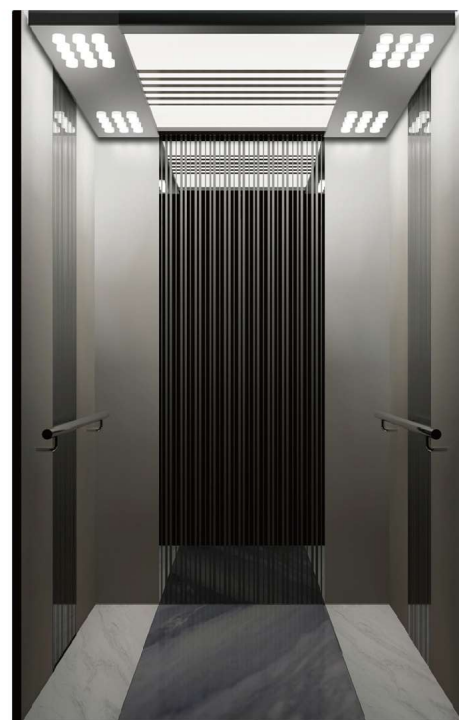


< GEJ 035

Ceiling: Mirror stainless steel, acrylic lighting decoration
Ventilation: Axial fan
Car wall: Titanium black, mirror, etching, hairline stainless steel
Handrail: Stainless steel round pipe
Car floor: PVC parquet floor


> GEJ 062

Ceiling: Baking finish steel plate frameworks with mirror-like decorative stainless steel strips; beam projectors; artistic decorative acrylic lights
Ventilation: Axial fan
Car wall: Stainless steel sandblast, etched mirror, rose gold vibration
Handrail: Stainless steel flat handrail
Floor: Marble floor

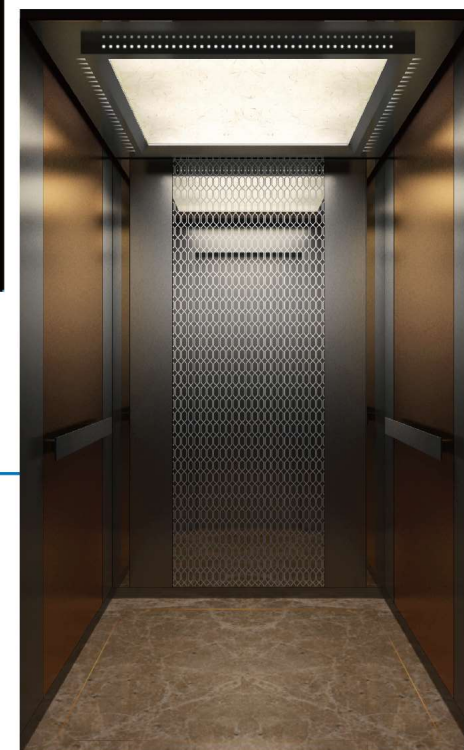


GENERAL ELEVATOR

Cabin series →

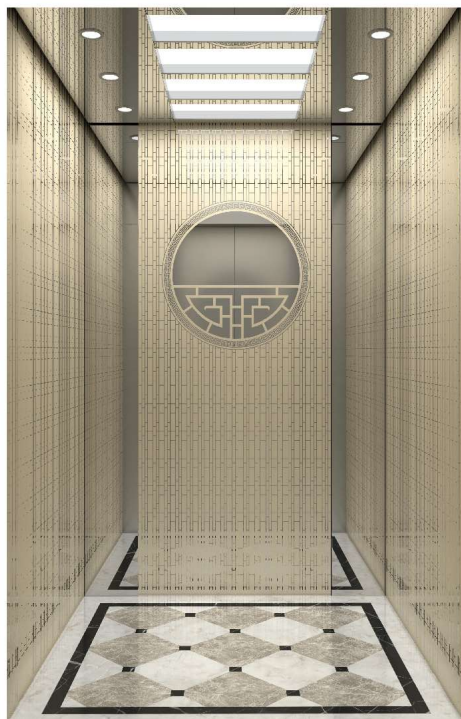

< GEJ 912

Ceiling: Champagne gold mirror stainless steel frame, acrylic lighting decoration, LED tube lamp
Car wall: Champagne gold mirror etch
Car floor: PVC parquet floor

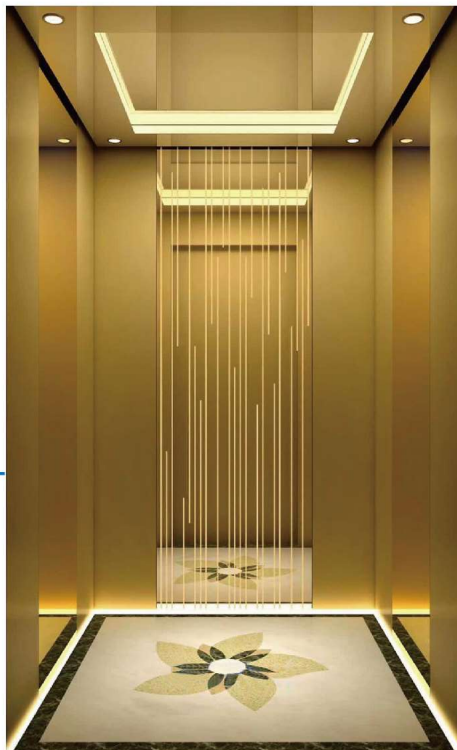

> GEJ 205

Ceiling: Titanium gold mirror stainless steel frame, tube lamp, light strip
Ventilation: Axial fan
Car wall: Titanium gold, mirror, etching, hairline
Floor: PVC parquet floor

Cabin series →




< GEJ 112

Ceiling: Titanium gold brushed stainless steel frame, acrylic lighting decoration
Ventilation: Axial fan
Car wall: Titanium gold, mirror, etching, hairline, vibration
Handrail: Combination of round wood and titanium gold
Floor: PVC parquet floor

> GEJ 210

Ceiling: Mirror rose gold stainless steel frameworks with LED down lights; lamplight hidden on inner sides of rims; ceilings with decorative gold foil and European-style ceiling lights
Ventilation: Axial fan
Car wall: Mirror rose gold sand blast stainless steel, mirror-like rose gold stainless steel, rose gold hairline stainless steel
Floor: PVC parquet floor

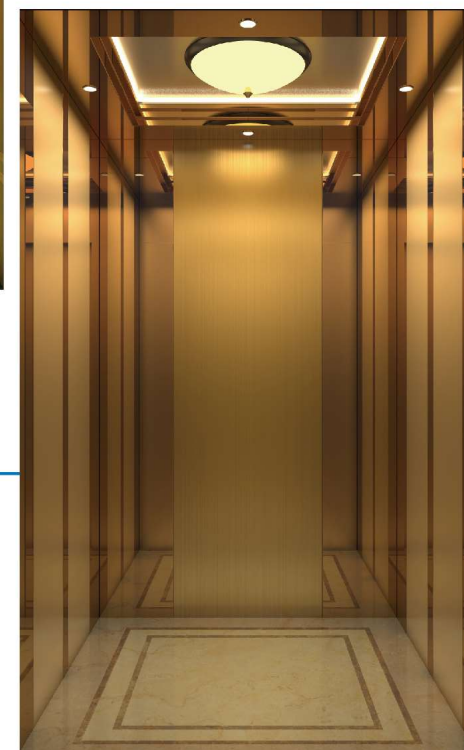

GENERAL ELEVATOR

Cabin series →




< GEJ 212

Ceiling: Champagne gold brushed stainless steel frame, acrylic lighting decoration
 Ventilation: Axial fan
 Car wall: Champagne gold mirror brushed, champagne gold mirror stainless steel, champagne gold mirror etched
 Handrail: Titanium gold round pipe
 Floor: Marble floor

> GEJ 213

Ceiling: Bronze mirror frame, white transparent plate
 Ventilation: Axial fan
 Car wall: Walnut wood veneers, bronze brushed etched
 Handrail: Bronze handrail stainless steel round handrail
 Floor: Marble inlaid with bronze stainless steel floor

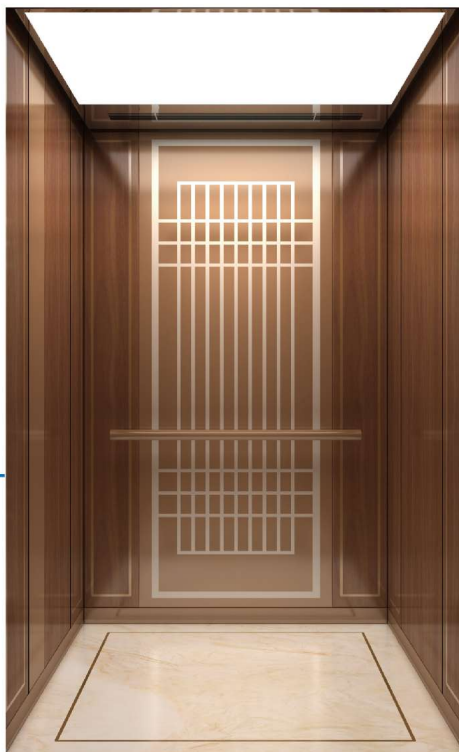

Cabin series →




< GEJ 214

Ceiling: Steel plate frameworks with white baking finish and LED downlights; lampights hidden on inner sides of rims; ceilings with decorative champagne gold foil
 Ventilation: Axial fan
 Car wall: Bronze mirror stainless steel, bronze mirror sand-blast etched stainless steel
 Handrail: Bronze hairline stainless steel flat handrail
 Floor: Marble floor

> GEJ 206

Ceiling: Spray coating steel plates; wood grain frameworks with spray coating steel plates; LED downlights
 Ventilation: Axial fan
 Car wall: Black walnut-clad steel plates; mirror titanium gold-colored decorative strips; artistic glass
 Handrail: Black antique finish of wood handrails
 Floor: Marble floor

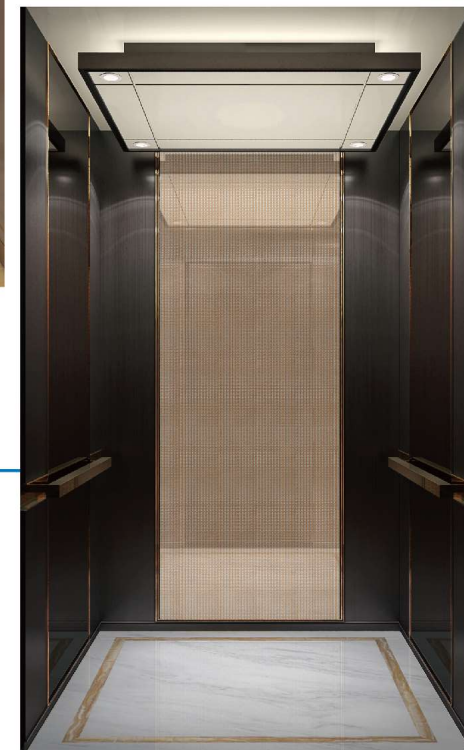

GENERAL ELEVATOR

Cabin series →



< GEJ 215


Ceiling: Steel plate frameworks with matte black baking finish; middle mirrors with stainless steel veneers; acrylic
Ventilation: Axial fan
Car wall: Bronze brushed stainless steel; mirror stainless steel; embossed stainless steel
Floor: Marble floor



> GEJ 207

Ceiling: Mirror brown stainless steel frameworks; artistic luminescent panels
Ventilation: Axial fan
Car wall: Brown brushed stainless steel; mirror brown stainless steel; frosted glass
Handrail: Hairline finish stainless steel plated with copper
Floor: Marble parquet floor

Cabin series →

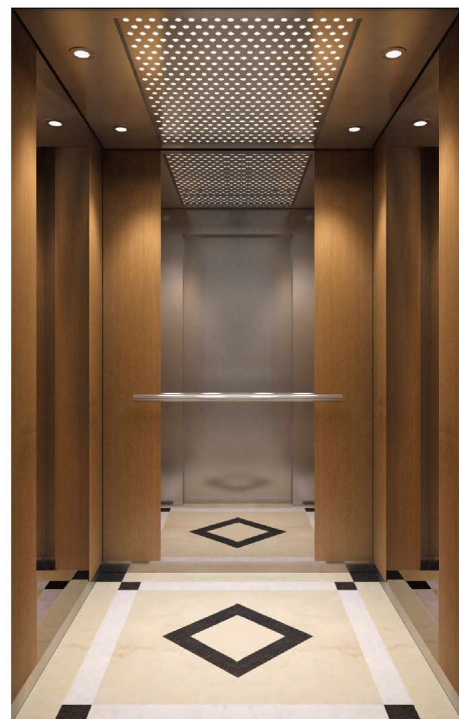


< GEJ 066

Ceiling: Hairline stainless steel frame, acrylic light, tube lamp
Ventilation: Axial fan
Car wall: Wood veneer, Mirror stainless steel
Handrail: Hairline stainless steel round handrail
Floor: PVC parquet floor


> GEJ 076

Ceiling: Mirror stainless steel, acrylic lighting decoration
Ventilation: Axial fan
Car wall: Mirror stainless steel, steel plates with black walnut veneers
Floor: PVC floor

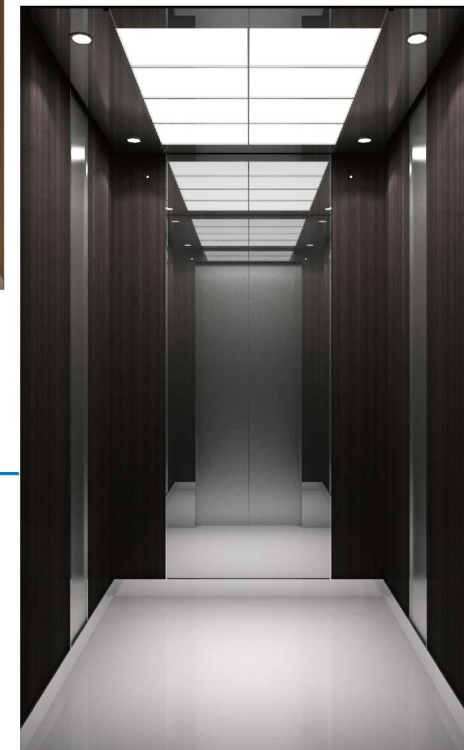

GENERAL ELEVATOR

Cabin series →

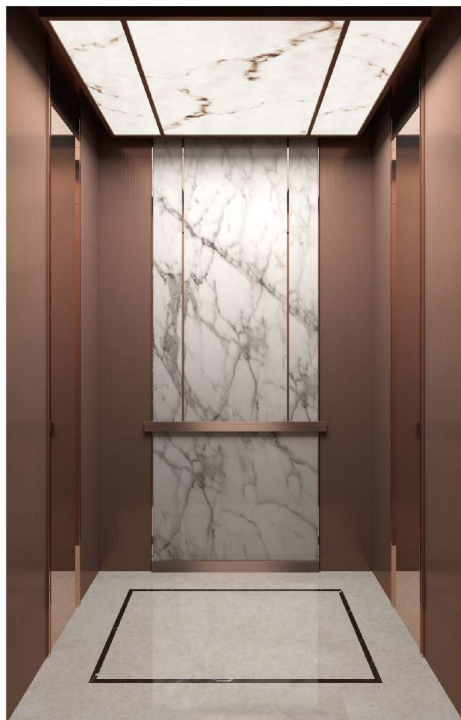

< GEJ 219

Ceiling: Bronze brushed hairline finish stainless steel rims;
snowflake white translucent marble slate
Ventilation: Axial fan
Back wall: Snowflake honeycomb marble; mirror bronze
decorative strips; bronze brushed hairline finish stainless steel
Side wall: Middle mirror bronze stainless steel; mirror-like
bronze decorative strips; bronze brushed hairline finish
stainless steel
Handrail: Bronze brushed hairline finish stainless steel
handrails
Floor: Parquet marble floor



> GEJ 208

Ceiling: Rose gold hairline stainless steel frame, translucent
stone
Ventilation: Axial fan
Car wall: Rose gold hairline stainless steel, black titanium
hairline stainless steel decorative stripes, giallo atlantide
mable, black titanium mirror stainless steel
Handrail: Rose gold hairline stainless steel round handrail
Floor: Marble floor

Cabin series →




< GEJ 220

Ceiling: Brown hairline stainless steel frame, translucent stone
Ventilation: Axial fan
Car wall: Brown hairline stainless steel, black titanium hairline
stainless steel decorative bar, giallo atlantide mable
Handrail: Brown hairline stainless steel round handrail
Floor: Marble floor

> GEJ 221

Ceiling: Stainless steel framework with LED downlights;
lamplight hidden on inner sides of rims; ceilings with
decorative gold foil
Ventilation: Axial fan
Car wall: Titanium mirror stainless steel, titanium mirror
stainless steel frame, marble, wood finish
Handrail: Titanium gold stainless steel round handrail
Floor: Marble floor

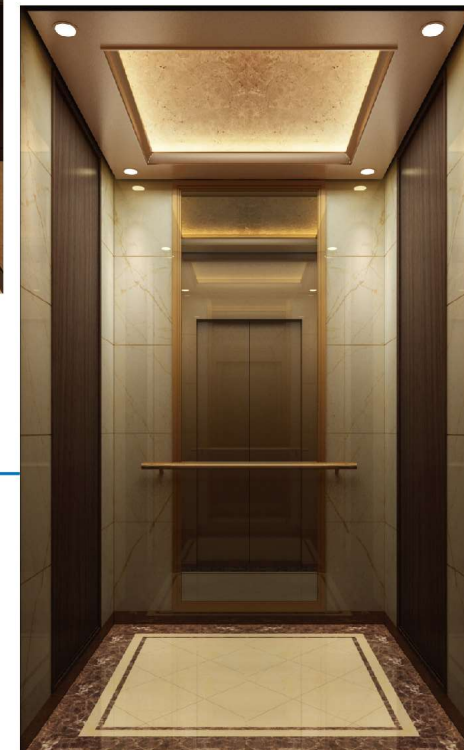

Villa series →



< ZK-L03



360°
Understand
the car

Ceiling: White bake finish steel plate + spotlight + hidden light strip
Rear wall: Mirror etched stainless steel, bronze hairline
Side wall: Mirror stainless steel, bronze hairline
Front wall: Bronze hairline
Floor: PVC (optional marble)



> ZK-L04



360°
Understand
the car

Ceiling: Mate white aluminum plate + COB light strip + spotlight
Rear wall: Mirror stainless steel, metal strip, white sand blast stainless steel
Side wall: Mirror stainless steel, champagne gold sand blast stainless steel, metal strip
Front wall: Champagne gold sand blast stainless steel
Floor: PVC (optional marble)

Villa series →



< ZK-L05



360°
Understand
the car

Ceiling: Bake finish steel plate + artistic soft light lamp
Rear wall: Sand blast stainless steel, metal strip
Side wall: Sand blast stainless steel, metal strip
Front wall: Sand blast stainless steel
Floor: PVC (optional marble)



> ZK-L06



360°
Understand
the car

Ceiling: Silver bake finish + linear light
Rear wall: Mirror stainless steel, luminescent light strip, rose gold hairline stainless steel
Side wall: Mirror stainless steel, luminescent light strip, rose gold hairline stainless steel
Front wall: Mirror stainless steel
Floor: PVC (optional marble)

Villa series →




< ZK-L08



360°
Understand
the car

Ceiling: Bake finish steel plate + artistic soft light lamp
Car wall: Sintered stone, champagne gold mirror stainless steel
Front wall: Champagne gold hairline stainless steel
Floor: PVC (optional marble)

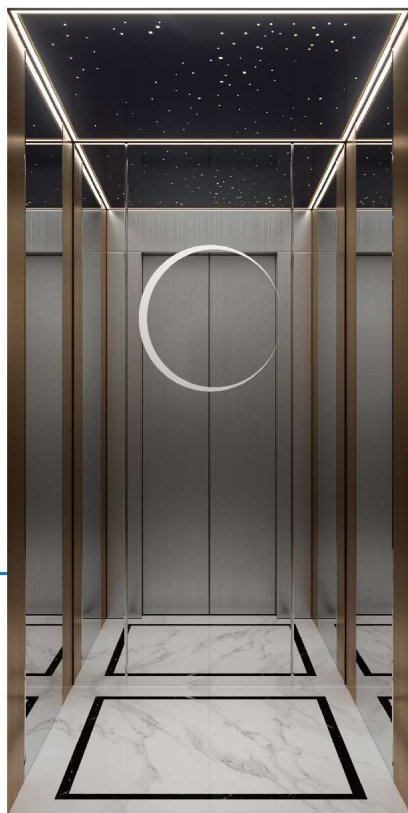

> ZK-L11



360°
Understand
the car

Ceiling: Starry ceiling
Rear wall: Mirror etched stainless steel
Side wall: Mirror stainless steel, bronze hairline
Front wall: Hairline stainless steel
Floor: PVC (optional marble)

Villa series →



< ZK-L12



360°
Understand
the car

Ceiling: Black titanium aluminum alloy + acrylic luminescent panel
Car wall: Black titanium hairline stainless steel + safety glass
Front wall: Black titanium hairline stainless steel
Floor: PVC (optional marble)

> ZK-L13



360°
Understand
the car

Ceiling: Frosted silver aluminum alloy + acrylic luminescent panel
Car wall: Hairline stainless steel + panoramic glass
Front wall: Hairline stainless steel
Floor: PVC (optional marble)



GENERAL ELEVATOR

Panoramic Cabin →




^ GEJ 007



^ GEJ 225



^ GEJ 230

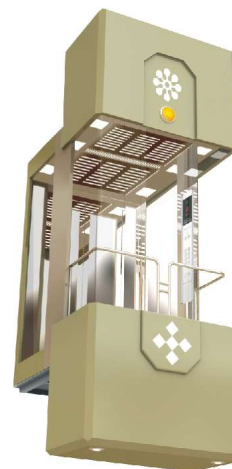

^ GEJ 010



^ GEJ 037



^ GEJ 226



^ GEJ 031



^ GEJ 227



^ GEJ 038



^ GEJ 056



^ GEJ 228



^ GEJ 236

Man-machine interface →

Embedded C.O.P



Embedded C.O.P



Integrated C.O.P

Man-machine interface →

Integrated C.O.P



Optional C.O.P LCD

GEL-001
Color LCD
in 7 inch
(picture type)



GEL-002
Color LCD
in 8 inch
(picture type)



GEL-003
Color LCD
in 10.4 inch
(picture type)



Hall transom indicator




Arrival light



GENERAL ELEVATOR

Landing door series →

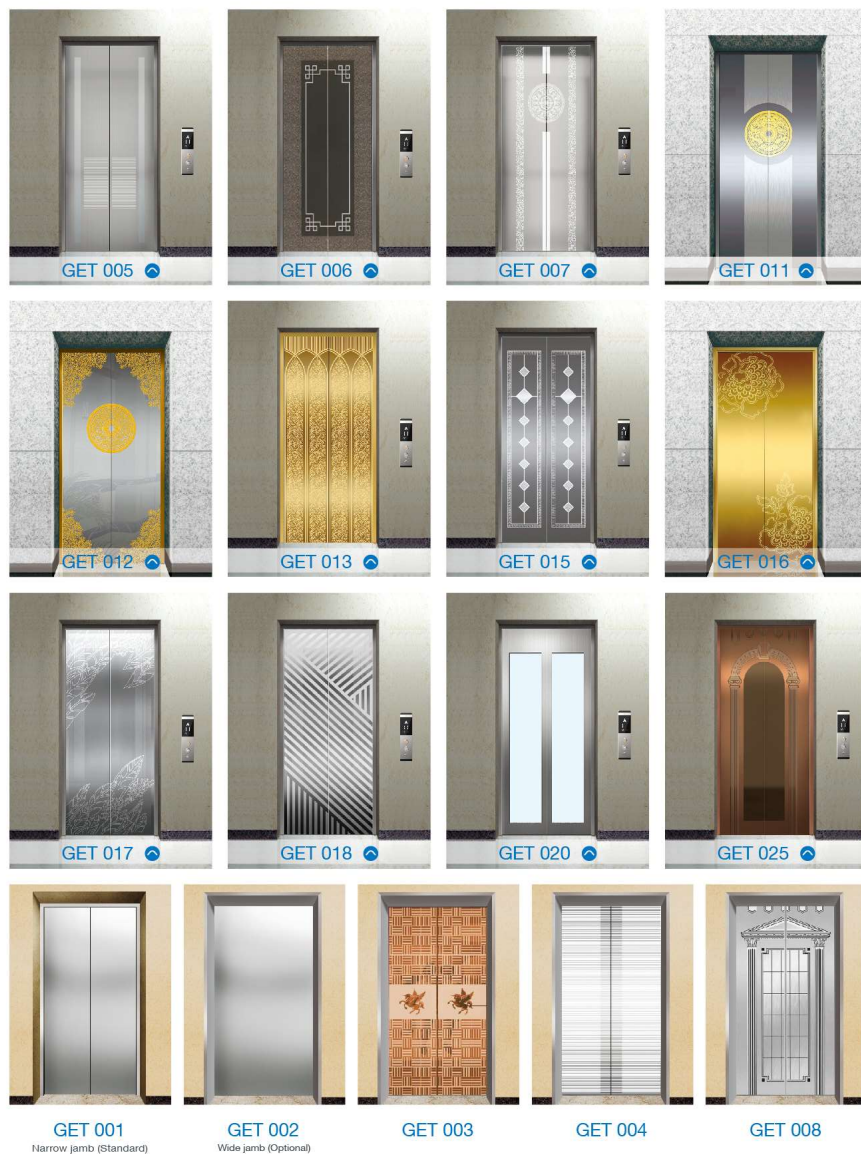

Ceiling series →



Handrail series →

GEF 201

Process: ϕ 38/51 mirror stainless steel round tube handrail



GEF 202

Process: ϕ 38/51 mirror titanium gold-colored stainless steel handrail



GEF 203

Process: ϕ 25 mirror colored dual-tube stainless steel handrail



GEF 204

Process: ϕ 25 mirror titanium gold-colored dual-tube stainless steel handrail



GEF 205

Process: ϕ 38/51 stainless steel titanium gold handrail




GEF 206

Process: ϕ 38/51 titanium gold-colored log handrail



GEF 002

Process: mirror stainless steel handrail

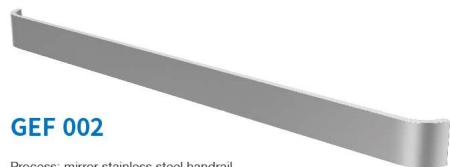

GEF 002S

Process: mirror titanium gold-colored stainless steel handrail



Floor series →



GEB 001
Standard



GEB 002
Optional



GEB 003
Optional




GEB 011
Optional



GEB 012
Optional



GEB 022
Optional



GEB 024
Optional



GEB 025
Optional

Color card →



GES 001
Jewelry blue



GES 002
Ivory



GES 003
Orange grain gray



GES 004
Orange grain yellowish gray



GES 005
Egg blue

The pictures are plotted by computer and are likely somewhat different from the actual products.

GENERAL ELEVATOR

Abundant elevator function

Running function	VVF drive	Motor rotating speed can be precisely adjusted to get smooth speed curve in lift start, travel and stop and gain the sound comfort.	S
	VVF door operator	Motor rotating speed can be precisely adjusted to get the more gentle and sensitive door machine start / stop.	S
	Independent running	The lift can not respond to outer calling, but only respond to the command inside the car through the action switch.	S
	Automatic pass without stop	When the car is crowded with the passengers or the load is close to preset value, the car will automatically pass the calling landing in order to keep maximum travel efficiency.	S
	Automatically adjust door opening time	Door-open time can be automatically adjusted according to the difference between landing calling or car calling.	S
	Reopen with hall call	In the door shutting process, press reopen with hall call button can restart the door.	S
	Express door closing	When the lift stops and opens the door, press door-shut button, the door will be closed immediately.	S
	Car stops and door open	The lift decelerates and levels, the door only opens after the lift comes to a complete stop.	S
	Car arrival gong	Arrival gong in the car top announces that the passengers arrive.	S
Safety function	Command register cancel	If you press the wrong floor command button in the car, twice continuous pressing of the same button can cancel the registered command.	S
	Photocell protection	In the door open and shut period, infrared light that covers the whole door height is used to probe the door protection device or both the passengers and objects.	S
	Designated stop	If the lift can not open the door in the destination floor out of some reason, the lift will close the door and travel to the next designated floor.	S
	Overload holding stop	When the car is overload, the buzzer rings and stops the lift in the same floor.	S
	Anti-stall timer protection	The lift stops operation due to slippery traction wire rope.	S
	Start protection control	If the lift does not leave door zone within the designated time after it gets started, it will stop the operation.	S
	Inspection operation	When the lift enters into inspection operation, the car travels at inching running.	S
	Fault self-diagnosis	The controller can record 62 latest troubles so as to quickly remove the trouble and restore the lift operation.	S
	Repeated door closing	If the lift can not close the door due to certain obstacle or interference, the lift will reopen or re-shut the door until sundries are eliminated.	S
	Up/down over-run and final limit protection	The device can effectively prevent from the lift's surging to the top or knocking the bottom when it is out of control. It results in more safe and reliable lift travel.	S
	Down over-speed protection device	When the lift downs 1.2 times higher than the rated speed, this device will automatically cut off control mains, stop the motor running so as to stop lift down at over-speed. If the lift continues to down at over-speed, and the speed is 1.4 times higher than rated speed, safety tongs act to force the lift stop in order to ensure the safety.	S
	Upward over-speed protection device	When the lift up speed is 1.2 times higher than rated speed, the device will automatically decelerate or brake the lift.	S
Human-machine interface	Micro-touch button for car call and hall call	Novel micro-touch button is used for operation panel command button in the car and landing calling button.	S
	Floor and direction indicator inside car	The car shows the lift floor location and current travel direction.	S
	Floor and direction indicator in hall	The landing shows the lift floor location and current travel direction.	S

Energy saving	Car ventilation, light automatic shut off	If there is no calling or command signal within the stipulated time, the car fan and lighting will be automatically closed in order to save the energy.	S
	Remote shut-off	The lift can be called to main landing (after finishing the service) through the key switch and automatically exists the service.	S
Emergency function	Emergency car lighting	Emergency car lighting automatically activated once power failure.	S
	Inching running	When the lift enters into emergency electric operation, the car travels at low speed inching running.	S
	Five way intercom	Communication amid car, car top, lift machine room, well pit and rescue duty room through walkie-talkie.	S
	Bell	In emergency conditions, if bell button above car operation panel is continuously pressed, electric bell rings on top of the car.	S
	Fire emergency return	If you start key switch in main landing or monitor screen, all the callings will be cancelled. The lift directly and immediately drives to the designated rescue landing and automatically opens the door.	S
Running function	Anti-nuisance	In the light lift load, when three more commands appear, in order to avoid the unnecessary parking, all the registered callings in the car will be cancelled.	O
	Open the door in advance	When the lift decelerates and enters into door open zone, it automatically opens the door to enhance the travel efficiency.	O
	Direct parking	It completely accords with distance principle with no crawling in the leveling. It greatly enhances the travel efficiency.	O
	Group control function	When three or more same model lift groups are controlled in use, the lift group can automatically choose the most appropriate response. It avoids the repeated lift parking, reduces the passengers' waiting time and increases the travel efficiency.	O
	Duplex control	Two sets of same model lifts can unanimously respond the calling signal through the computer dispatch. In this way, it reduces the passengers' waiting time to the greatest extent and enhances the travel efficiency as well.	O
	On-duty peak service	Within the preset on-duty time, upward transport from the home landing is extremely busy. The lifts are continuously dispatched to the home landing in order to satisfy on-duty peak service.	O
	Off-duty peak service	Within the preset off-duty period, the lifts are continuously dispatched to top floor in order to satisfy off-duty peak service.	O
	Door open time extending	Press special button in the car, the lift door keeps open for certain period of time.	O
Human-machine interface	Voice announcer	When the lift normally arrives, voice announcer informs the passengers about the relevant information	O
	Car assistant operation box	It is used in the large loading weight lifts or the lifts with crowded passengers so that more and more passengers can use the car.	O
	Operation box for the handicapped	It is convenient for the wheelchair passengers and those who have vision problems.	O
	Intelligent calling service	The car command or hoist-way calling can be locked or connected through special Intelligent Input.	O
	IC card control function	All (partial) landings can only input car commands through IC Card after the authorization.	O
Monitor function	Remote monitor	The lift long-distance monitor and control can be fulfilled through modem and telephone. It is convenient for the factories and service units to timely know the travel conditions of every lift and promptly take the corresponding measures.	O
	Remote control	The lift can have independent travel according to the specific requirements through operation monitor screen (optional).	O
	Camera function in the car	The camera is installed in the car to monitor the car conditions.	O
Emergency Function	Leveling when power failure	In normal power failure, the chargeable battery supplies the lift power. The lift drives to the nearest landing.	O

Commercial Escalator



As a model of escalators in commercial application, the commercial escalators of General match up with internal building structures and guarantee comfortable safe rides with smooth reliable performance.

Product Overview

Carrying capacity
3000–6000person/h

Speed

0.5m/s

Hoisting height

3–6m

Heavy-duty Public Escalator



They are designed for heavy urban traffic, greatly improve their durability and reliability, and constantly provide efficient safe fault-free services.

Product Overview

Carrying capacity
4800–7300person/h


Speed

0.5m/s–0.65m/s


Hoisting height

6.1–24m

GENERAL ELEVATOR

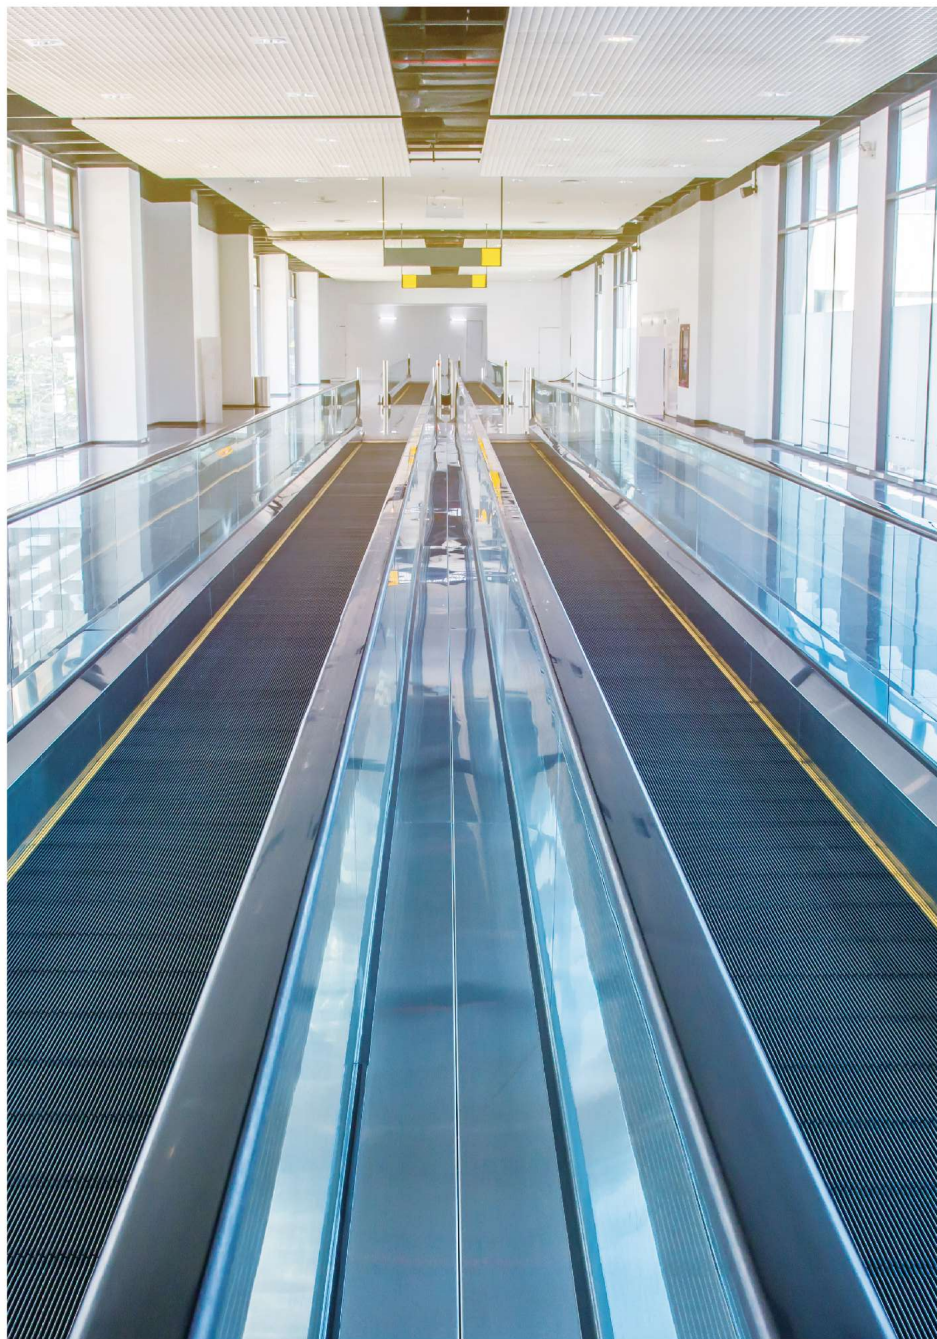

GENERAL ELEVATOR
IS POPULAR IN THE WORLD

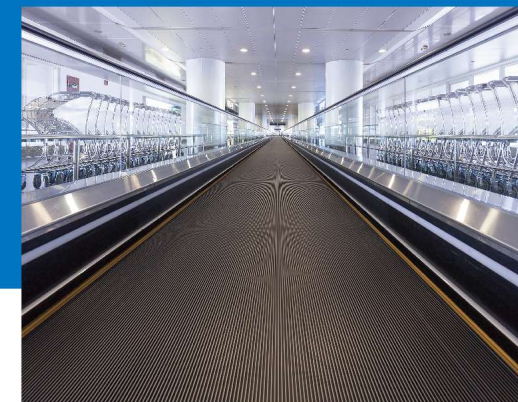

Moving Walk



The moving walks of General provide more convenient transport experiences, and guarantee safer, more comfortable and more efficient movements of passengers with luggage and shopping carts.

Product Overview

Step width	1000mm	Carrying capacity	6000person/h
Speed	0.5m/s	Use length	37.5–80m

GENERAL ELEVATOR

Safe, Efficient, Reliable and Durable →

Speaking of safety, it is not enough to just meet standards. General focuses on in design, field installation and daily operation of elevators. The escalators of General are safe and reliable and perfectly combine with buildings. The moving walks of General are quiet and smooth. Escalators and moving walks of General can be customized according to the unique needs of buildings.

- 1 Phase dislocation (loss of phase, opposition) protection
- 2 Motor overload protection device
- 3 Electric appliance loop protection device
- 4 Protection device in entrance of handrail
- 5 Safety device for comb plate
- 6 Protection device for stair collapse
- 7 Detector for stair deficiency
- 8 Protection device for chain scission of main drive chain
- 9 Safety protection device for stairs
- 10 Over speed protection device
- 11 Protection device for reversal direction
- 12 Brake
- 13 Affiliated brake (H > 600)
- 14 Emergency stop button
- 15 Skirt guard board protection device
- 16 Electrostatic protection device for stairs
- 17 Detector for brake releasing
- 18 Machine room control cabinet, stopping button
- 19 Handrail speed detector
- 20 Anti-pinch device (skirt guard board brush)
- 21 Open detection when make overhauling over floor plate
- 22 Monitoring device over brake distance
- 23 Electrostatic protection device for handrail
- 24 Start buzzer warning
- 25 Water level switch (outdoor type)
- 26 Malfunction display
- 27 Machine room shield
- 28 Duplex chain
- 29 Yellow warning line
- 30 Integrated direction indicator(energy system)

- 31 Stair interval illumination
- 32 Broach illumination
- 33 External operation direction indicator
- 34 Handrail anti-climbing device
- 35 Automatic oiling device
- 36 Uprush safety protective device over stairs
- 37 Handrail breakage protection
- 38 Overhaul lock



Additional brake (H>6000)




Main drive chain breaking protection device




GENERAL ELEVATOR

Fashionable escalators constitute moving views →

Step ✓

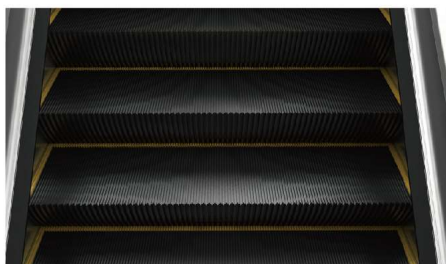

Black Stainless Steel
(Standard Configuration for Indoor Escalator)

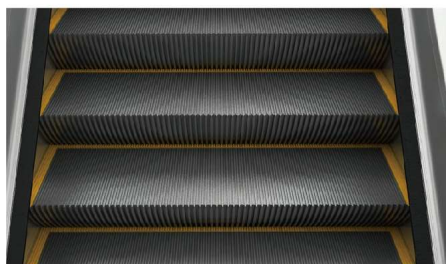


Silver Grey Aluminum Alloy
(Standard Configuration for Outdoor Escalator)

Baseboard panel form ✓




Safety Glass Colorless (Vertical
Handrail Standard)

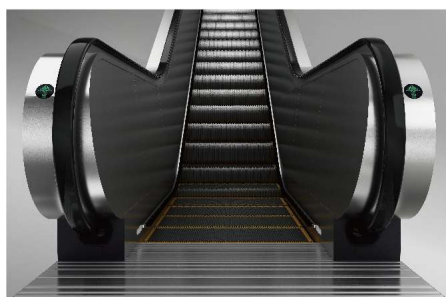


Stainless Steel (Oblique Inclined
Handrail Standard)

Landing plate ✓



Stainless Steel Square Patch
(Standard)



Aluminium Alloy Plaster/Integral
Aluminum Alloy (Optional)

Direction indicator ✓



Transparent Plastic LED Display
(Optional)




Black Plastic Dot Matrix Display
(Optional)

Handrail color ✓



Black (Standard)




Gray (Optional)




Red (Optional)




Orange (Optional)




Blue (Optional)



Shallow Bluish Green (Optional)




Light Brown (Optional)



Yellow (Optional)

Skirting panel lighting ✓



Yellow (Optional)




White (Optional)




Blue (Optional)

Comb teeth ✓




Yellow Plastic (Standard)



Aluminum (Optional)

Small machine room passenger elevator GTKJS

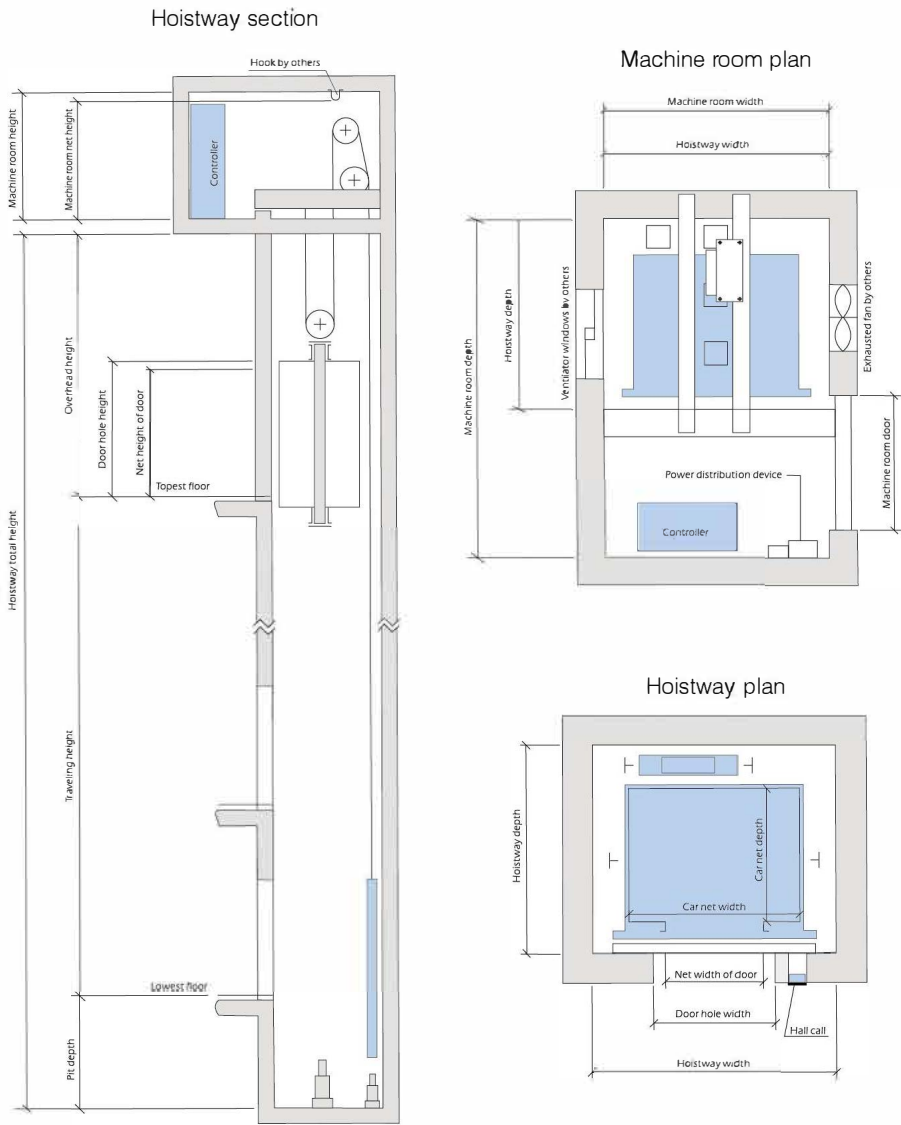


Small machine room passenger elevator parameter table

Persons	Rated capacity (kg)	Rated speed (m/s)	Net size of car (mm)	Net width of door Jx-HH (mm)	Hoistway net size (mm)			Machine room net size	
			AA×BB	Central opening	AH×BH	OH	PP	AM×BM	HM
5	400	1.0	1100×1000	700×2100	1700×1650	4500	1500	1700×1650	2900
8	630	1.0	1400×1100	800×2100	2000×1750	4500	1500	2000×1750	2900
		1.5/1.6/1.75				4600	1700		
		2.0				4500	1500		
10	800	1.0	1400×1350	800×2100	2000×2000	4500	1500	2000×2000	2900
		1.5/1.6/1.75				4600	1700		
		2.0				4900	1800		
		2.5				5100	2000		
		3.0				4500	1500		
13	1000	1.0	1600×1500	900×2100	2200×2150	4600	1700	2200×2150	2900
		1.5/1.6/1.75				4900	1800		
		2.0				5100	2000		
		2.5				5600	2600		
		3.0				5950	3100		
		3.5				6350	3850		
		4.0				4500	1500		
15	1150	1.0	1700×1500	1000×2100	2300×2200	4600	1700	2300×2150	2900
		1.5/1.6/1.75				4900	1800		
		2.0				5100	2000		
		2.5				5600	2600		
		3.0				5950	3100		
		3.5				6350	3850		
		4.0				4500	1500		
16	1250	1.0	1850×1500	1100×2100	2500×2200	4600	1700	2600×2100	2900
		1.5/1.6/1.75				4900	1800		
		2.0				5100	2000		
		2.5				5600	2600		
		3.0				5950	3100		
		3.5				6350	3850		
		4.0				4500	1500		
18	1350	1.0	1900×1550	1100×2100	2600×2250	4600	1700	2600×2200	2900
		1.5/1.6/1.75				4900	1800		
		2.0				5100	2000		
		2.5				5600	2600		
		3.0				5950	3100		
		3.5				6350	3850		
		4.0				4500	1500		
21	1600	1.0	1950×1750	1100×2100	2600×2450	4600	1700	2600×2450	2900
		1.5/1.6/1.75				4900	1800		
		2.0				5100	2000		
		2.5				5600	2600		
		3.0				5950	3100		
		3.5				6350	3850		
		4.0							

GENERAL ELEVATOR

Machine roomless passenger elevator GTKJW

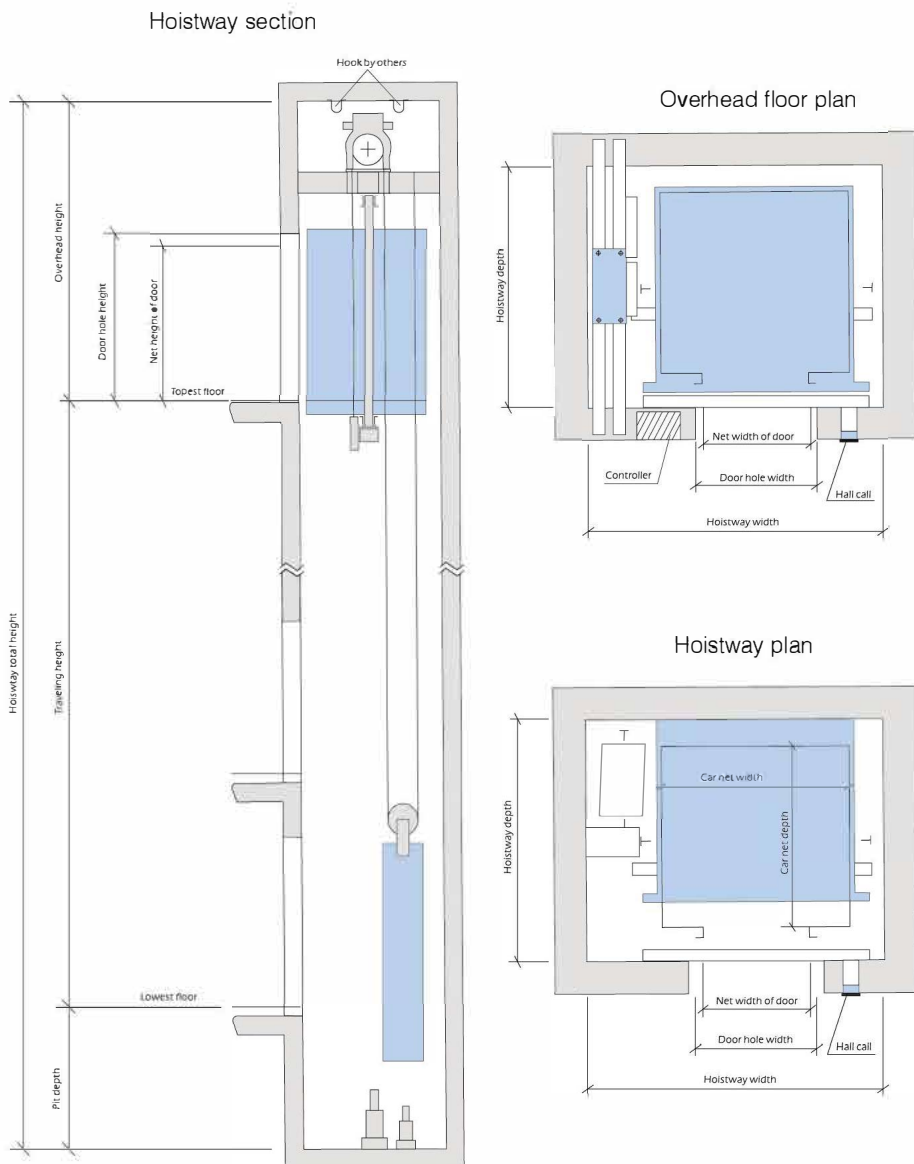

The user's tasks


1. It makes the drawing according to the relevant lift technical standard. It needs to be checked and confirmed by the user before it becomes the lift installation proof.
2. It shall be embedded in the wall for the machine supporting beam of the traction machine. Then the supporting length shall be 20mm more than the wall center, it shall not be less than 75mm.
3. After the installation completion, the ground decoration shall have a proper height step in the sill surface to prevent water or other impurity from entering into the well.
4. The casting object in the installation shall satisfy the relevant drawing requirements.
5. The buffer base shall be made under the directions of the installers.

Machine roomless passenger elevator parameter table


Persons	Rated capacity (kg)	Rated speed (m/s)	Net size of car (mm)	Net width of door JJ×HH (mm)	Hoistway net size (mm)			Max.TR
			AA×BB	Central opening	AH×BH	OH	PP	
5	400	1.0	1100×1000	700×2100	2000×1800	4500	1700	45
8	630	1.0	1400×1100	800×2100	2300×1850	4500	1700	45
		1.5				4600	1800	60
		1.75				4700	1900	60
10	800	1.0	1400×1350	800×2100	2300×1950	4500	1700	45
		1.5				4600	1800	60
		1.75				4700	1900	60
		2.0				4800	2000	60
13	1000	1.0	1600×1500	900×2100	2500×2100	4500	1700	45
		1.5				4600	1800	60
		1.75				4700	1900	60
		2.0				4800	2000	60

GENERAL ELEVATOR

Small machine room stretcher elevator →

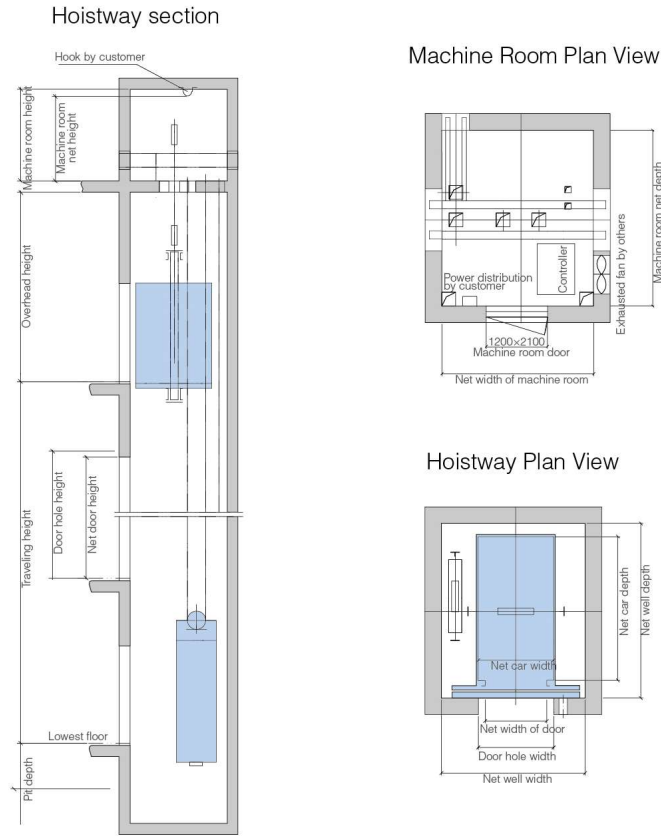

Small machine room bed elevator →

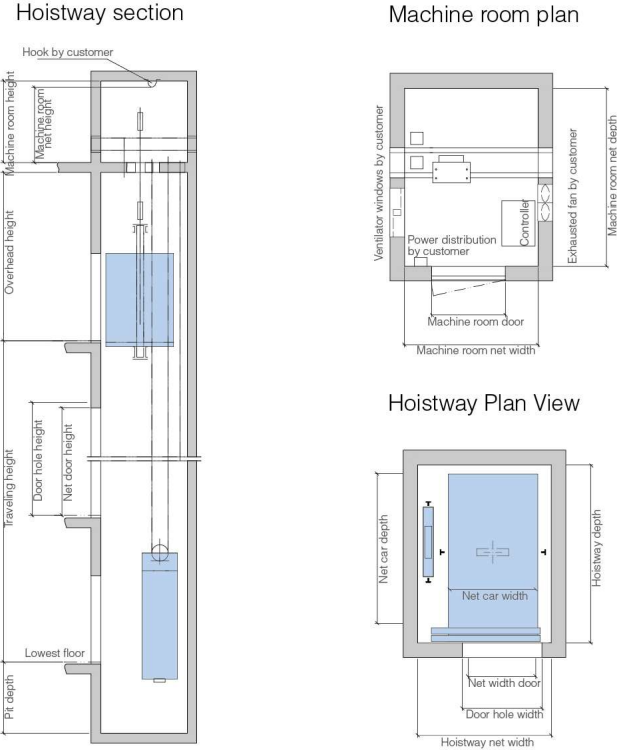

Small machine room bed elevator parameter table ✓

Persons	Rated capacity (kg)	Rated speed (m/s)	Net size of car (mm)	Net width of door (mm)	Hoistway net size (mm)			Machine room net size	
			AA×BB	JJ×HH	AH×BH	OH	PP	AM×BM	HM
21	1600	1.0	1400×2400	1100×2100 side opening two panels	2300×2950	4600	1500	2300×2950	2900
		1.5							
		1.6		1100×2100 center opening two panels	2550×2900	4700	1700	2550×2900	
		1.75							
		2.0							


Small machine room stretcher elevator parameter table ✓

Persons	Rated capacity (kg)	Rated speed (m/s)	Net size of car (mm)	Net width of door JJ×HH (mm)	Hoistway net size (mm)			Machine room net size	
			AA×BB	Central opening	AH×BH	OH	PP	AM×BM	HM
13	1000	1.0	1100×2100	900×2100	2100×2550	4600	1500	2100×2550	2800
		1.5/1.6/1.75				4700	1700		

Stretcher elevator car size can be designed according to the clients' requirements.

GENERAL ELEVATOR


Machine room freight lift →

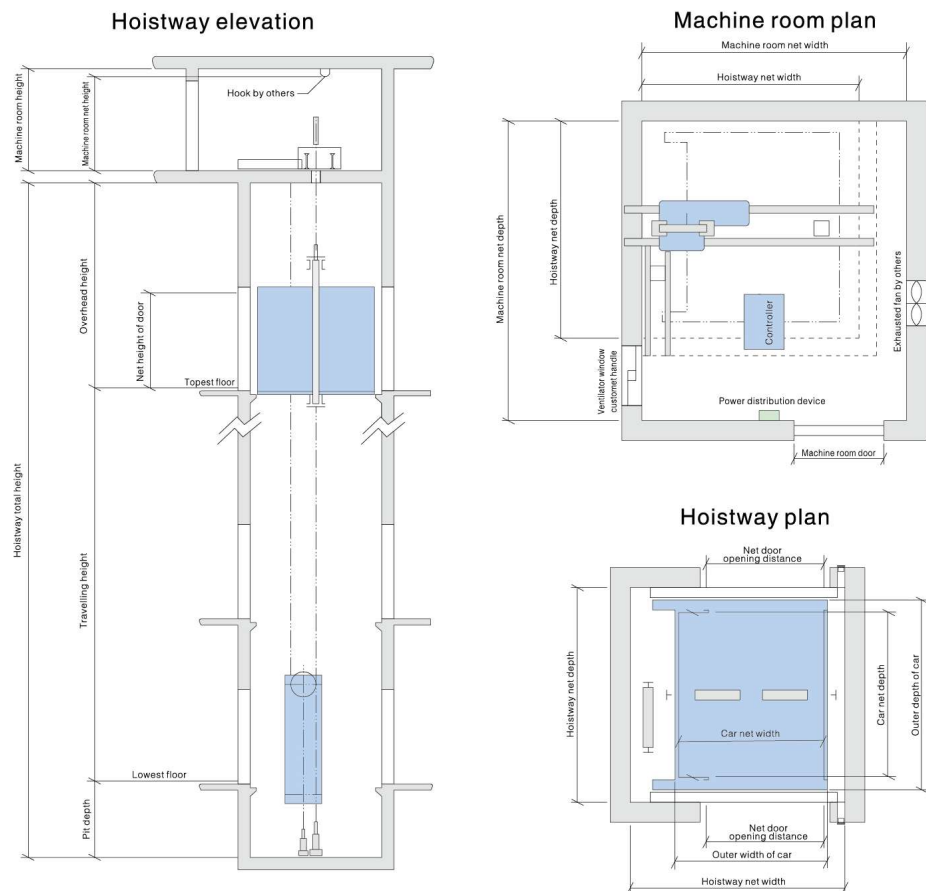

Machine room freight lift parameter table ✓

Rated capacity (kg)	Rated Speed (m/s)	Door opening mode	Car door entrance	Net size of the hoistway		Car net size W x D (mm)	Pit depth	Top height	Door opening size		Machine room size W x D x H (mm)
				W x D (mm)	W x D (mm)				W x H (mm)	W x D x H (mm)	
1000	0.5	side opening 2 panels	single	2300×2200	1500×1600	1500	4500	4500	1100×2100	3000×3000×2500	
			opposite	2200×2300	1400×1650	1500	4500	4500	1100×2100	3000×3000×2500	
2000	0.5	side opening 2 panels	single	2850×2750	1850×2199	1500	4500	4500	1500×2100	3500×3500×2500	
			opposite	2850×2730	1900×2080	1500	4500	4500	1500×2100	3500×3500×2500	
3000	0.5	center opening 4 panels	single	3400×3400	2000×2799	1700	4600	4600	1800×2200	4000×4000×2500	
			opposite	3400×3400	2000×2750	1700	4600	4600	1800×2200	4000×4000×2500	
5000	0.25/0.5	center opening 4 panels	single	4000×4200	2400×3599	1700	5000	5000	2200×2200	4000×4200×3000	
			opposite	4000×4250	2400×3600	1700	5000	5000	2200×2200	4000×4250×3000	
10000	0.25/0.5	center opening 4 panels	single	4900×5700	3000×4999	1800	5200	5200	2800×2200	4900×5700×3200	
			opposite	4900×5650	3000×5000	1800	5200	5200	2800×2200	4900×5650×3200	

Machine room-less freight lift →

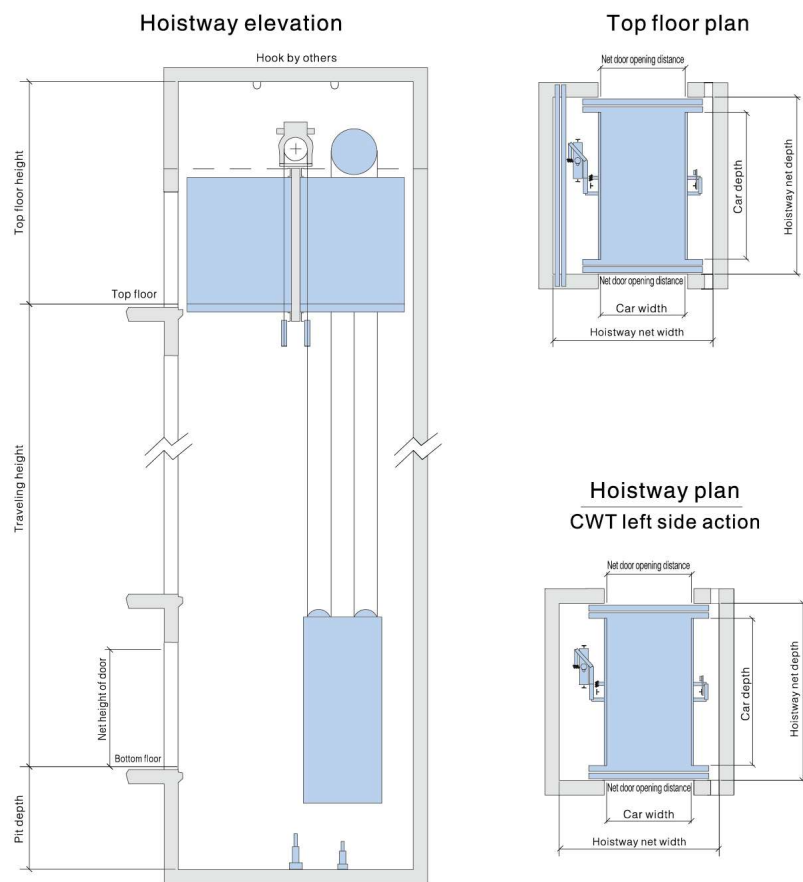

Machine room-less freight lift parameter table ✓


Rated capacity (kg)	Rated Speed (m/s)	Door opening mode	Car door entrance	Net size of the hoistway (mm)		Car net size W x D (mm)	Pit depth	Top height	Door opening size		Traction ratio
				W x D (mm)	W x D (mm)				W x H (mm)	W x D (mm)	
1000	0.5	side opening 2 panels	single	2400×2150	1500×1600	1700	4500	4500	1100×2100	3000×3000×2500	2:1
2000	0.5	center opening 4 panels	single	3100×3000	1750×2299	1800	5000	5000	1500×2100	3500×3500×2500	4:1
3000	0.5	center opening 4 panels	opposite	2950×3190	1500×2700	1800	5000	5000	1500×2100	3500×3500×2500	4:1
			single	3600×3400	2000×2799	1800	5000	5000	1800×2100	4000×4200×3000	4:1
3000	0.5	center opening 4 panels	opposite	3600×3400	2000×2750	1800	5000	5000	1800×2100	4000×4200×3000	4:1
			single	3600×3400	2000×2750	1800	5000	5000	1800×2100	4000×4200×3000	4:1

GENERAL ELEVATOR

Car lift →



Dumbwaiter →

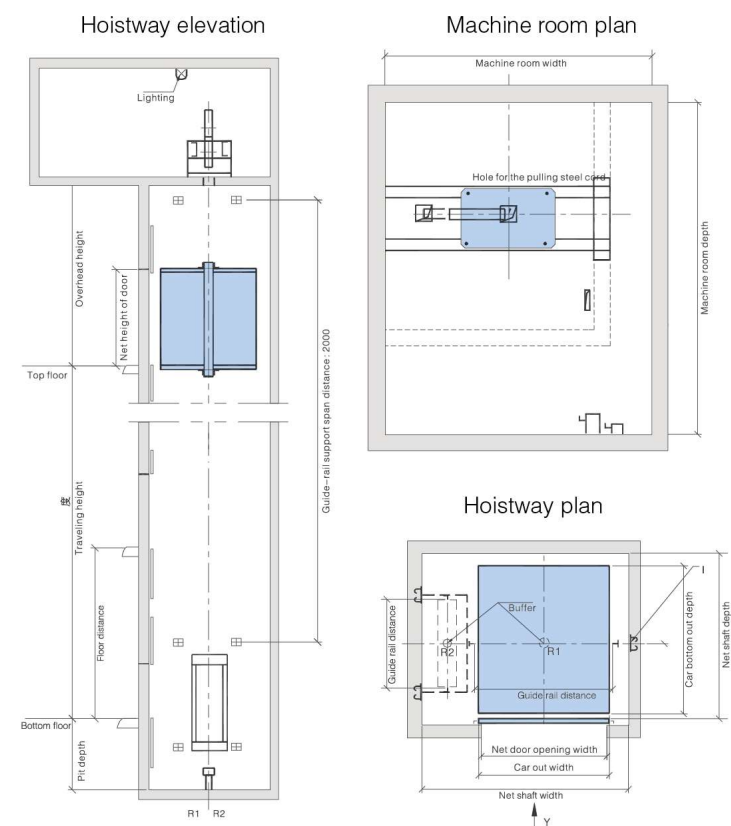



Car lift parameter table

Rated capacity (kg)	Rated Speed (m/s)	Door opening mode	Car door entrance	Net size of the hoistway (mm)	Car net size (mm)	Pit depth	Top height	Door opening size (mm)	Machine room size (mm)
				W x D	W x D			W x H	W x D x H
3000	0.5	center opening 4 panels	single	4300×6300	2700×5499	1700	5000	2500×2200	4300×6300×3000
			opposite	4300×6150	2700×5500	1700	5000		4300×6150×3000
5000	0.5	center opening 4 panels	single	4500×7000	3000×6199	1700	5000	2500×2200	4500×7000×3000
			opposite	4500×6850	3000×6200	1700	5000		4500×6850×3000


Parameter table of dumbwaiter

Rated capacity (kg)	Rated Speed (m/s)	Door opening mode	Car door entrance	Net size of the hoistway (mm)	Car net size (mm)	Pit depth	Top height	Door opening size (mm)	Machine room size (mm)
				W x D	W x D			W x H	W x D x H
100	0.4	Direct fraction	single	1250×950	700×700	1000	3000	700×1000	2000×2000×2000
			opposite	1250×900	700×700	1000	3000		2000×2000×2000
200	0.4	Direct fraction	single	1550×1200	950×950	1000	3000	950×1200	2000×2000×2000
			opposite	1550×1150	950×950	1000	3000		2000×2000×2000
300	0.4	Direct fraction	single	1600×1250	1000×1000	1000	3000	1000×1200	2000×2000×2000
			opposite	1600×1200	1000×1000	1000	3000		2000×2000×2000

TF1000/0.5-30°

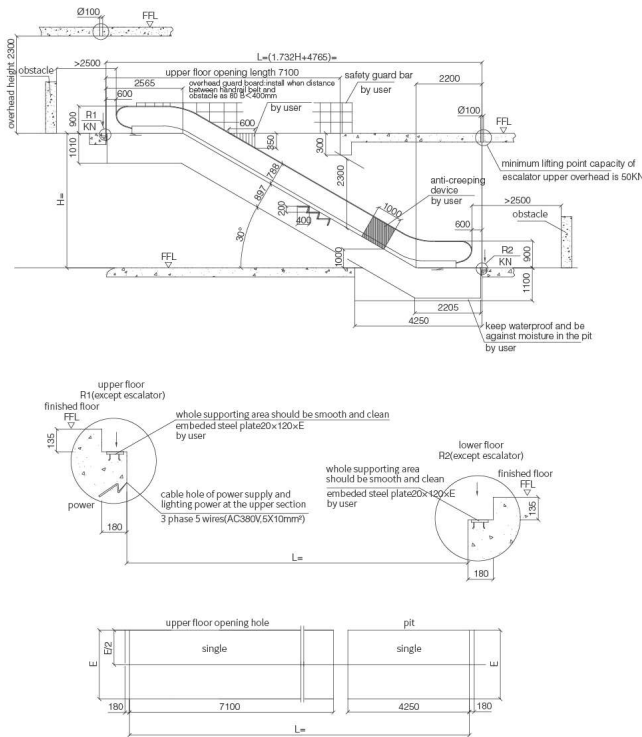

Safety Protection of Escalator Entrances and Exits





Type	Rising height (mm)	Net Weight (KN)	Support force(KN)	Motor Power (KW)	Size of Base
			R1 R2		h l
TF800/0.5-30° (4800 A/h) Speed: 0.5m/s	3000	118	104 94	5.5	2750 10900
	3500	126	112 100		2780 11890
	4000	134	120 108		2810 12880
	4500	142	128 114	8	2830 13870
	5000	148	136 120		2840 14860
	5500	164	148 132		2860 15860
TF1000/0.5-30° (6000 A/h) Speed: 0.5m/s	6000	172	156 138	11	2870 16850
	3000	126	118 106	5.5	2750 10900
	3500	134	128 114		2780 11890
	4000	142	136 122		2810 12880
	4500	150	146 130	8	2830 13870
	5000	166	158 142		2840 14860

Illustration


- 1.Cancel pit when escalator is on above second floor, in the drawing, lower structure and upper structure should be symmetrical. Keep waterproof if there is a pit, by user.
- 2.Enough opening area should be ensured at the escalator passages, of which the width should be at least equal to handrail belt center line distance and the depth dimension should be not less than 2500 mm that from handrail belt turning end to the front obstacle.
- 3.The distance between handrail belt and any other obstacles should be not less than 80mm.
- 4.Motor power AC 380V 50HZ, details seen as the sheet.
- 5.Owner provide a grounding device, and the value is less than 40
- 6.Owner provide the supply power that requires 3 phase 5 wires
- 7.Millimeter applies for all the size, there is no notice if it changes.
- 8.All of the safe bar height should be more than (handrail height+100mm)

Escalator width	A	B	C	D	E
800	800	958	1038	1400	3000
1000	1000	1158	1238	1600	3400

TF1000/0.5-35°

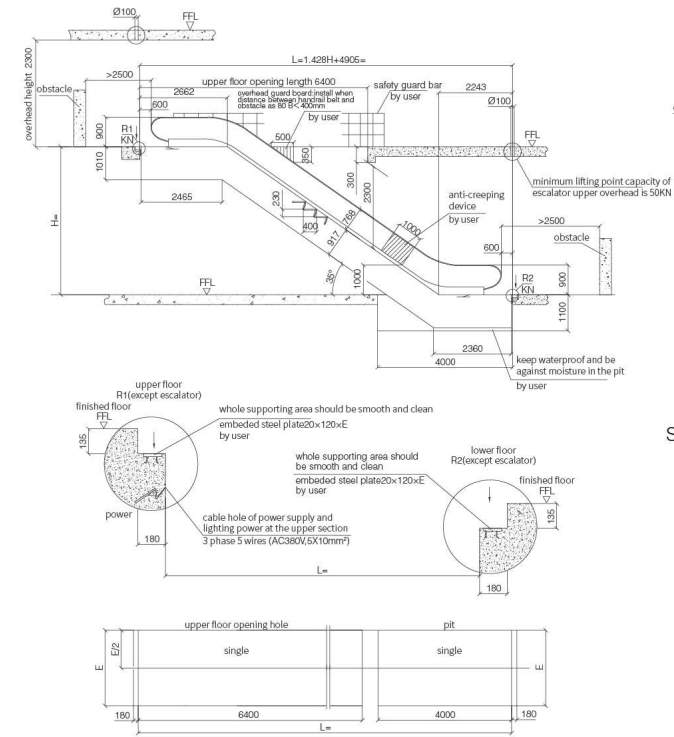

Safety Protection of Escalator Entrances and Exits



Type	Rising height (mm)	Net Weight (KN)	Support force(KN)	Motor Power (KW)	Size of Base
			R1 R2		h l
TF800/0.5-35° (4800 A/h) Speed: 0.5m/s	3000	112	98 88	5.5	2650 10180
	3500	120	104 94		2690 11030
	4000	126	112 100		2920 11890
	4500	132	118 106	8	2940 12750
	5000	140	124 112		2970 13610
	5500	146	130 118		2980 14470
TF1000/0.5-35° (6000 A/h) Speed: 0.5m/s	6000	152	138 122	11	3000 15330
	3000	120	112 100	5.5	2650 10180
	3500	128	120 106		2690 11030
	4000	134	128 114		2920 11890
	4500	142	134 120	8	2940 12750
	5000	148	142 128		2970 13610



Illustration

- 1.Cancel pit when escalator is on above second floor, in the drawing, lower structure and upper structure should be symmetrical. Keep waterproof if there is a pit, by user.
- 2.Enough opening area should be ensured at the escalator passages, of which the width should be at least equal to handrail belt center line distance and the depth dimension should be not less than 2500 mm that from handrail belt turning end to the front obstacle.
- 3.The distance between handrail belt and any other obstacles should be not less than 80mm.
- 4.Motor power AC 380V 50HZ, details seen as the sheet.
- 5.Owner provide a grounding device, and the value is less than 40
- 6.Owner provide the supply power that requires 3 phase 5 wires
- 7.Millimeter applies for all the size, there is no notice if it changes.
- 8.All of the safe bar height should be more than (handrail height+100mm)



Escalator width	A	B	C	D	E
800	800	958	1038	1400	3000
1000	1000	1158	1238	1600	3400

GENERAL ELEVATOR

Ordinary escalator (great height) →

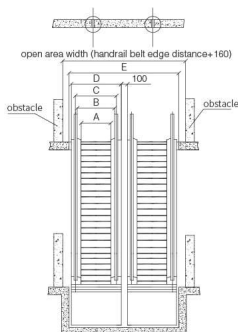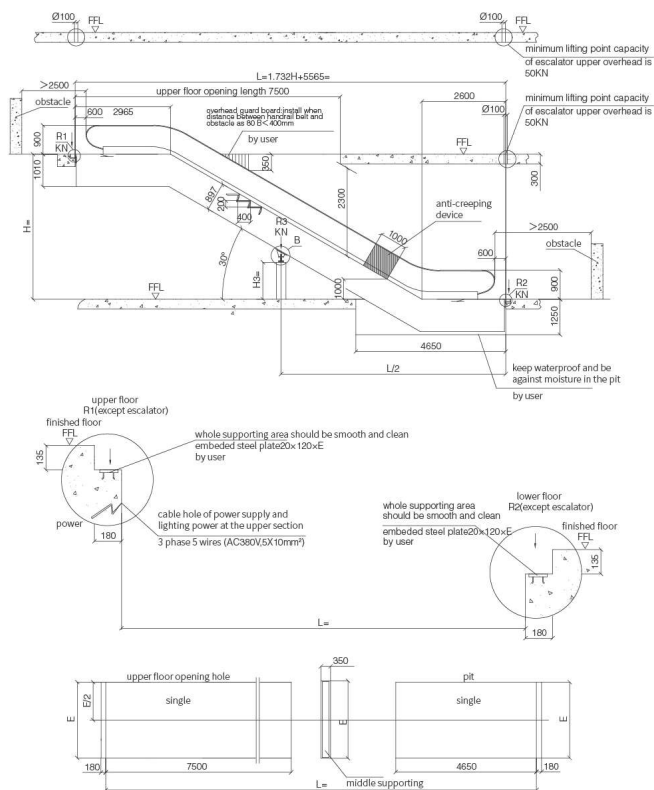

Safety Protection of Escalator Entrances and Exits





Type	Rising height (mm)	Net Weight (KG)	Motor Power	Support force (KN)		
				R1	R2	R3
TF800/0.5-30° (4800 A/h) Speed: 0.5m/s	6000	182	11KW	4.2L+26	3.8L+34	10.4L+16.4
	6500	192				
	7000	200				
	7500	208				
TF1000/0.5-30° (6000 A/h) Speed: 0.5m/s	6000	196	11KW	4.6L+28	4.6L+14.2	14.32L+10
	6500	204				
	7000	212				
	7500	220				
Middle support beam+H			(L/2-2600)×tg30°-(897/cos30°+300)			
Escalator width	A	B	C	D	E	
800	800	958	1038	1400	3000	
1000	1000	1158	1238	1600	3400	



Illustration

- 1.Cancel pit when escalator is on above second floor, in the drawing, lower structure and upper structure should be symmetrical. Keep waterproof if there is a pit, by user.
- 2.Enough opening area should be ensured at the escalator passages, of which the width should be at least equal to handrail belt center line distance and the depth dimension should be not less than 2500 mm that from handrail belt turning end to the front obstacle.
- 3.The distance between handrail belt and any other obstacles should be not less than 80mm.
- 4.Motor power AC 380V 50HZ , details seen as the sheet.
- 5.Owner provide a grounding device , and the value is less than 40.
- 6.Owner provide the supply power that requires 3 phase 5 wires
- 7.Millimeter applies for all the size, there is no notice if it changes.
- 8.All of the safe bar height should be more than (handrail height+100mm)

Outdoor bus type escalator (great height) →

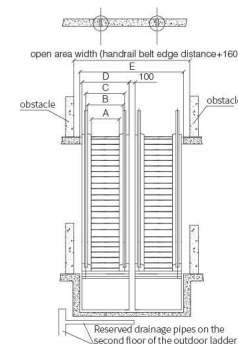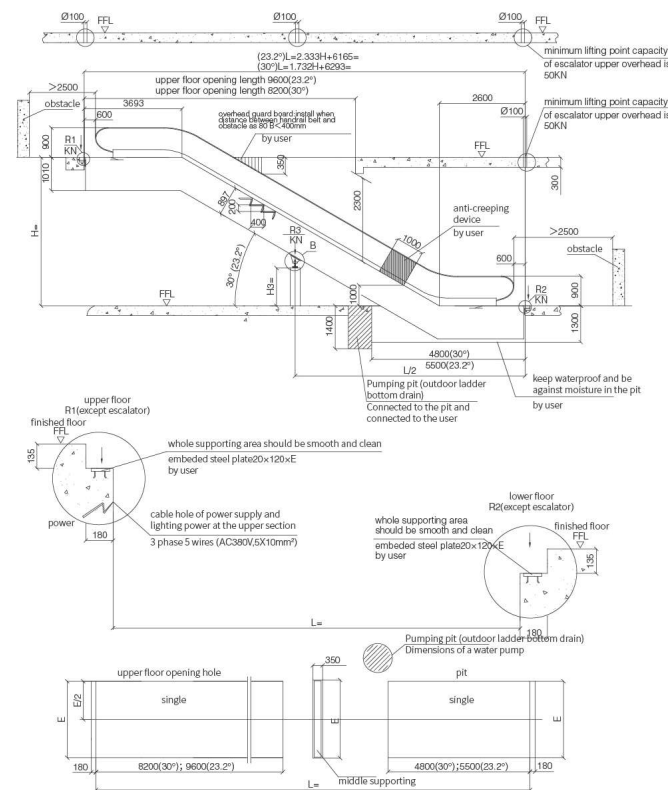

Safety Protection of Escalator Entrances and Exits





Type	Rising height (mm)	Net Weight (KN)	Motor Power	Support force (KN)		
				R1	R2	R3
TF800/0.5-30° (4800 A/h) Speed: 0.5m/s	6000	182	11KW	4.2L+26	3.8L+34	10.4L+16.4
	6500	192				
	7000	200				
	7500	208				
TF1000/0.5-30° (6000 A/h) Speed: 0.5m/s	6000	196	11KW	4.6L+28	4.6L+14.2	14.32L+10.4
	6500	204				
	7000	212				
	7500	220				
Middle support beam H3 (L/2-2600)×tg30°-(897/cos30°+300)						
Escalator width	A	B	C	D	E	
800	800	958	1038	1400	3000	
1000	1000	1158	1238	1600	3400	

Illustration



- 1.Cancel pit when escalator is on above second floor, in the drawing, lower structure and upper structure should be symmetrical. Keep waterproof if there is a pit, by user.
- 2.Enough opening area should be ensured at the escalator passages, of which the width should be at least equal to handrail belt center line distance and the depth dimension should be not less than 2500 mm that from handrail belt turning end to the front obstacle.
- 3.The distance between handrail belt and any other obstacles should be not less than 80mm.
- 4.Motor power AC 380V 50HZ , details seen as the sheet.
- 5.Owner provide a grounding device , and the value is less than 40.
- 6.Owner provide the supply power that requires 3 phase 5 wires
- 7.Millimeter applies for all the size, there is no notice if it changes.
- 8.All of the safe bar height should be more than (handrail height+100mm)

GENERAL ELEVATOR

TR1000/0.5-10°/11°/12° →

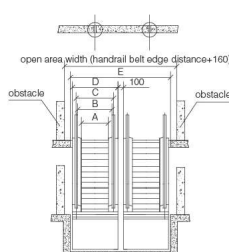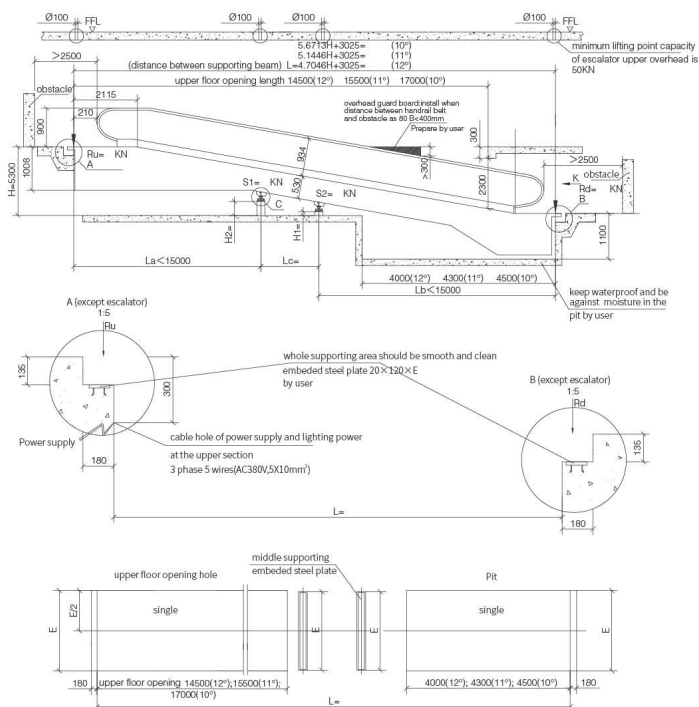

Safety Protection of Escalator Entrances and Exits



Illustration


1. Cancel pit when escalator is on above second floor, in the drawing, lower structure and upper structure should be symmetrical. Keep waterproof if there is a pit, by user.
2. Enough opening area should be ensured at the escalator passages, of which the width should be at least equal to handrail belt center line distance and the depth dimension should be not less than 2500 mm that from handrail belt turning end to the front obstacle.
3. The distance between handrail belt and any other obstacles should be not less than 80mm.
4. Motor power AC 380V 50HZ, details seen as the sheet.
5. Owner provide a grounding device, and the value is less than 40.
6. Owner provide the supply power that requires 3 phase 5 wires.
7. Millimeter applies for all the size, there is no notice if it changes.
8. All of the safe bar height should be more than (handrail height+100mm)

Escalator width		A	B	C	D	E
800		800	958	1038	1400	3000
1000		1000	1158	1238	1600	3400
Rising height		Middle support		La(mm)	Lb(mm)	Lc(mm)
From	To	S1	S2			
1601	2663					
2664	4151	1		L-7000	7000	
4152	5851	1		15000	L-15000	
5852	6000	1	1	15000	7000	L-22000
A		H2			H1	
10°		H2=H-(La-1995)×0.1763-840			H1=H2-(Lc×0.1763)	
11°		H2=H-(La-2055)×0.1944-840			H1=H2-(Lc×0.1944)	
12°		H2=H-(La-2115)×0.2126-840			H1=H2-(Lc×0.2126)	
39		Rising height (mm)		Speed(m/s)		Capacity (P/h)
800		1000-3800		0.5		4800
		3800-6000				
		1000-3000				
1000		3000-4800		0.5		6000
		4800-6000				

Arrangement plan →


Single unit

The single unit used to link two levels. It is suitable for buildings with passenger traffic flowing mainly in one direction. Flexible adjustment to traffic flow (e.g., up in the morning and down in the evening) is possible.




Continuous arrangement (one-way traffic)

This arrangement is used mainly in smaller department stores to link three sales levels. It requires more space than the interrupted arrangement.




Interrupted arrangement (one-way traffic)

This arrangement is somewhat inconvenient for users, but advantageous for department store owners, since the short detour to the next unit and the spatial separation between up and down travel is ideal for leading customers past strategically placed advertising displays.



Parallel, interrupted arrangement (two-way traffic)

This arrangement is used mainly in department stores and public transport buildings with a heavy traffic volume. When there are three or more escalators, it should be possible to reverse the traveling direction according to the traffic flow. This arrangement is economical, since no inner lateral claddings are required.



Crisscross, continuous arrangement (two-way traffic)

This arrangement is used mainly in major department stores, public buildings and public transport buildings where transport times between several levels should be kept to a minimum.

