
| | | | 220V |
|-------------------|-------------------|-----------|---------|
| | | | 60Hz |
| | | | Exhaust |
| Air Volume | m^3/h | ±10% | 360 |
| Power Consumption | W | ±12% | 19 |
| Ampere | A | ±12% | 0.085 |
| Rotation Speed | min ⁻¹ | | 1024 |
| Noise | dB (A) | +3dB,-7dB | 31 |
| | | | |

| 1. Power Rating | 220V 60Hz |
|--------------------------|---|
| 2. Motor Type | Capacitor start and run induction motor |
| 3. Blade Type | 200mm dia. propeller fan |
| 4. Ambient Temperature | -10 to 40 deg. C |
| 5. Insulation Resistance | More than 1 meg ohm |
| 6. Electrical Strength | AC 1500V 1 minute |
| 7. Gross Weight | 1.3Kg |
| 8. Insulation Class | Class E |



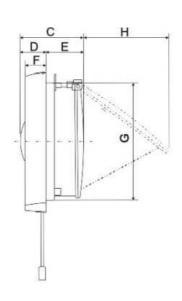



| _ | т | • . | |
|---|-----|------|----|
| ı | ۱'n | ۱1t۰ | mm |
| | | | |

| Model | A | В | С | D | Е | F | G | Н |
|-------|-------|-------|----|----|----|----|-----|-----|
| 20WUD | Ф 200 | ф 271 | 98 | 36 | 62 | 36 | 237 | 201 |

| | | | 220V |
|-------------------|-------------------|-----------|---------|
| | | | 50Hz |
| | | | Exhaust |
| Air Volume | m^3/h | ±10% | 360 |
| Power Consumption | W | ±12% | 16.4 |
| Ampere | A | ±12% | 0.073 |
| Rotation Speed | min ⁻¹ | | 1042 |
| Noise | dB (A) | +3dB,-7dB | 32 |
| | | | |

| 1. Power Rating | 220V 50Hz |
|--------------------------|---|
| 2. Motor Type | Capacitor start and run induction motor |
| 3. Blade Type | 200mm dia. propeller fan |
| 4. Ambient Temperature | -10 to 40 deg. C |
| 5. Insulation Resistance | More than 1 meg ohm |
| 6. Electrical Strength | AC 1500V 1 minute |
| 7. Gross Weight | 1.3Kg |
| 8. Insulation Class | Class E |
| | |

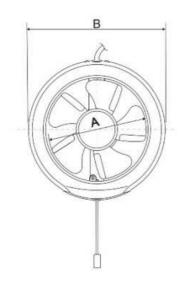


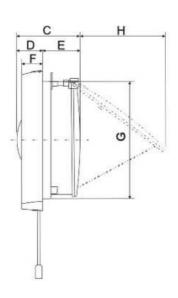


| | | | | | | | | UIIII. IIIIII |
|-------|-------|-------|----|----|----|----|-----|---------------|
| Model | A | В | С | D | Е | F | G | Н |
| 20WUD | ф 200 | ф 271 | 98 | 36 | 62 | 36 | 237 | 201 |

| | | | 230V |
|-------------------|--------------|-----------|---------|
| | | | 50Hz |
| | | | Exhaust |
| Air Volume | m^3/h | ±10% | 380 |
| Power Consumption | \mathbf{W} | ±12% | 17.9 |
| Ampere | A | ±12% | 0.076 |
| Rotation Speed | \min^{-1} | | 1122 |
| Noise | dB (A) | +3dB,-7dB | 34 |
| | | | |

| 1. Power Rating | 230V 50Hz |
|--------------------------|---|
| 2. Motor Type | Capacitor start and run induction motor |
| 3. Blade Type | 200mm dia. propeller fan |
| 4. Ambient Temperature | -10 to 40 deg. C |
| 5. Insulation Resistance | More than 1 meg ohm |
| 6. Electrical Strength | AC 1500V 1 minute |
| 7. Gross Weight | 1.3Kg |
| 8. Insulation Class | Class E |

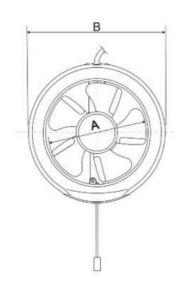


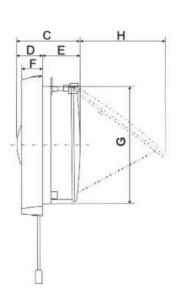


| Model | A | В | С | D | Е | F | G | Н |
|-------|-------|-------|----|----|----|----|-----|-----|
| 20WUD | Ф 200 | ф 271 | 98 | 36 | 62 | 36 | 237 | 201 |

| | | | 240V |
|-------------------|-------------------|-----------|---------|
| | | | 50Hz |
| | | | Exhaust |
| Air Volume | m^3/h | ±10% | 400 |
| Power Consumption | W | ±12% | 19.5 |
| Ampere | A | ±12% | 0.079 |
| Rotation Speed | min ⁻¹ | | 1189 |
| Noise | dB (A) | +3dB,-7dB | 36 |
| | | | |

| 1. Power Rating | 240V 50Hz |
|--------------------------|---|
| 2. Motor Type | Capacitor start and run induction motor |
| 3. Blade Type | 200mm dia. propeller fan |
| 4. Ambient Temperature | -10 to 40 deg. C |
| 5. Insulation Resistance | More than 1 meg ohm |
| 6. Electrical Strength | AC 1500V 1 minute |
| 7. Gross Weight | 1.3Kg |
| 8. Insulation Class | Class E |

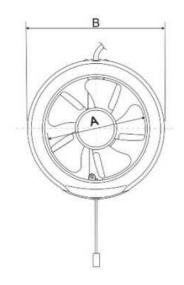


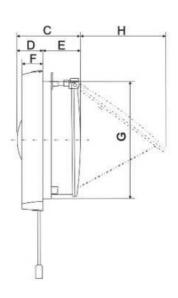


| Model | A | В | С | D | Е | F | G | Н |
|-------|-------|-------|----|----|----|----|-----|-----|
| 20WUD | Ф 200 | ф 271 | 98 | 36 | 62 | 36 | 237 | 201 |

| | | | 220-240V 50Hz |
|-------------------|-------------------|-----------|------------------|
| | | | Exhaust |
| Air Volume | m^3/h | ±10% | 360-400 |
| Power Consumption | W | ±12% | 16.4-19.5 |
| Ampere | A | ±12% | 0.073-0.079 |
| Rotation Speed | min ⁻¹ | | 1042-1189 |
| Noise | dB (A) | +3dB,-7dB | 32–36 |

| 1. Power Rating | 220-240V 50Hz |
|--------------------------|---|
| 2. Motor Type | Capacitor start and run induction motor |
| 3. Blade Type | 200mm dia. propeller fan |
| 4. Ambient Temperature | -10 to 40 deg. C |
| 5. Insulation Resistance | More than 1 meg ohm |
| 6. Electrical Strength | AC 1500V 1 minute |
| 7. Gross Weight | 1.3Kg |
| 8. Insulation Class | Class E |

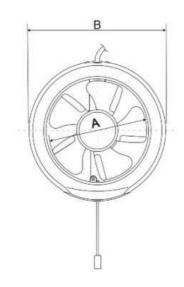


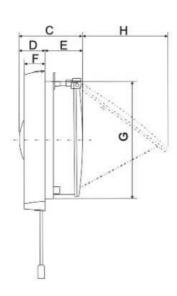

| | | | | | | | | Omt. mm |
|-------|-------|-------|----|----|----|----|-----|---------|
| Model | A | В | С | D | Е | F | G | Н |
| 20WUD | ф 200 | ф 271 | 98 | 36 | 62 | 36 | 237 | 201 |

| | | | 127V |
|-------------------|-------------------|------------|---------|
| | | | 60Hz |
| | | | Exhaust |
| Air Volume | m^3/h | ±10% | 380 |
| Power Consumption | W | ±12% | 21.9 |
| Ampere | A | $\pm 12\%$ | 0.17 |
| Rotation Speed | min ⁻¹ | | 1079 |
| Noise | dB (A) | +3dB,-7dB | 33 |
| | | | |

| 1. Power Rating | 127V 60Hz |
|--------------------------|---|
| 2. Motor Type | Capacitor start and run induction motor |
| 3. Blade Type | 200mm dia. propeller fan |
| 4. Ambient Temperature | -10 to 40 deg. C |
| 5. Insulation Resistance | More than 1 meg ohm |
| 6. Electrical Strength | AC 1500V 1 minute |
| 7. Gross Weight | 1.3Kg |
| 8. Insulation Class | Class E |

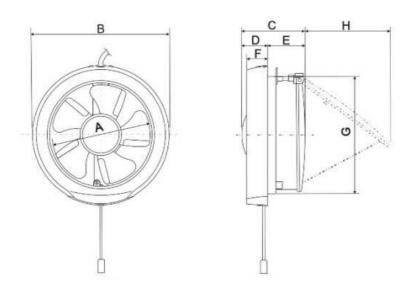

| | | | | | | | | Unit: min |
|---------|-------|-------|----|----|----|----|-----|-----------|
| Model | A | В | C | D | Е | F | G | Н |
| 20WUD12 | Ф 200 | Ф 271 | 98 | 36 | 62 | 36 | 237 | 201 |