




Unit: mm

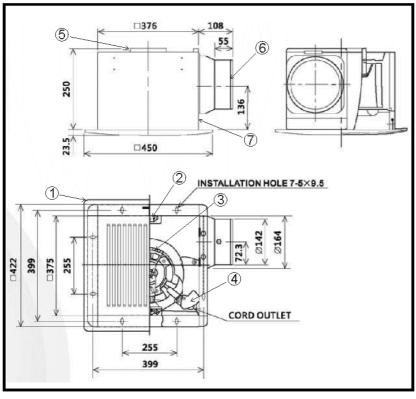

■ Part list

No.	Part name	Q'ty	Material		
1	Louver	1	Plastic		
2	Slot	2	Metal		
3	Blade	1	Metal		
4	Condenser Plate	1	Metal		
(5)	Motor	1	Metal		
6	Adaptor	1	Metal		
7	Body enclosure	1	Metal		

AMCA License



KDK Company, Division of PES and Panasonic Ecology Systems Guangdong Co., Ltd. certify that the Standard models shown herein are licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirements of the AMCA Certified Ratings Program.

Specification

Model Voltage	Frequency		CFM/SONE AT STATIC Pressure (ps-inches of H ₂ O)							DDM	\A/=44=*	\A/-44-++			
			inches of H ₂ O	0	0.1	0.125	0.250	0.375	0.5	0.625	0.75			Watts*	watts**
38CDG 240V	50Hz	50Hz Hi	CFM	387	367	362	336	305	259	212	165	108	737	7 118 1	407
			Sones	4.0	4.0	4.0	4.1	4.4	4.7	5.3	5.7	6.2			107

Performance certified is for installation type B: Free inlet , Duct outlet. Performance ratings include the effects of an inlet grille and back draft damper. Speed (RPM) shown is nominal. Performance is based on actual speed of test. The sound ratings shown are loudness values in fan sones at 5 ft(1.5m) in a hemispherical free field calculated per AMCA International Standard 301. Values shown are for installation type B: free inlet hemispherical sone levels.

*the Watts rating is only for AMCA test method and it is at the static pressure of 0 inch of H₂O.

**the Watts rating is only for IEC test method and the AMCA Certified Ratings Seal does not apply to IEC

test method watts.

	Product	Model							
	CMVF	38CDG (AMCA)							
Make Date	2016.1.4	Scale	Drawing No.	CMV 16006					
Modification Date			Modification No.						
KDK Company, Division of PES									