


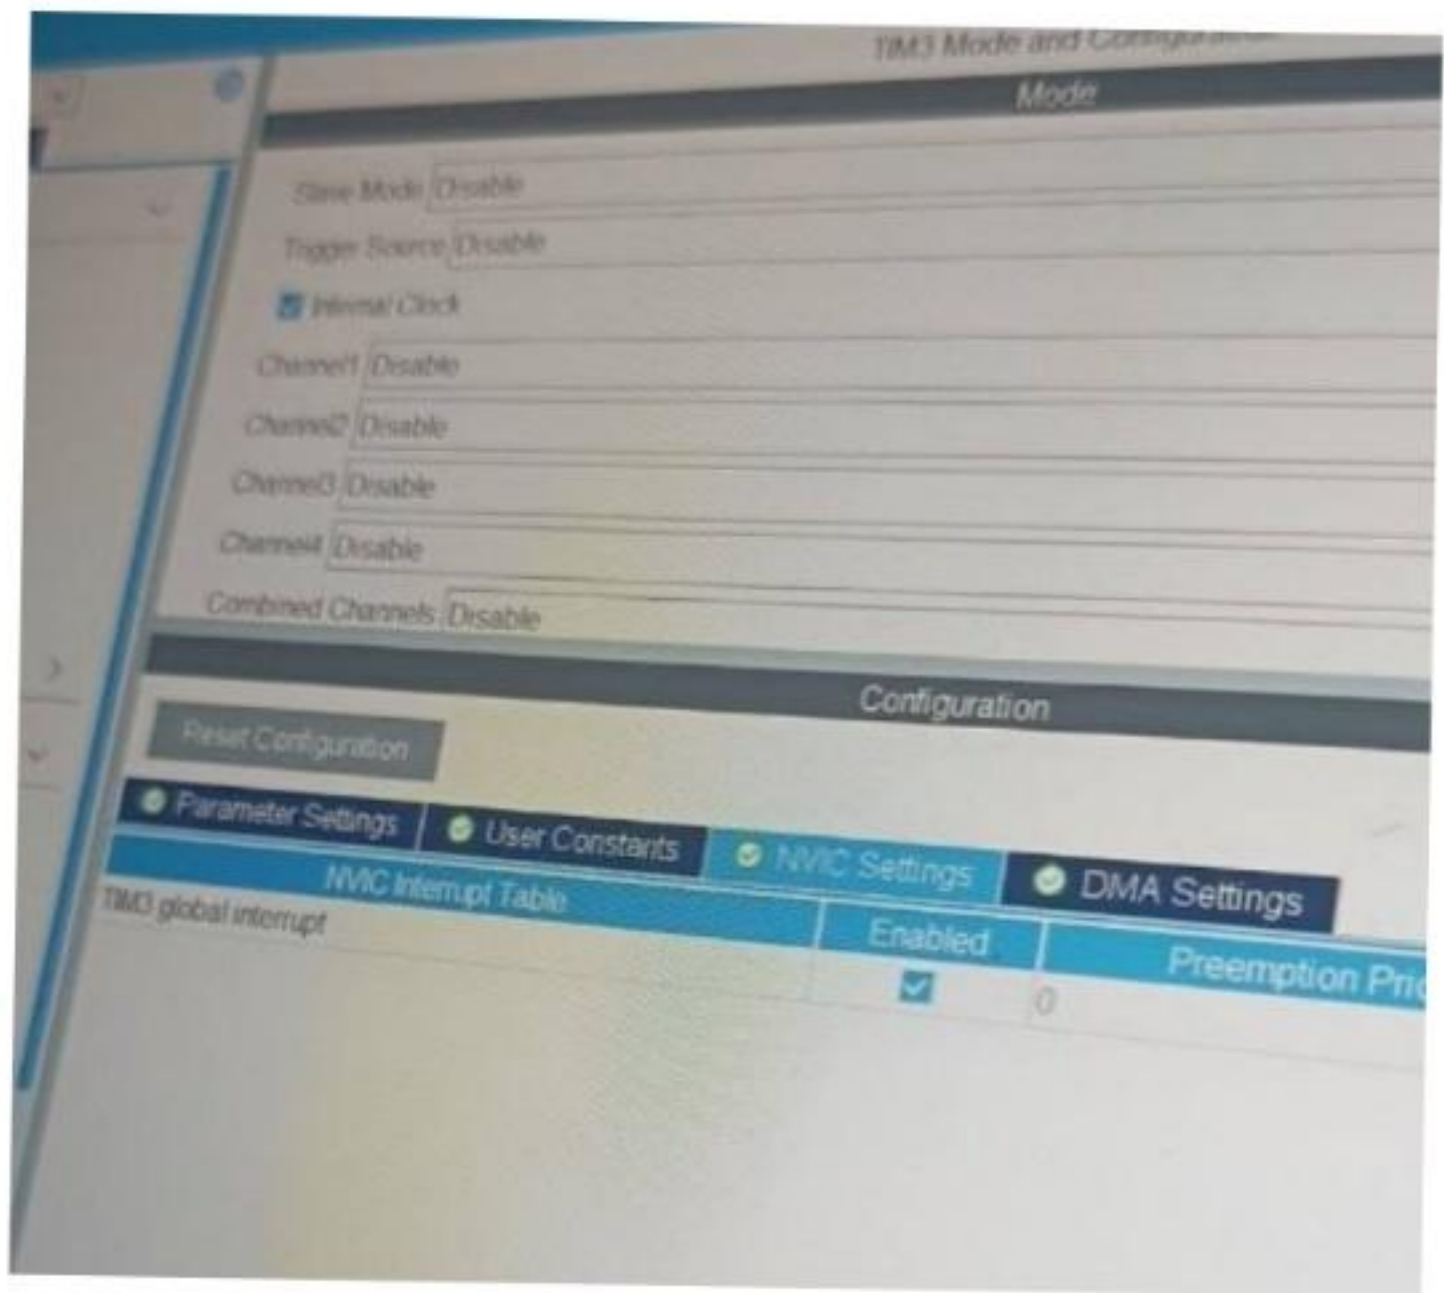

Search Signals

Pin Name	Signal on Pin	GPIO output level	GPIO mode	GPIO Pull-up/...	Maximum output
PD0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	n/a
PD1-OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	n/a

Channel3 Disable
Channel4 Disable
Combined Channels Disable

Configuration

Reset Configuration

- Parameter Settings
- User Constants
- NVIC Settings
- DMA Settings

Configure the below parameters :

Search (Ctrl+F)

Counter Settings

Prescaler (PSC - 16 bits value)	7199
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value)	4999
Internal Clock Division (CKD)	No Division
auto-reload preload	Disable
Trigger Output (TRGO) Parameters	Disable (Trigger input effect r
Master/Slave Mode (MSM bit)	Reset (UG bit from TIMx_EGR
Trigger Event Selection	

Reset Configuration

Configuration

- Parameter Settings
- User Constants
- NVIC Settings
- DMA Settings

Configure the below parameters :



Search (Ctrl+F)

Master Features

I2C Speed Mode	Standard Mode
I2C Clock Speed (Hz)	100000

Slave Features

Clock No Stretch Mode	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled

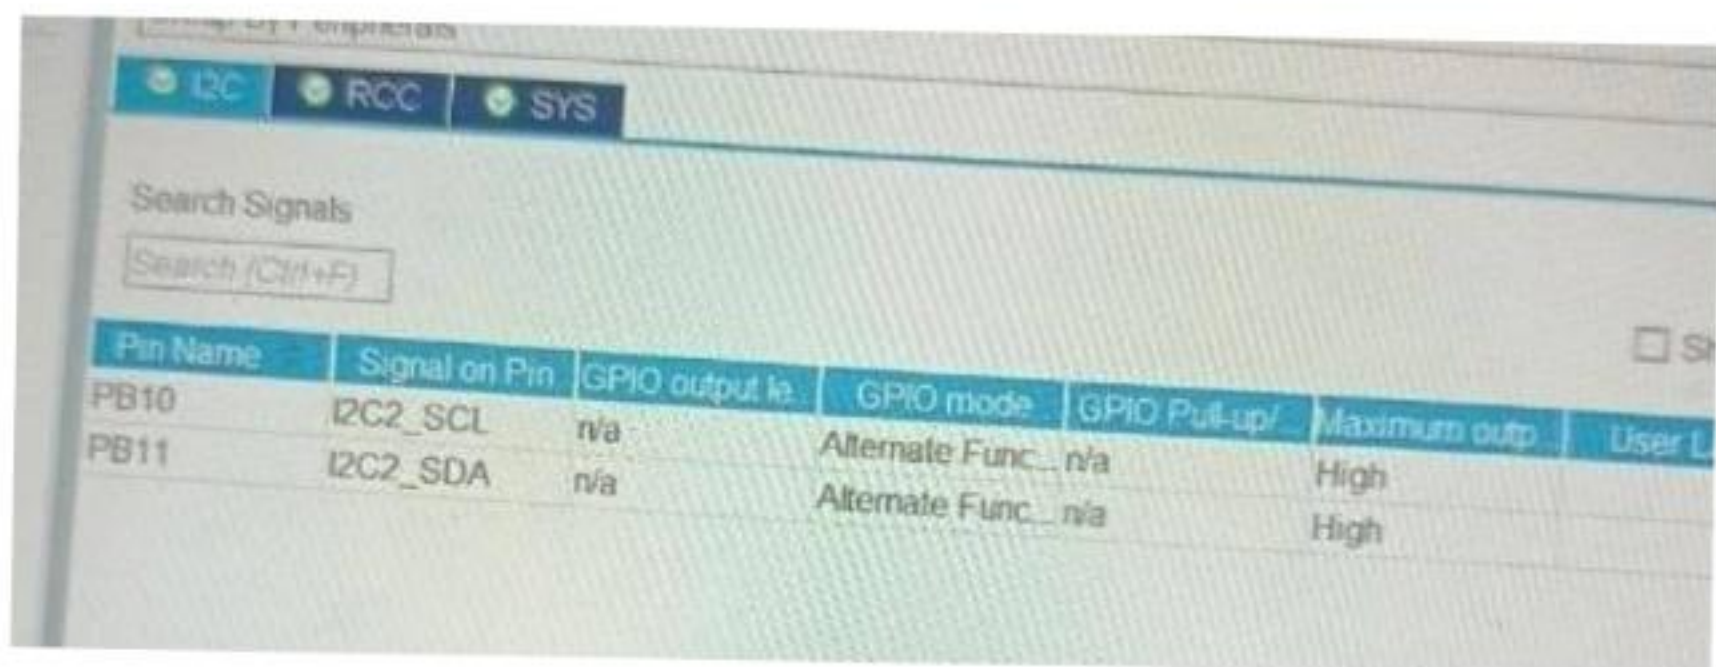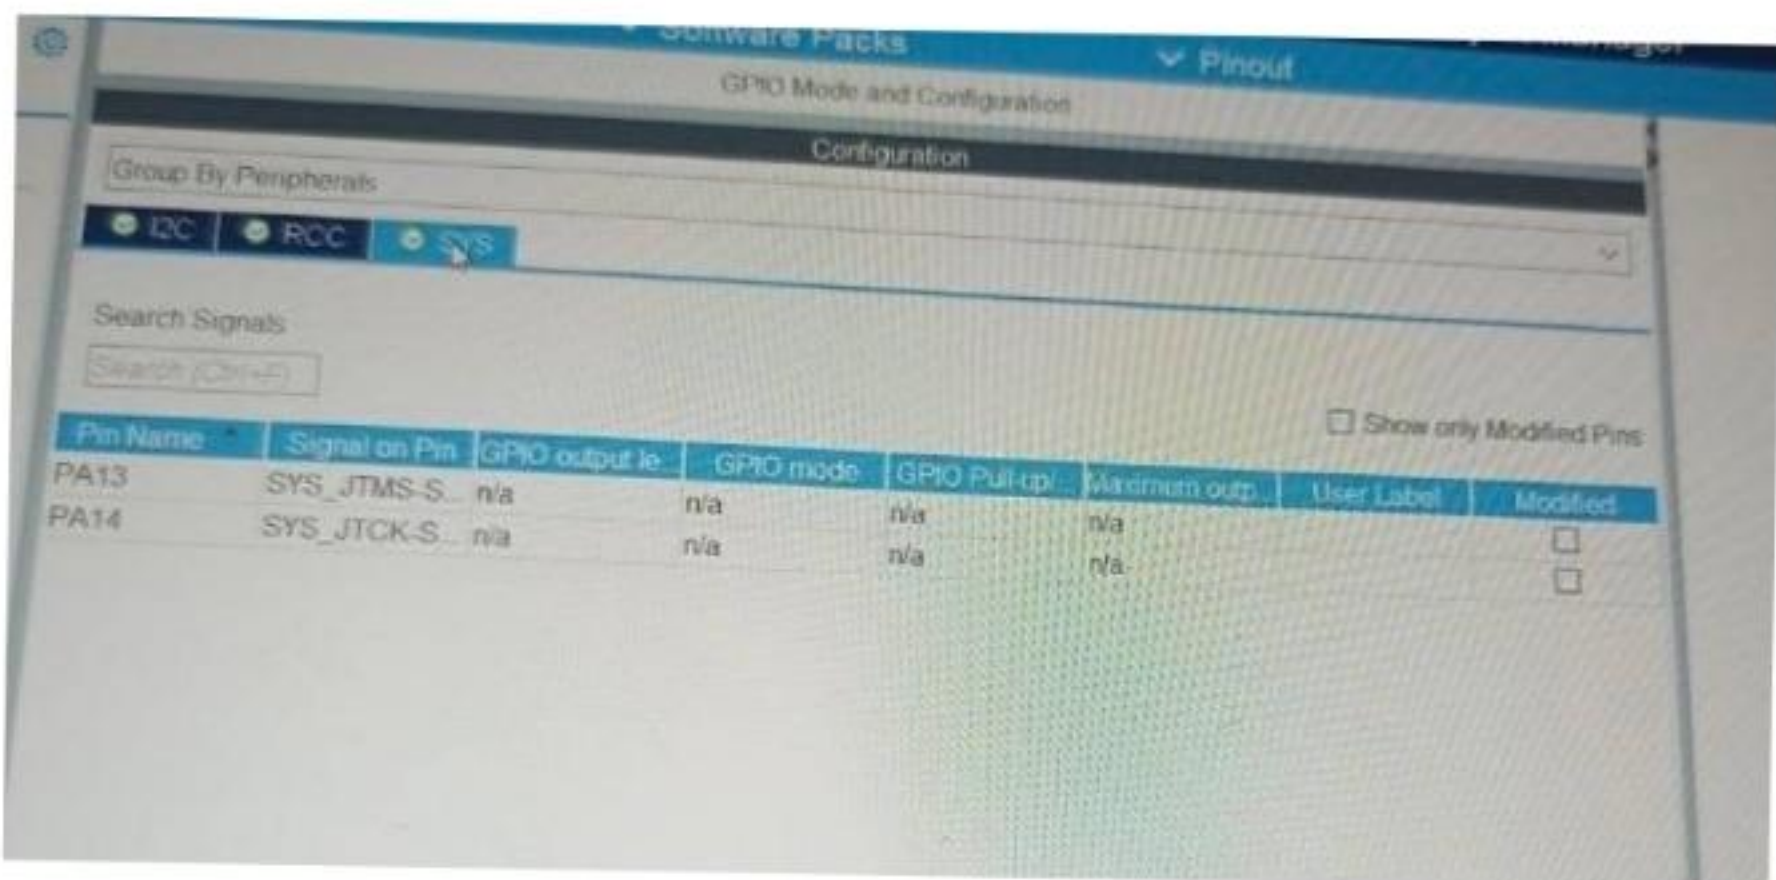

RCC_OSC_IN
RCC_OSC_OUT



PC2_SCL
PC2_SDA

SYS_JTCK-SWCLK

GPIO_S11-S15