

Project Data Page:





Table of Contents

Cover Page	1
Vessel Design Summary:	2
Nozzle Summary:	5
Nozzle Schedule:	6
Bill of Material:	7
MDMT Summary:	8
Warnings and Errors:	10
Input Echo:	11
XY Coordinate Calculations:	22
Flg Calc [Int P]: LHS Blind Fl	23
Flg Calc [Int P]: LHS CH flang	26
Flg Calc [Int P]: LHS Ch Fl-2	35
Flg Calc [Int P]: LHS Sh Fl 1	44
Flg Calc [Int P]: RHS Sh Fl 1	53
Flg Calc [Int P]: RHS Sh Fl 2	61
Internal Pressure Calculations:	69
Element: LHS Ch Shell	70
Element: Main Shell	72
Element: RHS	74
Element: RHS dish end	76
Shop Pressure Test Results:	79
Field Pressure Test Results:	81
ASME TS Calc: Pressure Test	83
ASME Fl-TS Calc: Pressure Test	94
Floating Head: Operating	102
External Pressure Calculations:	107
Element and Detail Weights:	108
Nozzle Flange MAWP:	111
Wind Load Calculation:	113
Earthquake Load Calculation:	116
Center of Gravity Calculation:	118
Saddle Calcs: Bundle Pull New:	119
Saddle Calcs: Bundle Pull Cor:	126
Saddle Calcs: Road Transport:	133
Saddle Calcs: Operating Case:	147
Saddle Calcs: Test Case:	162
Saddle Calcs: Ext. Pressure:	176
Nozzle Calcs.: N3-Tube Inlet	189
Nozzle Calcs.: Vent	202
Nozzle Calcs.: Drain	205
Nozzle Calcs.: N1-Shell Inlet	208
Nozzle Calcs.: N2-Shell Outlet	222
Nozzle Calcs.: N4-Tube Outlet	236
ASME TS Calc:	251
ASME Fl-TS Calc:	262
Floating Head: Operating	271



DESIGN CALCULATION

In Accordance with ASME Section VIII Division 1

ASME Code Version : 2025

Analysis Performed by : SL User

Job File : ...\\108-CA-CBTop.pvdb

Date of Analysis : Sep 8, 2026 6:05pm

PV Elite 28, January 2026



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 2 of 275

Vessel Design Summary:

Step: 38

6:05pm

Sep 8, 2026

Vessel Design Summary:

ASME Code, Section VIII Division 1, 2025

Diameter Spec : 2480.000 mm ID
Vessel Design Length, Tangent to Tangent 10346.50 mm
Specified Datum Line Distance 0.00 mm
Shell Side Design Temperature 130 °C
Channel Side Design Temperature 82 °C
Shell Side Design Pressure 520.000 KPa.
Channel Side Design Pressure 1000.000 KPa.
Shop Shell Side Test Pressure 1489.714 KPa.
Field Shell Side Test Pressure 676.000 KPa.
Shop Channel Side Test Pressure 1489.379 KPa.
Field Channel Side Test Pressure 1300.000 KPa.
Wind Design Code ASCE/SEI 7-16
Earthquake Design Code ASCE/SEI 7-16

Materials of Construction:

Component Type	Material	Class	Thickness	UNS #	Material Treatment Options
Shell	SA-516 70	...	...	K02700	
Head	SA-516 70	...	...	K02700	
Flange	SA-266 2	...	...	K03506	
Nozzle	SA-516 70	...	...	K02700	
Nozzle	SA-266 2	...	...	K03506	
Nozzle	SA-106 B	...	...	K03006	
Re-Pad	SA-516 70	...	...	K02700	
Nozzle Flg	SA-105	...	...	K03504	
Tubes	SA-179	...	...	K01200	
Tubesheet	SA-266 2	...	...	K03506	
Flo. Head	SA-516 70	...	...	K02700	
Bk. Bolting	SA-193 B7M	...	<= 100	G41400	
Flg Bolting	SA-193 B7	...	<= 64	G41400	
Hrz Bolting	SA-193 B7	...	<= 64	G41400	
Saddles	SA-266 2	...	...	K03506	

+FG - Fine Grained, +R - rolled, +T - Tempered, +N - Normalized

+Q - quenched, +CBV - Cb & V added, +IT - Impact tested

Element Pressures and MAWP (KPa. & mm):

Element Description or Type	Design Pressure + Stat. head	Ext. Press.	Element M.A.W.P	Total Corrosion Allowance	Str. Flg. Gov.	In Creep Range
LHS Blind Flang	1027.936	103.42	1088.000	3.0000	N/A	No
LHS CH flange-1	1024.897	103.42	1819.000	3.0000	N/A	No
LHS Ch Shell	1024.142	103.42	1848.000	3.0000	N/A	No
LHS Ch Flg-2	1024.897	103.42	1819.000	3.0000	N/A	No
LHS Shell Flg-1	544.897	103.42	1409.000	3.0000	N/A	No
Main Shell	544.142	103.42	1629.000	3.0000	N/A	No
RHS Shell Flg-1	544.897	103.42	1409.000	3.0000	N/A	No
RHS Shell Flg-2	544.897	103.42	1611.000	3.0000	N/A	No
RHS	544.142	103.42	1848.000	3.0000	N/A	No



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 3 of 275

Vessel Design Summary:

Step: 38

6:05pm

Sep 8,2026

RHS dish end	544.142	103.42	1422.000	3.0000	No	No
--------------	---------	--------	----------	--------	----	----

Liquid Level: 2850.00 mm Dens.: 0.001 kg./cm³ Sp. Gr.: 1.000

Element Types and Properties:

Element Type	"To" Elev mm	Element Length mm	Nominal Thickness mm	Finished Thickness mm	Reqd Thk Internal mm	Reqd Thk External mm	Long Eff	Circ Eff
Body Flg	139.2	136.0	144.0	136.0	130.7	64.9	1.00	1.00
Body Flg	426.2	287.0	220.0	212.0	207.9	207.9	1.00	1.00
Cylinder	1926.2	1500.0	20.0	20.0	12.3	9.5	1.00	1.00
Body Flg	2216.3	287.0	220.0	212.0	207.9	207.9	1.00	1.00
Body Flg	2629.5	295.0	228.0	220.0	216.8	216.8	1.00	1.00
Cylinder	8229.5	5600.0	18.0	18.0	7.9	14.2	1.00	1.00
Body Flg	8518.7	286.0	219.0	211.0	206.4	206.4	1.00	1.00
Body Flg	8795.7	277.0	210.0	202.0	196.9	196.9	1.00	1.00
Cylinder	10295.7	1500.0	20.0	20.0	7.9	9.9	1.00	1.00
Ellipse	10346.5	50.8	20.0	16.0	7.9	9.5	1.00	1.00

Local Stress Analysis Results:

Description	Analysis Type	Max Stress Ratio	High Stress Location	Pass Fail
N3-Tube Inlet	WRC-297	0.983	Shell	Passed
N1-Shell Inlet	WRC-297	0.945	Nozzle	Passed
N2-Shell Outle	WRC-297	0.945	Nozzle	Passed
N4-Tube Outlet	WRC-297	0.988	Shell	Passed

Foundation/Support Summary

Saddle Parameters:

Saddle Width 400.000 mm
 Saddle Bearing Angle 120.000 deg.
 Centerline Dimension 1950.000 mm
 Wear Pad Width 650.000 mm
 Wear Pad Thickness 20.000 mm
 Wear Pad Bearing Angle 132.000 deg.
 Distance from Saddle to Tangent 1120.000 mm

Baseplate Length 2350.000 mm
 Baseplate Thickness 36.000 mm
 Baseplate Width 425.000 mm
 Number of Ribs (including outside ribs) 5
 Rib Thickness 20.000 mm
 Web Thickness 20.000 mm
 Height of Center Web 680.000 mm
 Number of Bolts in Baseplate 8

Baseplate Sketch

PV Elite 28 Licensee: SL User


FileName : 108-CA-CB (Top)

Page 4 of 275

Vessel Design Summary:

Step: 38 6:05pm

Sep 8, 2026

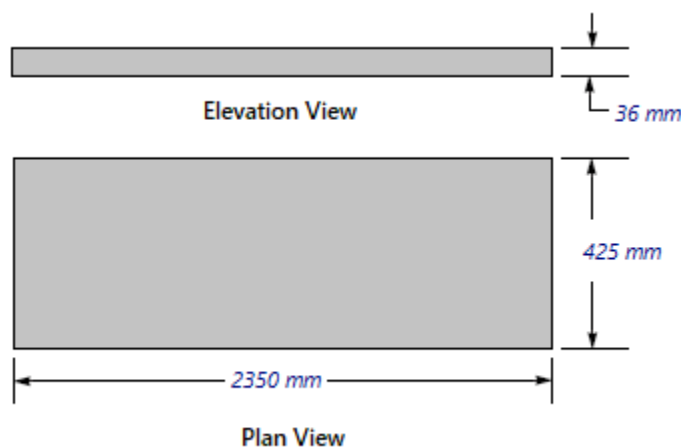

Maximum Tensile Bolt Load	5499. Kgf
---------------------------	-----------

Summary of Maximum Saddle Loads, Operating Case, Un-Factored:

Maximum Vertical Saddle Load	90513.63	Kgf
Maximum Transverse Saddle Shear Load	4538.10	Kgf
Maximum Longitudinal Saddle Shear Load	7447.94	Kgf

Summary of Maximum Saddle Loads, Pressure Test Case:

Maximum Vertical Saddle Load	79376.28	Kgf
Maximum Transverse Saddle Shear Load	347.47	Kgf
Maximum Longitudinal Saddle Shear Load	307.61	Kgf

Weights:

Fabricated	- Bare w/o removable internals	79292.9	kg.
Shop Test	- Fabricated + water (full)	126866.8	kg.
Shipping	- Fab. + rem. intls.+ shipping app.	79292.9	kg.
Erected	- Fab. + rem. intls.+ insul. (etc)	79292.9	kg.
Empty	- Fab. + intls. + details + wghts.	81870.9	kg.
Operating	- Empty + operating liquid (no ca)	129435.4	kg.
Field Test	- Empty weight + test medium (full)	129444.7	kg.

PV Elite is a trademark of Hexagon AB, 2026, All rights reserved.



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 5 of 275

Nozzle Summary:

Step: 36

6:05pm

Sep 8, 2026

Nozzle Calculation Summary (KPa. & mm):

Description	MAWP	Ext	MAPNC	UG-45	[tr]	Weld Path	Areas or Stresses
N3-Tube Inlet	1848	OK	...	OK	11.33	OK	Passed
Vent	1629	...	...	OK	7.52	OK	No Calc[*]
Drain	1629	...	...	OK	7.52	OK	No Calc[*]
N1-Shell Inlet	1607	OK	...	OK	11.33	OK	Passed
N2-Shell Outlet	1607	OK	...	OK	11.33	OK	Passed
N4-Tube Outlet	1848	OK	...	OK	11.33	OK	Passed

Nozzle MAWP Summary:

Minimum MAWP Nozzles : 1607 Nozzle : N1-Shell Inlet [Shellside]
 Minimum MAWP Nozzles : 1848 Nozzle : N3-Tube Inlet [Tubeside]

[*] - This was a small opening and the areas were not computed.

Multiple output lines for the same nozzle indicates required Code calculations in both the longitudinal and circumferential planes of reinforcement where applicable.

Check the spatial relationship between the nozzles:

From Node	Nozzle Description	X Coordinate mm	Layout Angle deg	Dia. Limit mm
30	N3-Tube Inlet	1176.175	0.000	1162.198
60	Vent	5429.524	0.000	110.000
60	Drain	5429.524	180.000	110.000
60	N1-Shell Inlet	3387.973	0.000	662.850
60	N2-Shell Outlet	7820.034	180.000	662.850
90	N4-Tube Outlet	9545.702	180.000	1162.198

The nozzle spacing is computed by the following:

$$= \sqrt{ll^2 + lc^2} \text{ where}$$

ll - Arc length along the inside vessel surface in the long. direction.

lc - Arc length along the inside vessel surface in the circ. direction

If any interferences/violations are found, they will be noted below.

No interference violations have been detected!

PV Elite is a trademark of Hexagon AB, 2026, All rights reserved.



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 6 of 275

Nozzle Schedule:

Step: 35

6:05pm

Sep 8, 2026

Nozzle Schedule:

Description	Nominal or Actual Size	Schd or FVC Type	Flg Type	Nozzle O/Dia in	Wall Thk mm	Reinforcing Diameter	Pad Thk mm	Cut Length mm	Flg Class
Vent	1.929 in	Actual	LWN	2.638	9.000	...	...	318.45	300
Drain	1.929 in	Actual	LWN	2.638	9.000	...	...	318.45	300
N1-Shell Inlet	14.000 in	60	WNF	14.000	15.088	595.60	16.00	330.81	150
N2-Shell Outlet	14.000 in	60	WNF	14.000	15.088	595.60	16.00	330.81	150
N3-Tube Inlet	24.016 in	Actual	WNF	24.016	17.450	1030.00	24.00	458.10	150
N4-Tube Outlet	24.016 in	Actual	WNF	24.016	17.450	1030.00	20.00	458.10	150

General Notes for the above table:

The cut length is the outside projection + inside projection + drop + in-plane shell thickness. This value does not include weld gaps, nor does it account for shrinkage.

In the case of oblique nozzles, the outside diameter must be increased. The re-pad width around the nozzle is calculated as follows:

Width of Pad = (Pad Outside Dia. (per above) - Nozzle Outside Dia.)/2

For hub nozzles, the thickness and diameter shown are those of the smaller and thinner section.

Nozzle Material and Weld Fillet Leg Size Details (mm):

Description	Material	Shl Grve Weld	Noz Shl/Pad Weld	Pad OD Weld	Pad Grve Weld	Inside Weld
Vent	SA-266 2	16.000	10.000	...	...	...
Drain	SA-266 2	16.000	10.000	...	...	...
N1-Shell In	SA-106 B	16.000	10.000	14.000	16.000	...
N2-Shell Ou	SA-106 B	16.000	10.000	14.000	16.000	...
N3-Tube Inl	SA-516 70	16.000	16.000	16.000	16.000	...
N4-Tube Out	SA-516 70	16.000	10.000	16.000	20.000	...

Note: The Outside projections below do not include the flange thickness.

Nozzle Miscellaneous Data:

Description	Elev/Distance From Datum mm	Layout Angle deg	Proj Outside mm	Proj Inside mm	Installed in Component
Vent	5429.524	0.0	300.00	0.00	Main Shell
Drain	5429.524	180.0	300.00	0.00	Main Shell
N1-Shell Inlet	3387.973	0.0	300.00	0.00	Main Shell
N2-Shell Outlet	7820.034	180.0	300.00	0.00	Main Shell
N3-Tube Inlet	1176.175	0.0	400.00	0.00	LHS Ch Shell
N4-Tube Outlet	9545.701	180.0	400.00	0.00	RHS

PV Elite is a trademark of Hexagon AB, 2026, All rights reserved.



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 7 of 275

Bill of Material:

Step: 34 6:05pm Sep 8,2026

Bill of Materials:

QTY	DESCRIPTION	MATERIAL
1	BLIND FLANGE: 144.0mm THK X 2748.0mm OD	SA-266 2
2	WELD NECK FLANGE: 220.0mm THK X 2748.0mm OD	SA-266 2
1	WELD NECK FLANGE: 228.0mm THK X 2748.0mm OD	SA-266 2
1	CYLINDER: 18.0mm THK X 2480.0mm ID X 5600.0mm	SA-516 70
1	WELD NECK FLANGE: 219.0mm THK X 2748.0mm OD	SA-266 2
1	WELD NECK FLANGE: 210.0mm THK X 2748.0mm OD	SA-266 2
1	CYLINDER: 20.0mm THK X 2480.0mm ID X 1500.0mm	SA-516 70
1	ELLIPTICAL HEAD: 2.0 X 1, 20.0mm THK X 2480.0mm ID X 50.8mm	SA-516 70
9	BAFFLES: 2455.0mm DIA X 10.0mm THK	SA-516 70
12	TIE RODS: 16mm DIA X 4964mm	SA-193 B7M
1	TUBESHEET: 2562.0mm X 115.0mm THK	SA-266 2
6000	TUBES: 6000.0mm X 19.0mm DIA X 2.1mm THK	SA-179
1	FLOATING TUBESHEET: 2465.0mm X 115.0mm THK	SA-266 2
72	FLOATING HEAD FLANGE BOLTS: 38.1mm DIA	SA-193 B7M
144	NUTS FOR FLOATING HEAD FLANGE BOLTS: 38.1mm DIA	...
1	FLOATING HEAD FLANGE GASKET: 2323.0mm OD X 2297.0mm ID	...
3	INSULATION: 312mm X 100mm THK	Personal Protec
2	SADDLE: 400.0mm X 120 DEG	SA-266 2
1	INSULATION: 5600mm X 100mm THK	Personal Protec
1	INSULATION: 1500mm X 100mm THK	Personal Protec
1	INSULATION: 50mm X 100mm THK	Personal Protec
3	GASKET: 2554.0mm OD X 2510.0mm ID	...
208	BODY FLANGE BOLTS: 38.1mm DIA	SA-193 B7
416	NUTS FOR BODY FLANGE BOLTS: 38.1mm DIA	...
2	CYLINDRICAL SEGMENT 20.0mm THK X 3149.5mm X 1500.0mm	SA-516 70
1	CYLINDRICAL SEGMENT 20.0mm THK X 1491.9mm X 1500.0mm	SA-516 70
1	NAMEPLATE	...



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 8 of 275

MDMT Summary:

Step: 37 6:05pm Sep 8,2026

Minimum Design Metal Temperature Results Summary (°C):

Description	Curve	Basic MDMT	Reduced MDMT	UG-20(f) MDMT	Thickness ratio	Gov Thk mm	E*	PWHT reqd
Notes								
LHS Shell Flg[11]	B	-14	-37	-29	0.598	16.000	1.00	No
RHS Shell Flg[11]	B	-31	-48		0.598	16.000	1.00	No
Bolting [21]		-48						
RHS Shell Flg[11]	B	-24	-48	-29	0.564	20.000	1.00	No
Main Shell [8]	B	-11	-31	-29	0.637	18.000	1.00	No
RHS [8]	B	-24	-48	-29	0.562	20.000	1.00	No
RHS dish end [10]	B	-14	-29	-29	0.730	16.000	1.00	No
RHS dish end [7]	B	-7	-33	-29	0.562	20.000	1.00	No
Left Saddle [24]	B	-11	-31	-29	0.637	18.000	1.00	No
Sdl 2 Fr60 [24]	B	-11	-31	-29	0.637	18.000	1.00	No
Vent [1]	B	-29	-104	-29	0.035	9.000	1.00	No
Nozzle Flg [5]	A	-18	-104					
Drain [1]	B	-29	-104	-29	0.036	9.000	1.00	No
Nozzle Flg [5]	A	-18	-104					
N1-Shell Inlet[1]	B	-14	-34	-29	0.637	16.000	1.00	No
Nozzle Flg [5]	A	-18	-46					
N2-Shell Outle[1]	B	-14	-33	-29	0.652	16.000	1.00	No
Nozzle Flg [5]	A	-18	-44					
N4-Tube Outlet[1]	B	-24	-48	-29	0.575	20.000	1.00	No
Nozzle Flg [5]	A	-18	-44					
Tubesheet: SS[13]	B	3	-5		0.509	28.750	1.00	No
Warmest MDMT:		3	-5					
LHS Blind Fla[11]	B	7	2		0.906	34.000	1.00	No
LHS CH flange[11]	B	-7	-38	-29	0.514	20.000	1.00	No
LHS Ch Flg-2 [11]	B	-7	-38	-29	0.514	20.000	1.00	No
LHS Ch Shell [8]	B	-7	-33	-29	0.562	20.000	1.00	No
N3-Tube Inlet [1]	B	-7	-33	-29	0.562	20.000	1.00	No
Nozzle Flg [5]	A	-18	-46					
Tubesheet: CS[14]	B	3	-5		0.509	28.750	1.00	No
Bolting [21]		-48						
Bolting [21]		-48						
Warmest MDMT:		7	2					

Exchanger Side	Computed MDMT	Required MDMT	Pass/Fail
Shell	-5.0	-12.0	Fail
Channel/Tube	2.0	-12.0	Fail

Notes:

- [!] - This was an impact tested material.
- [1] - Governing Nozzle Weld.
- [4] - ASME Flange MDMT Calcs; Thickness ratio per UCS-66(b)(1)(-c).
- [5] - ASME Flange MDMT Calcs; Thickness ratio per UCS-66(b)(1)(-b).
- [6] - MDMT Calculations at the Shell/Head Joint.
- [7] - MDMT Calculations for the Straight Flange.
- [8] - Cylinder/Cone/Flange Junction MDMT.
- [9] - Calculations in the Spherical Portion of the Head.
- [10] - Calculations in the Knuckle Portion of the Head.
- [11] - Calculated (Body Flange) Flange MDMT.
- [12] - Calculated Flat Head MDMT per UCS-66.3
- [13] - Tubesheet MDMT, shell side, if applicable
- [14] - Tubesheet MDMT, tube side, if applicable
- [15] - Nozzle Material
- [16] - Shell or Head Material



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 9 of 275

MDMT Summary:

Step: 37 6:05pm Sep 8, 2026

- [17] - Impact Testing required
- [18] - Impact Testing not required, see UCS-66(b)(3)
- [20] - Cylinder/Cone Junction MDMT based on Longitudinal Stress considerations
- [21] - Body Flange Bolting Material
- [22] - Nozzle Flange Bolting Material
- [23] - Stiffening Ring to Shell Weld
- [24] - Saddle to Shell Weld

UG-84(b)(2) was not considered.

UCS-66(g) was not considered.

UCS-66(i) was not considered.

Notes:

Impact test temps were not entered in and not considered in the analysis.

UCS-66(i) applies to impact tested materials not by specification and

UCS-66(g) applies to materials impact tested per UG-84.1 General Note (c).

The Basic MDMT includes the (30F) PWHT credit if applicable.

PV Elite is a trademark of Hexagon AB, 2026, All rights reserved.



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 10 of 275

Warnings and Errors:

Step: 0 6:05pm Sep 8, 2026

Class From To : Basic Element Checks.

Class From To: Check of Additional Element Data

Warning: LHS Ch Flg-2 and LHS Shell Flg-1

There are mating flanges in this model that have different design pressures. This will generate different bolt loads. If a tubesheet is in between these flanges, PV Elite will compute the mating flange loads for you. If there is not a tubesheet physically separating these flanges, you must enter in the mating flange loads into the flange dialog.

Warning:

There is a flange in this model connected to an element whose temperature is different. The bolt allowable stress is based on it's parent design temperature. You may need to manually adjust the operating bolt allowable stress to a value based upon a representative maximum temperature the bolts will be subject to.

PV Elite performs all calculations internally in Imperial Units to remain compliant with the ASME Code and any built in assumptions in the ASME Code formulas. The finalized results are reflected to show the set of selected units for this analysis.

Information Regarding Nozzle Loads

Please note that nozzle loadings, if included, are assumed to be local in nature and will not contribute to or create a net section bending moment. Therefore, the addition of nozzle loads will not affect the support load calculation. If you wish to create a load on the support(s) from nozzle loads, you can enable that feature in tools->configuration->Job Specific Settings.



One or more nozzles in this model was specified using the actual thickness basis and a standard flange is also specified. In many cases a matching nominal diameter cannot be determined and the weight of the flange and optional blind flange cannot be determined. When actual thickness basis is specified, you must calculate the weight of the assembly (by hand) and enter it into the 'Overriding Weight' field in the nozzle dialog when there is a standard flange specified. However, for FVC nozzles that have their nominal diameter specified in the FVC dialog, entering the overriding weight for that nozzle is not required.



The ASME Code Section VIII Division 1 does not explicitly require stresses on elements to be computed under test conditions. Please see interpretation VIII-1-10-12 for more information. PV Elite also computes weight due to test fluid and uses the weight in various calculations such as saddle and leg loads. PV Elite also computes static pressure due to operating and test liquids. The static pressure is used in conjunction with the design and test pressures to determine a total pressure in the determination of required thickness, MAWP etc. This ensures compliance with UG-22 requirements.

PV Elite is a trademark of Hexagon AB, 2026, All rights reserved.



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 11 of 275

Input Echo:

Step: 1

6:05pm

Sep 8, 2026

Units used in this Analysis (MM):

Name	System Unit	Constant	User Unit
Length	Feet	304.8000	mm
Force	Pounds	0.4536	Kgf
Mass	Pounds	0.4536	kg.
Area	sq. inches	6.4516	cm ²
Moment	ft. lbs.	0.1383	Kg-m.
Stress	lbs./sq.in.	0.0069	N./mm ²
Temperature	Degrees F	0.5556	°C
Pressure	psig	6.8946	KPa.
Elast. Modulus	lbs./sq.in.	6.8946	KPa.
Pipe Density	lbs./cu.in.	0.0277	kg./cm ³
Ins. Density	lbs./cu.ft.	0.1600E-04	kg./cm ³
Fluid Density	lbs./cu.ft.	0.1600E-04	kg./cm ³
Wind Speed	miles/hr	1.6093	Km/hr
Tray Weight	lbs./sq.ft.	0.0005	Kgs/cm ²
Inertia	in.4	41.6231	cm4
G Load	G's	1.0000	g's
Wind Load	lbs./sq.ft.	4.8825	Kgs/m ²
Elevation	Feet	304.8000	mm
Volume	in.3	16.3900	cm ³
Diameter	inches	25.4000	mm
Thickness	inches	25.4000	mm

PV Elite Vessel Analysis Program: Input Data

Exchanger Design Pressures and Temperatures

Shell Side Design Pressure	520	KPa.
Channel Side Design Pressure	999.99	KPa.
Shell Side Design Temperature	130.0	°C
Channel Side Design Temperature	82.0	°C
Radiography, Shell Side	RT-2	
Radiography, Channel Side	RT-2	
Service Type, Shell Side	Sour	
Service Type, Channel Side	Air/Water/Steam	
MDMT (CET), Shell Side	-12.0	°C
MDMT (CET), Tube Side	-12.0	°C
User defined MAWP, Shell Side	0	KPa.
User defined MAWP, Channel Side	0	KPa.
User defined MAPnc, Shell Side	0	KPa.
User defined MAPnc, Channel Side	0	KPa.
User defined Test Pres., Shell Side	0	KPa.
User defined Test Pres., Channel Side	0	KPa.

Projection of Nozzle from Vessel Top	0	mm
Projection of Nozzle from Vessel Bottom	0	mm
Type of Construction	Welded	
Use Higher Longitudinal Stresses (Flag)	Y	
Select t for Internal Pressure (Flag)	N	
Select t for External Pressure (Flag)	N	
Select t for Axial Stress (Flag)	N	
Select Location for Stiff. Rings (Flag)	N	
Consider Vortex Shedding	N	

Shop Pressure Test:

Type of Pressure Test	UG-99(c)
Pressure Test Position	Horizontal
Test Performed in Corroded Condition	No



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 12 of 275

Input Echo:

Step: 1 6:05pm Sep 8,2026

Field Pressure Test:

Type of Pressure Test UG-99(b) Note [35]
 Pressure Test Position Horizontal
 Test Performed in Corroded Condition Yes

Load Case 1	NP+EW+WI+FW+BW
Load Case 2	NP+EW+EE+FS+BS
Load Case 3	NP+OW+WI+FW+BW
Load Case 4	NP+OW+EQ+FS+BS
Load Case 5	NP+HW+HI
Load Case 6	NP+HW+HE
Load Case 7	IP+OW+WI+FW+BW
Load Case 8	IP+OW+EQ+FS+BS
Load Case 9	EP+OW+WI+FW+BW
Load Case 10	EP+OW+EQ+FS+BS
Load Case 11	HP+HW+HI
Load Case 12	HP+HW+HE
Load Case 13	IP+WE+EW
Load Case 14	IP+WF+CW
Load Case 15	IP+VO+OW
Load Case 16	IP+VE+EW
Load Case 17	NP+VO+OW
Load Case 18	FS+BS+IP+OW
Load Case 19	FS+BS+EP+OW
Load Case 20	BL+IP+OW

Wind Design Code	ASCE/SEI 7-16
Wind Load Reduction Scale Factor	1.100
Basic Wind Speed [V]	92.7 Km/hr
Surface Roughness Category	C: Open Terrain
Type of Surface	Moderately Smooth
Base Elevation	300 mm
Percent Wind for Hydrotest	50.0
Using User defined Wind Press. Vs Elev.	N
Height of Hill or Escarpment H or Hh	0 mm
Distance Upwind of Crest Lh	0 mm
Distance from Crest to the Vessel x	0 mm
Type of Terrain (Hill, Escarpment)	Flat
Damping Factor (Beta) for Wind (Ope)	0.0100
Damping Factor (Beta) for Wind (Empty)	0.0000
Damping Factor (Beta) for Wind (Filled)	0.0000
Site Elevation above Sea Level	0 mm

Seismic Design Code	ASCE/SEI 7-16
Seismic Load Reduction Scale Factor	1.000
Importance Factor	1.250
Table Value Fa	1.600
Table Value Fv	2.400
Max. Mapped Res. Acceleration [Ss]	0.147
Max. Eff. Ground Acceleration [S]	0.065
Force Modification Factor R	3.000
Site Class	D
Component Elevation Ratio z/h	0.000
Amplification Factor Ap	1.000
Force Factor	0.000
Consider Vertical Acceleration	Yes
Minimum Acceleration Multiplier	0.000
User Value of Sds (used if > 0)	0.000
User Value of Sd1 (used if > 0)	0.000
Moment Reduction Factor Tau	1.000

M.A.W.P + Static Head to Nozzle	Y
Consider MAP New and Cold in Noz. Design	N
Consider External Loads for Nozzle Des.	Y



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 13 of 275

Input Echo:

Step: 1 6:05pm Sep 8, 2026

Use ASME VIII-1 Appendix 1-9 N
Perform Blast Load Analysis No
Material Database Year Current w/Addenda or Code Year

Configuration Directives:

g0 is taken as min(g0, attached shell thk) Yes
Do not use Nozzle MDMT Interpretation VIII-1 01-37 No
Use Table G instead of exact equation for "A" Yes
Shell Head Joints are Tapered Yes
Compute "K" in corroded condition Yes
Use Code Case 2286 No
Use the MAWP to compute the MDMT Yes
For thickness ratios <= 0.35, MDMT will be -155F (-104C) Yes
For PWHT & P1 Materials the MDMT can be < -55F (-48C) No

Using Metric Material Databases, ASME II D Yes
Calculate B31.3 type stress for Nozzles with Loads Yes
Reduce the MDMT due to lower membrane stress Yes
Consider Longitudinal Stress in MDMT Calculations Yes

Complete Listing of Vessel Elements and Details:

Element#	1/10	
Element From Node	10	
Element To Node	20	
Element Type	Flange	
Description	LHS Blind Flang	
Distance "FROM" to "TO"	136	mm
Flange Outside Diameter	2748	mm
Element Thickness	136	mm
Internal Corrosion Allowance	3	mm
Nominal Thickness	144	mm
External Corrosion Allowance	0	mm
Design Internal Pressure	1000	KPa.
Design Temperature Internal Pressure	82	°C
Design External Pressure	103.42	KPa.
Design Temperature External Pressure	82	°C
Effective Diameter Multiplier	1.2	
Material Name	SA-266 2	
Allowable Stress, Ambient	138	N./mm ²
Allowable Stress, Operating	138	N./mm ²
Allowable Stress, Hydrotest	225	N./mm ²
Material Density	0.00775	kg./cm ³
P Number Thickness	32.004	mm
Yield Stress, Operating	230.08	N./mm ²
UCS-66 Chart Curve Designation	B	
External Pressure Chart Name	CS-2	
UNS Number	K03506	
Product Form	Forgings	
Perform Flange Stress Calculation (Y/N)	Y	
Weld is pre-Heated	No	
Element From Node	10	
Detail Type	Liquid	
Detail ID	Liquid: 10	
Dist. from "FROM" Node / Offset dist	0	mm
Height/Length of Liquid	2850	mm
Liquid Density	0.0009984	kg./cm ³

Element#	2/10
Element From Node	20



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 14 of 275

Input Echo:

Step: 1 6:05pm Sep 8,2026

Element To Node	30
Element Type	Flange
Description	LHS CH flange-1
Distance "FROM" to "TO"	287 mm
Flange Inside Diameter	2480 mm
Element Thickness	212 mm
Internal Corrosion Allowance	3 mm
Nominal Thickness	220 mm
External Corrosion Allowance	0 mm
Design Internal Pressure	1000 KPa.
Design Temperature Internal Pressure	82 °C
Design External Pressure	103.42 KPa.
Design Temperature External Pressure	82 °C
Effective Diameter Multiplier	1.2
Material Name	SA-266 2
Perform Flange Stress Calculation (Y/N)	Y
Weld is pre-Heated	No

Element From Node	20
Detail Type	Liquid
Detail ID	Liquid: 20
Dist. from "FROM" Node / Offset dist	0 mm
Height/Length of Liquid	2540 mm
Liquid Density	0.0009984 kg./cm ³

Element#	3/10
Element From Node	30
Element To Node	40
Element Type	Cylinder
Description	LHS Ch Shell
Distance "FROM" to "TO"	1500 mm
Inside Diameter	2480 mm
Element Thickness	20 mm
Internal Corrosion Allowance	3 mm
Nominal Thickness	20 mm
External Corrosion Allowance	0 mm
Design Internal Pressure	1000 KPa.
Design Temperature Internal Pressure	82 °C
Design External Pressure	103.42 KPa.
Design Temperature External Pressure	82 °C
Effective Diameter Multiplier	1.2
Material Name	SA-516 70
Allowable Stress, Ambient	138 N./mm ²
Allowable Stress, Operating	138 N./mm ²
Allowable Stress, Hydrotest	234 N./mm ²
Material Density	0.00775 kg./cm ³
P Number Thickness	32.004 mm
Yield Stress, Operating	242.6 N./mm ²
UCS-66 Chart Curve Designation	B
External Pressure Chart Name	CS-2
UNS Number	K02700
Product Form	Plate
Efficiency, Longitudinal Seam	1.0
Efficiency, Circumferential Seam	1.0
Weld is pre-Heated	No

Element From Node	30
Detail Type	Liquid
Detail ID	Liquid: 30
Dist. from "FROM" Node / Offset dist	0 mm
Height/Length of Liquid	2460 mm
Liquid Density	0.0009984 kg./cm ³



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 15 of 275

Input Echo:

Step: 1 6:05pm Sep 8,2026

Element From Node	30
Detail Type	Nozzle
Detail ID	N3-Tube Inlet
Dist. from "FROM" Node / Offset dist	750 mm
Nozzle Diameter	24.02 in.
Nozzle Schedule	40
Nozzle Class	150
Layout Angle	0.0
Blind Flange (Y/N)	N
Weight of Nozzle (Used if > 0)	206.37 Kg
Grade of Attached Flange	GR 1.1
Nozzle Matl	SA-516 70

Element#	4/10
Element From Node	40
Element To Node	50
Element Type	Flange
Description	LHS Ch Flg-2
Distance "FROM" to "TO"	287 mm
Flange Inside Diameter	2480 mm
Element Thickness	212 mm
Internal Corrosion Allowance	3 mm
Nominal Thickness	220 mm
External Corrosion Allowance	0 mm
Design Internal Pressure	1000 KPa.
Design Temperature Internal Pressure	82 °C
Design External Pressure	103.42 KPa.
Design Temperature External Pressure	82 °C
Effective Diameter Multiplier	1.2
Material Name	SA-266 2
Allowable Stress, Ambient	138 N./mm ²
Allowable Stress, Operating	138 N./mm ²
Allowable Stress, Hydrotest	225 N./mm ²
Material Density	0.00775 kg./cm ³
P Number Thickness	32.004 mm
Yield Stress, Operating	230.08 N./mm ²
UCS-66 Chart Curve Designation	B
External Pressure Chart Name	CS-2
UNS Number	K03506
Product Form	Forgings
Perform Flange Stress Calculation (Y/N)	Y
Weld is pre-Heated	No

Element From Node	40
Detail Type	Liquid
Detail ID	Liquid: 40
Dist. from "FROM" Node / Offset dist	0 mm
Height/Length of Liquid	2540 mm
Liquid Density	0.0009984 kg./cm ³

Element#	5/10
Element From Node	50
Element To Node	60
Element Type	Flange
Description	LHS Shell Flg-1
Distance "FROM" to "TO"	295 mm
Flange Inside Diameter	2480 mm
Element Thickness	220 mm
Internal Corrosion Allowance	3 mm
Nominal Thickness	228 mm
External Corrosion Allowance	0 mm



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 16 of 275

Input Echo:

Step: 1 6:05pm Sep 8,2026

Design Internal Pressure	520	KPa.
Design Temperature Internal Pressure	130	°C
Design External Pressure	103.42	KPa.
Design Temperature External Pressure	130	°C
Effective Diameter Multiplier	1.2	
Material Name	SA-266 2	
Perform Flange Stress Calculation (Y/N)	Y	
Weld is pre-Heated	No	
Element From Node	50	
Detail Type	Liquid	
Detail ID	Liquid: 50	
Dist. from "FROM" Node / Offset dist	0	mm
Height/Length of Liquid	2540	mm
Liquid Density	0.0009984	kg./cm ³
Element From Node	50	
Detail Type	Insulation	
Detail ID	Insulation	
Dist. from "FROM" Node / Offset dist	0	mm
Height/Length of Insulation	312	mm
Thickness of Insulation	100	mm
Density	0.000352	kg./cm ³

Element#	6/10	
Element From Node	60	
Element To Node	70	
Element Type	Cylinder	
Description	Main Shell	
Distance "FROM" to "TO"	5600	mm
Inside Diameter	2480	mm
Element Thickness	18	mm
Internal Corrosion Allowance	3	mm
Nominal Thickness	18	mm
External Corrosion Allowance	0	mm
Design Internal Pressure	520	KPa.
Design Temperature Internal Pressure	130	°C
Design External Pressure	103.42	KPa.
Design Temperature External Pressure	130	°C
Effective Diameter Multiplier	1.2	
Material Name	SA-516 70	
Allowable Stress, Ambient	138	N./mm ²
Allowable Stress, Operating	138	N./mm ²
Allowable Stress, Hydrotest	234	N./mm ²
Material Density	0.00775	kg./cm ³
P Number Thickness	32.004	mm
Yield Stress, Operating	234.4	N./mm ²
UCS-66 Chart Curve Designation	B	
External Pressure Chart Name	CS-2	
UNS Number	K02700	
Product Form	Plate	
Efficiency, Longitudinal Seam	1.0	
Efficiency, Circumferential Seam	1.0	
Weld is pre-Heated	No	
Element From Node	60	
Detail Type	Saddle	
Detail ID	Left Saddle	
Dist. from "FROM" Node / Offset dist	1120	mm
Width of Saddle	400	mm
Height of Saddle at Bottom	1950	mm
Saddle Contact Angle	120.0	
Height of Composite Ring Stiffener	0	mm



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 17 of 275

Input Echo:

Step: 1 6:05pm Sep 8,2026

Width of Wear Plate	650	mm
Thickness of Wear Plate	20	mm
Contact Angle, Wear Plate (degrees)	132.0	
Friction coefficient	0.30000001	
Moment Factor	3.0	
Dimension E at base (optional)	0	mm
Circumferential Eff. over Saddle	1.0	
Circumferential Eff. at Midspan	1.0	
Tangent to Tangent dist. (optional)	0	mm

Element From Node	60	
Detail Type	Saddle	
Detail ID	Sdl 2 Fr60	
Dist. from "FROM" Node / Offset dist	4480	mm
Width of Saddle	400	mm
Height of Saddle at Bottom	1950	mm
Saddle Contact Angle	120.0	
Height of Composite Ring Stiffener	0	mm
Width of Wear Plate	650	mm
Thickness of Wear Plate	20	mm
Contact Angle, Wear Plate (degrees)	132.0	
Friction coefficient	0.0	
Moment Factor	3.0	
Dimension E at base (optional)	0	mm
Circumferential Eff. over Saddle	1.0	
Circumferential Eff. at Midspan	1.0	
Tangent to Tangent dist. (optional)	0	mm

Element From Node	60	
Detail Type	Liquid	
Detail ID	Liquid: 60	
Dist. from "FROM" Node / Offset dist	0	mm
Height/Length of Liquid	2460	mm
Liquid Density	0.0009984	kg./cm ³

Element From Node	60	
Detail Type	Insulation	
Detail ID	Insulation	
Dist. from "FROM" Node / Offset dist	0	mm
Height/Length of Insulation	5600	mm
Thickness of Insulation	100	mm
Density	0.000352	kg./cm ³

Element From Node	60	
Detail Type	Nozzle	
Detail ID	Vent	
Dist. from "FROM" Node / Offset dist	2800	mm
Nozzle Diameter	1.929	in.
Nozzle Schedule	160	
Nozzle Class	300	
Layout Angle	0.0	
Blind Flange (Y/N)	N	
Weight of Nozzle (Used if > 0)	7.4236	Kgf
Grade of Attached Flange	GR 1.1	
Nozzle Matl	SA-266 2	

Element From Node	60	
Detail Type	Nozzle	
Detail ID	Drain	
Dist. from "FROM" Node / Offset dist	2800	mm
Nozzle Diameter	1.929	in.
Nozzle Schedule	160	
Nozzle Class	300	
Layout Angle	180.0	
Blind Flange (Y/N)	N	



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 18 of 275

Input Echo:

Step: 1 6:05pm Sep 8,2026

Weight of Nozzle (Used if > 0)	7.4236	Kgf
Grade of Attached Flange	GR 1.1	
Nozzle Matl	SA-266 2	

Element From Node	60	
Detail Type	Nozzle	
Detail ID	N1-Shell Inlet	
Dist. from "FROM" Node / Offset dist	758.45	mm
Nozzle Diameter	14	in.
Nozzle Schedule	60	
Nozzle Class	150	
Layout Angle	0.0	
Blind Flange (Y/N)	N	
Weight of Nozzle (Used if > 0)	114.22	Kgf
Grade of Attached Flange	GR 1.1	
Nozzle Matl	SA-106 B	

Element From Node	60	
Detail Type	Nozzle	
Detail ID	N2-Shell Outlet	
Dist. from "FROM" Node / Offset dist	5190.5	mm
Nozzle Diameter	14	in.
Nozzle Schedule	60	
Nozzle Class	150	
Layout Angle	180.0	
Blind Flange (Y/N)	N	
Weight of Nozzle (Used if > 0)	114.22	Kgf
Grade of Attached Flange	GR 1.1	
Nozzle Matl	SA-106 B	

Element From Node	60	
Detail Type	Weight	
Detail ID	Fireproofing we	
Dist. from "FROM" Node / Offset dist	1120	mm
Miscellaneous Weight	500	Kgf
Offset from Element Centerline	1900	mm

Element From Node	60	
Detail Type	Weight	
Detail ID	Wght:[2 of 2]	
Dist. from "FROM" Node / Offset dist	4480	mm
Miscellaneous Weight	500	Kgf
Offset from Element Centerline	1900	mm

Element#	7/10	
Element From Node	70	
Element To Node	80	
Element Type	Flange	
Description	RHS Shell Flg-1	
Distance "FROM" to "TO"	286	mm
Flange Inside Diameter	2480	mm
Element Thickness	211	mm
Internal Corrosion Allowance	3	mm
Nominal Thickness	219	mm
External Corrosion Allowance	0	mm
Design Internal Pressure	520	KPa.
Design Temperature Internal Pressure	130	°C
Design External Pressure	103.42	KPa.
Design Temperature External Pressure	130	°C
Effective Diameter Multiplier	1.2	
Material Name	SA-266 2	
Allowable Stress, Ambient	138	N./mm ²
Allowable Stress, Operating	138	N./mm ²



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 19 of 275

Input Echo:

Step: 1 6:05pm Sep 8,2026

Allowable Stress, Hydrotest	225	N./mm ²
Material Density	0.00775	kg./cm ³
P Number Thickness	32.004	mm
Yield Stress, Operating	222.2	N./mm ²
UCS-66 Chart Curve Designation	B	
External Pressure Chart Name	CS-2	
UNS Number	K03506	
Product Form	Forgings	
Perform Flange Stress Calculation (Y/N)	Y	
Weld is pre-Heated	Yes	

Element From Node	70	
Detail Type	Liquid	
Detail ID	Liquid: 70	
Dist. from "FROM" Node / Offset dist	0	mm
Height/Length of Liquid	2540	mm
Liquid Density	0.0009984	kg./cm ³

Element From Node	70	
Detail Type	Insulation	
Detail ID	Insulation	
Dist. from "FROM" Node / Offset dist	0	mm
Height/Length of Insulation	312	mm
Thickness of Insulation	100	mm
Density	0.000352	kg./cm ³

Element#	8/10	
Element From Node	80	
Element To Node	90	
Element Type	Flange	
Description	RHS Shell Flg-2	
Distance "FROM" to "TO"	277	mm
Flange Inside Diameter	2480	mm
Element Thickness	202	mm
Internal Corrosion Allowance	3	mm
Nominal Thickness	210	mm
External Corrosion Allowance	0	mm
Design Internal Pressure	520	KPa.
Design Temperature Internal Pressure	130	°C
Design External Pressure	103.42	KPa.
Design Temperature External Pressure	130	°C
Effective Diameter Multiplier	1.2	
Material Name	SA-266 2	
Perform Flange Stress Calculation (Y/N)	Y	
Weld is pre-Heated	Yes	

Element From Node	80	
Detail Type	Liquid	
Detail ID	Liquid: 80	
Dist. from "FROM" Node / Offset dist	0	mm
Height/Length of Liquid	2540	mm
Liquid Density	0.0009984	kg./cm ³

Element From Node	80	
Detail Type	Insulation	
Detail ID	Insulation	
Dist. from "FROM" Node / Offset dist	0	mm
Height/Length of Insulation	312	mm
Thickness of Insulation	100	mm
Density	0.000352	kg./cm ³



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 20 of 275

Input Echo:

Step: 1 6:05pm Sep 8,2026

Element#	9/10
Element From Node	90
Element To Node	100
Element Type	Cylinder
Description	RHS
Distance "FROM" to "TO"	1500 mm
Inside Diameter	2480 mm
Element Thickness	20 mm
Internal Corrosion Allowance	3 mm
Nominal Thickness	20 mm
External Corrosion Allowance	0 mm
Design Internal Pressure	520 KPa.
Design Temperature Internal Pressure	130 °C
Design External Pressure	103.42 KPa.
Design Temperature External Pressure	130 °C
Effective Diameter Multiplier	1.2
Material Name	SA-516 70
Allowable Stress, Ambient	138 N./mm ²
Allowable Stress, Operating	138 N./mm ²
Allowable Stress, Hydrotest	234 N./mm ²
Material Density	0.00775 kg./cm ³
P Number Thickness	32.004 mm
Yield Stress, Operating	234.4 N./mm ²
UCS-66 Chart Curve Designation	B
External Pressure Chart Name	CS-2
UNS Number	K02700
Product Form	Plate
Efficiency, Longitudinal Seam	1.0
Efficiency, Circumferential Seam	1.0
Weld is pre-Heated	Yes

Element From Node	90
Detail Type	Liquid
Detail ID	Liquid: 90
Dist. from "FROM" Node / Offset dist	0 mm
Height/Length of Liquid	2460 mm
Liquid Density	0.0009984 kg./cm ³

Element From Node	90
Detail Type	Insulation
Detail ID	Insulation
Dist. from "FROM" Node / Offset dist	0 mm
Height/Length of Insulation	1500 mm
Thickness of Insulation	100 mm
Density	0.000352 kg./cm ³

Element From Node	90
Detail Type	Nozzle
Detail ID	N4-Tube Outlet
Dist. from "FROM" Node / Offset dist	750 mm
Nozzle Diameter	24.02 in.
Nozzle Schedule	40
Nozzle Class	150
Layout Angle	180.0
Blind Flange (Y/N)	N
Weight of Nozzle (Used if > 0)	189.6 Kg
Grade of Attached Flange	GR 1.1
Nozzle Matl	SA-516 70

Element#	10/10
Element From Node	100
Element To Node	110
Element Type	Elliptical



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 21 of 275

Input Echo:

Step: 1 6:05pm Sep 8,2026

Description	RHS dish end
Distance "FROM" to "TO"	50.8 mm
Inside Diameter	2480 mm
Element Thickness	16 mm
Internal Corrosion Allowance	3 mm
Nominal Thickness	20 mm
External Corrosion Allowance	0 mm
Design Internal Pressure	520 KPa.
Design Temperature Internal Pressure	130 °C
Design External Pressure	103.42 KPa.
Design Temperature External Pressure	130 °C
Effective Diameter Multiplier	1.2
Material Name	SA-516 70
Efficiency, Longitudinal Seam	1.0
Efficiency, Circumferential Seam	1.0
Elliptical Head Factor	2.0
Weld is pre-Heated	No
Element From Node	100
Detail Type	Liquid
Detail ID	Liquid: 100
Dist. from "FROM" Node / Offset dist	0 mm
Height/Length of Liquid	2460 mm
Liquid Density	0.0009984 kg./cm ³
Element From Node	100
Detail Type	Insulation
Detail ID	Insulation
Dist. from "FROM" Node / Offset dist	0 mm
Height/Length of Insulation	50.5 mm
Thickness of Insulation	100 mm
Density	0.000352 kg./cm ³

PV Elite is a trademark of Hexagon AB, 2026, All rights reserved.



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 22 of 275

XY Coordinate Calculations:

Step: 2 6:05pm

Sep 8, 2026

XY Coordinate Calculations:

From	To	X (Horiz.) mm	Y (Vert.) mm	DX (Horiz.) mm	DY (Vert.) mm
LHS Blind Flang		139.175	...	136	...
LHS CH flange-1		426.175	...	287	...
LHS Ch Shell		1926.17	...	1500	...
LHS Ch Flg-2		2216.35	...	287	...
LHS Shell Flg-1		2629.53	...	295	...
Main Shell		8229.52	...	5600	...
RHS Shell Flg-1		8518.7	...	286	...
RHS Shell Flg-2		8795.7	...	277	...
RHS		10295.7	...	1500	...
RHS dish end		10346.5	...	50.8	...

The calculated dimensions are based on the given element lengths. Due to variability in manufacturing (weld gaps etc.), the Tangent to Tangent length may not be exact. The length includes gasket thicknesses and raised face heights.

PV Elite is a trademark of Hexagon AB, 2026, All rights reserved.



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 23 of 275

Flg Calc [Int P]: LHS Blind Fl

Flng: 31

6:05pm


Sep 8, 2026

Flange Input Data Values

Description: LHS Blind Fl :

LHS Blind Flang

Flange Type		Blind	
Design Pressure	P	1027.94	KPa.
Design Temperature		82	°C
Internal Corrosion Allowance	ci	3.0000	mm
External Corrosion Allowance	ce	0.0000	mm
Use Corrosion Allowance in Thickness Calcs.		Yes	
Flange Outside Diameter	A	2748.000	mm
Flange Thickness	t	136.0000	mm
Flange Material		SA-266 2	
Flange Material UNS number		K03506	
Flange Allowable Stress At Temperature	Sfo	138.00	N./mm ²
Flange Allowable Stress At Ambient	Sfa	138.00	N./mm ²
Bolt Material		SA-193 B7	
Bolt Allowable Stress At Temperature	Sb	172.00	N./mm ²
Bolt Allowable Stress At Ambient	Sa	172.00	N./mm ²
Perimeter along the Center of the Bolts	L	8366.062	mm
Diameter of Bolt Circle	C	2663.000	mm
Nominal Bolt Diameter	a	38.1000	mm
Type of Threads		TEMA Thread Series	
Number of Bolts		72	
Flange Face Outside Diameter	Fod	2565.000	mm
Flange Face Inside Diameter	Fid	2478.000	mm
Flange Facing Sketch		Sketch 1a	
Gasket Outside Diameter	Go	2554.000	mm
Gasket Inside Diameter	Gi	2510.000	mm
Gasket Factor	m	3.0000	
Gasket Design Seating Stress	y	68.95	N./mm ²
Gasket Thickness	tg	3.1750	mm
Raised face depth	Fd	0.0000	mm
Length of Partition Gasket	lp	5118.0000	mm
Width of Partition Gasket	tp	10.0000	mm
Partition Gasket Factor	mPart	0.0000	
Partition Gasket Design Seating Stress	yPart	0.00	N./mm ²

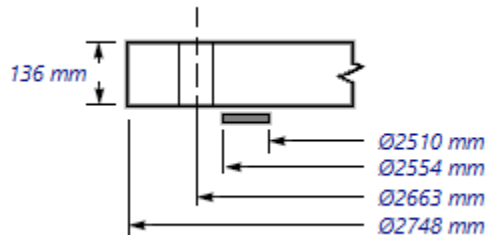

ASME Code, Section VIII Division 1, 2025

Gasket Contact Width,	$N = (Go - Gi)/2$	22.000 mm
Basic Gasket Width,	$bo = N/2$	11.000 mm



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 24 of 275

Flg Calc [Int P]: LHS Blind Fl Flng: 31 6:05pm Sep 8,2026

Effective Gasket Width, $b = Cb \cdot \sqrt{bo}$ 8.358 mm
 Gasket Reaction Diameter, $G = Go - 2 \cdot b$ 2537.285 mm

Basic Flange and Bolt Loads:

Hydrostatic End Load due to Pressure [H or Wo,1]:

$$= \pi/4 \cdot G^2 \cdot P$$

$$= \pi/4 \cdot 2537^2 \cdot 1028$$

$$= 530018.375 \text{ Kgf}$$

Contact Load on Gasket Surfaces [Hp or Wo,2]:

$$= 2 \cdot b \cdot \pi \cdot G \cdot m \cdot P + 2 \cdot lp \cdot bPart \cdot mPart \cdot P$$

$$= 2 \cdot 8.36 \cdot \pi \cdot 2537 \cdot 3 \cdot 1028$$

$$= 41900.309 \text{ Kgf}$$

Design Bolt Load for the Operating Condition [Wo]:

$$= \max(Wo,1 + Wo,2 + H'p, 0)$$

$$= \max(530018 + 41900 + 0, 0)$$

$$= 571918.688 \text{ Kgf}$$

Design Bolt Load for the Gasket Seating Condition [Wg]:

$$= y \cdot b \cdot \pi \cdot G + yPart \cdot bPart \cdot lp$$

$$= 68.9 \cdot 8.36 \cdot \pi \cdot 2537 + 0 \cdot 0 \cdot 5118$$

$$= 468391.500 \text{ Kgf}$$

Required Bolt Area [Am]:

$$= \max((Wo + Fa + 4Me/G) / Sb, Wg / Sa)$$

$$= \max((571919 + 0 + 4 \cdot 0 / 2537) / 172, 468392 / 172)$$

$$= 326.094 \text{ cm}^2$$

Bolting Information for TEMA Imperial Thread Series (Non Mandatory):

	Minimum	Actual	Maximum
Bolt Area:	326.094	652.644	
Radial Distance between Bolts and Edge:	38.100	42.500	
Circ. Spacing between the Bolts:	82.550	116.158	...

Min. Gasket Contact Width (Brownell Young) [Not an ASME Calc] [Nmin]:

$$= Ab \cdot Sa / (y \cdot \pi (Go + Gi))$$

$$= 653 \cdot 172 / (68.9 \cdot \pi (2554 + 2510))$$

$$= 10.233 \text{ mm}$$

Flange Design Bolt Load, Gasket Seating [W or Wgs]:

$$= Sa \cdot Ab$$

$$= 172 \cdot 653$$

$$= 1144638.00 \text{ Kgf}$$

Gasket Load for the Operating Condition [HG]:

$$= Wo$$

$$= 571918.69 \text{ Kgf}$$

Moment Arm Calculations:

Distance to Gasket Load Reaction [hg]:

$$= (C - G) / 2$$

$$= (2663 - 2537) / 2$$

$$= 62.8575 \text{ mm}$$

Flange Stresses

Tangential Flange Stress, Flat Head (4.6.2.3), Operating [STo]:

$$= 1.9 \cdot Wm1 \cdot hG \cdot Bsc / (t^2 \cdot G) + C \cdot Z \cdot Peq \cdot G^2 / t^2$$

$$= 1.9 \cdot 571919 \cdot 62.9 \cdot 1 / (133^2 \cdot 2537) + 0.3 \cdot 1 \cdot 1028 \cdot 2537^2 / 133^2$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 25 of 275

Flg Calc [Int P]: LHS Blind Fl

Flng: 31

6:05pm

Sep 8, 2026

$$= 127.16 \text{ N./mm}^2$$

Tangential Flange Stress, Flat Head (4.6.2.4), Seating [STa]:

$$= 1.9 \cdot W \cdot hG \cdot Bsc / (t^2 \cdot G)$$

$$= 1.9 \cdot 1144638 \cdot 62.9 \cdot 1 / (133^2 \cdot 2537)$$

$$= 29.87 \text{ N./mm}^2$$

Bolt Stress, Operating [BSO]:

$$= Wm1 / Ab$$

$$= 571919 / 653$$

$$= 85.94 \text{ N./mm}^2$$

Bolt Stress, Seating [BSa]:

$$= (Wm2 / Ab)$$

$$= (468392 / 653)$$

$$= 70.38 \text{ N./mm}^2$$

Flange Stress Analysis Results: N./mm²

	Actual	Operating Allowed	Gasket Actual	Seating Allowed
Tangential Flange	127.16	138.00	29.87	138.00
Bolting	85.94	172.00	70.38	172.00

Reqd. Blind Flange Thickness at Center 130.673 mm

Reqd. Blind Flange Thickness at Gasket 64.878 mm

Estimated M.A.W.P. (Operating) 1115 KPa.

Estimated Finished Weight of Flange at given Thk. 6251.6 kg.

Estimated Unfinished Weight of Forging at given Thk 6251.6 kg.

Minimum Design Metal Temperature Results:

Thickness Ratio = 0.91, Temperature Reduction per Fig. UCS 66.1 = 5 °C

Min Metal Temp. w/o impact per UCS-66, Curve B 7 °C

Min Metal Temp. at Required thickness (UCS 66.1) 2 °C

Note: UCS-66(b)(-c) was considered in the flange MDMT calculation.

Per ASME VIII-2, 4.16.2.3, Perform Calculations in the New Condition:

Flange Stress Analysis Results: N./mm²

	Actual	Operating Allowed	Gasket Actual	Seating Allowed
Tangential Flange	121.62	138.00	28.57	138.00
Bolting	85.94	172.00	70.38	172.00

Minimum Req'd Thickness, ambient, no Corrosion: 127.686 mm

PV Elite is a trademark of Hexagon AB, 2026, All rights reserved.



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_Top

Page 26 of 275

Flg Calc [Int P]: LHS CH flang

Flng: 32

6:05pm

Sep 8,2026

Flange Input Data Values

Description: LHS CH flang :

LHS CH flange-1

Flange Type	Integral Weld Neck		
Design Pressure	P	1024.90	KPa.
Design Temperature		82	°C
Internal Corrosion Allowance	ci	3.0000	mm
External Corrosion Allowance	ce	0.0000	mm
Use Corrosion Allowance in Thickness Calcs.		Yes	
Flange Inside Diameter	B	2480.000	mm
Flange Outside Diameter	A	2748.000	mm
Flange Thickness	t	212.0000	mm
Thickness of Hub at Small End	go	20.0000	mm
Thickness of Hub at Large End	gl	35.0000	mm
Length of Hub	h	75.0000	mm
Flange Material		SA-266 2	
Flange Material UNS number		K03506	
Flange Allowable Stress At Temperature	Sfo	138.00	N./mm ²
Flange Allowable Stress At Ambient	Sfa	138.00	N./mm ²
Bolt Material		SA-193 B7	
Bolt Allowable Stress At Temperature	Sb	172.00	N./mm ²
Bolt Allowable Stress At Ambient	Sa	172.00	N./mm ²
Diameter of Bolt Circle	C	2663.000	mm
Nominal Bolt Diameter	a	38.1000	mm
Type of Threads	TEMA Thread Series		
Number of Bolts		72	
Flange Face Outside Diameter	Fod	2565.000	mm
Flange Face Inside Diameter	Fid	2480.000	mm
Flange Facing Sketch		Sketch 1a	
Gasket Outside Diameter	Go	2554.000	mm
Gasket Inside Diameter	Gi	2510.000	mm
Gasket Factor	m	3.0000	
Gasket Design Seating Stress	y	68.95	N./mm ²
Gasket Thickness	tg	3.1750	mm
Raised face depth	Fd	0.0000	mm
Length of Partition Gasket	lp	5118.0000	mm
Width of Partition Gasket	tp	10.0000	mm
Partition Gasket Factor	mPart	0.0000	
Partition Gasket Design Seating Stress	yPart	0.00	N./mm ²



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)


Page 27 of 275

Flg Calc [Int P]: LHS CH flang

Flng: 32

6:05pm

Sep 8, 2026

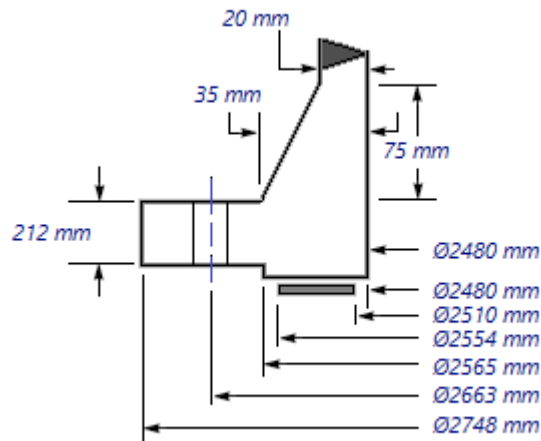

ASME Code, Section VIII Division 1, 2025

Hub Small End Required Thickness due to Internal Pressure:

$$= (P \cdot (D/2 + Ca)) / (S \cdot E - 0.6 \cdot P) \text{ per UG-27 (c)(1)}$$

$$= (1025 \cdot (2480/2 + 3)) / (138 \cdot 1 - 0.6 \cdot 1025) + Ca$$

$$= 12.2735 \text{ mm}$$

Small End Hub MAWP:

$$= (S \cdot E \cdot t) / (R + 0.6 \cdot t) \text{ per UG-27 (c)(1)}$$

$$= (138 \cdot 1 \cdot 17) / (1243 + 0.6 \cdot 17)$$

$$= 1871.865 \text{ KPa.}$$

Hub Small End Hub MAPnc:

$$= (Sa \cdot E \cdot t) / (R + 0.6 \cdot t) \text{ per UG-27 (c)(1)}$$

$$= (138 \cdot 1 \cdot 20) / (1240 + 0.6 \cdot 20)$$

$$= 2204.305 \text{ KPa.}$$

Corroded Flange Thickness, $t_c = T - c_i$	209.000 mm
Corroded Flange ID, $B_{cor} = B + 2 \cdot c_i$	2486.000 mm
Corroded Large Hub, $g1_{cor} = g1 - c_i$	32.000 mm
Corroded Small Hub, $g0_{cor} = g0 - c_i$	17.000 mm
Code R Dimension, $R = ((C - B_{cor})/2) - g1_{cor}$	56.500 mm

Gasket Contact Width, $N = (G_o - G_i)/2$	22.000 mm
Basic Gasket Width, $bo = N/2$	11.000 mm
Effective Gasket Width, $b = C_b \cdot \sqrt{bo}$	8.358 mm
Gasket Reaction Diameter, $G = G_o - 2 \cdot b$	2537.285 mm

Basic Flange and Bolt Loads:

Hydrostatic End Load due to Pressure [H or Wo,1]:

$$= \pi/4 \cdot G^2 \cdot P$$

$$= \pi/4 \cdot 2537^2 \cdot 1025$$

$$= 528451.625 \text{ Kg}$$

Contact Load on Gasket Surfaces [Hp or Wo,2]:

$$= 2 \cdot b \cdot \pi \cdot G \cdot m \cdot P + 2 \cdot l_p \cdot b_{Part} \cdot m_{Part} \cdot P$$

$$= 2 \cdot 8.36 \cdot \pi \cdot 2537 \cdot 3 \cdot 1025$$

$$= 41776.449 \text{ Kg}$$

Hydrostatic End Load at Flange ID [Hd]:

$$= \pi/4 \cdot B_{cor}^2 \cdot P$$

$$= \pi/4 \cdot 2486^2 \cdot 1025$$

$$= 507304.750 \text{ Kg}$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 28 of 275

Flg Calc [Int P]: LHS CH flang

Flng: 32

6:05pm

Sep 8, 2026

Pressure Force on Flange Face [Ht]:

$$= H - H_d$$

$$= 528452 - 507305$$

$$= 21146.889 \text{ Kgf}$$

Design Bolt Load for the Operating Condition [Wo]:

$$= \max(W_{o,1} + W_{o,2} + H'p, 0)$$

$$= \max(528452 + 41776 + 0, 0)$$

$$= 570228.062 \text{ Kgf}$$

Design Bolt Load for the Gasket Seating Condition [Wg]:

$$= y \cdot b \cdot \pi \cdot G + y_{Part} \cdot b_{Part} \cdot l_p$$

$$= 69 \cdot 8.36 \cdot \pi \cdot 2537 + 0 \cdot 0 \cdot 5118$$

$$= 468391.531 \text{ Kgf}$$

Required Bolt Area [Am]:

$$= \max((W_o + F_a + 4Me/G) / S_b, W_g / S_a)$$

$$= \max((570228 + 0 + 4 \cdot 0 / 2537) / 172, 468392 / 172)$$

$$= 325.130 \text{ cm}^2$$

ASME Maximum Circumferential Spacing between Bolts, Table 4.16.11 [Bsmax]:

$$= 2a + 6t / (m + 0.5)$$

$$= 2 \cdot 38.1 + 6 \cdot 209 / (3 + 0.5)$$

$$= 434.486 \text{ mm}$$

Actual Circumferential Bolt Spacing [Bs]:

$$= C \cdot \sin(\pi / n)$$

$$= 2663 \cdot \sin(\pi / 72)$$

$$= 116.158 \text{ mm}$$

ASME Moment Multiplier for Bolt Spacing per Table 4.16.11 [Bsc]:

$$= \max(\sqrt{ Bs / (2a + t) }, 1)$$

$$= \max(\sqrt{ 116 / (2 \cdot 38.1 + 209) }, 1)$$

$$= 1.0000$$

Bolting Information for TEMA Imperial Thread Series (Non Mandatory):

	Minimum	Actual	Maximum
Bolt Area:	325.130	652.644	
Radial Distance between Hub and Bolts:	50.800	56.500	
Radial Distance between Bolts and Edge:	38.100	42.500	
Circ. Spacing between the Bolts:	82.550	116.158	434.486

Min. Gasket Contact Width (Brownell Young) [Not an ASME Calc] [Nmin]:

$$= A_b \cdot S_a / (y \cdot \pi (G_o + G_i))$$

$$= 653 \cdot 172 / (69 \cdot \pi (2554 + 2510))$$

$$= 10.233 \text{ mm}$$

Recommended Minimum Gasket Contact Width per Table 4.16.2

Sheet Gaskets including laminated sheet gaskets with or without a metal core: 19 mm
 Preformed comp. gaskets incl. spiral wound, jacketed, & solid flat metal gaskets: 16 mm

Flange Design Bolt Load, Gasket Seating [W or Wgs]:

$$= S_a \cdot A_b$$

$$= 172 \cdot 653$$

$$= 1144638.00 \text{ Kgf}$$

Gasket Load for the Operating Condition [HG]:

$$= W_o - H$$

$$= 570228 - 528452$$

$$= 41776.45 \text{ Kgf}$$

Moment Arm Calculations:



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 29 of 275

Flg Calc [Int P]: LHS CH flang

Flng: 32

6:05pm

Sep 8, 2026

Distance to Gasket Load Reaction [hg]:

$$= (C - G) / 2$$

$$= (2663 - 2537) / 2$$

$$= 62.8575 \text{ mm}$$

Distance to Face Pressure Reaction [ht]:

$$= 0.5 ((C - B) / 2 + hg)$$

$$= 0.5 ((2663 - 2486) / 2 + 62.9)$$

$$= 75.6788 \text{ mm}$$

Distance to End Pressure Reaction [hd]:

$$= (C - B - g1) / 2$$

$$= (2663 - 2486 - 32) / 2$$

$$= 72.5000 \text{ mm}$$

Summary of Moments for Internal Pressure: (Kg-m.)

Loading	Force	Distance	Bolt Corr	Moment
End Pressure, Md	507305.	72.5000	1.0000	36780.
Face Pressure, Mt	21147.	75.6788	1.0000	1600.
Gasket Load, Mg	41776.	62.8575	1.0000	2626.
Gasket Seating, Matm	1144638.	62.8575	1.0000	71951.

Total Moment for Operation, Mo 41007. Kg-m.

Total Moment for Gasket seating, Mg 71951. Kg-m.

Effective Hub Length, ho = sqrt(Bcor*goCor) 205.577 mm

Hub Ratio, h/h0 = HL / H0 0.365

Thickness Ratio, g1/g0 = (g1Cor/goCor) 1.882

Flange Factors for Integral Flange:

Factor F per 4.16.5 0.857

Factor V per 4.16.5 0.288

Factor f per 4.16.5 1.564

Stress factor from Table 4.16.4 [K]:

$$= A / B$$

$$= 2748 / 2486$$

$$= 1.105$$

Stress factor from Table 4.16.4 [Y]:

$$= (0.66845 + (5.7169 (K^2 \cdot \log_{10}(K))) / (K^2 - 1)) / (K - 1)$$

$$= (0.66845 + (5.7169 (1.11^2 \cdot \log_{10}(1.11))) / (1.11^2 - 1)) / (1.11 - 1)$$

$$= 19.341$$

Stress factor from Table 4.16.4 [T]:

$$= (K^2 (1 + 8.55246 \cdot \log_{10}(K)) - 1) / ((1.0472 + 1.9448 \cdot K^2) \cdot (K - 1))$$

$$= (1.11^2 (1 + 8.55246 \cdot \log_{10}(1.11)) - 1) / ((1.0472 + 1.9448 \cdot 1.11^2) \cdot (1.11 - 1))$$

$$= 1.875$$

Stress factor from Table 4.16.4 [U]:

$$= (K^2 (1 + 8.55246 \cdot \log_{10}(K)) - 1) / (1.36136 (K^2 - 1) \cdot (K - 1))$$

$$= (1.11^2 (1 + 8.55246 \cdot \log_{10}(1.11)) - 1) / (1.36136 (1.11^2 - 1) \cdot (1.11 - 1))$$

$$= 21.254$$

Stress factor from Table 4.16.4 [Z]:

$$= (K^2 + 1) / (K^2 - 1)$$

$$= (1.11^2 + 1) / (1.11^2 - 1)$$

$$= 10.014$$

Stress factor from Table 4.16.4 for integral flanges [d]:

$$= U \cdot g0^2 \cdot h0 / V$$

$$= 21.3 \cdot 17^2 \cdot 206 / 0.29$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 30 of 275

Flg Calc [Int P]: LHS CH flang

Flng: 32

6:05pm

Sep 8, 2026

$$= 4390807.500 \text{ mm}^3$$

Stress factor from Table 4.16.4 for integral flanges [e]:

$$= F / h_0$$

$$= 0.86/206$$

$$= 0.004 \text{ 1/mm}$$

Stress factor from Table 4.16.4 [L]:

$$= (t \cdot e + 1) / T + t^3/d$$

$$= (209 \cdot 0.0042 + 1) / 1.88 + 209^3/4390807$$

$$= 3.077$$

Flange Stresses

Longitudinal Hub Stress, Operating [SHo]:

$$= (f \cdot Mop / Bcor) / (L \cdot g^{1^2})$$

$$= (1.56 \cdot 41007/2486) / (3.08 \cdot 32^2)$$

$$= 80.31 \text{ N./mm}^2$$

Longitudinal Hub Stress, Seating [SHa]:

$$= (f \cdot Matm / Bcor) / (L \cdot g^{1^2})$$

$$= (1.56 \cdot 71951/2486) / (3.08 \cdot 32^2)$$

$$= 140.91 \text{ N./mm}^2$$

Radial Flange Stress, Operating [SRo]:

$$= (\beta \cdot Mop / Bcor) / (L \cdot t^2)$$

$$= (2.16 \cdot 41007/2486) / (3.08 \cdot 209^2)$$

$$= 2.60 \text{ N./mm}^2$$

Radial Flange Stress, Seating [SRa]:

$$= (\beta \cdot Matm / Bcor) / (L \cdot t^2)$$

$$= (2.16 \cdot 71951/2486) / (3.08 \cdot 209^2)$$

$$= 4.56 \text{ N./mm}^2$$

Tangential Flange Stress, Operating [STo]:

$$= (Y \cdot Mo / (t^2 \cdot Bcor)) - Z \cdot SRo$$

$$= (19.3 \cdot 41007 / (209^2 \cdot 2486)) - 10 \cdot 2.6$$

$$= 45.58 \text{ N./mm}^2$$

Tangential Flange Stress, Seating [STa]:

$$= (y \cdot Matm / (t^2 \cdot Bcor)) - Z \cdot SRa$$

$$= (19.3 \cdot 71951 / (209^2 \cdot 2486)) - 10 \cdot 4.56$$

$$= 79.97 \text{ N./mm}^2$$

Average Flange Stress, Operating [SAo]:

$$= (SHo + \max(SRo, STo)) / 2$$

$$= (80.3 + \max(2.6, 45.6)) / 2$$

$$= 62.94 \text{ N./mm}^2$$

Average Flange Stress, Seating [SAa]:

$$= (SHa + \max(SRa, STa)) / 2$$

$$= (141 + \max(4.56, 80)) / 2$$

$$= 110.44 \text{ N./mm}^2$$

Bolt Stress, Operating [BSo]:

$$= Wm1 / Ab$$

$$= 570228/653$$

$$= 85.68 \text{ N./mm}^2$$

Bolt Stress, Seating [BSa]:

$$= (Wm2 / Ab)$$

$$= (468392/653)$$

$$= 70.38 \text{ N./mm}^2$$

Flange Stress Analysis Results: N./mm²



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 31 of 275

Flg Calc [Int P]: LHS CH flang

Flng: 32

6:05pm

Sep 8,2026

	Actual	Operating Allowed	Gasket Actual	Seating Allowed
Longitudinal Hub	80.31	207.00	140.91	207.00
Radial Flange	2.60	138.00	4.56	138.00
Tangential Flange	45.58	138.00	79.97	138.00
Maximum Average	62.94	138.00	110.44	138.00
Bolting	85.68	172.00	70.38	172.00

Minimum Required Flange Thickness [Rigidity] 207.950 mm

Estimated M.A.W.P. (Operating) 1844 KPa.

Estimated Finished Weight of Flange at given Thk. 1934.0 kg.

Estimated Unfinished Weight of Forging at given Thk 2447.8 kg.

Flange Stress results per WRC-538 at computed S_{fmax} (N./mm²):

		Actual	Operating Allowed	stress ratio	Gasket Actual	Seating Allowed	stress ratio
Longitudinal Hub	Sh	499.99	499.99	1.000	499.99	499.99	1.000
Tangential Flange	St	283.10	374.99	0.755	283.10	374.99	0.755
Tangential Flange	Sto	160.58	250.00	0.642	160.58	250.00	0.642
Combined	Sh/f + St	602.00	749.99	0.803	602.00	749.99	0.803
Combined	Sr + St	299.26	749.99	0.399	299.26	749.99	0.399
Combined	Sh + Sto	660.57	749.99	0.881	660.57	749.99	0.881
Radial Flange	Sr	16.16	499.99	0.032	16.16	499.99	0.032
Maximum Stress Ratio				1.000			1.000



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 32 of 275

Flg Calc [Int P]: LHS CH flang

Flng: 32 6:05pm

Sep 8, 2026

Coefficients for f and $f2$

	f	$f2$	$f3$
a	-0.71375912	-0.01447638	-0.06456312
b	-0.12846279	-0.27814745	-0.08232239
c	1.08037907	0.01035395	0.13691677
d	0.99766848	1.37984158	-0.77879888
e	1.21823466	-0.34346764	0.14909019
f	0.01024612	0.02536192	0.00660062
g	0.4262313	-0.0014508	0.0616252
h	1.4204976	2.25543162	0.74639834
i	-0.70278181	-0.60889597	-0.079595
j	-0.02483937	-0.15735462	0.09851673
k	-1.59460436	1.22516062	-0.1121436

$$f_n = \frac{\left[a + c \left(\frac{g1}{g0} \right) + e \left(\frac{h}{h0} \right) + g \left(\frac{g1}{g0} \right)^2 + i \left(\frac{h}{h0} \right)^2 + k \left(\frac{g1}{g0} \right) \left(\frac{h}{h0} \right) \right]}{\left[1 + b \left(\frac{g1}{g0} \right) + d \left(\frac{h}{h0} \right) + f \left(\frac{g1}{g0} \right)^2 + h \left(\frac{h}{h0} \right)^2 + j \left(\frac{g1}{g0} \right) \left(\frac{h}{h0} \right) \right]}$$

Hub Stress Correction Factor [f]:

= max(1; F1num / F1den)

= max(1; 2.09/1.33)

= 1.5678

Hub Stress Correction Factor [f2]:

= max(0.25; fn2) if $h/h0 < 0.35$, else max (0.25; fn3)

= max(0.25; 0.63/1.26) if $h/h0 < 0.35$, else max (0.25; 0.38/0.75)

= 0.5035

In this case, the hub ratio $h/h0$, 0.3648 was ≥ 0.35 .

PV Elite iterates on the assembly bolt load stress, Sf_{max} , until it exceeds the limits provided by WRC 538.

Bolting and Gasket Calculations per ASME PCC-1 Appendix O:

Input Data:

Maximum permissible bolt stress	Sbmax	507.5 N./mm ²
Minimum permissible bolt stress	Sbmin	290.0 N./mm ²
Max. permissible bolt stress prior to flange damage	Sfmax	608.9 N./mm ²
Target assembly gasket stress	SgT	207.0 N./mm ²
Maximum permissible gasket stress	Sgmax	276.0 N./mm ²
Minimum gasket operating stress	Sgmin-O	97.0 N./mm ²
Minimum gasket seating stress	Sgmin-S	140.0 N./mm ²
Nut Factor	K	0.200
Fraction of Gasket Load remaining after relaxation	Phig	0.700



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 33 of 275

Flg Calc [Int P]: LHS CH flang Flng: 32 6:05pm Sep 8,2026

Root Area of a Single Bolt	Abs	9.0645 cm ²
Max. permissible single flange rotation for gasket	Thetagmax	1.000 deg

Calculated Results:

Flange Material Ambient Yield Stress	Sya	250.0 N./mm ²
Flange Material Operating Yield Stress	Syo	230.1 N./mm ²
Single flange rotation at Sfmax	Thetaamax	0.679 deg

Gasket Contact Area [Ag]:

$$= \pi/4 (GO.D.^2 - GI.D.^2) + (PartFactor \cdot Ip \cdot bPart)$$

$$= \pi/4 (2554^2 - 2510^2) + (0.5 \cdot 5118 \cdot 0)$$

$$= 1750.0 \text{ cm}^2$$

Target Bolt Stress [Sbsel]: (Eq. O-1)

$$= SgT \cdot Ag / (nb \cdot Ab)$$

$$= 207 \cdot 1750 / (72 \cdot 9.06)$$

$$= 555.1 \text{ N./mm}^2$$

Upper Bolt Stress Limit [Sbsel]: (Eq. O-4)

$$= \min(Sbsel; Sbmax)$$

$$= \min(555; 508)$$

$$= 507.5 \text{ N./mm}^2$$

Lower Bolt Stress Limit [Sbsel]: (Eq. O-5)

$$= \max(Sbsel; Sbmin)$$

$$= \max(508; 290)$$

$$= 507.5 \text{ N./mm}^2$$

Upper Bolt Stress Limit including the Flange [Sbsel]: (Eq. O-6)

$$= \min(Sbsel; Sfmax)$$

$$= \min(508; 609)$$

$$= 507.5 \text{ N./mm}^2$$

Check if Gasket Assembly Seating Stress is achieved. (Eq. O-7)

$$:: Sbsel \geq Sgmin-S (Ag / (nb \cdot Abs))$$

$$:: 508 \geq 140 (1750 / (72 \cdot 9.06))$$

$$:: 507.5 \geq 375.4 \text{ N./mm}^2 \text{ Check Passes}$$

Check if Gasket Operating Stress is maintained. (Eq. O-8)

$$:: Sbsel \geq (Sgmin-O \cdot Ag + \pi/4 \cdot Pmax \cdot GI.D.^2) / (\phi G \cdot Abs \cdot nb)$$

$$:: 508 \geq (97 \cdot 1750 + \pi/4 \cdot 1025 \cdot 2510^2) / (0.7 \cdot 9.06 \cdot 72)$$

$$:: 507.5 \geq 482.6 \text{ N./mm}^2 \text{ Check Passes}$$

Check if Gasket Maximum Stress is achieved. (Eq. O-9)

$$:: Sbsel \leq Sgmax (Ag / (nb \cdot Abs))$$

$$:: 508 \leq 276 (1750 / (72 \cdot 9.06))$$

$$:: 507.5 \leq 740.1 \text{ N./mm}^2 \text{ Check Passes}$$

Check if Flange Rotation Limit is exceeded. (Eq. O-10)

$$:: Sbsel \leq Sfmax (thetagmax / thetaamax)$$

$$:: 508 \leq 609 (1/0.68)$$

$$:: 507.5 \leq 897.2 \text{ N./mm}^2 \text{ Check Passes}$$

Assembly Bolt Torque [Tb]: (Eq. O-2)

$$= Sbsel \cdot K \cdot Abs \cdot \phi b$$

$$= 508 \cdot 0.2 \cdot 9.06 \cdot 38.1$$

$$= 357.4 \text{ Kg-m.}$$

Bolt Allowable Stress for: SA-193 B8 Cl. 2 SbB8 118 N./mm²

Bolt Allowable Stress for: SA-193 B7 Sb 171 N./mm²

Note: Since Sb >= SbB8, bolt allowable stress comparison check Passes (see Div 1 UG-44(b)).

Flange rigidity based on required thickness [ASME]:



Flange Rigidity Criterion, Seating per Table 4.16.10 [Jg]:
 $= 52.14 \cdot Ma / Bsc \cdot Cnvfac \cdot V / (\lambda \cdot Eamb \cdot go^2 \cdot ho \cdot Ki)$
 $= 52.14 \cdot 71951 / 1 \cdot 9807 \cdot 0.29 / (2.95 \cdot 201334 \cdot 17^2 \cdot 206 \cdot 0.3)$
 $= 0.999$ (should be ≤ 1)

Flange Rigidity Criterion, Operating per Table 4.16.10 [Jo]:
 $= 52.14 \cdot Mo / Bsc \cdot Cnvfac \cdot V / (\lambda \cdot Eop \cdot goc^2 \cdot ho \cdot Ki)$
 $= 52.14 \cdot 41007 / 1 \cdot 9807 \cdot 0.29 / (2.95 \cdot 197847 \cdot 17^2 \cdot 206 \cdot 0.3)$
 $= 0.579$ (should be ≤ 1)

Flange rigidity based on given thickness [ASME]:

Flange Rigidity Criterion, Seating per Table 4.16.10 [Jg]:
 $= 52.14 \cdot Ma / Bsc \cdot Cnvfac \cdot V / (\lambda \cdot Eamb \cdot go^2 \cdot ho \cdot Ki)$
 $= 52.14 \cdot 71951 / 1 \cdot 9807 \cdot 0.29 / (3.08 \cdot 201334 \cdot 17^2 \cdot 206 \cdot 0.3)$
 $= 0.958$ (should be ≤ 1)

Flange Rigidity Criterion, Operating per Table 4.16.10 [Jo]:
 $= 52.14 \cdot Mo / Bsc \cdot Cnvfac \cdot V / (\lambda \cdot Eop \cdot goc^2 \cdot ho \cdot Ki)$
 $= 52.14 \cdot 41007 / 1 \cdot 9807 \cdot 0.29 / (3.08 \cdot 197847 \cdot 17^2 \cdot 206 \cdot 0.3)$
 $= 0.555$ (should be ≤ 1)

Minimum Design Metal Temperature Results:

Thickness Ratio = 0.51, Temperature Reduction per Fig. UCS 66.1 = 31 °C

Min Metal Temp. w/o impact per UCS-66, Curve B	-7 °C
Min Metal Temp. at Required thickness (UCS 66.1)	-38 °C
Min Metal Temp. w/o impact per UG-20(f)	-29 °C

Note: UCS-66(b)(-c) was considered in the flange MDMT calculation.

Per ASME VIII-2, 4.16.2.3, Perform Calculations in the New Condition:

Flange Stress Analysis Results: N./mm²

	Operating		Gasket Seating	
	Actual	Allowed	Actual	Allowed
Longitudinal Hub	75.37	207.00	129.71	207.00
Radial Flange	2.97	138.00	5.11	138.00
Tangential Flange	40.43	138.00	69.59	138.00
Maximum Average	57.90	138.00	99.65	138.00
Bolting	85.68	172.00	70.38	172.00

Minimum Req'd Thickness, ambient, no Corrosion: 192.862 mm

PV Elite is a trademark of Hexagon AB, 2026, All rights reserved.



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 35 of 275

Flg Calc [Int P]: LHS Ch FI-2

Flng: 33

6:05pm

Sep 8,2026

Flange Input Data Values

Description: LHS Ch FI-2 :

LHS Ch Flg-2

Flange Type	Integral Weld Neck		
Design Pressure	P	1024.90	KPa.
Design Temperature		82	°C
Internal Corrosion Allowance	ci	3.0000	mm
External Corrosion Allowance	ce	0.0000	mm
Use Corrosion Allowance in Thickness Calcs.		Yes	
Flange Inside Diameter	B	2480.000	mm
Flange Outside Diameter	A	2748.000	mm
Flange Thickness	t	212.0000	mm
Thickness of Hub at Small End	go	20.0000	mm
Thickness of Hub at Large End	gl	35.0000	mm
Length of Hub	h	75.0000	mm
Flange Material		SA-266 2	
Flange Material UNS number		K03506	
Flange Allowable Stress At Temperature	Sfo	138.00	N./mm ²
Flange Allowable Stress At Ambient	Sfa	138.00	N./mm ²
Bolt Material		SA-193 B7	
Bolt Allowable Stress At Temperature	Sb	172.00	N./mm ²
Bolt Allowable Stress At Ambient	Sa	172.00	N./mm ²
Diameter of Bolt Circle	C	2663.000	mm
Nominal Bolt Diameter	a	38.1000	mm
Type of Threads	TEMA Thread Series		
Number of Bolts		72	
Flange Face Outside Diameter	Fod	2565.000	mm
Flange Face Inside Diameter	Fid	2480.000	mm
Flange Facing Sketch		Sketch 1a	
Gasket Outside Diameter	Go	2554.000	mm
Gasket Inside Diameter	Gi	2510.000	mm
Gasket Factor	m	3.0000	
Gasket Design Seating Stress	y	68.95	N./mm ²
Gasket Thickness	tg	3.1750	mm
Raised face depth	Fd	0.0000	mm
Length of Partition Gasket	lp	5118.0000	mm
Width of Partition Gasket	tp	10.0000	mm
Partition Gasket Factor	mPart	0.0000	
Partition Gasket Design Seating Stress	yPart	0.00	N./mm ²



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)


Page 36 of 275

Flg Calc [Int P]: LHS Ch Fl-2

Flng: 33

6:05pm

Sep 8, 2026

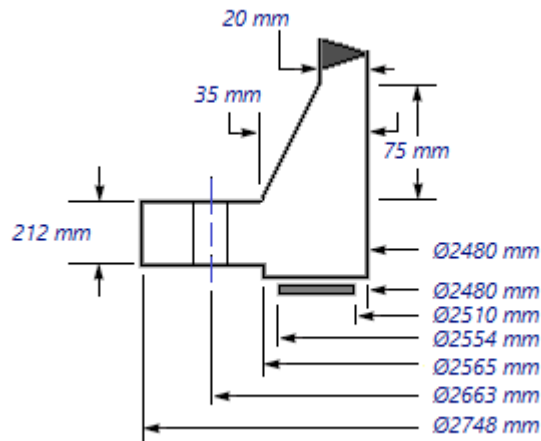

ASME Code, Section VIII Division 1, 2025

Hub Small End Required Thickness due to Internal Pressure:

$$= (P \cdot (D/2 + Ca)) / (S \cdot E - 0.6 \cdot P) \text{ per UG-27 (c)(1)}$$

$$= (1025 \cdot (2480/2 + 3)) / (138 \cdot 1 - 0.6 \cdot 1025) + Ca$$

$$= 12.2735 \text{ mm}$$

Small End Hub MAWP:

$$= (S \cdot E \cdot t) / (R + 0.6 \cdot t) \text{ per UG-27 (c)(1)}$$

$$= (138 \cdot 1 \cdot 17) / (1243 + 0.6 \cdot 17)$$

$$= 1871.865 \text{ KPa.}$$

Hub Small End Hub MAPnc:

$$= (Sa \cdot E \cdot t) / (R + 0.6 \cdot t) \text{ per UG-27 (c)(1)}$$

$$= (138 \cdot 1 \cdot 20) / (1240 + 0.6 \cdot 20)$$

$$= 2204.305 \text{ KPa.}$$

Corroded Flange Thickness, $t_c = T - c_i$	209.000 mm
Corroded Flange ID, $B_{cor} = B + 2 \cdot c_i$	2486.000 mm
Corroded Large Hub, $g1_{cor} = g1 - c_i$	32.000 mm
Corroded Small Hub, $g0_{cor} = g0 - c_i$	17.000 mm
Code R Dimension, $R = ((C - B_{cor})/2) - g1_{cor}$	56.500 mm

Gasket Contact Width, $N = (G_o - G_i)/2$	22.000 mm
Basic Gasket Width, $bo = N/2$	11.000 mm
Effective Gasket Width, $b = C_b \cdot \sqrt{bo}$	8.358 mm
Gasket Reaction Diameter, $G = G_o - 2 \cdot b$	2537.285 mm

Basic Flange and Bolt Loads:

Hydrostatic End Load due to Pressure [H or Wo,1]:

$$= \pi/4 \cdot G^2 \cdot P$$

$$= \pi/4 \cdot 2537^2 \cdot 1025$$

$$= 528451.625 \text{ Kg}$$

Contact Load on Gasket Surfaces [Hp or Wo,2]:

$$= 2 \cdot b \cdot \pi \cdot G \cdot m \cdot P + 2 \cdot l_p \cdot b_{Part} \cdot m_{Part} \cdot P$$

$$= 2 \cdot 8.36 \cdot \pi \cdot 2537 \cdot 3 \cdot 1025$$

$$= 41776.449 \text{ Kg}$$

Hydrostatic End Load at Flange ID [Hd]:

$$= \pi/4 \cdot B_{cor}^2 \cdot P$$

$$= \pi/4 \cdot 2486^2 \cdot 1025$$

$$= 507304.750 \text{ Kg}$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 37 of 275

Flg Calc [Int P]: LHS Ch Fl-2

Flng: 33

6:05pm

Sep 8, 2026

Pressure Force on Flange Face [Ht]:

$$= H - H_d$$

$$= 528452 - 507305$$

$$= 21146.889 \text{ Kgf}$$

Design Bolt Load for the Operating Condition [Wo]:

$$= \max(W_{o,1} + W_{o,2} + H'p, 0)$$

$$= \max(528452 + 41776 + 0, 0)$$

$$= 570228.062 \text{ Kgf}$$

Design Bolt Load for the Gasket Seating Condition [Wg]:

$$= y \cdot b \cdot \pi \cdot G + y_{Part} \cdot b_{Part} \cdot l_p$$

$$= 69 \cdot 8.36 \cdot \pi \cdot 2537 + 0 \cdot 0 \cdot 5118$$

$$= 468391.531 \text{ Kgf}$$

Required Bolt Area [Am]:

$$= \max((W_o + F_a + 4Me/G) / S_b, W_g / S_a)$$

$$= \max((570228 + 0 + 4 \cdot 0 / 2537) / 172, 468392 / 172)$$

$$= 325.130 \text{ cm}^2$$

ASME Maximum Circumferential Spacing between Bolts, Table 4.16.11 [Bsmax]:

$$= 2a + 6t / (m + 0.5)$$

$$= 2 \cdot 38.1 + 6 \cdot 209 / (3 + 0.5)$$

$$= 434.486 \text{ mm}$$

Actual Circumferential Bolt Spacing [Bs]:

$$= C \cdot \sin(\pi / n)$$

$$= 2663 \cdot \sin(\pi / 72)$$

$$= 116.158 \text{ mm}$$

ASME Moment Multiplier for Bolt Spacing per Table 4.16.11 [Bsc]:

$$= \max(\sqrt{ B_s / (2a + t) }, 1)$$

$$= \max(\sqrt{ 116 / (2 \cdot 38.1 + 209) }, 1)$$

$$= 1.0000$$

Bolting Information for TEMA Imperial Thread Series (Non Mandatory):

	Minimum	Actual	Maximum
Bolt Area:	325.130	652.644	
Radial Distance between Hub and Bolts:	50.800	56.500	
Radial Distance between Bolts and Edge:	38.100	42.500	
Circ. Spacing between the Bolts:	82.550	116.158	434.486

Min. Gasket Contact Width (Brownell Young) [Not an ASME Calc] [Nmin]:

$$= A_b \cdot S_a / (y \cdot \pi (G_o + G_i))$$

$$= 653 \cdot 172 / (69 \cdot \pi (2554 + 2510))$$

$$= 10.233 \text{ mm}$$

Recommended Minimum Gasket Contact Width per Table 4.16.2

Sheet Gaskets including laminated sheet gaskets with or without a metal core: 19 mm

Preformed comp. gaskets incl. spiral wound, jacketed, & solid flat metal gaskets: 16 mm

Flange Design Bolt Load, Gasket Seating [W or Wgs]:

$$= S_a \cdot A_b$$

$$= 172 \cdot 653$$

$$= 1144638.00 \text{ Kgf}$$

Gasket Load for the Operating Condition [HG]:

$$= W_o - H$$

$$= 570228 - 528452$$

$$= 41776.45 \text{ Kgf}$$

Moment Arm Calculations:



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 38 of 275

Flg Calc [Int P]: LHS Ch Fl-2

Flng: 33

6:05pm

Sep 8, 2026

Distance to Gasket Load Reaction [hg]:

$$= (C - G) / 2$$

$$= (2663 - 2537) / 2$$

$$= 62.8575 \text{ mm}$$

Distance to Face Pressure Reaction [ht]:

$$= 0.5 ((C - B) / 2 + hg)$$

$$= 0.5 ((2663 - 2486) / 2 + 62.9)$$

$$= 75.6788 \text{ mm}$$

Distance to End Pressure Reaction [hd]:

$$= (C - B - g1) / 2$$

$$= (2663 - 2486 - 32) / 2$$

$$= 72.5000 \text{ mm}$$

Summary of Moments for Internal Pressure: (Kg-m.)

Loading	Force	Distance	Bolt Corr	Moment
End Pressure, Md	507305.	72.5000	1.0000	36780.
Face Pressure, Mt	21147.	75.6788	1.0000	1600.
Gasket Load, Mg	41776.	62.8575	1.0000	2626.
Gasket Seating, Matm	1144638.	62.8575	1.0000	71951.

Total Moment for Operation, Mo 41007. Kg-m.

Total Moment for Gasket seating, Mg 71951. Kg-m.

Effective Hub Length, ho = sqrt(Bcor*goCor) 205.577 mm

Hub Ratio, h/h0 = HL / H0 0.365

Thickness Ratio, g1/g0 = (g1Cor/goCor) 1.882

Flange Factors for Integral Flange:

Factor F per 4.16.5 0.857

Factor V per 4.16.5 0.288

Factor f per 4.16.5 1.564

Stress factor from Table 4.16.4 [K]:

$$= A / B$$

$$= 2748 / 2486$$

$$= 1.105$$

Stress factor from Table 4.16.4 [Y]:

$$= (0.66845 + (5.7169 (K^2 \cdot \log_{10}(K))) / (K^2 - 1)) / (K - 1)$$

$$= (0.66845 + (5.7169 (1.11^2 \cdot \log_{10}(1.11))) / (1.11^2 - 1)) / (1.11 - 1)$$

$$= 19.341$$

Stress factor from Table 4.16.4 [T]:

$$= (K^2 (1 + 8.55246 \cdot \log_{10}(K)) - 1) / ((1.0472 + 1.9448 \cdot K^2) \cdot (K - 1))$$

$$= (1.11^2 (1 + 8.55246 \cdot \log_{10}(1.11)) - 1) / ((1.0472 + 1.9448 \cdot 1.11^2) \cdot (1.11 - 1))$$

$$= 1.875$$

Stress factor from Table 4.16.4 [U]:

$$= (K^2 (1 + 8.55246 \cdot \log_{10}(K)) - 1) / (1.36136 (K^2 - 1) \cdot (K - 1))$$

$$= (1.11^2 (1 + 8.55246 \cdot \log_{10}(1.11)) - 1) / (1.36136 (1.11^2 - 1) \cdot (1.11 - 1))$$

$$= 21.254$$

Stress factor from Table 4.16.4 [Z]:

$$= (K^2 + 1) / (K^2 - 1)$$

$$= (1.11^2 + 1) / (1.11^2 - 1)$$

$$= 10.014$$

Stress factor from Table 4.16.4 for integral flanges [d]:

$$= U \cdot g0^2 \cdot h0 / V$$

$$= 21.3 \cdot 17^2 \cdot 206 / 0.29$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 39 of 275

Flg Calc [Int P]: LHS Ch Fl-2

Flng: 33

6:05pm

Sep 8, 2026

$$= 4390807.500 \text{ mm}^3$$

Stress factor from Table 4.16.4 for integral flanges [e]:

$$= F / h_0$$

$$= 0.86/206$$

$$= 0.004 \text{ 1/mm}$$

Stress factor from Table 4.16.4 [L]:

$$= (t \cdot e + 1) / T + t^3/d$$

$$= (209 \cdot 0.0042 + 1) / 1.88 + 209^3/4390807$$

$$= 3.077$$

Flange Stresses

Longitudinal Hub Stress, Operating [SHo]:

$$= (f \cdot Mop / Bcor) / (L \cdot g^{1^2})$$

$$= (1.56 \cdot 41007/2486) / (3.08 \cdot 32^2)$$

$$= 80.31 \text{ N./mm}^2$$

Longitudinal Hub Stress, Seating [SHa]:

$$= (f \cdot Matm / Bcor) / (L \cdot g^{1^2})$$

$$= (1.56 \cdot 71951/2486) / (3.08 \cdot 32^2)$$

$$= 140.91 \text{ N./mm}^2$$

Radial Flange Stress, Operating [SRo]:

$$= (\beta \cdot Mop / Bcor) / (L \cdot t^2)$$

$$= (2.16 \cdot 41007/2486) / (3.08 \cdot 209^2)$$

$$= 2.60 \text{ N./mm}^2$$

Radial Flange Stress, Seating [SRa]:

$$= (\beta \cdot Matm/Bcor) / (L \cdot t^2)$$

$$= (2.16 \cdot 71951/2486) / (3.08 \cdot 209^2)$$

$$= 4.56 \text{ N./mm}^2$$

Tangential Flange Stress, Operating [STo]:

$$= (Y \cdot Mo / (t^2 \cdot Bcor)) - Z \cdot SRo$$

$$= (19.3 \cdot 41007 / (209^2 \cdot 2486)) - 10 \cdot 2.6$$

$$= 45.58 \text{ N./mm}^2$$

Tangential Flange Stress, Seating [STa]:

$$= (y \cdot Matm / (t^2 \cdot Bcor)) - Z \cdot SRa$$

$$= (19.3 \cdot 71951 / (209^2 \cdot 2486)) - 10 \cdot 4.56$$

$$= 79.97 \text{ N./mm}^2$$

Average Flange Stress, Operating [SAo]:

$$= (SHo + \max(SRo, STo)) / 2$$

$$= (80.3 + \max(2.6, 45.6)) / 2$$

$$= 62.94 \text{ N./mm}^2$$

Average Flange Stress, Seating [SAa]:

$$= (SHa + \max(SRa, STa)) / 2$$

$$= (141 + \max(4.56, 80)) / 2$$

$$= 110.44 \text{ N./mm}^2$$

Bolt Stress, Operating [BSO]:

$$= Wm1 / Ab$$

$$= 570228/653$$

$$= 85.68 \text{ N./mm}^2$$

Bolt Stress, Seating [BSa]:

$$= (Wm2 / Ab)$$

$$= (468392/653)$$

$$= 70.38 \text{ N./mm}^2$$

Flange Stress Analysis Results: N./mm²



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 40 of 275

Flg Calc [Int P]: LHS Ch Fl-2

Flng: 33

6:05pm

Sep 8,2026

	Actual	Operating Allowed	Gasket Actual	Seating Allowed
Longitudinal Hub	80.31	207.00	140.91	207.00
Radial Flange	2.60	138.00	4.56	138.00
Tangential Flange	45.58	138.00	79.97	138.00
Maximum Average	62.94	138.00	110.44	138.00
Bolting	85.68	172.00	70.38	172.00

Minimum Required Flange Thickness [Rigidity] 207.950 mm

Estimated M.A.W.P. (Operating) 1844 KPa.

Estimated Finished Weight of Flange at given Thk. 1934.0 kg.

Estimated Unfinished Weight of Forging at given Thk 2447.8 kg.

Flange Stress results per WRC-538 at computed S_{fmax} (N./mm²):

		Actual	Operating Allowed	stress ratio	Gasket Actual	Seating Allowed	stress ratio
Longitudinal Hub	Sh	499.99	499.99	1.000	499.99	499.99	1.000
Tangential Flange	St	283.10	374.99	0.755	283.10	374.99	0.755
Tangential Flange	Sto	160.58	250.00	0.642	160.58	250.00	0.642
Combined	Sh/f + St	602.00	749.99	0.803	602.00	749.99	0.803
Combined	Sr + St	299.26	749.99	0.399	299.26	749.99	0.399
Combined	Sh + Sto	660.57	749.99	0.881	660.57	749.99	0.881
Radial Flange	Sr	16.16	499.99	0.032	16.16	499.99	0.032
Maximum Stress Ratio				1.000			1.000



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 41 of 275

Flg Calc [Int P]: LHS Ch Fl-2

Flng: 33

6:05pm

Sep 8, 2026

Coefficients for f and $f2$

	f	$f2$	$f3$
a	-0.71375912	-0.01447638	-0.06456312
b	-0.12846279	-0.27814745	-0.08232239
c	1.08037907	0.01035395	0.13691677
d	0.99766848	1.37984158	-0.77879888
e	1.21823466	-0.34346764	0.14909019
f	0.01024612	0.02536192	0.00660062
g	0.4262313	-0.0014508	0.0616252
h	1.4204976	2.25543162	0.74639834
i	-0.70278181	-0.60889597	-0.079595
j	-0.02483937	-0.15735462	0.09851673
k	-1.59460436	1.22516062	-0.1121436

$$f_n = \frac{\left[a + c \left(\frac{g1}{g0} \right) + e \left(\frac{h}{h0} \right) + g \left(\frac{g1}{g0} \right)^2 + i \left(\frac{h}{h0} \right)^2 + k \left(\frac{g1}{g0} \right) \left(\frac{h}{h0} \right) \right]}{\left[1 + b \left(\frac{g1}{g0} \right) + d \left(\frac{h}{h0} \right) + f \left(\frac{g1}{g0} \right)^2 + h \left(\frac{h}{h0} \right)^2 + j \left(\frac{g1}{g0} \right) \left(\frac{h}{h0} \right) \right]}$$

Hub Stress Correction Factor [f]:

= max(1; F1num / F1den)

= max(1; 2.09/1.33)

= 1.5678

Hub Stress Correction Factor [f2]:

= max(0.25; fn2) if $h/h0 < 0.35$, else max (0.25; fn3)

= max(0.25; 0.63/1.26) if $h/h0 < 0.35$, else max (0.25; 0.38/0.75)

= 0.5035

In this case, the hub ratio $h/h0$, 0.3648 was ≥ 0.35 .

PV Elite iterates on the assembly bolt load stress, Sfmax, until it exceeds the limits provided by WRC 538.

Bolting and Gasket Calculations per ASME PCC-1 Appendix O:

Input Data:

Maximum permissible bolt stress	Sbmax	507.5 N./mm ²
Minimum permissible bolt stress	Sbmin	290.0 N./mm ²
Max. permissible bolt stress prior to flange damage	Sfmax	608.9 N./mm ²
Target assembly gasket stress	SgT	208.0 N./mm ²
Maximum permissible gasket stress	Sgmax	276.0 N./mm ²
Minimum gasket operating stress	Sgmin-O	97.0 N./mm ²
Minimum gasket seating stress	Sgmin-S	140.0 N./mm ²
Nut Factor	K	0.200
Fraction of Gasket Load remaining after relaxation	Phig	0.700



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 42 of 275

Flg Calc [Int P]: LHS Ch Fl-2

Flng: 33

6:05pm

Sep 8, 2026

Root Area of a Single Bolt	Abs	9.0645 cm ²
Max. permissible single flange rotation for gasket	Thetagmax	1.000 deg

Calculated Results:

Flange Material Ambient Yield Stress	Sya	250.0 N./mm ²
Flange Material Operating Yield Stress	Syo	230.1 N./mm ²
Single flange rotation at Sfmax	Thetaamax	0.679 deg

Gasket Contact Area [Ag]:

$$= \pi/4 (GO.D.^2 - GI.D.^2) + (PartFactor \cdot Ip \cdot bPart)$$

$$= \pi/4 (2554^2 - 2510^2) + (0.5 \cdot 5118 \cdot 0)$$

$$= 1750.0 \text{ cm}^2$$

Target Bolt Stress [Sbsel]: (Eq. O-1)

$$= SgT \cdot Ag / (nb \cdot Ab)$$

$$= 208 \cdot 1750 / (72 \cdot 9.06)$$

$$= 557.7 \text{ N./mm}^2$$

Upper Bolt Stress Limit [Sbsel]: (Eq. O-4)

$$= \min(Sbsel; Sbmax)$$

$$= \min(558; 508)$$

$$= 507.5 \text{ N./mm}^2$$

Lower Bolt Stress Limit [Sbsel]: (Eq. O-5)

$$= \max(Sbsel; Sbmin)$$

$$= \max(508; 290)$$

$$= 507.5 \text{ N./mm}^2$$

Upper Bolt Stress Limit including the Flange [Sbsel]: (Eq. O-6)

$$= \min(Sbsel; Sfmax)$$

$$= \min(508; 609)$$

$$= 507.5 \text{ N./mm}^2$$

Check if Gasket Assembly Seating Stress is achieved. (Eq. O-7)

$$:: Sbsel \geq Sgmin-S (Ag / (nb \cdot Abs))$$

$$:: 508 \geq 140 (1750 / (72 \cdot 9.06))$$

$$:: 507.5 \geq 375.4 \text{ N./mm}^2 \text{ Check Passes}$$

Check if Gasket Operating Stress is maintained. (Eq. O-8)

$$:: Sbsel \geq (Sgmin-O \cdot Ag + \pi/4 \cdot Pmax \cdot GI.D.^2) / (\phi G \cdot Abs \cdot nb)$$

$$:: 508 \geq (97 \cdot 1750 + \pi/4 \cdot 1025 \cdot 2510^2) / (0.7 \cdot 9.06 \cdot 72)$$

$$:: 507.5 \geq 482.6 \text{ N./mm}^2 \text{ Check Passes}$$

Check if Gasket Maximum Stress is achieved. (Eq. O-9)

$$:: Sbsel \leq Sgmax (Ag / (nb \cdot Abs))$$

$$:: 508 \leq 276 (1750 / (72 \cdot 9.06))$$

$$:: 507.5 \leq 740.1 \text{ N./mm}^2 \text{ Check Passes}$$

Check if Flange Rotation Limit is exceeded. (Eq. O-10)

$$:: Sbsel \leq Sfmax (thetagmax / thetaamax)$$

$$:: 508 \leq 609 (1/0.68)$$

$$:: 507.5 \leq 897.2 \text{ N./mm}^2 \text{ Check Passes}$$

Assembly Bolt Torque [Tb]: (Eq. O-2)

$$= Sbsel \cdot K \cdot Abs \cdot \phi b$$

$$= 508 \cdot 0.2 \cdot 9.06 \cdot 38.1$$

$$= 357.4 \text{ Kg-m.}$$

Bolt Allowable Stress for: SA-193 B8 Cl. 2 SbB8 118 N./mm²

Bolt Allowable Stress for: SA-193 B7 Sb 171 N./mm²

Note: Since Sb >= SbB8, bolt allowable stress comparison check Passes (see Div 1 UG-44(b)).

Flange rigidity based on required thickness [ASME]:



Flange Rigidity Criterion, Seating per Table 4.16.10 [Jg]:
 $= 52.14 \cdot Ma / Bsc \cdot Cnvfac \cdot V / (\lambda \cdot Eamb \cdot go^2 \cdot ho \cdot Ki)$
 $= 52.14 \cdot 71951 / 1 \cdot 9807 \cdot 0.29 / (2.95 \cdot 201334 \cdot 17^2 \cdot 206 \cdot 0.3)$
 $= 0.999$ (should be ≤ 1)

Flange Rigidity Criterion, Operating per Table 4.16.10 [Jo]:
 $= 52.14 \cdot Mo / Bsc \cdot Cnvfac \cdot V / (\lambda \cdot Eop \cdot goc^2 \cdot ho \cdot Ki)$
 $= 52.14 \cdot 41007 / 1 \cdot 9807 \cdot 0.29 / (2.95 \cdot 197847 \cdot 17^2 \cdot 206 \cdot 0.3)$
 $= 0.579$ (should be ≤ 1)

Flange rigidity based on given thickness [ASME]:

Flange Rigidity Criterion, Seating per Table 4.16.10 [Jg]:
 $= 52.14 \cdot Ma / Bsc \cdot Cnvfac \cdot V / (\lambda \cdot Eamb \cdot go^2 \cdot ho \cdot Ki)$
 $= 52.14 \cdot 71951 / 1 \cdot 9807 \cdot 0.29 / (3.08 \cdot 201334 \cdot 17^2 \cdot 206 \cdot 0.3)$
 $= 0.958$ (should be ≤ 1)

Flange Rigidity Criterion, Operating per Table 4.16.10 [Jo]:
 $= 52.14 \cdot Mo / Bsc \cdot Cnvfac \cdot V / (\lambda \cdot Eop \cdot goc^2 \cdot ho \cdot Ki)$
 $= 52.14 \cdot 41007 / 1 \cdot 9807 \cdot 0.29 / (3.08 \cdot 197847 \cdot 17^2 \cdot 206 \cdot 0.3)$
 $= 0.555$ (should be ≤ 1)

Minimum Design Metal Temperature Results:

Thickness Ratio = 0.51, Temperature Reduction per Fig. UCS 66.1 = 31 °C

Min Metal Temp. w/o impact per UCS-66, Curve B -7 °C
 Min Metal Temp. at Required thickness (UCS 66.1) -38 °C
 Min Metal Temp. w/o impact per UG-20(f) -29 °C

Note: UCS-66(b)(-c) was considered in the flange MDMT calculation.

Per ASME VIII-2, 4.16.2.3, Perform Calculations in the New Condition:

Flange Stress Analysis Results: N./mm²

	Operating		Gasket Seating	
	Actual	Allowed	Actual	Allowed
Longitudinal Hub	75.37	207.00	129.71	207.00
Radial Flange	2.97	138.00	5.11	138.00
Tangential Flange	40.43	138.00	69.59	138.00
Maximum Average	57.90	138.00	99.65	138.00
Bolting	85.68	172.00	70.38	172.00

Minimum Req'd Thickness, ambient, no Corrosion: 192.862 mm

PV Elite is a trademark of Hexagon AB, 2026, All rights reserved.



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_Top

Page 44 of 275

Flg Calc [Int P]: LHS Sh Fl 1

Flng: 34

6:05pm

Sep 8,2026

Flange Input Data Values

Description: LHS Sh Fl 1 :

LHS Shell Flg-1

Flange Type	Integral Weld Neck		
Design Pressure	P	544.90	KPa.
Design Temperature		130	°C
Internal Corrosion Allowance	ci	3.0000	mm
External Corrosion Allowance	ce	0.0000	mm
Use Corrosion Allowance in Thickness Calcs.		Yes	
Flange Inside Diameter	B	2480.000	mm
Flange Outside Diameter	A	2748.000	mm
Flange Thickness	t	220.0000	mm
Thickness of Hub at Small End	go	16.0000	mm
Thickness of Hub at Large End	gl	35.0000	mm
Length of Hub	h	75.0000	mm
Flange Material		SA-266 2	
Flange Material UNS number		K03506	
Flange Allowable Stress At Temperature	Sfo	138.00	N./mm ²
Flange Allowable Stress At Ambient	Sfa	138.00	N./mm ²
Bolt Material		SA-193 B7	
Bolt Allowable Stress At Temperature	Sb	172.00	N./mm ²
Bolt Allowable Stress At Ambient	Sa	172.00	N./mm ²
Diameter of Bolt Circle	C	2663.000	mm
Nominal Bolt Diameter	a	38.1000	mm
Type of Threads	TEMA Thread Series		
Number of Bolts		72	
Flange Face Outside Diameter	Fod	2565.000	mm
Flange Face Inside Diameter	Fid	2480.000	mm
Flange Facing Sketch		Sketch 1a	
Gasket Outside Diameter	Go	2554.000	mm
Gasket Inside Diameter	Gi	2510.000	mm
Gasket Factor	m	3.0000	
Gasket Design Seating Stress	y	68.95	N./mm ²
Gasket Thickness	tg	3.1750	mm
Raised face depth	Fd	0.0000	mm
Length of Partition Gasket	lp	5118.0000	mm
Width of Partition Gasket	tp	10.0000	mm
Partition Gasket Factor	mPart	0.0000	
Partition Gasket Design Seating Stress	yPart	0.00	N./mm ²



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)


Page 45 of 275

Flg Calc [Int P]: LHS Sh Fl 1

Flng: 34

6:05pm

Sep 8, 2026

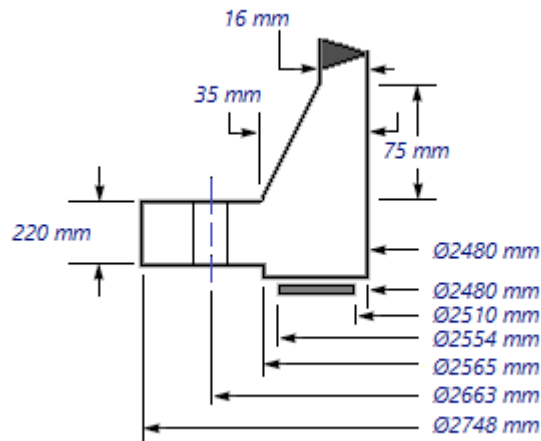

ASME Code, Section VIII Division 1, 2025

Hub Small End Required Thickness due to Internal Pressure:

$$= (P \cdot (D/2 + Ca)) / (S \cdot E - 0.6 \cdot P) \text{ per UG-27 (c)(1)}$$

$$= (545 \cdot (2480/2 + 3)) / (138 \cdot 1 - 0.6 \cdot 545) + Ca$$

$$= 7.9201 \text{ mm}$$

Small End Hub MAWP:

$$= (S \cdot E \cdot t) / (R + 0.6 \cdot t) \text{ per UG-27 (c)(1)}$$

$$= (138 \cdot 1 \cdot 13) / (1243 + 0.6 \cdot 13)$$

$$= 1434.173 \text{ KPa.}$$

Hub Small End Hub MAPnc:

$$= (Sa \cdot E \cdot t) / (R + 0.6 \cdot t) \text{ per UG-27 (c)(1)}$$

$$= (138 \cdot 1 \cdot 16) / (1240 + 0.6 \cdot 16)$$

$$= 1766.831 \text{ KPa.}$$

Corroded Flange Thickness, $t_c = T - c_i$	217.000 mm
Corroded Flange ID, $B_{cor} = B + 2 \cdot c_i$	2486.000 mm
Corroded Large Hub, $g1_{cor} = g1 - c_i$	32.000 mm
Corroded Small Hub, $g0_{cor} = g0 - c_i$	13.000 mm
Code R Dimension, $R = ((C - B_{cor})/2) - g1_{cor}$	56.500 mm

Gasket Contact Width, $N = (G_o - G_i)/2$	22.000 mm
Basic Gasket Width, $bo = N/2$	11.000 mm
Effective Gasket Width, $b = C_b \cdot \sqrt{bo}$	8.358 mm
Gasket Reaction Diameter, $G = G_o - 2 \cdot b$	2537.285 mm

Basic Flange and Bolt Loads:

Hydrostatic End Load due to Pressure [H or Wo,1]:

$$= \pi/4 \cdot G^2 \cdot P$$

$$= \pi/4 \cdot 2537^2 \cdot 545$$

$$= 280956.812 \text{ Kg}$$

Contact Load on Gasket Surfaces [Hp or Wo,2]:

$$= 2 \cdot b \cdot \pi \cdot G \cdot m \cdot P + 2 \cdot l_p \cdot b_{Part} \cdot m_{Part} \cdot P$$

$$= 2 \cdot 8.36 \cdot \pi \cdot 2537 \cdot 3 \cdot 545$$

$$= 22210.883 \text{ Kg}$$

Hydrostatic End Load at Flange ID [Hd]:

$$= \pi/4 \cdot B_{cor}^2 \cdot P$$

$$= \pi/4 \cdot 2486^2 \cdot 545$$

$$= 269713.844 \text{ Kg}$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 46 of 275

Flg Calc [Int P]: LHS Sh Fl 1

Flng: 34

6:05pm

Sep 8, 2026

Pressure Force on Flange Face [Ht]:

$$= H - H_d$$

$$= 280957 - 269714$$

$$= 11242.958 \text{ Kgf}$$

Design Bolt Load for the Operating Condition [Wo]:

$$= \max(W_{o,1} + W_{o,2} + H'p, 0)$$

$$= \max(280957 + 22211 + 0, 0)$$

$$= 303167.688 \text{ Kgf}$$

$$= 570228.062 \text{ Kgf, Mating Flange Load Governs}$$

Design Bolt Load for the Gasket Seating Condition [Wg]:

$$= y \cdot b \cdot \pi \cdot G + y_{Part} \cdot b_{Part} \cdot l_p$$

$$= 69 \cdot 8.36 \cdot \pi \cdot 2537 + 0 \cdot 0 \cdot 5118$$

$$= 468391.531 \text{ Kgf}$$

Required Bolt Area [Am]:

$$= \max((W_o + F_a + 4Me/G) / S_b, W_g / S_a)$$

$$= \max((570228 + 0 + 4 \cdot 0 / 2537) / 172, 468392 / 172)$$

$$= 325.130 \text{ cm}^2$$

ASME Maximum Circumferential Spacing between Bolts, Table 4.16.11 [Bsmx]:

$$= 2a + 6t / (m + 0.5)$$

$$= 2 \cdot 38.1 + 6 \cdot 217 / (3 + 0.5)$$

$$= 448.200 \text{ mm}$$

Actual Circumferential Bolt Spacing [Bs]:

$$= C \cdot \sin(\pi / n)$$

$$= 2663 \cdot \sin(\pi / 72)$$

$$= 116.158 \text{ mm}$$

ASME Moment Multiplier for Bolt Spacing per Table 4.16.11 [Bsc]:

$$= \max(\sqrt{ (B_s / (2a + t)) }, 1)$$

$$= \max(\sqrt{ (116 / (2 \cdot 38.1 + 217)) }, 1)$$

$$= 1.0000$$

Bolting Information for TEMA Imperial Thread Series (Non Mandatory):

	Minimum	Actual	Maximum
Bolt Area:	325.130	652.644	
Radial Distance between Hub and Bolts:	50.800	56.500	
Radial Distance between Bolts and Edge:	38.100	42.500	
Circ. Spacing between the Bolts:	82.550	116.158	448.200

Min. Gasket Contact Width (Brownell Young) [Not an ASME Calc] [Nmin]:

$$= A_b \cdot S_a / (y \cdot \pi (G_o + G_i))$$

$$= 653 \cdot 172 / (69 \cdot \pi (2554 + 2510))$$

$$= 10.233 \text{ mm}$$

Recommended Minimum Gasket Contact Width per Table 4.16.2

Sheet Gaskets including laminated sheet gaskets with or without a metal core: 19 mm

Preformed comp. gaskets incl. spiral wound, jacketed, & solid flat metal gaskets: 16 mm

Flange Design Bolt Load, Gasket Seating [W or Wgs]:

$$= S_a \cdot A_b$$

$$= 172 \cdot 653$$

$$= 1144638.00 \text{ Kgf}$$

Gasket Load for the Operating Condition [HG]:

$$= W_o - H$$

$$= 570228 - 280957$$

$$= 289271.28 \text{ Kgf}$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_Top

Page 47 of 275

Flg Calc [Int P]: LHS Sh Fl 1

Flng: 34

6:05pm

Sep 8, 2026

Moment Arm Calculations:

Distance to Gasket Load Reaction [hg]:

$$= (C - G) / 2$$

$$= (2663 - 2537) / 2$$

$$= 62.8575 \text{ mm}$$

Distance to Face Pressure Reaction [ht]:

$$= 0.5 ((C - B) / 2 + hg)$$

$$= 0.5 ((2663 - 2486) / 2 + 62.9)$$

$$= 75.6788 \text{ mm}$$

Distance to End Pressure Reaction [hd]:

$$= (C - B - g1) / 2$$

$$= (2663 - 2486 - 32) / 2$$

$$= 72.5000 \text{ mm}$$

Summary of Moments for Internal Pressure: (Kg-m.)

Loading	Force	Distance	Bolt Corr	Moment
End Pressure, Md	269714.	72.5000	1.0000	19555.
Face Pressure, Mt	11243.	75.6788	1.0000	851.
Gasket Load, Mg	289271.	62.8575	1.0000	18183.
Gasket Seating, Matm	1144638.	62.8575	1.0000	71951.

Total Moment for Operation, Mo 38589. Kg-m.

Total Moment for Gasket seating, Mg 71951. Kg-m.

Effective Hub Length, ho = sqrt(Bcor*goCor) 179.772 mm

Hub Ratio, h/h0 = HL / H0 0.417

Thickness Ratio, g1/g0 = (g1Cor/goCor) 2.462

Flange Factors for Integral Flange:

Factor F per 4.16.5 0.835

Factor V per 4.16.5 0.216

Factor f per 4.16.5 2.372

Stress factor from Table 4.16.4 [K]:

$$= A / B$$

$$= 2748 / 2486$$

$$= 1.105$$

Stress factor from Table 4.16.4 [Y]:

$$= (0.66845 + (5.7169 (K^2 \cdot \log_{10}(K))) / (K^2 - 1)) / (K - 1)$$

$$= (0.66845 + (5.7169 (1.11^2 \cdot \log_{10}(1.11))) / (1.11^2 - 1)) / (1.11 - 1)$$

$$= 19.341$$

Stress factor from Table 4.16.4 [T]:

$$= (K^2 (1 + 8.55246 \cdot \log_{10}(K)) - 1) / ((1.0472 + 1.9448 \cdot K^2) \cdot (K - 1))$$

$$= (1.11^2 (1 + 8.55246 \cdot \log_{10}(1.11)) - 1) / ((1.0472 + 1.9448 \cdot 1.11^2) \cdot (1.11 - 1))$$

$$= 1.875$$

Stress factor from Table 4.16.4 [U]:

$$= (K^2 (1 + 8.55246 \cdot \log_{10}(K)) - 1) / (1.36136 (K^2 - 1) \cdot (K - 1))$$

$$= (1.11^2 (1 + 8.55246 \cdot \log_{10}(1.11)) - 1) / (1.36136 (1.11^2 - 1) \cdot (1.11 - 1))$$

$$= 21.254$$

Stress factor from Table 4.16.4 [Z]:

$$= (K^2 + 1) / (K^2 - 1)$$

$$= (1.11^2 + 1) / (1.11^2 - 1)$$

$$= 10.014$$

Stress factor from Table 4.16.4 for integral flanges [d]:

$$= U \cdot g0^2 \cdot h0 / V$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 48 of 275

Flg Calc [Int P]: LHS Sh Fl 1

Flng: 34

6:05pm

Sep 8, 2026

$$= 21.3 \cdot 13^2 \cdot 180 / 0.22$$

$$= 2982691.000 \text{ mm}^3$$

Stress factor from Table 4.16.4 for integral flanges [e]:

$$= F / h_0$$

$$= 0.84 / 180$$

$$= 0.005 \text{ 1/mm}$$

Stress factor from Table 4.16.4 [L]:

$$= (t \cdot e + 1) / T + t^3/d$$

$$= (217 \cdot 0.0046 + 1) / 1.88 + 217^3 / 2982691$$

$$= 4.497$$

Flange Stresses

Longitudinal Hub Stress, Operating [SHo]:

$$= (f \cdot Mop / Bcor) / (L \cdot g1^2)$$

$$= (2.37 \cdot 38589 / 2486) / (4.5 \cdot 32^2)$$

$$= 78.43 \text{ N./mm}^2$$

Longitudinal Hub Stress, Seating [SHa]:

$$= (f \cdot Matm / Bcor) / (L \cdot g1^2)$$

$$= (2.37 \cdot 71951 / 2486) / (4.5 \cdot 32^2)$$

$$= 146.23 \text{ N./mm}^2$$

Radial Flange Stress, Operating [SRo]:

$$= (\beta \cdot Mop / Bcor) / (L \cdot t^2)$$

$$= (2.34 \cdot 38589 / 2486) / (4.5 \cdot 217^2)$$

$$= 1.69 \text{ N./mm}^2$$

Radial Flange Stress, Seating [SRa]:

$$= (\beta \cdot Matm / Bcor) / (L \cdot t^2)$$

$$= (2.34 \cdot 71951 / 2486) / (4.5 \cdot 217^2)$$

$$= 3.14 \text{ N./mm}^2$$

Tangential Flange Stress, Operating [STo]:

$$= (Y \cdot Mo / (t^2 \cdot Bcor)) - Z \cdot SRo$$

$$= (19.3 \cdot 38589 / (217^2 \cdot 2486)) - 10 \cdot 1.69$$

$$= 45.65 \text{ N./mm}^2$$

Tangential Flange Stress, Seating [STa]:

$$= (y \cdot Matm / (t^2 \cdot Bcor)) - Z \cdot SRa$$

$$= (19.3 \cdot 71951 / (217^2 \cdot 2486)) - 10 \cdot 3.14$$

$$= 85.11 \text{ N./mm}^2$$

Average Flange Stress, Operating [SAo]:

$$= (SHo + \max(SRo, STo)) / 2$$

$$= (78.4 + \max(1.69, 45.6)) / 2$$

$$= 62.04 \text{ N./mm}^2$$

Average Flange Stress, Seating [SAa]:

$$= (SHa + \max(SRa, STa)) / 2$$

$$= (146 + \max(3.14, 85.1)) / 2$$

$$= 115.67 \text{ N./mm}^2$$

Bolt Stress, Operating [BSO]:

$$= Wm1 / Ab$$

$$= 570228 / 653$$

$$= 85.68 \text{ N./mm}^2$$

Bolt Stress, Seating [BSa]:

$$= (Wm2 / Ab)$$

$$= (468392 / 653)$$

$$= 70.38 \text{ N./mm}^2$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 49 of 275

Flg Calc [Int P]: LHS Sh Fl 1

Flng: 34

6:05pm

Sep 8,2026

Flange Stress Analysis Results: N./mm²

	Actual	Operating Allowed	Gasket Actual	Seating Allowed
Longitudinal Hub	78.43	207.00	146.23	207.00
Radial Flange	1.69	138.00	3.14	138.00
Tangential Flange	45.65	138.00	85.11	138.00
Maximum Average	62.04	138.00	115.67	138.00
Bolting	85.68	172.00	70.38	172.00

Minimum Required Flange Thickness [Rigidity] 216.840 mm

Estimated M.A.W.P. (Operating) 1434 KPa.

Estimated Finished Weight of Flange at given Thk. 1993.0 kg.

Estimated Unfinished Weight of Forging at given Thk 2516.0 kg.

Flange Stress results per WRC-538 at computed Sfmax (N./mm²):

		Actual	Operating Allowed	stress ratio	Gasket Actual	Seating Allowed	stress ratio
Longitudinal Hub	Sh	499.99	499.99	1.000	499.99	499.99	1.000
Tangential Flange	St	291.58	374.99	0.778	291.58	374.99	0.778
Tangential Flange	Sto	164.45	250.00	0.658	164.45	250.00	0.658
Combined	Sh/f + St	502.75	749.99	0.670	502.75	749.99	0.670
Combined	Sr + St	302.35	749.99	0.403	302.35	749.99	0.403
Combined	Sh + Sto	664.44	749.99	0.886	664.44	749.99	0.886
Radial Flange	Sr	10.77	499.99	0.022	10.77	499.99	0.022
Maximum Stress Ratio				1.000			1.000



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 50 of 275

Flg Calc [Int P]: LHS Sh Fl 1

Flng: 34

6:05pm

Sep 8, 2026

Coefficients for f and $f2$

	f	$f2$	$f3$
a	-0.71375912	-0.01447638	-0.06456312
b	-0.12846279	-0.27814745	-0.08232239
c	1.08037907	0.01035395	0.13691677
d	0.99766848	1.37984158	-0.77879888
e	1.21823466	-0.34346764	0.14909019
f	0.01024612	0.02536192	0.00660062
g	0.4262313	-0.0014508	0.0616252
h	1.4204976	2.25543162	0.74639834
i	-0.70278181	-0.60889597	-0.079595
j	-0.02483937	-0.15735462	0.09851673
k	-1.59460436	1.22516062	-0.1121436

$$f_n = \frac{\left[a + c \left(\frac{g1}{g0} \right) + e \left(\frac{h}{h0} \right) + g \left(\frac{g1}{g0} \right)^2 + i \left(\frac{h}{h0} \right)^2 + k \left(\frac{g1}{g0} \right) \left(\frac{h}{h0} \right) \right]}{\left[1 + b \left(\frac{g1}{g0} \right) + d \left(\frac{h}{h0} \right) + f \left(\frac{g1}{g0} \right)^2 + h \left(\frac{h}{h0} \right)^2 + j \left(\frac{g1}{g0} \right) \left(\frac{h}{h0} \right) \right]}$$

Hub Stress Correction Factor [f]:

= max(1; F1num / F1den)

= max(1; 3.28/1.38)

= 2.3678

Hub Stress Correction Factor [f2]:

= max(0.25; fn2) if $h/h0 < 0.35$, else max (0.25; fn3)

= max(0.25; 1.01/1.28) if $h/h0 < 0.35$, else max (0.25; 0.58/0.74)

= 0.7788

In this case, the hub ratio $h/h0$, 0.4172 was ≥ 0.35 .

PV Elite iterates on the assembly bolt load stress, Sfmax, until it exceeds the limits provided by WRC 538.

Bolting and Gasket Calculations per ASME PCC-1 Appendix O:

Input Data:

Maximum permissible bolt stress	Sbmax	507.5 N./mm ²
Minimum permissible bolt stress	Sbmin	290.0 N./mm ²
Max. permissible bolt stress prior to flange damage	Sfmax	589.2 N./mm ²
Target assembly gasket stress	SgT	208.0 N./mm ²
Maximum permissible gasket stress	Sgmax	276.0 N./mm ²
Minimum gasket operating stress	Sgmin-O	97.0 N./mm ²
Minimum gasket seating stress	Sgmin-S	140.0 N./mm ²
Nut Factor	K	0.200
Fraction of Gasket Load remaining after relaxation	Phig	0.700



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 51 of 275

Flg Calc [Int P]: LHS Sh Fl 1

Flng: 34

6:05pm

Sep 8, 2026

Root Area of a Single Bolt	Abs	9.0645 cm ²
Max. permissible single flange rotation for gasket	Thetagmax	1.000 deg

Calculated Results:

Flange Material Ambient Yield Stress	Sya	250.0 N./mm ²
Flange Material Operating Yield Stress	Syo	222.2 N./mm ²
Single flange rotation at Sfmax	Thetafmax	0.591 deg

Gasket Contact Area [Ag]:

$$= \pi/4 (GO.D.^2 - GI.D.^2) + (PartFactor \cdot Ip \cdot bPart)$$

$$= \pi/4 (2554^2 - 2510^2) + (0.5 \cdot 5118 \cdot 0)$$

$$= 1750.0 \text{ cm}^2$$

Target Bolt Stress [Sbsel]: (Eq. O-1)

$$= SgT \cdot Ag / (nb \cdot Ab)$$

$$= 208 \cdot 1750 / (72 \cdot 9.06)$$

$$= 557.7 \text{ N./mm}^2$$

Upper Bolt Stress Limit [Sbsel]: (Eq. O-4)

$$= \min(Sbsel; Sbmax)$$

$$= \min(558; 508)$$

$$= 507.5 \text{ N./mm}^2$$

Lower Bolt Stress Limit [Sbsel]: (Eq. O-5)

$$= \max(Sbsel; Sbmin)$$

$$= \max(508; 290)$$

$$= 507.5 \text{ N./mm}^2$$

Upper Bolt Stress Limit including the Flange [Sbsel]: (Eq. O-6)

$$= \min(Sbsel; Sfmax)$$

$$= \min(508; 589)$$

$$= 507.5 \text{ N./mm}^2$$

Check if Gasket Assembly Seating Stress is achieved. (Eq. O-7)

$$:: Sbsel \geq Sgmin-S (Ag / (nb \cdot Abs))$$

$$:: 508 \geq 140 (1750 / (72 \cdot 9.06))$$

$$:: 507.5 \geq 375.4 \text{ N./mm}^2 \text{ Check Passes}$$

Check if Gasket Operating Stress is maintained. (Eq. O-8)

$$:: Sbsel \geq (Sgmin-O \cdot Ag + \pi/4 \cdot Pmax \cdot GI.D.^2) / (\phi G \cdot Abs \cdot nb)$$

$$:: 508 \geq (97 \cdot 1750 + \pi/4 \cdot 545 \cdot 2510^2) / (0.7 \cdot 9.06 \cdot 72)$$

$$:: 507.5 \geq 430.6 \text{ N./mm}^2 \text{ Check Passes}$$

Check if Gasket Maximum Stress is achieved. (Eq. O-9)

$$:: Sbsel \leq Sgmax (Ag / (nb \cdot Abs))$$

$$:: 508 \leq 276 (1750 / (72 \cdot 9.06))$$

$$:: 507.5 \leq 740.1 \text{ N./mm}^2 \text{ Check Passes}$$

Check if Flange Rotation Limit is exceeded. (Eq. O-10)

$$:: Sbsel \leq Sfmax (thetagmax / thetafmax)$$

$$:: 508 \leq 589 (1/0.59)$$

$$:: 507.5 \leq 997.0 \text{ N./mm}^2 \text{ Check Passes}$$

Assembly Bolt Torque [Tb]: (Eq. O-2)

$$= Sbsel \cdot K \cdot Abs \cdot \phi b$$

$$= 508 \cdot 0.2 \cdot 9.06 \cdot 38.1$$

$$= 357.4 \text{ Kg-m.}$$

Bolt Allowable Stress for: SA-193 B8 Cl. 2 SbB8 107 N./mm²

Bolt Allowable Stress for: SA-193 B7 Sb 171 N./mm²

Note: Since Sb >= SbB8, bolt allowable stress comparison check Passes (see Div 1 UG-44(b)).

Flange rigidity based on required thickness [ASME]:



Flange Rigidity Criterion, Seating per Table 4.16.10 [Jg]:
 $= 52.14 \cdot Ma / Bsc \cdot Cnvfac \cdot V / (\lambda \cdot Eamb \cdot go^2 \cdot ho \cdot Ki)$
 $= 52.14 \cdot 71951 / 1 \cdot 9807 \cdot 0.22 / (4.34 \cdot 201334 \cdot 13^2 \cdot 180 \cdot 0.3)$
 $= 0.999$ (should be ≤ 1)

Flange Rigidity Criterion, Operating per Table 4.16.10 [Jo]:
 $= 52.14 \cdot Mo / Bsc \cdot Cnvfac \cdot V / (\lambda \cdot Eop \cdot goc^2 \cdot ho \cdot Ki)$
 $= 52.14 \cdot 38589 / 1 \cdot 9807 \cdot 0.22 / (4.34 \cdot 194922 \cdot 13^2 \cdot 180 \cdot 0.3)$
 $= 0.553$ (should be ≤ 1)

Flange rigidity based on given thickness [ASME]:

Flange Rigidity Criterion, Seating per Table 4.16.10 [Jg]:
 $= 52.14 \cdot Ma / Bsc \cdot Cnvfac \cdot V / (\lambda \cdot Eamb \cdot go^2 \cdot ho \cdot Ki)$
 $= 52.14 \cdot 71951 / 1 \cdot 9807 \cdot 0.22 / (4.5 \cdot 201334 \cdot 13^2 \cdot 180 \cdot 0.3)$
 $= 0.965$ (should be ≤ 1)

Flange Rigidity Criterion, Operating per Table 4.16.10 [Jo]:
 $= 52.14 \cdot Mo / Bsc \cdot Cnvfac \cdot V / (\lambda \cdot Eop \cdot goc^2 \cdot ho \cdot Ki)$
 $= 52.14 \cdot 38589 / 1 \cdot 9807 \cdot 0.22 / (4.5 \cdot 194922 \cdot 13^2 \cdot 180 \cdot 0.3)$
 $= 0.534$ (should be ≤ 1)

Minimum Design Metal Temperature Results:

Thickness Ratio = 0.6, Temperature Reduction per Fig. UCS 66.1 = 23 °C

Min Metal Temp. w/o impact per UCS-66, Curve B -14 °C
 Min Metal Temp. at Required thickness (UCS 66.1) -37 °C
 Min Metal Temp. w/o impact per UG-20(f) -29 °C

Per ASME VIII-2, 4.16.2.3, Perform Calculations in the New Condition:

Flange Stress Analysis Results: N./mm²

	Actual	Operating Allowed	Gasket Actual	Seating Allowed
Longitudinal Hub	72.74	207.00	134.14	207.00
Radial Flange	2.01	138.00	3.70	138.00
Tangential Flange	40.60	138.00	74.87	138.00
Maximum Average	56.67	138.00	104.51	138.00
Bolting	85.68	172.00	70.38	172.00

Minimum Req'd Thickness, ambient, no Corrosion: 203.784 mm



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 53 of 275

Flg Calc [Int P]: RHS Sh Fl 1

Flng: 35

6:05pm


Sep 8,2026

Flange Input Data Values

Description: RHS Sh Fl 1 :

RHS Shell Flg-1

Flange Type	Integral Weld Neck		
Design Pressure	P	544.90	KPa.
Design Temperature		130	°C
Internal Corrosion Allowance	ci	3.0000	mm
External Corrosion Allowance	ce	0.0000	mm
Use Corrosion Allowance in Thickness Calcs.		Yes	
Flange Inside Diameter	B	2480.000	mm
Flange Outside Diameter	A	2748.000	mm
Flange Thickness	t	211.0000	mm
Thickness of Hub at Small End	go	16.0000	mm
Thickness of Hub at Large End	gl	35.0000	mm
Length of Hub	h	75.0000	mm
Flange Material		SA-266 2	
Flange Material UNS number		K03506	
Flange Allowable Stress At Temperature	Sfo	138.00	N./mm ²
Flange Allowable Stress At Ambient	Sfa	138.00	N./mm ²
Bolt Material		SA-193 B7	
Bolt Allowable Stress At Temperature	Sb	172.00	N./mm ²
Bolt Allowable Stress At Ambient	Sa	172.00	N./mm ²
Diameter of Bolt Circle	C	2663.000	mm
Nominal Bolt Diameter	a	38.1000	mm
Type of Threads	TEMA Thread Series		
Number of Bolts		64	
Flange Face Outside Diameter	Fod	2565.000	mm
Flange Face Inside Diameter	Fid	2480.000	mm
Flange Facing Sketch		Sketch 1a	
Gasket Outside Diameter	Go	2554.000	mm
Gasket Inside Diameter	Gi	2510.000	mm
Gasket Factor	m	3.0000	
Gasket Design Seating Stress	y	68.95	N./mm ²
Gasket Thickness	tg	3.1750	mm
Raised face depth	Fd	0.0000	mm

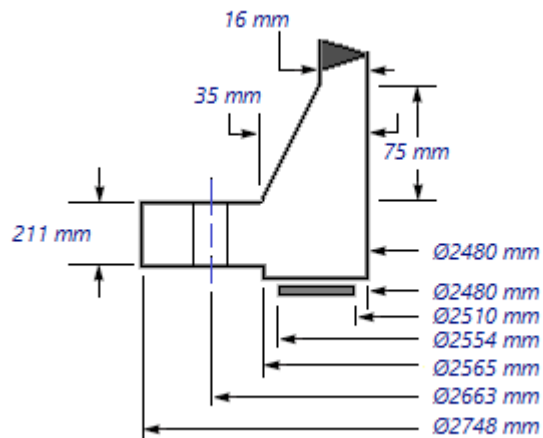



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 54 of 275

Flg Calc [Int P]: RHS Sh Fl 1

Flng: 35

6:05pm

Sep 8, 2026

ASME Code, Section VIII Division 1, 2025

Hub Small End Required Thickness due to Internal Pressure:

$$= (P \cdot (D/2 + Ca)) / (S \cdot E - 0.6 \cdot P) \text{ per UG-27 (c)(1)}$$

$$= (545 \cdot (2480/2 + 3)) / (138 \cdot 1 - 0.6 \cdot 545) + Ca$$

$$= 7.9201 \text{ mm}$$

Small End Hub MAWP:

$$= (S \cdot E \cdot t) / (R + 0.6 \cdot t) \text{ per UG-27 (c)(1)}$$

$$= (138 \cdot 1 \cdot 13) / (1243 + 0.6 \cdot 13)$$

$$= 1434.173 \text{ KPa}$$

Hub Small End Hub MAPnc:

$$= (Sa \cdot E \cdot t) / (R + 0.6 \cdot t) \text{ per UG-27 (c)(1)}$$

$$= (138 \cdot 1 \cdot 16) / (1240 + 0.6 \cdot 16)$$

$$= 1766.831 \text{ KPa}$$

Corroded Flange Thickness, $t_c = T - c_i$	208.000 mm
Corroded Flange ID, $B_{cor} = B + 2 \cdot c_i$	2486.000 mm
Corroded Large Hub, $g1_{cor} = g1 - c_i$	32.000 mm
Corroded Small Hub, $g0_{cor} = g0 - c_i$	13.000 mm
Code R Dimension, $R = ((C - B_{cor})/2) - g1_{cor}$	56.500 mm

Gasket Contact Width, $N = (G_o - G_i)/2$	22.000 mm
Basic Gasket Width, $b_o = N/2$	11.000 mm
Effective Gasket Width, $b = C_b \cdot \sqrt{b_o}$	8.358 mm
Gasket Reaction Diameter, $G = G_o - 2 \cdot b$	2537.285 mm

Basic Flange and Bolt Loads:

Hydrostatic End Load due to Pressure [H or Wo,1]:

$$= \pi/4 \cdot G^2 \cdot P$$

$$= \pi/4 \cdot 2537^2 \cdot 545$$

$$= 280956.812 \text{ Kg}$$

Contact Load on Gasket Surfaces [Hp or Wo,2]:

$$= 2 \cdot b \cdot \pi \cdot G \cdot m \cdot P$$

$$= 2 \cdot 8.36 \cdot \pi \cdot 2537 \cdot 3 \cdot 545$$

$$= 22210.883 \text{ Kg}$$

Hydrostatic End Load at Flange ID [Hd]:

$$= \pi/4 \cdot B_{cor}^2 \cdot P$$

$$= \pi/4 \cdot 2486^2 \cdot 545$$

$$= 269713.844 \text{ Kg}$$

Pressure Force on Flange Face [Ht]:

$$= H - H_d$$

$$= 280957 - 269714$$

$$= 11242.958 \text{ Kg}$$

Design Bolt Load for the Operating Condition [Wo]:

$$= \max(W_o, 1 + W_o, 2 + H'p, 0)$$

$$= \max(280957 + 22211 + 0, 0)$$

$$= 303167.688 \text{ Kg}$$

Design Bolt Load for the Gasket Seating Condition [Wg]:

$$= y \cdot b \cdot \pi \cdot G + y_{Part} \cdot b_{Part} \cdot l_p$$

$$= 69 \cdot 8.36 \cdot \pi \cdot 2537 + 0 \cdot 0 \cdot 0$$

$$= 468391.531 \text{ Kg}$$

Required Bolt Area [Am]:

$$= \max((W_o + Fa + 4Me/G) / S_b, W_g / S_a)$$

$$= \max((303168 + 0 + 4 \cdot 0 / 2537) / 172, 468392 / 172)$$

$$= 267.065 \text{ cm}^2$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 55 of 275

Flg Calc [Int P]: RHS Sh Fl 1

Flng: 35

6:05pm

Sep 8, 2026

ASME Maximum Circumferential Spacing between Bolts, Table 4.16.11 [Bsmax]:

$$= 2a + 6t/(m + 0.5)$$

$$= 2 \cdot 38.1 + 6 \cdot 208/(3 + 0.5)$$

$$= 432.771 \text{ mm}$$

Actual Circumferential Bolt Spacing [Bs]:

$$= C \cdot \sin(\pi / n)$$

$$= 2663 \cdot \sin(\pi / 64)$$

$$= 130.667 \text{ mm}$$

ASME Moment Multiplier for Bolt Spacing per Table 4.16.11 [Bsc]:

$$= \max(\sqrt{Bs/(2a + t)}, 1)$$

$$= \max(\sqrt{131/(2 \cdot 38.1 + 208)}, 1)$$

$$= 1.0000$$

Bolting Information for TEMA Imperial Thread Series (Non Mandatory):

	Minimum	Actual	Maximum
Bolt Area:	267.065	580.128	
Radial Distance between Hub and Bolts:	50.800	56.500	
Radial Distance between Bolts and Edge:	38.100	42.500	
Circ. Spacing between the Bolts:	82.550	130.667	432.771

Min. Gasket Contact Width (Brownell Young) [Not an ASME Calc] [Nmin]:

$$= Ab \cdot Sa / (y \cdot \pi (Go + Gi))$$

$$= 580 \cdot 172 / (69 \cdot \pi (2554 + 2510))$$

$$= 9.096 \text{ mm}$$

Recommended Minimum Gasket Contact Width per Table 4.16.2

Sheet Gaskets including laminated sheet gaskets with or without a metal core: 19 mm

Preformed comp. gaskets incl. spiral wound, jacketed, & solid flat metal gaskets: 16 mm

Flange Design Bolt Load, Gasket Seating [W or Wgs]:

$$= Sa \cdot Ab$$

$$= 172 \cdot 580$$

$$= 1017456.06 \text{ Kg}$$

Gasket Load for the Operating Condition [HG]:

$$= Wo - H$$

$$= 303168 - 280957$$

$$= 22210.89 \text{ Kg}$$

Moment Arm Calculations:

Distance to Gasket Load Reaction [hg]:

$$= (C - G) / 2$$

$$= (2663 - 2537) / 2$$

$$= 62.8575 \text{ mm}$$

Distance to Face Pressure Reaction [ht]:

$$= 0.5 (C - B) / 2 + hg$$

$$= 0.5 (2663 - 2486) / 2 + 62.9$$

$$= 75.6788 \text{ mm}$$

Distance to End Pressure Reaction [hd]:

$$= (C - B - g1) / 2$$

$$= (2663 - 2486 - 32) / 2$$

$$= 72.5000 \text{ mm}$$

Summary of Moments for Internal Pressure: (Kg-m.)

Loading	Force	Distance	Bolt Corr	Moment
---------	-------	----------	-----------	--------



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 56 of 275

Flg Calc [Int P]: RHS Sh Fl 1

Flng: 35

6:05pm

Sep 8, 2026

End Pressure, Md	269714.	72.5000	1.0000	19555.
Face Pressure, Mt	11243.	75.6788	1.0000	851.
Gasket Load, Mg	22211.	62.8575	1.0000	1396.
Gasket Seating, Matm	1017456.	62.8575	1.0000	63956.

Total Moment for Operation, Mo 21802. Kg-m.
Total Moment for Gasket seating, Mg 63956. Kg-m.

Effective Hub Length, ho = sqrt(Bcor*goCor) 179.772 mm
Hub Ratio, h/h0 = HL / H0 0.417
Thickness Ratio, g1/g0 = (g1Cor/goCor) 2.462

Flange Factors for Integral Flange:

Factor F per 4.16.5 0.835
Factor V per 4.16.5 0.216
Factor f per 4.16.5 2.372

Stress factor from Table 4.16.4 [K]:

= A / B
= 2748/2486
= 1.105

Stress factor from Table 4.16.4 [Y]:

= (0.66845 + (5.7169(K² • log10(K))) / (K² - 1)) / (K - 1)
= (0.66845 + (5.7169(1.11² • log10(1.11))) / (1.11² - 1)) / (1.11 - 1)
= 19.341

Stress factor from Table 4.16.4 [T]:

= (K²(1 + 8.55246 • log10(K)) - 1) / ((1.0472 + 1.9448 • K²) • (K - 1))
= (1.11²(1 + 8.55246 • log10(1.11)) - 1) / ((1.0472 + 1.9448 • 1.11²) • (1.11 - 1))
= 1.875

Stress factor from Table 4.16.4 [U]:

= (K²(1 + 8.55246 • log10(K)) - 1) / (1.36136(K² - 1) • (K - 1))
= (1.11²(1 + 8.55246 • log10(1.11)) - 1) / (1.36136(1.11² - 1) • (1.11 - 1))
= 21.254

Stress factor from Table 4.16.4 [Z]:

= (K² + 1) / (K² - 1)
= (1.11² + 1) / (1.11² - 1)
= 10.014

Stress factor from Table 4.16.4 for integral flanges [d]:

= U • g0² • h0 / V
= 21.3 • 13² • 180 / 0.22
= 2982691.000 mm³

Stress factor from Table 4.16.4 for integral flanges [e]:

= F / h0
= 0.84/180
= 0.005 1/mm

Stress factor from Table 4.16.4 [L]:

= (t • e + 1) / T + t³/d
= (208 • 0.0046 + 1) / 1.88 + 208³/2982691
= 4.066

Flange Stresses

Longitudinal Hub Stress, Operating [SHo]:

= (f • Mop / Bcor) / (L • g1²)
= (2.37•21802/2486)/(4.07•32²)
= 49.01 N./mm²

Longitudinal Hub Stress, Seating [SHa]:



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 57 of 275

Flg Calc [Int P]: RHS Sh Fl 1

Flng: 35

6:05pm

Sep 8, 2026

$$= (f \cdot \text{Matm} / \text{Bcor}) / (L \cdot g^{12})$$

$$= (2.37 \cdot 63956 / 2486) / (4.07 \cdot 32^2)$$

$$= 143.77 \text{ N./mm}^2$$

Radial Flange Stress, Operating [SRo]:

$$= (\beta \cdot \text{Mop} / \text{Bcor}) / (L \cdot t^2)$$

$$= (2.29 \cdot 21802 / 2486) / (4.07 \cdot 208^2)$$

$$= 1.12 \text{ N./mm}^2$$

Radial Flange Stress, Seating [SRa]:

$$= (\beta \cdot \text{Matm} / \text{Bcor}) / (L \cdot t^2)$$

$$= (2.29 \cdot 63956 / 2486) / (4.07 \cdot 208^2)$$

$$= 3.28 \text{ N./mm}^2$$

Tangential Flange Stress, Operating [STo]:

$$= (Y \cdot \text{Mo} / (t^2 \cdot \text{Bcor})) - Z \cdot \text{SRo}$$

$$= (19.3 \cdot 21802 / (208^2 \cdot 2486)) - 10 \cdot 1.12$$

$$= 27.24 \text{ N./mm}^2$$

Tangential Flange Stress, Seating [STa]:

$$= (y \cdot \text{Matm} / (t^2 \cdot \text{Bcor})) - Z \cdot \text{SRa}$$

$$= (19.3 \cdot 63956 / (208^2 \cdot 2486)) - 10 \cdot 3.28$$

$$= 79.92 \text{ N./mm}^2$$

Average Flange Stress, Operating [SAo]:

$$= (\text{SHo} + \max(\text{SRo}, \text{STo})) / 2$$

$$= (49 + \max(1.12, 27.2)) / 2$$

$$= 38.13 \text{ N./mm}^2$$

Average Flange Stress, Seating [SAa]:

$$= (\text{SHa} + \max(\text{SRa}, \text{STa})) / 2$$

$$= (144 + \max(3.28, 79.9)) / 2$$

$$= 111.84 \text{ N./mm}^2$$

Bolt Stress, Operating [BSo]:

$$= \text{Wm1} / \text{Ab}$$

$$= 303168 / 580$$

$$= 51.25 \text{ N./mm}^2$$

Bolt Stress, Seating [BSa]:

$$= (\text{Wm2} / \text{Ab})$$

$$= (468392 / 580)$$

$$= 79.18 \text{ N./mm}^2$$

Flange Stress Analysis Results: N./mm²

	Actual	Operating Allowed	Gasket Actual	Seating Allowed
Longitudinal Hub	49.01	207.00	143.77	207.00
Radial Flange	1.12	138.00	3.28	138.00
Tangential Flange	27.24	138.00	79.92	138.00
Maximum Average	38.13	138.00	111.84	138.00
Bolting	51.25	172.00	79.18	172.00

Minimum Required Flange Thickness [Rigidity] 206.375 mm

Estimated M.A.W.P. (Operating) 1434 KPa.

Estimated Finished Weight of Flange at given Thk. 1916.3 kg.

Estimated Unfinished Weight of Forging at given Thk 2439.3 kg.

Flange Stress results per WRC-538 at computed S_{fmax} (N./mm²):



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 58 of 275

Flg Calc [Int P]: RHS Sh Fl 1

Flng: 35

6:05pm

Sep 8, 2026

		Actual	Operating Allowed	stress ratio	Gasket Actual	Seating Allowed	stress ratio
Longitudinal Hub	Sh	499.99	499.99	1.000	499.99	499.99	1.000
Tangential Flange	St	278.48	374.99	0.743	278.48	374.99	0.743
Tangential Flange	Sto	164.45	250.00	0.658	164.45	250.00	0.658
Combined	Sh/f + St	489.64	749.99	0.653	489.64	749.99	0.653
Combined	Sr + St	289.91	749.99	0.387	289.91	749.99	0.387
Combined	Sh + Sto	664.44	749.99	0.886	664.44	749.99	0.886
Radial Flange	Sr	11.44	499.99	0.023	11.44	499.99	0.023
Maximum Stress Ratio				1.000			1.000

Coefficients for f and f_2

	f	f_2	f_3
a	-0.71375912	-0.01447638	-0.06456312
b	-0.12846279	-0.27814745	-0.08232239
c	1.08037907	0.01035395	0.13691677
d	0.99766848	1.37984158	-0.77879888
e	1.21823466	-0.34346764	0.14909019
f	0.01024612	0.02536192	0.00660062
g	0.4262313	-0.0014508	0.0616252
h	1.4204976	2.25543162	0.74639834
i	-0.70278181	-0.60889597	-0.079595
j	-0.02483937	-0.15735462	0.09851673
k	-1.59460436	1.22516062	-0.1121436

$$f_n = \frac{\left[a + c \left(\frac{g_1}{g_0} \right) + e \left(\frac{h}{h_0} \right) + g \left(\frac{g_1}{g_0} \right)^2 + i \left(\frac{h}{h_0} \right)^2 + k \left(\frac{g_1}{g_0} \right) \left(\frac{h}{h_0} \right) \right]}{\left[1 + b \left(\frac{g_1}{g_0} \right) + d \left(\frac{h}{h_0} \right) + f \left(\frac{g_1}{g_0} \right)^2 + h \left(\frac{h}{h_0} \right)^2 + j \left(\frac{g_1}{g_0} \right) \left(\frac{h}{h_0} \right) \right]}$$

Hub Stress Correction Factor [f]:

= max(1; F1num / F1den)

= max(1; 3.28/1.38)

= 2.3678

Hub Stress Correction Factor [f2]:

= max(0.25; fn2) if $h/h_0 < 0.35$, else max (0.25; fn3)

= max(0.25; 1.01/1.28) if $h/h_0 < 0.35$, else max (0.25; 0.58/0.74)

= 0.7788

In this case, the hub ratio h/h_0 , 0.4172 was ≥ 0.35 .

PV Elite iterates on the assembly bolt load stress, Sfmax, until it exceeds the limits provided by WRC 538.



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 59 of 275

Flg Calc [Int P]: RHS Sh Fl 1

Flng: 35 6:05pm

Sep 8, 2026

Bolting and Gasket Calculations per ASME PCC-1 Appendix O:

Input Data:

Maximum permissible bolt stress	Sbmax	507.5 N./mm ²
Minimum permissible bolt stress	Sbmin	290.0 N./mm ²
Max. permissible bolt stress prior to flange damage	Sfmax	599.3 N./mm ²
Target assembly gasket stress	SgT	208.0 N./mm ²
Maximum permissible gasket stress	Sgmax	276.0 N./mm ²
Minimum gasket operating stress	Sgmin-O	97.0 N./mm ²
Minimum gasket seating stress	Sgmin-S	140.0 N./mm ²
Nut Factor	K	0.200
Fraction of Gasket Load remaining after relaxation	Phig	0.700
Root Area of a Single Bolt	Abs	9.0645 cm ²
Max. permissible single flange rotation for gasket	Thetagmax	1.000 deg

Calculated Results:

Flange Material Ambient Yield Stress	Sya	250.0 N./mm ²
Flange Material Operating Yield Stress	Syo	222.2 N./mm ²
Single flange rotation at Sfmax	Thetafmax	0.591 deg

Gasket Contact Area [Ag]:

$$= \pi/4 (GO.D.^2 - GI.D.^2)$$

$$= \pi/4 (2554^2 - 2510^2)$$

$$= 1750.0 \text{ cm}^2$$

Target Bolt Stress [Sbsel]: (Eq. O-1)

$$= SgT \cdot Ag / (nb \cdot Abs)$$

$$= 208 \cdot 1750 / (64 \cdot 9.06)$$

$$= 627.4 \text{ N./mm}^2$$

Upper Bolt Stress Limit [Sbsel]: (Eq. O-4)

$$= \min(Sbsel; Sbmax)$$

$$= \min(627; 508)$$

$$= 507.5 \text{ N./mm}^2$$

Lower Bolt Stress Limit [Sbsel]: (Eq. O-5)

$$= \max(Sbsel; Sbmin)$$

$$= \max(508; 290)$$

$$= 507.5 \text{ N./mm}^2$$

Upper Bolt Stress Limit including the Flange [Sbsel]: (Eq. O-6)

$$= \min(Sbsel; Sfmax)$$

$$= \min(508; 599)$$

$$= 507.5 \text{ N./mm}^2$$

Check if Gasket Assembly Seating Stress is achieved. (Eq. O-7)

$$\therefore Sbsel \geq Sgmin-S (Ag / (nb \cdot Abs))$$

$$\therefore 508 \geq 140 (1750 / (64 \cdot 9.06))$$

$$\therefore 507.5 \geq 422.3 \text{ N./mm}^2 \text{ Check Passes}$$

Check if Gasket Operating Stress is maintained. (Eq. O-8)

$$\therefore Sbsel \geq (Sgmin-O \cdot Ag + \pi/4 \cdot Pmax \cdot GI.D.^2) / (\phi G \cdot Abs \cdot nb)$$

$$\therefore 508 \geq (97 \cdot 1750 + \pi/4 \cdot 545 \cdot 2510^2) / (0.7 \cdot 9.06 \cdot 64)$$

$$\therefore 507.5 \geq 484.4 \text{ N./mm}^2 \text{ Check Passes}$$

Check if Gasket Maximum Stress is achieved. (Eq. O-9)

$$\therefore Sbsel \leq Sgmax (Ag / (nb \cdot Abs))$$

$$\therefore 508 \leq 276 (1750 / (64 \cdot 9.06))$$

$$\therefore 507.5 \leq 832.6 \text{ N./mm}^2 \text{ Check Passes}$$

Check if Flange Rotation Limit is exceeded. (Eq. O-10)

$$\therefore Sbsel \leq Sfmax (thetagmax / thetafmax)$$

$$\therefore 508 \leq 599 (1/0.59)$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 60 of 275

Flg Calc [Int P]: RHS Sh Fl 1

Flng: 35

6:05pm

Sep 8, 2026

:: 507.5 ≤ 1014.1 N./mm² Check Passes

Assembly Bolt Torque [Tb]: (Eq. O-2)

= Sbsel • K • Abs • φb

= 508 • 0.2 • 9.06 • 38.1

= 357.4 Kg-m.

Bolt Allowable Stress for: SA-193 B8 Cl. 2 SbB8 107 N./mm²

Bolt Allowable Stress for: SA-193 B7 Sb 171 N./mm²

Note: Since Sb ≥ SbB8, bolt allowable stress comparison check Passes (see Div 1 UG-44(b)).

Flange rigidity based on required thickness [ASME]:

Flange Rigidity Criterion, Seating per Table 4.16.10 [Jg]:

= 52.14 • Ma / Bsc • Cnvfac • V / (λ • Eamb • go² • ho • Ki)

= 52.14 • 63956 / 1 • 9807 • 0.22 / (3.86 • 201334 • 13² • 180 • 0.3)

= 1.000 (should be ≤ 1)

Flange Rigidity Criterion, Operating per Table 4.16.10 [Jo]:

= 52.14 • Mo / Bsc • Cnvfac • V / (λ • Eop • goc² • ho • Ki)

= 52.14 • 21802 / 1 • 9807 • 0.22 / (3.86 • 194922 • 13² • 180 • 0.3)

= 0.352 (should be ≤ 1)

Flange rigidity based on given thickness [ASME]:

Flange Rigidity Criterion, Seating per Table 4.16.10 [Jg]:

= 52.14 • Ma / Bsc • Cnvfac • V / (λ • Eamb • go² • ho • Ki)

= 52.14 • 63956 / 1 • 9807 • 0.22 / (4.07 • 201334 • 13² • 180 • 0.3)

= 0.949 (should be ≤ 1)

Flange Rigidity Criterion, Operating per Table 4.16.10 [Jo]:

= 52.14 • Mo / Bsc • Cnvfac • V / (λ • Eop • goc² • ho • Ki)

= 52.14 • 21802 / 1 • 9807 • 0.22 / (4.07 • 194922 • 13² • 180 • 0.3)

= 0.334 (should be ≤ 1)

Minimum Design Metal Temperature Results:

Thickness Ratio = 0.6, Temperature Reduction per Fig. UCS 66.1 = 23 °C

Min Metal Temp. w/o impact per UCS-66, Curve B -14 °C

Min Metal Temp per UCS-66 and UCS-68(c), PWHT credit -31 °C

Min Metal Temp. at Required thickness (UCS 66.1) -48 °C

Note: UCS-66(b)(-c) was considered in the flange MDMT calculation.

Per ASME VIII-2, 4.16.2.3, Perform Calculations in the New Condition:

Flange Stress Analysis Results: N./mm²

	Operating		Gasket Seating	
	Actual	Allowed	Actual	Allowed
Longitudinal Hub	45.51	207.00	130.95	207.00
Radial Flange	1.33	138.00	3.84	138.00
Tangential Flange	24.25	138.00	69.79	138.00
Maximum Average	34.88	138.00	100.37	138.00
Bolting	51.25	172.00	79.18	172.00

Minimum Req'd Thickness, ambient, no Corrosion: 192.913 mm

PV Elite is a trademark of Hexagon AB, 2026, All rights reserved.



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 61 of 275

Flg Calc [Int P]: RHS Sh Fl 2

Flng: 36

6:05pm


Sep 8,2026

Flange Input Data Values

Description: RHS Sh Fl 2 :

RHS Shell Flg-2

Flange Type	Integral Weld Neck		
Design Pressure	P	544.90	KPa.
Design Temperature		130	°C
Internal Corrosion Allowance	ci	3.0000	mm
External Corrosion Allowance	ce	0.0000	mm
Use Corrosion Allowance in Thickness Calcs.		Yes	
Flange Inside Diameter	B	2480.000	mm
Flange Outside Diameter	A	2748.000	mm
Flange Thickness	t	202.0000	mm
Thickness of Hub at Small End	go	20.0000	mm
Thickness of Hub at Large End	gl	35.0000	mm
Length of Hub	h	75.0000	mm
Flange Material		SA-266 2	
Flange Material UNS number		K03506	
Flange Allowable Stress At Temperature	Sfo	138.00	N./mm ²
Flange Allowable Stress At Ambient	Sfa	138.00	N./mm ²
Bolt Material		SA-193 B7	
Bolt Allowable Stress At Temperature	Sb	172.00	N./mm ²
Bolt Allowable Stress At Ambient	Sa	172.00	N./mm ²
Diameter of Bolt Circle	C	2663.000	mm
Nominal Bolt Diameter	a	38.1000	mm
Type of Threads	TEMA Thread Series		
Number of Bolts		64	
Flange Face Outside Diameter	Fod	2565.000	mm
Flange Face Inside Diameter	Fid	2480.000	mm
Flange Facing Sketch		Sketch 1a	
Gasket Outside Diameter	Go	2554.000	mm
Gasket Inside Diameter	Gi	2510.000	mm
Gasket Factor	m	3.0000	
Gasket Design Seating Stress	y	68.95	N./mm ²
Gasket Thickness	tg	3.1750	mm
Raised face depth	Fd	0.0000	mm

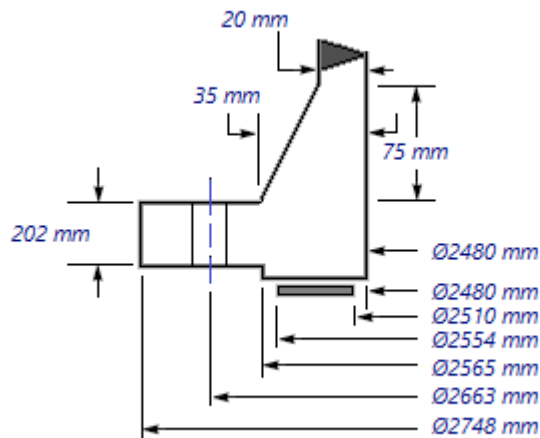



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_Top

Page 62 of 275

Flg Calc [Int P]: RHS Sh Fl 2

Flng: 36

6:05pm

Sep 8, 2026

ASME Code, Section VIII Division 1, 2025

Hub Small End Required Thickness due to Internal Pressure:

$$= (P \cdot (D/2 + Ca)) / (S \cdot E - 0.6 \cdot P) \text{ per UG-27 (c)(1)}$$

$$= (545 \cdot (2480/2 + 3)) / (138 \cdot 1 - 0.6 \cdot 545) + Ca$$

$$= 7.9201 \text{ mm}$$

Small End Hub MAWP:

$$= (S \cdot E \cdot t) / (R + 0.6 \cdot t) \text{ per UG-27 (c)(1)}$$

$$= (138 \cdot 1 \cdot 17) / (1243 + 0.6 \cdot 17)$$

$$= 1871.865 \text{ KPa}$$

Hub Small End Hub MAPnc:

$$= (Sa \cdot E \cdot t) / (R + 0.6 \cdot t) \text{ per UG-27 (c)(1)}$$

$$= (138 \cdot 1 \cdot 20) / (1240 + 0.6 \cdot 20)$$

$$= 2204.305 \text{ KPa}$$

Corroded Flange Thickness, $t_c = T - c_i$	199.000 mm
Corroded Flange ID, $B_{cor} = B + 2 \cdot c_i$	2486.000 mm
Corroded Large Hub, $g1_{cor} = g1 - c_i$	32.000 mm
Corroded Small Hub, $g0_{cor} = g0 - c_i$	17.000 mm
Code R Dimension, $R = ((C - B_{cor})/2) - g1_{cor}$	56.500 mm

Gasket Contact Width, $N = (G_o - G_i)/2$	22.000 mm
Basic Gasket Width, $b_o = N/2$	11.000 mm
Effective Gasket Width, $b = C_b \cdot \sqrt{b_o}$	8.358 mm
Gasket Reaction Diameter, $G = G_o - 2 \cdot b$	2537.285 mm

Basic Flange and Bolt Loads:

Hydrostatic End Load due to Pressure [H or Wo,1]:

$$= \pi/4 \cdot G^2 \cdot P$$

$$= \pi/4 \cdot 2537^2 \cdot 545$$

$$= 280956.812 \text{ Kg}$$

Contact Load on Gasket Surfaces [Hp or Wo,2]:

$$= 2 \cdot b \cdot \pi \cdot G \cdot m \cdot P$$

$$= 2 \cdot 8.36 \cdot \pi \cdot 2537 \cdot 3 \cdot 545$$

$$= 22210.883 \text{ Kg}$$

Hydrostatic End Load at Flange ID [Hd]:

$$= \pi/4 \cdot B_{cor}^2 \cdot P$$

$$= \pi/4 \cdot 2486^2 \cdot 545$$

$$= 269713.844 \text{ Kg}$$

Pressure Force on Flange Face [Ht]:

$$= H - H_d$$

$$= 280957 - 269714$$

$$= 11242.958 \text{ Kg}$$

Design Bolt Load for the Operating Condition [Wo]:

$$= \max(W_o, 1 + W_o, 2 + H'p, 0)$$

$$= \max(280957 + 22211 + 0, 0)$$

$$= 303167.688 \text{ Kg}$$

Design Bolt Load for the Gasket Seating Condition [Wg]:

$$= y \cdot b \cdot \pi \cdot G + y_{Part} \cdot b_{Part} \cdot l_p$$

$$= 69 \cdot 8.36 \cdot \pi \cdot 2537 + 0 \cdot 0 \cdot 0$$

$$= 468391.531 \text{ Kg}$$

Required Bolt Area [Am]:

$$= \max((W_o + Fa + 4Me/G) / S_b, W_g / S_a)$$

$$= \max((303168 + 0 + 4 \cdot 0 / 2537) / 172, 468392 / 172)$$

$$= 267.065 \text{ cm}^2$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 63 of 275

Flg Calc [Int P]: RHS Sh Fl 2

Flng: 36

6:05pm

Sep 8, 2026

ASME Maximum Circumferential Spacing between Bolts, Table 4.16.11 [Bsmax]:

$$= 2a + 6t/(m + 0.5)$$

$$= 2 \cdot 38.1 + 6 \cdot 199/(3 + 0.5)$$

$$= 417.343 \text{ mm}$$

Actual Circumferential Bolt Spacing [Bs]:

$$= C \cdot \sin(\pi / n)$$

$$= 2663 \cdot \sin(\pi / 64)$$

$$= 130.667 \text{ mm}$$

ASME Moment Multiplier for Bolt Spacing per Table 4.16.11 [Bsc]:

$$= \max(\sqrt{Bs/(2a + t)}, 1)$$

$$= \max(\sqrt{131/(2 \cdot 38.1 + 199)}, 1)$$

$$= 1.0000$$

Bolting Information for TEMA Imperial Thread Series (Non Mandatory):

	Minimum	Actual	Maximum
Bolt Area:	267.065	580.128	
Radial Distance between Hub and Bolts:	50.800	56.500	
Radial Distance between Bolts and Edge:	38.100	42.500	
Circ. Spacing between the Bolts:	82.550	130.667	417.343

Min. Gasket Contact Width (Brownell Young) [Not an ASME Calc] [Nmin]:

$$= Ab \cdot Sa / (y \cdot \pi (Go + Gi))$$

$$= 580 \cdot 172 / (69 \cdot \pi (2554 + 2510))$$

$$= 9.096 \text{ mm}$$

Recommended Minimum Gasket Contact Width per Table 4.16.2

Sheet Gaskets including laminated sheet gaskets with or without a metal core: 19 mm

Preformed comp. gaskets incl. spiral wound, jacketed, & solid flat metal gaskets: 16 mm

Flange Design Bolt Load, Gasket Seating [W or Wgs]:

$$= Sa \cdot Ab$$

$$= 172 \cdot 580$$

$$= 1017456.06 \text{ Kg}$$

Gasket Load for the Operating Condition [HG]:

$$= Wo - H$$

$$= 303168 - 280957$$

$$= 22210.89 \text{ Kg}$$

Moment Arm Calculations:

Distance to Gasket Load Reaction [hg]:

$$= (C - G) / 2$$

$$= (2663 - 2537) / 2$$

$$= 62.8575 \text{ mm}$$

Distance to Face Pressure Reaction [ht]:

$$= 0.5 (C - B) / 2 + hg$$

$$= 0.5 (2663 - 2486) / 2 + 62.9$$

$$= 75.6788 \text{ mm}$$

Distance to End Pressure Reaction [hd]:

$$= (C - B - g1) / 2$$

$$= (2663 - 2486 - 32) / 2$$

$$= 72.5000 \text{ mm}$$

Summary of Moments for Internal Pressure: (Kg-m.)

Loading	Force	Distance	Bolt Corr	Moment
---------	-------	----------	-----------	--------



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 64 of 275

Flg Calc [Int P]: RHS Sh Fl 2

Flng: 36

6:05pm

Sep 8, 2026

End Pressure, Md	269714.	72.5000	1.0000	19555.
Face Pressure, Mt	11243.	75.6788	1.0000	851.
Gasket Load, Mg	22211.	62.8575	1.0000	1396.
Gasket Seating, Matm	1017456.	62.8575	1.0000	63956.

Total Moment for Operation, Mo 21802. Kg-m.
Total Moment for Gasket seating, Mg 63956. Kg-m.

Effective Hub Length, ho = sqrt(Bcor*goCor) 205.577 mm
Hub Ratio, h/h0 = HL / H0 0.365
Thickness Ratio, g1/g0 = (g1Cor/goCor) 1.882

Flange Factors for Integral Flange:

Factor F per 4.16.5 0.857
Factor V per 4.16.5 0.288
Factor f per 4.16.5 1.564

Stress factor from Table 4.16.4 [K]:

= A / B
= 2748/2486
= 1.105

Stress factor from Table 4.16.4 [Y]:

= (0.66845 + (5.7169 (K² • log10(K))) / (K² - 1)) / (K - 1)
= (0.66845 + (5.7169 (1.11² • log10(1.11))) / (1.11² - 1)) / (1.11 - 1)
= 19.341

Stress factor from Table 4.16.4 [T]:

= (K²(1 + 8.55246 • log10(K)) - 1) / ((1.0472 + 1.9448 • K²) • (K - 1))
= (1.11²(1 + 8.55246 • log10(1.11)) - 1) / ((1.0472 + 1.9448 • 1.11²) • (1.11 - 1))
= 1.875

Stress factor from Table 4.16.4 [U]:

= (K²(1 + 8.55246 • log10(K)) - 1) / (1.36136(K² - 1) • (K - 1))
= (1.11²(1 + 8.55246 • log10(1.11)) - 1) / (1.36136(1.11² - 1) • (1.11 - 1))
= 21.254

Stress factor from Table 4.16.4 [Z]:

= (K² + 1) / (K² - 1)
= (1.11² + 1) / (1.11² - 1)
= 10.014

Stress factor from Table 4.16.4 for integral flanges [d]:

= U • g0² • h0 / V
= 21.3 • 17² • 206 / 0.29
= 4390807.500 mm³

Stress factor from Table 4.16.4 for integral flanges [e]:

= F / h0
= 0.86/206
= 0.004 1/mm

Stress factor from Table 4.16.4 [L]:

= (t • e + 1) / T + t³/d
= (199 • 0.0042 + 1) / 1.88 + 199³/4390807
= 2.770

Flange Stresses

Longitudinal Hub Stress, Operating [SHo]:

= (f • Mop / Bcor) / (L • g1²)
= (1.56•21802/2486)/(2.77•32²)
= 47.42 N./mm²

Longitudinal Hub Stress, Seating [SHa]:



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 65 of 275

Flg Calc [Int P]: RHS Sh Fl 2

Flng: 36

6:05pm

Sep 8, 2026

$$= (f \cdot \text{Matm} / \text{Bcor}) / (L \cdot g^{12})$$

$$= (1.56 \cdot 63956 / 2486) / (2.77 \cdot 32^2)$$

$$= 139.11 \text{ N./mm}^2$$

Radial Flange Stress, Operating [SRo]:

$$= (\beta \cdot \text{Mop} / \text{Bcor}) / (L \cdot t^2)$$

$$= (2.11 \cdot 21802 / 2486) / (2.77 \cdot 199^2)$$

$$= 1.65 \text{ N./mm}^2$$

Radial Flange Stress, Seating [SRa]:

$$= (\beta \cdot \text{Matm} / \text{Bcor}) / (L \cdot t^2)$$

$$= (2.11 \cdot 63956 / 2486) / (2.77 \cdot 199^2)$$

$$= 4.84 \text{ N./mm}^2$$

Tangential Flange Stress, Operating [STo]:

$$= (Y \cdot \text{Mo} / (t^2 \cdot \text{Bcor})) - Z \cdot \text{SRo}$$

$$= (19.3 \cdot 21802 / (199^2 \cdot 2486)) - 10 \cdot 1.65$$

$$= 25.47 \text{ N./mm}^2$$

Tangential Flange Stress, Seating [STa]:

$$= (y \cdot \text{Matm} / (t^2 \cdot \text{Bcor})) - Z \cdot \text{SRa}$$

$$= (19.3 \cdot 63956 / (199^2 \cdot 2486)) - 10 \cdot 4.84$$

$$= 74.72 \text{ N./mm}^2$$

Average Flange Stress, Operating [SAo]:

$$= (\text{SHo} + \max(\text{SRo}, \text{STo})) / 2$$

$$= (47.4 + \max(1.65, 25.5)) / 2$$

$$= 36.45 \text{ N./mm}^2$$

Average Flange Stress, Seating [SAa]:

$$= (\text{SHA} + \max(\text{SRa}, \text{STa})) / 2$$

$$= (139 + \max(4.84, 74.7)) / 2$$

$$= 106.92 \text{ N./mm}^2$$

Bolt Stress, Operating [BSO]:

$$= \text{Wm1} / \text{Ab}$$

$$= 303168 / 580$$

$$= 51.25 \text{ N./mm}^2$$

Bolt Stress, Seating [BSa]:

$$= (\text{Wm2} / \text{Ab})$$

$$= (468392 / 580)$$

$$= 79.18 \text{ N./mm}^2$$

Flange Stress Analysis Results: N./mm²

	Actual	Operating Allowed	Gasket Actual	Seating Allowed
Longitudinal Hub	47.42	207.00	139.11	207.00
Radial Flange	1.65	138.00	4.84	138.00
Tangential Flange	25.47	138.00	74.72	138.00
Maximum Average	36.45	138.00	106.92	138.00
Bolting	51.25	172.00	79.18	172.00

Minimum Required Flange Thickness [Rigidity] 196.850 mm

Estimated M.A.W.P. (Operating) 1636 KPa.

Estimated Finished Weight of Flange at given Thk. 1848.8 kg.

Estimated Unfinished Weight of Forging at given Thk 2362.5 kg.

Flange Stress results per WRC-538 at computed S_{fmax} (N./mm²):



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 66 of 275

Flg Calc [Int P]: RHS Sh Fl 2

Flng: 36

6:05pm

Sep 8, 2026

		Actual	Operating Allowed	stress ratio	Gasket Actual	Seating Allowed	stress ratio
Longitudinal Hub	Sh	499.99	499.99	1.000	499.99	499.99	1.000
Tangential Flange	St	267.95	374.99	0.715	267.95	374.99	0.715
Tangential Flange	Sto	160.58	250.00	0.642	160.58	250.00	0.642
Combined	Sh/f + St	586.85	749.99	0.782	586.85	749.99	0.782
Combined	Sr + St	285.32	749.99	0.380	285.32	749.99	0.380
Combined	Sh + Sto	660.57	749.99	0.881	660.57	749.99	0.881
Radial Flange	Sr	17.37	499.99	0.035	17.37	499.99	0.035
Maximum Stress Ratio				1.000			1.000

Coefficients for f and f_2

	f	f_2	f_3
a	-0.71375912	-0.01447638	-0.06456312
b	-0.12846279	-0.27814745	-0.08232239
c	1.08037907	0.01035395	0.13691677
d	0.99766848	1.37984158	-0.77879888
e	1.21823466	-0.34346764	0.14909019
f	0.01024612	0.02536192	0.00660062
g	0.4262313	-0.0014508	0.0616252
h	1.4204976	2.25543162	0.74639834
i	-0.70278181	-0.60889597	-0.079595
j	-0.02483937	-0.15735462	0.09851673
k	-1.59460436	1.22516062	-0.1121436

$$f_n = \frac{\left[a + c \left(\frac{g_1}{g_0} \right) + e \left(\frac{h}{h_0} \right) + g \left(\frac{g_1}{g_0} \right)^2 + i \left(\frac{h}{h_0} \right)^2 + k \left(\frac{g_1}{g_0} \right) \left(\frac{h}{h_0} \right) \right]}{\left[1 + b \left(\frac{g_1}{g_0} \right) + d \left(\frac{h}{h_0} \right) + f \left(\frac{g_1}{g_0} \right)^2 + h \left(\frac{h}{h_0} \right)^2 + j \left(\frac{g_1}{g_0} \right) \left(\frac{h}{h_0} \right) \right]}$$

Hub Stress Correction Factor [f]:

= max(1; F1num / F1den)

= max(1; 2.09/1.33)

= 1.5678

Hub Stress Correction Factor [f2]:

= max(0.25; fn2) if $h/h_0 < 0.35$, else max (0.25; fn3)

= max(0.25; 0.63/1.26) if $h/h_0 < 0.35$, else max (0.25; 0.38/0.75)

= 0.5035

In this case, the hub ratio h/h_0 , 0.3648 was ≥ 0.35 .

PV Elite iterates on the assembly bolt load stress, Sfmax, until it exceeds the limits provided by WRC 538.



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 67 of 275

Flg Calc [Int P]: RHS Sh Fl 2

Flng: 36

6:05pm

Sep 8, 2026

Bolting and Gasket Calculations per ASME PCC-1 Appendix O:

Input Data:

Maximum permissible bolt stress	Sbmax	507.5 N./mm ²
Minimum permissible bolt stress	Sbmin	290.0 N./mm ²
Max. permissible bolt stress prior to flange damage	Sfmax	616.8 N./mm ²
Target assembly gasket stress	SgT	208.0 N./mm ²
Maximum permissible gasket stress	Sgmax	276.0 N./mm ²
Minimum gasket operating stress	Sgmin-O	97.0 N./mm ²
Minimum gasket seating stress	Sgmin-S	140.0 N./mm ²
Nut Factor	K	0.200
Fraction of Gasket Load remaining after relaxation	Phig	0.700
Root Area of a Single Bolt	Abs	9.0645 cm ²
Max. permissible single flange rotation for gasket	Thetagmax	1.000 deg

Calculated Results:

Flange Material Ambient Yield Stress	Sya	250.0 N./mm ²
Flange Material Operating Yield Stress	Syo	222.2 N./mm ²
Single flange rotation at Sfmax	Thetafmax	0.679 deg

Gasket Contact Area [Ag]:

$$= \pi/4 (GO.D.^2 - GI.D.^2)$$

$$= \pi/4 (2554^2 - 2510^2)$$

$$= 1750.0 \text{ cm}^2$$

Target Bolt Stress [Sbsel]: (Eq. O-1)

$$= SgT \cdot Ag / (nb \cdot Ab)$$

$$= 208 \cdot 1750 / (64 \cdot 9.06)$$

$$= 627.4 \text{ N./mm}^2$$

Upper Bolt Stress Limit [Sbsel]: (Eq. O-4)

$$= \min(Sbsel; Sbmax)$$

$$= \min(627; 508)$$

$$= 507.5 \text{ N./mm}^2$$

Lower Bolt Stress Limit [Sbsel]: (Eq. O-5)

$$= \max(Sbsel; Sbmin)$$

$$= \max(508; 290)$$

$$= 507.5 \text{ N./mm}^2$$

Upper Bolt Stress Limit including the Flange [Sbsel]: (Eq. O-6)

$$= \min(Sbsel; Sfmax)$$

$$= \min(508; 617)$$

$$= 507.5 \text{ N./mm}^2$$

Check if Gasket Assembly Seating Stress is achieved. (Eq. O-7)

$$:: Sbsel \geq Sgmin-S (Ag / (nb \cdot Abs))$$

$$:: 508 \geq 140 (1750 / (64 \cdot 9.06))$$

$$:: 507.5 \geq 422.3 \text{ N./mm}^2 \text{ Check Passes}$$

Check if Gasket Operating Stress is maintained. (Eq. O-8)

$$:: Sbsel \geq (Sgmin-O \cdot Ag + \pi/4 \cdot Pmax \cdot GI.D.^2) / (\phi G \cdot Abs \cdot nb)$$

$$:: 508 \geq (97 \cdot 1750 + \pi/4 \cdot 545 \cdot 2510^2) / (0.7 \cdot 9.06 \cdot 64)$$

$$:: 507.5 \geq 484.4 \text{ N./mm}^2 \text{ Check Passes}$$

Check if Gasket Maximum Stress is achieved. (Eq. O-9)

$$:: Sbsel \leq Sgmax (Ag / (nb \cdot Abs))$$

$$:: 508 \leq 276 (1750 / (64 \cdot 9.06))$$

$$:: 507.5 \leq 832.6 \text{ N./mm}^2 \text{ Check Passes}$$

Check if Flange Rotation Limit is exceeded. (Eq. O-10)

$$:: Sbsel \leq Sfmax (thetagmax / thetafmax)$$

$$:: 508 \leq 617 (1/0.68)$$



PV Elite 28 Licensee: SL User
 FileName : 108-CA-CB_(Top) Page 68 of 275
 Flg Calc [Int P]: RHS Sh Fl 2 Flng: 36 6:05pm Sep 8,2026

:: 507.5 ≤ 908.7 N./mm² Check Passes

Assembly Bolt Torque [Tb]: (Eq. O-2)

$$= Sbsel \cdot K \cdot Abs \cdot \phi_b$$

$$= 508 \cdot 0.2 \cdot 9.06 \cdot 38.1$$

$$= 357.4 \text{ Kg-m.}$$

Bolt Allowable Stress for: SA-193 B8 Cl. 2 SbB8 107 N./mm²
 Bolt Allowable Stress for: SA-193 B7 Sb 171 N./mm²

Note: Since $S_b \geq S_{bB8}$, bolt allowable stress comparison check Passes (see Div 1 UG-44(b)).

Flange rigidity based on required thickness [ASME]:

Flange Rigidity Criterion, Seating per Table 4.16.10 [Jg]:

$$= 52.14 \cdot M_a / Bsc \cdot Cnvfac \cdot V / (\lambda \cdot Eamb \cdot go^2 \cdot ho \cdot Ki)$$

$$= 52.14 \cdot 63956 / 1 \cdot 9807 \cdot 0.29 / (2.62 \cdot 201334 \cdot 17^2 \cdot 206 \cdot 0.3)$$

$$= 0.999 \text{ (should be } \leq 1)$$

Flange Rigidity Criterion, Operating per Table 4.16.10 [Jo]:

$$= 52.14 \cdot M_o / Bsc \cdot Cnvfac \cdot V / (\lambda \cdot Eop \cdot goc^2 \cdot ho \cdot Ki)$$

$$= 52.14 \cdot 21802 / 1 \cdot 9807 \cdot 0.29 / (2.62 \cdot 194922 \cdot 17^2 \cdot 206 \cdot 0.3)$$

$$= 0.351 \text{ (should be } \leq 1)$$

Flange rigidity based on given thickness [ASME]:

Flange Rigidity Criterion, Seating per Table 4.16.10 [Jg]:

$$= 52.14 \cdot M_a / Bsc \cdot Cnvfac \cdot V / (\lambda \cdot Eamb \cdot go^2 \cdot ho \cdot Ki)$$

$$= 52.14 \cdot 63956 / 1 \cdot 9807 \cdot 0.29 / (2.77 \cdot 201334 \cdot 17^2 \cdot 206 \cdot 0.3)$$

$$= 0.946 \text{ (should be } \leq 1)$$

Flange Rigidity Criterion, Operating per Table 4.16.10 [Jo]:

$$= 52.14 \cdot M_o / Bsc \cdot Cnvfac \cdot V / (\lambda \cdot Eop \cdot goc^2 \cdot ho \cdot Ki)$$

$$= 52.14 \cdot 21802 / 1 \cdot 9807 \cdot 0.29 / (2.77 \cdot 194922 \cdot 17^2 \cdot 206 \cdot 0.3)$$

$$= 0.333 \text{ (should be } \leq 1)$$

Minimum Design Metal Temperature Results:

Thickness Ratio = 0.56, Temperature Reduction per Fig. UCS 66.1 = 25 °C

Min Metal Temp. w/o impact per UCS-66, Curve B	-7 °C
Min Metal Temp per UCS-66 and UCS-68(c), PWHT credit	-24 °C
Min Metal Temp. at Required thickness (UCS 66.1)	-48 °C
Min Metal Temp. w/o impact per UG-20(f)	-29 °C

Note: UCS-66(b)(c) was considered in the flange MDMT calculation.

Per ASME VIII-2, 4.16.2.3, Perform Calculations in the New Condition:

Flange Stress Analysis Results: N./mm²

	Operating		Gasket Seating	
	Actual	Allowed	Actual	Allowed
Longitudinal Hub	44.15	207.00	127.04	207.00
Radial Flange	1.87	138.00	5.38	138.00
Tangential Flange	22.41	138.00	64.48	138.00
Maximum Average	33.28	138.00	95.76	138.00
Bolting	51.25	172.00	79.18	172.00

Minimum Req'd Thickness, ambient, no Corrosion: 180.797 mm



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 69 of 275

Internal Pressure Calculations: Step: 9 6:05pm Sep 8,2026

Internal Pressure Results Summary:

Element Thickness, Pressure, Diameter and Allowable Stress :

From	To	Int. Press + Liq. Hd KPa.	Nominal Thickness mm	Total Corr Allowance mm	Element Diameter mm	Allowable Stress(SE) N./mm ²	Element#
LHS Blind Flang		1027.9	144	3	2748	138	1
LHS CH flange-1		1024.9	220	3	2480	138	2
LHS Ch Shell		1024.1	20	3	2480	138	3
LHS Ch Flg-2		1024.9	220	3	2480	138	4
LHS Shell Flg-1		544.9	228	3	2480	138	5
Main Shell		544.14	18	3	2480	138	6
RHS Shell Flg-1		544.9	219	3	2480	138	7
RHS Shell Flg-2		544.9	210	3	2480	138	8
RHS		544.14	20	3	2480	138	9
RHS dish end		544.14	20	3	2480	138	10

Element Required Thickness and MAWP :

From	To	Design Pressure KPa.	M.A.W.P. Corroded KPa.	M.A.P. New & Cold KPa.	Minimum Thickness mm	Required Thickness mm	Element#
LHS Blind Flang		1000	1088	1166	136	130.673	1
LHS CH flange-1		1000	1819	2057	212	207.95	2
LHS Ch Shell		1000	1848	2204	20	12.2667	3
LHS Ch Flg-2		1000	1819	2057	212	207.95	4
LHS Shell Flg-1		520	1409	1767	220	216.84	5
Main Shell		520	1629	1986	18	7.91322	6
RHS Shell Flg-1		520	1409	1767	211	206.375	7
RHS Shell Flg-2		520	1611	1829	202	196.85	8
RHS		520	1848	2204	20	7.91322	9
RHS dish end		520	1422	1778	16	7.88781	10

Summary of Heat Exchanger Maximum Allowable Working Pressures :

Note:

For Exchanger designs, the following values include MAWPs that consider the tubesheet, tubes, tube/tubesheet joint etc. These values were determined by iteration. Review the tubesheet analysis report for more information.

Shell Side MAWP = 1057 KPa.
 Shell Side MAPnc = 1167 KPa.
 Channel Side MAWP = 1057 KPa.
 Channel Side MAPnc = 1166 KPa.

Elements Suitable for Design Internal Pressure.

PV Elite is a trademark of Hexagon AB, 2026, All rights reserved.



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 70 of 275

Element: LHS Ch Shell


Step: 10

6:05pm

Sep 8,2026

Internal Pressure Calculation Results:

ASME Code, Section VIII Division 1, 2025

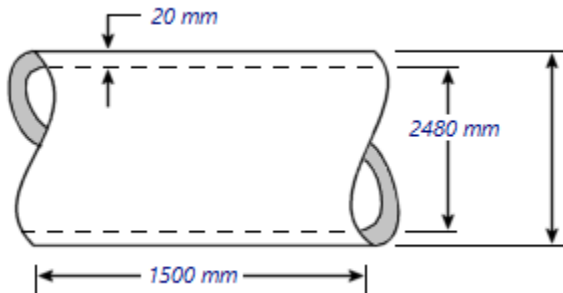

Internal Pressure Results for: LHS Ch Shell

Cylindrical Shell Design Information:			
Design Pressure P	1024.142 KPa.	Int. Design Temperature	82 °C
Material	SA-516 70	Ext. Design Temperature	82 °C
Length	1500.000 mm	External Pressure Chart	CS-2
		UNS Number	K02700
Int. Corr. All. c	3.0000 mm	Allowable Stress (ope) S	138.0 N./mm ²
Ext. Corr. All. ce	0.0000 mm	Allowable Stress (amb) Sa	138.0 N./mm ²
Inside Diameter Di	2480.000 mm	Actual Stress	75.5 N./mm ²
Spec. Min. Thk t,e, or sa	20.0000 mm	Spec. Nominal Thk.	20.000 mm
Surface Area	118752.2 cm ²	SG of Contents	1.000
Element Volume	7247067.0 cm ³	Weight of Contents	7233.8 Kg
Empty Weight	1826.2 Kg	Operating Weight	9059.9 Kg
		Comp. All. Ope. Stress	119.7 N./mm ²

Radiography Information:			
User Defined		User Defined	
Circ. Joint Efficiency	100 %	Long. Joint Eff.	E or v 100 %

Required Thickness due to Internal Pressure [tr]:

$$\begin{aligned}
 &= (P \cdot R) / (S \cdot E - 0.6 \cdot P) \text{ per UG-27 (c)(1)} \\
 &= (1024 \cdot 1243) / (138 \cdot 1 - 0.6 \cdot 1024) \\
 &= 9.2667 + 3.0000 = 12.2667 \text{ mm}
 \end{aligned}$$

Max. Allowable Working Pressure at given Thickness, corroded [MAWP]:

Less Operating Hydrostatic Head Pressure of 24.142 KPa.

$$\begin{aligned}
 &= (S \cdot E \cdot t) / (R + 0.6 \cdot t) \text{ per UG-27 (c)(1)} \\
 &= (138 \cdot 1 \cdot 17) / (1243 + 0.6 \cdot 17) \\
 &= 1872 - 24.1 = 1848 \text{ KPa.}
 \end{aligned}$$

Maximum Allowable Pressure, New and Cold [MAPNC]:

$$\begin{aligned}
 &= (S \cdot E \cdot t) / (R + 0.6 \cdot t) \text{ per UG-27 (c)(1)} \\
 &= (138 \cdot 1 \cdot 20) / (1240 + 0.6 \cdot 20) \\
 &= 2204 \text{ KPa.}
 \end{aligned}$$

Actual stress at given pressure and thickness, corroded [Sact]:

$$\begin{aligned}
 &= (P \cdot (R + 0.6 \cdot t)) / (E \cdot t) \\
 &= (1024 \cdot (1243 + 0.6 \cdot 17)) / (1 \cdot 17) \\
 &= 75.502 \text{ N./mm}^2
 \end{aligned}$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 71 of 275

Element: LHS Ch Shell

Step: 10

6:05pm

Sep 8,2026

% Elongation per Table UG-79-1 ($50 \cdot t_{nom} / R_f \cdot (1 - R_f / R_o)$) 0.800 %

Minimum Design Metal Temperature Results:

Govrn. thk, $t_g = 20$, $t_r = 9.56$, $c = 3$ mm, $E^* = 1$

Thickness Ratio = $t_r \cdot E^* / (t_g - c) = 0.56$, Temp. Reduction = 26 °C

Min Metal Temp. w/o impact per UCS-66, Curve B -7 °C

Min Metal Temp. at Required thickness (UCS 66.1) -33 °C

Min Metal Temp. w/o impact per UG-20(f) -29 °C

MDMT Design Information:			
MDMT Curve	B	Press. at MDMT	1056.657 KPa.
UCS-66(b) red.	Yes	Min. Des. Mtl. Temp.	-12 °C
Governing Thk.	20.000 mm	Basic MDMT	-7 °C
Stress/Thk. Ratio	0.562	Temperature Difference	26 °C
UCS-66(c) red.	No	Computed Min. Temp.	-33 °C
		MDMT per UG-20(f)	-29 °C
		Joint Efficiency E^*	100 %

EXTERNAL PRESSURE RESULTS for: LHS Ch Shell

Cylindrical Shell From 30 to 40 Ext. Chart: CS-2 at 82 °C

Elastic Modulus from Chart: CS-2 at 82 °C: 199943392 KPa.

Results for Maximum Allowable Ext. Pressure				MAEP		
Tca	Outer Dia	Slen	Do/t	L/D	Factor A	Factor B
17.000	2520.00	1500.00	148.24	0.5952	0.0012866	92.67

$$MAEP = (4 \cdot B) / (3 \cdot (Do/t)) = (4 \cdot 92.7) / (3 \cdot 148) = 833 \text{ KPa.}$$

Results for Required Thickness				Tca		
Tca	Outer Dia	Slen	Do/t	L/D	Factor A	Factor B
6.517	2520.00	1500.00	386.70	0.5952	0.0003000	30.00

$$MAEP = (4 \cdot B) / (3 \cdot (Do/t)) = (4 \cdot 30) / (3 \cdot 387) = 103 \text{ KPa.}$$

Results for Maximum Stiffened Length				Slen		
Tca	Outer Dia	Slen	Do/t	L/D	Factor A	Factor B
17.000	2520.00	14520.72	148.24	5.7622	0.0001151	11.50

$$MAEP = (4 \cdot B) / (3 \cdot (Do/t)) = (4 \cdot 11.5) / (3 \cdot 148) = 103 \text{ KPa.}$$

PV Elite is a trademark of Hexagon AB, 2026, All rights reserved.



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 72 of 275

Element: Main Shell


Step: 11

6:05pm

Sep 8,2026

Internal Pressure Calculation Results:

ASME Code, Section VIII Division 1, 2025

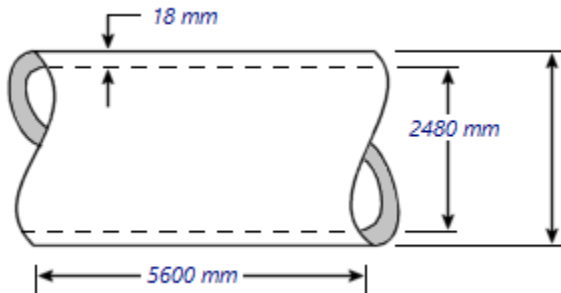

Internal Pressure Results for: Main Shell

Cylindrical Shell Design Information:			
Design Pressure P	544.142 KPa.	Int. Design Temperature	130 °C
Material	SA-516 70	Ext. Design Temperature	130 °C
Length	5600.000 mm	External Pressure Chart	CS-2
		UNS Number	K02700
Int. Corr. All. c	3.0000 mm	Allowable Stress (ope) S	138.0 N./mm ²
Ext. Corr. All. ce	0.0000 mm	Allowable Stress (amb) Sa	138.0 N./mm ²
Inside Diameter Di	2480.000 mm	Actual Stress	45.4 N./mm ²
Spec. Min. Thk t,e, or sa	18.0000 mm	Spec. Nominal Thk.	18.000 mm
Surface Area	442637.8 cm ²	SG of Contents	1.000
Element Volume	17494332.0 cm ³	Weight of Contents	17483.7 Kg
Empty Weight	6131.0 Kg	Operating Weight	23614.7 Kg
		Comp. All. Ope. Stress	115.9 N./mm ²

Radiography Information:			
User Defined		User Defined	
Circ. Joint Efficiency	100 %	Long. Joint Eff.	E or v 100 %

Required Thickness due to Internal Pressure [tr]:

$$\begin{aligned}
 &= (P \cdot R) / (S \cdot E - 0.6 \cdot P) \text{ per UG-27 (c)(1)} \\
 &= (544 \cdot 1243) / (138 \cdot 1 - 0.6 \cdot 544) \\
 &= 4.9132 + 3.0000 = 7.9132 \text{ mm}
 \end{aligned}$$

Max. Allowable Working Pressure at given Thickness, corroded [MAWP]:

Less Operating Hydrostatic Head Pressure of 24.142 KPa.

$$\begin{aligned}
 &= (S \cdot E \cdot t) / (R + 0.6 \cdot t) \text{ per UG-27 (c)(1)} \\
 &= (138 \cdot 1 \cdot 15) / (1243 + 0.6 \cdot 15) \\
 &= 1653 - 24.1 = 1629 \text{ KPa.}
 \end{aligned}$$

Maximum Allowable Pressure, New and Cold [MAPNC]:

$$\begin{aligned}
 &= (S \cdot E \cdot t) / (R + 0.6 \cdot t) \text{ per UG-27 (c)(1)} \\
 &= (138 \cdot 1 \cdot 18) / (1240 + 0.6 \cdot 18) \\
 &= 1986 \text{ KPa.}
 \end{aligned}$$

Actual stress at given pressure and thickness, corroded [Sact]:

$$\begin{aligned}
 &= (P \cdot (R + 0.6 \cdot t)) / (E \cdot t) \\
 &= (544 \cdot (1243 + 0.6 \cdot 15)) / (1 \cdot 15) \\
 &= 45.420 \text{ N./mm}^2
 \end{aligned}$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 73 of 275

Element: Main Shell

Step: 11

6:05pm

Sep 8,2026

% Elongation per Table UG-79-1 ($50 \cdot t_{nom} / R_f \cdot (1 - R_f / R_o)$) 0.721 %

Minimum Design Metal Temperature Results:

Govern. thk, $t_g = 18$, $t_r = 9.56$, $c = 3$ mm, $E^* = 1$

Thickness Ratio = $t_r \cdot E^* / (t_g - c) = 0.64$, Temp. Reduction = 20 °C

Min Metal Temp. w/o impact per UCS-66, Curve B -11 °C

Min Metal Temp. at Required thickness (UCS 66.1) -31 °C

Min Metal Temp. w/o impact per UG-20(f) -29 °C

MDMT Design Information:			
MDMT Curve	B	Press. at MDMT	1056.657 KPa.
UCS-66(b) red.	Yes	Min. Des. Mtl. Temp.	-12 °C
Governing Thk.	18.000 mm	Basic MDMT	-11 °C
Stress/Thk. Ratio	0.637	Temperature Difference	20 °C
UCS-66(c) red.	No	Computed Min. Temp.	-31 °C
		MDMT per UG-20(f)	-29 °C
		Joint Efficiency E^*	100 %

EXTERNAL PRESSURE RESULTS for: Main Shell

Cylindrical Shell From 60 to 70 Ext. Chart: CS-2 at 130 °C

Elastic Modulus from Chart: CS-2 at 130 °C: 199943392 KPa.

Results for Maximum Allowable Ext. Pressure					MAEP	
Tca	Outer Dia	Slen	Do/t	L/D	Factor A	Factor B
15.000	2516.00	5600.00	167.73	2.2258	0.0002685	26.85

$$MAEP = (4 \cdot B) / (3 \cdot (Do/t)) = (4 \cdot 26.8) / (3 \cdot 168) = 213 \text{ KPa.}$$

Results for Required Thickness					Tca	
Tca	Outer Dia	Slen	Do/t	L/D	Factor A	Factor B
11.239	2516.00	5600.00	223.86	2.2258	0.0001737	17.37

$$MAEP = (4 \cdot B) / (3 \cdot (Do/t)) = (4 \cdot 17.4) / (3 \cdot 224) = 103 \text{ KPa.}$$

Results for Maximum Stiffened Length					Slen	
Tca	Outer Dia	Slen	Do/t	L/D	Factor A	Factor B
15.000	2516.00	11109.44	167.73	4.4155	0.0001302	13.02

$$MAEP = (4 \cdot B) / (3 \cdot (Do/t)) = (4 \cdot 13) / (3 \cdot 168) = 103 \text{ KPa.}$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 74 of 275

Element: RHS


Step: 12

6:05pm

Sep 8, 2026

Internal Pressure Calculation Results:

ASME Code, Section VIII Division 1, 2025

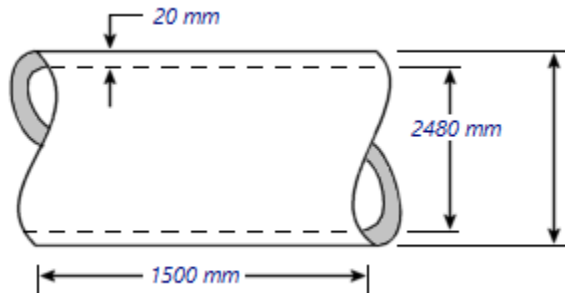

Internal Pressure Results for: RHS

Cylindrical Shell Design Information:			
Design Pressure P	544.142 KPa.	Int. Design Temperature	130 °C
Material	SA-516 70	Ext. Design Temperature	130 °C
Length	1500.000 mm	External Pressure Chart	CS-2
		UNS Number	K02700
Int. Corr. All. c	3.0000 mm	Allowable Stress (ope) S	138.0 N./mm ²
Ext. Corr. All. ce	0.0000 mm	Allowable Stress (amb) Sa	138.0 N./mm ²
Inside Diameter Di	2480.000 mm	Actual Stress	40.1 N./mm ²
Spec. Min. Thk t _e , or s _a	20.0000 mm	Spec. Nominal Thk.	20.000 mm
Surface Area	118752.2 cm ²	SG of Contents	1.000
Element Volume	6261549.5 cm ³	Weight of Contents	6257.7 Kg
Empty Weight	1826.2 Kg	Operating Weight	8083.9 Kg
		Comp. All. Ope. Stress	119.7 N./mm ²

Radiography Information:			
User Defined		User Defined	
Circ. Joint Efficiency	100 %	Long. Joint Eff.	E or v 100 %

Required Thickness due to Internal Pressure [tr]:

$$\begin{aligned}
 &= (P \cdot R) / (S \cdot E - 0.6 \cdot P) \text{ per UG-27 (c)(1)} \\
 &= (544 \cdot 1243) / (138 \cdot 1 - 0.6 \cdot 544) \\
 &= 4.9132 + 3.0000 = 7.9132 \text{ mm}
 \end{aligned}$$

Max. Allowable Working Pressure at given Thickness, corroded [MAWP]:

Less Operating Hydrostatic Head Pressure of 24.142 KPa.

$$\begin{aligned}
 &= (S \cdot E \cdot t) / (R + 0.6 \cdot t) \text{ per UG-27 (c)(1)} \\
 &= (138 \cdot 1 \cdot 17) / (1243 + 0.6 \cdot 17) \\
 &= 1872 - 24.1 = 1848 \text{ KPa.}
 \end{aligned}$$

Maximum Allowable Pressure, New and Cold [MAPNC]:

$$\begin{aligned}
 &= (S \cdot E \cdot t) / (R + 0.6 \cdot t) \text{ per UG-27 (c)(1)} \\
 &= (138 \cdot 1 \cdot 20) / (1240 + 0.6 \cdot 20) \\
 &= 2204 \text{ KPa.}
 \end{aligned}$$

Actual stress at given pressure and thickness, corroded [Sact]:

$$\begin{aligned}
 &= (P \cdot (R + 0.6 \cdot t)) / (E \cdot t) \\
 &= (544 \cdot (1243 + 0.6 \cdot 17)) / (1 \cdot 17) \\
 &= 40.115 \text{ N./mm}^2
 \end{aligned}$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 75 of 275

Element: RHS

Step: 12

6:05pm

Sep 8,2026

% Elongation per Table UG-79-1 ($50 \cdot t_{nom} / R_f \cdot (1 - R_f / R_o)$) 0.800 %

Minimum Design Metal Temperature Results:

Govrn. thk, $t_g = 20$, $t_r = 9.56$, $c = 3$ mm, $E^* = 1$

Thickness Ratio = $t_r \cdot E^* / (t_g - c) = 0.56$, Temp. Reduction = 26 °C

Min Metal Temp. w/o impact per UCS-66, Curve B -7 °C

Min Metal Temp per UCS-66 and UCS-68(c), PWHT credit -24 °C

Min Metal Temp. at Required thickness (UCS 66.1) -48 °C

Min Metal Temp. w/o impact per UG-20(f) -29 °C

MDMT Design Information:			
MDMT Curve	B	Press. at MDMT	1056.657 KPa.
UCS-66(b) red.	Yes	Min. Des. Mtl. Temp.	-12 °C
Governing Thk.	20.000 mm	Basic MDMT	-24 °C
Stress/Thk. Ratio	0.562	Temperature Difference	24 °C
UCS-66(c) red.	Yes	Computed Min. Temp.	-48 °C
		MDMT per UG-20(f)	-29 °C
		Joint Efficiency E^*	100 %

EXTERNAL PRESSURE RESULTS for: RHS

Cylindrical Shell From 90 to 100 Ext. Chart: CS-2 at 130 °C

Elastic Modulus from Chart: CS-2 at 130 °C: 199943392 KPa.

Results for Maximum Allowable Ext. Pressure					MAEP	
Tca	Outer Dia	Slen	Do/t	L/D	Factor A	Factor B
17.000	2520.00	1757.47	148.24	0.6974	0.0010867	87.81

$$MAEP = (4 \cdot B) / (3 \cdot (Do/t)) = (4 \cdot 87.8) / (3 \cdot 148) = 790 \text{ KPa.}$$

Results for Required Thickness					Tca	
Tca	Outer Dia	Slen	Do/t	L/D	Factor A	Factor B
6.935	2520.00	1757.47	363.36	0.6974	0.0002819	28.19

$$MAEP = (4 \cdot B) / (3 \cdot (Do/t)) = (4 \cdot 28.2) / (3 \cdot 363) = 103 \text{ KPa.}$$

Results for Maximum Stiffened Length					Slen	
Tca	Outer Dia	Slen	Do/t	L/D	Factor A	Factor B
17.000	2520.00	14521.50	148.24	5.7625	0.0001151	11.50

$$MAEP = (4 \cdot B) / (3 \cdot (Do/t)) = (4 \cdot 11.5) / (3 \cdot 148) = 103 \text{ KPa.}$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 76 of 275

Element: RHS dish end


Step: 13

6:05pm

Sep 8,2026

Internal Pressure Calculation Results:

ASME Code, Section VIII Division 1, 2025

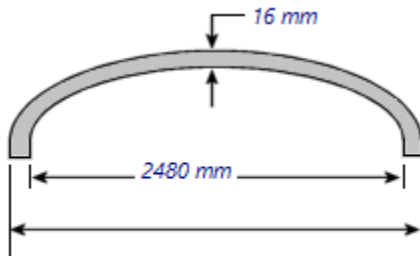

Internal Pressure Results for: RHS dish end

Elliptical Head Design Information:			
Design Pressure P	544.142 KPa.	Int. Design Temperature	130 °C
Material	SA-516 70	Ext. Design Temperature	130 °C
Length	50.800 mm	External Pressure Chart	CS-2
		UNS Number	K02700
Int. Corr. All. c	3.0000 mm	Allowable Stress (ope) S	138.0 N./mm ²
Ext. Corr. All. ce	0.0000 mm	Allowable Stress (amb) Sa	138.0 N./mm ²
Inside Diameter Di	2480.000 mm	Actual Stress	51.9 N./mm ²
Spec. Min. Thk t,e, or sa	16.0000 mm	Spec. Nominal Thk.	20.000 mm
Surface Area	72859.2 cm ²	SG of Contents	1.000
Element Volume	2242403.5 cm ³	Weight of Contents	2240.6 Kg
Empty Weight	1221.4 Kg	Operating Weight	3462.0 Kg
		Comp. All. Ope. Stress	119.7 N./mm ²
		Aspect Ratio	2.00

Radiography Information:			
User Defined		User Defined	
Circ. Joint Efficiency	100 %	Long. Joint Eff.	E or v 100 %

Tolerance for Formed Heads per UG-81(a):

Head inner surface maximum deviation outside the specified shape, 1.25% of D: 31.000 mm

Head inner surface maximum deviation inside the specified shape, 0.625% of D: 15.500 mm

Required Thickness due to Internal Pressure [tr]:

$$= (P \cdot D \cdot K_{cor}) / (2 \cdot S \cdot E - 0.2 \cdot P) \text{ Appendix 1-4(c)}$$

$$= (544 \cdot 2486 \cdot 1) / (2 \cdot 138 \cdot 1 - 0.2 \cdot 544)$$

$$= 4.8878 + 3.0000 = 7.8878 \text{ mm}$$

Max. Allowable Working Pressure at given Thickness, corroded [MAWP]:

Less Operating Hydrostatic Head Pressure of 24.142 KPa.

$$= (2 \cdot S \cdot E \cdot t) / (K_{cor} \cdot D + 0.2 \cdot t) \text{ per Appendix 1-4 (c)}$$

$$= (2 \cdot 138 \cdot 1 \cdot 13) / (1 \cdot 2486 + 0.2 \cdot 13)$$

$$= 1446 - 24.1 = 1422 \text{ KPa.}$$

Maximum Allowable Pressure, New and Cold [MAPNC]:

$$= (2 \cdot S \cdot E \cdot t) / (K \cdot D + 0.2 \cdot t) \text{ per Appendix 1-4 (c)}$$

$$= (2 \cdot 138 \cdot 1 \cdot 16) / (1 \cdot 2480 + 0.2 \cdot 16)$$

$$= 1778 \text{ KPa.}$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 77 of 275

Element: RHS dish end

Step: 13

6:05pm

Sep 8, 2026

Actual stress at given pressure and thickness, corroded [Sact]:

$$= (P \cdot (K_{cor} \cdot D + 0.2 \cdot t)) / (2 \cdot E \cdot t)$$

$$= (544 \cdot (1 \cdot 2486 + 0.2 \cdot 13)) / (2 \cdot 1 \cdot 13)$$

$$= 51.919 \text{ N./mm}^2$$

Straight Flange Required Thickness:

$$= (P \cdot R) / (S \cdot E - 0.6 \cdot P) + c \text{ per UG-27 (c)(1)}$$

$$= (544 \cdot 1243) / (138 \cdot 1 - 0.6 \cdot 544) + 3$$

$$= 7.913 \text{ mm}$$

Straight Flange Maximum Allowable Working Pressure:

[Less Operating Hydrostatic Head Pressure of 24.142 KPa.](#)

$$= (S \cdot E \cdot t) / (R + 0.6 \cdot t) \text{ per UG-27 (c)(1)}$$

$$= (138 \cdot 1 \cdot 17) / (1243 + 0.6 \cdot 17)$$

$$= 1872 - 24.1 = 1848 \text{ KPa.}$$

Factor K, corroded condition [Kcor]:

$$= (2 + (\text{Inside Diameter} / (2 \cdot \text{Inside Head Depth})))^2 / 6$$

$$= (2 + (2486 / (2 \cdot 623)))^2 / 6$$

$$= 0.996794$$

Percent Elong. per UCS-79, VIII-1-01-57 $(75 \cdot t_{nom} / R_f) \cdot (1 - R_f / R_o)$ 3.475 %

MDMT Calculations in the Knuckle Portion:

Govrn. thk, tg = 16, tr = 9.5, c = 3 mm, E* = 1

Thickness Ratio = $tr \cdot E^* / (tg - c) = 0.73$, Temp. Reduction = 15 °C

Min Metal Temp. w/o impact per UCS-66, Curve B -14 °C
 Min Metal Temp. at Required thickness (UCS 66.1) -29 °C
 Min Metal Temp. w/o impact per UG-20(f) -29 °C

MDMT Calculations in the Head Straight Flange:

Govrn. thk, tg = 20, tr = 9.56, c = 3 mm, E* = 1

Thickness Ratio = $tr \cdot E^* / (tg - c) = 0.56$, Temp. Reduction = 26 °C

Min Metal Temp. w/o impact per UCS-66, Curve B -7 °C
 Min Metal Temp. at Required thickness (UCS 66.1) -33 °C
 Min Metal Temp. w/o impact per UG-20(f) -29 °C

MDMT Design Information:			
MDMT Curve	B	Press. at MDMT	1056.657 KPa.
UCS-66(b) red.	Yes	Min. Des. Mtl. Temp.	-12 °C
Governing Thk.	20.000 mm	Basic MDMT	-7 °C
Stress/Thk. Ratio	0.562	Temperature Difference	26 °C
UCS-66(c) red.	No	Computed Min. Temp.	-33 °C
		MDMT per UG-20(f)	-29 °C
		Joint Efficiency E*	100 %

Note: Temperature values displayed above are for the location with the highest basic MDMT

Tolerance for Formed Heads per UG-81(a):

Head inner surface maximum deviation outside the specified shape, 1.25% of D: 31.000 mm
 Head inner surface maximum deviation inside the specified shape, 0.625% of D: 15.500 mm

EXTERNAL PRESSURE RESULTS for: RHS dish end

Elliptical Head From 100 to 110 Ext. Chart: CS-2 at 130 °C

Elastic Modulus from Chart: CS-2 at 130 °C: 199943392 KPa.



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 78 of 275

Element: RHS dish end

Step: 13

6:05pm

Sep 8, 2026

Results for Maximum Allowable Ext. Pressure				MAEP
Tca	Outer Dia	Do/t	Factor A	Factor B
13.000	2512.00	193.23	0.0007188	71.86

$$\text{MAEP} = B / (K0 * \text{Do} / t) = 71.9 / (0.9 * 193) = 413 \text{ KPa.}$$

Results for Required Thickness				Tca
Tca	Outer Dia	Do/t	Factor A	Factor B
6.504	2512.00	386.22	0.0003596	35.95

$$\text{MAEP} = B / (K0 * \text{Do} / t) = 36 / (0.9 * 386) = 103 \text{ KPa.}$$

PV Elite is a trademark of Hexagon AB, 2026, All rights reserved.



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 79 of 275

Shop Pressure Test Results:

Step: 14

6:05pm

Sep 8, 2026

Hydrostatic Test Pressure Results:

Exchanger Shell Side Hydrostatic Test Pressures:

UG99(b)	= 1.30 * M.A.W.P. * Sa/S	1373.654 KPa.
UG99b(b)(35)	= 1.30 * Design Pres * Sa/S	676.000 KPa.
UG99(c)	= 1.30 * M.A.P. - Head(Hyd)	1489.714 KPa.
UG100	= 1.10 * M.A.W.P. * Sa/S	1162.323 KPa.
PED	= max(1.43*DP, 1.25*DP*ratio)	743.600 KPa.
PED&UG99(b)(35)	= max(1.43*DP, 1.3*DP*ratio)	743.600 KPa.
App 27-4	= M.A.W.P.	1056.657 KPa.

Exchanger Channel Side Hydrostatic Test Pressures:

UG99(b)	= 1.30 * M.A.W.P. * Sa/S	1373.654 KPa.
UG99b(b)(35)	= 1.30 * Design Pres * Sa/S	1300.000 KPa.
UG99(c)	= 1.30 * M.A.P. - Head(Hyd)	1489.379 KPa.
UG100	= 1.10 * M.A.W.P. * Sa/S	1162.323 KPa.
PED	= max(1.43*DP, 1.25*DP*ratio)	1430.000 KPa.
PED&UG99(b)(35)	= max(1.43*DP, 1.3*DP*ratio)	1430.000 KPa.
App 27-4	= M.A.W.P.	1056.657 KPa.

Horizontal Test performed per: UG-99c

Please note that Nozzle, Shell, Head, Flange, etc MAWPs are all considered when determining the hydrotest pressure for those test types that are based on the MAWP of the vessel.

Stresses on Elements due to Test Pressure (N./mm² & KPa.):

From To	Stress	Allowable	Ratio	Pressure
LHS Ch Shell	94.8	234.0	0.405	1513.69
Main Shell	105.2	234.0	0.450	1514.02
RHS	94.8	234.0	0.405	1514.02
RHS dish end	117.5	234.0	0.502	1514.02

Stress ratios for Nozzle and Pad Materials (N./mm²):

Description	Pad/Nozzle	Ambient	Operating	Ratio
N3-Tube Inlet	Nozzle	138.00	138.00	1.000
N3-Tube Inlet	Pad	138.00	138.00	1.000
Vent	Nozzle	138.00	138.00	1.000
Drain	Nozzle	138.00	138.00	1.000
N1-Shell Inlet	Nozzle	118.00	118.00	1.000
N1-Shell Inlet	Pad	138.00	138.00	1.000
N2-Shell Outlet	Nozzle	118.00	118.00	1.000
N2-Shell Outlet	Pad	138.00	138.00	1.000
N4-Tube Outlet	Nozzle	138.00	138.00	1.000
N4-Tube Outlet	Pad	138.00	138.00	1.000

Minimum

1.000

Stress ratios for Pressurized Vessel Elements (N./mm²):

Description	Ambient	Operating	Ratio
LHS Blind Flang	138.00	138.00	1.000
LHS CH flange-1	138.00	138.00	1.000
LHS Ch Shell	138.00	138.00	1.000
LHS Ch Flg-2	138.00	138.00	1.000
LHS Shell Flg-1	138.00	138.00	1.000



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 80 of 275

Shop Pressure Test Results:

Step: 14

6:05pm

Sep 8, 2026

Main Shell	138.00	138.00	1.000
RHS Shell Flg-1	138.00	138.00	1.000
RHS Shell Flg-2	138.00	138.00	1.000
RHS	138.00	138.00	1.000
RHS dish end	138.00	138.00	1.000

Minimum

1.000

Stress ratios for Exchanger Materials (N./mm²):

Description	Ambient	Operating	Ratio
Floating Head Matl.	138.00	138.00	1.000
Backing Ring Matl.	137.90	137.90	1.000
Flange Material	138.00	138.00	1.000
Tube Material	92.40	92.40	1.000
Tubesheet Material	138.00	138.00	1.000

Minimum

1.000

Hoop Stress in Nozzle Wall during Pressure Test (N./mm²):

Description	Ambient	Operating	Ratio
N3-Tube Inlet	25.85	234.00	0.110
Vent	5.03	179.40	0.028
Drain	5.03	179.40	0.028
N1-Shell Inlet	17.24	216.00	0.080
N2-Shell Outlet	17.24	216.00	0.080
N4-Tube Outlet	25.86	234.00	0.111

Elements Suitable for Test Pressure.

PV Elite is a trademark of Hexagon AB, 2026, All rights reserved.



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 81 of 275

Field Pressure Test Results: Step: 15 6:05pm Sep 8, 2026

Hydrostatic Test Pressure Results:

Exchanger Shell Side Hydrostatic Test Pressures:

UG99(b)	= 1.30 * M.A.W.P. * Sa/S	1373.654 KPa.
UG99b(b)(35)	= 1.30 * Design Pres * Sa/S	676.000 KPa.
UG99(c)	= 1.30 * M.A.P. - Head(Hyd)	1489.714 KPa.
UG100	= 1.10 * M.A.W.P. * Sa/S	1162.323 KPa.
PED	= max(1.43*DP, 1.25*DP*ratio)	743.600 KPa.
PED&UG99(b)(35)	= max(1.43*DP, 1.3*DP*ratio)	743.600 KPa.
App 27-4	= M.A.W.P.	1056.657 KPa.

Exchanger Channel Side Hydrostatic Test Pressures:

UG99(b)	= 1.30 * M.A.W.P. * Sa/S	1373.654 KPa.
UG99b(b)(35)	= 1.30 * Design Pres * Sa/S	1300.000 KPa.
UG99(c)	= 1.30 * M.A.P. - Head(Hyd)	1489.379 KPa.
UG100	= 1.10 * M.A.W.P. * Sa/S	1162.323 KPa.
PED	= max(1.43*DP, 1.25*DP*ratio)	1430.000 KPa.
PED&UG99(b)(35)	= max(1.43*DP, 1.3*DP*ratio)	1430.000 KPa.
App 27-4	= M.A.W.P.	1056.657 KPa.

UG-99(b)(35), Test Pressure Calculation [Shell Side]:

= Test Factor • Design Pressure • Stress Ratio

= 1.3 • 520 • 1

= 676.000 KPa.

UG-99(b) Note 35, Test Pressure Calculation [Channel Side]:

= Test Factor • Design Pressure • Stress Ratio

= 1.3 • 1000 • 1

= 1300.000 KPa.

Horizontal Test performed per: UG-99b (Note 35)

Please note that Nozzle, Shell, Head, Flange, etc MAWPs are all considered when determining the hydrotest pressure for those test types that are based on the MAWP of the vessel.

Stresses on Elements due to Test Pressure (N./mm² & KPa.):

From To	Stress	Allowable	Ratio	Pressure
LHS Ch Shell	97.6	234.0	0.417	1324.31
Main Shell	58.5	234.0	0.250	700.31
RHS	51.6	234.0	0.221	700.31
RHS dish end	66.8	234.0	0.286	700.31

Stress ratios for Nozzle and Pad Materials (N./mm²):

Description	Pad/Nozzle	Ambient	Operating	Ratio
N3-Tube Inlet	Nozzle	138.00	138.00	1.000
N3-Tube Inlet	Pad	138.00	138.00	1.000
Vent	Nozzle	138.00	138.00	1.000
Drain	Nozzle	138.00	138.00	1.000
N1-Shell Inlet	Nozzle	118.00	118.00	1.000
N1-Shell Inlet	Pad	138.00	138.00	1.000
N2-Shell Outlet	Nozzle	118.00	118.00	1.000
N2-Shell Outlet	Pad	138.00	138.00	1.000
N4-Tube Outlet	Nozzle	138.00	138.00	1.000
N4-Tube Outlet	Pad	138.00	138.00	1.000

Minimum

1.000



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 82 of 275

Field Pressure Test Results:

Step: 15

6:05pm

Sep 8, 2026

Stress ratios for Pressurized Vessel Elements (N./mm²):

Description	Ambient	Operating	Ratio
LHS Blind Flang	138.00	138.00	1.000
LHS CH flange-1	138.00	138.00	1.000
LHS Ch Shell	138.00	138.00	1.000
LHS Ch Flg-2	138.00	138.00	1.000
LHS Shell Flg-1	138.00	138.00	1.000
Main Shell	138.00	138.00	1.000
RHS Shell Flg-1	138.00	138.00	1.000
RHS Shell Flg-2	138.00	138.00	1.000
RHS	138.00	138.00	1.000
RHS dish end	138.00	138.00	1.000

Minimum

1.000

Stress ratios for Exchanger Materials (N./mm²):

Description	Ambient	Operating	Ratio
Floating Head Matl.	138.00	138.00	1.000
Backing Ring Matl.	137.90	137.90	1.000
Flange Material	138.00	138.00	1.000
Tube Material	92.40	92.40	1.000
Tubesheet Material	138.00	138.00	1.000

Minimum

1.000

Hoop Stress in Nozzle Wall during Pressure Test (N./mm²):

Description	Ambient	Operating	Ratio
N3-Tube Inlet	22.62	234.00	0.097
Vent	2.33	179.40	0.013
Drain	2.33	179.40	0.013
N1-Shell Inlet	7.97	216.00	0.037
N2-Shell Outlet	7.97	216.00	0.037
N4-Tube Outlet	11.96	234.00	0.051

Elements Suitable for Test Pressure.

PV Elite is a trademark of Hexagon AB, 2026, All rights reserved.



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 83 of 275

ASME TS Calc: Pressure Test

Case: 1 6:05p Sep 8,2026

Input Echo, Tubesheet Number 1, Description: Stationary Tube

Shell Data:

Main Shell Description: Main Shell

Shell Test Pressure		676.00 KPa.
Shell Thickness	ts	18.0000 mm
Shell Internal Corrosion Allowance	cas	0.0000 mm
Shell External Corrosion Allowance	casext	0.0000 mm
Inside Diameter of Shell	Ds	2480.000 mm
Shell Temperature for Internal Pressure	Ts	21.11 °C
Shell Material		SA-516 70

See ASME VIII Div. 1, UG-23(e), for determination of the SPS allowable.

Shell Material UNS Number		K02700
Shell Allowable Stress at Temperature	Ss	138.00 N./mm ²
Shell Allowable Stress at Ambient		138.00 N./mm ²

Channel Data:

Channel Description: LHS Ch Shell

Channel Type:		Cylinder
Channel Test Pressure		1300.00 KPa.
Channel Thickness	tc	20.0000 mm
Channel Internal Corrosion Allowance	cac	0.0000 mm
Channel External Corrosion Allowance	cacext	0.0000 mm
Inside Diameter of Channel	Dc	2480.000 mm
Channel Design Temperature	TEMPC	21.11 °C
Channel Flange Matl		SA-516 70

See ASME VIII Div. 1, UG-23(e), for determination of the SPS allowable.

Channel Material UNS Number		K02700
Channel Allowable Stress at Temperature	Sc	138.00 N./mm ²
Channel Allowable Stress at Ambient		138.00 N./mm ²

Tube Data:

Number of Tube Holes	Nt	6000
Tube Wall Thickness	et	2.1100 mm
Tube Outside Diameter	D	19.0500 mm
Total Straight Tube Length	Lt	6000.00 mm
Straight Tube Length (bet. inner tubsht faces) L		5770.00 mm
Design Temperature of the Tubes		21.11 °C
Tube Material		SA-179
Tube Material UNS Number		K01200
Is this a Welded Tube		No
Tube Material Specification used	Smls. tube	
Tube Allowable Stress at Temperature		92.40 N./mm ²
Tube Allowable Stress At Ambient		92.40 N./mm ²
Tube Yield Stress At design Temperature	Syt	180.00 N./mm ²
Tube Pitch (Center to Center Spacing)	P	25.4000 mm
Tube Layout Pattern		Triangular

Fillet Weld Leg	af	2.1100 mm
Groove Weld Leg	ag	2.1100 mm
Tube-Tubesheet Joint Weld Type		Full Strength
Method for Tube-Tubesheet Jt. Allowable		UW-20.3
Is the Tube Inset		No

Radius to Outermost Tube Hole Center	ro	1130.510 mm
Largest Center-to-Center Tube Distance	U1	0.0000 mm
Length of Expanded Portion of Tube	ltx	0.0000 mm
Tube-side pass partition groove depth	hg	0.0000 mm
Area of Tube Layout	Ap	32948.0 cm ²
Perimeter of Tube Layout	Cp	7006.7 mm



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 84 of 275

ASME TS Calc: Pressure Test

Case: 1 6:05p Sep 8, 2026

Tubesheet Data:

Tubesheet TYPE: Stationary, Gasketed both Sides, Conf. d

Exchanger TYPE: With an Immersed Floating Head, Conf. a

Tubesheet Design Metal Temperature	T	21.11 °C
Tubesheet Material		SA-266 2

See ASME VIII Div. 1, UG-23(e), for determination of the SPS allowable.

Tubesheet Material UNS Number		K03506
Tubesheet Allowable Stress at Temperature	S	138.00 N./mm ²
Tubesheet Allowable Stress at Ambient	Tt	138.00 N./mm ²
Thickness of Tubesheet	h	115.0000 mm
Tubesheet Corr. Allowance (Shell side)	Cats	0.0000 mm
Tubesheet Corr. Allowance (Channel side)	Catc	0.0000 mm
Tubesheet Outside Diameter	A	2562.000 mm

Dimension G for the Channel Side	Gc	2537.285 mm
Area of the Untubed Lanes	AL	0.0 cm ²

Additional Data for Fixed/Floating Tubesheet Exchangers:

Unsupported Tube Span under consideration	l	635.910 mm
Tube End condition corresponding to Span (l)	k	1.00
Ignore Radial Thermal Exp. effects (4.18.8/4.18.9)		Yes
Perform Differential Pressure Design		No
Run Multiple Load Cases		Yes
Junction Stress Reduction option		Perform Plastic Calculation

Additional Data for Gasketed Tubesheets:

Tubesheet Gasket on which Side		Both
Flange Outside Diameter	A	2748.000 mm
Flange Inside Diameter	B	2480.000 mm
Flange Face Outside Diameter	Fod	2565.000 mm
Flange Face Inside Diameter	Fid	2480.000 mm
Gasket Outside Diameter	Go	2554.000 mm
Gasket Inside Diameter	Gi	2510.000 mm
Small end Hub thk.	g0	16.0000 mm
Large end Hub thk.	g1	35.0000 mm
Gasket Factor,	m	3.00
Gasket Design Seating Stress	y	68.95 N./mm ²
Flange Facing Sketch	Code	Sketch 1a
Gasket Thickness	tg	3.1750 mm
Full face Gasket Flange Option	Program	Selects
Length of Partition Gasket	lp	5118.000 mm
Width of Partition Gasket	wp	10.0000 mm
Partition Gasket Factor,	mPart	0.0000
Partition Gasket Design Seating Stress	yPart	0.00 N./mm ²
Partition Gasket Facing Sketch	Code	Sketch 1a
Partition Gasket Column for Gasket Seating	Code	Column II

Bolting Information:

Diameter of Bolt Circle	C	2663.000 mm
Nominal Bolt Diameter	dB	38.1000 mm
Thread Series	TEMA Thread Series	
Number of Bolts	n	72
Bolt Material		SA-193 B7
Bolt Material UNS Number		G41400
Bolt Allowable Stress At Temperature	Sb	172.00 N./mm ²
Bolt Allowable Stress At Ambient	Sa	172.00 N./mm ²
Weld between Flange and Shell/Channel		0.0000 mm

Alternate Flange Operating Bolt Load, Wm1		723272.56 KgF
---	--	---------------



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 85 of 275

ASME TS Calc: Pressure Test


Case: 1 6:05p Sep 8, 2026

Alternate Flange Seating Bolt Load, Wm2 468391.53 Kgf
Alternate Flange Design Bolt Load, W 1144638.00 Kgf

Note: The full bolt load $Sa \cdot Ab$, was used for all load cases.

Tubesheet Integral with None
Tubesheet Extended as Flange No
Is Exchanger in Creep range (skip EP, Use 3S for Sps) No

Tubesheet Gasketed w/Shell and Channel

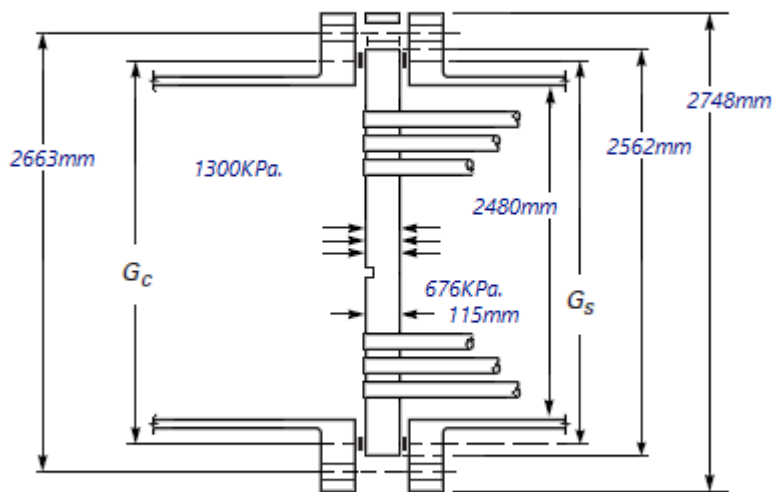

Configuration d:

ASME TubeSheet Results per Part UHX/4.18, 2025

Elasticity/Expansion Material Properties:

Shell - TE-1 Carbon & Low Alloy Steels, Group 1
Shell - TM-1 Carbon Steels with C<= 0.3%

Th. Exp. Coeff. Metal Temp. along Len	21.1 °C	0.0000115191 /°C
Elastic Mod. at Design Temperature	21.1 °C	0.20270E+09 KPa.
Th. Exp. Coeff. Metal Temp. at Tubsht	21.1 °C	0.0000115191 /°C
Elastic Mod. at Metal Temp. along Len	21.1 °C	0.20270E+09 KPa.
Elastic Mod. at Ambient Temperature	21.1 °C	0.20270E+09 KPa.

Channel - TE-1 Carbon & Low Alloy Steels, Group 1
Channel - TM-1 Carbon Steels with C<= 0.3%

Th. Exp. Coeff. Metal Temp. at Tubsht	21.1 °C	0.0000115191 /°C
Elastic Mod. at Design Temperature	21.1 °C	0.20270E+09 KPa.
Elastic Mod. at Ambient Temperature	21.1 °C	0.20270E+09 KPa.

Tubes - TE-1 Carbon & Low Alloy Steels, Group 1
Tubes - TM-1 Carbon Steels with C<= 0.3%

Th. Exp. Coeff. Metal Temp. along Len	21.1 °C	0.0000115191 /°C
Elastic Mod. at Design Temperature	21.1 °C	0.20270E+09 KPa.
Elastic Mod. at Metal Temp. along Len	21.1 °C	0.20270E+09 KPa.
Elastic Mod. at Tubsht. Design Temp.	21.1 °C	0.20270E+09 KPa.



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 86 of 275

ASME TS Calc: Pressure Test

Case: 1 6:05p Sep 8, 2026

Elastic Mod. at Ambient Temperature 21.1 °C 0.20270E+09 KPa.

TubeSheet - TE-1 Carbon & Low Alloy Steels, Group 1
TubeSheet - TM-1 Carbon Steels with C> 0.3%

Elastic Mod. at Design Temperature 21.1 °C 0.20132E+09 KPa.

Elastic Mod. at Ambient Temperature 21.1 °C 0.20132E+09 KPa.

Note:

The Elasticity and Alpha values are taken from Tables in ASME II D.

Please insure these properties are consistent with the

type of Material for the tubes, shell, channel etc.

Tube Required Thickness under Internal Pressure (Tubeside pressure):

Thickness Due to Internal Pressure:

= $(P \cdot (D/2 - CAE)) / (S \cdot E + 0.4 \cdot P)$ per Appendix 1-1 (a)(1)

= $(1300 \cdot (19/2 - 0)) / (92.4 \cdot 1 + 0.4 \cdot 1300)$

= 0.1333 + 0.0000 = 0.1333 mm

Tube Required Thickness under External Pressure (Shellside pressure) :

External Pressure Chart CS-1 at 21.11 °C
Elastic Modulus for Material 199943392.00 KPa.

Results for Max. Allowable External Pressure (Emawp):

TCA	ODCA	SLEN	D/T	L/D	Factor A	B
2.1100	19.05	5770.00	9.03	50.0000	0.0134948	95.84

EMAWP = $(2.167 / (D/T) - 0.0833) \cdot B = 15019$ KPa.

Results for Req'd Thickness for Ext. Pressure (Tca):

TCA	ODCA	SLEN	D/T	L/D	Factor A	B
0.3171	19.05	5770.00	60.08	50.0000	0.0003047	30.46

EMAWP = $(4 \cdot B) / (3 \cdot (D/T)) = (4 \cdot 30.5) / (3 \cdot 60.1) = 676$ KPa.

Summary of Tube Required Thickness Results:

Total Required Thickness including Corrosion all.	0.3171 mm
Allowable Internal Pressure at Corroded thickness	22456.99 KPa.
Required Internal Design Pressure	1300.00 KPa.
Allowable External Pressure at Corroded thickness	15019.20 KPa.
Required External Design Pressure	676.00 KPa.
Required Thickness due to Shell Side pressure	0.3171 mm

Detailed Results for load Case D3 un-corr. (Psd,max + Ptd,max)

Intermediate Calculations For Gasketed Tubesheets:

ASME Code, Section VIII Division 1, 2025

Gasket Contact Width,	$N = (Goc - Gic) / 2$	22.000 mm
Basic Gasket Width,	$b0 = N / 2$	11.000 mm
Effective Gasket Width,	$b = \sqrt{b0} \cdot 2.5$	8.355 mm
Gasket Reaction Diameter,	$G = Go - 2.0 \cdot b$	2537.291 mm

Results for ASME Stationary Tubesheet Calculations for Configuration d:

Results for Tubesheet Calculations Original Thickness:

ASME Section VIII-2 Part 4.18.9.4 Step 1:

Tube expansion depth ratio $[\rho]$:

= ltx / h (modified for corrosion if present)



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 87 of 275

ASME TS Calc: Pressure Test

Case: 1 6:05p Sep 8, 2026

$$= 0/115$$

$$= 0.0000 \text{ (must be } 0 \leq p \leq 1 \text{)}$$

Effective tube hole diameter [d*]:

$$= \max(dt - 2 \cdot tt(EtT/E) \cdot (StT/S) \cdot (p); dt - 2 \cdot tt)$$

$$= \max(19 - 2 \cdot 2.11 (202701232/201322320) \cdot (92.4/138) \cdot (0); 19 - 2 \cdot 2.11)$$

$$= 19.0500 \text{ mm}$$

Equivalent outer tube limit circle diameter [Do]:

$$= 2 \cdot ro + dt$$

$$= 2 \cdot 1131 + 19$$

$$= 2280.070 \text{ mm}$$

Determine the basic ligament efficiency for shear [μ]:

$$= (p - dt) / p$$

$$= (25.4 - 19) / 25.4$$

$$= 0.250$$

Equivalent outer tube limit radius [ao]:

$$= Do / 2$$

$$= 2280/2$$

$$= 1140.0350 \text{ mm}$$

Effective tube pitch [p*]:

$$= p / \sqrt{ 1 - 4 \cdot \min(AL \cdot CNVfactor; 4 \cdot Do \cdot p) / (\pi \cdot Do^2) }$$

$$= 25.4 / \sqrt{ 1 - 4 \cdot \min(0 \cdot 100 ; 4 \cdot 2280 \cdot 25.4) / (\pi \cdot 2280^2) }$$

$$= 25.4000 \text{ mm}$$

Effective ligament efficiency for bending [μ*]:

$$= (p* - d*) / p*$$

$$= (25.4 - 19) / 25.4$$

$$= 0.2500$$

Ratio [ps]:

$$= as / ao$$

$$= 1269/1140$$

$$= 1.1128$$

Ratio [pc]:

$$= ac / ao$$

$$= 1269/1140$$

$$= 1.1128$$

Compute parameter [xt]:

$$= 1 - Nt((dt - 2 \cdot tt) / (2 \cdot ao))^2$$

$$= 1 - 6000 ((19 - 2 \cdot 2.11) / (2 \cdot 1140))^2$$

$$= 0.7462$$

Determine parameter [xs]:

$$= 1 - Nt(dt / (2 \cdot ao))^2$$

$$= 1 - 6000 (19 / (2 \cdot 1140))^2$$

$$= 0.5812$$

Determine the value [h'g]:

$$= \max((hg - CATC); 0) \text{ (For pressure only cases)}$$

$$= \max((0 - 0); 0)$$

$$= 0.000 \text{ mm}$$

ASME Section VIII-2 Part 4.18.9.4 Step 2:

Intermediate parameters for Tubesheet Gasketed on the Shell Side:

βs, ks, λs, δs are all = 0

Intermediate parameters for Tubesheet Gasketed on the Channel Side:



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 88 of 275

ASME TS Calc: Pressure Test

Case: 1 6:05p Sep 8, 2026

βC , k_c , λC , δC are all = 0

ASME Section VIII-2 Part 4.18.9.4 Step 3:

$h/p = 4.527559$; $\mu^* = 0.250000$; $E^* = 43608536$ KPa.
 $E^*/E = 0.216611$; $\nu^* = 0.396457$

Note: As h/p (4.528) is > 2 , data values for $h/p = 2$ were used.

Tube Bundle Stiffness Factor $[X_a]$:

$$= \left(\left(\frac{24(1 - \nu^*)}{Nt \cdot Et \cdot tt} \right) \left(\frac{dt - tt}{ao^2} \right) \left(\frac{E^* \cdot L \cdot H^3}{1140^2} \right) \right)^{1/4}$$

$$= \left(\left(\frac{24(1 - 0.4^2)}{6000 \cdot 202701232 \cdot 2.11} \right) \left(\frac{19 - 2.11}{1140^2} \right) \left(\frac{43608536 \cdot 5770 \cdot 115^3}{115^3} \right) \right)^{1/4}$$

$$= 7.3924$$

Values from Table 4.18.3

$$Z_d = 0.003673 ; Z_v = 0.018388 ; Z_m = 0.193865$$

$$Z_a = 0.485565E+03 ; Z_w = 0.018388$$

ASME Section VIII-2 Part 4.18.9.4 Step 4:

Diameter ratio $[K]$:

$$= A / Do$$

$$= 2562/2280$$

$$= 1.1236$$

Compute coefficient $[F]$:

$$= (1 - \nu^*) / E^* \cdot (\lambda_s + \lambda_c + E \cdot \ln(K))$$

$$= (1 - 0.4) / 43608536 \cdot (0 + 0 + 201322320 \cdot \ln(1.12))$$

$$= 0.3248$$

Compute parameter $[\phi]$:

$$= (1 + \nu^*) F$$

$$= (1 + 0.4) \cdot 0.32$$

$$= 0.4536$$

Compute parameter $[Q_1]$:

$$= (\psi_s - 1 - \phi \cdot Z_v) / (1 + \phi \cdot Z_m)$$

$$= (1.11 - 1 - 0.45 \cdot 0.018) / (1 + 0.45 \cdot 0.19)$$

$$= 0.096025$$

ASME Section VIII-2 Part 4.18.9.4 Step 5:

Determine factor $[\gamma_b]$:

$$= (G_c - G_s) / Do \text{ (config d)}$$

$$= (2537 - 2537) / 2280 = 0$$

Calculate parameter $[\omega_s]$:

$$= \psi_s \cdot k_s \cdot \beta_s \cdot \delta_s (1 + h \cdot \beta_s)$$

$$= 1.11 \cdot 0 \cdot 0 \cdot 0.000 (1 + 115 \cdot 0)$$

$$= 0.0000 \text{ mm}^2$$

Calculate parameter $[\omega^*s]$:

$$= ao^2 (\psi_s^2 - 1) \cdot (\psi_s - 1) / 4 - \omega_s$$

$$= 1140^2 (1.11^2 - 1) \cdot (1.11 - 1) / 4 - 0$$

$$= 8736.4102 \text{ mm}^2$$

Parameter $[\omega_c]$:

$$= \rho_c \cdot k_c [\delta C (C_m \theta + \beta C + C_q \Delta \cdot h \cdot \beta C^2) - \zeta_c (C_m \theta + h \cdot C_q \theta + h \cdot \beta C / 2)]$$

$$= 1.11 \cdot 0 [0.000 (0 + 0 \cdot 0 \cdot 115) - 0.000 (0/115 + 0 \cdot 0/2)]$$

$$= 0.0000 \text{ mm}^2$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 89 of 275

ASME TS Calc: Pressure Test

Case: 1 6:05p Sep 8, 2026

Parameter [$\omega \cdot c$]:

$$= a_o^2 [(p_c^2 + 1) \cdot (p_c - 1)/4 - (p_s - 1)/2] - \omega c$$

$$= 1140^2 [(1.11^2 + 1) \cdot (1.11 - 1)/4 - (1.11 - 1)/2] - 0$$

$$= 8736.4131 \text{ mm}^2$$

Pressure [$P \cdot S$]:

= 0 For Pressure only cases or Configurations d,e,f,A,B,C,D

Pressure [$P \cdot C$]:

= 0 For Pressure only cases or Configurations b,c,d,B,C,D

ASME Section VIII-2 Part 4.18.9.4 Step 6:

$$P_e = P_s - P_t$$

$$= 676 - 1300 = -624 \text{ KPa.}$$

ASME Section VIII-2 Part 4.18.9.4 Step 7:

Determine factor [Q_2]:

$$= [((\omega \cdot s \cdot P_s - \omega \cdot c \cdot P_t) - (\omega \cdot s \cdot P \cdot s - \omega \cdot c \cdot P \cdot c)) + W \cdot \gamma_b / (2 \cdot \pi)] / (1 + \phi \cdot Z_m)$$

$$= [((8736 \cdot 676 - 8736 \cdot 1300) - (0 \cdot 0 - 0 \cdot 0)) \cdot 0.0001 + 1144638 \cdot 0 / (2 \cdot \pi)] / (1 + 0.45 \cdot 0.19)$$

$$= -510.9865 \text{ Kg}$$

Calculate factor [Q_3]:

$$= Q_1 + 2 \cdot Q_2 / (P_e \cdot a_o^2)$$

$$= 0.096 + 2 \cdot -511 / (-624 \cdot 1140^2)$$

$$= 0.10838$$

Fm Value from Table 4.18.3 = 0.075221

Tubesheet Bending Stress - original thickness [σ]:

$$= (1.5 \cdot F_m / \mu \cdot) \cdot (2 \cdot a_o / (H - h'g))^2 \cdot P_e$$

$$= (1.5 \cdot 0.075 / 0.25) \cdot (2 \cdot 1140 / (115 - 0))^2 \cdot -624$$

$$= -110.7138 \text{ N./mm}^2$$

Allowable Tubesheet Bending Stress [σ allowed]:

$$= 1.5 \cdot \beta T \cdot S_y = 1.5 \cdot 0.95 \cdot 250 = 356 \text{ N./mm}^2, 4.18.233$$

Tubesheet Bending Stress - final thickness [σ_f]:

$$= (1.5 \cdot F_m / \mu \cdot) \cdot (2 \cdot a_o / (h - h'g))^2 \cdot P_e$$

$$= (1.5 \cdot 0.068 / 0.25) \cdot (2 \cdot 1140 / (61.2 - 0))^2 \cdot -624$$

$$= 356.2436 \text{ N./mm}^2$$

Reqd Tubesheet Thickness, for Bending Stress (including CA) [H_{ReqB}]:

$$= h + C_{ats} + C_{atc}$$

$$= 61.2 + 0 + 0$$

$$= 61.1704 \text{ mm}$$

ASME Section VIII-2 Part 4.18.9.4 Step 8:

Shear Stress check [τ_{limit}]:

$$= (2 \cdot \mu \cdot h / a_o) \cdot (0.8 \cdot \beta T \cdot S_y)$$

$$= (2 \cdot 0.25 \cdot 115 / 1140) \cdot 190$$

$$= 9.5829 \text{ N./mm}^2$$

Shear Stress is not required to be computed; [P_e] <= τ_{limit}

Could not converge on a minimum required tubesheet thk. to satisfy the Shear Stress criteria.



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 90 of 275

ASME TS Calc: Pressure Test

Case: 1 6:05p Sep 8, 2026



Use the best Estimated Required Tubesheet Thickness value as design guidance & Compare the Actual Stresses versus Allowable Stresses.

Tubesheet thickness = 14.7360 mm
Tubesheet Shear Stress = 79.6530 N./mm²

Required Tubesheet Thickness for Given Loadings (Including CA) [H reqd]:

= max(HreqB, HreqS)
= max(61.2, 14.7)
= 61.1704 mm

ASME Section VIII-2 Part 4.18.9.4 Step 9:

The Ftmin and Ftmax Coefficients from Table 4.18.4:

Ftmin = -1.19, Ftmax = 8.46

First Extreme Tube Axial Stress from among all the tubes [σ_1]:

= ((Ps • xs - Pt • xt) - Pe • Ftmin) / (Xt - Xs)
= ((676 • 0.58 - 1300 • 0.75) - (-624) • -1.19) /
(0.75 - 0.58)
= -7.9946 N./mm²

Second Extreme value of Tube Axial Stress from among all the tubes [σ_2]:

= ((Ps • xs - Pt • xt) - Pe • Ftmax) / (Xt - Xs)
= ((676 • 0.58 - 1300 • 0.75) - (-624) • 8.46) /
(0.75 - 0.58)
= 28.4997 N./mm²

Maximum Tube Axial Stress [$\sigma_{t,max}$]:

= max(| $\sigma_{t,1}$ |; | $\sigma_{t,2}$ |) = 28.5 N./mm²

Allowable Tube Stress [$\sigma_{t,A}$]:

= $\beta T \cdot S_{y,t}$ = 170.9969 N./mm²

Check for Buckling as some of the tubes are in compression.

Determine the Factor of Safety [Fs]:

= max((3.25 - 0.25(Zd + Q3 • Zw)Xa⁴); 1.25)
= max((3.25 - 0.25(0.0037 + 0.11 • 0.018)7.39⁴); 1.25)
= 1.2500 (Should be ≤ 2)

Determine the factor [rt]:

= ($\sqrt{dt^2 + (dt - 2 \cdot tt)^2}$) / 4
= ($\sqrt{19^2 + (19 - 2 \cdot 2.11)^2}$) / 4
= 6.0355 mm

Determine the factor [Ct]:

= $\sqrt{(2 \cdot \pi^2 \cdot Et / S_{yt})}$
= $\sqrt{(2 \cdot \pi^2 \cdot 202701232 / 180)}$
= 155.4270

Determine the factor [Ft]:

= k • L/r
= 1 • 636/6.04
= 105.3620

Buckling Allowable Stress [Stb]:

= (Sy,t / Fs) • (1 - Ft / (2 • Ct))
= (180 / 1.25) • (1 - 105 / (2 • 155))
= 170.997 N./mm² (Never greater than Sot)



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 91 of 275

ASME TS Calc: Pressure Test

Case: 1 6:05p Sep 8, 2026

Note: The Axial Compressive stress in tubes is within limits.

Largest tube-to-tubesheet Joint Load [Wt]:

$$= \sigma_{t,max} \cdot \text{Tube Area}$$

$$= 28.5 \cdot 1.12$$

$$= 326.33 \text{ Kgf}$$

Tube Metal Area [At]:

$$= \pi (d_o - t) t$$

$$= \pi (19 - 2.11) 2.11$$

$$= 1.123 \text{ cm}^2$$

Tube Weld Size Results per UW-20.3:

Tube Strength [Ft]:

$$= \pi \cdot t (d_o - t) S$$

$$= \pi \cdot 2.11 (19 - 2.11) 171$$

$$= 1957.967 \text{ Kgf}$$

Groove Weld Strength [Fg]:

$$= 0.85 \cdot \pi \cdot a_g (d_o + 0.67 \cdot a_g) S_w \text{ (but not } > F_t)$$

$$= 0.85 \cdot \pi \cdot 2.11 (19 + 0.67 \cdot 2.11) 171$$

$$= 1957.9670 \text{ Kgf}$$

Weld Strength Factor [fw]:

$$= S / S_w \text{ where } S_w = \min(S \text{ and } S_t)$$

$$= 171/171$$

$$= 1.000$$

Design Strength Ratio [fd]:

$$= 1 \text{ for full strength welds}$$

Fillet Weld Strength [Ff]:

$$= 0.55 \cdot \pi \cdot a_f (d_o + 0.67 \cdot a_f) S_w \text{ (but not } > F_t)$$

$$= 0.55 \cdot \pi \cdot 2.11 (19 + 0.67 \cdot 2.11) 171$$

$$= 1300.8848 \text{ Kgf}$$

Minimum Length of Weld [ar]:

$$= 2 \left(\sqrt{((0.75 \cdot d_o)^2 + 1.07 \cdot t \cdot (d_o - t) f_w \cdot f_d)} - 0.75 \cdot d_o \right)$$

$$= 2 \left(\sqrt{((0.75 \cdot 19)^2 + 1.07 \cdot 2.11 \cdot (19 - 2.11) 1 \cdot 1)} - 0.75 \cdot 19 \right)$$

$$= 2.562 \text{ mm}$$

Minimum Required Fillet Weld Leg [afr]: 1.2810 mm

Minimum Required Groove Weld Leg [agr]: 1.2810 mm

Tube-Tubesheet Jt allowable, 1958 is $\geq$ tube strength 1958 Kgf

Note: This tube-tubesheet joint is a Full Strength joint

Computations completed for ASME tubesheet configuration: d

Stress/Force Summary for Loadcase D3 un-corr. (Psd,max + Ptd,max):

Stress Description	Actual	Allowable	Pass/Fail
Tubesheet Bend. Stress	110.7	$\leq 356.2 \text{ N./mm}^2$	Pass
Tubesheet Shear Stress	10.2	$\leq 190.0 \text{ N./mm}^2$	Pass
Maximum Stress in the Tubes	28.5	$\leq 171.0 \text{ N./mm}^2$	Pass
Minimum Tube Stress (Buckling)	-8.0	$\leq -171.0 \text{ N./mm}^2$	Pass
Maximum Force on any one Tube	326.3	$\leq 1958.0 \text{ Kgf}$	Pass



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 92 of 275

ASME TS Calc: Pressure Test

Case: 1 6:05p Sep 8,2026

Thickness Results for Loadcase D3 un-corr. (Psd,max + Ptd,max):

Thickness (mm)	Required	Actual	P/F
Tubesheet Thickness :	61.170	115.000	Ok
Tube-Tubesheet Fillet Weld Leg :	1.281	2.110	Ok
Tube-Tubesheet Groove Weld Leg :	1.281	2.110	Ok

Stationary Tubesheet results per ASME Div. 2 Part 4.18.9 2025

Results for 3 Load Cases:

Case#	--Reqd. Thk. + CA		---- Tubesheet Stresses				Case Type	Pass/Fail	
	Tbsht	Extnsn	Bend	Allwd	Shear	Allwd			
D1uc	90.690	7.390	231	356	21	190	Ps+Pt-Th	D1	Ok
D2uc	63.827	3.843	120	356	11	190	Ps+Pt-Th	D2	Ok
D3uc	61.170	3.547	111	356	10	190	Ps+Pt-Th	D3	Ok
Max:	90.6905	7.390 mm		0.647		0.112	(Str. Ratio)		

Load Case Definitions:

[Ps & Pt]:

Shell-side and Tube-side Design or Operating Pressures derived from Psd,min Ptd,max, Psox,min, Ptox,max etc. per the Load Case Tables

[(+)-Th]:

With or Without Thermal Expansion, Tt,mx & Ts,mx

[c]:

With or Without Corrosion Allowance

[D1, D2, D3]:

Design Load Cases using the Maximum and Minimum Design Pressures

[D4]:

Design Load Case using the Minimum (Vacuum) Pressures (if specified)

[O1, O2, O3, O4]:

Operating Load Cases using the Maximum and Minimum Operating Pressures and Operating Temperatures

Tube, Shell and Channel Stress Summary:

Case#	---- Tube Stresses						Tube Loads		Shell Stress		Channel Stress		Pass Fail
	Ten	Allwd	Cmp	Allwd	Ld	Allwd			Stress	Allwd	Stress	Allwd	
D1uc	61	170	-15	-170	696	1957			...	...	...	...	Ok
D2uc	32	170	-32	-170	370	1957			...	...	...	...	Ok
D3uc	28	170	-8	-170	326	1957			...	...	...	...	Ok
Max RATIO	0.355			0.189		0.355			...			...	

Summary of Thickness Comparisons for 3 Load Cases:

Thickness (mm)	Required	Actual	P/F
Tubesheet thickness :	90.690	115.000	Ok
Tube thickness :	0.317	2.110	Ok
Tube-tubesheet fillet weld leg :	1.281	2.110	Ok
Tube-tubesheet groove weld leg :	1.281	2.110	Ok

Note: This is a full strength Tube to Tubesheet Joint.



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 93 of 275

ASME TS Calc: Pressure Test

Case: 1 6:05p Sep 8, 2026

PV Elite is a trademark of Hexagon AB, 2026, All rights reserved.



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 94 of 275

ASME Fl-TS Calc: Pressure Test

Case: 1 6:05p Sep 8,2026

Input Echo, Tubesheet Number 1, Description: Floatating tube

Shell Data:

Main Shell Description: Main Shell

Shell Test Pressure		676.00 KPa.
Shell Thickness	ts	18.0000 mm
Shell Internal Corrosion Allowance	cas	0.0000 mm
Shell External Corrosion Allowance	casext	0.0000 mm
Inside Diameter of Shell	Ds	2480.000 mm
Shell Temperature for Internal Pressure	Ts	21.11 °C
Shell Material		SA-516 70

See ASME VIII Div. 1, UG-23(e), for determination of the SPS allowable.

Shell Material UNS Number		K02700
Shell Allowable Stress at Temperature	Ss	138.00 N./mm ²
Shell Allowable Stress at Ambient		138.00 N./mm ²

Channel Data:

Channel Description: LHS Ch Shell

Channel Type:		Cylinder
Channel Test Pressure		1300.00 KPa.
Channel Thickness	tc	20.0000 mm
Channel Internal Corrosion Allowance	cac	0.0000 mm
Channel External Corrosion Allowance	cacext	0.0000 mm
Inside Diameter of Channel	Dc	2480.000 mm
Channel Design Temperature	TEMPC	21.11 °C
Channel Flange Matl		SA-516 70

See ASME VIII Div. 1, UG-23(e), for determination of the SPS allowable.

Channel Material UNS Number		K02700
Channel Allowable Stress at Temperature	Sc	138.00 N./mm ²
Channel Allowable Stress at Ambient		138.00 N./mm ²

Tube Data:

Number of Tube Holes	Nt	6000
Tube Wall Thickness	et	2.1100 mm
Tube Outside Diameter	D	19.0500 mm
Total Straight Tube Length	Lt	6000.00 mm
Straight Tube Length (bet. inner tubsht faces) L		5770.00 mm
Design Temperature of the Tubes		21.11 °C
Tube Material		SA-179
Tube Material UNS Number		K01200
Is this a Welded Tube		No
Tube Material Specification used	Smls. tube	
Tube Allowable Stress at Temperature		92.40 N./mm ²
Tube Allowable Stress At Ambient		92.40 N./mm ²
Tube Yield Stress At design Temperature	Syt	180.00 N./mm ²
Tube Pitch (Center to Center Spacing)	P	25.4000 mm
Tube Layout Pattern		Triangular

Fillet Weld Leg	af	2.1100 mm
Groove Weld Leg	ag	2.1100 mm
Tube-Tubesheet Joint Weld Type		Full Strength
Method for Tube-Tubesheet Jt. Allowable		UW-20.3
Is the Tube Inset		No

Radius to Outermost Tube Hole Center	ro	1130.510 mm
Largest Center-to-Center Tube Distance	U1	0.0000 mm
Length of Expanded Portion of Tube	ltx	0.0000 mm
Tube-side pass partition groove depth	hg	0.0000 mm
Area of Tube Layout	Ap	32948.0 cm ²
Perimeter of Tube Layout	Cp	7006.7 mm



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 95 of 275

ASME Fl-TS Calc: Pressure Test

Case: 1 6:05p Sep 8,2026

Tubesheet Data:

Tubesheet TYPE: Floating, Tubesheet Gasketed, Conf. B
Exchanger TYPE: With an Immersed Floating Head, Conf. a

Tubesheet Design Metal Temperature T 21.11 °C
Tubesheet Material SA-266 2

See ASME VIII Div. 1, UG-23(e), for determination of the SPS allowable.

Tubesheet Material UNS Number		K03506
Tubesheet Allowable Stress at Temperature	S	138.00 N./mm ²
Tubesheet Allowable Stress at Ambient	Tt	138.00 N./mm ²
Thickness of Tubesheet	h	115.0000 mm
Tubesheet Corr. Allowance (Shell side)	Cats	0.0000 mm
Tubesheet Corr. Allowance (Channel side)	Catc	0.0000 mm
Tubesheet Outside Diameter	A	2465.000 mm

Additional Data for Stepped Tubesheets:

Is the Tubesheet Stepped? No

Area of the Untubed Lanes AL 0.0 cm²

Additional Data for Fixed/Floating Tubesheet Exchangers:

Unsupported Tube Span under consideration l 635.910 mm
Tube End condition corresponding to Span (l) k 1.00

Ignore Radial Thermal Exp. effects (4.18.8/4.18.9) Yes
Perform Differential Pressure Design No
Run Multiple Load Cases Yes
Junction Stress Reduction option Perform Plastic Calculation

Additional Data for Gasketed Tubesheets:

Tubesheet Gasket on which Side		Channel
Flange Outside Diameter	A	2465.000 mm
Flange Inside Diameter	B	2297.000 mm
Flange Face Outside Diameter	Fod	2326.000 mm
Flange Face Inside Diameter	Fid	2297.000 mm
Gasket Outside Diameter	Go	2323.000 mm
Gasket Inside Diameter	Gi	2297.000 mm
Gasket Factor,	m	3.00
Gasket Design Seating Stress	y	68.95 N./mm ²
Flange Facing Sketch	Code	Sketch 1a
Gasket Thickness	tg	6.3500 mm
Full face Gasket Flange Option		Program Selects

Bolting Information:

Diameter of Bolt Circle	C	2368.000 mm
Nominal Bolt Diameter	dB	38.1000 mm
Thread Series	TEMA Thread Series	
Number of Bolts	n	72
Bolt Material		SA-193 B7M
Bolt Material UNS Number		G41400
Bolt Allowable Stress At Temperature	Sb	138.00 N./mm ²
Bolt Allowable Stress At Ambient	Sa	138.00 N./mm ²
Weld between Flange and Shell/Channel		0.0000 mm

Note: The full bolt load Sa*Ab, was used for all load cases.

Tubesheet Extended as Flange Yes
Thickness of Extended Portion of Tubesheet Tf 99.0000 mm
Is Bolt Load Transferred to the Tubesheet Yes

Is Exchanger in Creep range (skip EP, Use 3S for Sps) No




PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 96 of 275

ASME Fl-TS Calc: Pressure Test

Case: 1 6:05p Sep 8, 2026

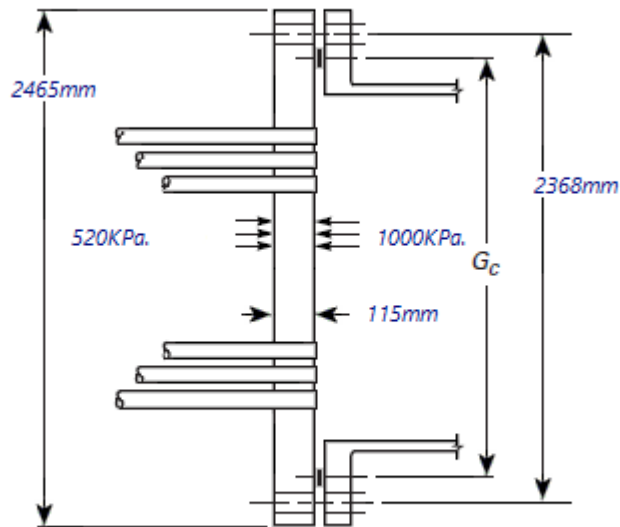Tubesheet Gasketed, Extended as a Flange**Configuration B:****ASME TubeSheet Results per Part UHX/4.18, 2025****Elasticity/Expansion Material Properties:**

Shell - TE-1 Carbon & Low Alloy Steels, Group 1
Shell - TM-1 Carbon Steels with C<= 0.3%

Th. Exp. Coeff. Metal Temp. along Len	21.1 °C	0.0000115191 /°C
Elastic Mod. at Design Temperature	21.1 °C	0.20270E+09 KPa.
Th. Exp. Coeff. Metal Temp. at Tubsht	21.1 °C	0.0000115191 /°C
Elastic Mod. at Metal Temp. along Len	21.1 °C	0.20270E+09 KPa.
Elastic Mod. at Ambient Temperature	21.1 °C	0.20270E+09 KPa.

Channel - TE-1 Carbon & Low Alloy Steels, Group 1
Channel - TM-1 Carbon Steels with C<= 0.3%

Th. Exp. Coeff. Metal Temp. at Tubsht	21.1 °C	0.0000115191 /°C
Elastic Mod. at Design Temperature	21.1 °C	0.20270E+09 KPa.
Elastic Mod. at Ambient Temperature	21.1 °C	0.20270E+09 KPa.

Tubes - TE-1 Carbon & Low Alloy Steels, Group 1
Tubes - TM-1 Carbon Steels with C<= 0.3%

Th. Exp. Coeff. Metal Temp. along Len	21.1 °C	0.0000115191 /°C
Elastic Mod. at Design Temperature	21.1 °C	0.20270E+09 KPa.
Elastic Mod. at Metal Temp. along Len	21.1 °C	0.20270E+09 KPa.
Elastic Mod. at Tubsht. Design Temp.	21.1 °C	0.20270E+09 KPa.
Elastic Mod. at Ambient Temperature	21.1 °C	0.20270E+09 KPa.

TubeSheet - TE-1 Carbon & Low Alloy Steels, Group 1
TubeSheet - TM-1 Carbon Steels with C> 0.3%

Elastic Mod. at Design Temperature	21.1 °C	0.20132E+09 KPa.
Elastic Mod. at Ambient Temperature	21.1 °C	0.20132E+09 KPa.



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 97 of 275

ASME Fl-TS Calc: Pressure Test

Case: 1 6:05p Sep 8, 2026

Note:

The Elasticity and Alpha values are taken from Tables in ASME II D.
Please insure these properties are consistent with the
type of Material for the tubes, shell, channel etc.

Tube Required Thickness under Internal Pressure (Tubeside pressure):

Thickness Due to Internal Pressure:

$$= (P \cdot (D/2 - CAE)) / (S \cdot E + 0.4 \cdot P) \text{ per Appendix 1-1 (a)(1)}$$

$$= (1300 \cdot (19/2 - 0)) / (92.4 \cdot 1 + 0.4 \cdot 1300)$$

$$= 0.1333 + 0.0000 = 0.1333 \text{ mm}$$

Tube Required Thickness under External Pressure (Shellside pressure) :

External Pressure Chart CS-1 at 21.11 °C
Elastic Modulus for Material 199943392.00 KPa.

Results for Max. Allowable External Pressure (Emawp):

TCA	ODCA	SLEN	D/T	L/D	Factor A	B
2.1100	19.05	5770.00	9.03	50.0000	0.0134948	95.84
EMAWP = (2.167/(D/T) - 0.0833) * B = 15019 KPa.						

Results for Req'd Thickness for Ext. Pressure (Tca):

TCA	ODCA	SLEN	D/T	L/D	Factor A	B
0.3171	19.05	5770.00	60.08	50.0000	0.0003047	30.46
EMAWP = (4*B)/(3*(D/T)) = (4 * 30.5)/(3 * 60.1) = 676 KPa.						

Summary of Tube Required Thickness Results:

Total Required Thickness including Corrosion all.	0.3171 mm
Allowable Internal Pressure at Corroded thickness	22456.99 KPa.
Required Internal Design Pressure	1300.00 KPa.
Allowable External Pressure at Corroded thickness	15019.20 KPa.
Required External Design Pressure	676.00 KPa.
Required Thickness due to Shell Side pressure	0.3171 mm

Detailed Results for load Case D3 un-corr. (Psd,max + Ptd,max)

Intermediate Calculations For Tubesheets Extended As Flanges:

ASME Code, Section VIII Division 1, 2025

Gasket Contact Width,	N = (Goc - Gic) / 2	13.000 mm
Basic Gasket Width,	b0 = N / 2	6.500 mm
Effective Gasket Width,	b = sqrt(b0) * 2.5	6.422 mm
Gasket Reaction Diameter,	G = Go - 2.0 * b	2310.156 mm

Results for ASME Floating Tubesheet Calculations for Configuration B:

Results for Tubesheet Calculations Original Thickness:

ASME Section VIII-2 Part 4.18.9.4 Step 1:

Tube expansion depth ratio [p]:

$$= l_{tx} / h \text{ (modified for corrosion if present)}$$

$$= 0/115$$

$$= 0.0000 \text{ (must be } 0 \leq p \leq 1 \text{)}$$

Effective tube hole diameter [d*]:

$$= \max(dt - 2 \cdot tt(Et/E) \cdot (StT/S) \cdot (p); dt - 2 \cdot tt)$$

$$= \max(19 - 2 \cdot 2.11 (202701232/201322320) \cdot (92.4/138) \cdot (0); 19 - 2 \cdot 2.11)$$

$$= 19.0500 \text{ mm}$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 98 of 275

ASME Fl-TS Calc: Pressure Test

Case: 1 6:05p Sep 8, 2026

Equivalent outer tube limit circle diameter [Do]:

$$= 2 \cdot r_o + d_t$$

$$= 2 \cdot 1131 + 19$$

$$= 2280.070 \text{ mm}$$

Determine the basic ligament efficiency for shear [μ]:

$$= (p - d_t) / p$$

$$= (25.4 - 19) / 25.4$$

$$= 0.250$$

Equivalent outer tube limit radius [ao]:

$$= D_o / 2$$

$$= 2280 / 2$$

$$= 1140.0350 \text{ mm}$$

Effective tube pitch [p^*]:

$$= p / \sqrt{1 - 4 \cdot \min(AL \cdot CNVfactor; 4 \cdot D_o \cdot p) / (\pi \cdot D_o^2)}$$

$$= 25.4 / \sqrt{1 - 4 \cdot \min(0 \cdot 100; 4 \cdot 2280 \cdot 25.4) / (\pi \cdot 2280^2)}$$

$$= 25.4000 \text{ mm}$$

Effective ligament efficiency for bending [μ^*]:

$$= (p^* - d^*) / p^*$$

$$= (25.4 - 19) / 25.4$$

$$= 0.2500$$

Ratio [ps]:

$$= a_s / a_o$$

$$= 1155 / 1140$$

$$= 1.0132$$

Ratio [pc]:

$$= a_c / a_o$$

$$= 1155 / 1140$$

$$= 1.0132$$

Compute parameter [xt]:

$$= 1 - Nt((d_t - 2 \cdot t_t) / (2 \cdot a_o))^2$$

$$= 1 - 6000((19 - 2 \cdot 2.11) / (2 \cdot 1140))^2$$

$$= 0.7462$$

Determine parameter [xs]:

$$= 1 - Nt(d_t / (2 \cdot a_o))^2$$

$$= 1 - 6000(19 / (2 \cdot 1140))^2$$

$$= 0.5812$$

Determine the value [h'g]:

$$= \max(h_g - CATC; 0) \text{ (For pressure only cases)}$$

$$= \max(0 - 0; 0)$$

$$= 0.000 \text{ mm}$$

ASME Section VIII-2 Part 4.18.9.4 Step 2:

Intermediate parameters for Tubesheet Gasketed on the Shell Side:

β_s , k_s , λ_s , δ_s are all = 0

Intermediate parameters for Tubesheet Gasketed on the Channel Side:

β_C , k_C , λ_C , δ_C are all = 0

ASME Section VIII-2 Part 4.18.9.4 Step 3:

$h/p = 4.527559$; $\mu^* = 0.250000$; $E^* = 43608536 \text{ KPa}$.

$E^*/E = 0.216611$; $\nu^* = 0.396457$

Note: As h/p (4.528) is > 2 , data values for $h/p = 2$ were used.



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 99 of 275

ASME Fl-TS Calc: Pressure Test

Case: 1 6:05p Sep 8, 2026

Tube Bundle Stiffness Factor [Xa]:

$$= ((24(1 - \nu^2) Nt \cdot Et \cdot tt(dt - tt) ao^2) / (E \cdot L \cdot H^3))^{1/4}$$

$$= ((24(1 - 0.4^2) 6000 \cdot 202701232 \cdot 2.11$$

$$(19 - 2.11) 1140^2) / (43608536 \cdot 5770 \cdot 115^3))^{1/4}$$

$$= 7.3924$$

Values from Table 4.18.3

$$Zd = 0.003673 ; Zv = 0.018388 ; Zm = 0.193865$$

$$Za = 0.485565E+03 ; Zw = 0.018388$$

ASME Section VIII-2 Part 4.18.9.4 Step 4:

Diameter ratio [K]:

$$= A / Do$$

$$= 2465/2280$$

$$= 1.0811$$

Compute coefficient [F]:

$$= (1 - \nu) / E \cdot (\lambda_s + \lambda_c + E \cdot \ln(K))$$

$$= (1 - 0.4) / 43608536 \cdot (0 + 0 +$$

$$201322320 \cdot \ln(1.08))$$

$$= 0.2173$$

Compute parameter [ϕ]:

$$= (1 + \nu) F$$

$$= (1 + 0.4) 0.22$$

$$= 0.3034$$

Compute parameter [Q1]:

$$= (ps - 1 - \phi \cdot Zv) / (1 + \phi \cdot Zm)$$

$$= (1.01 - 1 - 0.3 \cdot 0.018) / (1 + 0.3 \cdot 0.19)$$

$$= 0.007192$$

ASME Section VIII-2 Part 4.18.9.4 Step 5:

Determine factor [γ_b]:

$$= (Gc - C) / Do \text{ (config b)}$$

$$= (2310 - 2368) / 2280 = -0.025$$

Calculate parameter [ω_s]:

$$= ps \cdot ks \cdot \beta_s \cdot \delta S (1 + h \cdot \beta_s)$$

$$= 1.01 \cdot 0 \cdot 0 \cdot 0.000 (1 + 115 \cdot 0)$$

$$= 0.0000 \text{ mm}^2$$

Calculate parameter [ω_s]:

$$= ao^2(ps^2 - 1) \cdot (ps - 1) / 4 - \omega_s$$

$$= 1140^2(1.01^2 - 1) \cdot (1.01 - 1) / 4 - 0$$

$$= 113.8897 \text{ mm}^2$$

Parameter [ω_c]:

$$= pc \cdot kc [\delta C (CmTheta \cdot \beta C + Cq\Delta \cdot h \cdot \beta C^2) -$$

$$\zeta c (CmTheta + h \cdot CqTheta \cdot h \cdot \beta C / 2))$$

$$= 1.01 \cdot 0 [0.000 (0 + 0 \cdot 0 \cdot 115) -$$

$$0.000 (0/115 + 0 \cdot 0/2))$$

$$= 0.0000 \text{ mm}^2$$

Parameter [ω_c]:

$$= ao^2 [(pc^2 + 1) \cdot (pc - 1) / 4 - (ps - 1) / 2] - \omega_c$$

$$= 1140^2 [(1.01^2 + 1) \cdot (1.01 - 1) / 4 - (1.01 - 1) / 2] - 0$$

$$= 113.8891 \text{ mm}^2$$

Pressure [P*S]:

$$= 0 \text{ For Pressure only cases or Configurations d,e,f,A,B,C,D}$$

Pressure [P*C]:



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 100 of 275

ASME Fl-TS Calc: Pressure Test

Case: 1

6:05p

Sep 8, 2026

= 0 For Pressure only cases or Configurations b,c,d,B,C,D

ASME Section VIII-2 Part 4.18.9.4 Step 6:

$$P_e = P_s - P_t$$

$$= 676 - 1300 = -624 \text{ KPa.}$$

ASME Section VIII-2 Part 4.18.9.4 Step 7:

Determine factor [Q2]:

$$= [((\omega * s * P_s - \omega * c * P_t) - (\omega * s * P * s - \omega * c * P * c)) +$$

$$W * \gamma_b / (2 * \pi)] / (1 + \phi * Z_m)$$

$$= [((114 * 676 - 114 * 1300) -$$

$$(0 * 0 - 0 * 0)) * 0.0001 +$$

$$918372 * -0.025 / (2 * \pi)] / (1 + 0.3 * 0.19)$$

$$= -3508.9309 \text{ Kgf}$$

Calculate factor [Q3]:

$$= Q_1 + 2 * Q_2 / (P_e * a_o^2)$$

$$= 0.0072 + 2 * -3509 / (-624 * 1140^2)$$

$$= 0.09205$$

Fm Value from Table 4.18.3 = 0.068324

Tubesheet Bending Stress - original thickness [σ]:

$$= (1.5 * F_m / \mu *) * (2 * a_o / (H - h'g))^2 * P_e$$

$$= (1.5 * 0.068 / 0.25) * (2 * 1140 / (115 - 0))^2 * -624$$

$$= -100.5623 \text{ N./mm}^2$$

Allowable Tubesheet Bending Stress [σ allowed]:

$$= 1.5 * \beta T * S_y = 1.5 * 0.95 * 250 = 356 \text{ N./mm}^2, 4.18.233$$

Tubesheet Bending Stress - final thickness [σ_f]:

$$= (1.5 * F_m / \mu *) * (2 * a_o / (h - h'g))^2 * P_e$$

$$= (1.5 * 0.059 / 0.25) * (2 * 1140 / (56.8 - 0))^2 * -624$$

$$= 356.2436 \text{ N./mm}^2$$

Reqd Tubesheet Thickness, for Bending Stress (including CA) [HReqB]:

$$= h + C_{ats} + C_{atc}$$

$$= 56.8 + 0 + 0$$

$$= 56.7591 \text{ mm}$$

$$H \text{ reqd.} = H_{ReqB} = 56.7591 \text{ mm}$$

Computations completed for ASME tubesheet configuration: B

Stress/Force Summary for Loadcase D3 un-corr. (Psd,max + Ptd,max):

Stress Description	Actual	Allowable	Pass/Fail
Tubesheet bend. stress	100.6 <=	356.2 N./mm ²	Pass

Floating Tubesheet results per ASME Div. 2 Part 4.18.9 2025

Results for 3 Load Cases:

Case#	--Reqd. Thk. + CA Tbsht Extnsn	----	Tubesheet Stresses				Case Type	Pass/Fail
		Bend	Allwd	Shear	Allwd			
D1uc	68.733	42.248	154	356	...	...	Ps+Pt-Th	D1 Ok
D2uc	31.361	...	56	356	...	...	Ps+Pt-Th	D2 Ok
D3uc	56.759	...	101	356	...	...	Ps+Pt-Th	D3 Ok
Max:	68.7331	42.248 mm	0.433			...	(Str. Ratio)	



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 101 of 275

ASME Fl-TS Calc: Pressure Test

Case: 1 6:05p Sep 8, 2026

Load Case Definitions:

[Ps & Pt]:

Shell-side and Tube-side Design or Operating Pressures

derived from Psd,min Ptd,max, Psox,min, Ptox,max etc. per the Load Case Tables

[(+)-Th]:

With or Without Thermal Expansion, Tt,mx & Ts,mx

[c]:

With or Without Corrosion Allowance

[D1, D2, D3]:

Design Load Cases using the Maximum and Minimum Design Pressures

[D4]:

Design Load Case using the Minimum (Vacuum) Pressures (if specified)

[O1, O2, O3, O4]:

Operating Load Cases using the Maximum and Minimum Operating Pressures and Operating Temperatures

Summary of Thickness Comparisons for 3 Load Cases:

Thickness (mm)	Required	Actual	P/F
Tubesheet thickness :	68.733	115.000	Ok
Tubesheet thickness flanged extension :	42.248	99.000	Ok
Tube thickness :	0.317	2.110	Ok
Tube-tubesheet fillet weld leg :	0.000	2.110	Ok
Tube-tubesheet groove weld leg :	0.000	2.110	Ok

PV Elite is a trademark of Hexagon AB, 2026, All rights reserved.



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 102 of 275

Floating Head: Operating

Case: 1 6:05p Sep 8,2026

Input Echo, Floating Head Item 1, Description: Operating

Floating Head Type		D	
Tube Side (Internal) Design Pressure	Pts	1000.00	KPa.
Shell Side (External) Design Pressure	Pss	520.00	KPa.
Design Temperature for Spherical Head	Temp	130.00	°C
Head Material		SA-516 70	
Head Material UNS Number		K02700	
Head Allowable Stress at Temperature	Sho	138.00	N./mm ²
Head Allowable Stress at Ambient	Sha	138.00	N./mm ²
Crown Radius for Spherical Head	L	2067.000	mm
Head Thickness	Th	30.000	mm
Tube Side (Internal) Corrosion Allowance	Cats	0.0000	mm
Shell Side (External) Corrosion Allowance	Cass	0.0000	mm
Flange Material		SA-266	
Flange Allowable Stress at Temperature	Sfo	138.00	N./mm ²
Flange Allowable Stress at Ambient	Sfa	138.00	N./mm ²
Flange Outside Diameter	Fod	2465.000	mm
Flange Inside Diameter	Fid	2297.000	mm
Flange Thickness	Tf	170.0000	mm
Bolt Material		SA-193 B7M	
Bolt Material UNS Number		G41400	
Bolt Allowable Stress At Temperature	Sb	138.00	N./mm ²
Bolt Allowable Stress At Ambient	Sa	138.00	N./mm ²
Diameter of Bolt Circle	C	2368.000	mm
Nominal Bolt Diameter	dB	38.1000	mm
Type of Threads		TEMA Thread Series	
Number of Bolts		72	
Full face Gasket Flange Option		Program Selects	
Flange Face Outside Diameter	Ffod	2326.000	mm
Flange Face Inside Diameter	Ffid	2297.000	mm
Gasket Outside Diameter	Go	2323.000	mm
Gasket Inside Diameter	Gi	2297.000	mm
Gasket Factor,	m	3.0000	
Gasket Design Seating Stress	y	68.95	N./mm ²
Flange Facing Sketch		Code Sketch 1a	
Column for Gasket Seating		Code Column I	
Gasket Thickness		6.3500	mm
Width of raised face		0.0000	mm
Dist. from Head Centerline to Flange Centroid hr		15.0566	mm
The Flange is not Slotted.			
This unit does not have a Backing Ring.			
Use Full Bolt Load in Flange Design		Yes	




PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 103 of 275

Floating Head: Operating

Case: 1 6:05p Sep 8, 2026

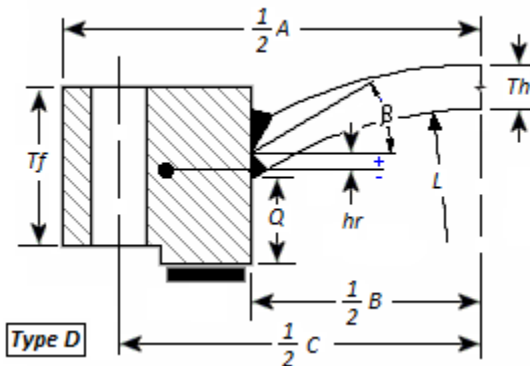

Internal Pressure results for Spherical Heads:

ASME Code, Section VIII, Division 1, 2025, App. 1-6

Thickness Due to Internal Pressure[thr]:

$$\begin{aligned} &= 5PL / 6Sho \\ &= (5 \cdot 1000 \cdot 2067) / (6 \cdot 138) \\ &= 12.4828 \text{ mm} \end{aligned}$$

Maximum Allowable Working Pressure at Given Thickness[Pa]:

$$\begin{aligned} &= 6Sho \cdot (Th - Cass - Cats) / 5L \\ &= (6 \cdot 138 \cdot 30) / (5 \cdot 2067) \\ &= 2403.30 \text{ KPa.} \end{aligned}$$

Maximum Allowable Pressure, New and Cold[Pnc]:

$$\begin{aligned} &= 6Sha / 5L \\ &= (6 \cdot 138 \cdot 30) / (5 \cdot 2067) \\ &= 2403.30 \text{ KPa.} \end{aligned}$$

Actual Stress at given Pressure and Thickness[Sact]:

$$\begin{aligned} &= 5PL / 6(Th - Cass - Cats) \\ &= (5 \cdot 1000 \cdot 2067) / (6 \cdot 30) \\ &= 57. \text{ N./mm}^2 \end{aligned}$$

Spherical head Percent Elongation $(75 \cdot t_{nom} / R_f) \cdot (1 - R_f / R_o)$: 1.081 %

External Pressure results, Spherical Head

ASME Code, Section VIII Division 1, 2025

External Pressure Chart CS-2 at 130.00 °C
Elastic Modulus for Material 199943392.00 KPa.

Results for Maximum Allowable External Pressure:

Corroded Thickness of Shell	TCA	30.0000	mm
Outside Crown Radius of Shell	OD/2	2096.9998	mm
Crown Radius / Thickness Ratio	$(OD/2)/T$	69.9000	
Geometry Factor, A	f(D/T, LD)	0.0017883	
Materials Factor, B	f(A, Chart)	101.1631	N./mm ²
Maximum Allowable Working Pressure		1447.17	KPa.
$EMAWP = B / ((OD/T)/2) = 101 / (140/2.0) = 1447$			

Results for Req'd Thickness for Ext. Pressure (Tca):

Corroded Thickness of Head	TCA	13.7952	mm
Outside Diameter of Shell	ODCA	4194.000	mm
Diameter / Thickness Ratio	(D/T)	304.0179	
Geometry Factor, A	f(DT, LD)	0.0008223	
Materials Factor, B	f(A, Chart)	79.0580	N./mm ²
Maximum Allowable Working Pressure		520.06	KPa.
$EMAWP = B / ((D/T)/2) = 79.1 / (304/2) = 520$			



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 104 of 275

Floating Head: Operating

Case: 1 6:05p Sep 8, 2026

Intermediate Calculations for Flanged portion:

ASME Code, Section VIII, Div. 1, 2025 App. 2

Gasket Contact Width, $N = (G_{oc} - G_{ic}) / 2$ 13.000 mm
 Basic Gasket Width, $b_0 = N / 2$ 6.500 mm
 Effective Gasket Width, $b = \sqrt{b_0} * 2.5$ 6.422 mm
 Gasket Reaction Diameter, $G = G_o - 2.0 * b$ 2310.156 mm

ASME Maximum Circumferential Spacing between Bolts per App. 2 eq. (3) [B_{max}]:

$= 2a + 6t / (m + 0.5)$
 $= 2 * 38.1 + 6 * 170 / (3 + 0.5)$
 $= 367.629 \text{ mm}$

Actual Circumferential Bolt Spacing [B_s]:

$= C * \sin(\pi / n)$
 $= 2368 * \sin(\pi / 72)$
 $= 103.291 \text{ mm}$

ASME Moment Multiplier for Bolt Spacing per App. 2 eq. (7) [B_{sc}]:

$= \max(\sqrt{B_s / (2a + t)}, 1)$
 $= \max(\sqrt{103 / (2 * 38.1 + 170)}, 1)$
 $= 1.0000$

Bolting Information for TEMA Imperial Thread Series (Non Mandatory):

Total Area of Bolts 652.644 cm²

	Minimum	Actual	Maximum
Radial Distance between Bolts and Edge:	38.100	48.500	
Circ. Spacing between the Bolts:	82.550	103.291	367.629

Results for the Internal Pressure case:

Basic Flange and Bolt loads:

Hydrostatic End Load due to Pressure H 427433.9 Kg_f
 Contact Load on Gasket Surfaces H_p 28518.3 Kg_f
 Hydrostatic End Load at Flange ID H_d 422579.5 Kg_f
 Pressure Force on Flange Face H_t 4854.4 Kg_f
 Radial Component of Head Membrane Force H_r 635376.6 Kg_f
 Operating Bolt Load: W_{m1} 455952.2 Kg_f
 Gasket Seating Bolt Load W_{m2} 327703.7 Kg_f
 Required Bolt Area A_m 324.024 cm²

Min. Gasket Contact Width (Brownell Young) [Not an ASME Calculation]:

$= A_b * S_b / (y * \pi * (G_o + G_i))$
 $= 653 * 138 / (68.9 * 3.14 * (2323 + 2297))$
 $= 9.000 \text{ mm}$

Note: Recommended Min. Width for Sheet and Composite Gaskets per table 2-4 :

= 38.100 mm [Note: Exceeds actual gasket width, 13.000]

Flange Design Bolt Load (Seating) W 918372.3 Kg_f
 Gasket Seating Force (Operating) H_g 28518.3 Kg_f
 Distance to Gasket Load Reaction h_g 28.9222 mm
 Distance to Face Pressure Reaction h_t 32.2111 mm
 Distance to End Pressure Reaction h_d 35.5000 mm

Summary of Moments for Internal Pressure:

Loading	Force	Distance	Bolt Corr	Moment
End Pressure, Md	422580.	35.5000	1.0000	15002. Kg-m.



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 105 of 275

Floating Head: Operating

Case: 1

6:05p

Sep 8, 2026

Face Pressure,	Mt	4854.	32.2111	1.0000	156. Kg-m.
Gasket Load,	Mg	28518.	28.9222	1.0000	825. Kg-m.
Floating Hd. Load,	Mh	635377.	15.0566	1.0000	-9567. Kg-m.
Gasket Seating,	Ma	918372.	28.9222	1.0000	26562. Kg-m.

Total Moment for Operation (Internal Pressure) 6416.250 Kg-m.

Total Moment for Gasket Seating (Int. Pressure) 26561.844 Kg-m.

Results for the External Pressure case:

Basic Flange and Bolt loads:

Hydrostatic End Load due to Pressure	H	222265.6	Kgf
Hydrostatic End Load at Flange ID	Hd	219741.4	Kgf
Pressure Force on Flange Face	Ht	2524.3	Kgf
Radial Component of Head Membrane Force	Hr	330395.8	Kgf
Gasket Seating Bolt Load	Wm2	327703.7	Kgf
Required Bolt Area	Am	232.884	cm ²

Flange Design Bolt Load (Seating)	W	918372.3	Kgf
Distance to Gasket Load Reaction	hg	28.9222	mm
Distance to Face Pressure Reaction	ht	32.2111	mm
Distance to End Pressure Reaction	hd	35.5000	mm

Summary of Moments for External Pressure:

Loading		Force	Distance	Bolt Corr	Moment
End Pressure,	Md	219741.	6.5778	1.0000	1445. Kg-m.
Face Pressure,	Mt	2524.	3.2889	1.0000	8. Kg-m.
Floating Hd. Load,	Mh	330396.	15.0566	1.0000	-4975. Kg-m.
Gasket Seating,	Ma	918372.	28.9222	1.0000	26562. Kg-m.

Total Moment for Operation (External Pressure) 3520.991 Kg-m.

Total Moment for Gasket Seating (Ext. Pressure) 26561.844 Kg-m.

Factor for integral type flanges [F]:

$$= P \cdot B \cdot \sqrt{(4 \cdot L \cdot L - B \cdot B) / (8 \cdot S(A - B))}$$

$$= 1000 \cdot 2297 \cdot \sqrt{(4 \cdot 2067 \cdot 2067 - 2297 \cdot 2297) / (8 \cdot 138(2465 - 2297))}$$

$$= 42.5706 \text{ mm}$$

Factor [J]:

$$= Mo(A + B) / (S \cdot B)(A - B)$$

$$= 6416(2465 + 2297) / (138 \cdot 2297)(2465 - 2297)$$

$$= 5626.6411 \text{ mm}^2$$

Required thickness for Main Flange, Internal Operating Condition [T]:

$$= F + \sqrt{(F \cdot F + J)} \text{ per 1-6(g)}$$

$$= 42.6 + \sqrt{(42.6 \cdot 42.6 + 5627)}$$

$$= 128.8196 \text{ mm}$$

Factor [J]:

$$= Mo(A + B) / (S \cdot B)(A - B)$$

$$= 26562(2465 + 2297) / (138 \cdot 2297)(2465 - 2297)$$

$$= 23293.0391 \text{ mm}^2$$

Required thickness for Main Flange, Internal Bolt-up Condition [T]:

$$= F + \sqrt{(F \cdot F + J)} \text{ per 1-6(g)}$$

$$= 0 + \sqrt{(0 \cdot 0 + 23293)}$$

$$= 152.6206 \text{ mm}$$

Factor for integral type flanges [F]:

$$= P \cdot B \cdot \sqrt{(4 \cdot L \cdot L - B \cdot B) / (8 \cdot S(A - B))}$$

$$= 520 \cdot 2297 \cdot \sqrt{(4 \cdot 2067 \cdot 2067 - 2297 \cdot 2297) / (8 \cdot 138(2465 - 2297))}$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 106 of 275

Floating Head: Operating

Case: 1 6:05p Sep 8, 2026

= 22.1367 mm

Factor [J]:

= $Mo(A + B)/(S \cdot B)(A - B)$

= $3521(2465+2297)/(138 \cdot 2297)(2465-2297)$

= 3087.6841 mm²

Required thickness for Main Flange, External Operating Condition [T]:

= $F + \sqrt{(F \cdot F + J)}$ per 1-6(g)

= $22.1 + \sqrt{(22.1 \cdot 22.1 + 3088)}$

= 81.9507 mm

Factor [J]:

= $Mo(A + B)/(S \cdot B)(A - B)$

= $26562(2465+2297)/(138 \cdot 2297)(2465-2297)$

= 23293.0391 mm²

Required thickness for Main Flange, External Bolt-up Condition [T]:

= $F + \sqrt{(F \cdot F + J)}$ per 1-6(g)

= $0 + \sqrt{(0 \cdot 0 + 23293)}$

= 152.6206 mm

Summary of Required Thicknesses(mm):

	Head	Flange
Tubeside (Internal) Pressure	12.4828	128.8196
Shellside (External) Pressure	13.7952	81.9507
Tubeside Gasket Seating Load		152.6206
Shellside Gasket Seating Load		152.6206
Maximum + Corrosion Allowance	13.7952	152.6206
Actual Thickness as Given	30.0000	170.0000

Floating Head MAWP and MAPnc (KPa.):

Stress Condition	Tubeside		Shellside	
	MAWP	MAPnc	MAWP	MAPnc
Flange Stress	1440.87	1440.87	1412.60	1412.60
Floating head Stress	2403.20	2403.20	1447.07	1447.07
Bolt Stress	2014.09	2014.09	...	...
Minimum MAWP & MAPnc	1440.87	1440.87	1412.60	1412.60

PV Elite is a trademark of Hexagon AB, 2026, All rights reserved.



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 107 of 275

External Pressure Calculations: Step: 16 6:05pm Sep 8,2026

External Pressure Calculation Results Summary:

ASME Code, Section VIII Division 1, 2025

External Pressure Calculations:

From	To	Section Length mm	Outside Diameter mm	Corroded Thickness mm	Factor A	Factor B N./mm ²
10	20	No Calc	...	133	No Calc	No Calc
20	30	No Calc	...	209	No Calc	No Calc
30	40	1500	2520	17	0.0012866	92.6695
40	50	No Calc	...	209	No Calc	No Calc
50	60	No Calc	...	217	No Calc	No Calc
60	70	5600	2516	15	0.00026855	26.8488
70	80	No Calc	...	208	No Calc	No Calc
80	90	No Calc	...	199	No Calc	No Calc
90	100	1757.47	2520	17	0.0010867	87.8149
100	110	No Calc	2512	13	0.00071877	71.861

External Pressure Calculations:

From	To	External Actual T. mm	External Required T. mm	External Design Pressure KPa.	External M.A.W.P. KPa.
10	20	136	64.897	103.419	No Calc
20	30	212	207.95	103.419	No Calc
30	40	20	9.51664	103.419	833
40	50	212	207.95	103.419	No Calc
50	60	220	216.84	103.419	No Calc
60	70	18	14.2392	103.419	213
70	80	211	206.375	103.419	No Calc
80	90	202	196.85	103.419	No Calc
90	100	20	9.93533	103.419	790
100	110	16	9.50406	103.419	413

Minimum

213

External Pressure Calculations:

From	To	Actual Length Bet. Stiffeners mm	Allowable Length Bet. Stiffeners mm	Ring Inertia Required cm ⁴	Ring Inertia Available cm ⁴
10	20	No Calc	No Calc	No Calc	No Calc
20	30	No Calc	No Calc	No Calc	No Calc
30	40	1500	14520.7	No Calc	No Calc
40	50	No Calc	No Calc	No Calc	No Calc
50	60	No Calc	No Calc	No Calc	No Calc
60	70	5600	11109.4	No Calc	No Calc
70	80	No Calc	No Calc	No Calc	No Calc
80	90	No Calc	No Calc	No Calc	No Calc
90	100	1757.47	14521.5	No Calc	No Calc
100	110	No Calc	No Calc	No Calc	No Calc

Elements Suitable for External Pressure.

PV Elite is a trademark of Hexagon AB, 2026, All rights reserved.



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 108 of 275

Element and Detail Weights:

Step: 17

6:05pm

Sep 8,2026

Element and Detail Weights:

From	To	Element Metal Wgt. kg.	Element ID Volume cm ³	Corroded Metal Wgt. kg.	Corroded ID Volume cm ³	Extra due Misc % kg.
10	20	6619.36	...	6619.36	...	661.936
20	30	2002.27	1430405	1948.77	1432161	200.227
30	40	1826.18	7247067	1554.11	7282176	182.618
40	50	2002.27	1430405	1948.77	1432161	200.227
50	60	2061.25	1469244	2006.29	1470999	206.125
60	70	6131.04	17494332	5115.31	17625408	613.104
70	80	1984.49	1425551	1931.17	1427306	198.449
80	90	1916.98	1381858	1865.29	1383613	191.698
90	100	1826.18	6261549	1554.11	6296658	182.618
100	110	1221.37	2242403	1038.17	2258122	122.137
Total		27591	40382816.00	25581	40608608.00	2759



For elements specified as shell side elements, the volume(s) shown above for those elements, reflects the displacement of the tubes.

Weight of Details:

From	Type	Weight of Detail kg.	X Offset, Dtl. Cent. mm	Y Offset, Dtl. Cent. mm	Z Offset, Dtl. Cent. mm	Description
10	Liqd	...	68	-51	...	Liquid: 10
20	Liqd	1429.53	143.5	-30	...	Liquid: 20
30	Liqd	7233.76	750	9.99997	...	Liquid: 30
30	Nozl	227.008	750	1545	...	N3-Tube Inlet
40	Liqd	1429.53	143.5	-30	...	Liquid: 40
50	Liqd	1468.35	147.5	-30	...	Liquid: 50
50	Insl	52.4162	156	...	...	Insulation
60	Sadl	1384.88	1120	1576	...	Left Saddle
60	Sadl	1384.88	4480	1576	...	Sdl 2 Fr60
60	Liqd	17483.7	2800	9.99997	...	Liquid: 60
60	Insl	1621.91	2800	...	...	Insulation
60	Nozl	8.16602	2800	1264.5	...	Vent
60	Nozl	8.16602	2800	-1264.5	...	Drain
60	Nozl	125.647	758.449	1417.8	...	N1-Shell Inlet
60	Nozl	125.647	5190.51	-1417.8	...	N2-Shell Outlet
60	Wght	500	1120	-1900	...	Fireproofing we
60	Wght	500	4480	-1900	...	Wght:[2 of 2]
70	Liqd	1424.68	143	-30	...	Liquid: 70
70	Insl	52.4781	156	...	...	Insulation
80	Liqd	1381.02	138.5	-30	...	Liquid: 80
80	Insl	52.8106	156	...	...	Insulation
90	Liqd	6257.73	750	9.99997	...	Liquid: 90
90	Insl	435.104	750	...	...	Insulation
90	Nozl	208.559	750	-1545	...	N4-Tube Outlet
100	Liqd	2240.6	257.467	9.99997	...	Liquid: 100
100	Insl	363.227	25.25	...	...	Insulation
40	FTsh	3377.7	347.675	...	...	Stationary Tube
40	Tube	34464.4	3290.17	...	...	Tubes
40	FlTs	3002.22	6290.17	...	...	
40	FlHd	2066.42	6375.17	...	...	
50	Bafl	284.226	636	...	...	Baffles
50	Bafl	284.226	1272	...	...	Baffles
50	Bafl	284.226	1908	...	...	Baffles
50	Bafl	284.226	2544	...	...	Baffles



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 109 of 275

Element and Detail Weights:

Step: 17

6:05pm

Sep 8, 2026

50 Baf1	284.226	3180	...	...	Baffles
50 Baf1	284.226	3816	...	...	Baffles
50 Baf1	284.226	4452	...	...	Baffles
50 Baf1	284.226	5088	...	...	Baffles
50 Baf1	284.863	5724	...	...	Baffles

Total Weight of Each Detail Type:

Saddles	2769.8
Liquid	40348.9
Insulation	2577.9
Nozzles	703.2
Weights	1000.0
Exchanger Components	45469.4
Liquid in Tubes	6215.6

Sum of the Detail Weights 99084.8 kg.

Weight Summation Results: (kg.)

	Fabricated	Shop Test	Shipping	Erected	Empty	Operating
Main Elements	30350.5	30350.5	30350.5	30350.5	30350.5	30350.5
Saddles	2769.8	2769.8	2769.8	2769.8	2769.8	2769.8
Nozzles	703.2	703.2	703.2	703.2	703.2	703.2
Exchanger	45469.4	45469.4	45469.4	45469.4	45469.4	45469.4
Insulation	...	...	...	...	2577.9	2577.9 *
Test Weights	...	1000.0	...	...	...	...
Ope Weights	...	...	...	...	...	1000.0
Ope. Liquid	...	...	...	...	...	40348.9
Tube Ope Lqd	...	...	...	...	...	6215.6
Test Liquid	...	40358.2	...	...	...	...
Tube Tst Lqd	...	6215.7	...	...	...	...
Totals	79292.9	126866.8	79292.9	79292.9	81870.9	129435.4

Field Installation Options:

* Insulation installed after lifting.

Miscellaneous Weight Percent: 10.0 %

Note that the above value for the miscellaneous weight percent has been applied to the shells/heads/flange/tubesheets/tubes etc. in the weight calculations for metallic components.

Weight Summary:

Fabricated Wt.	- Bare weight without removable internals	79292.9 kg.
Shop Test Wt.	- Fabricated weight + water (full)	126866.8 kg.
Shipping Wt.	- Fab. weight + removable intls.+ shipping app.	79292.9 kg.
Erected Wt.	- Fab. wt + or - loose items (trays,platforms etc.)	79292.9 kg.
Ope. Wt. no Liq	- Fab. weight + internals. + details + weights	81870.9 kg.
Operating Wt.	- Empty weight + operating liq. uncorroded	129435.4 kg.
Oper. Wt. + CA	- Corr wt. + operating liquid	127224.3 kg.
Field Test Wt.	- Empty weight + test medium (full)	129444.7 kg.

Exchanger Tube Data

Volume of Exchanger tubes :	6219458.0 cm ³
Weight of Ope Liq in tubes :	6215.6 kg.
Weight of Water in tubes :	6215.7 kg.

Surface Areas of Elements:

	Outside Surface	Inside Surface
--	-----------------	----------------



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 110 of 275

Element and Detail Weights:

Step: 17

6:05pm

Sep 8, 2026

From	To	Area cm ²	Area cm ²
10	20	71741	...
20	30	36005.4	22983.9
30	40	118752	116867
40	50	36005.4	22983.9
50	60	36696	23607.2
60	70	442638	436304
70	80	35919	22906
80	90	35142.1	22204.8
90	100	118752	116867
100	110	72859.2	70627.3

Total	1004510.3	855352.0 cm ²
Total	1081.2	920.7 ft ²

PV Elite is a trademark of Hexagon AB, 2026, All rights reserved.



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 111 of 275

Nozzle Flange MAWP:

Step: 18

6:05pm

Sep 8, 2026

Nozzle Flange MAWP Results: (KPa. & °C)

Nozzle Description	Flange Rating Ope.	Flange Rating Ambient	Des. Temp	Class	Grade/Group	Equiv. Press	- - - UG-44	Max Pressure 50%	DNV
N3-Tube Inlet	1820.4	1960.0	82	150	GR 1.1	...	...	...	...
Vent	4574.0	5100.0	130	300	GR 1.1	...	...	...	...
Drain	4574.0	5100.0	130	300	GR 1.1	...	...	...	...
N1-Shell Inlet	1656.0	1960.0	130	150	GR 1.1	2318.5	1324.8	1656.0	165.5
N2-Shell Outle	1656.0	1960.0	130	150	GR 1.1	2318.5	1324.8	1656.0	165.5
N4-Tube Outlet	1656.0	1960.0	130	150	GR 1.1	...	...	...	...

Shellside Flange Rating

Lowest Flange Pressure Rating was (Ope)[ShellSide]: 1324.771 KPa.

Lowest Flange Pressure Rating was (Amb)[ShellSide]: 1960.006 KPa.

Channelside Flange Rating

Lowest Flange Pressure Rating was (Ope)[TubeSide]: 1820.434 KPa.

Lowest Flange Pressure Rating was (Amb)[TubeSide]: 1960.006 KPa.

Selected Method for Derating ASME B16.5 Flange MAWP: ASME UG-44(b)

The UG-44(b) Method is based on the paper PVP 2013-97814. PV Elite uses the maximum loads from each load category to determine ME and FE. In many cases, the computed maximum allowable pressure will be greater than the flange rating. In these cases, the minimum of the rating from the table and the UG-44(b) method will be used. SA-193 B8 Cl. 2 bolts or ones with higher allowable stresses at the specified bolt size shall be used.

The axial force FE must put the nozzle in tension (-P for 107/297; +Fr for PD 5500 AnnexG) to be considered.

Nozzle Description	Gasket Dimension G mm	Fm Value	Resolved Moment ME Kg-m.	Axial Force FE Kg	MAWP PD KPa.	Maximum Pressure Pmax KPa.	Pass Fail
N1-Shell Inlet	389.001	1.20	2472	2677	1056.7	1324.8	Pass
N2-Shell Outlet	389.001	1.20	2472	2677	1056.7	1324.8	Pass

Evaluating Flange on Nozzle [N1-Shell Inlet]:

$$= 16 \cdot ME + 4 \cdot FE \cdot G \leq \pi \cdot G^3 [((PR - PD) + FM \cdot PR)]$$

$$= 16(2472) + 4 \cdot \text{abs}(2677) \cdot 389.001 \leq \pi \cdot 389.001^3 [(1656.044 - 1056.657) + 1.200 \cdot 1656.044]$$

$$= 0.43724E+05 \leq 0.48780E+05 \text{ Check Passes}$$

Maximum Pressure for Flange on Nozzle N1-Shell Inlet [Pmax]:

$$= \min(PR, FM \cdot PR + PR - (16 \cdot ME + 4 \cdot FE \cdot G) / (\pi \cdot G^3))$$

$$= \min(1656.044, 1.200 \cdot 1656.044 + 1656.044 - 43723.9 / (\pi \cdot 389.001^3))$$

$$= \min(1656.044, 1324.771)$$

$$= 1324.771 \text{ KPa.}$$

Evaluating Flange on Nozzle [N2-Shell Outlet]:

$$= 16 \cdot ME + 4 \cdot FE \cdot G \leq \pi \cdot G^3 [((PR - PD) + FM \cdot PR)]$$

$$= 16(2472) + 4 \cdot \text{abs}(2677) \cdot 389.001 \leq \pi \cdot 389.001^3 [(1656.044 - 1056.657) + 1.200 \cdot 1656.044]$$

$$= 0.43724E+05 \leq 0.48780E+05 \text{ Check Passes}$$

Maximum Pressure for Flange on Nozzle N2-Shell Outlet [Pmax]:

$$= \min(PR, FM \cdot PR + PR - (16 \cdot ME + 4 \cdot FE \cdot G) / (\pi \cdot G^3))$$

$$= \min(1656.044, 1.200 \cdot 1656.044 + 1656.044 - 43723.9 / (\pi \cdot 389.001^3))$$

$$= \min(1656.044, 1324.771)$$

$$= 1324.771 \text{ KPa.}$$

Flange Pressure Ratings are per ASME B16.5 2025 Metric Edition



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 112 of 275

Nozzle Flange MAWP:

Step: 18

6:05pm

Sep 8, 2026

PV Elite is a trademark of Hexagon AB, 2026, All rights reserved.



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 113 of 275

Wind Load Calculation:

Step: 19

6:05pm

Sep 8, 2026

Wind Load Calculation Results:

Input Values:

Wind Design Code	ASCE/SEI 7-16
Wind Load Reduction Scale Factor	1.100
Basic Wind Speed [V]	92.7 Km/hr
Surface Roughness Category	C: Open Terrain
Type of Surface	Moderately Smooth
Base Elevation	300 mm
Percent Wind for Hydrotest	50.0
Using User defined Wind Press. Vs Elev.	N
Height of Hill or Escarpment H or Hh	0 mm
Distance Upwind of Crest Lh	0 mm
Distance from Crest to the Vessel x	0 mm
Type of Terrain (Hill, Escarpment)	Flat
Damping Factor (Beta) for Wind (Ope)	0.0100
Damping Factor (Beta) for Wind (Empty)	0.0000
Damping Factor (Beta) for Wind (Filled)	0.0000
Site Elevation above Sea Level	0 mm

Wind Analysis Results

The importance factor is not used in the calculation of wind pressure vs. elevation for the selected wind code.

Static Gust-Effect Factor, Operating Case [G]:

$$= \min(0.85, 0.925((1 + 1.7 \cdot gQ \cdot I_{zbar} \cdot Q) / (1 + 1.7 \cdot gV \cdot I_{zbar})))$$

$$= \min(0.85, 0.925((1 + 1.7 \cdot 3.4 \cdot 0.23 \cdot 0.97) / (1 + 1.7 \cdot 3.4 \cdot 0.23)))$$

$$= \min(0.85, 0.91)$$

$$= 0.850$$

Natural Frequency of Vessel (Operating)	33.000 Hz
Natural Frequency of Vessel (Empty)	33.000 Hz
Natural Frequency of Vessel (Test)	33.000 Hz

User Entered Importance Factor is	1.000
Force Coefficient [Cf]	0.554
Structure Height to Diameter ratio	4.254

This is classified as a rigid structure. Static analysis performed.

Sample Calculation for the First Element:

The ASCE code performs calculations in Imperial Units. The wind pressure is therefore computed in these units.

Value of [α] and [Zg]:

Exposure Category: C from Table 26.11-1

$$\alpha = 9.5 : Z_g = 274320 \text{ mm}$$

Effective Height [z]:

$$= \text{Centroid Height} + \text{Vessel Base Elevation}$$

$$= 1950 + 300 = 2250 \text{ mm}$$

$$= 7.38 \text{ ft. Imperial Units}$$

Velocity Pressure coefficient evaluated at height z [Kz]:

$$\text{Because } z (7.38 \text{ ft.}) < 15 \text{ ft.}$$

$$= 2.01(15 / Z_g)^{2/\alpha}$$

$$= 2.01(15/900)^{2/9.5}$$

$$= 0.85$$

Type of Hill: No Hill



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 114 of 275

Wind Load Calculation:

Step: 19

6:05pm

Sep 8, 2026

Wind Directionality Factor [Kd]:

= 1, per Table 26.6-1

As there is No Hill Present: [Kzt]:

K1 = 0, K2 = 0, K3 = 0

Topographical Factor [Kzt]:

= (1 + K1 • K2 • K3)²

= (1 + 0 • 0 • 0)²

= 1

Velocity Pressure evaluated at height z, Imperial Units [qz]:

= max(16, 0.00256 • Kz • Kzt • Kd • Ke • V(mph)²)

= max(16, 0.00256 • 0.85 • 1 • 1 • 1 • 57.6²)

= 16 psf [78.1] Kgs/m²

Force on the first element [F]:

= qz • G • Cf • WindArea

= 16 • 0.85 • 0.55 • 4.83

= 36.4 lbs. [16.5] Kgf

Element	Hgt (z) mm	K1	K2	K3	Kz	Kzt	qz Kgs/m ²
LHS Blind Flang	2250.0	0.000	0.000	0.000	0.849	1.000	78.120
LHS CH flange-1	2250.0	0.000	0.000	0.000	0.849	1.000	78.120
LHS Ch Shell	2250.0	0.000	0.000	0.000	0.849	1.000	78.120
LHS Ch Flg-2	2250.0	0.000	0.000	0.000	0.849	1.000	78.120
LHS Shell Flg-1	2250.0	0.000	0.000	0.000	0.849	1.000	78.120
Main Shell	2250.0	0.000	0.000	0.000	0.849	1.000	78.120
RHS Shell Flg-1	2250.0	0.000	0.000	0.000	0.849	1.000	78.120
RHS Shell Flg-2	2250.0	0.000	0.000	0.000	0.849	1.000	78.120
RHS	2250.0	0.000	0.000	0.000	0.849	1.000	78.120
RHS dish end	2250.0	0.000	0.000	0.000	0.849	1.000	78.120

Wind Loads on Masses/Equipment/Piping

ID	Wind Area cm ²	Elevation mm	Pressure Kgs/m ²	Force Kgf
Fireproofing	0.00	300.00	78.12	0.00
Wght:[2 of 2]	0.00	300.00	78.12	0.00

Wind Load Calculation:

From	To	Wind Height mm	Wind Diameter mm	Wind Area cm ²	Wind Pressure Kgs/m ²	Element Wind Load Kgf
10	20	2250	3297.6	4484.74	78.12	18.1554
20	30	2250	2976	8541.12	78.12	34.5767
30	40	2250	3024	45360	78.12	183.629
40	50	2250	2976	8541.12	78.12	34.5767
50	60	2250	3216	9487.2	78.12	38.4066
60	70	2250	3259.2	182515	78.12	738.869
70	80	2250	3216	9197.76	78.12	37.2349
80	90	2250	3216	8908.32	78.12	36.0632
90	100	2250	3264	48960	78.12	198.203
100	110	2250	3252.98	17329.3	78.12	70.1535

The Wind Loads calculated and printed in the Wind Load calculation report have been factored by the input scalar/load reduction factor of: 1.100.



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 115 of 275

Wind Load Calculation:

Step: 19

6:05pm

Sep 8, 2026

Be sure the wind speed is in accordance with the specified wind design code.

PV Elite is a trademark of Hexagon AB, 2026, All rights reserved.



Earthquake Load Calculation Results:

Earthquake Load Calculation:

Input Values:

Seismic Design Code		ASCE/SEI 7-16
Seismic Load Reduction Scale Factor		1.000
Importance Factor		1.250
Table Value Fa		1.600
Table Value Fv		2.400
Max. Mapped Res. Acceleration	[Ss]	0.147
Max. Eff. Ground Acceleration	[S]	0.065
Force Modification Factor R		3.000
Site Class		D
Component Elevation Ratio	z/h	0.000
Amplification Factor	Ap	1.000
Force Factor		0.000
Consider Vertical Acceleration		Yes
Minimum Acceleration Multiplier		0.000
User Value of Sds (used if > 0)		0.000
User Value of Sd1 (used if > 0)		0.000
Moment Reduction Factor Tau		1.000

Seismic Analysis Results:

$$\begin{aligned} SMS &= Fa * Ss = 1.6 * 0.15 = 0.24 \\ SM1 &= Fv * S1 = 2.4 * 0.065 = 0.16 \\ SDS &= 2/3 * Sms = 2/3 * 0.24 = 0.16 \\ SD1 &= 2/3 * Sm1 = 2/3 * 0.16 = 0.1 \end{aligned}$$

Check Approximate Fundamental Period from 12.8-7 [Ta]:
 = $C_t \cdot h_{nx}$ where $C_t = 0.020$, $x = 0.75$ and h_n = Structural Height (ft.)
 = $0.020(10.90.75)$
 = 0.120 seconds

The Coefficient C_u from Table 12.8-1 is : 1.700

Fundamental Period (1/Frequency) [T]:
 = (1/Natural Frequency) = (1/33)
 = 0.030

Check the Value of T which is the smaller of $C_u \cdot T_a$ and T:
 = Minimum Value of ($1.7 \cdot 0.12$, 0.03) per 12.8.2
 = 0.030
 As the time period is < 0.06 second, use section 15.4.2.

Base Shear per equation 15.4-5, [V]:
 = $0.3 \cdot Sds \cdot W \cdot I$
 = $0.3 \cdot 0.16 \cdot 126666 \cdot 1.25$
 = 7447.940 Kgf

Vertical load per 12.4-4, [Ev]:
 = $0.2 \cdot Sds \cdot W$
 = $0.2 \cdot 0.16 \cdot 126666$
 = 3972.2 Kgf

Earthquake Load Calculation:

From	To	Earthquake Height mm	Earthquake Weight Kgf	Element Ope Load Kgf
10	20	1374	10555.5	681.595



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 117 of 275

Earthquake Load Calculation:

Step: 20

6:05pm

Sep 8, 2026

20	30	1240	10555.5	615.122
30	40	1240	10555.5	615.122
40	50	1240	10555.5	615.122
50	60	1240	10555.5	615.122
60	Sad1	1240	10555.5	615.122
Sad1	70	1240	10555.5	615.122
60	70	1240	10555.5	615.122
70	80	1240	10555.5	615.122
80	90	1240	10555.5	615.122
90	100	1240	10555.5	615.122
100	110	1240	10555.5	615.122

The Earthquake Weight does not include the weight of the saddles.

PV Elite is a trademark of Hexagon AB, 2026, All rights reserved.



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_Top

Page 118 of 275

Center of Gravity Calculation: Step: 21 6:05pm Sep 8,2026

Shop/Field Installation Options :

Insulation is installed in the Field after being lifted.

Note : The CG is computed from the first Element From Node

Center of Gravity of the Saddles	5429.524 mm
Center of Gravity of the Liquid	5395.844 mm
Center of Gravity of the Insulation	6880.402 mm
Center of Gravity of the Nozzles	5339.601 mm
Center of Gravity of the Added Weights (Operating)	5429.523 mm
Center of Gravity of the Tubesheet(s)	5070.231 mm
Center of Gravity of the Tubes	5216.350 mm
Center of Gravity of the Floating Head	8304.524 mm
Center of Gravity of the Baffles	5515.157 mm
Center of Gravity of Bare Shell New and Cold	3965.075 mm
Center of Gravity of Bare Shell Corroded	3825.504 mm
Vessel CG in the Operating Condition	5055.207 mm
Vessel CG in the Fabricated (Shop/Empty) Condition	4824.310 mm
Vessel CG in the Test Condition	5028.443 mm

PV Elite is a trademark of Hexagon AB, 2026, All rights reserved.



PV Elite 28 Licensee: SL User
 FileName : 108-CA-CB_(Top) Page 119 of 275
 Saddle Calcs: Bundle Pull New: Step: 22 6:05pm Sep 8,2026

ASME Horizontal Vessel Analysis: Bundle pullout, Left Saddle

This saddle was not processed as the coefficient of friction was specified and the directive was set to only analyze the fixed saddle for this case.

ASME VIII Division 2 Horizontal Vessel Analysis, Right Saddle:

Input and Calculated Values:

Vessel Mean Radius	Rm	1249.00	mm
Shell Thickness used in this Case	t	18.000	mm
Stiffened Vessel Length per 4.15.6	L	8008.80	mm
Distance from Saddle to Vessel tangent	a1 or a	1120.00	mm
Saddle Width	b1 or b	400.00	mm
Saddle Bearing Angle	delta or theta	120.00	degrees
Wear Plate Width	b2 or b1	650.00	mm
Wear Plate Bearing Angle	delta2 or theta1	132.00	degrees
Wear Plate Thickness	e2 or tr	20.0	mm
Wear Plate Allowable Stress	fw or Sr	138.00	N./mm ²
Shell Allowable Stress used in Calculation		138.00	N./mm ²
Head Allowable Stress used in Calculation		138.00	N./mm ²
Circumferential Efficiency in Plane of Saddle		1.00	
Circumferential Efficiency at Mid-Span		1.00	
Distance from Saddle Base to Centerline	B	1950.00	mm
Coefficient of Friction	mu	0.00	
Tube Bundle Pull out Force		45500.00	Kgf
Tube Bundle Pull out Force Impact Factor		1.500	
Apply Bundle Pull out Force to Fixed Saddle only		Yes	

Results for Horizontal Vessel Analysis:

Saddle Force Q, + Bundle Pull, Force		23979.08	Kgf
Pressure used in Analysis	P	0.000	KPa.

Horizontal Vessel Analysis Results:		Actual N./mm ²	Allowable N./mm ²
Long. Stress at Top of Midspan		-2.61	-234.00
Long. Stress at Top of Midspan		2.61	138.00
Long. Stress at Bottom of Midspan		2.61	138.00
Long. Stress at Top of Saddles		1.48	138.00
Long. Stress at Bottom of Saddles		-0.82	-234.00
Long. Stress at Bottom of Saddles		0.82	138.00
Tangential Shear in Shell		8.82	110.40
Circ. Stress at Horn of Saddle		16.05	207.00
Circ. Compressive Stress in Shell		0.74	138.00

Intermediate Results: Saddle Reaction Q due to Bundle pull out Force:

Saddle Reaction Force due to Bundle Pull out Force [Fwl]:
 = Bundle Pull Out Force • Impact Factor • B / Ls
 = 45500 • 1.5 • 1950/3360
 = 39609.4 Kgf

Load Combination Results for Tube Bundle Pull Out [Q]:
 = Saddle Load + max(Fwl, Fwt, Fsl, Fst)
 = -15630 + max(39609, 0, 0, 0)



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 120 of 275

Saddle Calcs: Bundle Pull New: Step: 22 6:05pm Sep 8, 2026

= 23979.1 Kgf

Summary of Loads at the Base of this Saddle:

Vertical Load (including saddle weight)	25363.96	Kgf
Transverse Shear Load	0.00	Kgf
Longitudinal Shear Load	68250.00	Kgf

Note: Wear Plate is Welded to the Shell, $k = 0.1$

Saddle Dimension [E]:

= $\min(2(\text{ShellID}/2 + t + \text{WearPadThickness})\sin(\theta/2), 2 \cdot R_m)$

= $\min(2(2480/2 + 18 + 20)\sin(120/2), 2 \cdot 1249)$

= 2213.561 mm

The Computed K values from Table 4.15.1:

K1 = 0.1066	K2 = 1.1707	K3 = 0.8799	K4 = 0.4011
K5 = 0.7603	K6 = 0.0529	K7 = 0.0447	K8 = 0.3405
K9 = 0.2711	K10 = 0.0581	K1* = 0.1923	K6p = 0.0434
K7p = 0.0367			

The suffix 'p' denotes the values for a wear plate if it exists.

Note: Dimension a is greater than or equal to $R_m/2$.

Moment per Equation 4.15.1 [M1]:

= $-Q \cdot a [1 - (1 - a/L + (R_m^2 - h_m^2)/(2a \cdot L))/(1 + (4h_m)/3L)]$

= $-23979 \cdot 1120 [1 - (1 - 1120/8009 + (1249^2 - 0^2)/$

$(2 \cdot 1120 \cdot 8009))/(1 + (4 \cdot 0)/(3 \cdot 8009))]$

= -1420.4 Kg-m.

Moment per Equation 4.15.2 [M2]:

= $Q \cdot L/4 ((1 + 2(R_m^2 - h_m^2)/(L^2))/(1 + (4h_m^2)/(3L)) - 4a/L)$

= $23979 \cdot 8009/4 ((1 + 2(1249^2 - 0^2)/(8009^2))/(1 + (4 \cdot 0)/$

$(3 \cdot 8009)) - 4 \cdot 1120/8009)$

= 23490.2 Kg-m.

Longitudinal Stress at Top of Shell (4.15.4) [σ_1]:

= $P \cdot R_m/(2t) - M2/(\pi \cdot R_m^2 t)$

= $0 \cdot 1249/(2 \cdot 18) - 23490/(\pi \cdot 1249^2 \cdot 18)$

= -2.61 N./mm²

Longitudinal Stress at Bottom of Shell (4.15.5) [σ_2]:

= $P \cdot R_m/(2t) + M2/(\pi \cdot R_m^2 \cdot t)$

= $0 \cdot 1249/(2 \cdot 18) + 23490/(\pi \cdot 1249^2 \cdot 18)$

= 2.61 N./mm²

Longitudinal Stress at Top of Shell at Support (4.15.8) [σ_{*3}]:

= $P \cdot R_m/(2t) - M1/(K1 \cdot \pi \cdot R_m^2 t)$

= $0 \cdot 1249/(2 \cdot 18) - 1420/(0.11 \cdot \pi \cdot 1249^2 \cdot 18)$

= 1.48 N./mm²

Longitudinal Stress at Bottom of Shell at Support (4.15.9) [σ_{*4}]:

= $P \cdot R_m/(2t) + M1/(K1 \cdot \pi \cdot R_m^2 \cdot t)$

= $0 \cdot 1249/(2 \cdot 18) + 1420/(0.19 \cdot \pi \cdot 1249^2 \cdot 18)$

= -0.82 N./mm²

Maximum Shear Force in the Saddle (4.15.3) [T]:

= $Q(L - 2a)/(L + (4 \cdot h_m)/3)$

= $23979(8009 - 2 \cdot 1120)/(8009 + (4 \cdot 0/3))$

= 17272.3 Kgf

Shear Stress in the shell no rings, not stiffened (4.15.12) [τ_2]:

= $K2 \cdot T / (R_m \cdot t)$

= $1.17 \cdot 17272/(1249 \cdot 18)$

= 8.82 N./mm²



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 121 of 275

Saddle Calcs: Bundle Pull New: Step: 22 6:05pm Sep 8,2026

Decay Length (4.15.20) [x1,x2]:

$$= 0.78 \cdot \sqrt{(R_m \cdot t)}$$

$$= 0.78 \cdot \sqrt{(1249 \cdot 18)}$$

$$= 116.953 \text{ mm}$$

Effective reinforcing plate width (4.15.24) [B1]:

$$= \min(b + 1.56 \cdot \sqrt{(R_m \cdot t)}, 2a)$$

$$= \min(400 + 1.56 \cdot \sqrt{(1249 \cdot 18)}, 2 \cdot 1120)$$

$$= 633.91 \text{ mm}$$

Wear Plate/Shell Stress ratio (4.15.26) [eta]:

= 1.0000 Materials are the same, bundle pull case

Circumferential Stress at Saddle Base with Wear Plate (4.15.25) [σ6,r]:

$$= -K5 \cdot Q \cdot k / (B1(t + \eta \cdot tr))$$

$$= -0.76 \cdot 23979 \cdot 0.1 / (634(18 + 1 \cdot 20))$$

$$= -0.74 \text{ N./mm}^2$$

Circ. Comp. Stress at Horn of Saddle, L<8Rm (4.15.29) [σ7,r*]:

$$= -Q / (4(t + \eta \cdot tr)b1) - 12 \cdot K7 \cdot Q \cdot R_m / (L(t + \eta \cdot tr)^2)$$

$$= -23979 / (4(18 + 1 \cdot 20)634) -$$

$$12 \cdot 0.045 \cdot 23979 \cdot 1249 / (8009(18 + 1 \cdot 20)^2)$$

$$= -16.05 \text{ N./mm}^2$$

Results for Vessel Ribs, Web and Base:

Baseplate Length	Bplen	2350.0000	mm
Baseplate Thickness	Bpthk	36.0000	mm
Baseplate Width	Bpwid	425.0000	mm
Number of Ribs (inc. outside ribs)	Nribs	5	
Rib Thickness	Ribtk	20.0000	mm
Web Thickness	Webtk	20.0000	mm
Web Location	Webloc	Center	
Saddle Yield Stress	Sy	250.0	N./mm ²
Height of Web at Center	Hw,c	680.0	mm
Friction Coefficient	mu	0.000	

Moment of Inertia of Saddle - Transverse Direction (90 degrees to long axis)

Inertia of Shell [ShellInertia]:

$$= ((1.56 \cdot \sqrt{(R \cdot t)} + \text{WearPlateWidth})t^3) / 12$$

$$= ((1.56 \cdot \sqrt{(1240 \cdot 18)} + 650)18^3) / 12$$

$$= 42.917 \text{ cm}^4$$

Resolved Inertia for the Shell [I,shell]:

$$= \text{ShellInertia} + A_{\text{Shell}}(C1 - Y)^2$$

$$= 42.9 + 159(274 - 9)^2$$

$$= 112084.586 \text{ cm}^4$$

	B mm	D mm	Y mm	A cm ²	AY mm ³	I + AD ² cm ⁴
Shell	883.1	18.0	9.0	159.0	143056.0	0.112E+06
Wearplate	650.0	20.0	28.0	130.0	363999.9	0.790E+05
Web	20.0	636.0	356.0	127.2	4528319.5	0.513E+05
BasePlate	425.0	36.0	692.0	153.0	10587601.0	0.267E+06
Totals	...	...	...	569.2	15622976.0	0.509E+06

Distance to Centroid [C1]:

$$= AY / A$$

$$= 15622976 / 569$$

$$= 274.496 \text{ mm}$$

Angle [β]:



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 122 of 275

Saddle Calcs: Bundle Pull New: Step: 22 6:05pm Sep 8,2026

$$\begin{aligned} &= 180 - \text{Saddle Angle}/2 \\ &= 180 - 120/2 \\ &= 120.0 \end{aligned}$$

Saddle Splitting Coefficient [K1]:

$$\begin{aligned} &= (1 + \cos(\beta) - 0.5 \cdot \sin(\beta)^2) / (\pi - \beta + \sin(\beta) \cos(\beta)) \\ &= (1 + \cos(120) - 0.5 \cdot \sin(120)^2) / (\pi - 2.09 + \sin(120) \cos(120)) \\ &= 0.2035 \end{aligned}$$

Saddle Splitting Force [Fh]:

$$\begin{aligned} &= K1 \cdot Q \\ &= 0.2 \cdot 23979 \\ &= 4880.2632 \text{ Kgf} \end{aligned}$$

$$\begin{aligned} \text{Tension Stress, } St &= (Fh/As) = 1.1667 \text{ N./mm}^2 \\ \text{Allowed Stress, } Sa &= 0.6 \cdot \text{Yield Str} = 149.9973 \text{ N./mm}^2 \end{aligned}$$

Saddle Splitting Dimension [d]:

$$\begin{aligned} &= B - R \cdot \sin(\text{theta}/2) / (\text{theta}/2 \text{ in radians}) \\ &= 1950 - 1240 \cdot \sin(120/2) / 1.05 \\ &= 924.528 \text{ mm} \end{aligned}$$

$$\text{Bending Moment, } M = Fh \cdot d = 4512.0298 \text{ Kg-m.}$$

$$\begin{aligned} \text{Bending Stress, } Sb &= (M \cdot C1 / I) = 2.3848 \text{ N./mm}^2 \\ \text{Allowed Stress, } Sa &= 2/3 \cdot \text{Yield Str} = 166.6637 \text{ N./mm}^2 \end{aligned}$$

Minimum Thickness of Baseplate per Moss:

$$\begin{aligned} &= \sqrt{(3(Q + \text{SaddleWt}) \cdot \text{BasePlateWidth}) / (4 \cdot \text{BasePlateLength} \cdot \text{AllStress})} \\ &= \sqrt{(3(23979 + 1385) \cdot 425) / (4 \cdot 2350 \cdot 167)} \\ &= 14.228 \text{ mm} \end{aligned}$$

Calculation of Axial Load, Intermediate Values and Compressive Stress:

Web Length Dimension [Web Length]:

$$\begin{aligned} &= 2 \cdot \cos(90 - \text{Saddle Angle}/2) (\text{Inside Radius} + \text{Shell Thk} + \text{Wear Plate Thk}) \\ &= 2 \cdot \cos(90 - 120/2) (1240 + 18 + 20) \\ &= 2213.561 \text{ mm} \end{aligned}$$

Distance between Ribs [e]:

$$\begin{aligned} &= \text{Web Length} / (\text{Nr ribs} - 1) \\ &= 2214 / (5 - 1) \\ &= 553.390 \text{ mm} \end{aligned}$$

Baseplate Pressure Area [Ap]:

$$\begin{aligned} &= e \cdot \text{Bpwid} / 2 \\ &= 553 \cdot 425 / 2 \\ &= 1175.954 \text{ cm}^2 \end{aligned}$$

Bearing Pressure [Bp]:

$$\begin{aligned} &= (Q + \text{SaddleWt}) / (\text{BasePlateLength} \cdot \text{BasePlateWidth}) \\ &= 25364 / (2350 \cdot 425) \\ &= 2.540 \text{ Kgf/cm}^2 \end{aligned}$$

Axial Load [P]:

$$\begin{aligned} &= Ap \cdot Bp \\ &= 1176 \cdot 2.54 \\ &= 2986.419 \text{ Kgf} \end{aligned}$$

Area of the Rib and Web [Ar]:

$$\begin{aligned} &= \text{Rib Area} + \text{Web Area} \\ &= 76 + 55.3 \\ &= 131.339 \text{ cm}^2 \end{aligned}$$

Compressive Stress [Sc]:



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 123 of 275

Saddle Calcs: Bundle Pull New: Step: 22 6:05pm Sep 8,2026

= P/Ar
= 2986/131
= 2.230 N./mm²

Check of Outside Ribs:

Inertia of Saddle, Outer Ribs - Longitudinal Direction

	B	D	Y	A	AY	Io
Rib+Web	20.0	400.0	...	80.0	...	0.107E+05

Rib dimension [D]:
= Saddle Width - Web Thickness
= 400 - 20
= 380.000 mm

Distance to Centroid from Datum [ytot]:
= AY / A
= 0/131
= 0.000 mm

Distance to Centroid [C1]:
= Saddle Width / 2
= 400/2
= 200.000 mm

Radius of Gyration [r]:
= $\sqrt{\text{Total Inertia} / \text{Total Area}}$
= $\sqrt{10667/131}$
= 90.119 mm

Length of Outer Rib [L]:
= Saddle Height - cos(theta/2)(radius + shlthk + wpdthk) - bpthk
= 1950 - cos(120/2)(1240 + 18 + 20) - 36
= 1275.000 mm

Intermediate Term [Cc]:
= $\sqrt{(2 \cdot \pi^2 \cdot \text{Elastic Modulus} / \text{Yield Stress})}$
= $\sqrt{(2 \cdot \pi^2 \cdot 199943392/250)}$
= 125.651

Slenderness ratio [KL/r]:
= KL/r
= 1 • 1275/90.1
= 14.148

Bending Moment [Rm]:
= FI / (2 • Bplen) • e • L / 2
= 68250 / (2 • 2350) • 553 • 1275/2
= 5123.008 Kg-m.

Compressive Allowable, KL/r < Cc (14.1 < 126) per AISC E2-1 [Sca]:
= $(1 - (KL/r)^2 / (2 \cdot Cc^2)) Fy / (5/3 + 3 \cdot (KL/r) / (8 \cdot Cc) - (KL/r)^3 / (8 \cdot Cc^3))$
= $(1 - (14.1)^2 / (2 \cdot 126^2)) 250 / (5/3 + 3 \cdot (14.1) / (8 \cdot 126) - (14.1)^3 / (8 \cdot 126^3))$
= 145.4 N./mm²

AISC Unity Check of Outside Ribs (must be ≤ 1)

= Sc/Sca + (Rm • C1 / I) / Sba
= 2.23/145 + (5123 • 200/106666664) / 167
= 0.581

Check of Inside Ribs:



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 124 of 275

Saddle Calcs: Bundle Pull New: Step: 22 6:05pm Sep 8,2026

Inertia of Saddle, Inner Ribs - Axial Direction

	B	D	Y	A	AY	Io
Rib	20.0	380.0	0.0	76.0	0.0	0.107E+05
Web	553.4	20.0	0.0	110.7	0.0	36.9
Totals	...	...	...	186.7	...	0.107E+05

Distance to Centroid from Datum [ytot]:

$$= AY / A$$

$$= 0/187$$

$$= 0.000 \text{ mm}$$

Distance to Centroid [C1]:

$$= \text{Saddle Width} / 2$$

$$= 400/2$$

$$= 200.000 \text{ mm}$$

Length of Inner Rib [L]:

$$= \text{Saddle Height} - \text{Outside Radius} - \text{Bpthk}$$

$$= 1950 - \cos(1278/2)(36 + 0 + 0) - 0$$

$$= 636.000 \text{ mm}$$

Radius of Gyration [r]:

$$= \sqrt{(\text{Total Inertia} / \text{Total Area})}$$

$$= \sqrt{(10702/187)}$$

$$= 75.716 \text{ mm}$$

Slenderness ratio [KL/r]:

$$= KL/r$$

$$= 1 \cdot 636/75.7$$

$$= 8.400$$

Unit Force [Force,u]:

$$= FI / (2 \cdot \text{Baseplate Length})$$

$$= 68250 / (2 \cdot 2350)$$

$$= 14.521 \text{ Kg/mm}$$

Moment at base of inner Rib [Mbase,c]:

$$= \text{Unit Force} \cdot e \cdot L$$

$$= 14.5 \cdot 553 \cdot 636$$

$$= 5110.954 \text{ Kg-m.}$$

Bending Stress due to Transverse Force and Weight Load [σ_B ,base,c]:

$$= \text{Bending Moment} / \text{Section Modulus}$$

$$= 5111/535111$$

$$= 93.665 \text{ N./mm}^2$$

Compressive Allowable, $KL/r < C_c$ ($8.4 < 126$) per AISC E2-1 [Sca]:

$$= (1 - (KL/r)^2 / (2 \cdot C_c^2)) F_y / (5/3 + 3 \cdot (KL/r) / (8 \cdot C_c) - (KL/r)^3 / (8 \cdot C_c^3))$$

$$= (1 - (8.4)^2 / (2 \cdot 126^2)) 250 /$$

$$(5/3 + 3 \cdot (8.4) / (8 \cdot 126) - (8.4^3) / (8 \cdot 126^3))$$

$$= 147.4 \text{ N./mm}^2$$

AISC Unity Check of Inside Ribs (must be ≤ 1)

$$= S_c / S_{ca} + (M_{base,c} \cdot C1/I) / S_{ba}$$

$$= 3.14/147 + (5111 \cdot 200/10702) / 167$$

$$= 0.583$$

Input Data for Base Plate Bolting Calculations:

Total Number of Bolts per BasePlate	Nbolts	8
Total Number of Bolts in Tension/Baseplate	Nbt	4
Bolt Material Specification	SA-193 B7	
Bolt Allowable Stress	Stba	172.00 N./mm ²
Bolt Corrosion Allowance	Bca	1.5 mm



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 125 of 275

Saddle Calcs: Bundle Pull New: Step: 22 6:05pm Sep 8, 2026

Distance from Bolts to Edge	Edgedis	50.8 mm
User Defined Area in a Single Bolt	UserBoltArea	11.5300 cm ²
BasePlate Allowable Stress	S	138.00 N./mm ²
Area Available in a Single Bolt	BltArea	9.7967 cm ²
Saddle Load QO (Weight)	QO	25364.0 Kgf
Saddle Load QL (Wind/Seismic contribution)	QL	68250.0 Kgf
Maximum Transverse Force	Ft	0.0 Kgf
Maximum Longitudinal Force	F1	68250.0 Kgf
Saddle Bolted to Steel Foundation		No

Shear Stress in a Single Bolt, Longitudinal Direction [tb,l]:

$$= F1 / (\text{Bolt Area} \cdot \text{Number of Bolts})$$

$$= 68250 / (9.8 \cdot 8)$$

$$= 85.4 \text{ N./mm}^2. \text{ Must be less than } 103.2 \text{ N./mm}^2.$$

Shear Stress in a Single Bolt, Transverse Direction [tb,t]:

$$= Ft / (\text{Bolt Area} \cdot \text{Number of Bolts})$$

$$= 0 / (9.8 \cdot 8)$$

$$= 0.0 \text{ N./mm}^2. \text{ Must be less than } 103.2 \text{ N./mm}^2.$$

Bolt Area Calculation per Dennis R. Moss

Bolt Area Requirement Due to Longitudinal Load [Bltarearl]:

$$= (QL - QO) / (Stba \cdot Rnbolts)$$

$$= (68250 - 25364) / (172 \cdot 8)$$

$$= 3.0566 \text{ cm}^2$$

Bolt Area due to Shear Load [Bltarears]:

$$= F1 / (\text{BoltShearAllowable} \cdot \text{Nbolts})$$

$$= 68250 / (103 \cdot 8)$$

$$= 8.1072 \text{ cm}^2$$

Bolt Area due to Transverse Load:

Moment on Baseplate Due to Transverse Load [Rmom]:

$$= B \cdot Ft + \text{Sum of X Moments}$$

$$= 1950 \cdot 0 + 0$$

$$= 0.00 \text{ Kg-m.}$$

Eccentricity (e):

$$= Rmom / QO$$

$$= 0 / 25364$$

$$= 0.00 \text{ mm} < Bplen/6 \rightarrow \text{No Uplift in Transverse direction}$$

Bolt Area due to Transverse Load [Bltareart]:

$$= 0 \text{ (No Uplift)}$$

Required Area of a Single Bolt [Bltarear]:

$$= \max[Bltarearl, Bltarears, Bltareart]$$

$$= \max[3.06, 8.11, 0]$$

$$= 8.1072 \text{ cm}^2$$

Review notes about nozzle loadings and supports in the Warnings report.

PV Elite is a trademark of Hexagon AB, 2026, All rights reserved.



PV Elite 28 Licensee: SL User
 FileName : 108-CA-CB_(Top) Page 126 of 275
 Saddle Calcs: Bundle Pull Cor: Step: 23 6:05pm Sep 8,2026

ASME Horizontal Vessel Analysis: Bundle pullout, Left Saddle

This saddle was not processed as the coefficient of friction was specified and the directive was set to only analyze the fixed saddle for this case.

ASME VIII Division 2 Horizontal Vessel Analysis, Right Saddle:

Input and Calculated Values:

Vessel Mean Radius	Rm	1250.50	mm
Shell Thickness used in this Case	t	18.000	mm
Stiffened Vessel Length per 4.15.6	L	8008.80	mm
Distance from Saddle to Vessel tangent	a1 or a	1120.00	mm
Saddle Width	b1 or b	400.00	mm
Saddle Bearing Angle	delta or theta	120.00	degrees
Wear Plate Width	b2 or b1	650.00	mm
Wear Plate Bearing Angle	delta2 or theta1	132.00	degrees
Wear Plate Thickness	e2 or tr	20.0	mm
Wear Plate Allowable Stress	fw or Sr	138.00	N./mm ²
Shell Allowable Stress used in Calculation		138.00	N./mm ²
Head Allowable Stress used in Calculation		138.00	N./mm ²
Circumferential Efficiency in Plane of Saddle		1.00	
Circumferential Efficiency at Mid-Span		1.00	
Distance from Saddle Base to Centerline	B	1950.00	mm
Coefficient of Friction	mu	0.00	
Tube Bundle Pull out Force		45500.00	Kgf
Tube Bundle Pull out Force Impact Factor		1.500	
Apply Bundle Pull out Force to Fixed Saddle only		Yes	

Results for Horizontal Vessel Analysis:

Saddle Force Q, + Bundle Pull, Force		22873.55	Kgf
Pressure used in Analysis	P	0.000	KPa.

Horizontal Vessel Analysis Results:		Actual N./mm ²	Allowable N./mm ²
Long. Stress at Top of Midspan		-2.98	-234.00
Long. Stress at Top of Midspan		2.98	138.00
Long. Stress at Bottom of Midspan		2.98	138.00
Long. Stress at Top of Saddles		1.68	138.00
Long. Stress at Bottom of Saddles		-0.93	-234.00
Long. Stress at Bottom of Saddles		0.93	138.00
Tangential Shear in Shell		10.08	110.40
Circ. Stress at Horn of Saddle		17.91	207.00
Circ. Compressive Stress in Shell		0.79	138.00

Intermediate Results: Saddle Reaction Q due to Bundle pull out Force:

Saddle Reaction Force due to Bundle Pull out Force [Fwl]:
 = Bundle Pull Out Force • Impact Factor • B / Ls
 = 45500 • 1.5 • 1950/3360
 = 39609.4 Kgf

Load Combination Results for Tube Bundle Pull Out [Q]:
 = Saddle Load + max(Fwl, Fwt, Fsl, Fst)
 = -16736 + max(39609, 0, 0, 0)



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 127 of 275

Saddle Calcs: Bundle Pull Cor: Step: 23 6:05pm Sep 8, 2026

= 22873.5 Kgf

Summary of Loads at the Base of this Saddle:

Vertical Load (including saddle weight)	24258.43	Kgf
Transverse Shear Load	0.00	Kgf
Longitudinal Shear Load	68250.00	Kgf

Note: Wear Plate is Welded to the Shell, $k = 0.1$

Saddle Dimension [E]:

= $\min(2(\text{ShellID}/2 + t + \text{WearPadThickness})\sin(\theta/2), 2 \cdot R_m)$

= $\min(2(2480/2 + 18 + 20)\sin(120/2), 2 \cdot 1250)$

= 2213.561 mm

The Computed K values from Table 4.15.1:

K1 = 0.1066	K2 = 1.1707	K3 = 0.8799	K4 = 0.4011
K5 = 0.7603	K6 = 0.0529	K7 = 0.0446	K8 = 0.3405
K9 = 0.2711	K10 = 0.0581	K1* = 0.1923	K6p = 0.0434
K7p = 0.0366			

The suffix 'p' denotes the values for a wear plate if it exists.

Note: Dimension a is greater than or equal to $R_m/2$.

Moment per Equation 4.15.1 [M1]:

= $-Q \cdot a [1 - (1 - a/L + (R_m^2 - h_m^2)/(2a \cdot L))/(1 + (4h_m)/3L)]$

= $-22874 \cdot 1120 [1 - (1 - 1120/8009 + (1250^2 - 0^2)/$

$(2 \cdot 1120 \cdot 8009)/(1 + (4 \cdot 0)/(3 \cdot 8009))]$

= -1349.6 Kg-m.

Moment per Equation 4.15.2 [M2]:

= $Q \cdot L/4 ((1 + 2(R_m^2 - h_m^2)/(L^2))/(1 + (4h_m^2)/(3L)) - 4a/L)$

= $22874 \cdot 8009/4 ((1 + 2(1250^2 - 0^2)/(8009^2))/(1 + (4 \cdot 0)/$

$(3 \cdot 8009)) - 4 \cdot 1120/8009)$

= 22412.6 Kg-m.

Longitudinal Stress at Top of Shell (4.15.4) [σ_1]:

= $P \cdot R_m/(2t) - M2/(\pi \cdot R_m^2 t)$

= $0 \cdot 1250/(2 \cdot 15) - 22413/(\pi \cdot 1250^2 \cdot 15)$

= -2.98 N./mm²

Longitudinal Stress at Bottom of Shell (4.15.5) [σ_2]:

= $P \cdot R_m/(2t) + M2/(\pi \cdot R_m^2 \cdot t)$

= $0 \cdot 1250/(2 \cdot 15) + 22413/(\pi \cdot 1250^2 \cdot 15)$

= 2.98 N./mm²

Longitudinal Stress at Top of Shell at Support (4.15.8) [σ_{*3}]:

= $P \cdot R_m/(2t) - M1/(K1 \cdot \pi \cdot R_m^2 t)$

= $0 \cdot 1250/(2 \cdot 15) - 1350/(0.11 \cdot \pi \cdot 1250^2 \cdot 15)$

= 1.68 N./mm²

Longitudinal Stress at Bottom of Shell at Support (4.15.9) [σ_{*4}]:

= $P \cdot R_m/(2t) + M1/(K1 \cdot \pi \cdot R_m^2 \cdot t)$

= $0 \cdot 1250/(2 \cdot 15) + 1350/(0.19 \cdot \pi \cdot 1250^2 \cdot 15)$

= -0.93 N./mm²

Maximum Shear Force in the Saddle (4.15.3) [T]:

= $Q(L - 2a)/(L + (4 \cdot h_m)/3)$

= $22874 (8009 - 2 \cdot 1120)/(8009 + (4 \cdot 0/3))$

= 16476.0 Kgf

Shear Stress in the shell no rings, not stiffened (4.15.12) [τ_2]:

= $K2 \cdot T / (R_m \cdot t)$

= $1.17 \cdot 16476/(1250 \cdot 15)$

= 10.08 N./mm²



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 128 of 275

Saddle Calcs: Bundle Pull Cor: Step: 23 6:05pm Sep 8,2026

Decay Length (4.15.20) [x1,x2]:

$$= 0.78 \cdot \sqrt{(R_m \cdot t)}$$

$$= 0.78 \cdot \sqrt{(1250 \cdot 15)}$$

$$= 106.827 \text{ mm}$$

Effective reinforcing plate width (4.15.24) [B1]:

$$= \min(b + 1.56 \cdot \sqrt{(R_m \cdot t)}, 2a)$$

$$= \min(400 + 1.56 \cdot \sqrt{(1250 \cdot 15)}, 2 \cdot 1120)$$

$$= 613.65 \text{ mm}$$

Wear Plate/Shell Stress ratio (4.15.26) [eta]:

= 1.0000 Materials are the same, bundle pull case

Circumferential Stress at Saddle Base with Wear Plate (4.15.25) [σ6,r]:

$$= -K5 \cdot Q \cdot k / (B1(t + \eta \cdot tr))$$

$$= -0.76 \cdot 22874 \cdot 0.1 / (614(15 + 1 \cdot 20))$$

$$= -0.79 \text{ N./mm}^2$$

Circ. Comp. Stress at Horn of Saddle, L<8Rm (4.15.29) [σ7,r*]:

$$= -Q / (4(t + \eta \cdot tr)b1) - 12 \cdot K7 \cdot Q \cdot R_m / (L(t + \eta \cdot tr)^2)$$

$$= -22874 / (4(15 + 1 \cdot 20)614) -$$

$$12 \cdot 0.045 \cdot 22874 \cdot 1250 / (8009(15 + 1 \cdot 20)^2)$$

$$= -17.91 \text{ N./mm}^2$$

Results for Vessel Ribs, Web and Base:

Baseplate Length	Bplen	2350.0000	mm
Baseplate Thickness	Bpthk	36.0000	mm
Baseplate Width	Bpwid	425.0000	mm
Number of Ribs (inc. outside ribs)	Nribs	5	
Rib Thickness	Ribtk	20.0000	mm
Web Thickness	Webtk	20.0000	mm
Web Location	Webloc	Center	
Saddle Yield Stress	Sy	250.0	N./mm ²
Height of Web at Center	Hw,c	680.0	mm
Friction Coefficient	mu	0.000	

Moment of Inertia of Saddle - Transverse Direction (90 degrees to long axis)

Inertia of Shell [ShellInertia]:

$$= ((1.56 \cdot \sqrt{(R \cdot t)} + \text{WearPlateWidth})t^3) / 12$$

$$= ((1.56 \cdot \sqrt{(1243 \cdot 15)} + 650)15^3) / 12$$

$$= 24.272 \text{ cm}^4$$

Resolved Inertia for the Shell [I,shell]:

$$= \text{ShellInertia} + A_{\text{Shell}}(C1 - Y)^2$$

$$= 24.3 + 129(286 - 7.5)^2$$

$$= 100696.133 \text{ cm}^4$$

	B mm	D mm	Y mm	A cm ²	AY mm ³	I + AD ² (2) cm ⁴
Shell	863.0	15.0	7.5	129.5	97088.9	0.101E+06
Wearplate	650.0	20.0	25.0	130.0	325000.0	0.889E+05
Web	20.0	636.0	353.0	127.2	4490159.0	0.485E+05
BasePlate	425.0	36.0	689.0	153.0	10541700.0	0.248E+06
Totals	...	...	...	539.7	15453948.0	0.486E+06

Distance to Centroid [C1]:

$$= AY / A$$

$$= 15453948/540$$

$$= 286.369 \text{ mm}$$

Angle [β]:



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 129 of 275

Saddle Calcs: Bundle Pull Cor: Step: 23 6:05pm Sep 8,2026

$$\begin{aligned}
 &= 180 - \text{Saddle Angle}/2 \\
 &= 180 - 120/2 \\
 &= 120.0
 \end{aligned}$$

Saddle Splitting Coefficient [K1]:

$$\begin{aligned}
 &= (1 + \cos(\beta) - 0.5 \cdot \sin(\beta)^2) / (\pi - \beta + \sin(\beta) \cos(\beta)) \\
 &= (1 + \cos(120) - 0.5 \cdot \sin(120)^2) / (\pi - 2.09 + \sin(120) \cos(120)) \\
 &= 0.2035
 \end{aligned}$$

Saddle Splitting Force [Fh]:

$$\begin{aligned}
 &= K1 \cdot Q \\
 &= 0.2 \cdot 22874 \\
 &= 4655.2627 \text{ Kgf}
 \end{aligned}$$

$$\begin{aligned}
 \text{Tension Stress, } St &= (Fh/As) = 1.1130 \text{ N./mm}^2 \\
 \text{Allowed Stress, } Sa &= 0.6 \cdot \text{Yield Str} = 149.9973 \text{ N./mm}^2
 \end{aligned}$$

Saddle Splitting Dimension [d]:

$$\begin{aligned}
 &= B - R \cdot \sin(\text{theta}/2) / (\text{theta}/2 \text{ in radians}) \\
 &= 1950 - 1243 \cdot \sin(120/2) / 1.05 \\
 &= 922.047 \text{ mm}
 \end{aligned}$$

$$\text{Bending Moment, } M = Fh \cdot d = 4292.4565 \text{ Kg-m.}$$

$$\begin{aligned}
 \text{Bending Stress, } Sb &= (M \cdot C1 / I) = 2.4790 \text{ N./mm}^2 \\
 \text{Allowed Stress, } Sa &= 2/3 \cdot \text{Yield Str} = 166.6637 \text{ N./mm}^2
 \end{aligned}$$

Minimum Thickness of Baseplate per Moss:

$$\begin{aligned}
 &= \sqrt{(3(Q + \text{SaddleWt}) \cdot \text{BasePlateWidth}) / (4 \cdot \text{BasePlateLength} \cdot \text{AllStress})} \\
 &= \sqrt{(3(22874 + 1385) \cdot 425) / (4 \cdot 2350 \cdot 167)} \\
 &= 13.914 \text{ mm}
 \end{aligned}$$

Calculation of Axial Load, Intermediate Values and Compressive Stress:

Web Length Dimension [Web Length]:

$$\begin{aligned}
 &= 2 \cdot \cos(90 - \text{Saddle Angle}/2) (\text{Inside Radius} + \text{Shell Thk} + \text{Wear Plate Thk}) \\
 &= 2 \cdot \cos(90 - 120/2) (1240 + 18 + 20) \\
 &= 2213.561 \text{ mm}
 \end{aligned}$$

Distance between Ribs [e]:

$$\begin{aligned}
 &= \text{Web Length} / (\text{Nr ribs} - 1) \\
 &= 2214 / (5 - 1) \\
 &= 553.390 \text{ mm}
 \end{aligned}$$

Baseplate Pressure Area [Ap]:

$$\begin{aligned}
 &= e \cdot \text{Bpwid} / 2 \\
 &= 553 \cdot 425 / 2 \\
 &= 1175.954 \text{ cm}^2
 \end{aligned}$$

Bearing Pressure [Bp]:

$$\begin{aligned}
 &= (Q + \text{SaddleWt}) / (\text{BasePlateLength} \cdot \text{BasePlateWidth}) \\
 &= 24258 / (2350 \cdot 425) \\
 &= 2.429 \text{ Kgf/cm}^2
 \end{aligned}$$

Axial Load [P]:

$$\begin{aligned}
 &= Ap \cdot Bp \\
 &= 1176 \cdot 2.43 \\
 &= 2856.250 \text{ Kgf}
 \end{aligned}$$

Area of the Rib and Web [Ar]:

$$\begin{aligned}
 &= \text{Rib Area} + \text{Web Area} \\
 &= 76 + 55.3 \\
 &= 131.339 \text{ cm}^2
 \end{aligned}$$

Compressive Stress [Sc]:



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 130 of 275

Saddle Calcs: Bundle Pull Cor: Step: 23 6:05pm Sep 8,2026

= P/Ar
= 2856/131
= 2.133 N./mm²

Check of Outside Ribs:

Inertia of Saddle, Outer Ribs - Longitudinal Direction

	B	D	Y	A	AY	Io
Rib+Web	20.0	400.0	...	80.0	...	0.107E+05

Rib dimension [D]:
= Saddle Width - Web Thickness
= 400 - 20
= 380.000 mm

Distance to Centroid from Datum [ytot]:
= AY / A
= 0/131
= 0.000 mm

Distance to Centroid [C1]:
= Saddle Width / 2
= 400/2
= 200.000 mm

Radius of Gyration [r]:
= $\sqrt{\text{Total Inertia} / \text{Total Area}}$
= $\sqrt{10667/131}$
= 90.119 mm

Length of Outer Rib [L]:
= Saddle Height - cos(theta/2)(radius + shlthk + wpdthk) - bpthk
= 1950 - cos(120/2)(1240 + 18 + 20) - 36
= 1275.000 mm

Intermediate Term [Cc]:
= $\sqrt{(2 \cdot \pi^2 \cdot \text{Elastic Modulus} / \text{Yield Stress})}$
= $\sqrt{(2 \cdot \pi^2 \cdot 199943392/250)}$
= 125.651

Slenderness ratio [KL/r]:
= KL/r
= 1 • 1275/90.1
= 14.148

Bending Moment [Rm]:
= FI / (2 • Bplen) • e • L / 2
= 68250 / (2 • 2350) • 553 • 1275/2
= 5123.008 Kg-m.

Compressive Allowable, KL/r < Cc (14.1 < 126) per AISC E2-1 [Sca]:
= $(1 - (KL/r)^2 / (2 \cdot Cc^2)) Fy / (5/3 + 3 \cdot (KL/r) / (8 \cdot Cc) - (KL/r)^3 / (8 \cdot Cc^3))$
= $(1 - (14.1)^2 / (2 \cdot 126^2)) 250 / (5/3 + 3 \cdot (14.1) / (8 \cdot 126) - (14.1^3) / (8 \cdot 126^3))$
= 145.4 N./mm²

AISC Unity Check of Outside Ribs (must be ≤ 1)

= Sc/Sca + (Rm • C1 / I) / Sba
= 2.13/145 + (5123 • 200/106666664) / 167
= 0.580

Check of Inside Ribs:



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 131 of 275

Saddle Calcs: Bundle Pull Cor: Step: 23 6:05pm Sep 8,2026

Inertia of Saddle, Inner Ribs - Axial Direction

	B	D	Y	A	AY	Io
Rib	20.0	380.0	0.0	76.0	0.0	0.107E+05
Web	553.4	20.0	0.0	110.7	0.0	36.9
Totals	...	...	...	186.7	...	0.107E+05

Distance to Centroid from Datum [ytot]:

$$= AY / A$$

$$= 0/187$$

$$= 0.000 \text{ mm}$$

Distance to Centroid [C1]:

$$= \text{Saddle Width} / 2$$

$$= 400/2$$

$$= 200.000 \text{ mm}$$

Length of Inner Rib [L]:

$$= \text{Saddle Height} - \text{Outside Radius} - \text{Bpthk}$$

$$= 1950 - \cos(1278/2)(36 + 0 + 0) - 0$$

$$= 636.000 \text{ mm}$$

Radius of Gyration [r]:

$$= \sqrt{(\text{Total Inertia} / \text{Total Area})}$$

$$= \sqrt{(10702/187)}$$

$$= 75.716 \text{ mm}$$

Slenderness ratio [KL/r]:

$$= KL/r$$

$$= 1 \cdot 636/75.7$$

$$= 8.400$$

Unit Force [Force,u]:

$$= FI / (2 \cdot \text{Baseplate Length})$$

$$= 68250 / (2 \cdot 2350)$$

$$= 14.521 \text{ Kg/mm}$$

Moment at base of inner Rib [Mbase,c]:

$$= \text{Unit Force} \cdot e \cdot L$$

$$= 14.5 \cdot 553 \cdot 636$$

$$= 5110.954 \text{ Kg-m.}$$

Bending Stress due to Transverse Force and Weight Load [σ_B ,base,c]:

$$= \text{Bending Moment} / \text{Section Modulus}$$

$$= 5111/535111$$

$$= 93.665 \text{ N./mm}^2$$

Compressive Allowable, $KL/r < C_c$ ($8.4 < 126$) per AISC E2-1 [Sca]:

$$= (1 - (KL/r)^2 / (2 \cdot C_c^2)) F_y / (5/3 + 3 \cdot (KL/r) / (8 \cdot C_c) - (KL/r)^3 / (8 \cdot C_c^3))$$

$$= (1 - (8.4)^2 / (2 \cdot 126^2)) 250 / (5/3 + 3 \cdot (8.4) / (8 \cdot 126) - (8.4^3) / (8 \cdot 126^3))$$

$$= 147.4 \text{ N./mm}^2$$

AISC Unity Check of Inside Ribs (must be ≤ 1)

$$= Sc/Sca + (Mbase,c \cdot C1/I) / Sba$$

$$= 3/147 + (5111 \cdot 200/10702) / 167$$

$$= 0.582$$

Input Data for Base Plate Bolting Calculations:

Total Number of Bolts per BasePlate	Nbolts	8
Total Number of Bolts in Tension/Baseplate	Nbt	4
Bolt Material Specification	SA-193 B7	
Bolt Allowable Stress	Stba	172.00 N./mm ²
Bolt Corrosion Allowance	Bca	1.5 mm



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 132 of 275

Saddle Calcs: Bundle Pull Cor: Step: 23 6:05pm Sep 8, 2026

Distance from Bolts to Edge	Edgedis	50.8 mm
User Defined Area in a Single Bolt	UserBoltArea	11.5300 cm ²
BasePlate Allowable Stress	S	138.00 N./mm ²
Area Available in a Single Bolt	BltArea	9.7967 cm ²
Saddle Load QO (Weight)	QO	24258.4 Kgf
Saddle Load QL (Wind/Seismic contribution)	QL	68250.0 Kgf
Maximum Transverse Force	Ft	0.0 Kgf
Maximum Longitudinal Force	F1	68250.0 Kgf
Saddle Bolted to Steel Foundation		No

Shear Stress in a Single Bolt, Longitudinal Direction [tb,l]:

$$= F1 / (\text{Bolt Area} \cdot \text{Number of Bolts})$$

$$= 68250 / (9.8 \cdot 8)$$

$$= 85.4 \text{ N./mm}^2. \text{ Must be less than } 103.2 \text{ N./mm}^2.$$

Shear Stress in a Single Bolt, Transverse Direction [tb,t]:

$$= Ft / (\text{Bolt Area} \cdot \text{Number of Bolts})$$

$$= 0 / (9.8 \cdot 8)$$

$$= 0.0 \text{ N./mm}^2. \text{ Must be less than } 103.2 \text{ N./mm}^2.$$

Bolt Area Calculation per Dennis R. Moss

Bolt Area Requirement Due to Longitudinal Load [Bltarearl]:

$$= (QL - QO) / (Stba \cdot Rnbolts)$$

$$= (68250 - 24258) / (172 \cdot 8)$$

$$= 3.1354 \text{ cm}^2$$

Bolt Area due to Shear Load [Bltarears]:

$$= F1 / (\text{BoltShearAllowable} \cdot \text{Nbolts})$$

$$= 68250 / (103 \cdot 8)$$

$$= 8.1072 \text{ cm}^2$$

Bolt Area due to Transverse Load:

Moment on Baseplate Due to Transverse Load [Rmom]:

$$= B \cdot Ft + \text{Sum of X Moments}$$

$$= 1950 \cdot 0 + 0$$

$$= 0.00 \text{ Kg-m.}$$

Eccentricity (e):

$$= Rmom / QO$$

$$= 0 / 24258$$

$$= 0.00 \text{ mm} < Bplen/6 \rightarrow \text{No Uplift in Transverse direction}$$

Bolt Area due to Transverse Load [Bltareart]:

$$= 0 \text{ (No Uplift)}$$

Required Area of a Single Bolt [Bltarear]:

$$= \max[Bltarearl, Bltarears, Bltareart]$$

$$= \max[3.14, 8.11, 0]$$

$$= 8.1072 \text{ cm}^2$$

Review notes about nozzle loadings and supports in the Warnings report.

PV Elite is a trademark of Hexagon AB, 2026, All rights reserved.



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 133 of 275

Saddle Calcs: Road Transport:

Step: 24

6:05pm


Sep 8, 2026

ASME VIII Division 2 Horizontal Vessel Analysis, Left Saddle:

Horizontal Vessel Stress Calculations : Road Transport

Input and Calculated Values:

Vessel Mean Radius	Rm	1249.00	mm
Shell Thickness used in this Case	t	18.000	mm
Stiffened Vessel Length per 4.15.6	L	8008.80	mm
Distance from Saddle to Vessel tangent	a1 or a	1120.00	mm
Saddle Width	b1 or b	400.00	mm
Saddle Bearing Angle	delta or theta	120.00	degrees
Wear Plate Width	b2 or b1	650.00	mm
Wear Plate Bearing Angle	delta2 or theta1	132.00	degrees
Wear Plate Thickness	e2 or tr	20.0	mm
Wear Plate Allowable Stress	fw or Sr	138.00	N./mm ²
Shell Allowable Stress used in Calculation		138.00	N./mm ²
Head Allowable Stress used in Calculation		138.00	N./mm ²
Circumferential Efficiency in Plane of Saddle		1.00	
Circumferential Efficiency at Mid-Span		1.00	
Distance from Saddle Base to Centerline	B	1950.00	mm
Coefficient of Friction	mu	0.30	

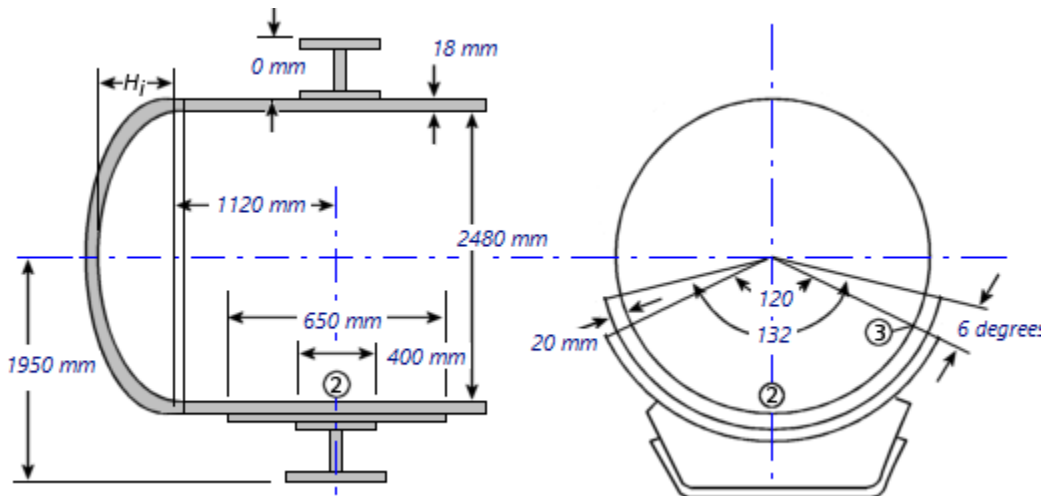

Results for Horizontal Vessel Analysis:

Saddle Force Q for this Transportation Case		59755.96	Kgf
Shipping Longitudinal Acceleration	gx	0.10	g
Shipping Transverse Acceleration	gz	0.10	g
Shipping Vertical Acceleration	gy	0.05	g
Vertical Acceleration Acting with Transverse	gw	1.00	g
Internal Pressure during Transport		0.00	KPa.
Transportation Wind Load Scalar Factor	wlsf	1.00	
Transportation Wind Velocity	wv	92.7	Km/hr



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)


Page 134 of 275

Saddle Calcs: Road Transport:

Step: 24

6:05pm

Sep 8, 2026

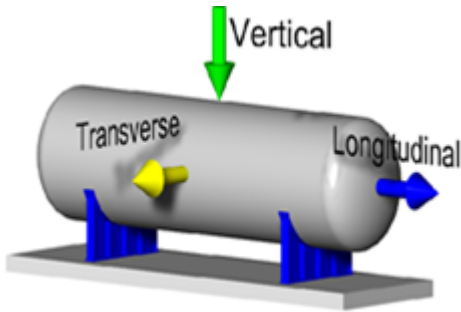

Horizontal Vessel Analysis Results:	Actual N./mm ²	Allowable N./mm ²
Long. Stress at Top of Midspan	-6.51	-234.00
Long. Stress at Top of Midspan	6.51	138.00
Long. Stress at Bottom of Midspan	6.51	138.00
Long. Stress at Top of Saddles	3.69	138.00
Long. Stress at Bottom of Saddles	-2.05	-234.00
Long. Stress at Bottom of Saddles	2.05	138.00
Tangential Shear in Shell	21.98	110.40
Circ. Stress at Horn of Saddle	40.00	207.00
Circ. Compressive Stress in Shell	1.85	138.00

Intermediate Results: Saddle Reaction Q due to Road Transport Load:

Transverse Force due to Wind during Transport [F_{tw}]:

$$\begin{aligned}
 &= \text{Transverse Area} \cdot 0.00256 \cdot wv^2 \cdot wlsf \\
 &= 370 \cdot 0.00256 \cdot 57.6^2 \cdot 1 \\
 &= 3139.1 \text{ lbf} \\
 &= 1423.881 \text{ Kgf}
 \end{aligned}$$

Longitudinal Force due to Wind during Transport [F_{lw}]:

$$\begin{aligned}
 &= \pi \cdot D^2/4 \cdot 0.00256 \cdot wv^2 \cdot wlsf \cdot \text{Wind Dia. Mult} \\
 &= \pi \cdot 8.25^2/4 \cdot 0.00256 \cdot 57.6^2 \cdot 1 \cdot 1.2 \\
 &= 545.5 \text{ lbf} \\
 &= 247.4 \text{ Kgf}
 \end{aligned}$$

Transverse Force due to Lateral Acceleration [F_t]:

$$\begin{aligned}
 &= g_z \cdot \text{Shipping Weight} \cdot g_w + F_{tw} \\
 &= 0.1 \cdot 76523 \cdot 1 + 1424 \\
 &= 9076.2 \text{ Kgf}
 \end{aligned}$$

Longitudinal Force due to Axial Acceleration [F_l]:

$$\begin{aligned}
 &= g_x \cdot \text{Shipping Weight} \cdot g_w + F_{lw} \\
 &= 0.1 \cdot 76523 \cdot 1 + 247 \\
 &= 7899.8 \text{ Kgf}
 \end{aligned}$$

Saddle Reaction Force due to Transverse Load [F_{wt}]:

$$\begin{aligned}
 &= F_t / \text{Num of Saddles} \cdot B / E \\
 &= 9076/2 \cdot 1950/2214 \\
 &= 3997.8 \text{ Kgf}
 \end{aligned}$$

Saddle Reaction Force due to Longitudinal Load [F_{wl}]:

$$\begin{aligned}
 &= F_l \cdot B / L_s \\
 &= 7900 \cdot 1950/3360 \\
 &= 4584.7 \text{ Kgf}
 \end{aligned}$$

Saddle Reaction Force due to Vertical Transportation Acceleration [F_{rv}]:

$$\begin{aligned}
 &= \text{Saddle Load} \cdot g_y \\
 &= 52544 \cdot 0.05
 \end{aligned}$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 135 of 275

Saddle Calcs: Road Transport:

Step: 24

6:05pm

Sep 8, 2026

= 2627.204 Kgf

Load Combination Results due to Transport Loading [Q]:

= Saddle Load + Frv + max(Fwl, Fwt)

= 52544 + 2627 + max(4585, 3998)

= 59756.0 Kgf

Summary of Loads at the Base of this Saddle:

Vertical Load (including saddle weight) 61140.84 Kgf

Transverse Shear Load 4538.10 Kgf

Longitudinal Shear Load 7899.75 Kgf

Note: Wear Plate is Welded to the Shell, k = 0.1

Saddle Dimension [E]:

= min(2(ShellID/2 + t + WearPadThickness)sin(θ/2), 2•Rm)

= min(2(2480/2 + 18 + 20)sin(120/2), 2•1249)

= 2213.561 mm

The Computed K values from Table 4.15.1:

K1 = 0.1066 K2 = 1.1707 K3 = 0.8799 K4 = 0.4011

K5 = 0.7603 K6 = 0.0529 K7 = 0.0447 K8 = 0.3405

K9 = 0.2711 K10 = 0.0581 K1* = 0.1923 K6p = 0.0434

K7p = 0.0367

The suffix 'p' denotes the values for a wear plate if it exists.

Note: Dimension a is greater than or equal to Rm/2.

Moment per Equation 4.15.1 [M1]:

= -Q•a [1 - (1 - a/L + (Rm²-hm²)/(2a•L))/(1+(4hm)/3L)]

= -59756•1120[1-(1-1120/8009+(1249²-0²)/

(2•1120•8009))/(1+(4•0)/(3•8009))]

= -3539.7 Kg-m.

Moment per Equation 4.15.2 [M2]:

= Q•L/4((1+2(Rm²-hm²)/(L²))/(1+(4hm²)/(3L))-4a/L)

= 59756•8009/4((1+2(1249²-0²)/(8009²))/(1+(4•0)/

(3•8009))-4•1120/8009)

= 58537.7 Kg-m.

Longitudinal Stress at Top of Shell (4.15.4) [σ1]:

= P • Rm/(2t) - M2/(π•Rm²t)

= 0 • 1249/(2•18) - 58538/(π•1249²•18)

= -6.51 N./mm²

Longitudinal Stress at Bottom of Shell (4.15.5) [σ2]:

= P • Rm/(2t) + M2/(π • Rm² • t)

= 0 • 1249/(2 • 18) + 58538/(π • 1249² • 18)

= 6.51 N./mm²

Longitudinal Stress at Top of Shell at Support (4.15.8) [σ*3]:

= P • Rm/(2t) - M1/(K1•π•Rm²t)

= 0•1249/(2•18)--3540/(0.11•π•1249²•18)

= 3.69 N./mm²

Longitudinal Stress at Bottom of Shell at Support (4.15.9) [σ*4]:

= P • Rm/(2t) + M1/(K1* • π • Rm² • t)

= 0•1249/(2•18)+-3540/(0.19•π•1249²•18)

= -2.05 N./mm²

Maximum Shear Force in the Saddle (4.15.3) [T]:

= Q(L-2a)/(L+(4•hm/3))

= 59756 (8009 - 2 • 1120)/(8009 + (4 • 0/3))

= 43042.7 Kgf



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 136 of 275

Saddle Calcs: Road Transport:

Step: 24

6:05pm

Sep 8, 2026

Shear Stress in the shell no rings, not stiffened (4.15.12) [τ_2]:

$$= K_2 \cdot T / (R_m \cdot t)$$

$$= 1.17 \cdot 43043 / (1249 \cdot 18)$$

$$= 21.98 \text{ N./mm}^2$$

Decay Length (4.15.20) [x_1, x_2]:

$$= 0.78 \cdot \sqrt{(R_m \cdot t)}$$

$$= 0.78 \cdot \sqrt{(1249 \cdot 18)}$$

$$= 116.953 \text{ mm}$$

Effective reinforcing plate width (4.15.24) [B1]:

$$= \min(b + 1.56 \cdot \sqrt{(R_m \cdot t)}, 2a)$$

$$= \min(400 + 1.56 \cdot \sqrt{(1249 \cdot 18)}, 2 \cdot 1120)$$

$$= 633.91 \text{ mm}$$

Wear Plate/Shell Stress ratio (4.15.26) [η]:

$$= 1.0000 \text{ Materials are the same, transport case}$$

Circumferential Stress at Saddle Base with Wear Plate (4.15.25) [σ_6, r]:

$$= -K_5 \cdot Q \cdot k / (B_1(t + \eta \cdot tr))$$

$$= -0.76 \cdot 59756 \cdot 0.1 / (634(18 + 1 \cdot 20))$$

$$= -1.85 \text{ N./mm}^2$$

Circ. Comp. Stress at Horn of Saddle, $L < 8R_m$ (4.15.29) [σ_7, r^*]:

$$= -Q / (4(t + \eta \cdot tr)b_1) - 12 \cdot K_7 \cdot Q \cdot R_m / (L(t + \eta \cdot tr)^2)$$

$$= -59756 / (4(18 + 1 \cdot 20)634) -$$

$$12 \cdot 0.045 \cdot 59756 \cdot 1249 / (8009(18 + 1 \cdot 20)^2)$$

$$= -40.00 \text{ N./mm}^2$$

Results for Vessel Ribs, Web and Base:

Baseplate Length	Bplen	2350.0000	mm
Baseplate Thickness	Bpthk	36.0000	mm
Baseplate Width	Bpwid	425.0000	mm
Number of Ribs (inc. outside ribs)	Nribs	5	
Rib Thickness	Ribtk	20.0000	mm
Web Thickness	Webtk	20.0000	mm
Web Location	Webloc	Center	
Saddle Yield Stress	Sy	250.0	N./mm ²
Height of Web at Center	Hw, c	680.0	mm
Friction Coefficient	mu	0.300	

Moment of Inertia of Saddle - Transverse Direction (90 degrees to long axis)

Inertia of Shell [ShellInertia]:

$$= ((1.56 \cdot \sqrt{(R \cdot t)} + \text{WearPlateWidth})t^3) / 12$$

$$= ((1.56 \cdot \sqrt{(1240 \cdot 18)} + 650)18^3) / 12$$

$$= 42.917 \text{ cm}^4$$

Resolved Inertia for the Shell [I, shell]:

$$= \text{ShellInertia} + A_{\text{Shell}}(C_1 - Y)^2$$

$$= 42.9 + 159(274 - 9)^2$$

$$= 112084.586 \text{ cm}^4$$

	B mm	D mm	Y mm	A cm ²	AY mm ³	I + AD ⁽²⁾ cm ⁴
Shell	883.1	18.0	9.0	159.0	143056.0	0.112E+06
Wearplate	650.0	20.0	28.0	130.0	363999.9	0.790E+05
Web	20.0	636.0	356.0	127.2	4528319.5	0.513E+05
BasePlate	425.0	36.0	692.0	153.0	10587601.0	0.267E+06
Totals	...	...	...	569.2	15622976.0	0.509E+06

Distance to Centroid [C1]:

$$= AY / A$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 137 of 275

Saddle Calcs: Road Transport:

Step: 24

6:05pm

Sep 8, 2026

$$= 15622976/569$$

$$= 274.496 \text{ mm}$$

Angle [β]:

$$= 180 - \text{Saddle Angle}/2$$

$$= 180 - 120/2$$

$$= 120.0$$

Saddle Splitting Coefficient [K1]:

$$= (1 + \cos(\beta) - 0.5 \cdot \sin(\beta)^2) / (\pi - \beta + \sin(\beta) \cos(\beta))$$

$$= (1 + \cos(120) - 0.5 \cdot \sin(120)^2) / (\pi - 2.09 + \sin(120) \cos(120))$$

$$= 0.2035$$

Saddle Splitting Force [Fh]:

$$= K1 \cdot Q$$

$$= 0.2 \cdot 59756$$

$$= 12161.6328 \text{ Kgf}$$

Tension Stress, $St = (Fh/As) = 2.9075 \text{ N./mm}^2$

Allowed Stress, $Sa = 0.6 \cdot \text{Yield Str} = 149.9973 \text{ N./mm}^2$

Saddle Splitting Dimension [d]:

$$= B - R \cdot \sin(\theta/2) / (\theta/2 \text{ in radians})$$

$$= 1950 - 1240 \cdot \sin(120/2) / 1.05$$

$$= 924.528 \text{ mm}$$

Bending Moment, $M = Fh \cdot d = 11243.9941 \text{ Kg-m.}$

Bending Stress, $Sb = (M \cdot C1 / I) = 5.9429 \text{ N./mm}^2$

Allowed Stress, $Sa = 2/3 \cdot \text{Yield Str} = 166.6637 \text{ N./mm}^2$

Minimum Thickness of Baseplate per Moss:

$$= \sqrt{(3(Q + \text{SaddleWt}) \cdot \text{BasePlateWidth}) / (4 \cdot \text{BasePlateLength} \cdot \text{AllStress})}$$

$$= \sqrt{(3(59756 + 1385) \cdot 425) / (4 \cdot 2350 \cdot 167)}$$

$$= 22.090 \text{ mm}$$

Calculation of Axial Load, Intermediate Values and Compressive Stress:

Web Length Dimension [Web Length]:

$$= 2 \cdot \cos(90 - \text{Saddle Angle}/2) (\text{Inside Radius} + \text{Shell Thk} + \text{Wear Plate Thk})$$

$$= 2 \cdot \cos(90 - 120/2) (1240 + 18 + 20)$$

$$= 2213.561 \text{ mm}$$

Distance between Ribs [e]:

$$= \text{Web Length} / (\text{Nr ribs} - 1)$$

$$= 2214 / (5 - 1)$$

$$= 553.390 \text{ mm}$$

Baseplate Pressure Area [Ap]:

$$= e \cdot \text{Bpwid} / 2$$

$$= 553 \cdot 425 / 2$$

$$= 1175.954 \text{ cm}^2$$

Bearing Pressure [Bp]:

$$= (Q + \text{SaddleWt}) / (\text{BasePlateLength} \cdot \text{BasePlateWidth})$$

$$= 61141 / (2350 \cdot 425)$$

$$= 6.122 \text{ Kgf/cm}^2$$

Axial Load [P]:

$$= Ap \cdot Bp$$

$$= 1176 \cdot 6.12$$

$$= 7198.881 \text{ Kgf}$$

Area of the Rib and Web [Ar]:

$$= \text{Rib Area} + \text{Web Area}$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 138 of 275

Saddle Calcs: Road Transport: Step: 24 6:05pm Sep 8,2026

$$= 76 + 55.3$$

$$= 131.339 \text{ cm}^2$$

Compressive Stress [Sc]:

$$= P/A_r$$

$$= 7199/131$$

$$= 5.375 \text{ N./mm}^2$$

Check of Outside Ribs:

Inertia of Saddle, Outer Ribs - Longitudinal Direction

	B	D	Y	A	AY	Io
Rib+Web	20.0	400.0	...	80.0	...	0.107E+05

Rib dimension [D]:

$$= \text{Saddle Width} - \text{Web Thickness}$$

$$= 400 - 20$$

$$= 380.000 \text{ mm}$$

Distance to Centroid from Datum [ytot]:

$$= AY / A$$

$$= 0/131$$

$$= 0.000 \text{ mm}$$

Distance to Centroid [C1]:

$$= \text{Saddle Width} / 2$$

$$= 400/2$$

$$= 200.000 \text{ mm}$$

Radius of Gyration [r]:

$$= \sqrt{(\text{Total Inertia} / \text{Total Area})}$$

$$= \sqrt{(10667/131)}$$

$$= 90.119 \text{ mm}$$

Length of Outer Rib [L]:

$$= \text{Saddle Height} - \cos(\theta/2) (\text{radius} + \text{shlthk} + \text{wpdthk}) - \text{bpthk}$$

$$= 1950 - \cos(120/2) (1240 + 18 + 20) - 36$$

$$= 1275.000 \text{ mm}$$

Intermediate Term [Cc]:

$$= \sqrt{(2 \cdot \pi^2 \cdot \text{Elastic Modulus} / \text{Yield Stress})}$$

$$= \sqrt{(2 \cdot \pi^2 \cdot 199943008/250)}$$

$$= 125.651$$

Slenderness ratio [KL/r]:

$$= KL/r$$

$$= 1 \cdot 1275/90.1$$

$$= 14.148$$

Bending Moment [Rm]:

$$= FI / (2 \cdot \text{Bplen}) \cdot e \cdot L / 2$$

$$= 7900 / (2 \cdot 2350) \cdot 553 \cdot 1275/2$$

$$= 592.974 \text{ Kg-m.}$$

Compressive Allowable, $KL/r < C_c$ ($14.1 < 126$) per AISC E2-1 [Sca]:

$$= (1 - (KL/r)^2 / (2 \cdot C_c^2)) F_y / (5/3 + 3 \cdot (KL/r) / (8 \cdot C_c) - (KL/r)^3 / (8 \cdot C_c^3))$$

$$= (1 - (14.1)^2 / (2 \cdot 126^2)) 250 /$$

$$(5/3 + 3 \cdot (14.1) / (8 \cdot 126) - (14.1^3) / (8 \cdot 126^3))$$

$$= 145.4 \text{ N./mm}^2$$

AISC Unity Check of Outside Ribs (must be ≤ 1)

$$= S_c/S_{ca} + (R_m \cdot C_1 / I) / S_{ba}$$

$$= 5.38/145 + (593 \cdot 200/106666664) / 167$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 139 of 275

Saddle Calcs: Road Transport:

Step: 24

6:05pm

Sep 8, 2026

= 0.102

Check of Inside Ribs:

Inertia of Saddle, Inner Ribs - Axial Direction

	B	D	Y	A	AY	Io
Rib	20.0	380.0	0.0	76.0	0.0	0.107E+05
Web	553.4	20.0	0.0	110.7	0.0	36.9
Totals	...	...	...	186.7	...	0.107E+05

Distance to Centroid from Datum [ytot]:

= AY / A

= 0/187

= 0.000 mm

Distance to Centroid [C1]:

= Saddle Width / 2

= 400/2

= 200.000 mm

Length of Inner Rib [L]:

= Saddle Height - Outside Radius - Bpthk

= 1950 - cos(1278/2)(36 + 0 + 0) - 0

= 636.000 mm

Radius of Gyration [r]:

= $\sqrt{\text{Total Inertia} / \text{Total Area}}$

= $\sqrt{10702/187}$

= 75.716 mm

Slenderness ratio [KL/r]:

= KL/r

= 1 • 636/75.7

= 8.400

Unit Force [Force,u]:

= FI / (2 • Baseplate Length)

= 7900/(2 • 2350)

= 1.681 Kg/mm

Moment at base of inner Rib [Mbase,c]:

= Unit Force • e • L

= 1.68 • 553 • 636

= 591.579 Kg-m.

Bending Stress due to Transverse Force and Weight Load [σ_B ,base,c]:

= Bending Moment / Section Modulus

= 592/535111

= 10.841 N./mm²

Compressive Allowable, KL/r < Cc (8.4 < 126) per AISC E2-1 [Sca]:

= $(1 - (KL/r)^2 / (2 \cdot Cc^2)) F_y / (5/3 + 3 \cdot (KL/r) / (8 \cdot Cc) - (KL/r)^3 / (8 \cdot Cc^3))$

= $(1 - (8.4)^2 / (2 \cdot 126^2)) 250 /$

$(5/3 + 3 \cdot (8.4) / (8 \cdot 126) - (8.4^3) / (8 \cdot 126^3))$

= 147.4 N./mm²

AISC Unity Check of Inside Ribs (must be ≤ 1)

= Sc/Sca + (Mbase,c • C1/I)/Sba

= 7.57/147 + (592 • 200/10702)/167

= 0.116

ASME VIII Division 2 Horizontal Vessel Analysis, Right Saddle:

Input and Calculated Values:



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 140 of 275

Saddle Calcs: Road Transport:

Step: 24

6:05pm

Sep 8, 2026

Vessel Mean Radius	Rm	1249.00	mm
Shell Thickness used in this Case	t	18.000	mm
Stiffened Vessel Length per 4.15.6	L	8008.80	mm
Distance from Saddle to Vessel tangent	a1 or a	1120.00	mm
Saddle Width	b1 or b	400.00	mm
Saddle Bearing Angle	delta or theta	120.00	degrees
Wear Plate Width	b2 or b1	650.00	mm
Wear Plate Bearing Angle	delta2 or theta1	132.00	degrees
Wear Plate Thickness	e2 or tr	20.0	mm
Wear Plate Allowable Stress	fw or Sr	138.00	N./mm ²
Shell Allowable Stress used in Calculation		138.00	N./mm ²
Head Allowable Stress used in Calculation		138.00	N./mm ²
Circumferential Efficiency in Plane of Saddle		1.00	
Circumferential Efficiency at Mid-Span		1.00	
Distance from Saddle Base to Centerline	B	1950.00	mm
Coefficient of Friction	mu	0.00	

Results for Horizontal Vessel Analysis:

Saddle Force Q for this Transportation Case		29762.71	Kgf
Shipping Longitudinal Acceleration	gx	0.10	g
Shipping Transverse Acceleration	gz	0.10	g
Shipping Vertical Acceleration	gy	0.05	g
Vertical Acceleration Acting with Transverse	gw	1.00	g
Internal Pressure during Transport		0.00	KPa.
Transportation Wind Load Scalar Factor	wlsf	1.00	
Transportation Wind Velocity	wv	92.7	Km/hr

Horizontal Vessel Analysis Results:		Actual N./mm ²	Allowable N./mm ²
Long. Stress at Top of Midspan		-3.24	-234.00
Long. Stress at Top of Midspan		3.24	138.00
Long. Stress at Bottom of Midspan		3.24	138.00
Long. Stress at Top of Saddles		1.84	138.00
Long. Stress at Bottom of Saddles		-1.02	-234.00
Long. Stress at Bottom of Saddles		1.02	138.00
Tangential Shear in Shell		10.95	110.40
Circ. Stress at Horn of Saddle		19.92	207.00
Circ. Compressive Stress in Shell		0.92	138.00

Intermediate Results: Saddle Reaction Q due to Road Transport Load:

Transverse Force due to Wind during Transport [Ftw]:

$$= \text{Transverse Area} \cdot 0.00256 \cdot wv^2 \cdot wlsf$$

$$= 370 \cdot 0.00256 \cdot 57.6^2 \cdot 1$$

$$= 3139.1 \text{ lbf}$$

$$= 1423.881 \text{ Kgf}$$

Longitudinal Force due to Wind during Transport [Flw]:

$$= \pi \cdot D^2/4 \cdot 0.00256 \cdot wv^2 \cdot wlsf \cdot \text{Wind Dia. Mult}$$

$$= \pi \cdot 8.25^2/4 \cdot 0.00256 \cdot 57.6^2 \cdot 1 \cdot 1.2$$

$$= 545.5 \text{ lbf}$$

$$= 247.4 \text{ Kgf}$$

Transverse Force due to Lateral Acceleration [Ft]:

$$= gz \cdot \text{Shipping Weight} \cdot gw + Ftw$$

$$= 0.1 \cdot 76523 \cdot 1 + 1424$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 141 of 275

Saddle Calcs: Road Transport:

Step: 24

6:05pm

Sep 8, 2026

= 9076.2 Kgf

Longitudinal Force due to Axial Acceleration [FI]:

= $g_x \cdot \text{Shipping Weight} \cdot g_w + F_{lw}$

= $0.1 \cdot 76523 \cdot 1 + 247$

= 7899.8 Kgf

Saddle Reaction Force due to Transverse Load [Fwt]:

= $F_t / \text{Num of Saddles} \cdot B / E$

= $9076/2 \cdot 1950/2214$

= 3997.8 Kgf

Saddle Reaction Force due to Longitudinal Load [Fwl]:

= $F_l \cdot B / L_s$

= $7900 \cdot 1950/3360$

= 4584.7 Kgf

Saddle Reaction Force due to Vertical Transportation Acceleration [Frv]:

= Saddle Load $\cdot g_y$

= $23979 \cdot 0.05$

= 1198.954 Kgf

Load Combination Results due to Transport Loading [Q]:

= Saddle Load + Frv + max(Fwl, Fwt)

= $23979 + 1199 + \max(4585, 3998)$

= 29762.7 Kgf

Summary of Loads at the Base of this Saddle:

Vertical Load (including saddle weight)

31147.60 Kgf

Transverse Shear Load

4538.10 Kgf

Longitudinal Shear Load

7899.75 Kgf

Note: Wear Plate is Welded to the Shell, $k = 0.1$

Saddle Dimension [E]:

= $\min(2(\text{ShellID}/2 + t + \text{WearPadThickness}) \sin(\theta/2), 2 \cdot R_m)$

= $\min(2(2480/2 + 18 + 20) \sin(120/2), 2 \cdot 1249)$

= 2213.561 mm

The Computed K values from Table 4.15.1:

K1 = 0.1066 K2 = 1.1707 K3 = 0.8799 K4 = 0.4011

K5 = 0.7603 K6 = 0.0529 K7 = 0.0447 K8 = 0.3405

K9 = 0.2711 K10 = 0.0581 K1* = 0.1923 K6p = 0.0434

K7p = 0.0367

The suffix 'p' denotes the values for a wear plate if it exists.

Note: Dimension a is greater than or equal to $R_m/2$.

Moment per Equation 4.15.1 [M1]:

= $-Q \cdot a [1 - (1 - a/L + (R_m^2 - h_m^2)/(2a \cdot L)) / (1 + (4h_m)/3L)]$

= $-29763 \cdot 1120 [1 - (1 - 1120/8009 + (1249^2 - 0^2) /$

$(2 \cdot 1120 \cdot 8009) / (1 + (4 \cdot 0) / (3 \cdot 8009))]$

= -1763.0 Kg-m.

Moment per Equation 4.15.2 [M2]:

= $Q \cdot L / 4 ((1 + 2(R_m^2 - h_m^2)/(L^2)) / (1 + (4h_m)/3L) - 4a/L)$

= $29763 \cdot 8009 / 4 ((1 + 2(1249^2 - 0^2)/(8009^2)) / (1 + (4 \cdot 0) /$

$(3 \cdot 8009)) - 4 \cdot 1120 / 8009)$

= 29155.9 Kg-m.

Longitudinal Stress at Top of Shell (4.15.4) [σ_1]:

= $P \cdot R_m / (2t) - M_2 / (\pi \cdot R_m^2 t)$

= $0 \cdot 1249 / (2 \cdot 18) - 29156 / (\pi \cdot 1249^2 \cdot 18)$

= -3.24 N./mm²



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 142 of 275

Saddle Calcs: Road Transport: Step: 24 6:05pm Sep 8,2026

Longitudinal Stress at Bottom of Shell (4.15.5) [σ_2]:

$$= P \cdot R_m / (2t) + M_2 / (\pi \cdot R_m^2 \cdot t)$$

$$= 0 \cdot 1249 / (2 \cdot 18) + 29156 / (\pi \cdot 1249^2 \cdot 18)$$

$$= 3.24 \text{ N./mm}^2$$

Longitudinal Stress at Top of Shell at Support (4.15.8) [σ_{*3}]:

$$= P \cdot R_m / (2t) - M_1 / (K_1 \cdot \pi \cdot R_m^2 \cdot t)$$

$$= 0 \cdot 1249 / (2 \cdot 18) - 1763 / (0.11 \cdot \pi \cdot 1249^2 \cdot 18)$$

$$= 1.84 \text{ N./mm}^2$$

Longitudinal Stress at Bottom of Shell at Support (4.15.9) [σ_{*4}]:

$$= P \cdot R_m / (2t) + M_1 / (K_1 \cdot \pi \cdot R_m^2 \cdot t)$$

$$= 0 \cdot 1249 / (2 \cdot 18) + 1763 / (0.19 \cdot \pi \cdot 1249^2 \cdot 18)$$

$$= -1.02 \text{ N./mm}^2$$

Maximum Shear Force in the Saddle (4.15.3) [T]:

$$= Q(L-2a) / (L + (4 \cdot h_m / 3))$$

$$= 29763 (8009 - 2 \cdot 1120) / (8009 + (4 \cdot 0 / 3))$$

$$= 21438.3 \text{ Kgf}$$

Shear Stress in the shell no rings, not stiffened (4.15.12) [τ_2]:

$$= K_2 \cdot T / (R_m \cdot t)$$

$$= 1.17 \cdot 21438 / (1249 \cdot 18)$$

$$= 10.95 \text{ N./mm}^2$$

Decay Length (4.15.20) [x_1, x_2]:

$$= 0.78 \cdot \sqrt{(R_m \cdot t)}$$

$$= 0.78 \cdot \sqrt{(1249 \cdot 18)}$$

$$= 116.953 \text{ mm}$$

Effective reinforcing plate width (4.15.24) [B1]:

$$= \min(b + 1.56 \cdot \sqrt{(R_m \cdot t)}, 2a)$$

$$= \min(400 + 1.56 \cdot \sqrt{(1249 \cdot 18)}, 2 \cdot 1120)$$

$$= 633.91 \text{ mm}$$

Wear Plate/Shell Stress ratio (4.15.26) [eta]:

$$= 1.0000 \text{ Materials are the same, transport case}$$

Circumferential Stress at Saddle Base with Wear Plate (4.15.25) [σ_6, r]:

$$= -K_5 \cdot Q \cdot k / (B_1(t + \eta \cdot tr))$$

$$= -0.76 \cdot 29763 \cdot 0.1 / (634(18 + 1 \cdot 20))$$

$$= -0.92 \text{ N./mm}^2$$

Circ. Comp. Stress at Horn of Saddle, $L < 8R_m$ (4.15.29) [σ_7, r_{*}]:

$$= -Q / (4(t + \eta \cdot tr)b_1) - 12 \cdot K_7 \cdot Q \cdot R_m / (L(t + \eta \cdot tr)^2)$$

$$= -29763 / (4(18 + 1 \cdot 20)634) -$$

$$12 \cdot 0.045 \cdot 29763 \cdot 1249 / (8009(18 + 1 \cdot 20)^2)$$

$$= -19.92 \text{ N./mm}^2$$

Results for Vessel Ribs, Web and Base:

Baseplate Length	Bplen	2350.0000	mm
Baseplate Thickness	Bpthk	36.0000	mm
Baseplate Width	Bpwid	425.0000	mm
Number of Ribs (inc. outside ribs)	Nribs	5	
Rib Thickness	Ribtk	20.0000	mm
Web Thickness	Webtk	20.0000	mm
Web Location	Webloc	Center	
Saddle Yield Stress	Sy	250.0	N./mm ²
Height of Web at Center	Hw,c	680.0	mm
Friction Coefficient	mu	0.000	

Moment of Inertia of Saddle - Transverse Direction (90 degrees to long axis)



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 143 of 275

Saddle Calcs: Road Transport:

Step: 24

6:05pm

Sep 8, 2026

Inertia of Shell [ShellInertia]:

$$= ((1.56 \cdot \sqrt{(R \cdot t)} + \text{WearPlateWidth})^3) / 12$$

$$= ((1.56 \cdot \sqrt{(1240 \cdot 18)} + 650)^3) / 12$$

$$= 42.917 \text{ cm}^4$$

Resolved Inertia for the Shell [I,shell]:

$$= \text{ShellInertia} + A_{\text{Shell}} (C1 - Y)^2$$

$$= 42.9 + 159 (274 - 9)^2$$

$$= 112084.586 \text{ cm}^4$$

	B mm	D mm	Y mm	A cm ²	AY mm ³	I + AD ² cm ⁴
Shell	883.1	18.0	9.0	159.0	143056.0	0.112E+06
Wearplate	650.0	20.0	28.0	130.0	363999.9	0.790E+05
Web	20.0	636.0	356.0	127.2	4528319.5	0.513E+05
BasePlate	425.0	36.0	692.0	153.0	10587601.0	0.267E+06
Totals	...	...	...	569.2	15622976.0	0.509E+06

Distance to Centroid [C1]:

$$= AY / A$$

$$= 15622976 / 569$$

$$= 274.496 \text{ mm}$$

Angle [β]:

$$= 180 - \text{Saddle Angle} / 2$$

$$= 180 - 120 / 2$$

$$= 120.0$$

Saddle Splitting Coefficient [K1]:

$$= (1 + \cos(\beta) - 0.5 \cdot \sin(\beta)^2) / (\pi - \beta + \sin(\beta) \cos(\beta))$$

$$= (1 + \cos(120) - 0.5 \cdot \sin(120)^2) / (\pi - 2.09 + \sin(120) \cos(120))$$

$$= 0.2035$$

Saddle Splitting Force [Fh]:

$$= K1 \cdot Q$$

$$= 0.2 \cdot 29763$$

$$= 6057.3569 \text{ Kgf}$$

$$\text{Tension Stress, } St = (Fh / As) = 1.4482 \text{ N./mm}^2$$

$$\text{Allowed Stress, } Sa = 0.6 \cdot \text{Yield Str} = 149.9973 \text{ N./mm}^2$$

Saddle Splitting Dimension [d]:

$$= B - R \cdot \sin(\theta/2) / (\theta/2 \text{ in radians})$$

$$= 1950 - 1240 \cdot \sin(120/2) / 1.05$$

$$= 924.528 \text{ mm}$$

$$\text{Bending Moment, } M = Fh \cdot d = 5600.3076 \text{ Kg-m.}$$

$$\text{Bending Stress, } Sb = (M \cdot C1 / I) = 2.9600 \text{ N./mm}^2$$

$$\text{Allowed Stress, } Sa = 2/3 \cdot \text{Yield Str} = 166.6637 \text{ N./mm}^2$$

Minimum Thickness of Baseplate per Moss:

$$= \sqrt{(3(Q + \text{SaddleWt}) \cdot \text{BasePlateWidth}) / (4 \cdot \text{BasePlateLength} \cdot \text{AllStress})}$$

$$= \sqrt{(3(29763 + 1385) \cdot 425) / (4 \cdot 2350 \cdot 167)}$$

$$= 15.767 \text{ mm}$$

Calculation of Axial Load, Intermediate Values and Compressive Stress:

Web Length Dimension [Web Length]:

$$= 2 \cdot \cos(90 - \text{Saddle Angle} / 2) (\text{Inside Radius} + \text{Shell Thk} + \text{Wear Plate Thk})$$

$$= 2 \cdot \cos(90 - 120/2) (1240 + 18 + 20)$$

$$= 2213.561 \text{ mm}$$

Distance between Ribs [e]:



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 144 of 275

Saddle Calcs: Road Transport:

Step: 24

6:05pm

Sep 8, 2026

= Web Length / (Nribs - 1)

= 2214 / (5 - 1)

= 553.390 mm

Baseplate Pressure Area [Ap]:

= e • Bpwid / 2

= 553 • 425 / 2

= 1175.954 cm²

Bearing Pressure [Bp]:

= (Q + SaddleWt) / (BasePlateLength • BasePlateWidth)

= 31148 / (2350 • 425)

= 3.119 Kg/cm²

Axial Load [P]:

= Ap • Bp

= 1176 • 3.12

= 3667.399 Kgf

Area of the Rib and Web [Ar]:

= Rib Area + Web Area

= 76 + 55.3

= 131.339 cm²

Compressive Stress [Sc]:

= P / Ar

= 3667 / 131

= 2.738 N./mm²

Check of Outside Ribs:

Inertia of Saddle, Outer Ribs - Longitudinal Direction

	B	D	Y	A	AY	Io
Rib+Web	20.0	400.0	...	80.0	...	0.107E+05

Rib dimension [D]:

= Saddle Width - Web Thickness

= 400 - 20

= 380.000 mm

Distance to Centroid from Datum [ytot]:

= AY / A

= 0 / 131

= 0.000 mm

Distance to Centroid [C1]:

= Saddle Width / 2

= 400 / 2

= 200.000 mm

Radius of Gyration [r]:

= $\sqrt{\text{Total Inertia} / \text{Total Area}}$

= $\sqrt{10667 / 131}$

= 90.119 mm

Length of Outer Rib [L]:

= Saddle Height - cos(theta/2)(radius + shlthk + wpdthk) - bpthk

= 1950 - cos(120/2)(1240 + 18 + 20) - 36

= 1275.000 mm

Intermediate Term [Cc]:

= $\sqrt{2 \cdot \pi^2 \cdot \text{Elastic Modulus} / \text{Yield Stress}}$

= $\sqrt{2 \cdot \pi^2 \cdot 199943392 / 250}$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 145 of 275

Saddle Calcs: Road Transport:

Step: 24

6:05pm

Sep 8, 2026

$$= 125.651$$

Slenderness ratio [KL/r]:

$$= KL/r$$

$$= 1 \cdot 1275/90.1$$

$$= 14.148$$

Bending Moment [Rm]:

$$= FI / (2 \cdot B_{plen}) \cdot e \cdot L / 2$$

$$= 7900 / (2 \cdot 2350) \cdot 553 \cdot 1275 / 2$$

$$= 592.974 \text{ Kg-m.}$$

Compressive Allowable, $KL/r < C_c$ ($14.1 < 126$) per AISC E2-1 [Sca]:

$$= (1 - (KL/r)^2 / (2 \cdot C_c^2)) F_y / (5/3 + 3 \cdot (KL/r) / (8 \cdot C_c) - (KL/r)^3 / (8 \cdot C_c^3))$$

$$= (1 - (14.1)^2 / (2 \cdot 126^2)) 250 /$$

$$(5/3 + 3 \cdot (14.1) / (8 \cdot 126) - (14.1^3) / (8 \cdot 126^3))$$

$$= 145.4 \text{ N./mm}^2$$

AISC Unity Check of Outside Ribs (must be ≤ 1)

$$= S_c / S_{ca} + (R_m \cdot C_1 / I) / S_{ba}$$

$$= 2.74 / 145 + (593 \cdot 200 / 106666664) / 167$$

$$= 0.084$$

Check of Inside Ribs:

Inertia of Saddle, Inner Ribs - Axial Direction

	B	D	Y	A	AY	Io
Rib	20.0	380.0	0.0	76.0	0.0	0.107E+05
Web	553.4	20.0	0.0	110.7	0.0	36.9
Totals	...	...	...	186.7	...	0.107E+05

Distance to Centroid from Datum [ytot]:

$$= AY / A$$

$$= 0/187$$

$$= 0.000 \text{ mm}$$

Distance to Centroid [C1]:

$$= \text{Saddle Width} / 2$$

$$= 400/2$$

$$= 200.000 \text{ mm}$$

Length of Inner Rib [L]:

$$= \text{Saddle Height} - \text{Outside Radius} - B_{pthk}$$

$$= 1950 - \cos(1278/2) (36 + 0 + 0) - 0$$

$$= 636.000 \text{ mm}$$

Radius of Gyration [r]:

$$= \sqrt{ (\text{Total Inertia} / \text{Total Area}) }$$

$$= \sqrt{ (10702/187) }$$

$$= 75.716 \text{ mm}$$

Slenderness ratio [KL/r]:

$$= KL/r$$

$$= 1 \cdot 636/75.7$$

$$= 8.400$$

Unit Force [Force,u]:

$$= FI / (2 \cdot \text{Baseplate Length})$$

$$= 7900 / (2 \cdot 2350)$$

$$= 1.681 \text{ Kg/mm}$$

Moment at base of inner Rib [Mbase,c]:

$$= \text{Unit Force} \cdot e \cdot L$$

$$= 1.68 \cdot 553 \cdot 636$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 146 of 275

Saddle Calcs: Road Transport:

Step: 24

6:05pm

Sep 8, 2026

= 591.579 Kg-m.

Bending Stress due to Transverse Force and Weight Load [$\sigma_{B,base,c}$]:

= Bending Moment / Section Modulus

= 592/535111

= 10.841 N./mm²

Compressive Allowable, $KL/r < C_c$ ($8.4 < 126$) per AISC E2-1 [Sca]:

= $(1 - (KL/r)^2 / (2 \cdot C_c^2)) F_y / (5/3 + 3 \cdot (KL/r) / (8 \cdot C_c) - (KL/r)^3 / (8 \cdot C_c^3))$

= $(1 - (8.4)^2 / (2 \cdot 126^2)) 250 /$

$(5/3 + 3 \cdot (8.4) / (8 \cdot 126) - (8.4^3) / (8 \cdot 126^3))$

= 147.4 N./mm²

AISC Unity Check of Inside Ribs (must be ≤ 1)

= $S_c / S_{ca} + (M_{base,c} \cdot C_{1/I}) / S_{ba}$

= $3.85 / 147 + (592 \cdot 200 / 10702) / 167$

= 0.091

Review notes about nozzle loadings and supports in the Warnings report.

PV Elite is a trademark of Hexagon AB, 2026, All rights reserved.



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 147 of 275

Saddle Calcs: Operating Case:

Step: 25

6:05pm


Sep 8, 2026

ASME VIII Division 2 Horizontal Vessel Analysis, Left Saddle:

Horizontal Vessel Stress Calculations : Operating Case

Input and Calculated Values:

Vessel Mean Radius	Rm	1250.50	mm
Shell Thickness used in this Case	t	18.000	mm
Stiffened Vessel Length per 4.15.6	L	8008.80	mm
Distance from Saddle to Vessel tangent	a1 or a	1120.00	mm
Saddle Width	b1 or b	400.00	mm
Saddle Bearing Angle	delta or theta	120.00	degrees
Wear Plate Width	b2 or b1	650.00	mm
Wear Plate Bearing Angle	delta2 or theta1	132.00	degrees
Wear Plate Thickness	e2 or tr	20.0	mm
Wear Plate Allowable Stress	fw or Sr	138.00	N./mm ²
Shell Allowable Stress used in Calculation		138.00	N./mm ²
Head Allowable Stress used in Calculation		138.00	N./mm ²
Circumferential Efficiency in Plane of Saddle		1.00	
Circumferential Efficiency at Mid-Span		1.00	
Distance from Saddle Base to Centerline	B	1950.00	mm
Coefficient of Friction	mu	0.30	

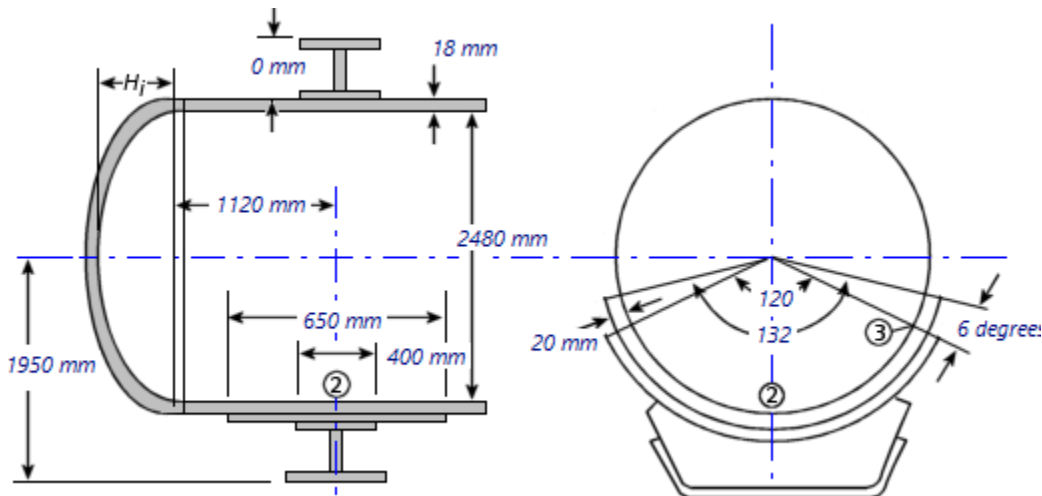

Results for Horizontal Vessel Analysis:

Saddle Force Q, Operating Case	89128.75	Kgf
Pressure used in Analysis	P 531.959	KPa.

Horizontal Vessel Analysis Results:	Actual N./mm ²	Allowable N./mm ²
Long. Stress at Top of Midspan	10.55	138.00
Long. Stress at Bottom of Midspan	33.80	138.00
Long. Stress at Top of Saddles	28.74	138.00
Long. Stress at Bottom of Saddles	18.54	138.00
Tangential Shear in Shell	39.29	110.40
Circ. Stress at Horn of Saddle	69.77	172.50
Circ. Compressive Stress in Shell	3.09	138.00



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 148 of 275

Saddle Calcs: Operating Case: Step: 25 6:05pm Sep 8, 2026

Intermediate Results: Saddle Reaction Q due to Wind or Seismic:

Transverse Saddle Reaction Force [Fwt]:

$$= \text{Ftr}(\text{Ft/Num of Saddles} + \text{Z Force Load}) \cdot B / E$$

$$= 3 (1390/2 + 0) \cdot 1950/2214$$

$$= 1836.6 \text{ Kgf}$$

Longitudinal Saddle Reaction Force [Fwl]:

$$= \max(\text{Fl,wind}; \text{Sum of X Forces}) \cdot B / \text{Ls}$$

$$= \max(615, 0) \cdot 1950/3360$$

$$= 357.0 \text{ Kgf}$$

Saddle Reaction Force due to Earthquake Fl [Fsl]:

$$= \max(\text{Fl,eq}; \text{Sum of X Forces}) \cdot B / \text{Ls}$$

$$= \max(7448, 0) \cdot 1950/3360$$

$$= 4322.5 \text{ Kgf}$$

Saddle Reaction Force due to Earthquake Ft [Fst]:

$$= \text{Ftr}(\text{Ft/Num of Saddles} + \text{Z Force Load}) \cdot B / E$$

$$= 3 (7448/2 + 0) \cdot 1950/2214$$

$$= 9841.7 \text{ Kgf}$$

Load Combination Results for Q + Wind or Seismic [Q]:

$$= \text{Saddle Load} + \max(\text{Fwl}, \text{Fwt}, \text{Fsl}, \text{Fst})$$

$$= 79287 + \max(357, 1837, 4322, 9842)$$

$$= 89128.8 \text{ Kgf}$$

Longitudinal Wind Force [Fl]:

$$= \text{WindScalar} \cdot \text{WindPress}(\text{Platform Area} + (\pi/4 (\text{OD} \cdot \text{WindDiaMult})^2))$$

$$= 1.1 \cdot 766 (0 + \pi/4 (2.52 \cdot 1.2)^2)$$

$$= 6033.145 \text{ N}$$

Summary of Loads at the Base of this Saddle:

Vertical Load (including saddle weight)	90513.63	Kgf
Transverse Shear Load	3723.97	Kgf
Longitudinal Shear Load	7447.94	Kgf

Note: Wear Plate is Welded to the Shell, k = 0.1

Saddle Dimension [E]:

$$= \min(2(\text{ShellID}/2 + t + \text{WearPadThickness})\sin(\theta/2), 2 \cdot \text{Rm})$$

$$= \min(2(2480/2 + 18 + 20)\sin(120/2), 2 \cdot 1250)$$

$$= 2213.561 \text{ mm}$$

The Computed K values from Table 4.15.1:

K1 = 0.1066	K2 = 1.1707	K3 = 0.8799	K4 = 0.4011
K5 = 0.7603	K6 = 0.0529	K7 = 0.0446	K8 = 0.3405
K9 = 0.2711	K10 = 0.0581	K1* = 0.1923	K6p = 0.0434
K7p = 0.0366			

The suffix 'p' denotes the values for a wear plate if it exists.

Note: Dimension a is greater than or equal to Rm/2.

Moment per Equation 4.15.1 [M1]:

$$= -Q \cdot a [1 - (1 - a/L + (Rm^2 - hm^2)/(2a \cdot L))/(1 + (4hm)/3L)]$$

$$= -89129 \cdot 1120 [1 - (1 - 1120/8009 + (1250^2 - 0^2)/(2 \cdot 1120 \cdot 8009))/(1 + (4 \cdot 0)/(3 \cdot 8009))]$$

$$= -5258.8 \text{ Kg-m.}$$

Moment per Equation 4.15.2 [M2]:

$$= Q \cdot L/4 ((1 + 2(Rm^2 - hm^2)/(L^2))/(1 + (4hm^2)/(3L)) - 4a/L)$$

$$= 89129 \cdot 8009/4 ((1 + 2(1250^2 - 0^2)/(8009^2))/(1 + (4 \cdot 0)/$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 149 of 275

Saddle Calcs: Operating Case: Step: 25 6:05pm Sep 8, 2026

$$(3 \cdot 8009) - 4 \cdot 1120 / 8009 \\ = 87332.5 \text{ Kg-m.}$$

Longitudinal Stress at Top of Shell (4.15.4) [σ_1]:

$$= P \cdot R_m / (2t) - M_2 / (\pi \cdot R_m^2 t) \\ = 532 \cdot 1250 / (2 \cdot 15) - 87332 / (\pi \cdot 1250^2 \cdot 15) \\ = 10.55 \text{ N./mm}^2$$

Longitudinal Stress at Bottom of Shell (4.15.5) [σ_2]:

$$= P \cdot R_m / (2t) + M_2 / (\pi \cdot R_m^2 \cdot t) \\ = 532 \cdot 1250 / (2 \cdot 15) + 87332 / (\pi \cdot 1250^2 \cdot 15) \\ = 33.80 \text{ N./mm}^2$$

Longitudinal Stress at Top of Shell at Support (4.15.8) [σ_{*3}]:

$$= P \cdot R_m / (2t) - M_1 / (K_1 \cdot \pi \cdot R_m^2 t) \\ = 532 \cdot 1250 / (2 \cdot 15) - 5259 / (0.11 \cdot \pi \cdot 1250^2 \cdot 15) \\ = 28.74 \text{ N./mm}^2$$

Longitudinal Stress at Bottom of Shell at Support (4.15.9) [σ_{*4}]:

$$= P \cdot R_m / (2t) + M_1 / (K_1 \cdot \pi \cdot R_m^2 \cdot t) \\ = 532 \cdot 1250 / (2 \cdot 15) + 5259 / (0.19 \cdot \pi \cdot 1250^2 \cdot 15) \\ = 18.54 \text{ N./mm}^2$$

Maximum Shear Force in the Saddle (4.15.3) [T]:

$$= Q(L - 2a) / (L + (4 \cdot h_m / 3)) \\ = 89129 (8009 - 2 \cdot 1120) / (8009 + (4 \cdot 0 / 3)) \\ = 64200.1 \text{ Kgf}$$

Shear Stress in the shell no rings, not stiffened (4.15.12) [τ_2]:

$$= K_2 \cdot T / (R_m \cdot t) \\ = 1.17 \cdot 64200 / (1250 \cdot 15) \\ = 39.29 \text{ N./mm}^2$$

Decay Length (4.15.20) [x_1, x_2]:

$$= 0.78 \cdot \sqrt{R_m \cdot t} \\ = 0.78 \cdot \sqrt{1250 \cdot 15} \\ = 106.827 \text{ mm}$$

Effective reinforcing plate width (4.15.24) [B1]:

$$= \min(b + 1.56 \cdot \sqrt{R_m \cdot t}, 2a) \\ = \min(400 + 1.56 \cdot \sqrt{1250 \cdot 15}, 2 \cdot 1120) \\ = 613.65 \text{ mm}$$

Wear Plate/Shell Stress ratio (4.15.26) [η]:

$$= \min(S_r / S, 1) \\ = \min(138 / 138, 1) \\ = 1.0000$$

Circumferential Stress at Saddle Base with Wear Plate (4.15.25) [σ_6, r]:

$$= -K_5 \cdot Q \cdot k / (B_1(t + \eta \cdot tr)) \\ = -0.76 \cdot 89129 \cdot 0.1 / (614(15 + 1 \cdot 20)) \\ = -3.09 \text{ N./mm}^2$$

Circ. Comp. Stress at Horn of Saddle, $L < 8R_m$ (4.15.29) [σ_7, r_{*}]:

$$= -Q / (4(t + \eta \cdot tr)b_1) - 12 \cdot K_7 \cdot Q \cdot R_m / (L(t + \eta \cdot tr)^2) \\ = -89129 / (4(15 + 1 \cdot 20)614) - 12 \cdot 0.045 \cdot 89129 \cdot 1250 / (8009(15 + 1 \cdot 20)^2) \\ = -69.77 \text{ N./mm}^2$$

Distance between Saddle Supports [Ls]:

$$= 3360.0 \text{ mm}$$

Free Un-Restrained Thermal Expansion between the Saddles [Exp]:

$$= \alpha \cdot L_s (\text{Design Temperature} - \text{Ambient Temperature}) \\ = 0.12297 \text{E-04} \cdot 3360 (130 - 21.1)$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 150 of 275

Saddle Calcs: Operating Case: Step: 25 6:05pm Sep 8,2026

= 4.499 mm

Results for Vessel Ribs, Web and Base:

Baseplate Length	Bplen	2350.0000	mm
Baseplate Thickness	Bpthk	36.0000	mm
Baseplate Width	Bpwid	425.0000	mm
Number of Ribs (inc. outside ribs)	Nribs	5	
Rib Thickness	Ribtk	20.0000	mm
Web Thickness	Webtk	20.0000	mm
Web Location	Webloc	Center	
Saddle Design Temperature		21.1	°C
Saddle Yield Stress	Sy	222.2	N./mm ²
Height of Web at Center	Hw,c	680.0	mm
Friction Coefficient	mu	0.300	

Moment of Inertia of Saddle - Transverse Direction (90 degrees to long axis)

Inertia of Shell [ShellInertia]:

$$= ((1.56 \cdot \sqrt{(R \cdot t)} + \text{WearPlateWidth})^3) / 12$$

$$= ((1.56 \cdot \sqrt{(1243 \cdot 15)} + 650)^3) / 12$$

$$= 24.272 \text{ cm}^4$$

Resolved Inertia for the Shell [I,shell]:

$$= \text{ShellInertia} + A_{\text{Shell}} (C1 - Y)^2$$

$$= 24.3 + 129 (286 - 7.5)^2$$

$$= 100696.133 \text{ cm}^4$$

	B mm	D mm	Y mm	A cm ²	AY mm ³	I + AD ⁽²⁾ cm ⁴
Shell	863.0	15.0	7.5	129.5	97088.9	0.101E+06
Wearplate	650.0	20.0	25.0	130.0	325000.0	0.889E+05
Web	20.0	636.0	353.0	127.2	4490159.0	0.485E+05
BasePlate	425.0	36.0	689.0	153.0	10541700.0	0.248E+06
Totals	...	...	...	539.7	15453948.0	0.486E+06

Distance to Centroid [C1]:

$$= AY / A$$

$$= 15453948 / 540$$

$$= 286.369 \text{ mm}$$

Angle [β]:

$$= 180 - \text{Saddle Angle} / 2$$

$$= 180 - 120 / 2$$

$$= 120.0$$

Saddle Splitting Coefficient [K1]:

$$= (1 + \cos(\beta) - 0.5 \cdot \sin(\beta)^2) / (\pi - \beta + \sin(\beta) \cos(\beta))$$

$$= (1 + \cos(120) - 0.5 \cdot \sin(120)^2) / (\pi - 2.09 + \sin(120) \cos(120))$$

$$= 0.2035$$

Saddle Splitting Force [Fh]:

$$= K1 \cdot Q$$

$$= 0.2 \cdot 89129$$

$$= 18139.6328 \text{ Kg}$$

$$\text{Tension Stress, } St = (Fh / As) = 4.3367 \text{ N./mm}^2$$

$$\text{Allowed Stress, } Sa = 0.6 \cdot \text{Yield Str} = 133.3187 \text{ N./mm}^2$$

Saddle Splitting Dimension [d]:

$$= B - R \cdot \sin(\theta/2) / (\theta/2 \text{ in radians})$$

$$= 1950 - 1243 \cdot \sin(120/2) / 1.05$$

$$= 922.047 \text{ mm}$$

$$\text{Bending Moment, } M = Fh \cdot d = 16725.9297 \text{ Kg-m.}$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 151 of 275

Saddle Calcs: Operating Case: Step: 25 6:05pm Sep 8,2026

Bending Stress, $S_b = (M \cdot C_1 / I) = 9.6596 \text{ N./mm}^2$
 Allowed Stress, $S_a = 2/3 \cdot \text{Yield Str} = 148.1319 \text{ N./mm}^2$

Minimum Thickness of Baseplate per Moss:

$= \sqrt{(3(Q + \text{SaddleWt}) \cdot \text{BasePlateWidth}) / (4 \cdot \text{BasePlateLength} \cdot \text{AllStress}))}$
 $= \sqrt{(3(89129 + 1385) \cdot 425) / (4 \cdot 2350 \cdot 148)}$
 $= 28.509 \text{ mm}$

Calculation of Axial Load, Intermediate Values and Compressive Stress:

Web Length Dimension [Web Length]:
 $= 2 \cdot \cos(90 - \text{Saddle Angle}/2) (\text{Inside Radius} + \text{Shell Thk} + \text{Wear Plate Thk})$
 $= 2 \cdot \cos(90 - 120/2) (1240 + 18 + 20)$
 $= 2213.561 \text{ mm}$

Distance between Ribs [e]:
 $= \text{Web Length} / (\text{Nr ribs} - 1)$
 $= 2214 / (5 - 1)$
 $= 553.390 \text{ mm}$

Baseplate Pressure Area [Ap]:
 $= e \cdot \text{Bpwid} / 2$
 $= 553 \cdot 425 / 2$
 $= 1175.954 \text{ cm}^2$

Bearing Pressure [Bp]:
 $= (Q + \text{SaddleWt}) / (\text{BasePlateLength} \cdot \text{BasePlateWidth})$
 $= 90514 / (2350 \cdot 425)$
 $= 9.063 \text{ Kg/cm}^2$

Axial Load [P]:
 $= A_p \cdot B_p$
 $= 1176 \cdot 9.06$
 $= 10657.310 \text{ Kgf}$

Area of the Rib and Web [Ar]:
 $= \text{Rib Area} + \text{Web Area}$
 $= 76 + 55.3$
 $= 131.339 \text{ cm}^2$

Compressive Stress [Sc]:
 $= P / A_r$
 $= 10657 / 131$
 $= 7.958 \text{ N./mm}^2$

Check of Outside Ribs:

Inertia of Saddle, Outer Ribs - Longitudinal Direction

	B	D	Y	A	AY	Io
Rib+Web	20.0	400.0	...	80.0	...	0.107E+05

Rib dimension [D]:
 $= \text{Saddle Width} - \text{Web Thickness}$
 $= 400 - 20$
 $= 380.000 \text{ mm}$

Distance to Centroid from Datum [ytot]:
 $= AY / A$
 $= 0 / 131$
 $= 0.000 \text{ mm}$

Distance to Centroid [C1]:



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 152 of 275

Saddle Calcs: Operating Case: Step: 25 6:05pm Sep 8,2026

= Saddle Width / 2
= 400/2
= 200.000 mm

Radius of Gyration [r]:
= $\sqrt{\text{Total Inertia} / \text{Total Area}}$
= $\sqrt{10667/131}$
= 90.119 mm

Length of Outer Rib [L]:
= Saddle Height - $\cos(\theta/2)$ (radius + shlthk + wpdthk) - bpthk
= 1950 - $\cos(120/2)$ (1240 + 18 + 20) - 36
= 1275.000 mm

Intermediate Term [Cc]:
= $\sqrt{2 \cdot \pi^2 \cdot \text{Elastic Modulus} / \text{Yield Stress}}$
= $\sqrt{2 \cdot \pi^2 \cdot 199943008/222}$
= 133.279

Slenderness ratio [KL/r]:
= KL/r
= 1 • 1275/90.1
= 14.148

Bending Moment [Rm]:
= $Fl / (2 \cdot B_{plen}) \cdot e \cdot L / 2$
= $7448 / (2 \cdot 2350) \cdot 553 \cdot 1275/2$
= 559.060 Kg-m.

Compressive Allowable, $KL/r < Cc$ (14.1 < 133) per AISC E2-1 [Sca]:
= $(1 - (KL/r)^2 / (2 \cdot Cc^2)) F_y / (5/3 + 3 \cdot (KL/r) / (8 \cdot Cc) - (KL/r)^3 / (8 \cdot Cc^3))$
= $(1 - (14.1)^2 / (2 \cdot 133^2)) 222 / (5/3 + 3 \cdot (14.1) / (8 \cdot 133) - (14.1)^3 / (8 \cdot 133^3))$
= 129.5 N./mm²

AISC Unity Check of Outside Ribs (must be ≤ 1)
= $S_c / S_{ca} + (R_m \cdot C_1 / I) / S_{ba}$
= $7.96/129 + (559 \cdot 200/106666664) / 148$
= 0.131

Check of Inside Ribs:

Inertia of Saddle, Inner Ribs - Axial Direction

	B	D	Y	A	AY	Io
Rib	20.0	380.0	0.0	76.0	0.0	0.107E+05
Web	553.4	20.0	0.0	110.7	0.0	36.9
Totals	...	...	...	186.7	...	0.107E+05

Distance to Centroid from Datum [ytot]:
= AY / A
= 0/187
= 0.000 mm

Distance to Centroid [C1]:
= Saddle Width / 2
= 400/2
= 200.000 mm

Length of Inner Rib [L]:
= Saddle Height - Outside Radius - Bpthk
= 1950 - $\cos(1278/2)$ (36 + 0 + 0) - 0
= 636.000 mm

Radius of Gyration [r]:



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 153 of 275

Saddle Calcs: Operating Case: Step: 25 6:05pm Sep 8, 2026

$$= \sqrt{\text{Total Inertia} / \text{Total Area}}$$

$$= \sqrt{(10702/187)}$$

$$= 75.716 \text{ mm}$$

Slenderness ratio [KL/r]:

$$= KL/r$$

$$= 1 \cdot 636/75.7$$

$$= 8.400$$

Unit Force [Force,u]:

$$= FI / (2 \cdot \text{Baseplate Length})$$

$$= 7448 / (2 \cdot 2350)$$

$$= 1.585 \text{ Kg/mm}$$

Moment at base of inner Rib [Mbase,c]:

$$= \text{Unit Force} \cdot e \cdot L$$

$$= 1.58 \cdot 553 \cdot 636$$

$$= 557.745 \text{ Kg-m.}$$

Bending Stress due to Transverse Force and Weight Load [σ_B ,base,c]:

$$= \text{Bending Moment} / \text{Section Modulus}$$

$$= 558/535111$$

$$= 10.221 \text{ N./mm}^2$$

Compressive Allowable, $KL/r < C_c$ ($8.4 < 133$) per AISC E2-1 [Sca]:

$$= (1 - (KL/r)^2 / (2 \cdot C_c^2)) F_y / (5/3 + 3 \cdot (KL/r) / (8 \cdot C_c) - (KL/r)^3 / (8 \cdot C_c^3))$$

$$= (1 - (8.4)^2 / (2 \cdot 133^2)) 222 /$$

$$(5/3 + 3 \cdot (8.4) / (8 \cdot 133) - (8.4)^3 / (8 \cdot 133^3))$$

$$= 131.2 \text{ N./mm}^2$$

AISC Unity Check of Inside Ribs (must be ≤ 1)

$$= S_c / S_{ca} + (M_{base,c} \cdot C_1 / I) / S_{ba}$$

$$= 11.2/131 + (558 \cdot 200/10702) / 148$$

$$= 0.154$$

Input Data for Base Plate Bolting Calculations:

Total Number of Bolts per BasePlate	Nbolts	8
Total Number of Bolts in Tension/Baseplate	Nbt	4
Bolt Design Temperature		21.1 °C
Bolt Material Specification		SA-193 B7
Bolt Allowable Stress	Stba	172.38 N./mm ²
Bolt Corrosion Allowance	Bca	1.5 mm
Distance from Bolts to Edge	Edgedis	50.8 mm
User Defined Area in a Single Bolt	UserBoltArea	11.5300 cm ²
BasePlate Allowable Stress	S	138.00 N./mm ²
Area Available in a Single Bolt	BlArea	9.7967 cm ²
Saddle Load Q0 (Weight)	Q0	80671.9 Kg
Saddle Load QL (Wind/Seismic contribution)	QL	4322.5 Kg
Maximum Transverse Force	Ft	3724.0 Kg
Maximum Longitudinal Force	F1	7447.9 Kg
Saddle Bolted to Steel Foundation		No

Shear Stress in a Single Bolt, Longitudinal Direction [rb,l]:

$$= FI / (\text{Bolt Area} \cdot \text{Number of Bolts})$$

$$= 7448 / (9.8 \cdot 8)$$

$$= 9.3 \text{ N./mm}^2. \text{ Must be less than } 103.4 \text{ N./mm}^2.$$

Shear Stress in a Single Bolt, Transverse Direction [rb,t]:

$$= Ft / (\text{Bolt Area} \cdot \text{Number of Bolts})$$

$$= 3724 / (9.8 \cdot 8)$$

$$= 4.7 \text{ N./mm}^2. \text{ Must be less than } 103.4 \text{ N./mm}^2.$$

Bolt Area Calculation per Dennis R. Moss



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 154 of 275

Saddle Calcs: Operating Case: Step: 25 6:05pm Sep 8,2026

Bolt Area Requirement Due to Longitudinal Load [Bltarearl]:
= 0.0 (QO > QL --> No Uplift in Longitudinal direction)

Bolt Area due to Shear Load [Bltarears]:
= $F_l / (\text{BoltShearAllowable} \cdot N_{\text{bolts}})$
= $7448 / (103 \cdot 8)$
= 0.8828 cm²

Bolt Area due to Transverse Load:

Moment on Baseplate Due to Transverse Load [Rmom]:
= $B \cdot F_t + \text{Sum of X Moments}$
= $1950 \cdot 3724 + 0$
= 7261.88 Kg-m.

Eccentricity (e):
= R_{mom} / QO
= $7262 / 80672$
= 90.02 mm < $B_{\text{plen}} / 6$ --> No Uplift in Transverse direction

Bolt Area due to Transverse Load [Bltareart]:
= 0 (No Uplift)

Required Area of a Single Bolt [Bltarear]:
= $\max[\text{Bltarearl}, \text{Bltarears}, \text{Bltareart}]$
= $\max[0, 0.88, 0]$
= 0.8828 cm²

MDMT Calculations for: Left Saddle, Saddle to Wearplate Junction, Curve: B

Govrn. thk, tg = 18, tr = 9.56, c = 3 mm, E* = 1
Thickness Ratio = $tr \cdot E^* / (tg - c) = 0.64$, Temp. Reduction = 20 °C

Min Metal Temp. w/o impact per UCS-66, Curve B	-11 °C
Min Metal Temp. at Required thickness (UCS 66.1)	-31 °C
Min Metal Temp. w/o impact per UG-20(f)	-29 °C

ASME VIII Division 2 Horizontal Vessel Analysis, Right Saddle:

Input and Calculated Values:

Vessel Mean Radius	Rm	1250.50	mm
Shell Thickness used in this Case	t	18.000	mm
Stiffened Vessel Length per 4.15.6	L	8008.80	mm
Distance from Saddle to Vessel tangent	a1 or a	1120.00	mm
Saddle Width	b1 or b	400.00	mm
Saddle Bearing Angle	delta or theta	120.00	degrees
Wear Plate Width	b2 or b1	650.00	mm
Wear Plate Bearing Angle	delta2 or theta1	132.00	degrees
Wear Plate Thickness	e2 or tr	20.0	mm
Wear Plate Allowable Stress	fw or Sr	138.00	N./mm ²
Shell Allowable Stress used in Calculation		138.00	N./mm ²
Head Allowable Stress used in Calculation		138.00	N./mm ²
Circumferential Efficiency in Plane of Saddle		1.00	
Circumferential Efficiency at Mid-Span		1.00	
Distance from Saddle Base to Centerline	B	1950.00	mm
Coefficient of Friction	mu	0.00	

Results for Horizontal Vessel Analysis:



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 155 of 275

Saddle Calcs: Operating Case: Step: 25 6:05pm Sep 8,2026

Saddle Force Q, Operating Case 61192.52 Kgf
Pressure used in Analysis P 531.959 KPa.

Horizontal Vessel Analysis Results:	Actual N./mm ²	Allowable N./mm ²
Long. Stress at Top of Midspan	14.20	138.00
Long. Stress at Bottom of Midspan	30.15	138.00
Long. Stress at Top of Saddles	26.68	138.00
Long. Stress at Bottom of Saddles	19.68	138.00
Tangential Shear in Shell	26.98	110.40
Circ. Stress at Horn of Saddle	47.90	172.50
Circ. Compressive Stress in Shell	2.12	138.00

Intermediate Results: Saddle Reaction Q due to Wind or Seismic:

Transverse Saddle Reaction Force [Fwt]:

$$= Ftr(Ft/Num of Saddles + Z Force Load) \cdot B / E$$

$$= 3 (1390/2 + 0) \cdot 1950/2214$$

$$= 1836.6 \text{ Kgf}$$

Longitudinal Saddle Reaction Force [Fwl]:

$$= \max(Fl,wind; \text{Sum of X Forces}) \cdot B / Ls$$

$$= \max(615, 0) \cdot 1950/3360$$

$$= 357.0 \text{ Kgf}$$

Saddle Reaction Force due to Earthquake Fl [Fsl]:

$$= \max(Fl,eq; \text{Sum of X Forces}) \cdot B / Ls$$

$$= \max(7448, 0) \cdot 1950/3360$$

$$= 4322.5 \text{ Kgf}$$

Saddle Reaction Force due to Earthquake Ft [Fst]:

$$= Ftr(Ft/Num of Saddles + Z Force Load) \cdot B / E$$

$$= 3 (7448/2 + 0) \cdot 1950/2214$$

$$= 9841.7 \text{ Kgf}$$

Load Combination Results for Q + Wind or Seismic [Q]:

$$= \text{Saddle Load} + \max(Fwl, Fwt, Fsl, Fst)$$

$$= 51351 + \max(357, 1837, 4322, 9842)$$

$$= 61192.5 \text{ Kgf}$$

Longitudinal Wind Force [Fl]:

$$= \text{WindScalar} \cdot \text{WindPress} (\text{Platform Area} + (\pi/4 (OD \cdot \text{WindDiaMult})^2))$$

$$= 1.1 \cdot 766 (0 + \pi/4 (2.52 \cdot 1.2)^2)$$

$$= 6033.145 \text{ N}$$

Summary of Loads at the Base of this Saddle:

Vertical Load (including saddle weight) 62577.40 Kgf
Transverse Shear Load 3723.97 Kgf
Longitudinal Shear Load 7447.94 Kgf

Note: Wear Plate is Welded to the Shell, k = 0.1

Saddle Dimension [E]:

$$= \min(2(\text{ShellID}/2 + t + \text{WearPadThickness}) \sin(\theta/2), 2 \cdot Rm)$$

$$= \min(2(2480/2 + 18 + 20) \sin(120/2), 2 \cdot 1250)$$

$$= 2213.561 \text{ mm}$$

The Computed K values from Table 4.15.1:

K1 = 0.1066 K2 = 1.1707 K3 = 0.8799 K4 = 0.4011
K5 = 0.7603 K6 = 0.0529 K7 = 0.0446 K8 = 0.3405
K9 = 0.2711 K10 = 0.0581 K1* = 0.1923 K6p = 0.0434
K7p = 0.0366



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 156 of 275

Saddle Calcs: Operating Case: Step: 25 6:05pm Sep 8, 2026

The suffix 'p' denotes the values for a wear plate if it exists.

Note: Dimension a is greater than or equal to $R_m/2$.

Moment per Equation 4.15.1 [M1]:

$$= -Q \cdot a \left[1 - \left(1 - \frac{a}{L} + \frac{(R_m^2 - h m^2)}{(2a \cdot L)} \right) / (1 + (4hm)/3L) \right]$$

$$= -61193 \cdot 1120 \left[1 - \left(1 - \frac{1120}{8009} + \frac{(1250^2 - 0^2)}{(2 \cdot 1120 \cdot 8009)} \right) / (1 + (4 \cdot 0)/(3 \cdot 8009)) \right]$$

$$= -3610.5 \text{ Kg-m.}$$

Moment per Equation 4.15.2 [M2]:

$$= Q \cdot L / 4 \left(\frac{1 + 2(R_m^2 - h m^2)/(L^2)}{(1 + (4h m^2)/(3L))} - 4a/L \right)$$

$$= 61193 \cdot 8009 / 4 \left(\frac{1 + 2(1250^2 - 0^2)/(8009^2)}{(1 + (4 \cdot 0)/(3 \cdot 8009))} - 4 \cdot 1120/8009 \right)$$

$$= 59959.3 \text{ Kg-m.}$$

Longitudinal Stress at Top of Shell (4.15.4) [σ_1]:

$$= P \cdot R_m / (2t) - M2 / (\pi \cdot R_m^2 t)$$

$$= 532 \cdot 1250 / (2 \cdot 15) - 59959 / (\pi \cdot 1250^2 \cdot 15)$$

$$= 14.20 \text{ N./mm}^2$$

Longitudinal Stress at Bottom of Shell (4.15.5) [σ_2]:

$$= P \cdot R_m / (2t) + M2 / (\pi \cdot R_m^2 \cdot t)$$

$$= 532 \cdot 1250 / (2 \cdot 15) + 59959 / (\pi \cdot 1250^2 \cdot 15)$$

$$= 30.15 \text{ N./mm}^2$$

Longitudinal Stress at Top of Shell at Support (4.15.8) [σ^*3]:

$$= P \cdot R_m / (2t) - M1 / (K1 \cdot \pi \cdot R_m^2 t)$$

$$= 532 \cdot 1250 / (2 \cdot 15) - 3610 / (0.11 \cdot \pi \cdot 1250^2 \cdot 15)$$

$$= 26.68 \text{ N./mm}^2$$

Longitudinal Stress at Bottom of Shell at Support (4.15.9) [σ^*4]:

$$= P \cdot R_m / (2t) + M1 / (K1^* \cdot \pi \cdot R_m^2 \cdot t)$$

$$= 532 \cdot 1250 / (2 \cdot 15) + 3610 / (0.19 \cdot \pi \cdot 1250^2 \cdot 15)$$

$$= 19.68 \text{ N./mm}^2$$

Maximum Shear Force in the Saddle (4.15.3) [T]:

$$= Q(L - 2a) / (L + (4hm/3))$$

$$= 61193 (8009 - 2 \cdot 1120) / (8009 + (4 \cdot 0/3))$$

$$= 44077.4 \text{ Kg}$$

Shear Stress in the shell no rings, not stiffened (4.15.12) [τ_2]:

$$= K2 \cdot T / (R_m \cdot t)$$

$$= 1.17 \cdot 44077 / (1250 \cdot 15)$$

$$= 26.98 \text{ N./mm}^2$$

Decay Length (4.15.20) [x_1, x_2]:

$$= 0.78 \cdot \sqrt{(R_m \cdot t)}$$

$$= 0.78 \cdot \sqrt{(1250 \cdot 15)}$$

$$= 106.827 \text{ mm}$$

Effective reinforcing plate width (4.15.24) [B1]:

$$= \min(b + 1.56 \cdot \sqrt{(R_m \cdot t)}, 2a)$$

$$= \min(400 + 1.56 \cdot \sqrt{(1250 \cdot 15)}, 2 \cdot 1120)$$

$$= 613.65 \text{ mm}$$

Wear Plate/Shell Stress ratio (4.15.26) [η]:

$$= \min(S_r/S, 1)$$

$$= \min(138/138, 1)$$

$$= 1.0000$$

Circumferential Stress at Saddle Base with Wear Plate (4.15.25) [σ_6, r]:

$$= -K5 \cdot Q \cdot k / (B1(t + \eta \cdot tr))$$

$$= -0.76 \cdot 61193 \cdot 0.1 / (614(15 + 1 \cdot 20))$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 157 of 275

Saddle Calcs: Operating Case: Step: 25 6:05pm Sep 8,2026

$$= -2.12 \text{ N./mm}^2$$

Circ. Comp. Stress at Horn of Saddle, $L < 8R_m$ (4.15.29) $[\sigma_7, r^*]$:

$$= -Q / (4(t + \eta \cdot r) b_1) - 12 \cdot K_7 \cdot Q \cdot R_m / (L(t + \eta \cdot r)^2)$$

$$= -61193 / (4(15 + 1 \cdot 20) 614) -$$

$$12 \cdot 0.045 \cdot 61193 \cdot 1250 / (8009(15 + 1 \cdot 20)^2)$$

$$= -47.90 \text{ N./mm}^2$$

Results for Vessel Ribs, Web and Base:

Baseplate Length	Bplen	2350.0000	mm
Baseplate Thickness	Bpthk	36.0000	mm
Baseplate Width	Bpwid	425.0000	mm
Number of Ribs (inc. outside ribs)	Nribs	5	
Rib Thickness	Ribtk	20.0000	mm
Web Thickness	Webtk	20.0000	mm
Web Location	Webloc	Center	
Saddle Design Temperature		21.1	°C
Saddle Yield Stress	Sy	222.2	N./mm ²
Height of Web at Center	Hw,c	680.0	mm
Friction Coefficient	mu	0.000	

Moment of Inertia of Saddle - Transverse Direction (90 degrees to long axis)

Inertia of Shell [ShellInertia]:

$$= ((1.56 \cdot \sqrt{(R \cdot t)} + \text{WearPlateWidth}) t^3) / 12$$

$$= ((1.56 \cdot \sqrt{(1243 \cdot 15)} + 650) 15^3) / 12$$

$$= 24.272 \text{ cm}^4$$

Resolved Inertia for the Shell [I,shell]:

$$= \text{ShellInertia} + A_{\text{Shell}} (C_1 - Y)^2$$

$$= 24.3 + 129 (286 - 7.5)^2$$

$$= 100696.133 \text{ cm}^4$$

	B mm	D mm	Y mm	A cm ²	AY mm ³	I + AD ² cm ⁴
Shell	863.0	15.0	7.5	129.5	97088.9	0.101E+06
Wearplate	650.0	20.0	25.0	130.0	325000.0	0.889E+05
Web	20.0	636.0	353.0	127.2	4490159.0	0.485E+05
BasePlate	425.0	36.0	689.0	153.0	10541700.0	0.248E+06
Totals	...	...	...	539.7	15453948.0	0.486E+06

Distance to Centroid [C1]:

$$= AY / A$$

$$= 15453948 / 540$$

$$= 286.369 \text{ mm}$$

Angle [β]:

$$= 180 - \text{Saddle Angle} / 2$$

$$= 180 - 120 / 2$$

$$= 120.0$$

Saddle Splitting Coefficient [K1]:

$$= (1 + \cos(\beta) - 0.5 \cdot \sin(\beta)^2) / (\pi - \beta + \sin(\beta) \cos(\beta))$$

$$= (1 + \cos(120) - 0.5 \cdot \sin(120)^2) / (\pi - 2.09 + \sin(120) \cos(120))$$

$$= 0.2035$$

Saddle Splitting Force [Fh]:

$$= K_1 \cdot Q$$

$$= 0.2 \cdot 61193$$

$$= 12454.0039 \text{ Kg}$$

$$\text{Tension Stress, } S_t = (F_h / A_s) = 2.9774 \text{ N./mm}^2$$

$$\text{Allowed Stress, } S_a = 0.6 \cdot \text{Yield Str} = 133.3187 \text{ N./mm}^2$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 158 of 275

Saddle Calcs: Operating Case: Step: 25 6:05pm Sep 8,2026

Saddle Splitting Dimension [d]:

$$= B - R \cdot \sin(\theta/2) / (\theta/2 \text{ in radians})$$

$$= 1950 - 1243 \cdot \sin(120/2) / 1.05$$

$$= 922.047 \text{ mm}$$

$$\text{Bending Moment, } M = F_h \cdot d = 11483.4062 \text{ Kg-m.}$$

$$\text{Bending Stress, } S_b = (M \cdot C_1 / I) = 6.6320 \text{ N./mm}^2$$

$$\text{Allowed Stress, } S_a = 2/3 \cdot \text{Yield Str} = 148.1319 \text{ N./mm}^2$$

Minimum Thickness of Baseplate per Moss:

$$= \sqrt{3(Q + \text{SaddleWt}) \text{BasePlateWidth} / (4 \cdot \text{BasePlateLength} \cdot \text{AllStress})}$$

$$= \sqrt{3(61193 + 1385) 425 / (4 \cdot 2350 \cdot 148)}$$

$$= 23.705 \text{ mm}$$

Calculation of Axial Load, Intermediate Values and Compressive Stress:

Web Length Dimension [Web Length]:

$$= 2 \cdot \cos(90 - \text{Saddle Angle}/2) (\text{Inside Radius} + \text{Shell Thk} + \text{Wear Plate Thk})$$

$$= 2 \cdot \cos(90 - 120/2) (1240 + 18 + 20)$$

$$= 2213.561 \text{ mm}$$

Distance between Ribs [e]:

$$= \text{Web Length} / (\text{Nr ribs} - 1)$$

$$= 2214 / (5 - 1)$$

$$= 553.390 \text{ mm}$$

Baseplate Pressure Area [Ap]:

$$= e \cdot \text{Bpwid} / 2$$

$$= 553 \cdot 425 / 2$$

$$= 1175.954 \text{ cm}^2$$

Bearing Pressure [Bp]:

$$= (Q + \text{SaddleWt}) / (\text{BasePlateLength} \cdot \text{BasePlateWidth})$$

$$= 62577 / (2350 \cdot 425)$$

$$= 6.266 \text{ Kg/cm}^2$$

Axial Load [P]:

$$= A_p \cdot B_p$$

$$= 1176 \cdot 6.27$$

$$= 7368.026 \text{ Kg}$$

Area of the Rib and Web [Ar]:

$$= \text{Rib Area} + \text{Web Area}$$

$$= 76 + 55.3$$

$$= 131.339 \text{ cm}^2$$

Compressive Stress [Sc]:

$$= P / A_r$$

$$= 7368 / 131$$

$$= 5.502 \text{ N./mm}^2$$

Check of Outside Ribs:

Inertia of Saddle, Outer Ribs - Longitudinal Direction

	B	D	Y	A	AY	Io
Rib+Web	20.0	400.0	...	80.0	...	0.107E+05

Rib dimension [D]:

$$= \text{Saddle Width} - \text{Web Thickness}$$

$$= 400 - 20$$

$$= 380.000 \text{ mm}$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 159 of 275

Saddle Calcs: Operating Case: Step: 25 6:05pm Sep 8, 2026

Distance to Centroid from Datum [ytot]:

$$= AY / A$$

$$= 0/131$$

$$= 0.000 \text{ mm}$$

Distance to Centroid [C1]:

$$= \text{Saddle Width} / 2$$

$$= 400/2$$

$$= 200.000 \text{ mm}$$

Radius of Gyration [r]:

$$= \sqrt{\text{Total Inertia} / \text{Total Area}}$$

$$= \sqrt{10667/131}$$

$$= 90.119 \text{ mm}$$

Length of Outer Rib [L]:

$$= \text{Saddle Height} - \cos(\theta/2) (\text{radius} + \text{shlthk} + \text{wpdthk}) - \text{bpthk}$$

$$= 1950 - \cos(120/2) (1240 + 18 + 20) - 36$$

$$= 1275.000 \text{ mm}$$

Intermediate Term [Cc]:

$$= \sqrt{2 \cdot \pi^2 \cdot \text{Elastic Modulus} / \text{Yield Stress}}$$

$$= \sqrt{2 \cdot \pi^2 \cdot 199943392/222}$$

$$= 133.279$$

Slenderness ratio [KL/r]:

$$= KL/r$$

$$= 1 \cdot 1275/90.1$$

$$= 14.148$$

Bending Moment [Rm]:

$$= FI / (2 \cdot \text{Bplen}) \cdot e \cdot L / 2$$

$$= 7448 / (2 \cdot 2350) \cdot 553 \cdot 1275/2$$

$$= 559.060 \text{ Kg-m.}$$

Compressive Allowable, $KL/r < Cc$ ($14.1 < 133$) per AISC E2-1 [Sca]:

$$= (1 - (KL/r)^2 / (2 \cdot Cc^2)) Fy / (5/3 + 3 \cdot (KL/r) / (8 \cdot Cc) - (KL/r)^3 / (8 \cdot Cc^3))$$

$$= (1 - (14.1)^2 / (2 \cdot 133^2)) 222 / (5/3 + 3 \cdot (14.1) / (8 \cdot 133) - (14.1)^3 / (8 \cdot 133^3))$$

$$= 129.5 \text{ N./mm}^2$$

AISC Unity Check of Outside Ribs (must be ≤ 1)

$$= Sc/Sca + (Rm \cdot C1 / I) / Sba$$

$$= 5.5/129 + (559 \cdot 200/106666664) / 148$$

$$= 0.112$$

Check of Inside Ribs:

Inertia of Saddle, Inner Ribs - Axial Direction

	B	D	Y	A	AY	Io
Rib	20.0	380.0	0.0	76.0	0.0	0.107E+05
Web	553.4	20.0	0.0	110.7	0.0	36.9
Totals	...	...	...	186.7	...	0.107E+05

Distance to Centroid from Datum [ytot]:

$$= AY / A$$

$$= 0/187$$

$$= 0.000 \text{ mm}$$

Distance to Centroid [C1]:

$$= \text{Saddle Width} / 2$$

$$= 400/2$$

$$= 200.000 \text{ mm}$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 160 of 275

Saddle Calcs: Operating Case: Step: 25 6:05pm Sep 8,2026

Length of Inner Rib [L]:

$$= \text{Saddle Height} - \text{Outside Radius} - \text{Bpthk}$$

$$= 1950 - \cos(1278/2)(36 + 0 + 0) - 0$$

$$= 636.000 \text{ mm}$$

Radius of Gyration [r]:

$$= \sqrt{\text{Total Inertia} / \text{Total Area}}$$

$$= \sqrt{10702/187}$$

$$= 75.716 \text{ mm}$$

Slenderness ratio [KL/r]:

$$= KL/r$$

$$= 1 \cdot 636/75.7$$

$$= 8.400$$

Unit Force [Force,u]:

$$= FI / (2 \cdot \text{Baseplate Length})$$

$$= 7448 / (2 \cdot 2350)$$

$$= 1.585 \text{ Kgf/mm}$$

Moment at base of inner Rib [Mbase,c]:

$$= \text{Unit Force} \cdot e \cdot L$$

$$= 1.58 \cdot 553 \cdot 636$$

$$= 557.745 \text{ Kg-m.}$$

Bending Stress due to Transverse Force and Weight Load [σ_B ,base,c]:

$$= \text{Bending Moment} / \text{Section Modulus}$$

$$= 558/535111$$

$$= 10.221 \text{ N./mm}^2$$

Compressive Allowable, $KL/r < C_c$ ($8.4 < 133$) per AISC E2-1 [Sca]:

$$= (1 - (KL/r)^2 / (2 \cdot C_c^2)) F_y / (5/3 + 3 \cdot (KL/r) / (8 \cdot C_c) - (KL/r)^3 / (8 \cdot C_c^3))$$

$$= (1 - (8.4)^2 / (2 \cdot 133^2)) 222 / (5/3 + 3 \cdot (8.4) / (8 \cdot 133) - (8.4)^3 / (8 \cdot 133^3))$$

$$= 131.2 \text{ N./mm}^2$$

AISC Unity Check of Inside Ribs (must be ≤ 1)

$$= S_c / S_{ca} + (M_{base,c} \cdot C1/I) / S_{ba}$$

$$= 7.74/131 + (558 \cdot 200/10702) / 148$$

$$= 0.128$$

Input Data for Base Plate Bolting Calculations:

Total Number of Bolts per BasePlate	Nbolts	8
Total Number of Bolts in Tension/Baseplate	Nbt	4
Bolt Design Temperature		21.1 °C
Bolt Material Specification		SA-193 B7
Bolt Allowable Stress	Stba	172.38 N./mm ²
Bolt Corrosion Allowance	Bca	1.5 mm
Distance from Bolts to Edge	Edgedis	50.8 mm
User Defined Area in a Single Bolt	UserBoltArea	11.5300 cm ²
BasePlate Allowable Stress	S	138.00 N./mm ²
Area Available in a Single Bolt	BltArea	9.7967 cm ²
Saddle Load Q0 (Weight)	Q0	52735.7 Kgf
Saddle Load QL (Wind/Seismic contribution)	QL	4322.5 Kgf
Maximum Transverse Force	Ft	3724.0 Kgf
Maximum Longitudinal Force	F1	7447.9 Kgf
Saddle Bolted to Steel Foundation		No

Friction force due to thermal growth, [Ff]:

$$= 24201.6 \text{ Kgf}$$

Shear Stress in a Single Bolt, Longitudinal Direction [τ_b ,l]:

$$= \max(F_f, F_1) / (\text{Bolt Area} \cdot \text{Number of Bolts})$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 161 of 275

Saddle Calcs: Operating Case: Step: 25 6:05pm Sep 8, 2026

= $24202 / (9.8 \cdot 8)$
 = 30.3 N./mm². Must be less than 103.4 N./mm².

Shear Stress in a Single Bolt, Transverse Direction [τ_{b,t}]:

= $F_t / (\text{Bolt Area} \cdot \text{Number of Bolts})$
 = $3724 / (9.8 \cdot 8)$
 = 4.7 N./mm². Must be less than 103.4 N./mm².

Bolt Area Calculation per Dennis R. Moss

Bolt Area Requirement Due to Longitudinal Load [Bltarearl]:

= 0.0 (QO > QL --> No Uplift in Longitudinal direction)

Bolt Area due to Shear Load [Bltarears]:

= $F_l / (\text{BoltShearAllowable} \cdot \text{Nbols})$
 = $7448 / (103 \cdot 8)$
 = 0.8828 cm²

Bolt Area due to Transverse Load:

Moment on Baseplate Due to Transverse Load [Rmom]:

= $B \cdot F_t + \text{Sum of X Moments}$
 = $1950 \cdot 3724 + 0$
 = 7261.88 Kg-m.

Eccentricity (e):

= R_{mom} / QO
 = $7262 / 52736$
 = 137.70 mm < Bplen/6 --> No Uplift in Transverse direction

Bolt Area due to Transverse Load [Bltareart]:

= 0 (No Uplift)

Required Area of a Single Bolt [Bltarear]:

= $\max[Bltarearl, Bltarears, Bltareart]$
 = $\max[0, 0.88, 0]$
 = 0.8828 cm²

MDMT Calculations for: Sdl 2 Fr60, Saddle to Wearplate Junction, Curve: B

Govrn. thk, tg = 18, tr = 9.56, c = 3 mm, E* = 1

Thickness Ratio = $tr \cdot E^* / (tg - c) = 0.64$, Temp. Reduction = 20 °C

Min Metal Temp. w/o impact per UCS-66, Curve B	-11 °C
Min Metal Temp. at Required thickness (UCS 66.1)	-31 °C
Min Metal Temp. w/o impact per UG-20(f)	-29 °C

Review notes about nozzle loadings and supports in the Warnings report.

PV Elite is a trademark of Hexagon AB, 2026, All rights reserved.



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 162 of 275

Saddle Calcs: Test Case:

Step: 26

6:05pm


Sep 8, 2026

ASME VIII Division 2 Horizontal Vessel Analysis, Left Saddle:

Horizontal Vessel Stress Calculations : Test Case

Input and Calculated Values:

Vessel Mean Radius	Rm	1249.00	mm
Shell Thickness used in this Case	t	18.000	mm
Stiffened Vessel Length per 4.15.6	L	8008.80	mm
Distance from Saddle to Vessel tangent	a1 or a	1120.00	mm
Saddle Width	b1 or b	400.00	mm
Saddle Bearing Angle	delta or theta	120.00	degrees
Wear Plate Width	b2 or b1	650.00	mm
Wear Plate Bearing Angle	delta2 or theta1	132.00	degrees
Wear Plate Thickness	e2 or tr	20.0	mm
Wear Plate Allowable Stress	fw or Sr	138.00	N./mm ²
Shell Allowable Stress used in Calculation		234.00	N./mm ²
Head Allowable Stress used in Calculation		234.00	N./mm ²
Circumferential Efficiency in Plane of Saddle		1.00	
Circumferential Efficiency at Mid-Span		1.00	
Distance from Saddle Base to Centerline	B	1950.00	mm
Coefficient of Friction	mu	0.30	

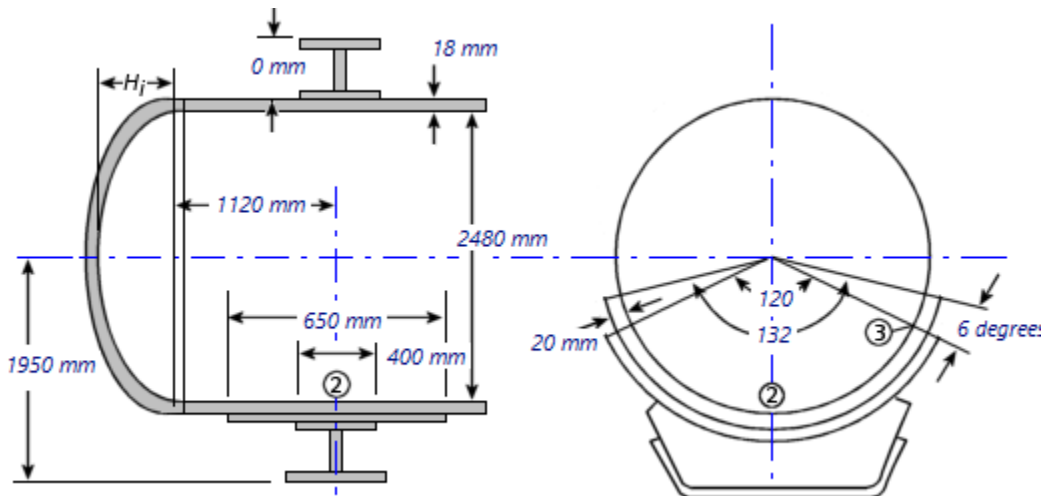

Results for Horizontal Vessel Analysis:

Saddle Force Q, Test Case, no Ext. Forces		77991.40	Kgf
Pressure used in Analysis	P	688.242	KPa.

Horizontal Vessel Analysis Results:	Actual N./mm ²	Allowable N./mm ²
Long. Stress at Top of Midspan	15.39	234.00
Long. Stress at Bottom of Midspan	32.37	234.00
Long. Stress at Top of Saddles	28.70	234.00
Long. Stress at Bottom of Saddles	21.21	234.00
Tangential Shear in Shell	28.69	138.58
Circ. Stress at Horn of Saddle	52.21	350.99
Circ. Compressive Stress in Shell	2.41	234.00



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 163 of 275

Saddle Calcs: Test Case:

Step: 26

6:05pm

Sep 8, 2026

Intermediate Results: Saddle Reaction Q due to Wind or Seismic:

Transverse Saddle Reaction Force [Fwt]:

$$= \text{Ftr}(\text{Ft/Num of Saddles} + \text{Z Force Load}) \cdot B / E$$

$$= 3 (695/2 + 0) \cdot 1950/2214$$

$$= 918.3 \text{ Kgf}$$

Longitudinal Saddle Reaction Force [Fwl]:

$$= \max(\text{Fl,wind}; \text{Sum of X Forces}) \cdot B / \text{Ls}$$

$$= \max(308, 0) \cdot 1950/3360$$

$$= 178.5 \text{ Kgf}$$

Load Combination Results for Q + Wind or Seismic [Q]:

$$= \text{Saddle Load} + \max(\text{Fwl}, \text{Fwt}, \text{Fsl}, \text{Fst})$$

$$= 77073 + \max(179, 918, 0, 0)$$

$$= 77991.4 \text{ Kgf}$$

Longitudinal Wind Force [Fl]:

$$= \text{WindScalar} \cdot \text{WindPress}(\text{Platform Area} + (\pi/4(\text{OD} \cdot \text{WindDiaMult})^2))$$

$$= 1.1 \cdot 766 (0 + \pi/4(2.52 \cdot 1.2)^2)$$

$$= 6033.145 \text{ N}$$

Summary of Loads at the Base of this Saddle:

Vertical Load (including saddle weight)	79376.28	Kgf
Transverse Shear Load	347.47	Kgf
Longitudinal Shear Load	307.61	Kgf

Note: Wear Plate is Welded to the Shell, $k = 0.1$

Saddle Dimension [E]:

$$= \min(2(\text{ShellID}/2 + t + \text{WearPadThickness})\sin(\theta/2), 2 \cdot R_m)$$

$$= \min(2(2480/2 + 18 + 20)\sin(120/2), 2 \cdot 1249)$$

$$= 2213.561 \text{ mm}$$

The Computed K values from Table 4.15.1:

K1 = 0.1066	K2 = 1.1707	K3 = 0.8799	K4 = 0.4011
K5 = 0.7603	K6 = 0.0529	K7 = 0.0447	K8 = 0.3405
K9 = 0.2711	K10 = 0.0581	K1* = 0.1923	K6p = 0.0434
K7p = 0.0367			

The suffix 'p' denotes the values for a wear plate if it exists.

Note: Dimension a is greater than or equal to $R_m/2$.

Moment per Equation 4.15.1 [M1]:

$$= -Q \cdot a [1 - (1 - a/L + (R_m^2 - h_m^2)/(2a \cdot L))/(1 + (4h_m)/3L)]$$

$$= -77991 \cdot 1120 [1 - (1 - 1120/8009 + (1249^2 - 0^2)/(2 \cdot 1120 \cdot 8009))/(1 + (4 \cdot 0)/(3 \cdot 8009))]$$

$$= -4619.9 \text{ Kg-m.}$$

Moment per Equation 4.15.2 [M2]:

$$= Q \cdot L/4 ((1 + 2(R_m^2 - h_m^2)/(L^2))/(1 + (4h_m^2)/(3L)) - 4a/L)$$

$$= 77991 \cdot 8009/4 ((1 + 2(1249^2 - 0^2)/(8009^2))/(1 + (4 \cdot 0)/(3 \cdot 8009)) - 4 \cdot 1120/8009)$$

$$= 76401.4 \text{ Kg-m.}$$

Longitudinal Stress at Top of Shell (4.15.4) [σ_1]:

$$= P \cdot R_m/(2t) - M2/(\pi \cdot R_m^2 t)$$

$$= 688 \cdot 1249/(2 \cdot 18) - 76401/(\pi \cdot 1249^2 \cdot 18)$$

$$= 15.39 \text{ N/mm}^2$$

Longitudinal Stress at Bottom of Shell (4.15.5) [σ_2]:

$$= P \cdot R_m/(2t) + M2/(\pi \cdot R_m^2 \cdot t)$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 164 of 275

Saddle Calcs: Test Case:

Step: 26

6:05pm

Sep 8, 2026

$$= 688 \cdot 1249 / (2 \cdot 18) + 76401 / (\pi \cdot 1249^2 \cdot 18)$$

$$= 32.37 \text{ N./mm}^2$$

Longitudinal Stress at Top of Shell at Support (4.15.8) [σ^*3]:

$$= P \cdot R_m / (2t) - M1 / (K1 \cdot \pi \cdot R_m^2 t)$$

$$= 688 \cdot 1249 / (2 \cdot 18) - 4620 / (0.11 \cdot \pi \cdot 1249^2 \cdot 18)$$

$$= 28.70 \text{ N./mm}^2$$

Longitudinal Stress at Bottom of Shell at Support (4.15.9) [σ^*4]:

$$= P \cdot R_m / (2t) + M1 / (K1 \cdot \pi \cdot R_m^2 \cdot t)$$

$$= 688 \cdot 1249 / (2 \cdot 18) + 4620 / (0.19 \cdot \pi \cdot 1249^2 \cdot 18)$$

$$= 21.21 \text{ N./mm}^2$$

Maximum Shear Force in the Saddle (4.15.3) [T]:

$$= Q(L-2a) / (L + (4 \cdot h_m / 3))$$

$$= 77991 (8009 - 2 \cdot 1120) / (8009 + (4 \cdot 0 / 3))$$

$$= 56177.8 \text{ Kgf}$$

Shear Stress in the shell no rings, not stiffened (4.15.12) [$\tau2$]:

$$= K2 \cdot T / (R_m \cdot t)$$

$$= 1.17 \cdot 56178 / (1249 \cdot 18)$$

$$= 28.69 \text{ N./mm}^2$$

Decay Length (4.15.20) [$x1, x2$]:

$$= 0.78 \cdot \sqrt{(R_m \cdot t)}$$

$$= 0.78 \cdot \sqrt{(1249 \cdot 18)}$$

$$= 116.953 \text{ mm}$$

Effective reinforcing plate width (4.15.24) [B1]:

$$= \min(b + 1.56 \cdot \sqrt{(R_m \cdot t)}, 2a)$$

$$= \min(400 + 1.56 \cdot \sqrt{(1249 \cdot 18)}, 2 \cdot 1120)$$

$$= 633.91 \text{ mm}$$

Wear Plate/Shell Stress ratio (4.15.26) [eta]:

$$= 1.0000 \text{ Materials are the same, test case}$$

Circumferential Stress at Saddle Base with Wear Plate (4.15.25) [$\sigma6, r$]:

$$= -K5 \cdot Q \cdot k / (B1(t + \eta \cdot tr))$$

$$= -0.76 \cdot 77991 \cdot 0.1 / (634(18 + 1 \cdot 20))$$

$$= -2.41 \text{ N./mm}^2$$

Circ. Comp. Stress at Horn of Saddle, $L < 8R_m$ (4.15.29) [$\sigma7, r^*$]:

$$= -Q / (4(t + \eta \cdot tr)b1) - 12 \cdot K7 \cdot Q \cdot R_m / (L(t + \eta \cdot tr)^2)$$

$$= -77991 / (4(18 + 1 \cdot 20)634) -$$

$$12 \cdot 0.045 \cdot 77991 \cdot 1249 / (8009(18 + 1 \cdot 20)^2)$$

$$= -52.21 \text{ N./mm}^2$$

Results for Vessel Ribs, Web and Base:

Baseplate Length	Bplen	2350.0000	mm
Baseplate Thickness	Bpthk	36.0000	mm
Baseplate Width	Bpwid	425.0000	mm
Number of Ribs (inc. outside ribs)	Nribs	5	
Rib Thickness	Ribtk	20.0000	mm
Web Thickness	Webtk	20.0000	mm
Web Location	Webloc	Center	
Saddle Yield Stress	Sy	250.0	N./mm ²
Height of Web at Center	Hw,c	680.0	mm
Friction Coefficient	mu	0.300	

Moment of Inertia of Saddle - Transverse Direction (90 degrees to long axis)

Inertia of Shell [ShellInertia]:

$$= ((1.56 \cdot \sqrt{(R \cdot t)} + \text{WearPlateWidth})^3) / 12$$

$$= ((1.56 \cdot \sqrt{(1240 \cdot 18)} + 650)^3) / 12$$

$$= 42.917 \text{ cm}^4$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 165 of 275

Saddle Calcs: Test Case:

Step: 26

6:05pm

Sep 8, 2026

Resolved Inertia for the Shell [I,shell]:

$$= \text{ShellInertia} + A_{\text{Shell}}(C1 - Y)^2$$

$$= 42.9 + 159 (274 - 9)^2$$

$$= 112084.586 \text{ cm}^4$$

	B mm	D mm	Y mm	A cm ²	AY mm ³	I + AD ² cm ⁴
Shell	883.1	18.0	9.0	159.0	143056.0	0.112E+06
Wearplate	650.0	20.0	28.0	130.0	363999.9	0.790E+05
Web	20.0	636.0	356.0	127.2	4528319.5	0.513E+05
BasePlate	425.0	36.0	692.0	153.0	10587601.0	0.267E+06
Totals	...	...	...	569.2	15622976.0	0.509E+06

Distance to Centroid [C1]:

$$= AY / A$$

$$= 15622976/569$$

$$= 274.496 \text{ mm}$$

Angle [β]:

$$= 180 - \text{Saddle Angle}/2$$

$$= 180 - 120/2$$

$$= 120.0$$

Saddle Splitting Coefficient [K1]:

$$= (1 + \cos(\beta) - 0.5 \cdot \sin(\beta)^2) / (\pi - \beta + \sin(\beta) \cos(\beta))$$

$$= (1 + \cos(120) - 0.5 \cdot \sin(120)^2) / (\pi - 2.09 + \sin(120) \cos(120))$$

$$= 0.2035$$

Saddle Splitting Force [Fh]:

$$= K1 \cdot Q$$

$$= 0.2 \cdot 77991$$

$$= 15872.9414 \text{ Kg}$$

$$\text{Tension Stress, } St = (Fh / As) = 3.7948 \text{ N./mm}^2$$

$$\text{Allowed Stress, } Sa = 0.6 \cdot \text{Yield Str} = 149.9973 \text{ N./mm}^2$$

Saddle Splitting Dimension [d]:

$$= B - R \cdot \sin(\theta/2) / (\theta/2 \text{ in radians})$$

$$= 1950 - 1240 \cdot \sin(120/2) / 1.05$$

$$= 924.528 \text{ mm}$$

$$\text{Bending Moment, } M = Fh \cdot d = 14675.2715 \text{ Kg-m.}$$

$$\text{Bending Stress, } Sb = (M \cdot C1 / I) = 7.7565 \text{ N./mm}^2$$

$$\text{Allowed Stress, } Sa = 2/3 \cdot \text{Yield Str} = 166.6637 \text{ N./mm}^2$$

Minimum Thickness of Baseplate per Moss:

$$= \sqrt{(3(Q + \text{SaddleWt}) \cdot \text{BasePlateWidth}) / (4 \cdot \text{BasePlateLength} \cdot \text{AllStress})}$$

$$= \sqrt{(3(77991 + 1385) \cdot 425) / (4 \cdot 2350 \cdot 167)}$$

$$= 25.170 \text{ mm}$$

Calculation of Axial Load, Intermediate Values and Compressive Stress:

Web Length Dimension [Web Length]:

$$= 2 \cdot \cos(90 - \text{Saddle Angle}/2) (\text{Inside Radius} + \text{Shell Thk} + \text{Wear Plate Thk})$$

$$= 2 \cdot \cos(90 - 120/2) (1240 + 18 + 20)$$

$$= 2213.561 \text{ mm}$$

Distance between Ribs [e]:

$$= \text{Web Length} / (\text{Nrings} - 1)$$

$$= 2214 / (5 - 1)$$

$$= 553.390 \text{ mm}$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 166 of 275

Saddle Calcs: Test Case:

Step: 26

6:05pm

Sep 8, 2026

Baseplate Pressure Area [Ap]:

$$= e \cdot Bpwid / 2$$

$$= 553 \cdot 425 / 2$$

$$= 1175.954 \text{ cm}^2$$

Bearing Pressure [Bp]:

$$= (Q + SaddleWt) / (BasePlateLength \cdot BasePlateWidth)$$

$$= 79376 / (2350 \cdot 425)$$

$$= 7.948 \text{ Kg/cm}^2$$

Axial Load [P]:

$$= Ap \cdot Bp$$

$$= 1176 \cdot 7.95$$

$$= 9345.970 \text{ Kg}$$

Area of the Rib and Web [Ar]:

$$= Rib \text{ Area} + Web \text{ Area}$$

$$= 76 + 55.3$$

$$= 131.339 \text{ cm}^2$$

Compressive Stress [Sc]:

$$= P / Ar$$

$$= 9346 / 131$$

$$= 6.978 \text{ N/mm}^2$$

Check of Outside Ribs:

Inertia of Saddle, Outer Ribs - Longitudinal Direction

	B	D	Y	A	AY	Io
Rib+Web	20.0	400.0	...	80.0	...	0.107E+05

Rib dimension [D]:

$$= Saddle \text{ Width} - Web \text{ Thickness}$$

$$= 400 - 20$$

$$= 380.000 \text{ mm}$$

Distance to Centroid from Datum [ytot]:

$$= AY / A$$

$$= 0 / 131$$

$$= 0.000 \text{ mm}$$

Distance to Centroid [C1]:

$$= Saddle \text{ Width} / 2$$

$$= 400 / 2$$

$$= 200.000 \text{ mm}$$

Radius of Gyration [r]:

$$= \sqrt{(Total \text{ Inertia} / Total \text{ Area})}$$

$$= \sqrt{(10667 / 131)}$$

$$= 90.119 \text{ mm}$$

Length of Outer Rib [L]:

$$= Saddle \text{ Height} - \cos(\theta / 2) (radius + shlthk + wpdthk) - bpthk$$

$$= 1950 - \cos(120 / 2) (1240 + 18 + 20) - 36$$

$$= 1275.000 \text{ mm}$$

Intermediate Term [Cc]:

$$= \sqrt{(2 \cdot \pi^2 \cdot Elastic \text{ Modulus} / Yield \text{ Stress})}$$

$$= \sqrt{(2 \cdot \pi^2 \cdot 199943008 / 250)}$$

$$= 125.651$$

Slenderness ratio [KL/r]:

$$= KL / r$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 167 of 275

Saddle Calcs: Test Case:

Step: 26

6:05pm

Sep 8, 2026

$$= 1 \cdot 1275/90.1$$

$$= 14.148$$

Bending Moment [Rm]:

$$= FI / (2 \cdot Bplen) \cdot e \cdot L / 2$$

$$= 308 / (2 \cdot 2350) \cdot 553 \cdot 1275/2$$

$$= 23.090 \text{ Kg-m.}$$

Compressive Allowable, $KL/r < Cc$ ($14.1 < 126$) per AISC E2-1 [Sca]:

$$= (1 - (KL/r)^2 / (2 \cdot Cc^2)) Fy / (5/3 + 3 \cdot (KL/r) / (8 \cdot Cc) - (KL/r)^3 / (8 \cdot Cc^3))$$

$$= (1 - (14.1)^2 / (2 \cdot 126^2)) 250 / (5/3 + 3 \cdot (14.1) / (8 \cdot 126) - (14.1^3) / (8 \cdot 126^3))$$

$$= 145.4 \text{ N/mm}^2$$

AISC Unity Check of Outside Ribs (must be ≤ 1)

$$= Sc/Sca + (Rm \cdot C1 / I) / Sba$$

$$= 6.98/145 + (23.1 \cdot 200/106666664) / 167$$

$$= 0.051$$

Check of Inside Ribs:

Inertia of Saddle, Inner Ribs - Axial Direction

	B	D	Y	A	AY	Io
Rib	20.0	380.0	0.0	76.0	0.0	0.107E+05
Web	553.4	20.0	0.0	110.7	0.0	36.9
Totals	...	...	...	186.7	...	0.107E+05

Distance to Centroid from Datum [ytot]:

$$= AY / A$$

$$= 0/187$$

$$= 0.000 \text{ mm}$$

Distance to Centroid [C1]:

$$= \text{Saddle Width} / 2$$

$$= 400/2$$

$$= 200.000 \text{ mm}$$

Length of Inner Rib [L]:

$$= \text{Saddle Height} - \text{Outside Radius} - Bpthk$$

$$= 1950 - \cos(1278/2) (36 + 0 + 0) - 0$$

$$= 636.000 \text{ mm}$$

Radius of Gyration [r]:

$$= \sqrt{ (\text{Total Inertia} / \text{Total Area}) }$$

$$= \sqrt{ (10702/187) }$$

$$= 75.716 \text{ mm}$$

Slenderness ratio [KL/r]:

$$= KL/r$$

$$= 1 \cdot 636/75.7$$

$$= 8.400$$

Unit Force [Force,u]:

$$= FI / (2 \cdot \text{Baseplate Length})$$

$$= 308 / (2 \cdot 2350)$$

$$= 0.065 \text{ Kg/mm}$$

Moment at base of inner Rib [Mbase,c]:

$$= \text{Unit Force} \cdot e \cdot L$$

$$= 0.065 \cdot 553 \cdot 636$$

$$= 23.036 \text{ Kg-m.}$$

Bending Stress due to Transverse Force and Weight Load [$\sigma B, \text{base}, c$]:

$$= \text{Bending Moment} / \text{Section Modulus}$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 168 of 275

Saddle Calcs: Test Case:

Step: 26

6:05pm

Sep 8, 2026

$$= 23/535111$$

$$= 0.422 \text{ N./mm}^2$$

Compressive Allowable, $KL/r < C_c$ ($8.4 < 126$) per AISC E2-1 [Sca]:

$$= (1 - (KL/r)^2 / (2 \cdot C_c^2)) F_y / (5/3 + 3 \cdot (KL/r) / (8 \cdot C_c) - (KL/r)^3 / (8 \cdot C_c^3))$$

$$= (1 - (8.4)^2 / (2 \cdot 126^2)) 250 / (5/3 + 3 \cdot (8.4) / (8 \cdot 126) - (8.4^3) / (8 \cdot 126^3))$$

$$= 147.4 \text{ N./mm}^2$$

AISC Unity Check of Inside Ribs (must be ≤ 1)

$$= S_c / S_{ca} + (M_{base,c} \cdot C1/I) / S_{ba}$$

$$= 9.82/147 + (23 \cdot 200/10702) / 167$$

$$= 0.069$$

Input Data for Base Plate Bolting Calculations:

Total Number of Bolts per BasePlate	Nbolts	8
Total Number of Bolts in Tension/Baseplate	Nbt	4
Bolt Material Specification		SA-193 B7
Bolt Allowable Stress	Stba	172.00 N./mm ²
Bolt Corrosion Allowance	Bca	1.5 mm
Distance from Bolts to Edge	Edgedis	50.8 mm
User Defined Area in a Single Bolt	UserBoltArea	11.5300 cm ²
BasePlate Allowable Stress	S	138.00 N./mm ²
Area Available in a Single Bolt	BltArea	9.7967 cm ²
Saddle Load QO (Weight)	QO	78458.0 Kgf
Saddle Load QL (Wind/Seismic contribution)	QL	178.5 Kgf
Maximum Transverse Force	Ft	347.5 Kgf
Maximum Longitudinal Force	F1	307.6 Kgf
Saddle Bolted to Steel Foundation		No

Shear Stress in a Single Bolt, Longitudinal Direction [tb,l]:

$$= F1 / (\text{Bolt Area} \cdot \text{Number of Bolts})$$

$$= 308 / (9.8 \cdot 8)$$

$$= 0.4 \text{ N./mm}^2. \text{ Must be less than } 103.2 \text{ N./mm}^2.$$

Shear Stress in a Single Bolt, Transverse Direction [tb,t]:

$$= Ft / (\text{Bolt Area} \cdot \text{Number of Bolts})$$

$$= 347 / (9.8 \cdot 8)$$

$$= 0.4 \text{ N./mm}^2. \text{ Must be less than } 103.2 \text{ N./mm}^2.$$

Bolt Area Calculation per Dennis R. Moss

Bolt Area Requirement Due to Longitudinal Load [Bltarearl]:

$$= 0.0 \text{ (} QO > QL \text{ --> No Uplift in Longitudinal direction)}$$

Bolt Area due to Shear Load [Bltarears]:

$$= F1 / (\text{BoltShearAllowable} \cdot \text{Nbolts})$$

$$= 308 / (103 \cdot 8)$$

$$= 0.0365 \text{ cm}^2$$

Bolt Area due to Transverse Load:

Moment on Baseplate Due to Transverse Load [Rmom]:

$$= B \cdot Ft + \text{Sum of X Moments}$$

$$= 1950 \cdot 347 + 0$$

$$= 677.57 \text{ Kg-m.}$$

Eccentricity (e):

$$= Rmom / QO$$

$$= 678/78458$$

$$= 8.64 \text{ mm} < B_{plen}/6 \text{ --> No Uplift in Transverse direction}$$

Bolt Area due to Transverse Load [Bltareart]:

$$= 0 \text{ (No Uplift)}$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 169 of 275

Saddle Calcs: Test Case:

Step: 26

6:05pm

Sep 8, 2026

Required Area of a Single Bolt [Bltarear]:

= max[Bltarearl, Bltarears, Bltareart]

= max[0, 0.037, 0]

= 0.0365 cm²

ASME VIII Division 2 Horizontal Vessel Analysis, Right Saddle:

Input and Calculated Values:

Vessel Mean Radius	Rm	1249.00	mm
Shell Thickness used in this Case	t	18.000	mm
Stiffened Vessel Length per 4.15.6	L	8008.80	mm
Distance from Saddle to Vessel tangent	a1 or a	1120.00	mm
Saddle Width	b1 or b	400.00	mm
Saddle Bearing Angle	delta or theta	120.00	degrees
Wear Plate Width	b2 or b1	650.00	mm
Wear Plate Bearing Angle	delta2 or theta1	132.00	degrees
Wear Plate Thickness	e2 or tr	20.0	mm
Wear Plate Allowable Stress	fw or Sr	138.00	N./mm ²
Shell Allowable Stress used in Calculation		234.00	N./mm ²
Head Allowable Stress used in Calculation		234.00	N./mm ²
Circumferential Efficiency in Plane of Saddle		1.00	
Circumferential Efficiency at Mid-Span		1.00	
Distance from Saddle Base to Centerline	B	1950.00	mm
Coefficient of Friction	mu	0.00	

Results for Horizontal Vessel Analysis:

Saddle Force Q, Test Case, no Ext. Forces		47942.16	Kgf
Pressure used in Analysis	P	688.242	KPa.

Horizontal Vessel Analysis Results:	Actual N./mm ²	Allowable N./mm ²
Long. Stress at Top of Midspan	18.66	234.00
Long. Stress at Bottom of Midspan	29.10	234.00
Long. Stress at Top of Saddles	26.84	234.00
Long. Stress at Bottom of Saddles	22.24	234.00
Tangential Shear in Shell	17.63	138.58
Circ. Stress at Horn of Saddle	32.09	350.99
Circ. Compressive Stress in Shell	1.48	234.00

Intermediate Results: Saddle Reaction Q due to Wind or Seismic:

Transverse Saddle Reaction Force [Fwt]:

= Ftr(Ft/Num of Saddles + Z Force Load) • B / E

= 3 (695/2 + 0) • 1950/2214

= 918.3 Kgf

Longitudinal Saddle Reaction Force [Fwl]:

= max(Fl,wind; Sum of X Forces) • B / Ls

= max(308, 0) • 1950/3360

= 178.5 Kgf

Load Combination Results for Q + Wind or Seismic [Q]:

= Saddle Load + max(Fwl, Fwt, Fsl, Fst)

= 47024 + max(179, 918, 0, 0)



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 170 of 275

Saddle Calcs: Test Case:

Step: 26

6:05pm

Sep 8, 2026

= 47942.2 Kgf

Longitudinal Wind Force [FI]:

= WindScalar • WindPress (Platform Area + ($\pi/4$ (OD • WindDiaMult)²))

= 1.1 • 766 (0 + $\pi/4$ (2.52 • 1.2)²)

= 6033.145 N

Summary of Loads at the Base of this Saddle:

Vertical Load (including saddle weight) 49327.05 Kgf

Transverse Shear Load 347.47 Kgf

Longitudinal Shear Load 307.61 Kgf

Note: Wear Plate is Welded to the Shell, k = 0.1

Saddle Dimension [E]:

= min(2(ShellID/2 + t + WearPadThickness)sin($\theta/2$), 2•Rm)

= min(2(2480/2 + 18 + 20)sin(120/2), 2•1249)

= 2213.561 mm

The Computed K values from Table 4.15.1:

K1 = 0.1066 K2 = 1.1707 K3 = 0.8799 K4 = 0.4011

K5 = 0.7603 K6 = 0.0529 K7 = 0.0447 K8 = 0.3405

K9 = 0.2711 K10 = 0.0581 K1* = 0.1923 K6p = 0.0434

K7p = 0.0367

The suffix 'p' denotes the values for a wear plate if it exists.

Note: Dimension a is greater than or equal to Rm/2.

Moment per Equation 4.15.1 [M1]:

= -Q•a [1 - (1 - a/L + (Rm²-hm²)/(2a•L))/(1+(4hm)/3L)]

= -47942•1120 [1 - (1 - 1120/8009 + (1249²-0²)/

(2•1120•8009))/(1+(4•0)/(3•8009))]

= -2839.9 Kg-m.

Moment per Equation 4.15.2 [M2]:

= Q•L/4 ((1+2(Rm²-hm²)/(L²)) / ((1+(4hm²)/(3L)) - 4a/L)

= 47942•8009/4 ((1+2(1249²-0²)/(8009²)) / ((1+(4•0)/(

(3•8009)) - 4•1120/8009)

= 46964.7 Kg-m.

Longitudinal Stress at Top of Shell (4.15.4) [σ_1]:

= P • Rm/(2t) - M2/(π •Rm²t)

= 688 • 1249/(2•18) - 46965/(π •1249²•18)

= 18.66 N./mm²

Longitudinal Stress at Bottom of Shell (4.15.5) [σ_2]:

= P • Rm/(2t) + M2/(π • Rm² • t)

= 688 • 1249/(2 • 18) + 46965/(π • 1249² • 18)

= 29.10 N./mm²

Longitudinal Stress at Top of Shell at Support (4.15.8) [σ_{*3}]:

= P • Rm/(2t) - M1/(K1• π •Rm²t)

= 688•1249/(2•18)--2840/(0.11• π •1249²•18)

= 26.84 N./mm²

Longitudinal Stress at Bottom of Shell at Support (4.15.9) [σ_{*4}]:

= P • Rm/(2t) + M1/(K1* • π • Rm² • t)

= 688•1249/(2•18)+-2840/(0.19• π •1249²•18)

= 22.24 N./mm²

Maximum Shear Force in the Saddle (4.15.3) [T]:

= Q(L-2a)/(L+(4•hm/3))

= 47942 (8009 - 2 • 1120)/(8009 + (4 • 0/3))

= 34533.1 Kgf



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 171 of 275

Saddle Calcs: Test Case:

Step: 26

6:05pm

Sep 8, 2026

Shear Stress in the shell no rings, not stiffened (4.15.12) [τ_2]:

$$= K_2 \cdot T / (R_m \cdot t)$$

$$= 1.17 \cdot 34533 / (1249 \cdot 18)$$

$$= 17.63 \text{ N./mm}^2$$

Decay Length (4.15.20) [x_1, x_2]:

$$= 0.78 \cdot \sqrt{(R_m \cdot t)}$$

$$= 0.78 \cdot \sqrt{(1249 \cdot 18)}$$

$$= 116.953 \text{ mm}$$

Effective reinforcing plate width (4.15.24) [B1]:

$$= \min(b + 1.56 \cdot \sqrt{(R_m \cdot t)}, 2a)$$

$$= \min(400 + 1.56 \cdot \sqrt{(1249 \cdot 18)}, 2 \cdot 1120)$$

$$= 633.91 \text{ mm}$$

Wear Plate/Shell Stress ratio (4.15.26) [η]:

$$= 1.0000 \text{ Materials are the same, test case}$$

Circumferential Stress at Saddle Base with Wear Plate (4.15.25) [σ_6, r]:

$$= -K_5 \cdot Q \cdot k / (B_1(t + \eta \cdot tr))$$

$$= -0.76 \cdot 47942 \cdot 0.1 / (634(18 + 1 \cdot 20))$$

$$= -1.48 \text{ N./mm}^2$$

Circ. Comp. Stress at Horn of Saddle, $L < 8R_m$ (4.15.29) [σ_7, r^*]:

$$= -Q / (4(t + \eta \cdot tr)b_1) - 12 \cdot K_7 \cdot Q \cdot R_m / (L(t + \eta \cdot tr)^2)$$

$$= -47942 / (4(18 + 1 \cdot 20)634) -$$

$$12 \cdot 0.045 \cdot 47942 \cdot 1249 / (8009(18 + 1 \cdot 20)^2)$$

$$= -32.09 \text{ N./mm}^2$$

Results for Vessel Ribs, Web and Base:

Baseplate Length	Bplen	2350.0000	mm
Baseplate Thickness	Bpthk	36.0000	mm
Baseplate Width	Bpwid	425.0000	mm
Number of Ribs (inc. outside ribs)	Nribs	5	
Rib Thickness	Ribtk	20.0000	mm
Web Thickness	Webtk	20.0000	mm
Web Location	Webloc	Center	
Saddle Yield Stress	Sy	250.0	N./mm ²
Height of Web at Center	Hw,c	680.0	mm
Friction Coefficient	mu	0.000	

Moment of Inertia of Saddle - Transverse Direction (90 degrees to long axis)

Inertia of Shell [ShellInertia]:

$$= ((1.56 \cdot \sqrt{(R \cdot t)} + \text{WearPlateWidth})t^3) / 12$$

$$= ((1.56 \cdot \sqrt{(1240 \cdot 18)} + 650)18^3) / 12$$

$$= 42.917 \text{ cm}^4$$

Resolved Inertia for the Shell [I,shell]:

$$= \text{ShellInertia} + A_{\text{Shell}}(C_1 - Y)^2$$

$$= 42.9 + 159(274 - 9)^2$$

$$= 112084.586 \text{ cm}^4$$

	B mm	D mm	Y mm	A cm ²	AY mm ³	I + AD ⁽²⁾ cm ⁴
Shell	883.1	18.0	9.0	159.0	143056.0	0.112E+06
Wearplate	650.0	20.0	28.0	130.0	363999.9	0.790E+05
Web	20.0	636.0	356.0	127.2	4528319.5	0.513E+05
BasePlate	425.0	36.0	692.0	153.0	10587601.0	0.267E+06
Totals	...	...	...	569.2	15622976.0	0.509E+06

Distance to Centroid [C1]:



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 172 of 275

Saddle Calcs: Test Case:

Step: 26

6:05pm

Sep 8, 2026

$$\begin{aligned}
 &= AY / A \\
 &= 15622976/569 \\
 &= 274.496 \text{ mm}
 \end{aligned}$$

$$\begin{aligned}
 \text{Angle } [\beta]: \\
 &= 180 - \text{Saddle Angle}/2 \\
 &= 180 - 120/2 \\
 &= 120.0
 \end{aligned}$$

$$\begin{aligned}
 \text{Saddle Splitting Coefficient [K1]:} \\
 &= (1 + \cos(\beta) - 0.5 \cdot \sin(\beta)^2) / (\pi - \beta + \sin(\beta) \cos(\beta)) \\
 &= (1 + \cos(120) - 0.5 \cdot \sin(120)^2) / (\pi - 2.09 + \sin(120) \cos(120)) \\
 &= 0.2035
 \end{aligned}$$

$$\begin{aligned}
 \text{Saddle Splitting Force [Fh]:} \\
 &= K1 \cdot Q \\
 &= 0.2 \cdot 47942 \\
 &= 9757.2695 \text{ Kgf}
 \end{aligned}$$

$$\begin{aligned}
 \text{Tension Stress, } St &= (Fh / As) = 2.3327 \text{ N./mm}^2 \\
 \text{Allowed Stress, } Sa &= 0.6 \cdot \text{Yield Str} = 149.9973 \text{ N./mm}^2
 \end{aligned}$$

$$\begin{aligned}
 \text{Saddle Splitting Dimension [d]:} \\
 &= B - R \cdot \sin(\theta/2) / (\theta/2 \text{ in radians}) \\
 &= 1950 - 1240 \cdot \sin(120/2) / 1.05 \\
 &= 924.528 \text{ mm}
 \end{aligned}$$

$$\text{Bending Moment, } M = Fh \cdot d = 9021.0488 \text{ Kg-m.}$$

$$\begin{aligned}
 \text{Bending Stress, } Sb &= (M \cdot C1 / I) = 4.7680 \text{ N./mm}^2 \\
 \text{Allowed Stress, } Sa &= 2/3 \cdot \text{Yield Str} = 166.6637 \text{ N./mm}^2
 \end{aligned}$$

Minimum Thickness of Baseplate per Moss:

$$\begin{aligned}
 &= \sqrt{3(Q + \text{SaddleWt}) \text{BasePlateWidth} / (4 \cdot \text{BasePlateLength} \cdot \text{AllStress})} \\
 &= \sqrt{3(47942 + 1385)425 / (4 \cdot 2350 \cdot 167)} \\
 &= 19.842 \text{ mm}
 \end{aligned}$$

Calculation of Axial Load, Intermediate Values and Compressive Stress:

$$\begin{aligned}
 \text{Web Length Dimension [Web Length]:} \\
 &= 2 \cdot \cos(90 - \text{Saddle Angle}/2) (\text{Inside Radius} + \text{Shell Thk} + \text{Wear Plate Thk}) \\
 &= 2 \cdot \cos(90 - 120/2) (1240 + 18 + 20) \\
 &= 2213.561 \text{ mm}
 \end{aligned}$$

$$\begin{aligned}
 \text{Distance between Ribs [e]:} \\
 &= \text{Web Length} / (N_{\text{ribs}} - 1) \\
 &= 2214 / (5 - 1) \\
 &= 553.390 \text{ mm}
 \end{aligned}$$

$$\begin{aligned}
 \text{Baseplate Pressure Area [Ap]:} \\
 &= e \cdot B_{\text{pwid}} / 2 \\
 &= 553 \cdot 425 / 2 \\
 &= 1175.954 \text{ cm}^2
 \end{aligned}$$

$$\begin{aligned}
 \text{Bearing Pressure [Bp]:} \\
 &= (Q + \text{SaddleWt}) / (\text{BasePlateLength} \cdot \text{BasePlateWidth}) \\
 &= 49327 / (2350 \cdot 425) \\
 &= 4.939 \text{ Kgf/cm}^2
 \end{aligned}$$

$$\begin{aligned}
 \text{Axial Load [P]:} \\
 &= Ap \cdot Bp \\
 &= 1176 \cdot 4.94 \\
 &= 5807.894 \text{ Kgf}
 \end{aligned}$$

$$\text{Area of the Rib and Web [Ar]:}$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 173 of 275

Saddle Calcs: Test Case:

Step: 26

6:05pm

Sep 8, 2026

= Rib Area + Web Area

= 76 + 55.3

= 131.339 cm²

Compressive Stress [Sc]:

= P/Ar

= 5808/131

= 4.337 N./mm²

Check of Outside Ribs:

Inertia of Saddle, Outer Ribs - Longitudinal Direction

	B	D	Y	A	AY	Io
Rib+Web	20.0	400.0	...	80.0	...	0.107E+05

Rib dimension [D]:

= Saddle Width - Web Thickness

= 400 - 20

= 380.000 mm

Distance to Centroid from Datum [ytot]:

= AY / A

= 0/131

= 0.000 mm

Distance to Centroid [C1]:

= Saddle Width / 2

= 400/2

= 200.000 mm

Radius of Gyration [r]:

= $\sqrt{\text{Total Inertia} / \text{Total Area}}$

= $\sqrt{10667/131}$

= 90.119 mm

Length of Outer Rib [L]:

= Saddle Height - cos(theta/2)(radius + shlthk + wpdthk) - bpthk

= 1950 - cos(120/2)(1240 + 18 + 20) - 36

= 1275.000 mm

Intermediate Term [Cc]:

= $\sqrt{2 \cdot \pi^2 \cdot \text{Elastic Modulus} / \text{Yield Stress}}$

= $\sqrt{2 \cdot \pi^2 \cdot 199943392/250}$

= 125.651

Slenderness ratio [KL/r]:

= KL/r

= 1 • 1275/90.1

= 14.148

Bending Moment [Rm]:

= FI / (2 • Bplen) • e • L / 2

= 308 / (2 • 2350) • 553 • 1275/2

= 23.090 Kg-m.

Compressive Allowable, KL/r < Cc (14.1 < 126) per AISC E2-1 [Sca]:

= $(1 - (KL/r)^2 / (2 \cdot Cc^2)) Fy / (5/3 + 3 \cdot (KL/r) / (8 \cdot Cc) - (KL/r)^3 / (8 \cdot Cc^3))$

= $(1 - (14.1)^2 / (2 \cdot 126^2)) 250 /$

$(5/3 + 3 \cdot (14.1) / (8 \cdot 126) - (14.1^3) / (8 \cdot 126^3))$

= 145.4 N./mm²

AISC Unity Check of Outside Ribs (must be ≤ 1)

= Sc/Sca + (Rm • C1 / I) / Sba



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 174 of 275

Saddle Calcs: Test Case:

Step: 26

6:05pm

Sep 8, 2026

$$= 4.34/145 + (23.1 \cdot 200/106666664)/167$$

$$= 0.032$$

Check of Inside Ribs:

Inertia of Saddle, Inner Ribs - Axial Direction

	B	D	Y	A	AY	Io
Rib	20.0	380.0	0.0	76.0	0.0	0.107E+05
Web	553.4	20.0	0.0	110.7	0.0	36.9
Totals	...	...	...	186.7	...	0.107E+05

Distance to Centroid from Datum [ytot]:

$$= AY / A$$

$$= 0/187$$

$$= 0.000 \text{ mm}$$

Distance to Centroid [C1]:

$$= \text{Saddle Width} / 2$$

$$= 400/2$$

$$= 200.000 \text{ mm}$$

Length of Inner Rib [L]:

$$= \text{Saddle Height} - \text{Outside Radius} - \text{Bpthk}$$

$$= 1950 - \cos(1278/2)(36 + 0 + 0) - 0$$

$$= 636.000 \text{ mm}$$

Radius of Gyration [r]:

$$= \sqrt{\text{Total Inertia} / \text{Total Area}}$$

$$= \sqrt{10702/187}$$

$$= 75.716 \text{ mm}$$

Slenderness ratio [KL/r]:

$$= KL/r$$

$$= 1 \cdot 636/75.7$$

$$= 8.400$$

Unit Force [Force,u]:

$$= FI / (2 \cdot \text{Baseplate Length})$$

$$= 308/(2 \cdot 2350)$$

$$= 0.065 \text{ Kg/mm}$$

Moment at base of inner Rib [Mbase,c]:

$$= \text{Unit Force} \cdot e \cdot L$$

$$= 0.065 \cdot 553 \cdot 636$$

$$= 23.036 \text{ Kg-m.}$$

Bending Stress due to Transverse Force and Weight Load [σ_B ,base,c]:

$$= \text{Bending Moment} / \text{Section Modulus}$$

$$= 23/535111$$

$$= 0.422 \text{ N./mm}^2$$

Compressive Allowable, $KL/r < C_c$ ($8.4 < 126$) per AISC E2-1 [Sca]:

$$= (1 - (KL/r)^2/(2 \cdot C_c^2))F_y/(5/3 + 3 \cdot (KL/r)/(8 \cdot C_c) - (KL/r)^3/(8 \cdot C_c^3))$$

$$= (1 - (8.4)^2/(2 \cdot 126^2))250/$$

$$(5/3 + 3 \cdot (8.4)/(8 \cdot 126) - (8.4^3)/(8 \cdot 126^3))$$

$$= 147.4 \text{ N./mm}^2$$

AISC Unity Check of Inside Ribs (must be ≤ 1)

$$= Sc/Sca + (M_{base,c} \cdot C1/I)/Sba$$

$$= 6.1/147 + (23 \cdot 200/10702)/167$$

$$= 0.044$$

Input Data for Base Plate Bolting Calculations:



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 175 of 275

Saddle Calcs: Test Case:

Step: 26 6:05pm

Sep 8, 2026

Total Number of Bolts per BasePlate	Nbolts	8
Total Number of Bolts in Tension/Baseplate	Nbt	4
Bolt Material Specification		SA-193 B7
Bolt Allowable Stress	Stba	172.00 N./mm ²
Bolt Corrosion Allowance	Bca	1.5 mm
Distance from Bolts to Edge	Edgedis	50.8 mm
User Defined Area in a Single Bolt	UserBoltArea	11.5300 cm ²
BasePlate Allowable Stress	S	138.00 N./mm ²
Area Available in a Single Bolt	BltArea	9.7967 cm ²
Saddle Load Q0 (Weight)	Q0	48408.8 Kg
Saddle Load QL (Wind/Seismic contribution)	QL	178.5 Kg
Maximum Transverse Force	Ft	347.5 Kg
Maximum Longitudinal Force	F1	307.6 Kg
Saddle Bolted to Steel Foundation		No

Shear Stress in a Single Bolt, Longitudinal Direction [τ_{b,l}]:

= $F1 / (\text{Bolt Area} \cdot \text{Number of Bolts})$

= $308 / (9.8 \cdot 8)$

= 0.4 N./mm². Must be less than 103.2 N./mm².

Shear Stress in a Single Bolt, Transverse Direction [τ_{b,t}]:

= $Ft / (\text{Bolt Area} \cdot \text{Number of Bolts})$

= $347 / (9.8 \cdot 8)$

= 0.4 N./mm². Must be less than 103.2 N./mm².

Bolt Area Calculation per Dennis R. Moss

Bolt Area Requirement Due to Longitudinal Load [Bltarearl]:

= 0.0 (Q0 > QL --> No Uplift in Longitudinal direction)

Bolt Area due to Shear Load [Bltarears]:

= $F1 / (\text{BoltShearAllowable} \cdot \text{Nbolts})$

= $308 / (103 \cdot 8)$

= 0.0365 cm²

Bolt Area due to Transverse Load:

Moment on Baseplate Due to Transverse Load [Rmom]:

= $B \cdot Ft + \text{Sum of X Moments}$

= $1950 \cdot 347 + 0$

= 677.57 Kg-m.

Eccentricity (e):

= $Rmom / Q0$

= $678 / 48409$

= 14.00 mm < Bplen/6 --> No Uplift in Transverse direction

Bolt Area due to Transverse Load [Bltareart]:

= 0 (No Uplift)

Required Area of a Single Bolt [Bltarear]:

= $\max[\text{Bltarearl}, \text{Bltarears}, \text{Bltareart}]$

= $\max[0, 0.037, 0]$

= 0.0365 cm²

Review notes about nozzle loadings and supports in the Warnings report.

PV Elite is a trademark of Hexagon AB, 2026, All rights reserved.



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 176 of 275

Saddle Calcs: Ext. Pressure:

Step: 27

6:05pm


Sep 8, 2026

ASME VIII Division 2 Horizontal Vessel Analysis, Left Saddle:

Horizontal Vessel Stress Calculations : External Pressure

Input and Calculated Values:

Vessel Mean Radius	Rm	1250.50	mm
Shell Thickness used in this Case	t	18.000	mm
Stiffened Vessel Length per 4.15.6	L	8008.80	mm
Distance from Saddle to Vessel tangent	a1 or a	1120.00	mm
Saddle Width	b1 or b	400.00	mm
Saddle Bearing Angle	delta or theta	120.00	degrees
Wear Plate Width	b2 or b1	650.00	mm
Wear Plate Bearing Angle	delta2 or theta1	132.00	degrees
Wear Plate Thickness	e2 or tr	20.0	mm
Wear Plate Allowable Stress	fw or Sr	138.00	N./mm ²
Shell Allowable Stress used in Calculation		138.00	N./mm ²
Head Allowable Stress used in Calculation		138.00	N./mm ²
Circumferential Efficiency in Plane of Saddle		1.00	
Circumferential Efficiency at Mid-Span		1.00	
Distance from Saddle Base to Centerline	B	1950.00	mm
Coefficient of Friction	mu	0.30	

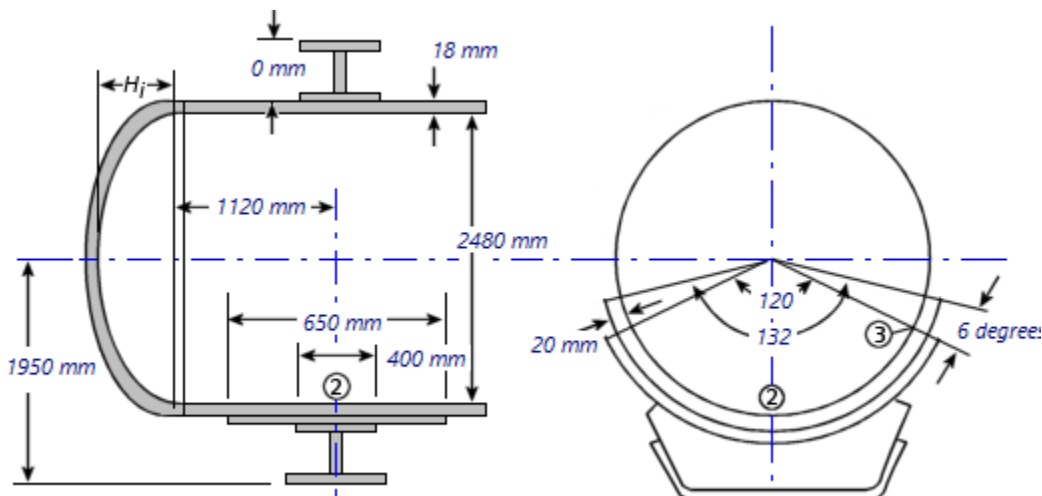

Results for Horizontal Vessel Analysis:

Saddle Force Q, External Pressure Case	89128.75	Kgf
Pressure used in Analysis	P	-103.419 KPa.

Horizontal Vessel Analysis Results:	Actual N./mm ²	Allowable N./mm ²
Long. Stress at Top of Midspan	-15.93	-176.60
Long. Stress at Top of Midspan	15.93	138.00
Long. Stress at Bottom of Midspan	7.31	138.00
Long. Stress at Top of Saddles	2.25	138.00
Long. Stress at Bottom of Saddles	-7.95	-176.60
Long. Stress at Bottom of Saddles	7.95	138.00
Tangential Shear in Shell	39.29	110.40



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 177 of 275

Saddle Calcs: Ext. Pressure: Step: 27 6:05pm Sep 8, 2026

Circ. Stress at Horn of Saddle	69.77	172.50
Circ. Compressive Stress in Shell	3.09	138.00

Intermediate Results: Saddle Reaction Q due to Wind or Seismic:

Transverse Saddle Reaction Force [Fwt]:

$$= \text{Ftr}(\text{Ft/Num of Saddles} + \text{Z Force Load}) \cdot B / E$$

$$= 3 (1390/2 + 0) \cdot 1950/2214$$

$$= 1836.6 \text{ Kg}$$

Longitudinal Saddle Reaction Force [Fwl]:

$$= \max(\text{Fl,wind}; \text{Sum of X Forces}) \cdot B / Ls$$

$$= \max(615, 0) \cdot 1950/3360$$

$$= 357.0 \text{ Kg}$$

Saddle Reaction Force due to Earthquake Fl [Fsl]:

$$= \max(\text{Fl,eq}; \text{Sum of X Forces}) \cdot B / Ls$$

$$= \max(7448, 0) \cdot 1950/3360$$

$$= 4322.5 \text{ Kg}$$

Saddle Reaction Force due to Earthquake Ft [Fst]:

$$= \text{Ftr}(\text{Ft/Num of Saddles} + \text{Z Force Load}) \cdot B / E$$

$$= 3 (7448/2 + 0) \cdot 1950/2214$$

$$= 9841.7 \text{ Kg}$$

Load Combination Results for Q + Wind or Seismic [Q]:

$$= \text{Saddle Load} + \max(\text{Fwl}, \text{Fwt}, \text{Fsl}, \text{Fst})$$

$$= 79287 + \max(357, 1837, 4322, 9842)$$

$$= 89128.8 \text{ Kg}$$

Longitudinal Wind Force [Fl]:

$$= \text{WindScalar} \cdot \text{WindPress}(\text{Platform Area} + (\pi/4 (\text{OD} \cdot \text{WindDiaMult})^2))$$

$$= 1.1 \cdot 766 (0 + \pi/4 (2.52 \cdot 1.2)^2)$$

$$= 6033.145 \text{ N}$$

Summary of Loads at the Base of this Saddle:

Vertical Load (including saddle weight)	90513.63	Kgf
Transverse Shear Load	3723.97	Kgf
Longitudinal Shear Load	7447.94	Kgf

Note: Wear Plate is Welded to the Shell, k = 0.1

Saddle Dimension [E]:

$$= \min(2(\text{ShellID}/2 + t + \text{WearPadThickness}) \sin(\theta/2), 2 \cdot Rm)$$

$$= \min(2(2480/2 + 18 + 20) \sin(120/2), 2 \cdot 1250)$$

$$= 2213.561 \text{ mm}$$

The Computed K values from Table 4.15.1:

K1 = 0.1066	K2 = 1.1707	K3 = 0.8799	K4 = 0.4011
K5 = 0.7603	K6 = 0.0529	K7 = 0.0446	K8 = 0.3405
K9 = 0.2711	K10 = 0.0581	K1* = 0.1923	K6p = 0.0434
K7p = 0.0366			

The suffix 'p' denotes the values for a wear plate if it exists.

Note: Dimension a is greater than or equal to Rm/2.

Moment per Equation 4.15.1 [M1]:

$$= -Q \cdot a [1 - (1 - a/L + (Rm^2 - hm^2)/(2a \cdot L)) / (1 + (4hm)/3L)]$$

$$= -89129 \cdot 1120 [1 - (1 - 1120/8009 + (1250^2 - 0^2)/(2 \cdot 1120 \cdot 8009)) / (1 + (4 \cdot 0)/(3 \cdot 8009))]$$

$$= -5258.8 \text{ Kg-m.}$$

Moment per Equation 4.15.2 [M2]:



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 178 of 275

Saddle Calcs: Ext. Pressure: Step: 27 6:05pm Sep 8, 2026

$$\begin{aligned}
 &= Q \cdot L / 4 \cdot ((1 + 2(Rm^2 - hm^2) / (L^2)) / (1 + (4hm^2) / (3L)) - 4a / L) \\
 &= 89129 \cdot 8009 / 4 \cdot ((1 + 2(1250^2 - 0^2) / (8009^2)) / (1 + (4 \cdot 0) / (3 \cdot 8009)) - 4 \cdot 1120 / 8009) \\
 &= 87332.5 \text{ Kg-m.}
 \end{aligned}$$

Longitudinal Stress at Top of Shell (4.15.4) [σ_1]:

$$\begin{aligned}
 &= P \cdot Rm / (2t) - M2 / (\pi \cdot Rm^2 \cdot t) \\
 &= -103 \cdot 1250 / (2 \cdot 15) - 87332 / (\pi \cdot 1250^2 \cdot 15) \\
 &= -15.93 \text{ N./mm}^2
 \end{aligned}$$

Longitudinal Stress at Bottom of Shell (4.15.5) [σ_2]:

$$\begin{aligned}
 &= P \cdot Rm / (2t) + M2 / (\pi \cdot Rm^2 \cdot t) \\
 &= -103 \cdot 1250 / (2 \cdot 15) + 87332 / (\pi \cdot 1250^2 \cdot 15) \\
 &= 7.31 \text{ N./mm}^2
 \end{aligned}$$

Longitudinal Stress at Top of Shell at Support (4.15.8) [σ_{*3}]:

$$\begin{aligned}
 &= P \cdot Rm / (2t) - M1 / (K1 \cdot \pi \cdot Rm^2 \cdot t) \\
 &= -103 \cdot 1250 / (2 \cdot 15) - 5259 / (0.11 \cdot \pi \cdot 1250^2 \cdot 15) \\
 &= 2.25 \text{ N./mm}^2
 \end{aligned}$$

Longitudinal Stress at Bottom of Shell at Support (4.15.9) [σ_{*4}]:

$$\begin{aligned}
 &= P \cdot Rm / (2t) + M1 / (K1 \cdot \pi \cdot Rm^2 \cdot t) \\
 &= -103 \cdot 1250 / (2 \cdot 15) + 5259 / (0.19 \cdot \pi \cdot 1250^2 \cdot 15) \\
 &= -7.95 \text{ N./mm}^2
 \end{aligned}$$

Maximum Shear Force in the Saddle (4.15.3) [T]:

$$\begin{aligned}
 &= Q(L - 2a) / (L + (4 \cdot hm / 3)) \\
 &= 89129 \cdot (8009 - 2 \cdot 1120) / (8009 + (4 \cdot 0 / 3)) \\
 &= 64200.1 \text{ Kg}
 \end{aligned}$$

Shear Stress in the shell no rings, not stiffened (4.15.12) [τ_2]:

$$\begin{aligned}
 &= K2 \cdot T / (Rm \cdot t) \\
 &= 1.17 \cdot 64200 / (1250 \cdot 15) \\
 &= 39.29 \text{ N./mm}^2
 \end{aligned}$$

Decay Length (4.15.20) [x_1, x_2]:

$$\begin{aligned}
 &= 0.78 \cdot \sqrt{(Rm \cdot t)} \\
 &= 0.78 \cdot \sqrt{(1250 \cdot 15)} \\
 &= 106.827 \text{ mm}
 \end{aligned}$$

Effective reinforcing plate width (4.15.24) [B1]:

$$\begin{aligned}
 &= \min(b + 1.56 \cdot \sqrt{(Rm \cdot t)}, 2a) \\
 &= \min(400 + 1.56 \cdot \sqrt{(1250 \cdot 15)}, 2 \cdot 1120) \\
 &= 613.65 \text{ mm}
 \end{aligned}$$

Wear Plate/Shell Stress ratio (4.15.26) [η]:

$$\begin{aligned}
 &= \min(Sr / S, 1) \\
 &= \min(138 / 138, 1) \\
 &= 1.0000
 \end{aligned}$$

Circumferential Stress at Saddle Base with Wear Plate (4.15.25) [σ_6, r]:

$$\begin{aligned}
 &= -K5 \cdot Q \cdot k / (B1(t + \eta \cdot tr)) \\
 &= -0.76 \cdot 89129 \cdot 0.1 / (614(15 + 1 \cdot 20)) \\
 &= -3.09 \text{ N./mm}^2
 \end{aligned}$$

Circ. Comp. Stress at Horn of Saddle, $L < 8Rm$ (4.15.29) [σ_7, r_{*}]:

$$\begin{aligned}
 &= -Q / (4(t + \eta \cdot tr)b1) - 12 \cdot K7 \cdot Q \cdot Rm / (L(t + \eta \cdot tr)^2) \\
 &= -89129 / (4(15 + 1 \cdot 20)614) - 12 \cdot 0.045 \cdot 89129 \cdot 1250 / (8009(15 + 1 \cdot 20)^2) \\
 &= -69.77 \text{ N./mm}^2
 \end{aligned}$$

Results for Vessel Ribs, Web and Base:

Baseplate Length	Bplen	2350.0000	mm
Baseplate Thickness	Bpthk	36.0000	mm
Baseplate Width	Bpwid	425.0000	mm



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 179 of 275

Saddle Calcs: Ext. Pressure:

Step: 27

6:05pm

Sep 8, 2026

Number of Ribs (inc. outside ribs)	Nribs	5	
Rib Thickness	Ribtk	20.0000	mm
Web Thickness	Webtk	20.0000	mm
Web Location	Webloc	Center	
Saddle Design Temperature		21.1	°C
Saddle Yield Stress	Sy	222.2	N./mm ²
Height of Web at Center	Hw,c	680.0	mm
Friction Coefficient	mu	0.300	

Moment of Inertia of Saddle - Transverse Direction (90 degrees to long axis)

Inertia of Shell [ShellInertia]:

$$= ((1.56 \cdot \sqrt{(R \cdot t)} + \text{WearPlateWidth})^3) / 12$$

$$= ((1.56 \cdot \sqrt{(1243 \cdot 15)} + 650)^3) / 12$$

$$= 24.272 \text{ cm}^4$$

Resolved Inertia for the Shell [I,shell]:

$$= \text{ShellInertia} + A_{\text{Shell}} (C1 - Y)^2$$

$$= 24.3 + 129 (286 - 7.5)^2$$

$$= 100696.133 \text{ cm}^4$$

	B mm	D mm	Y mm	A cm ²	AY mm ³	I + AD ⁽²⁾ cm ⁴
Shell	863.0	15.0	7.5	129.5	97088.9	0.101E+06
Wearplate	650.0	20.0	25.0	130.0	325000.0	0.889E+05
Web	20.0	636.0	353.0	127.2	4490159.0	0.485E+05
BasePlate	425.0	36.0	689.0	153.0	10541700.0	0.248E+06
Totals	...	...	...	539.7	15453948.0	0.486E+06

Distance to Centroid [C1]:

$$= AY / A$$

$$= 15453948 / 540$$

$$= 286.369 \text{ mm}$$

Angle [β]:

$$= 180 - \text{Saddle Angle} / 2$$

$$= 180 - 120 / 2$$

$$= 120.0$$

Saddle Splitting Coefficient [K1]:

$$= (1 + \cos(\beta) - 0.5 \cdot \sin(\beta)^2) / (\pi - \beta + \sin(\beta) \cos(\beta))$$

$$= (1 + \cos(120) - 0.5 \cdot \sin(120)^2) / (\pi - 2.09 + \sin(120) \cos(120))$$

$$= 0.2035$$

Saddle Splitting Force [Fh]:

$$= K1 \cdot Q$$

$$= 0.2 \cdot 89129$$

$$= 18139.6328 \text{ Kg}$$

$$\text{Tension Stress, } St = (Fh / As) = 4.3367 \text{ N./mm}^2$$

$$\text{Allowed Stress, } Sa = 0.6 \cdot \text{Yield Str} = 133.3187 \text{ N./mm}^2$$

Saddle Splitting Dimension [d]:

$$= B - R \cdot \sin(\text{theta} / 2) / (\text{theta} / 2 \text{ in radians})$$

$$= 1950 - 1243 \cdot \sin(120 / 2) / 1.05$$

$$= 922.047 \text{ mm}$$

$$\text{Bending Moment, } M = Fh \cdot d = 16725.9297 \text{ Kg-m.}$$

$$\text{Bending Stress, } Sb = (M \cdot C1 / I) = 9.6596 \text{ N./mm}^2$$

$$\text{Allowed Stress, } Sa = 2/3 \cdot \text{Yield Str} = 148.1319 \text{ N./mm}^2$$

Minimum Thickness of Baseplate per Moss:

$$= \sqrt{3(Q + \text{SaddleWt}) \cdot \text{BasePlateWidth} / (4 \cdot \text{BasePlateLength} \cdot \text{AllStress})}$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 180 of 275

Saddle Calcs: Ext. Pressure: Step: 27 6:05pm Sep 8,2026

$$= \sqrt{3(89129 + 1385)425 / (4 \cdot 2350 \cdot 148)}$$

$$= 28.509 \text{ mm}$$

Calculation of Axial Load, Intermediate Values and Compressive Stress:

Web Length Dimension [Web Length]:

$$= 2 \cdot \cos(90 - \text{Saddle Angle}/2) (\text{Inside Radius} + \text{Shell Thk} + \text{Wear Plate Thk})$$

$$= 2 \cdot \cos(90 - 120/2) (1240 + 18 + 20)$$

$$= 2213.561 \text{ mm}$$

Distance between Ribs [e]:

$$= \text{Web Length} / (\text{Nr ribs} - 1)$$

$$= 2214 / (5 - 1)$$

$$= 553.390 \text{ mm}$$

Baseplate Pressure Area [Ap]:

$$= e \cdot \text{Bpwid} / 2$$

$$= 553 \cdot 425 / 2$$

$$= 1175.954 \text{ cm}^2$$

Bearing Pressure [Bp]:

$$= (Q + \text{SaddleWt}) / (\text{BasePlateLength} \cdot \text{BasePlateWidth})$$

$$= 90514 / (2350 \cdot 425)$$

$$= 9.063 \text{ Kg/cm}^2$$

Axial Load [P]:

$$= \text{Ap} \cdot \text{Bp}$$

$$= 1176 \cdot 9.06$$

$$= 10657.310 \text{ Kgf}$$

Area of the Rib and Web [Ar]:

$$= \text{Rib Area} + \text{Web Area}$$

$$= 76 + 55.3$$

$$= 131.339 \text{ cm}^2$$

Compressive Stress [Sc]:

$$= P / \text{Ar}$$

$$= 10657 / 131$$

$$= 7.958 \text{ N/mm}^2$$

Check of Outside Ribs:

Inertia of Saddle, Outer Ribs - Longitudinal Direction

	B	D	Y	A	AY	Io
Rib+Web	20.0	400.0	...	80.0	...	0.107E+05

Rib dimension [D]:

$$= \text{Saddle Width} - \text{Web Thickness}$$

$$= 400 - 20$$

$$= 380.000 \text{ mm}$$

Distance to Centroid from Datum [ytot]:

$$= \text{AY} / \text{A}$$

$$= 0 / 131$$

$$= 0.000 \text{ mm}$$

Distance to Centroid [C1]:

$$= \text{Saddle Width} / 2$$

$$= 400 / 2$$

$$= 200.000 \text{ mm}$$

Radius of Gyration [r]:

$$= \sqrt{(\text{Total Inertia} / \text{Total Area})}$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 181 of 275

Saddle Calcs: Ext. Pressure:

Step: 27

6:05pm

Sep 8, 2026

$$= \sqrt{10667/131}$$

$$= 90.119 \text{ mm}$$

Length of Outer Rib [L]:

$$= \text{Saddle Height} - \cos(\theta/2) (\text{radius} + \text{shlthk} + \text{wpdthk}) - \text{bpthk}$$

$$= 1950 - \cos(120/2) (1240 + 18 + 20) - 36$$

$$= 1275.000 \text{ mm}$$

Intermediate Term [Cc]:

$$= \sqrt{2 \cdot \pi^2 \cdot \text{Elastic Modulus} / \text{Yield Stress}}$$

$$= \sqrt{2 \cdot \pi^2 \cdot 199943008 / 222}$$

$$= 133.279$$

Slenderness ratio [KL/r]:

$$= KL/r$$

$$= 1 \cdot 1275/90.1$$

$$= 14.148$$

Bending Moment [Rm]:

$$= FI / (2 \cdot B_{plen}) \cdot e \cdot L / 2$$

$$= 7448 / (2 \cdot 2350) \cdot 553 \cdot 1275/2$$

$$= 559.060 \text{ Kg-m.}$$

Compressive Allowable, $KL/r < Cc$ ($14.1 < 133$) per AISC E2-1 [Sca]:

$$= (1 - (KL/r)^2 / (2 \cdot Cc^2)) F_y / (5/3 + 3 \cdot (KL/r) / (8 \cdot Cc) - (KL/r)^3 / (8 \cdot Cc^3))$$

$$= (1 - (14.1)^2 / (2 \cdot 133^2)) 222 /$$

$$(5/3 + 3 \cdot (14.1) / (8 \cdot 133) - (14.1^3) / (8 \cdot 133^3))$$

$$= 129.5 \text{ N./mm}^2$$

AISC Unity Check of Outside Ribs (must be ≤ 1)

$$= S_c / S_{ca} + (R_m \cdot C_1 / I) / S_{ba}$$

$$= 7.96/129 + (559 \cdot 200/106666664) / 148$$

$$= 0.131$$

Check of Inside Ribs:

Inertia of Saddle, Inner Ribs - Axial Direction

	B	D	Y	A	AY	Io
Rib	20.0	380.0	0.0	76.0	0.0	0.107E+05
Web	553.4	20.0	0.0	110.7	0.0	36.9
Totals	...	...	...	186.7	...	0.107E+05

Distance to Centroid from Datum [ytot]:

$$= AY / A$$

$$= 0/187$$

$$= 0.000 \text{ mm}$$

Distance to Centroid [C1]:

$$= \text{Saddle Width} / 2$$

$$= 400/2$$

$$= 200.000 \text{ mm}$$

Length of Inner Rib [L]:

$$= \text{Saddle Height} - \text{Outside Radius} - \text{Bpthk}$$

$$= 1950 - \cos(1278/2) (36 + 0 + 0) - 0$$

$$= 636.000 \text{ mm}$$

Radius of Gyration [r]:

$$= \sqrt{\text{Total Inertia} / \text{Total Area}}$$

$$= \sqrt{10702/187}$$

$$= 75.716 \text{ mm}$$

Slenderness ratio [KL/r]:

$$= KL/r$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 182 of 275

Saddle Calcs: Ext. Pressure:

Step: 27

6:05pm

Sep 8, 2026

$$= 1 \cdot 636/75.7$$

$$= 8.400$$

Unit Force [Force,u]:

$$= F / (2 \cdot \text{Baseplate Length})$$

$$= 7448 / (2 \cdot 2350)$$

$$= 1.585 \text{ Kg/mm}$$

Moment at base of inner Rib [Mbase,c]:

$$= \text{Unit Force} \cdot e \cdot L$$

$$= 1.58 \cdot 553 \cdot 636$$

$$= 557.745 \text{ Kg-m.}$$

Bending Stress due to Transverse Force and Weight Load [σ_B ,base,c]:

$$= \text{Bending Moment} / \text{Section Modulus}$$

$$= 558/535111$$

$$= 10.221 \text{ N./mm}^2$$

Compressive Allowable, $KL/r < C_c$ ($8.4 < 133$) per AISC E2-1 [Sca]:

$$= (1 - (KL/r)^2 / (2 \cdot C_c^2)) F_y / (5/3 + 3 \cdot (KL/r) / (8 \cdot C_c) - (KL/r)^3 / (8 \cdot C_c^3))$$

$$= (1 - (8.4)^2 / (2 \cdot 133^2)) 222 / (5/3 + 3 \cdot (8.4) / (8 \cdot 133) - (8.4^3) / (8 \cdot 133^3))$$

$$= 131.2 \text{ N./mm}^2$$

AISC Unity Check of Inside Ribs (must be ≤ 1)

$$= S_c / S_{ca} + (M_{base,c} \cdot C_{1/I}) / S_{ba}$$

$$= 11.2/131 + (558 \cdot 200/10702) / 148$$

$$= 0.154$$

ASME VIII Division 2 Horizontal Vessel Analysis, Right Saddle:

Input and Calculated Values:

Vessel Mean Radius	Rm	1250.50	mm
Shell Thickness used in this Case	t	18.000	mm
Stiffened Vessel Length per 4.15.6	L	8008.80	mm
Distance from Saddle to Vessel tangent	a1 or a	1120.00	mm
Saddle Width	b1 or b	400.00	mm
Saddle Bearing Angle	delta or theta	120.00	degrees
Wear Plate Width	b2 or b1	650.00	mm
Wear Plate Bearing Angle	delta2 or theta1	132.00	degrees
Wear Plate Thickness	e2 or tr	20.0	mm
Wear Plate Allowable Stress	fw or Sr	138.00	N./mm ²
Shell Allowable Stress used in Calculation		138.00	N./mm ²
Head Allowable Stress used in Calculation		138.00	N./mm ²
Circumferential Efficiency in Plane of Saddle		1.00	
Circumferential Efficiency at Mid-Span		1.00	
Distance from Saddle Base to Centerline	B	1950.00	mm
Coefficient of Friction	mu	0.00	

Results for Horizontal Vessel Analysis:

Saddle Force Q, External Pressure Case		61192.52	Kgf
Pressure used in Analysis	P	-103.419	KPa.

Horizontal Vessel Analysis Results:		Actual	Allowable
		N./mm ²	N./mm ²
Long. Stress at Top	of Midspan	-12.29	-176.60
Long. Stress at Top	of Midspan	12.29	138.00
Long. Stress at Bottom	of Midspan	3.67	138.00



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 183 of 275

Saddle Calcs: Ext. Pressure: Step: 27 6:05pm Sep 8, 2026

Long. Stress at Top of Saddles	0.20	138.00
Long. Stress at Bottom of Saddles	-6.81	-176.60
Long. Stress at Bottom of Saddles	6.81	138.00
Tangential Shear in Shell	26.98	110.40
Circ. Stress at Horn of Saddle	47.90	172.50
Circ. Compressive Stress in Shell	2.12	138.00

Intermediate Results: Saddle Reaction Q due to Wind or Seismic:

Transverse Saddle Reaction Force [Fwt]:

$$= \text{Ftr}(\text{Ft/Num of Saddles} + \text{Z Force Load}) \cdot B / E$$

$$= 3 (1390/2 + 0) \cdot 1950/2214$$

$$= 1836.6 \text{ Kgf}$$

Longitudinal Saddle Reaction Force [Fwl]:

$$= \max(\text{Fl,wind}; \text{Sum of X Forces}) \cdot B / \text{Ls}$$

$$= \max(615, 0) \cdot 1950/3360$$

$$= 357.0 \text{ Kgf}$$

Saddle Reaction Force due to Earthquake Fl [Fsl]:

$$= \max(\text{Fl,eq}; \text{Sum of X Forces}) \cdot B / \text{Ls}$$

$$= \max(7448, 0) \cdot 1950/3360$$

$$= 4322.5 \text{ Kgf}$$

Saddle Reaction Force due to Earthquake Ft [Fst]:

$$= \text{Ftr}(\text{Ft/Num of Saddles} + \text{Z Force Load}) \cdot B / E$$

$$= 3 (7448/2 + 0) \cdot 1950/2214$$

$$= 9841.7 \text{ Kgf}$$

Load Combination Results for Q + Wind or Seismic [Q]:

$$= \text{Saddle Load} + \max(\text{Fwl}, \text{Fwt}, \text{Fsl}, \text{Fst})$$

$$= 51351 + \max(357, 1837, 4322, 9842)$$

$$= 61192.5 \text{ Kgf}$$

Longitudinal Wind Force [Fl]:

$$= \text{WindScalar} \cdot \text{WindPress}(\text{Platform Area} + (\pi/4 (\text{OD} \cdot \text{WindDiaMult})^2))$$

$$= 1.1 \cdot 766 (0 + \pi/4 (2.52 \cdot 1.2)^2)$$

$$= 6033.145 \text{ N}$$

Summary of Loads at the Base of this Saddle:

Vertical Load (including saddle weight) 62577.40 Kgf

Transverse Shear Load 3723.97 Kgf

Longitudinal Shear Load 7447.94 Kgf

Note: Wear Plate is Welded to the Shell, k = 0.1

Saddle Dimension [E]:

$$= \min(2(\text{ShellID}/2 + t + \text{WearPadThickness}) \sin(\theta/2), 2 \cdot \text{Rm})$$

$$= \min(2(2480/2 + 18 + 20) \sin(120/2), 2 \cdot 1250)$$

$$= 2213.561 \text{ mm}$$

The Computed K values from Table 4.15.1:

K1 = 0.1066 K2 = 1.1707 K3 = 0.8799 K4 = 0.4011

K5 = 0.7603 K6 = 0.0529 K7 = 0.0446 K8 = 0.3405

K9 = 0.2711 K10 = 0.0581 K1* = 0.1923 K6p = 0.0434

K7p = 0.0366

The suffix 'p' denotes the values for a wear plate if it exists.

Note: Dimension a is greater than or equal to Rm/2.

Moment per Equation 4.15.1 [M1]:

$$= -Q \cdot a [1 - (1 - a/L + (Rm^2 - hm^2)/(2a \cdot L)) / (1 + (4hm)/3L)]$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 184 of 275

Saddle Calcs: Ext. Pressure: Step: 27 6:05pm Sep 8, 2026

$$= -61193 \cdot 1120 [1 - (1 - 1120/8009 + (1250^2 - 0^2) / (2 \cdot 1120 \cdot 8009)) / (1 + (4 \cdot 0) / (3 \cdot 8009))] \\ = -3610.5 \text{ Kg-m.}$$

Moment per Equation 4.15.2 [M2]:

$$= Q \cdot L / 4 \cdot ((1 + 2(Rm^2 - hm^2) / (L^2)) / (1 + (4hm^2) / (3L)) - 4a/L) \\ = 61193 \cdot 8009 / 4 \cdot ((1 + 2(1250^2 - 0^2) / (8009^2)) / (1 + (4 \cdot 0) / (3 \cdot 8009)) - 4 \cdot 1120 / 8009) \\ = 59959.3 \text{ Kg-m.}$$

Longitudinal Stress at Top of Shell (4.15.4) [σ_1]:

$$= P \cdot Rm / (2t) - M2 / (\pi \cdot Rm^2 t) \\ = -103 \cdot 1250 / (2 \cdot 15) - 59959 / (\pi \cdot 1250^2 \cdot 15) \\ = -12.29 \text{ N./mm}^2$$

Longitudinal Stress at Bottom of Shell (4.15.5) [σ_2]:

$$= P \cdot Rm / (2t) + M2 / (\pi \cdot Rm^2 \cdot t) \\ = -103 \cdot 1250 / (2 \cdot 15) + 59959 / (\pi \cdot 1250^2 \cdot 15) \\ = 3.67 \text{ N./mm}^2$$

Longitudinal Stress at Top of Shell at Support (4.15.8) [σ^*3]:

$$= P \cdot Rm / (2t) - M1 / (K1 \cdot \pi \cdot Rm^2 t) \\ = -103 \cdot 1250 / (2 \cdot 15) - 3610 / (0.11 \cdot \pi \cdot 1250^2 \cdot 15) \\ = 0.20 \text{ N./mm}^2$$

Longitudinal Stress at Bottom of Shell at Support (4.15.9) [σ^*4]:

$$= P \cdot Rm / (2t) + M1 / (K1 \cdot \pi \cdot Rm^2 \cdot t) \\ = -103 \cdot 1250 / (2 \cdot 15) + 3610 / (0.19 \cdot \pi \cdot 1250^2 \cdot 15) \\ = -6.81 \text{ N./mm}^2$$

Maximum Shear Force in the Saddle (4.15.3) [T]:

$$= Q(L - 2a) / (L + (4 \cdot hm / 3)) \\ = 61193 (8009 - 2 \cdot 1120) / (8009 + (4 \cdot 0 / 3)) \\ = 44077.4 \text{ Kg}$$

Shear Stress in the shell no rings, not stiffened (4.15.12) [τ_2]:

$$= K2 \cdot T / (Rm \cdot t) \\ = 1.17 \cdot 44077 / (1250 \cdot 15) \\ = 26.98 \text{ N./mm}^2$$

Decay Length (4.15.20) [x1,x2]:

$$= 0.78 \cdot \sqrt{(Rm \cdot t)} \\ = 0.78 \cdot \sqrt{(1250 \cdot 15)} \\ = 106.827 \text{ mm}$$

Effective reinforcing plate width (4.15.24) [B1]:

$$= \min(b + 1.56 \cdot \sqrt{(Rm \cdot t)}, 2a) \\ = \min(400 + 1.56 \cdot \sqrt{(1250 \cdot 15)}, 2 \cdot 1120) \\ = 613.65 \text{ mm}$$

Wear Plate/Shell Stress ratio (4.15.26) [eta]:

$$= \min(Sr/S, 1) \\ = \min(138/138, 1) \\ = 1.0000$$

Circumferential Stress at Saddle Base with Wear Plate (4.15.25) [σ_6, r]:

$$= -K5 \cdot Q \cdot k / (B1(t + \eta \cdot tr)) \\ = -0.76 \cdot 61193 \cdot 0.1 / (614(15 + 1 \cdot 20)) \\ = -2.12 \text{ N./mm}^2$$

Circ. Comp. Stress at Horn of Saddle, L<8Rm (4.15.29) [σ_7, r^*]:

$$= -Q / (4(t + \eta \cdot tr)b1) - 12 \cdot K7 \cdot Q \cdot Rm / (L(t + \eta \cdot tr)^2) \\ = -61193 / (4(15 + 1 \cdot 20)614) - 12 \cdot 0.045 \cdot 61193 \cdot 1250 / (8009(15 + 1 \cdot 20)^2) \\ = -47.90 \text{ N./mm}^2$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 185 of 275

Saddle Calcs: Ext. Pressure:

Step: 27

6:05pm

Sep 8, 2026

Results for Vessel Ribs, Web and Base:

Baseplate Length	Bplen	2350.0000	mm
Baseplate Thickness	Bpthk	36.0000	mm
Baseplate Width	Bpwid	425.0000	mm
Number of Ribs (inc. outside ribs)	Nribs	5	
Rib Thickness	Ribtk	20.0000	mm
Web Thickness	Webtk	20.0000	mm
Web Location	Webloc	Center	
Saddle Design Temperature		21.1	°C
Saddle Yield Stress	Sy	222.2	N./mm ²
Height of Web at Center	Hw,c	680.0	mm
Friction Coefficient	mu	0.000	

Moment of Inertia of Saddle - Transverse Direction (90 degrees to long axis)

Inertia of Shell [ShellInertia]:

$$= ((1.56 \cdot \sqrt{(R \cdot t)} + \text{WearPlateWidth})^3) / 12$$

$$= ((1.56 \cdot \sqrt{(1243 \cdot 15)} + 650)^3) / 12$$

$$= 24.272 \text{ cm}^4$$

Resolved Inertia for the Shell [I,shell]:

$$= \text{ShellInertia} + A_{\text{Shell}} (C1 - Y)^2$$

$$= 24.3 + 129 (286 - 7.5)^2$$

$$= 100696.133 \text{ cm}^4$$

	B mm	D mm	Y mm	A cm ²	AY mm ³	I + AD ⁽²⁾ cm ⁴
Shell	863.0	15.0	7.5	129.5	97088.9	0.101E+06
Wearplate	650.0	20.0	25.0	130.0	325000.0	0.889E+05
Web	20.0	636.0	353.0	127.2	4490159.0	0.485E+05
BasePlate	425.0	36.0	689.0	153.0	10541700.0	0.248E+06
Totals	...	...	...	539.7	15453948.0	0.486E+06

Distance to Centroid [C1]:

$$= AY / A$$

$$= 15453948 / 540$$

$$= 286.369 \text{ mm}$$

Angle [β]:

$$= 180 - \text{Saddle Angle} / 2$$

$$= 180 - 120 / 2$$

$$= 120.0$$

Saddle Splitting Coefficient [K1]:

$$= (1 + \cos(\beta) - 0.5 \cdot \sin(\beta)^2) / (\pi - \beta + \sin(\beta) \cos(\beta))$$

$$= (1 + \cos(120) - 0.5 \cdot \sin(120)^2) / (\pi - 2.09 + \sin(120) \cos(120))$$

$$= 0.2035$$

Saddle Splitting Force [Fh]:

$$= K1 \cdot Q$$

$$= 0.2 \cdot 61193$$

$$= 12454.0039 \text{ Kg}$$

$$\text{Tension Stress, } St = (Fh / As) = 2.9774 \text{ N./mm}^2$$

$$\text{Allowed Stress, } Sa = 0.6 \cdot \text{Yield Str} = 133.3187 \text{ N./mm}^2$$

Saddle Splitting Dimension [d]:

$$= B - R \cdot \sin(\text{theta} / 2) / (\text{theta} / 2 \text{ in radians})$$

$$= 1950 - 1243 \cdot \sin(120 / 2) / 1.05$$

$$= 922.047 \text{ mm}$$

$$\text{Bending Moment, } M = Fh \cdot d = 11483.4062 \text{ Kg-m.}$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 186 of 275

Saddle Calcs: Ext. Pressure:

Step: 27

6:05pm

Sep 8, 2026

Bending Stress, $S_b = (M \cdot C_1 / I) = 6.6320 \text{ N./mm}^2$

Allowed Stress, $S_a = 2/3 \cdot \text{Yield Str} = 148.1319 \text{ N./mm}^2$

Minimum Thickness of Baseplate per Moss:

$= \sqrt{(3(Q + \text{SaddleWt}) \cdot \text{BasePlateWidth}) / (4 \cdot \text{BasePlateLength} \cdot \text{AllStress}))}$

$= \sqrt{(3(61193 + 1385) \cdot 425) / (4 \cdot 2350 \cdot 148)}$

= 23.705 mm

Calculation of Axial Load, Intermediate Values and Compressive Stress:

Web Length Dimension [Web Length]:

$= 2 \cdot \cos(90 - \text{Saddle Angle}/2) (\text{Inside Radius} + \text{Shell Thk} + \text{Wear Plate Thk})$

$= 2 \cdot \cos(90 - 120/2) (1240 + 18 + 20)$

= 2213.561 mm

Distance between Ribs [e]:

$= \text{Web Length} / (\text{Nr ribs} - 1)$

$= 2214 / (5 - 1)$

= 553.390 mm

Baseplate Pressure Area [Ap]:

$= e \cdot \text{Bpwid} / 2$

$= 553 \cdot 425 / 2$

= 1175.954 cm²

Bearing Pressure [Bp]:

$= (Q + \text{SaddleWt}) / (\text{BasePlateLength} \cdot \text{BasePlateWidth})$

$= 62577 / (2350 \cdot 425)$

= 6.266 Kg/cm²

Axial Load [P]:

$= A_p \cdot B_p$

$= 1176 \cdot 6.27$

= 7368.026 Kg

Area of the Rib and Web [Ar]:

$= \text{Rib Area} + \text{Web Area}$

$= 76 + 55.3$

= 131.339 cm²

Compressive Stress [Sc]:

$= P / A_r$

$= 7368 / 131$

= 5.502 N./mm²

Check of Outside Ribs:

Inertia of Saddle, Outer Ribs - Longitudinal Direction

	B	D	Y	A	AY	Io
Rib+Web	20.0	400.0	...	80.0	...	0.107E+05

Rib dimension [D]:

$= \text{Saddle Width} - \text{Web Thickness}$

$= 400 - 20$

= 380.000 mm

Distance to Centroid from Datum [ytot]:

$= AY / A$

$= 0 / 131$

= 0.000 mm

Distance to Centroid [C1]:



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 187 of 275

Saddle Calcs: Ext. Pressure:

Step: 27

6:05pm

Sep 8, 2026

= Saddle Width / 2

= 400/2

= 200.000 mm

Radius of Gyration [r]:

= $\sqrt{\text{Total Inertia} / \text{Total Area}}$

= $\sqrt{10667/131}$

= 90.119 mm

Length of Outer Rib [L]:

= Saddle Height - $\cos(\theta/2)$ (radius + shlthk + wpdthk) - bpthk

= 1950 - $\cos(120/2)$ (1240 + 18 + 20) - 36

= 1275.000 mm

Intermediate Term [Cc]:

= $\sqrt{2 \cdot \pi^2 \cdot \text{Elastic Modulus} / \text{Yield Stress}}$

= $\sqrt{2 \cdot \pi^2 \cdot 199943392/222}$

= 133.279

Slenderness ratio [KL/r]:

= KL/r

= 1 • 1275/90.1

= 14.148

Bending Moment [Rm]:

= $Fl / (2 \cdot B_{plen}) \cdot e \cdot L / 2$

= 7448 / (2 • 2350) • 553 • 1275/2

= 559.060 Kg-m.

Compressive Allowable, $KL/r < Cc$ (14.1 < 133) per AISC E2-1 [Sca]:

= $(1 - (KL/r)^2 / (2 \cdot Cc^2)) F_y / (5/3 + 3 \cdot (KL/r) / (8 \cdot Cc) - (KL/r)^3 / (8 \cdot Cc^3))$

= $(1 - (14.1)^2 / (2 \cdot 133^2)) 222 /$

$(5/3 + 3 \cdot (14.1) / (8 \cdot 133) - (14.1^3) / (8 \cdot 133^3))$

= 129.5 N./mm²

AISC Unity Check of Outside Ribs (must be ≤ 1)

= $Sc/Sca + (Rm \cdot C1 / I) / Sba$

= 5.5/129 + (559 • 200/106666664)/148

= 0.112

Check of Inside Ribs:

Inertia of Saddle, Inner Ribs - Axial Direction

	B	D	Y	A	AY	Io
Rib	20.0	380.0	0.0	76.0	0.0	0.107E+05
Web	553.4	20.0	0.0	110.7	0.0	36.9
Totals	...	...	...	186.7	...	0.107E+05

Distance to Centroid from Datum [ytot]:

= AY / A

= 0/187

= 0.000 mm

Distance to Centroid [C1]:

= Saddle Width / 2

= 400/2

= 200.000 mm

Length of Inner Rib [L]:

= Saddle Height - Outside Radius - Bpthk

= 1950 - $\cos(1278/2)$ (36 + 0 + 0) - 0

= 636.000 mm

Radius of Gyration [r]:



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 188 of 275

Saddle Calcs: Ext. Pressure:

Step: 27

6:05pm

Sep 8, 2026

$$\begin{aligned}
 &= \sqrt{\text{Total Inertia} / \text{Total Area}} \\
 &= \sqrt{10702/187} \\
 &= 75.716 \text{ mm}
 \end{aligned}$$

Slenderness ratio [KL/r]:

$$\begin{aligned}
 &= KL/r \\
 &= 1 \cdot 636/75.7 \\
 &= 8.400
 \end{aligned}$$

Unit Force [Force,u]:

$$\begin{aligned}
 &= FI / (2 \cdot \text{Baseplate Length}) \\
 &= 7448 / (2 \cdot 2350) \\
 &= 1.585 \text{ Kg/mm}
 \end{aligned}$$

Moment at base of inner Rib [Mbase,c]:

$$\begin{aligned}
 &= \text{Unit Force} \cdot e \cdot L \\
 &= 1.58 \cdot 553 \cdot 636 \\
 &= 557.745 \text{ Kg-m.}
 \end{aligned}$$

Bending Stress due to Transverse Force and Weight Load [σ_B ,base,c]:

$$\begin{aligned}
 &= \text{Bending Moment} / \text{Section Modulus} \\
 &= 558/535111 \\
 &= 10.221 \text{ N./mm}^2
 \end{aligned}$$

Compressive Allowable, $KL/r < C_c$ ($8.4 < 133$) per AISC E2-1 [Sca]:

$$\begin{aligned}
 &= (1 - (KL/r)^2 / (2 \cdot C_c^2)) F_y / (5/3 + 3 \cdot (KL/r) / (8 \cdot C_c) - (KL/r)^3 / (8 \cdot C_c^3)) \\
 &= (1 - (8.4)^2 / (2 \cdot 133^2)) 222 / \\
 &\quad (5/3 + 3 \cdot (8.4) / (8 \cdot 133) - (8.4^3) / (8 \cdot 133^3)) \\
 &= 131.2 \text{ N./mm}^2
 \end{aligned}$$

AISC Unity Check of Inside Ribs (must be ≤ 1)

$$\begin{aligned}
 &= S_c/S_{ca} + (M_{base,c} \cdot C1/I) / S_{ba} \\
 &= 7.74/131 + (558 \cdot 200/10702) / 148 \\
 &= 0.128
 \end{aligned}$$

Review notes about nozzle loadings and supports in the Warnings report.

PV Elite is a trademark of Hexagon AB, 2026, All rights reserved.



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 189 of 275

Nozzle Calcs.: N3-Tube Inlet

Nozl: 13

6:05pm

Sep 8, 2026

Input, Nozzle Desc: N3-Tube Inlet

From: 30

Pressure for Reinforcement Calculations	P	1056.657	KPa.
Temperature for Internal Pressure	Temp	82	°C
Design External Pressure	Pext	103.42	KPa.
Temperature for External Pressure	Tempex	82	°C
Parent Material		SA-516 70	
Parent Allowable Stress at Temperature	Sv	138.00	N./mm ²
Parent Allowable Stress At Ambient	Sva	138.00	N./mm ²
Inside Diameter of Cylindrical Shell	D	2480.00	mm
Design Length of Section	L	1500.0000	mm
Shell Finished (Minimum) Thickness	t	20.0000	mm
Shell Internal Corrosion Allowance	c	3.0000	mm
Shell External Corrosion Allowance	co	0.0000	mm
Distance from Bottom/Left Tangent		1176.17	mm
User Entered Minimum Design Metal Temperature		-12.00	°C

Type of Element Connected to the Parent : Nozzle

Material		SA-516 70	
Material UNS Number		K02700	
Material Specification/Type		Plate	
Allowable Stress at Temperature	Sn	138.00	N./mm ²
Allowable Stress At Ambient	Sna	138.00	N./mm ²
Diameter Basis (for tr calc only)		Outside	
Layout Angle		0.00	deg
Diameter		24.0157	in.
Size and Thickness Basis		Actual	
Actual Thickness	tn	17.4498	mm
Flange Material		SA-105	
Flange Type		Weld Neck Flange	
Corrosion Allowance	can	3.0000	mm
Joint Efficiency of Shell Seam at Nozzle	E1	1.00	
Joint Efficiency of Nozzle Neck	En	1.00	
Outside Projection	ho	400.0000	mm
Weld leg size between Nozzle and Pad/Shell	Wo	16.0000	mm
Groove weld depth between Nozzle and Vessel	Wgnv	16.0000	mm
Inside Projection	h	0.0000	mm
Weld leg size, Inside Element to Shell	Wi	0.0000	mm
Pad Material		SA-516 70	
Pad Allowable Stress at Temperature	Sp	138.00	N./mm ²
Pad Allowable Stress At Ambient	Spa	138.00	N./mm ²
Diameter of Pad along vessel surface	Dp	1030.0000	mm
Thickness of Pad	te	24.0000	mm
Weld leg size between Pad and Shell	Wp	16.0000	mm
Groove weld depth between Pad and Nozzle	Wgpn	16.0000	mm
Reinforcing Pad Width		210.0006	mm
ASME Code Weld Type per UW-16		e	
Flange Class		150	
Flange Grade		GR 1.1	

The Pressure Design option was MAWP + static head (to the nozzle).



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)


Page 190 of 275

Nozzle Calcs.: N3-Tube Inlet

Nozl: 13

6:05pm

Sep 8, 2026

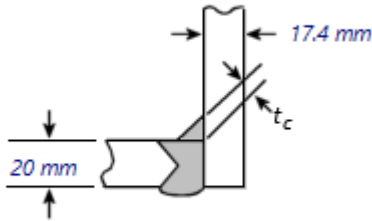

UW-16 (e)

Reinforcement CALCULATION, Description: N3-Tube Inlet

ASME Code, Section VIII, Div. 1, UG-37 to UG-45

Actual Outside Diameter Used in Calculation	24.016 in.
Actual Thickness Used in Calculation	0.687 in.

Nozzle input data check completed without errors.

Reqd thk per UG-37(a) of Cylindrical Shell, tr [Int. Press]
 $= P \cdot R / (S_v \cdot E - 0.6 \cdot P)$ per UG-27 (c)(1)
 $= 1057 \cdot 1243 / (138 \cdot 1 - 0.6 \cdot 1057)$
 $= 9.5622 \text{ mm}$

Reqd thk per UG-37(a) of Nozzle Wall, trn [Int. Press]
 $= P \cdot R_o / (S_n \cdot E + 0.4 \cdot P)$ per Appendix 1-1 (a)(1)
 $= 1057 \cdot 305 / (138 \cdot 1 + 0.4 \cdot 1057)$
 $= 2.3284 \text{ mm}$

Required Nozzle thickness under External Pressure per UG-28 : 1.6380 mm

UG-40, Limits of Reinforcement: [Internal Pressure]

Parallel to Vessel Wall (Diameter Limit)	D1	1162.1984 mm
Parallel to Vessel Wall, opening length	d	581.0992 mm
Normal to Vessel Wall (Thickness Limit), pad side Tlwp		42.5000 mm

Weld Strength Reduction Factor [fr1]:
 $= \min(1, S_n / S_v)$
 $= \min(1, 138 / 138)$
 $= 1.000$

Weld Strength Reduction Factor [fr2]:
 $= \min(1, S_n / S_v)$
 $= \min(1, 138 / 138)$
 $= 1.000$

Weld Strength Reduction Factor [fr4]:
 $= \min(1, S_p / S_v)$
 $= \min(1, 138 / 138)$
 $= 1.000$

Weld Strength Reduction Factor [fr3]:
 $= \min(fr2, fr4)$
 $= \min(1, 1)$
 $= 1.000$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 191 of 275

Nozzle Calcs.: N3-Tube Inlet

Nozl: 13

6:05pm

Sep 8, 2026

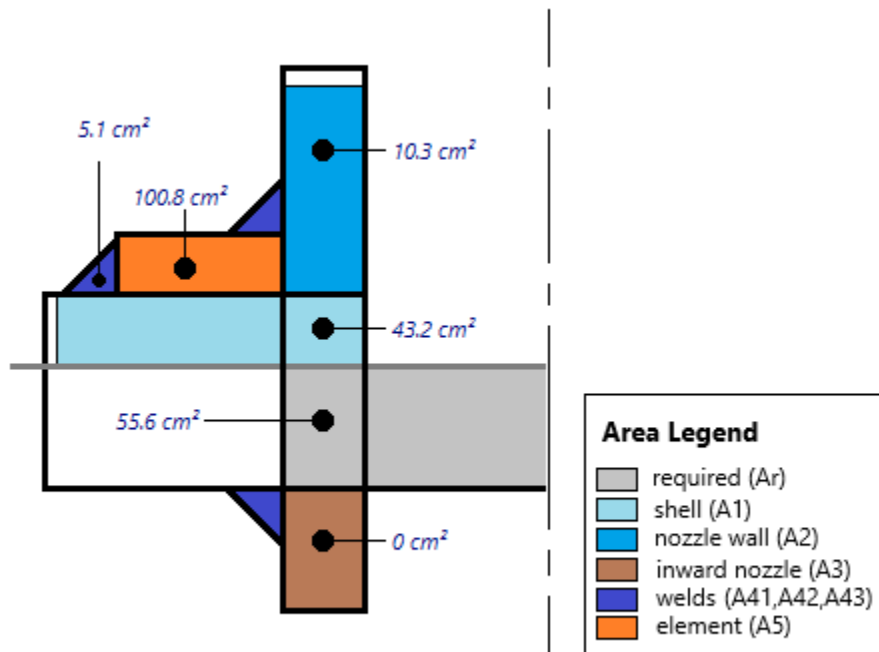


Figure UG 37.1 Nozzle Areas

Results of Nozzle Reinforcement Area Calculations: (cm²)

AREA AVAILABLE, A1 to A5		MAWP	External	Mapnc
Area Required	Ar	55.566	18.934	NA
Area in Shell	A1	43.221	60.919	NA
Area in Nozzle Wall	A2	10.303	10.890	NA
Area in Inward Nozzle	A3	0.000	0.000	NA
Area in Welds	A41+A42+A43	5.120	5.120	NA
Area in Element	A5	100.800	100.800	NA
TOTAL AREA AVAILABLE	Atot	159.444	177.729	NA

The MAWP Case Governs the Analysis.

Nozzle Angle Used in Area Calculations

90.00 degs.

The area available without a pad is Insufficient.

The area available with the given pad is Sufficient.

SELECTION OF POSSIBLE REINFORCING PADS: Diameter Thickness
Based on given Pad Thickness: 609.9988 24.0000 mm
Based on given Pad Diameter: 1030.0000 0.0000 mm
Based on Shell or Nozzle Thickness: 609.9988 17.4498 mm

Area Required [A]:

$$= (d \cdot tr \cdot F + 2 \cdot tn \cdot tr \cdot F \cdot (1 - fr1)) \text{ UG-37(c)}$$

$$= (581 \cdot 9.56 \cdot 1 + 2 \cdot 14.4 \cdot 9.56 \cdot 1 \cdot (1 - 1))$$

$$= 55.566 \text{ cm}^2$$

Reinforcement Areas per Figure UG-37.1

Area Available in Shell [A1]:

$$= d(E1 \cdot t - F \cdot tr) - 2 \cdot tn(E1 \cdot t - F \cdot tr) \cdot (1 - fr1)$$

$$= 581(1 \cdot 17 - 1 \cdot 9.56) - 2 \cdot 14.4$$

$$(1 \cdot 17 - 1 \cdot 9.56) \cdot (1 - 1)$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 192 of 275

Nozzle Calcs.: N3-Tube Inlet

Nozl: 13 6:05pm

Sep 8, 2026

$$= 43.221 \text{ cm}^2$$

Area Available in Nozzle Wall Projecting Outward [A2]:

$$= (2 \cdot T_{lwp}) \cdot (t_n - t_{rn}) \cdot f_{r2}$$

$$= (2 \cdot 42.5) \cdot (14.4 - 2.33) \cdot 1$$

$$= 10.303 \text{ cm}^2$$

Area Available in Welds [A41 + A42 + A43]:

$$= W_o^2 \cdot f_{r3} + (W_i - c_{an}/0.707)^2 \cdot f_{r2} + W_p^2 \cdot f_{r4}$$

$$= 16^2 \cdot 1 + (0)^2 \cdot 1 + 16^2 \cdot 1$$

$$= 5.120 \text{ cm}^2$$

Area Available in Element [A5]:

$$= (\min(D_p, D_L) - (\text{Nozzle OD})) \cdot (\min(t_p, T_{lwp}, t_e)) \cdot f_{r4}$$

$$= (1030 - 610) \cdot 24 \cdot 1$$

$$= 100.800 \text{ cm}^2$$

UG-45 Minimum Nozzle Neck Thickness Requirement: [Int. Press.]

Wall Thickness for Internal/External pressures $t_a = 5.3284 \text{ mm}$

Wall Thickness per UG16(b), $t_{r16b} = 5.5000 \text{ mm}$

Wall Thickness, shell/head, internal pressure $t_{rb1} = 12.5622 \text{ mm}$

Wall Thickness $t_{b1} = \max(t_{rb1}, t_{r16b}) = 12.5622 \text{ mm}$

Wall Thickness, shell/head, external pressure $t_{rb2} = 3.9320 \text{ mm}$

Wall Thickness $t_{b2} = \max(t_{rb2}, t_{r16b}) = 5.5000 \text{ mm}$

Wall Thickness per table UG-45 $t_{b3} = 11.3312 \text{ mm}$

Determine Nozzle Thickness candidate [tb]:

$$= \min[t_{b3}, \max(t_{b1}, t_{b2})]$$

$$= \min[11.3, \max(12.6, 5.5)]$$

$$= 11.3312 \text{ mm}$$

Minimum Wall Thickness of Nozzle Necks [tUG-45]:

$$= \max(t_a, t_b)$$

$$= \max(5.33, 11.3)$$

$$= 11.3312 \text{ mm}$$

Available Nozzle Neck Thickness = 17.4498 mm -> OK

Stresses on Nozzle due to External and Pressure Loads per the ASME B31.3 Piping Code, (see 319.4.4 and 302.3.5):

Sustained : 26.8, Allowable : 138.0 N./mm² Passed

Expansion : 0.0, Allowable : 318.2 N./mm² Passed

Occasional : 10.4, Allowable : 183.5 N./mm² Passed

Shear : 12.6, Allowable : 96.6 N./mm² Passed

The number of cycles on this nozzle was assumed to be 7000 or less for the determination of the expansion stress allowable.

Nozzle Junction Minimum Design Metal Temperature (MDMT) Calculations:

Nozzle Neck to Flange Weld, min(Curve:B, Curve:A)

Govrn. thk, $t_g = 17.4$, $t_r = 2.33$, $c = 3 \text{ mm}$, $E^* = 1$

Thickness Ratio = $t_r \cdot E^* / (t_g - c) = 0.16$, Temp. Reduction = 78 °C

Min Metal Temp. w/o impact per UCS-66, Curve A 8 °C

Min Metal Temp. at Required thickness (UCS 66.1) -104 °C

Nozzle Neck to Pad Weld for the Nozzle, Curve: B

Govrn. thk, $t_g = 17.4$, $t_r = 2.33$, $c = 3 \text{ mm}$, $E^* = 1$

Thickness Ratio = $t_r \cdot E^* / (t_g - c) = 0.16$, Temp. Reduction = 78 °C

Min Metal Temp. w/o impact per UCS-66, Curve B -11 °C



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 193 of 275

Nozzle Calcs.: N3-Tube Inlet

Nozl: 13 6:05pm

Sep 8, 2026

Min Metal Temp. at Required thickness (UCS 66.1)	-104 °C
Min Metal Temp. w/o impact per UG-20(f)	-29 °C

Nozzle Neck to Pad Weld for Reinforcement pad, Curve: B

Govrn. thk, tg = 17.4, tr = 2.33, c = 3 mm, E* = 1

Thickness Ratio = $tr * E^* / (tg - c) = 0.16$, Temp. Reduction = 78 °C

Min Metal Temp. w/o impact per UCS-66, Curve B	-11 °C
Min Metal Temp. at Required thickness (UCS 66.1)	-104 °C
Min Metal Temp. w/o impact per UG-20(f)	-29 °C

Shell to Pad Weld Junction at Pad OD, Curve: B

Govrn. thk, tg = 20, tr = 9.56, c = 3 mm, E* = 1

Thickness Ratio = $tr * E^* / (tg - c) = 0.56$, Temp. Reduction = 26 °C

Min Metal Temp. w/o impact per UCS-66, Curve B	-7 °C
Min Metal Temp. at Required thickness (UCS 66.1)	-33 °C
Min Metal Temp. w/o impact per UG-20(f)	-29 °C

Nozzle-Shell/Head Weld (UCS-66(a)1(b)), Curve: B

Govrn. thk, tg = 17.4, tr = 2.33, c = 3 mm, E* = 1

Thickness Ratio = $tr * E^* / (tg - c) = 0.16$, Temp. Reduction = 78 °C

Min Metal Temp. w/o impact per UCS-66, Curve B	-11 °C
Min Metal Temp. at Required thickness (UCS 66.1)	-104 °C
Min Metal Temp. w/o impact per UG-20(f)	-29 °C

Gov. MDMT of the Nozzle	: -104 °C
Gov. MDMT of the Reinforcement Pad	: -33 °C
Gov. MDMT of the nozzle to shell joint welded assembly	: -33 °C

Flange MDMT including Temperature reduction per UCS-66.1:

Unadjusted MDMT of ASME B16.5/47 flanges per UCS-66(c)	-18 °C
Flange MDMT with Temp reduction per UCS-66(b)(1)(-b)	-46 °C

Where the Stress Reduction Ratio per UCS-66(b)(1)(-b) is :

Design Pressure/Ambient Rating = $1056.66 / 1960.01 = 0.539$

Weld Size Calculations, Description: N3-Tube Inlet

Intermediate Calc. for nozzle/shell Welds	Tmin	14.4498 mm
Intermediate Calc. for pad/shell Welds	TminPad	17.0000 mm

Results Per UW-16.1:

	Required Thickness	Actual Thickness
Nozzle Weld	$10.1149 = 0.7 * t_{min}$	$11.3120 = 0.7 * W_o$ mm
Pad Weld	$8.5000 = 0.5 * T_{minPad}$	$11.3120 = 0.7 * W_p$ mm

Maximum Allowable Pressure for this Nozzle at this Location:

Converged Maximum Allowable Pressure in the Operating case: 1848 KPa.

Note: The MAWP of this junction was limited by the parent Shell/Head.

Nozzle is O.K. for the External Pressure: 103 KPa.

The Drop for this Nozzle is : 38.0952 mm

The Cut Length for this Nozzle is, Drop + Ho + H + T : 458.0952 mm

Percent Elongation Calculations:

% Elongation per Table UG-79-1 ($50 * t_{nom} / R_f * (1 - R_f / R_o)$) 2.945 %



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 194 of 275

Nozzle Calcs.: N3-Tube Inlet

Nozl: 13

6:05pm

Sep 8, 2026

This nozzle or its diameter limit intersects weld seam # [1] on this element. The distance between the nozzle and seam is, 0.00 mm , while the distance from the center of the nozzle to the edge of the diameter limit is: 581.10 mm

Input Echo, WRC297 Item 1, Description: N3-Tube Inlet :

Diameter Basis for Cylindrical Shell	ID	
Shell Internal Corrosion Allowance	3.0000	mm
Shell External Corrosion Allowance	0.0000	mm
Shell Diameter	2480.000	mm
Shell Thickness	20.0000	mm
Shell Stress Concentration Factor	1.000	
Vessel Material	SA-516 70	
Vessel Cold S.I. Allowable	Smc 138.00	N./mm ²
Vessel Hot S.I. Allowable	Smh 138.00	N./mm ²

See ASME VIII Div. 2, 4.1.6.3, for determination of the SPS allowable.

Diameter Basis for Nozzle	OD	
Nozzle Corrosion Allowance	3.0000	mm
Nozzle Diameter	609.999	mm
Nozzle Thickness	17.4498	mm
Nozzle Stress Concentration Factor	1.000	
Nozzle Material	SA-516 70	
Nozzle Cold S.I. Allowable	SNmc 138.00	N./mm ²
Nozzle Hot S.I. Allowable	SNmh 138.00	N./mm ²

See ASME VIII Div. 2, 4.1.6.3, for determination of the SPS allowable.

Diameter of Reinforcing Pad	1030.000	mm
Thickness of Reinforcing Pad	24.0000	mm

Note:

External Forces and Moments in WRC 107/537 Convention:

These loads are assumed to be SUSstained loads.

Design Internal Pressure	Dp	1056.66	KPa.
Radial Load	P	-4589.03	Kgf
Circumferential Shear	Vc	3059.35	Kgf
Longitudinal Shear	Vl	3059.35	Kgf
Circumferential Moment	Mc	5137.73	Kg-m.
Longitudinal Moment	Ml	5137.73	Kg-m.
Torsional Moment	Mt	7339.62	Kg-m.

Include Axial Pressure Thrust	No
Include Pressure Stress Indices per Div. 2	No
Local Loads applied at end of Nozzle/Attachment	No

Stress Computations at the Edge of the Nozzle:

Stress Attenuation Diameter (for Insert Plates) per WRC 297:

$$= \text{NozzleOD} + 2 \cdot 1.65 \cdot \sqrt{R_{\text{mean}}(t - ca)}$$

$$= 610.0 + 2 \cdot 1.65 \cdot \sqrt{1263.5(20.0 - 3.0)}$$

$$= 1093.643 \text{ mm}$$

WRC 297 Curve Access Parameters:

Vessel Mean Diameter	(D) =	2527.000	mm
Nozzle Outside Diameter	(d) =	609.999	mm
Vessel Thickness used	(T) =	41.000	mm
Nozzle Thickness used	(t) =	14.450	mm
T / t	=	2.837	



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 195 of 275

Nozzle Calcs.: N3-Tube Inlet

Nozl: 13 6:05pm

Sep 8,2026

$$d / t = 42.215$$

$$\lambda = [(d/D) \cdot \sqrt{(D/T)}] = 1.895$$

Nr/P	=	0.058
Mr/P	=	0.073
MØ/P	=	0.057
NØ/P	=	0.186
MrD/Mc	=	0.157
NrDL/Mc	=	0.094
MØd/Mc	=	0.150
NØDL/Mc	=	0.242
MrD/Ml	=	0.093
NrDL/Ml	=	0.062
MØD/Ml	=	0.081
NØDL/Ml	=	0.357

Vessel Stresses (N./mm²):

LONGITUDINAL PLANE (Stresses Normal to longitudinal plane)	Au Top Outside	Al Top Inside	Bu Bottom Outside	Bl Bottom Inside
Outplane Membrane (P)	4	4	4	4
Outplane Bending (P)	9	-9	9	-9
Outplane Membrane (Mc)	0	0	0	0
Outplane Bending (Mc)	0	0	0	0
Outplane Membrane (ML)	-17	-17	17	17
Outplane Bending (ML)	-23	23	23	-23
Normal Pressure Stress	31	32	31	32
Outplane Stress Summary	4	34	87	22

Vessel Stresses (N./mm²):

LONGITUDINAL PLANE (Stresses parallel to longitudinal plane)	Au Top Outside	Al Top Inside	Bu Bottom Outside	Bl Bottom Inside
Inplane Membrane (P)	1	1	1	1
Inplane Bending (P)	11	-11	11	-11
Inplane Membrane (Mc)	0	0	0	0
Inplane Bending (Mc)	0	0	0	0
Inplane Membrane (ML)	-3	-3	3	3
Inplane Bending (ML)	-27	27	27	-27
Inplane Pressure Stress	15	15	15	15
Inplane Stress Summary	-1	29	59	-18

Vessel Stresses (N./mm²):

LONGITUDINAL PLANE (Shear stress normal to longitudinal plane)	Au Top Outside	Al Top Inside	Bu Bottom Outside	Bl Bottom Inside
Outplane Shear (Vc)	0	0	0	0
Outplane Shear (Vl)	0	0	0	0
Outplane Shear (Mt)	2	2	2	2
Shear Stress Summary	3	3	2	2

Vessel Stresses (N./mm²):

LONGITUDINAL PLANE (Stress Intensities)	Au Top Outside	Al Top Inside	Bu Bottom Outside	Bl Bottom Inside
Two * Max Shear Stress	9	36	87	40



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 196 of 275

Nozzle Calcs.: N3-Tube Inlet

Nozl: 13

6:05pm

Sep 8, 2026

Vessel Stresses (N./mm²):

CIRCUMFERENTIAL PLANE (Stresses Normal to circumferential plane)	Cu	Cl	Du	Dl
	Left Outside	Left Inside	Right Outside	Right Inside
Outplane Membrane (P)	4	4	4	4
Outplane Bending (P)	9	-9	9	-9
Outplane Membrane (Mc)	-11	-11	11	11
Outplane Bending (Mc)	-44	44	44	-44
Outplane Membrane (ML)	0	0	0	0
Outplane Bending (ML)	0	0	0	0
Normal Pressure Stress	15	15	15	15
Outplane Stress Summary	-26	43	85	-20

Vessel Stresses (N./mm²):

CIRCUMFERENTIAL PLANE (Stresses parallel to circumferential plane)	Cu	Cl	Du	Dl
	Left Outside	Left Inside	Right Outside	Right Inside
Inplane Membrane (P)	1	1	1	1
Inplane Bending (P)	11	-11	11	-11
Inplane Membrane (Mc)	-4	-4	4	4
Inplane Bending (Mc)	-46	46	46	-46
Inplane Membrane (ML)	0	0	0	0
Inplane Bending (ML)	0	0	0	0
Inplane Pressure Stress	31	32	31	32
Inplane Stress Summary	-5	63	95	-19

Vessel Stresses (N./mm²):

CIRCUMFERENTIAL PLANE (Shear stress normal to circumferential plane)	Cu	Cl	Du	Dl
	Left Outside	Left Inside	Right Outside	Right Inside
Outplane Shear (Vc)	0	0	0	0
Outplane Shear (Vl)	0	0	0	0
Torsional Shear (Mt)	2	2	2	2
Shear Stress Summary	2	2	3	3

Vessel Stresses (N./mm²):

CIRCUMFERENTIAL PLANE (Stress Intensities)	Cu	Cl	Du	Dl
	Left Outside	Left Inside	Right Outside	Right Inside
Two * Max Shear Stress	26	64	96	23

Nozzle Stresses (N./mm²):

LONGITUDINAL PLANE (Stresses in the hoop direction)	Au	Al	Bu	Bl
	Top Outside	Top Inside	Bottom Outside	Bottom Inside
Hoop Membrane (P)	4	4	4	4
Hoop Bending (P)	0	0	0	0
Hoop Membrane (Mc)	0	0	0	0
Hoop Bending (Mc)	0	0	0	0
Hoop Membrane (ML)	-17	-17	17	17
Hoop Bending (ML)	0	0	0	0
Hoop Pressure Stress	24	26	24	26
Hoop Stress Summary	12	13	47	48

Nozzle Stresses (N./mm²):

LONGITUDINAL PLANE	Au	Al	Bu	Bl
--------------------	----	----	----	----



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 197 of 275

Nozzle Calcs.: N3-Tube Inlet

Nozl: 13

6:05pm

Sep 8,2026

(Stresses Normal to pipe cross-section)	Top Outside	Top Inside	Bottom Outside	Bottom Inside
Axial Membrane (P)	1	1	1	1
Axial Bending (P)	57	-57	57	-57
Axial Membrane (Mc)	0	0	0	0
Axial Bending (Mc)	0	0	0	0
Axial Membrane (ML)	-12	-12	12	12
Axial Bending (ML)	-146	146	146	-146
Axial Pressure Stress	12	12	12	12
Axial Stress Summary	-87	90	230	-176

Nozzle Stresses (N./mm²):

LONGITUDINAL PLANE (Shear stress)	Au Outside	Al Inside	Bu Outside	Bl Inside
Shear due to (Vc)	2	2	-2	-2
Shear due to (Vl)	0	0	0	0
Shear due to Torsion	8	8	8	8
Shear Stress Summary	10	10	6	6

Nozzle Stresses (N./mm²):

LONGITUDINAL PLANE (Stress Intensities)	Au Outside	Al Inside	Bu Outside	Bl Inside
Two * Max Shear Stress	102	91	230	225

Nozzle Stresses (N./mm²):

CIRCUMFERENTIAL PLANE (Stresses in the hoop direction)	Cu Left Outside	Cl Left Inside	Du Right Outside	Dl Right Inside
Hoop Membrane (P)	4	4	4	4
Hoop Bending (P)	0	0	0	0
Hoop Membrane (Mc)	-11	-11	11	11
Hoop Bending (Mc)	0	0	0	0
Hoop Membrane (ML)	0	0	0	0
Hoop Bending (ML)	0	0	0	0
Hoop Pressure Stress	24	26	24	26
Hoop Stress Summary	17	19	41	42

Nozzle Stresses (N./mm²):

CIRCUMFERENTIAL PLANE (Stresses Normal to pipe cross-section)	Cu Left Outside	Cl Left Inside	Du Right Outside	Dl Right Inside
Axial Membrane (P)	1	1	1	1
Axial Bending (P)	57	-57	57	-57
Axial Membrane (Mc)	-12	-12	12	12
Axial Bending (Mc)	-261	261	261	-261
Axial Membrane (ML)	0	0	0	0
Axial Bending (ML)	0	0	0	0
Axial Pressure Stress	12	12	12	12
Axial Stress Summary	-202	205	345	-291

Nozzle Stresses (N./mm²):

CIRCUMFERENTIAL PLANE (Shear stress)	Cu Outside	Cl Inside	Du Outside	Dl Inside
Shear due to (Vc)	0	0	0	0
Shear due to (Vl)	-2	-2	2	2



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 198 of 275

Nozzle Calcs.: N3-Tube Inlet

Nozl: 13 6:05pm

Sep 8, 2026

Shear due to Torsion	8	8	8	8
Shear Stress Summary	6	6	10	10

Nozzle Stresses (N./mm²):

CIRCUMFERENTIAL PLANE (Stress Intensities	Cu Outside	Cl Inside	Du Outside	Dl Inside
Two * Max Shear Stress	220	205	345	335

Stress Computations at the Edge of the Reinforcing Pad:

Stress Attenuation Diameter (for Insert Plates) per WRC 297:

$$= \text{NozzleOD} + 2 \cdot 1.65 \cdot \sqrt{R_{\text{mean}}(t - c_a)}$$

$$= 610.0 + 2 \cdot 1.65 \cdot \sqrt{1251.5(20.0 - 3.0)}$$

$$= 1091.341 \text{ mm}$$

WRC 297 Curve Access Parameters:

Vessel Mean Diameter (D) =	2503.000 mm
Nozzle Outside Diameter (d) =	1030.000 mm
Vessel Thickness used (T) =	17.000 mm
Nozzle Thickness used (t) =	224.450 mm
T / t =	0.076
d / t =	10.000

$$\lambda = [(d/D) \cdot \sqrt{(D/T)}] = 4.993$$

Note: Re-pad thickness is added to nozzle thickness to simulate the Re-pad.

Nr/P =	0.045
Mr/P =	0.071
M0/P =	0.019
N0/P =	0.026
MrD/Mc =	0.240
NrDL/Mc =	0.100
M0d/Mc =	0.072
N0DL/Mc =	0.051
MrD/Ml =	0.049
NrDL/Ml =	0.048
M0D/Ml =	0.015
N0DL/Ml =	0.026

Vessel Stresses (N./mm²):

LONGITUDINAL PLANE (Stresses Normal to longitudinal plane)	Au Top Outside	Al Top Inside	Bu Bottom Outside	Bl Bottom Inside
Outplane Membrane (P)	4	4	4	4
Outplane Bending (P)	17	-17	17	-17
Outplane Membrane (Mc)	0	0	0	0
Outplane Bending (Mc)	0	0	0	0
Outplane Membrane (ML)	-4	-4	4	4
Outplane Bending (ML)	-15	15	15	-15
Normal Pressure Stress	76	77	76	77
Outplane Stress Summary	79	74	118	52

Vessel Stresses (N./mm²):

LONGITUDINAL PLANE (Stresses parallel to longitudinal plane)	Au Top Outside	Al Top Inside	Bu Bottom Outside	Bl Bottom Inside
Inplane Membrane (P)	7	7	7	7



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 199 of 275

Nozzle Calcs.: N3-Tube Inlet

Nozl: 13 6:05pm

Sep 8, 2026

Inplane Bending (P)	65	-65	65	-65
Inplane Membrane (Mc)	0	0	0	0
Inplane Bending (Mc)	0	0	0	0
Inplane Membrane (ML)	-8	-8	8	8
Inplane Bending (ML)	-50	50	50	-50
Inplane Pressure Stress	38	38	38	38
Inplane Stress Summary	53	21	169	-62

Vessel Stresses (N./mm²):

LONGITUDINAL PLANE		Au	Al	Bu	Bl
(Shear stress normal to longitudinal plane)		Top Outside	Top Inside	Bottom Outside	Bottom Inside
Outplane Shear (Vc)		1	1	-1	-1
Outplane Shear (Vl)		0	0	0	0
Outplane Shear (Mt)		2	2	2	2
Shear Stress Summary		3	3	1	1

Vessel Stresses (N./mm²):

LONGITUDINAL PLANE		Au	Al	Bu	Bl
(Stress Intensities)		Top Outside	Top Inside	Bottom Outside	Bottom Inside
Two * Max Shear Stress		79	75	169	115

Vessel Stresses (N./mm²):

CIRCUMFERENTIAL PLANE		Cu	Cl	Du	Dl
(Stresses Normal to circumferential plane)		Left Outside	Left Inside	Right Outside	Right Inside
Outplane Membrane (P)		4	4	4	4
Outplane Bending (P)		17	-17	17	-17
Outplane Membrane (Mc)		-8	-8	8	8
Outplane Bending (Mc)		-72	72	72	-72
Outplane Membrane (ML)		0	0	0	0
Outplane Bending (ML)		0	0	0	0
Normal Pressure Stress		38	38	38	38
Outplane Stress Summary		-20	88	141	-39

Vessel Stresses (N./mm²):

CIRCUMFERENTIAL PLANE		Cu	Cl	Du	Dl
(Stresses parallel to circumferential plane)		Left Outside	Left Inside	Right Outside	Right Inside
Inplane Membrane (P)		7	7	7	7
Inplane Bending (P)		65	-65	65	-65
Inplane Membrane (Mc)		-16	-16	16	16
Inplane Bending (Mc)		-243	243	243	-243
Inplane Membrane (ML)		0	0	0	0
Inplane Bending (ML)		0	0	0	0
Inplane Pressure Stress		76	77	76	77
Inplane Stress Summary		-110	245	410	-207

Vessel Stresses (N./mm²):

CIRCUMFERENTIAL PLANE		Cu	Cl	Du	Dl
(Shear stress normal to circumferential plane)		Left Outside	Left Inside	Right Outside	Right Inside
Outplane Shear (Vc)		0	0	0	0
Outplane Shear (Vl)		-1	-1	1	1
Torsional Shear (Mt)		2	2	2	2



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 200 of 275

Nozzle Calcs.: N3-Tube Inlet

Nozl: 13 6:05pm

Sep 8, 2026

Shear Stress Summary 1 1 3 3

Vessel Stresses (N./mm²):

CIRCUMFERENTIAL PLANE (Stress Intensities)	Cu Left Outside	Cl Left Inside	Du Right Outside	Dl Right Inside
Two * Max Shear Stress	110	245	410	208

WRC 297 Stress Summations per ASME Sec. VIII Div. 2:

Vessel Stress Summation at Vessel-Nozzle Junction (N./mm²):

Type of Stress Int. Location	Stress Values at							
	Au	Al	Bu	Bl	Cu	Cl	Du	Dl
Circ. Pm (SUS)	31	32	31	32	31	32	31	32
Circ. Pl (SUS)	-13	-13	21	21	-3	-3	5	5
Circ. Q (SUS)	-14	14	32	-32	-35	35	57	-57
Long. Pm (SUS)	15	15	15	15	15	15	15	15
Long. Pl (SUS)	-2	-2	4	4	-7	-7	15	15
Long. Q (SUS)	-16	16	38	-38	-35	35	53	-53
Shear Pm (SUS)	0	0	0	0	0	0	0	0
Shear Pl (SUS)	0	0	0	0	0	0	0	0
Shear Q (SUS)	2	2	2	2	2	2	2	2
Pm (SUS)	31.0	32.0	31.0	32.0	31.0	32.0	31.0	32.0
Pm+Pl (SUS)	18.0	19.0	52.0	53.0	28.0	29.0	36.0	37.0
Pm+Pl+Q (Total)	8.1	33.8	84.1	40.2	27.2	64.2	93.4	24.0

Vessel Stress Summation Comparison (N./mm²):

Type of Stress Int.	Max. S.I.	S.I. Allowable	Result
Pm (SUS)	32.00	138.00	Passed
Pm+Pl (SUS)	53.00	207.00	Passed
Pm+Pl+Q (TOTAL)	93.39	413.99	Passed

Because only sustained loads were specified, the Pm+Pl+Q allowable was 3 * Smh.

WRC 297 Stress Summations per ASME Sec. VIII Div. 2:

Vessel Stress Summation at Reinforcing Pad Edge (N./mm²):

Type of Stress Int. Location	Stress Values at							
	Au	Al	Bu	Bl	Cu	Cl	Du	Dl
Circ. Pm (SUS)	76	77	76	77	76	77	76	77
Circ. Pl (SUS)	0	0	8	8	-9	-9	23	23
Circ. Q (SUS)	2	-2	32	-32	-178	178	308	-308
Long. Pm (SUS)	38	38	38	38	38	38	38	38
Long. Pl (SUS)	-1	-1	15	15	-4	-4	12	12
Long. Q (SUS)	15	-15	115	-115	-55	55	89	-89
Shear Pm (SUS)	0	0	0	0	0	0	0	0



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 201 of 275

Nozzle Calcs.: N3-Tube Inlet

Nozl: 13

6:05pm

Sep 8, 2026

Shear P1 (SUS)	1	1	-1	-1	-1	-1	1	1
Shear Q (SUS)	2	2	2	2	2	2	2	2
Pm (SUS)	76.0	77.0	76.0	77.0	76.0	77.0	76.0	77.0
Pm+P1 (SUS)	76.0	77.0	84.0	85.0	67.0	68.0	99.0	100.0
Pm+P1+Q (Total)	78.3	75.2	168.0	115.0	111.0	246.0	407.0	208.1

Vessel Stress Summation Comparison (N./mm²):

Type of Stress Int.	Max. S.I.	S.I. Allowable	Result
Pm (SUS)	77.00	138.00	Passed
Pm+P1 (SUS)	100.02	207.00	Passed
Pm+P1+Q (TOTAL)	407.03	413.99	Passed

Because only sustained loads were specified, the Pm+P1+Q allowable was 3 * Smh.

WRC 297 Stress Summations per ASME Sec. VIII Div. 2:

Nozzle Stress Summation at Vessel-Nozzle Junction (N./mm²):

Type of Stress Int. Location	Stress Values at							
	Au	Al	Bu	Bl	Cu	Cl	Du	Dl
Circ. Pm (SUS)	24	26	24	26	24	26	24	26
Circ. P1 (SUS)	-13	-13	21	21	-7	-7	15	15
Circ. Q (SUS)	0	0	0	0	0	0	0	0
Long. Pm (SUS)	12	12	12	12	12	12	12	12
Long. P1 (SUS)	-11	-11	13	13	-11	-11	13	13
Long. Q (SUS)	-89	89	203	-203	-204	204	318	-318
Shear Pm (SUS)	0	0	0	0	0	0	0	0
Shear P1 (SUS)	2	2	-2	-2	-2	-2	2	2
Shear Q (SUS)	8	8	8	8	8	8	8	8
Pm (SUS)	24.0	26.0	24.0	26.0	24.0	26.0	24.0	26.0
Pm+P1 (SUS)	11.4	13.3	45.2	47.2	17.2	19.2	39.3	41.2
Pm+P1+Q (Total)	101.0	91.3	228.2	225.3	220.3	205.2	343.3	334.6

Nozzle Stress Summation Comparison (N./mm²):

Type of Stress Int.	Max. S.I.	S.I. Allowable	Result
Pm (SUS)	26.00	138.00	Passed
Pm+P1 (SUS)	47.18	207.00	Passed
Pm+P1+Q (TOTAL)	343.33	413.99	Passed

Because only sustained loads were specified, the Pm+P1+Q allowable was 3 * Smh.

PV Elite is a trademark of Hexagon AB, 2026, All rights reserved.



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 202 of 275

Nozzle Calcs.: Vent

Nozl: 14

6:05pm

Sep 8, 2026

Input, Nozzle Desc: Vent

From: 60

Pressure for Reinforcement Calculations	P	1056.657	KPa.
Temperature for Internal Pressure	Temp	130	°C
Design External Pressure	Pext	103.42	KPa.
Temperature for External Pressure	Tempex	130	°C
Parent Material		SA-516 70	
Parent Allowable Stress at Temperature	Sv	138.00	N./mm ²
Parent Allowable Stress At Ambient	Sva	138.00	N./mm ²
Inside Diameter of Cylindrical Shell	D	2480.00	mm
Design Length of Section	L	5600.0000	mm
Shell Finished (Minimum) Thickness	t	18.0000	mm
Shell Internal Corrosion Allowance	c	3.0000	mm
Shell External Corrosion Allowance	co	0.0000	mm
Distance from Bottom/Left Tangent		5429.52	mm
User Entered Minimum Design Metal Temperature		-12.00	°C

Type of Element Connected to the Parent : Nozzle

Material		SA-266 2	
Material UNS Number		K03506	
Material Specification/Type		Forgings	
Allowable Stress at Temperature	Sn	138.00	N./mm ²
Allowable Stress At Ambient	Sna	138.00	N./mm ²
Diameter Basis (for tr calc only)		Inside	
Layout Angle		0.00	deg
Diameter		1.9291	in.
Size and Thickness Basis		Actual	
Actual Thickness	tn	9.0000	mm
Flange Material		SA-105	
Flange Type		Long Weld Neck	
Corrosion Allowance	can	3.0000	mm
Joint Efficiency of Shell Seam at Nozzle	E1	1.00	
Joint Efficiency of Nozzle Neck	En	1.00	
Outside Projection	ho	300.0000	mm
Weld leg size between Nozzle and Pad/Shell	Wo	10.0000	mm
Groove weld depth between Nozzle and Vessel	Wgnv	16.0000	mm
Inside Projection	h	0.0000	mm
Weld leg size, Inside Element to Shell	Wi	0.0000	mm
Flange Class		300	
Flange Grade		GR 1.1	

The Pressure Design option was MAWP + static head (to the nozzle).



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)


Page 203 of 275

Nozzle Calcs.: Vent

Nozl: 14

6:05pm

Sep 8, 2026

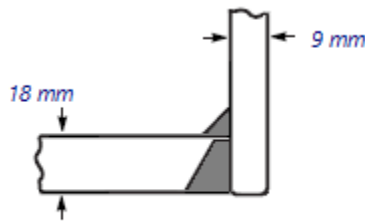

Reinforcement CALCULATION, Description: Vent

ASME Code, Section VIII, Div. 1, UG-37 to UG-45

Actual Inside Diameter Used in Calculation	1.929 in.
Actual Thickness Used in Calculation	0.354 in.

Nozzle input data check completed without errors.

Reqd thk per UG-37(a) of Cylindrical Shell, tr [Int. Press]
 $= P \cdot R / (S_v \cdot E - 0.6 \cdot P)$ per UG-27 (c)(1)
 $= 1057 \cdot 1243 / (138 \cdot 1 - 0.6 \cdot 1057)$
 $= 9.5622 \text{ mm}$

Reqd thk per UG-37(a) of Nozzle Wall, trn [Int. Press]
 $= P \cdot R / (S_n \cdot E - 0.6 \cdot P)$ per UG-27 (c)(1)
 $= 1057 \cdot 27.5 / (138 \cdot 1 - 0.6 \cdot 1057)$
 $= 0.2116 \text{ mm}$

Required Nozzle thickness under External Pressure per UG-28 : 0.4019 mm

UG-40, Limits of Reinforcement: [Internal Pressure]

Parallel to Vessel Wall (Diameter Limit)	D1	109.9998 mm
Parallel to Vessel Wall, opening length	d	54.9999 mm
Normal to Vessel Wall (Thickness Limit), no pad	Tlnp	15.0000 mm

Taking a UG-36(c)(3)(a) exemption for nozzle: Vent.

This calculation is valid for nozzles that meet all the requirements of paragraph UG-36. Please check the Code carefully, especially for nozzles that are not isolated or do not meet Code spacing requirements. To force the computation of areas for small nozzles go to Tools->Configuration and check the box to force the UG-37 small nozzle area calculation.

UG-45 Minimum Nozzle Neck Thickness Requirement: [Int. Press.]

Wall Thickness for Internal/External pressures	ta	= 3.4019 mm
Wall Thickness per UG16(b),	tr16b	= 4.5000 mm
Wall Thickness, shell/head, internal pressure	trb1	= 12.5622 mm
Wall Thickness	tb1 = max(trb1, tr16b)	= 12.5622 mm
Wall Thickness, shell/head, external pressure	trb2	= 3.9320 mm
Wall Thickness	tb2 = max(trb2, tr16b)	= 4.5000 mm
Wall Thickness per table UG-45	tb3	= 7.5200 mm

Determine Nozzle Thickness candidate [tb]:

$= \min[tb3, \max(tb1, tb2)]$
 $= \min[7.52, \max(12.6, 4.5)]$
 $= 7.5200 \text{ mm}$

Minimum Wall Thickness of Nozzle Necks [tUG-45]:

$= \max(ta, tb)$
 $= \max(3.4, 7.52)$
 $= 7.5200 \text{ mm}$

Available Nozzle Neck Thickness = 9.0000 mm -> OK



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 204 of 275

Nozzle Calcs.: Vent

Nozl: 14

6:05pm

Sep 8, 2026

Nozzle Junction Minimum Design Metal Temperature (MDMT) Calculations:**Nozzle-Shell/Head Weld (UCS-66(a)(1)(b)), Curve: B**

Govrn. thk, tg = 9, tr = 0.21, c = 3 mm, E* = 1

Thickness Ratio = $tr * E^* / (tg - c) = 0.035$, Temp. Reduction = 78 °C

Min Metal Temp. w/o impact per UCS-66, Curve B -29 °C

Min Metal Temp. at Required thickness (UCS 66.1) -104 °C

Gov. MDMT of the nozzle to shell joint welded assembly : -104 °C

Flange MDMT including Temperature reduction per UCS-66.1:

Unadjusted MDMT of ASME B16.5/47 flanges per UCS-66(c) -18 °C

Flange MDMT with Temp reduction per UCS-66(b)(1)(-b) -104 °C

Where the Stress Reduction Ratio per UCS-66(b)(1)(-b) is :

Design Pressure/Ambient Rating = $1056.66 / 5100.00 = 0.207$ Weld Size Calculations, Description: Vent

Intermediate Calc. for nozzle/shell Welds Tmin 6.0000 mm

Results Per UW-16.1:

	Required Thickness	Actual Thickness
Nozzle Weld	$4.2000 = 0.7 * t_{min}$	$7.0700 = 0.7 * W_o$ mm

Skipping the nozzle attachment weld strength calculations. Per UW-15(b)(2) the nozzles exempted by UG-36(c)(3)(a) (small nozzles) do not require a weld strength check.

The Drop for this Nozzle is : 0.4526 mm

The Cut Length for this Nozzle is, Drop + Ho + H + T : 318.4525 mm

PV Elite is a trademark of Hexagon AB, 2026, All rights reserved.



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 205 of 275

Nozzle Calcs.: Drain

Nozl: 15

6:05pm

Sep 8, 2026

Input, Nozzle Desc: Drain

From: 60

Pressure for Reinforcement Calculations	P	1080.770	KPa.
Temperature for Internal Pressure	Temp	130	°C
Design External Pressure	Pext	103.42	KPa.
Temperature for External Pressure	Tempex	130	°C
Parent Material		SA-516 70	
Parent Allowable Stress at Temperature	Sv	138.00	N./mm ²
Parent Allowable Stress At Ambient	Sva	138.00	N./mm ²
Inside Diameter of Cylindrical Shell	D	2480.00	mm
Design Length of Section	L	5600.0000	mm
Shell Finished (Minimum) Thickness	t	18.0000	mm
Shell Internal Corrosion Allowance	c	3.0000	mm
Shell External Corrosion Allowance	co	0.0000	mm
Distance from Bottom/Left Tangent		5429.52	mm
User Entered Minimum Design Metal Temperature		-12.00	°C

Type of Element Connected to the Parent : Nozzle

Material		SA-266 2	
Material UNS Number		K03506	
Material Specification/Type		Forgings	
Allowable Stress at Temperature	Sn	138.00	N./mm ²
Allowable Stress At Ambient	Sna	138.00	N./mm ²
Diameter Basis (for tr calc only)		Inside	
Layout Angle		180.00	deg
Diameter		1.9291	in.
Size and Thickness Basis		Actual	
Actual Thickness	tn	9.0000	mm
Flange Material		SA-105	
Flange Type		Long Weld Neck	
Corrosion Allowance	can	3.0000	mm
Joint Efficiency of Shell Seam at Nozzle	E1	1.00	
Joint Efficiency of Nozzle Neck	En	1.00	
Outside Projection	ho	300.0000	mm
Weld leg size between Nozzle and Pad/Shell	Wo	10.0000	mm
Groove weld depth between Nozzle and Vessel	Wgnv	16.0000	mm
Inside Projection	h	0.0000	mm
Weld leg size, Inside Element to Shell	Wi	0.0000	mm
Flange Class		300	
Flange Grade		GR 1.1	

The Pressure Design option was MAWP + static head (to the nozzle).



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)


Page 206 of 275

Nozzle Calcs.: Drain

Nozl: 15

6:05pm

Sep 8, 2026

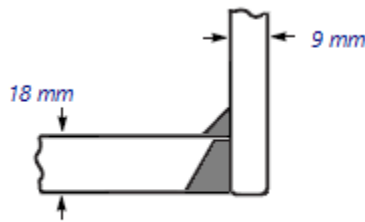

Reinforcement CALCULATION, Description: Drain

ASME Code, Section VIII, Div. 1, UG-37 to UG-45

Actual Inside Diameter Used in Calculation	1.929 in.
Actual Thickness Used in Calculation	0.354 in.

Nozzle input data check completed without errors.

Reqd thk per UG-37(a) of Cylindrical Shell, tr [Int. Press]
 $= P \cdot R / (S_v \cdot E - 0.6 \cdot P)$ per UG-27 (c)(1)
 $= 1081 \cdot 1243 / (138 \cdot 1 - 0.6 \cdot 1081)$
 $= 9.7815 \text{ mm}$

Reqd thk per UG-37(a) of Nozzle Wall, trn [Int. Press]
 $= P \cdot R / (S_n \cdot E - 0.6 \cdot P)$ per UG-27 (c)(1)
 $= 1081 \cdot 27.5 / (138 \cdot 1 - 0.6 \cdot 1081)$
 $= 0.2164 \text{ mm}$

Required Nozzle thickness under External Pressure per UG-28 : 0.4019 mm

UG-40, Limits of Reinforcement: [Internal Pressure]

Parallel to Vessel Wall (Diameter Limit)	D1	109.9998 mm
Parallel to Vessel Wall, opening length	d	54.9999 mm
Normal to Vessel Wall (Thickness Limit), no pad	Tlnp	15.0000 mm

Taking a UG-36(c)(3)(a) exemption for nozzle: Drain.

This calculation is valid for nozzles that meet all the requirements of paragraph UG-36. Please check the Code carefully, especially for nozzles that are not isolated or do not meet Code spacing requirements. To force the computation of areas for small nozzles go to Tools->Configuration and check the box to force the UG-37 small nozzle area calculation.

UG-45 Minimum Nozzle Neck Thickness Requirement: [Int. Press.]

Wall Thickness for Internal/External pressures	ta	= 3.4019 mm
Wall Thickness per UG16(b),	tr16b	= 4.5000 mm
Wall Thickness, shell/head, internal pressure	trb1	= 12.7815 mm
Wall Thickness	tb1 = max(trb1, tr16b)	= 12.7815 mm
Wall Thickness, shell/head, external pressure	trb2	= 3.9320 mm
Wall Thickness	tb2 = max(trb2, tr16b)	= 4.5000 mm
Wall Thickness per table UG-45	tb3	= 7.5200 mm

Determine Nozzle Thickness candidate [tb]:

$= \min[tb3, \max(tb1, tb2)]$
 $= \min[7.52, \max(12.8, 4.5)]$
 $= 7.5200 \text{ mm}$

Minimum Wall Thickness of Nozzle Necks [tUG-45]:

$= \max(ta, tb)$
 $= \max(3.4, 7.52)$
 $= 7.5200 \text{ mm}$

Available Nozzle Neck Thickness = 9.0000 mm -> OK



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 207 of 275

Nozzle Calcs.: Drain

Nozl: 15

6:05pm

Sep 8, 2026

Nozzle Junction Minimum Design Metal Temperature (MDMT) Calculations:

Nozzle-Shell/Head Weld (UCS-66(a)(1)(b)), Curve: B

Govrn. thk, $t_g = 9$, $t_r = 0.22$, $c = 3$ mm, $E^* = 1$

Thickness Ratio = $t_r * E^* / (t_g - c) = 0.036$, Temp. Reduction = 78 °C

Min Metal Temp. w/o impact per UCS-66, Curve B -29 °C

Min Metal Temp. at Required thickness (UCS 66.1) -104 °C

Gov. MDMT of the nozzle to shell joint welded assembly : -104 °C

Flange MDMT including Temperature reduction per UCS-66.1:

Unadjusted MDMT of ASME B16.5/47 flanges per UCS-66(c) -18 °C

Flange MDMT with Temp reduction per UCS-66(b)(1)(-b) -104 °C

Where the Stress Reduction Ratio per UCS-66(b)(1)(-b) is :

Design Pressure/Ambient Rating = $1080.77 / 5100.00 = 0.212$

Weld Size Calculations, Description: Drain

Intermediate Calc. for nozzle/shell Welds T_{min} 6.0000 mm

Results Per UW-16.1:

	Required Thickness	Actual Thickness
Nozzle Weld	$4.2000 = 0.7 * t_{min}$	$7.0700 = 0.7 * W_o$ mm

Skipping the nozzle attachment weld strength calculations. Per UW-15(b)(2) the nozzles exempted by UG-36(c)(3)(a) (small nozzles) do not require a weld strength check.

The Drop for this Nozzle is : 0.4526 mm

The Cut Length for this Nozzle is, Drop + Ho + H + T : 318.4525 mm

PV Elite is a trademark of Hexagon AB, 2026, All rights reserved.



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 208 of 275

Nozzle Calcs.: N1-Shell Inlet

Nozl: 16

6:05pm

Sep 8, 2026

Input, Nozzle Desc: N1-Shell Inlet

From: 60

Pressure for Reinforcement Calculations	P	1056.657	KPa.
Temperature for Internal Pressure	Temp	130	°C
Design External Pressure	Pext	103.42	KPa.
Temperature for External Pressure	Tempex	130	°C
Parent Material		SA-516 70	
Parent Allowable Stress at Temperature	Sv	138.00	N./mm ²
Parent Allowable Stress At Ambient	Sva	138.00	N./mm ²
Inside Diameter of Cylindrical Shell	D	2480.00	mm
Design Length of Section	L	5600.0000	mm
Shell Finished (Minimum) Thickness	t	18.0000	mm
Shell Internal Corrosion Allowance	c	3.0000	mm
Shell External Corrosion Allowance	co	0.0000	mm
Distance from Bottom/Left Tangent		3387.97	mm
User Entered Minimum Design Metal Temperature		-12.00	°C

Type of Element Connected to the Parent : Nozzle

Material		SA-106 B	
Material UNS Number		K03006	
Material Specification/Type		Smls. pipe	
Allowable Stress at Temperature	Sn	118.00	N./mm ²
Allowable Stress At Ambient	Sna	118.00	N./mm ²
Diameter Basis (for tr calc only)		Outside	
Layout Angle		0.00	deg
Diameter		14.0000	in.
Size and Thickness Basis		Nominal	
Nominal Thickness		60	
Flange Material		SA-105	
Flange Type		Weld Neck Flange	
Corrosion Allowance	can	3.0000	mm
Joint Efficiency of Shell Seam at Nozzle	E1	1.00	
Joint Efficiency of Nozzle Neck	En	1.00	
Outside Projection	ho	300.0000	mm
Weld leg size between Nozzle and Pad/Shell	Wo	10.0000	mm
Groove weld depth between Nozzle and Vessel	Wgnv	16.0000	mm
Inside Projection	h	0.0000	mm
Weld leg size, Inside Element to Shell	Wi	0.0000	mm
Pad Material		SA-516 70	
Pad Allowable Stress at Temperature	Sp	138.00	N./mm ²
Pad Allowable Stress At Ambient	Spa	138.00	N./mm ²
Diameter of Pad along vessel surface	Dp	595.6000	mm
Thickness of Pad	te	16.0000	mm
Weld leg size between Pad and Shell	Wp	14.0000	mm
Groove weld depth between Pad and Nozzle	Wgpn	16.0000	mm
Reinforcing Pad Width		120.0000	mm
Flange Class		150	
Flange Grade		GR 1.1	

The Pressure Design option was MAWP + static head (to the nozzle).



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)


Page 209 of 275

Nozzle Calcs.: N1-Shell Inlet

Nozl: 16

6:05pm

Sep 8, 2026

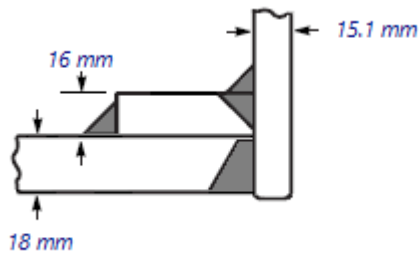

Reinforcement CALCULATION, Description: N1-Shell Inlet

ASME Code, Section VIII, Div. 1, UG-37 to UG-45

Actual Outside Diameter Used in Calculation	14.000 in.
Actual Thickness Used in Calculation	0.594 in.

Nozzle input data check completed without errors.

Reqd thk per UG-37(a) of Cylindrical Shell, tr [Int. Press]
 $= P \cdot R / (S_v \cdot E - 0.6 \cdot P)$ per UG-27 (c)(1)
 $= 1057 \cdot 1243 / (138 \cdot 1 - 0.6 \cdot 1057)$
 $= 9.5622 \text{ mm}$

Reqd thk per UG-37(a) of Nozzle Wall, trn [Int. Press]
 $= P \cdot R_o / (S_n \cdot E + 0.4 \cdot P)$ per Appendix 1-1 (a)(1)
 $= 1057 \cdot 178 / (118 \cdot 1 + 0.4 \cdot 1057)$
 $= 1.5866 \text{ mm}$

Required Nozzle thickness under External Pressure per UG-28 : 1.0591 mm

UG-40, Limits of Reinforcement: [Internal Pressure]

Parallel to Vessel Wall (Diameter Limit)	D1	662.8496 mm
Parallel to Vessel Wall, opening length	d	331.4248 mm
Normal to Vessel Wall (Thickness Limit), pad side Tlwp		37.5000 mm

Weld Strength Reduction Factor [fr1]:
 $= \min(1, S_n / S_v)$
 $= \min(1, 118 / 138)$
 $= 0.855$

Weld Strength Reduction Factor [fr2]:
 $= \min(1, S_n / S_v)$
 $= \min(1, 118 / 138)$
 $= 0.855$

Weld Strength Reduction Factor [fr4]:
 $= \min(1, S_p / S_v)$
 $= \min(1, 138 / 138)$
 $= 1.000$

Weld Strength Reduction Factor [fr3]:
 $= \min(fr2, fr4)$
 $= \min(0.86, 1)$
 $= 0.855$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 210 of 275

Nozzle Calcs.: N1-Shell Inlet

Nozl: 16

6:05pm

Sep 8, 2026

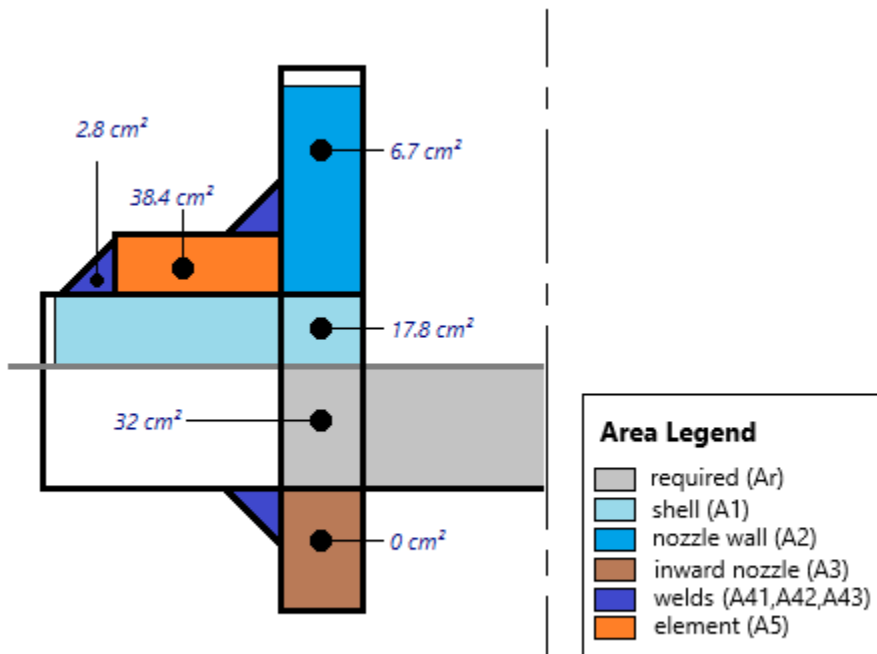


Figure UG 37.1 Nozzle Areas

Results of Nozzle Reinforcement Area Calculations: (cm²)

AREA AVAILABLE, A1 to A5		MAWP	External	Mapnc
Area Required	Ar	32.027	18.822	NA
Area in Shell	A1	17.832	12.332	NA
Area in Nozzle Wall	A2	6.734	7.073	NA
Area in Inward Nozzle	A3	0.000	0.000	NA
Area in Welds	A41+A42+A43	2.815	2.815	NA
Area in Element	A5	38.400	38.400	NA
TOTAL AREA AVAILABLE	Atot	65.781	60.620	NA

The MAWP Case Governs the Analysis.

Nozzle Angle Used in Area Calculations

90.00 degs.

The area available without a pad is Insufficient.

The area available with the given pad is Sufficient.

SELECTION OF POSSIBLE REINFORCING PADS:	Diameter	Thickness
Based on given Pad Thickness:	384.6349	16.0000 mm
Based on given Pad Diameter:	595.6000	1.9357 mm
Based on Shell or Nozzle Thickness:	386.3907	15.0876 mm

Area Required [A]:

$$= (d \cdot tr \cdot F + 2 \cdot tn \cdot tr \cdot F \cdot (1 - fr1)) \text{ UG-37(c)}$$

$$= (331 \cdot 9.56 \cdot 1 + 2 \cdot 12.1 \cdot 9.56 \cdot 1 \cdot (1 - 0.86))$$

$$= 32.027 \text{ cm}^2$$

Reinforcement Areas per Figure UG-37.1

Area Available in Shell [A1]:

$$= d (E1 \cdot t - F \cdot tr) - 2 \cdot tn (E1 \cdot t - F \cdot tr) \cdot (1 - fr1)$$

$$= 331 (1 \cdot 15 - 1 \cdot 9.56) - 2 \cdot 12.1$$

$$(1 \cdot 15 - 1 \cdot 9.56) \cdot (1 - 0.86)$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 211 of 275

Nozzle Calcs.: N1-Shell Inlet

Nozl: 16

6:05pm

Sep 8, 2026

$$= 17.832 \text{ cm}^2$$

Area Available in Nozzle Wall Projecting Outward [A2]:

$$= (2 \cdot Tlwp) \cdot (tn - trn) \cdot fr2$$

$$= (2 \cdot 37.5) \cdot (12.1 - 1.59) \cdot 0.86$$

$$= 6.734 \text{ cm}^2$$

Area Available in Welds [A41 + A42 + A43]:

$$= Wo^2 \cdot fr3 + (Wi-can/0.707)^2 \cdot fr2 + Wp^2 \cdot fr4$$

$$= 10^2 \cdot 0.86 + (0)^2 \cdot 0.86 + 14^2 \cdot 1$$

$$= 2.815 \text{ cm}^2$$

Area Available in Element [A5]:

$$= (\min(Dp, DL) - (\text{Nozzle OD})) \cdot (\min(tp, Tlwp, te)) \cdot fr4$$

$$= (596 - 356) \cdot 16 \cdot 1$$

$$= 38.400 \text{ cm}^2$$

UG-45 Minimum Nozzle Neck Thickness Requirement: [Int. Press.]

Wall Thickness for Internal/External pressures $ta = 4.5866 \text{ mm}$

Wall Thickness per UG16(b), $tr16b = 4.5000 \text{ mm}$

Wall Thickness, shell/head, internal pressure $trb1 = 12.5622 \text{ mm}$

Wall Thickness $tb1 = \max(trb1, tr16b) = 12.5622 \text{ mm}$

Wall Thickness, shell/head, external pressure $trb2 = 3.9320 \text{ mm}$

Wall Thickness $tb2 = \max(trb2, tr16b) = 4.5000 \text{ mm}$

Wall Thickness per table UG-45 $tb3 = 11.3312 \text{ mm}$

Determine Nozzle Thickness candidate [tb]:

$$= \min[tb3, \max(tb1, tb2)]$$

$$= \min[11.3, \max(12.6, 4.5)]$$

$$= 11.3312 \text{ mm}$$

Minimum Wall Thickness of Nozzle Necks [tUG-45]:

$$= \max(ta, tb)$$

$$= \max(4.59, 11.3)$$

$$= 11.3312 \text{ mm}$$

Available Nozzle Neck Thickness = $0.875 \cdot 15.088 = 13.202 \text{ mm} \rightarrow \text{OK}$

Stresses on Nozzle due to External and Pressure Loads per the ASME B31.3 Piping Code, (see 319.4.4 and 302.3.5):

Sustained	:	27.4,	Allowable	:	118.0 N./mm ²	Passed
Expansion	:	0.0,	Allowable	:	267.6 N./mm ²	Passed
Occasional	:	7.0,	Allowable	:	156.9 N./mm ²	Passed
Shear	:	15.7,	Allowable	:	82.6 N./mm ²	Passed

The number of cycles on this nozzle was assumed to be 7000 or less for the determination of the expansion stress allowable.

Nozzle Junction Minimum Design Metal Temperature (MDMT) Calculations:

Nozzle Neck to Flange Weld, min(Curve:B, Curve:A)

Govrn. thk, $tg = 13.2$, $tr = 1.59$, $c = 3 \text{ mm}$, $E* = 1$

Thickness Ratio = $tr \cdot E*/(tg - c) = 0.16$, Temp. Reduction = $78 \text{ }^\circ\text{C}$

Min Metal Temp. w/o impact per UCS-66, Curve A $0 \text{ }^\circ\text{C}$

Min Metal Temp. at Required thickness (UCS 66.1) $-104 \text{ }^\circ\text{C}$

Nozzle Neck to Pad Weld for the Nozzle, Curve: B

Govrn. thk, $tg = 13.2$, $tr = 1.59$, $c = 3 \text{ mm}$, $E* = 1$

Thickness Ratio = $tr \cdot E*/(tg - c) = 0.16$, Temp. Reduction = $78 \text{ }^\circ\text{C}$

Min Metal Temp. w/o impact per UCS-66, Curve B $-20 \text{ }^\circ\text{C}$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 212 of 275

Nozzle Calcs.: N1-Shell Inlet

Nozl: 16 6:05pm

Sep 8, 2026

Min Metal Temp. at Required thickness (UCS 66.1)	-104 °C
Min Metal Temp. w/o impact per UG-20(f)	-29 °C

Nozzle Neck to Pad Weld for Reinforcement pad, Curve: B

Govrn. thk, tg = 13.2, tr = 1.59, c = 3 mm, E* = 1

Thickness Ratio = $tr * E^* / (tg - c) = 0.16$, Temp. Reduction = 78 °C

Min Metal Temp. w/o impact per UCS-66, Curve B	-20 °C
Min Metal Temp. at Required thickness (UCS 66.1)	-104 °C
Min Metal Temp. w/o impact per UG-20(f)	-29 °C

Shell to Pad Weld Junction at Pad OD, Curve: B

Govrn. thk, tg = 16, c = 3 mm, E* = 1

Thickness Ratio = $tr * E^* / (tg - c) = 0.64$, Temp. Reduction = 20 °C

Attachment governing, Attachment stress = Shell stress per Code

Min Metal Temp. w/o impact per UCS-66, Curve B	-14 °C
Min Metal Temp. at Required thickness (UCS 66.1)	-34 °C
Min Metal Temp. w/o impact per UG-20(f)	-29 °C

Nozzle-Shell/Head Weld (UCS-66(a)1(b)), Curve: B

Govrn. thk, tg = 13.2, tr = 1.59, c = 3 mm, E* = 1

Thickness Ratio = $tr * E^* / (tg - c) = 0.16$, Temp. Reduction = 78 °C

Min Metal Temp. w/o impact per UCS-66, Curve B	-20 °C
Min Metal Temp. at Required thickness (UCS 66.1)	-104 °C
Min Metal Temp. w/o impact per UG-20(f)	-29 °C

Gov. MDMT of the Nozzle	: -104 °C
Gov. MDMT of the Reinforcement Pad	: -34 °C
Gov. MDMT of the nozzle to shell joint welded assembly	: -34 °C

Flange MDMT including Temperature reduction per UCS-66.1:

Unadjusted MDMT of ASME B16.5/47 flanges per UCS-66(c)	-18 °C
Flange MDMT with Temp reduction per UCS-66(b)(1)(-b)	-46 °C

Where the Stress Reduction Ratio per UCS-66(b)(1)(-b) is :

Design Pressure/Ambient Rating = $1056.66 / 1960.01 = 0.539$

Weld Size Calculations, Description: N1-Shell Inlet

Intermediate Calc. for nozzle/shell Welds	Tmin	12.0876 mm
Intermediate Calc. for pad/shell Welds	TminPad	15.0000 mm

Results Per UW-16.1:

	Required Thickness	Actual Thickness
Nozzle Weld	$6.0000 = \text{Min per Code}$	$7.0700 = 0.7 * W_o \text{ mm}$
Pad Weld	$7.5000 = 0.5 * T_{minPad}$	$9.8980 = 0.7 * W_p \text{ mm}$

Weld Strength and Weld Loads per UG-41.1, Sketch (a) or (b)

Weld Load [W]:

$$= \max(0, (A-A1+2 \cdot t_n \cdot f_r1 \cdot (E1 \cdot t - tr)) \cdot Sv)$$

$$= \max(0, (32 - 17.8 + 2 \cdot 12.1 \cdot 0.86 \cdot (1 \cdot 15 - 9.56)) \cdot 138)$$

$$= 21556.35 \text{ Kg}$$

Note: F is always set to 1.0 throughout the calculation.

Weld Load [W1]:

$$= (A2+A5+A4-(W_i-Can/.707)^2 \cdot f_r2) \cdot Sv$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 213 of 275

Nozzle Calcs.: N1-Shell Inlet

Nozl: 16

6:05pm

Sep 8, 2026

$$= (6.73 + 38.4 + 2.82 - 0 \cdot 0.86) \cdot 138$$

$$= 67472.36 \text{ Kgf}$$

Weld Load [W2]:

$$= (A2 + A3 + A4 + (2 \cdot t_n \cdot t \cdot fr1)) \cdot Sv$$

$$= (6.73 + 0 + 0.86 + (3.1)) \cdot 138$$

$$= 15042.72 \text{ Kgf}$$

Weld Load [W3]:

$$= (A2 + A3 + A4 + A5 + (2 \cdot t_n \cdot t \cdot fr1)) \cdot S$$

$$= (6.73 + 0 + 2.82 + 38.4 + (3.1)) \cdot 138$$

$$= 71835.58 \text{ Kgf}$$

Strength of Connection Elements for Failure Path Analysis

Shear, Outward Nozzle Weld [Sonw]:

$$= (\pi/2) \cdot Dlo \cdot Wo \cdot 0.49 \cdot Snw$$

$$= (3.14/2.0) \cdot 356 \cdot 10 \cdot 0.49 \cdot 118$$

$$= 32932. \text{ Kgf}$$

Shear, Pad Element Weld [Spew]:

$$= (\pi/2) \cdot DP \cdot WP \cdot 0.49 \cdot SEW$$

$$= (3.14/2.0) \cdot 596 \cdot 14 \cdot 0.49 \cdot 138$$

$$= 90311. \text{ Kgf}$$

Shear, Nozzle Wall [Snw]:

$$= (\pi \cdot (Dlr + Dlo) / 4) \cdot (Thk - Can) \cdot 0.7 \cdot Sn$$

$$= (3.14 \cdot 172) \cdot (15.1 - 3) \cdot 0.7 \cdot 118$$

$$= 54935. \text{ Kgf}$$

Tension, Pad Groove Weld [Tpgw]:

$$= (\pi/2) \cdot Dlo \cdot Wgpn \cdot 0.74 \cdot Seg$$

$$= (3.14/2) \cdot 356 \cdot 16 \cdot 0.74 \cdot 138$$

$$= 93063. \text{ Kgf}$$

Tension, Shell Groove Weld [Tngw]:

$$= (\pi/2) \cdot Dlo \cdot (T - cas) \cdot 0.74 \cdot Sng$$

$$= (3.14/2.0) \cdot 356 \cdot (18 - 3) \cdot 0.74 \cdot 138$$

$$= 87246. \text{ Kgf}$$

See UG-41 and UW-15 for clarification of allowable stresses.

Strength of Failure Paths:

Failure Path [Path 1-1]:

$$= (SPEW + SNW) = (90311 + 54935) = 145246 \text{ Kgf}$$

Failure Path [Path 2-2]:

$$= (Sonw + Tpgw + Tngw + Sinw)$$

$$= (32932 + 93063 + 87246 + 0) = 213241 \text{ Kgf}$$

Failure Path [Path 3-3]:

$$= (Spew + Tngw + Sinw)$$

$$= (90311 + 87246 + 0) = 177557 \text{ Kgf}$$

Summary of Failure Path Calculations:

Path 1-1 = 145245 Kgf, must exceed W = 21556 Kgf	or W1 = 67472 Kgf
Path 2-2 = 213241 Kgf, must exceed W = 21556 Kgf	or W2 = 15042 Kgf
Path 3-3 = 177557 Kgf, must exceed W = 21556 Kgf	or W3 = 71835 Kgf

Maximum Allowable Pressure for this Nozzle at this Location:

Converged Maximum Allowable Pressure in the Operating case: 1607 KPa.

Nozzle is O.K. for the External Pressure: 103 KPa.



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 214 of 275

Nozzle Calcs.: N1-Shell Inlet

Nozl: 16

6:05pm

Sep 8, 2026

The Drop for this Nozzle is : 12.8134 mm

The Cut Length for this Nozzle is, Drop + Ho + H + T : 330.8133 mm

Input Echo, WRC297 Item 1, Description: N1-Shell Inlet:

Diameter Basis for Cylindrical Shell	ID	
Shell Internal Corrosion Allowance	3.0000	mm
Shell External Corrosion Allowance	0.0000	mm
Shell Diameter	2480.000	mm
Shell Thickness	18.0000	mm
Shell Stress Concentration Factor	1.000	
Vessel Material	SA-516 70	
Vessel Cold S.I. Allowable	Smc 138.00	N./mm ²
Vessel Hot S.I. Allowable	Smh 138.00	N./mm ²

See ASME VIII Div. 2, 4.1.6.3, for determination of the SPS allowable.

Diameter Basis for Nozzle	OD	
Nozzle Corrosion Allowance	3.0000	mm
Nozzle Diameter	355.600	mm
Nozzle Thickness	15.0876	mm
Nozzle Stress Concentration Factor	1.000	
Nozzle Material	SA-106 B	
Nozzle Cold S.I. Allowable	SNmc 118.00	N./mm ²
Nozzle Hot S.I. Allowable	SNmh 118.00	N./mm ²

See ASME VIII Div. 2, 4.1.6.3, for determination of the SPS allowable.

Diameter of Reinforcing Pad	595.600	mm
Thickness of Reinforcing Pad	16.0000	mm

Note:

External Forces and Moments in WRC 107/537 Convention:
These loads are assumed to be SUSTAINED loads.

Design Internal Pressure	Dp	1056.66	KPa.
Radial Load	P	-2676.93	Kgf
Circumferential Shear	Vc	1784.62	Kgf
Longitudinal Shear	Vl	1784.62	Kgf
Circumferential Moment	Mc	1748.26	Kg-m.
Longitudinal Moment	Ml	1748.26	Kg-m.
Torsional Moment	Mt	2497.50	Kg-m.

Include Axial Pressure Thrust	No
Include Pressure Stress Indices per Div. 2	No
Local Loads applied at end of Nozzle/Attachment	No

Stress Computations at the Edge of the Nozzle:

Stress Attenuation Diameter (for Insert Plates) per WRC 297:

$$= \text{NozzleOD} + 2 \cdot 1.65 \cdot \sqrt{R_{\text{mean}}(t - ca)}$$

$$= 355.6 + 2 \cdot 1.65 \cdot \sqrt{1258.5(18.0 - 3.0)}$$

$$= 809.005 \text{ mm}$$

WRC 297 Curve Access Parameters:

Vessel Mean Diameter	(D) =	2517.000	mm
Nozzle Outside Diameter	(d) =	355.600	mm
Vessel Thickness used	(T) =	31.000	mm
Nozzle Thickness used	(t) =	12.088	mm
T / t	=	2.565	
d / t	=	29.419	



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 215 of 275

Nozzle Calcs.: N1-Shell Inlet

Nozl: 16

6:05pm

Sep 8, 2026

$$\lambda = [(d/D) \cdot \sqrt{(D/T)}] = 1.273$$

Nr/P	=	0.085
Mr/P	=	0.101
M0/P	=	0.076
N0/P	=	0.194
MrD/Mc	=	0.184
NrDL/Mc	=	0.119
M0d/Mc	=	0.165
N0DL/Mc	=	0.154
MrD/M1	=	0.133
NrDL/M1	=	0.094
M0D/M1	=	0.110
N0DL/M1	=	0.303

Vessel Stresses (N./mm²):

LONGITUDINAL PLANE (Stresses Normal to longitudinal plane)	Au Top Outside	Al Top Inside	Bu Bottom Outside	Bl Bottom Inside
Outplane Membrane (P)	5	5	5	5
Outplane Bending (P)	12	-12	12	-12
Outplane Membrane (Mc)	0	0	0	0
Outplane Bending (Mc)	0	0	0	0
Outplane Membrane (ML)	-15	-15	15	15
Outplane Bending (ML)	-33	33	33	-33
Normal Pressure Stress	41	42	41	42
Outplane Stress Summary	11	53	107	17

Vessel Stresses (N./mm²):

LONGITUDINAL PLANE (Stresses parallel to longitudinal plane)	Au Top Outside	Al Top Inside	Bu Bottom Outside	Bl Bottom Inside
Inplane Membrane (P)	2	2	2	2
Inplane Bending (P)	16	-16	16	-16
Inplane Membrane (Mc)	0	0	0	0
Inplane Bending (Mc)	0	0	0	0
Inplane Membrane (ML)	-4	-4	4	4
Inplane Bending (ML)	-40	40	40	-40
Inplane Pressure Stress	20	20	20	20
Inplane Stress Summary	-5	42	84	-28

Vessel Stresses (N./mm²):

LONGITUDINAL PLANE (Shear stress normal to longitudinal plane)	Au Top Outside	Al Top Inside	Bu Bottom Outside	Bl Bottom Inside
Outplane Shear (Vc)	1	1	-1	-1
Outplane Shear (Vl)	0	0	0	0
Outplane Shear (Mt)	3	3	3	3
Shear Stress Summary	4	4	2	2

Vessel Stresses (N./mm²):

LONGITUDINAL PLANE (Stress Intensities)	Au Top Outside	Al Top Inside	Bu Bottom Outside	Bl Bottom Inside
Two * Max Shear Stress	19	55	108	46

Vessel Stresses (N./mm²):



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 216 of 275

Nozzle Calcs.: N1-Shell Inlet

Nozl: 16

6:05pm

Sep 8, 2026

CIRCUMFERENTIAL PLANE (Stresses Normal to circumferential plane)	Cu Left Outside	Cl Left Inside	Du Right Outside	Dl Right Inside
Outplane Membrane (P)	5	5	5	5
Outplane Bending (P)	12	-12	12	-12
Outplane Membrane (Mc)	-7	-7	7	7
Outplane Bending (Mc)	-49	49	49	-49
Outplane Membrane (ML)	0	0	0	0
Outplane Bending (ML)	0	0	0	0
Normal Pressure Stress	20	20	20	20

Outplane Stress Summary	-18	55	96	-28
-------------------------	-----	----	----	-----

Vessel Stresses (N./mm²):

CIRCUMFERENTIAL PLANE (Stresses parallel to circumferential plane)	Cu Left Outside	Cl Left Inside	Du Right Outside	Dl Right Inside
Inplane Membrane (P)	2	2	2	2
Inplane Bending (P)	16	-16	16	-16
Inplane Membrane (Mc)	-5	-5	5	5
Inplane Bending (Mc)	-55	55	55	-55
Inplane Membrane (ML)	0	0	0	0
Inplane Bending (ML)	0	0	0	0
Inplane Pressure Stress	41	42	41	42

Inplane Stress Summary	0	78	122	-20
------------------------	---	----	-----	-----

Vessel Stresses (N./mm²):

CIRCUMFERENTIAL PLANE (Shear stress normal to circumferential plane)	Cu Left Outside	Cl Left Inside	Du Right Outside	Dl Right Inside
Outplane Shear (Vc)	0	0	0	0
Outplane Shear (Vl)	-1	-1	1	1
Torsional Shear (Mt)	3	3	3	3

Shear Stress Summary	2	2	4	4
----------------------	---	---	---	---

Vessel Stresses (N./mm²):

CIRCUMFERENTIAL PLANE (Stress Intensities)	Cu Left Outside	Cl Left Inside	Du Right Outside	Dl Right Inside
Two * Max Shear Stress	19	78	123	30

Nozzle Stresses (N./mm²):

LONGITUDINAL PLANE (Stresses in the hoop direction)	Au Top Outside	Al Top Inside	Bu Bottom Outside	Bl Bottom Inside
Hoop Membrane (P)	5	5	5	5
Hoop Bending (P)	0	0	0	0
Hoop Membrane (Mc)	0	0	0	0
Hoop Bending (Mc)	0	0	0	0
Hoop Membrane (ML)	-15	-15	15	15
Hoop Bending (ML)	0	0	0	0
Hoop Pressure Stress	16	18	16	18

Hoop Stress Summary	6	8	37	38
---------------------	---	---	----	----

Nozzle Stresses (N./mm²):

LONGITUDINAL PLANE (Stresses Normal to	Au Top	Al Top	Bu Bottom	Bl Bottom
---	-----------	-----------	--------------	--------------



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 217 of 275

Nozzle Calcs.: N1-Shell Inlet

Nozl: 16

6:05pm

Sep 8, 2026

pipe cross-section)	Outside	Inside	Outside	Inside
Axial Membrane (P)	2	2	2	2
Axial Bending (P)	62	-62	62	-62
Axial Membrane (Mc)	0	0	0	0
Axial Bending (Mc)	0	0	0	0
Axial Membrane (ML)	-15	-15	15	15
Axial Bending (ML)	-170	170	170	-170
Axial Pressure Stress	8	8	8	8

Axial Stress Summary	-113	102	259	-207
----------------------	------	-----	-----	------

Nozzle Stresses (N./mm²):

LONGITUDINAL PLANE				
(Shear stress)	Au Outside	Al Inside	Bu Outside	Bl Inside
Shear due to (Vc)	2	2	-2	-2
Shear due to (Vl)	0	0	0	0
Shear due to Torsion	10	10	10	10

Shear Stress Summary	12	12	7	7
----------------------	----	----	---	---

Nozzle Stresses (N./mm²):

LONGITUDINAL PLANE				
(Stress Intensities	Au Outside	Al Inside	Bu Outside	Bl Inside
Two * Max Shear Stress	123	104	260	246

Nozzle Stresses (N./mm²):

CIRCUMFERENTIAL PLANE				
(Stresses in the	Cu Left Outside	Cl Left Inside	Du Right Outside	Dl Right Inside
hoop direction)				
Hoop Membrane (P)	5	5	5	5
Hoop Bending (P)	0	0	0	0
Hoop Membrane (Mc)	-7	-7	7	7
Hoop Bending (Mc)	0	0	0	0
Hoop Membrane (ML)	0	0	0	0
Hoop Bending (ML)	0	0	0	0
Hoop Pressure Stress	16	18	16	18

Hoop Stress Summary	14	15	29	31
---------------------	----	----	----	----

Nozzle Stresses (N./mm²):

CIRCUMFERENTIAL PLANE				
(Stresses Normal to	Cu Left Outside	Cl Left Inside	Du Right Outside	Dl Right Inside
pipe cross-section)				
Axial Membrane (P)	2	2	2	2
Axial Bending (P)	62	-62	62	-62
Axial Membrane (Mc)	-15	-15	15	15
Axial Bending (Mc)	-247	247	247	-247
Axial Membrane (ML)	0	0	0	0
Axial Bending (ML)	0	0	0	0
Axial Pressure Stress	8	8	8	8

Axial Stress Summary	-189	178	335	-283
----------------------	------	-----	-----	------

Nozzle Stresses (N./mm²):

CIRCUMFERENTIAL PLANE				
(Shear stress)	Cu Outside	Cl Inside	Du Outside	Dl Inside
Shear due to (Vc)	0	0	0	0
Shear due to (Vl)	-2	-2	2	2
Shear due to Torsion	10	10	10	10



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 218 of 275

Nozzle Calcs.: N1-Shell Inlet

Nozl: 16 6:05pm

Sep 8, 2026

Shear Stress Summary	7	7	12	12
----------------------	---	---	----	----

Nozzle Stresses (N./mm²):

CIRCUMFERENTIAL PLANE (Stress Intensities	Cu Outside	Cl Inside	Du Outside	Dl Inside
Two * Max Shear Stress	204	179	336	315

Stress Computations at the Edge of the Reinforcing Pad:

Stress Attenuation Diameter (for Insert Plates) per WRC 297:

$$= \text{NozzleOD} + 2 \cdot 1.65 \cdot \sqrt{R_{\text{mean}}(t - ca)}$$

$$= 355.6 + 2 \cdot 1.65 \cdot \sqrt{1250.5(18.0 - 3.0)}$$

$$= 807.561 \text{ mm}$$

WRC 297 Curve Access Parameters:

Vessel Mean Diameter	(D) =	2501.000 mm
Nozzle Outside Diameter	(d) =	595.600 mm
Vessel Thickness used	(T) =	15.000 mm
Nozzle Thickness used	(t) =	132.088 mm
T / t	=	0.114
d / t	=	10.000

$$\lambda = [(d/D) \cdot \sqrt{(D/T)}] = 3.075$$

Note: Re-pad thickness is added to nozzle thickness to simulate the Re-pad.

Nr/P	=	0.062
Mr/P	=	0.105
MØ/P	=	0.031
NØ/P	=	0.044
MrD/Mc	=	0.267
NrDL/Mc	=	0.107
MØd/Mc	=	0.080
NØDL/Mc	=	0.066
MrD/Ml	=	0.078
NrDL/Ml	=	0.079
MØD/Ml	=	0.023
NØDL/Ml	=	0.055

Vessel Stresses (N./mm²):

LONGITUDINAL PLANE (Stresses Normal to longitudinal plane)	Au Top Outside	Al Top Inside	Bu Bottom Outside	Bl Bottom Inside
Outplane Membrane (P)	5	5	5	5
Outplane Bending (P)	21	-21	21	-21
Outplane Membrane (Mc)	0	0	0	0
Outplane Bending (Mc)	0	0	0	0
Outplane Membrane (ML)	-6	-6	6	6
Outplane Bending (ML)	-17	17	17	-17
Normal Pressure Stress	87	88	87	88
Outplane Stress Summary	88	82	138	61

Vessel Stresses (N./mm²):

LONGITUDINAL PLANE (Stresses parallel to longitudinal plane)	Au Top Outside	Al Top Inside	Bu Bottom Outside	Bl Bottom Inside
Inplane Membrane (P)	7	7	7	7
Inplane Bending (P)	73	-73	73	-73



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 219 of 275

Nozzle Calcs.: N1-Shell Inlet

Nozl: 16 6:05pm

Sep 8, 2026

Inplane Membrane (Mc)	0	0	0	0
Inplane Bending (Mc)	0	0	0	0
Inplane Membrane (ML)	-10	-10	10	10
Inplane Bending (ML)	-60	60	60	-60
Inplane Pressure Stress	43	43	43	43

Inplane Stress Summary	54	27	194	-72
------------------------	----	----	-----	-----

Vessel Stresses (N./mm²):

LONGITUDINAL PLANE				
	Au	Al	Bu	Bl
(Shear stress normal to longitudinal plane)	Top Outside	Top Inside	Bottom Outside	Bottom Inside

Outplane Shear (Vc)	1	1	-1	-1
Outplane Shear (Vl)	0	0	0	0
Outplane Shear (Mt)	2	2	2	2

Shear Stress Summary	4	4	1	1
----------------------	---	---	---	---

Vessel Stresses (N./mm²):

LONGITUDINAL PLANE				
(Stress Intensities)	Au	Al	Bu	Bl
	Top Outside	Top Inside	Bottom Outside	Bottom Inside

Two * Max Shear Stress	89	82	194	134
------------------------	----	----	-----	-----

Vessel Stresses (N./mm²):

CIRCUMFERENTIAL PLANE				
(Stresses Normal to circumferential plane)	Cu	Cl	Du	Dl
	Left Outside	Left Inside	Right Outside	Right Inside

Outplane Membrane (P)	5	5	5	5
Outplane Bending (P)	21	-21	21	-21
Outplane Membrane (Mc)	-8	-8	8	8
Outplane Bending (Mc)	-61	61	61	-61
Outplane Membrane (ML)	0	0	0	0
Outplane Bending (ML)	0	0	0	0
Normal Pressure Stress	43	43	43	43

Outplane Stress Summary	0	80	139	-25
-------------------------	---	----	-----	-----

Vessel Stresses (N./mm²):

CIRCUMFERENTIAL PLANE				
(Stresses parallel to circumferential plane)	Cu	Cl	Du	Dl
	Left Outside	Left Inside	Right Outside	Right Inside

Inplane Membrane (P)	7	7	7	7
Inplane Bending (P)	73	-73	73	-73
Inplane Membrane (Mc)	-13	-13	13	13
Inplane Bending (Mc)	-204	204	204	-204
Inplane Membrane (ML)	0	0	0	0
Inplane Bending (ML)	0	0	0	0
Inplane Pressure Stress	87	88	87	88

Inplane Stress Summary	-50	212	386	-169
------------------------	-----	-----	-----	------

Vessel Stresses (N./mm²):

CIRCUMFERENTIAL PLANE				
(Shear stress normal to circumferential plane)	Cu	Cl	Du	Dl
	Left Outside	Left Inside	Right Outside	Right Inside

Outplane Shear (Vc)	0	0	0	0
Outplane Shear (Vl)	-1	-1	1	1
Torsional Shear (Mt)	2	2	2	2



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 220 of 275

Nozzle Calcs.: N1-Shell Inlet

Nozl: 16 6:05pm

Sep 8, 2026

Shear Stress Summary 1 1 4 4

Vessel Stresses (N./mm²):

CIRCUMFERENTIAL PLANE (Stress Intensities)	Cu	Cl	Du	Dl
	Left	Left	Right	Right
	Outside	Inside	Outside	Inside
Two * Max Shear Stress	51	212	386	169

WRC 297 Stress Summations per ASME Sec. VIII Div. 2:

Vessel Stress Summation at Vessel-Nozzle Junction (N./mm²):

Type of Stress Int. Location	Stress Values at							
	Au	Al	Bu	Bl	Cu	Cl	Du	Dl
Circ. Pm (SUS)	41	42	41	42	41	42	41	42
Circ. Pl (SUS)	-10	-10	20	20	-3	-3	7	7
Circ. Q (SUS)	-21	21	45	-45	-39	39	71	-71
Long. Pm (SUS)	20	20	20	20	20	20	20	20
Long. Pl (SUS)	-2	-2	6	6	-2	-2	12	12
Long. Q (SUS)	-24	24	56	-56	-37	37	61	-61
Shear Pm (SUS)	0	0	0	0	0	0	0	0
Shear Pl (SUS)	1	1	-1	-1	-1	-1	1	1
Shear Q (SUS)	3	3	3	3	3	3	3	3
Pm (SUS)	41.0	42.0	41.0	42.0	41.0	42.0	41.0	42.0
Pm+Pl (SUS)	31.1	32.1	61.0	62.0	38.0	39.0	48.1	49.1
Pm+Pl+Q (Total)	17.9	54.3	106.2	47.2	19.2	78.2	119.6	30.8

Vessel Stress Summation Comparison (N./mm²):

Type of Stress Int.	Max. S.I.	S.I. Allowable	Result
Pm (SUS)	42.00	138.00	Passed
Pm+Pl (SUS)	62.03	207.00	Passed
Pm+Pl+Q (TOTAL)	119.60	413.99	Passed

Because only sustained loads were specified, the Pm+Pl+Q allowable was 3 * Smh.

WRC 297 Stress Summations per ASME Sec. VIII Div. 2:

Vessel Stress Summation at Reinforcing Pad Edge (N./mm²):

Type of Stress Int. Location	Stress Values at							
	Au	Al	Bu	Bl	Cu	Cl	Du	Dl
Circ. Pm (SUS)	87	88	87	88	87	88	87	88
Circ. Pl (SUS)	-1	-1	11	11	-6	-6	20	20
Circ. Q (SUS)	4	-4	38	-38	-131	131	277	-277
Long. Pm (SUS)	43	43	43	43	43	43	43	43
Long. Pl (SUS)	-3	-3	17	17	-3	-3	13	13
Long. Q (SUS)	13	-13	133	-133	-40	40	82	-82
Shear Pm (SUS)	0	0	0	0	0	0	0	0
Shear Pl (SUS)	1	1	-1	-1	-1	-1	1	1



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 221 of 275

Nozzle Calcs.: N1-Shell Inlet

Nozl: 16

6:05pm

Sep 8, 2026

Shear Q (SUS)	2	2	2	2	2	2	2	2
Pm (SUS)	87.0	88.0	87.0	88.0	87.0	88.0	87.0	88.0
Pm+Pl (SUS)	86.0	87.0	98.0	99.0	81.0	82.0	107.0	108.0
Pm+Pl+Q (Total)	90.2	83.2	193.0	134.0	50.0	213.0	384.0	169.1

Vessel Stress Summation Comparison (N./mm²):

Type of Stress Int.	Max. S.I.	S.I. Allowable	Result
Pm (SUS)	88.00	138.00	Passed
Pm+Pl (SUS)	108.02	207.00	Passed
Pm+Pl+Q (TOTAL)	384.04	413.99	Passed

Because only sustained loads were specified, the Pm+Pl+Q allowable was 3 * Smh.

WRC 297 Stress Summations per ASME Sec. VIII Div. 2:

Nozzle Stress Summation at Vessel-Nozzle Junction (N./mm²):

Type of Stress Int. Location	Stress Values at							
	Au	Al	Bu	Bl	Cu	Cl	Du	Dl
Circ. Pm (SUS)	16	18	16	18	16	18	16	18
Circ. Pl (SUS)	-10	-10	20	20	-2	-2	12	12
Circ. Q (SUS)	0	0	0	0	0	0	0	0
Long. Pm (SUS)	8	8	8	8	8	8	8	8
Long. Pl (SUS)	-13	-13	17	17	-13	-13	17	17
Long. Q (SUS)	-108	108	232	-232	-185	185	309	-309
Shear Pm (SUS)	0	0	0	0	0	0	0	0
Shear Pl (SUS)	2	2	-2	-2	-2	-2	2	2
Shear Q (SUS)	10	10	10	10	10	10	10	10
Pm (SUS)	16.0	18.0	16.0	18.0	16.0	18.0	16.0	18.0
Pm+Pl (SUS)	11.7	13.6	36.4	38.3	19.4	21.4	29.0	30.7
Pm+Pl+Q (Total)	121.4	104.5	257.3	245.5	204.6	180.4	334.5	314.9

Nozzle Stress Summation Comparison (N./mm²):

Type of Stress Int.	Max. S.I.	S.I. Allowable	Result
Pm (SUS)	18.00	118.00	Passed
Pm+Pl (SUS)	38.30	177.00	Passed
Pm+Pl+Q (TOTAL)	334.47	353.99	Passed

Because only sustained loads were specified, the Pm+Pl+Q allowable was 3 * Smh.

PV Elite is a trademark of Hexagon AB, 2026, All rights reserved.



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 222 of 275

Nozzle Calcs.: N2-Shell Outlet

Nozl: 17

6:05pm

Sep 8, 2026

Input, Nozzle Desc: N2-Shell Outlet

From: 60

Pressure for Reinforcement Calculations	P	1080.770	KPa.
Temperature for Internal Pressure	Temp	130	°C
Design External Pressure	Pext	103.42	KPa.
Temperature for External Pressure	Tempex	130	°C
Parent Material		SA-516 70	
Parent Allowable Stress at Temperature	Sv	138.00	N./mm ²
Parent Allowable Stress At Ambient	Sva	138.00	N./mm ²
Inside Diameter of Cylindrical Shell	D	2480.00	mm
Design Length of Section	L	5600.0000	mm
Shell Finished (Minimum) Thickness	t	18.0000	mm
Shell Internal Corrosion Allowance	c	3.0000	mm
Shell External Corrosion Allowance	co	0.0000	mm
Distance from Bottom/Left Tangent		7820.03	mm
User Entered Minimum Design Metal Temperature		-12.00	°C

Type of Element Connected to the Parent : Nozzle

Material		SA-106 B	
Material UNS Number		K03006	
Material Specification/Type		Smls. pipe	
Allowable Stress at Temperature	Sn	118.00	N./mm ²
Allowable Stress At Ambient	Sna	118.00	N./mm ²
Diameter Basis (for tr calc only)		Outside	
Layout Angle		180.00	deg
Diameter		14.0000	in.
Size and Thickness Basis		Nominal	
Nominal Thickness		60	
Flange Material		SA-105	
Flange Type		Weld Neck Flange	
Corrosion Allowance	can	3.0000	mm
Joint Efficiency of Shell Seam at Nozzle	E1	1.00	
Joint Efficiency of Nozzle Neck	En	1.00	
Outside Projection	ho	300.0000	mm
Weld leg size between Nozzle and Pad/Shell	Wo	10.0000	mm
Groove weld depth between Nozzle and Vessel	Wgnv	16.0000	mm
Inside Projection	h	0.0000	mm
Weld leg size, Inside Element to Shell	Wi	0.0000	mm
Pad Material		SA-516 70	
Pad Allowable Stress at Temperature	Sp	138.00	N./mm ²
Pad Allowable Stress At Ambient	Spa	138.00	N./mm ²
Diameter of Pad along vessel surface	Dp	595.6000	mm
Thickness of Pad	te	16.0000	mm
Weld leg size between Pad and Shell	Wp	14.0000	mm
Groove weld depth between Pad and Nozzle	Wgpn	16.0000	mm
Reinforcing Pad Width		120.0000	mm
Flange Class		150	
Flange Grade		GR 1.1	

The Pressure Design option was MAWP + static head (to the nozzle).



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)


Page 223 of 275

Nozzle Calcs.: N2-Shell Outlet

Nozl: 17

6:05pm

Sep 8, 2026

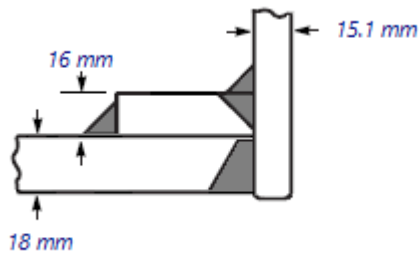

Reinforcement CALCULATION, Description: N2-Shell Outlet

ASME Code, Section VIII, Div. 1, UG-37 to UG-45

Actual Outside Diameter Used in Calculation	14.000 in.
Actual Thickness Used in Calculation	0.594 in.

Nozzle input data check completed without errors.

Reqd thk per UG-37(a) of Cylindrical Shell, tr [Int. Press]
 $= P \cdot R / (S_v \cdot E - 0.6 \cdot P)$ per UG-27 (c)(1)
 $= 1081 \cdot 1243 / (138 \cdot 1 - 0.6 \cdot 1081)$
 $= 9.7815 \text{ mm}$

Reqd thk per UG-37(a) of Nozzle Wall, trn [Int. Press]
 $= P \cdot R_o / (S_n \cdot E + 0.4 \cdot P)$ per Appendix 1-1 (a)(1)
 $= 1081 \cdot 178 / (118 \cdot 1 + 0.4 \cdot 1081)$
 $= 1.6227 \text{ mm}$

Required Nozzle thickness under External Pressure per UG-28 : 1.0591 mm

UG-40, Limits of Reinforcement: [Internal Pressure]

Parallel to Vessel Wall (Diameter Limit)	D1	662.8496 mm
Parallel to Vessel Wall, opening length	d	331.4248 mm
Normal to Vessel Wall (Thickness Limit), pad side Tlwp		37.5000 mm

Weld Strength Reduction Factor [fr1]:
 $= \min(1, S_n / S_v)$
 $= \min(1, 118 / 138)$
 $= 0.855$

Weld Strength Reduction Factor [fr2]:
 $= \min(1, S_n / S_v)$
 $= \min(1, 118 / 138)$
 $= 0.855$

Weld Strength Reduction Factor [fr4]:
 $= \min(1, S_p / S_v)$
 $= \min(1, 138 / 138)$
 $= 1.000$

Weld Strength Reduction Factor [fr3]:
 $= \min(fr2, fr4)$
 $= \min(0.86, 1)$
 $= 0.855$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 224 of 275

Nozzle Calcs.: N2-Shell Outlet

Nozl: 17

6:05pm

Sep 8, 2026

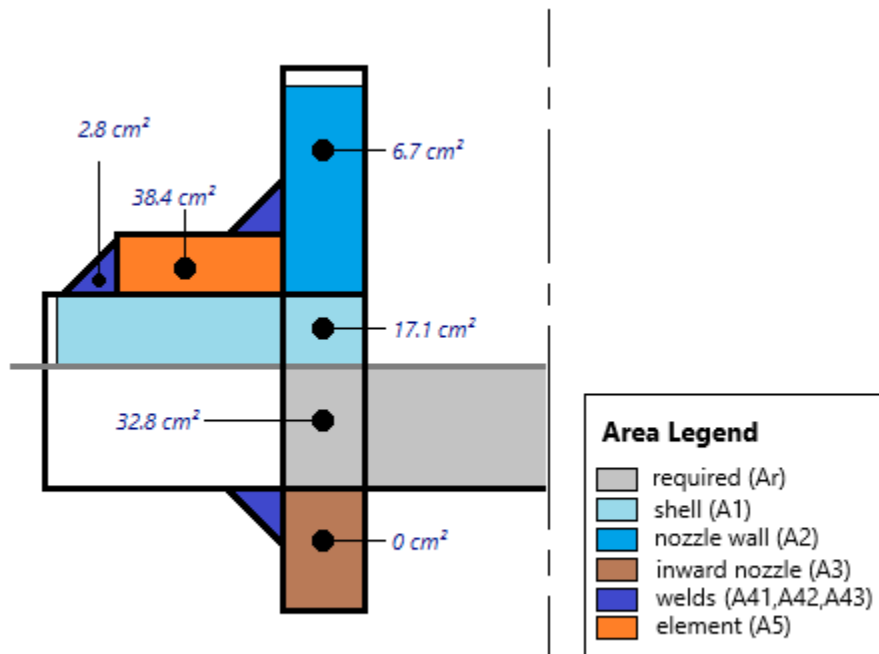


Figure UG 37.1 Nozzle Areas

Results of Nozzle Reinforcement Area Calculations: (cm²)

AREA AVAILABLE, A1 to A5		MAWP	External	Mapnc
Area Required	Ar	32.761	18.822	NA
Area in Shell	A1	17.113	12.332	NA
Area in Nozzle Wall	A2	6.711	7.073	NA
Area in Inward Nozzle	A3	0.000	0.000	NA
Area in Welds	A41+A42+A43	2.815	2.815	NA
Area in Element	A5	38.400	38.400	NA
TOTAL AREA AVAILABLE	Atot	65.039	60.620	NA

The MAWP Case Governs the Analysis.

Nozzle Angle Used in Area Calculations

90.00 degs.

The area available without a pad is Insufficient.
The area available with the given pad is Sufficient.

SELECTION OF POSSIBLE REINFORCING PADS: Diameter Thickness
Based on given Pad Thickness: 393.8623 16.0000 mm
Based on given Pad Diameter: 595.6000 2.5508 mm
Based on Shell or Nozzle Thickness: 396.1761 15.0876 mm

Area Required [A]:
= (d • tr • F + 2 • tn • tr • F • (1 - fr1)) UG-37(c)
= (331 • 9.78 • 1 + 2 • 12.1 • 9.78 • 1 • (1 - 0.86))
= 32.761 cm²

Reinforcement Areas per Figure UG-37.1

Area Available in Shell [A1]:
= d (E1 • t - F • tr) - 2 • tn (E1 • t - F • tr) • (1 - fr1)
= 331 (1 • 15 - 1 • 9.78) - 2 • 12.1
(1 • 15 - 1 • 9.78) • (1 - 0.86)



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 225 of 275

Nozzle Calcs.: N2-Shell Outlet

Nozl: 17

6:05pm

Sep 8, 2026

$$= 17.113 \text{ cm}^2$$

Area Available in Nozzle Wall Projecting Outward [A2]:

$$= (2 \cdot T_{lwp}) \cdot (t_n - t_{rn}) \cdot fr_2$$

$$= (2 \cdot 37.5) \cdot (12.1 - 1.62) \cdot 0.86$$

$$= 6.711 \text{ cm}^2$$

Area Available in Welds [A41 + A42 + A43]:

$$= W_o^2 \cdot fr_3 + (W_i - c_{an}/0.707)^2 \cdot fr_2 + W_p^2 \cdot fr_4$$

$$= 10^2 \cdot 0.86 + (0)^2 \cdot 0.86 + 14^2 \cdot 1$$

$$= 2.815 \text{ cm}^2$$

Area Available in Element [A5]:

$$= (\min(D_p, D_L) - (\text{Nozzle OD})) \cdot (\min(t_p, T_{lwp}, t_e)) \cdot fr_4$$

$$= (596 - 356) \cdot 16 \cdot 1$$

$$= 38.400 \text{ cm}^2$$

UG-45 Minimum Nozzle Neck Thickness Requirement: [Int. Press.]

Wall Thickness for Internal/External pressures $t_a = 4.6227 \text{ mm}$

Wall Thickness per UG16(b), $tr_{16b} = 4.5000 \text{ mm}$

Wall Thickness, shell/head, internal pressure $trb_1 = 12.7815 \text{ mm}$

Wall Thickness $tb_1 = \max(trb_1, tr_{16b}) = 12.7815 \text{ mm}$

Wall Thickness, shell/head, external pressure $trb_2 = 3.9320 \text{ mm}$

Wall Thickness $tb_2 = \max(trb_2, tr_{16b}) = 4.5000 \text{ mm}$

Wall Thickness per table UG-45 $tb_3 = 11.3312 \text{ mm}$

Determine Nozzle Thickness candidate [tb]:

$$= \min[tb_3, \max(tb_1, tb_2)]$$

$$= \min[11.3, \max(12.8, 4.5)]$$

$$= 11.3312 \text{ mm}$$

Minimum Wall Thickness of Nozzle Necks [tUG-45]:

$$= \max(t_a, t_b)$$

$$= \max(4.62, 11.3)$$

$$= 11.3312 \text{ mm}$$

Available Nozzle Neck Thickness = $0.875 \cdot 15.088 = 13.202 \text{ mm} \rightarrow \text{OK}$

Stresses on Nozzle due to External and Pressure Loads per the ASME B31.3 Piping Code, (see 319.4.4 and 302.3.5):

Sustained : 27.5, Allowable : 118.0 N./mm² Passed

Expansion : 0.0, Allowable : 267.5 N./mm² Passed

Occasional : 7.1, Allowable : 156.9 N./mm² Passed

Shear : 15.7, Allowable : 82.6 N./mm² Passed

The number of cycles on this nozzle was assumed to be 7000 or less for the determination of the expansion stress allowable.

Nozzle Junction Minimum Design Metal Temperature (MDMT) Calculations:

Nozzle Neck to Flange Weld, min(Curve:B, Curve:A)

Govrn. thk, $t_g = 13.2$, $t_r = 1.62$, $c = 3 \text{ mm}$, $E^* = 1$

Thickness Ratio = $t_r \cdot E^* / (t_g - c) = 0.16$, Temp. Reduction = 78 °C

Min Metal Temp. w/o impact per UCS-66, Curve A 0 °C

Min Metal Temp. at Required thickness (UCS 66.1) -104 °C

Nozzle Neck to Pad Weld for the Nozzle, Curve: B

Govrn. thk, $t_g = 13.2$, $t_r = 1.62$, $c = 3 \text{ mm}$, $E^* = 1$

Thickness Ratio = $t_r \cdot E^* / (t_g - c) = 0.16$, Temp. Reduction = 78 °C

Min Metal Temp. w/o impact per UCS-66, Curve B -20 °C



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 226 of 275

Nozzle Calcs.: N2-Shell Outlet

Nozl: 17 6:05pm

Sep 8, 2026

Min Metal Temp. at Required thickness (UCS 66.1)	-104 °C
Min Metal Temp. w/o impact per UG-20(f)	-29 °C

Nozzle Neck to Pad Weld for Reinforcement pad, Curve: B

Govrn. thk, tg = 13.2, tr = 1.62, c = 3 mm, E* = 1

Thickness Ratio = $tr * E* / (tg - c) = 0.16$, Temp. Reduction = 78 °C

Min Metal Temp. w/o impact per UCS-66, Curve B	-20 °C
Min Metal Temp. at Required thickness (UCS 66.1)	-104 °C
Min Metal Temp. w/o impact per UG-20(f)	-29 °C

Shell to Pad Weld Junction at Pad OD, Curve: B

Govrn. thk, tg = 16, c = 3 mm, E* = 1

Thickness Ratio = $tr * E* / (tg - c) = 0.65$, Temp. Reduction = 19 °C

Attachment governing, Attachment stress = Shell stress per Code

Min Metal Temp. w/o impact per UCS-66, Curve B	-14 °C
Min Metal Temp. at Required thickness (UCS 66.1)	-33 °C
Min Metal Temp. w/o impact per UG-20(f)	-29 °C

Nozzle-Shell/Head Weld (UCS-66(a)1(b)), Curve: B

Govrn. thk, tg = 13.2, tr = 1.62, c = 3 mm, E* = 1

Thickness Ratio = $tr * E* / (tg - c) = 0.16$, Temp. Reduction = 78 °C

Min Metal Temp. w/o impact per UCS-66, Curve B	-20 °C
Min Metal Temp. at Required thickness (UCS 66.1)	-104 °C
Min Metal Temp. w/o impact per UG-20(f)	-29 °C

Gov. MDMT of the Nozzle	: -104 °C
Gov. MDMT of the Reinforcement Pad	: -33 °C
Gov. MDMT of the nozzle to shell joint welded assembly	: -33 °C

Flange MDMT including Temperature reduction per UCS-66.1:

Unadjusted MDMT of ASME B16.5/47 flanges per UCS-66(c)	-18 °C
Flange MDMT with Temp reduction per UCS-66(b)(1)(-b)	-44 °C

Where the Stress Reduction Ratio per UCS-66(b)(1)(-b) is :

Design Pressure/Ambient Rating = $1080.77 / 1960.01 = 0.551$

Weld Size Calculations, Description: N2-Shell Outlet

Intermediate Calc. for nozzle/shell Welds	Tmin	12.0876 mm
Intermediate Calc. for pad/shell Welds	TminPad	15.0000 mm

Results Per UW-16.1:

	Required Thickness	Actual Thickness
Nozzle Weld	6.0000 = Min per Code	7.0700 = 0.7 * Wo mm
Pad Weld	7.5000 = 0.5 * TminPad	9.8980 = 0.7 * Wp mm

Weld Strength and Weld Loads per UG-41.1, Sketch (a) or (b)

Weld Load [W]:

$= \max(0, (A-A1+2 \cdot tn \cdot fr1 \cdot (E1 \cdot t-tr)) \cdot Sv)$
 $= \max(0, (32.8 - 17.1 + 2 \cdot 12.1 \cdot 0.86 \cdot (1 \cdot 15 - 9.78)) \cdot 138)$
 $= 23537.51 \text{ Kg}$

Note: F is always set to 1.0 throughout the calculation.

Weld Load [W1]:

$= (A2+A5+A4-(Wi-Can/.707)^2 \cdot fr2) \cdot Sv$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 227 of 275

Nozzle Calcs.: N2-Shell Outlet

Nozl: 17

6:05pm

Sep 8, 2026

$$= (6.71 + 38.4 + 2.82 - 0 \cdot 0.86) \cdot 138$$

$$= 67439.80 \text{ Kgf}$$

Weld Load [W2]:

$$= (A2 + A3 + A4 + (2 \cdot t_n \cdot t \cdot fr1)) \cdot Sv$$

$$= (6.71 + 0 + 0.86 + (3.1)) \cdot 138$$

$$= 15010.17 \text{ Kgf}$$

Weld Load [W3]:

$$= (A2 + A3 + A4 + A5 + (2 \cdot t_n \cdot t \cdot fr1)) \cdot S$$

$$= (6.71 + 0 + 2.82 + 38.4 + (3.1)) \cdot 138$$

$$= 71803.03 \text{ Kgf}$$

Strength of Connection Elements for Failure Path Analysis

Shear, Outward Nozzle Weld [Sonw]:

$$= (\pi/2) \cdot Dlo \cdot Wo \cdot 0.49 \cdot Snw$$

$$= (3.14/2.0) \cdot 356 \cdot 10 \cdot 0.49 \cdot 118$$

$$= 32932. \text{ Kgf}$$

Shear, Pad Element Weld [Spew]:

$$= (\pi/2) \cdot DP \cdot WP \cdot 0.49 \cdot SEW$$

$$= (3.14/2.0) \cdot 596 \cdot 14 \cdot 0.49 \cdot 138$$

$$= 90311. \text{ Kgf}$$

Shear, Nozzle Wall [Snw]:

$$= (\pi \cdot (Dlr + Dlo) / 4) \cdot (Thk - Can) \cdot 0.7 \cdot Sn$$

$$= (3.14 \cdot 172) \cdot (15.1 - 3) \cdot 0.7 \cdot 118$$

$$= 54935. \text{ Kgf}$$

Tension, Pad Groove Weld [Tpgw]:

$$= (\pi/2) \cdot Dlo \cdot Wgpn \cdot 0.74 \cdot Seg$$

$$= (3.14/2) \cdot 356 \cdot 16 \cdot 0.74 \cdot 138$$

$$= 93063. \text{ Kgf}$$

Tension, Shell Groove Weld [Tngw]:

$$= (\pi/2) \cdot Dlo \cdot (T - cas) \cdot 0.74 \cdot Sng$$

$$= (3.14/2.0) \cdot 356 \cdot (18 - 3) \cdot 0.74 \cdot 138$$

$$= 87246. \text{ Kgf}$$

See UG-41 and UW-15 for clarification of allowable stresses.

Strength of Failure Paths:

Failure Path [Path 1-1]:

$$= (SPEW + SNW) = (90311 + 54935) = 145246 \text{ Kgf}$$

Failure Path [Path 2-2]:

$$= (Sonw + Tpgw + Tngw + Sinw)$$

$$= (32932 + 93063 + 87246 + 0) = 213241 \text{ Kgf}$$

Failure Path [Path 3-3]:

$$= (Spew + Tngw + Sinw)$$

$$= (90311 + 87246 + 0) = 177557 \text{ Kgf}$$

Summary of Failure Path Calculations:

Path 1-1 = 145245 Kgf, must exceed W = 23537 Kgf	or W1 = 67439 Kgf
Path 2-2 = 213241 Kgf, must exceed W = 23537 Kgf	or W2 = 15010 Kgf
Path 3-3 = 177557 Kgf, must exceed W = 23537 Kgf	or W3 = 71803 Kgf

Maximum Allowable Pressure for this Nozzle at this Location:

Converged Maximum Allowable Pressure in the Operating case: 1607 KPa.

Nozzle is O.K. for the External Pressure: 103 KPa.



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 228 of 275

Nozzle Calcs.: N2-Shell Outlet

Nozl: 17

6:05pm

Sep 8, 2026

The Drop for this Nozzle is : 12.8134 mm

The Cut Length for this Nozzle is, Drop + Ho + H + T : 330.8133 mm

Input Echo, WRC297 Item 1, Description: N2-Shell Outle:

Diameter Basis for Cylindrical Shell	ID	
Shell Internal Corrosion Allowance	3.0000	mm
Shell External Corrosion Allowance	0.0000	mm
Shell Diameter	2480.000	mm
Shell Thickness	18.0000	mm
Shell Stress Concentration Factor	1.000	
Vessel Material	SA-516 70	
Vessel Cold S.I. Allowable	Smc 138.00	N./mm ²
Vessel Hot S.I. Allowable	Smh 138.00	N./mm ²

See ASME VIII Div. 2, 4.1.6.3, for determination of the SPS allowable.

Diameter Basis for Nozzle	OD	
Nozzle Corrosion Allowance	3.0000	mm
Nozzle Diameter	355.600	mm
Nozzle Thickness	15.0876	mm
Nozzle Stress Concentration Factor	1.000	
Nozzle Material	SA-106 B	
Nozzle Cold S.I. Allowable	SNmc 118.00	N./mm ²
Nozzle Hot S.I. Allowable	SNmh 118.00	N./mm ²

See ASME VIII Div. 2, 4.1.6.3, for determination of the SPS allowable.

Diameter of Reinforcing Pad	595.600	mm
Thickness of Reinforcing Pad	16.0000	mm

Note:

External Forces and Moments in WRC 107/537 Convention:
These loads are assumed to be SUSTained loads.

Design Internal Pressure	Dp	1080.77	KPa.
Radial Load	P	-2676.93	Kgf
Circumferential Shear	Vc	1784.62	Kgf
Longitudinal Shear	Vl	1784.62	Kgf
Circumferential Moment	Mc	1748.26	Kg-m.
Longitudinal Moment	Ml	1748.26	Kg-m.
Torsional Moment	Mt	2497.50	Kg-m.

Include Axial Pressure Thrust	No
Include Pressure Stress Indices per Div. 2	No
Local Loads applied at end of Nozzle/Attachment	No

Stress Computations at the Edge of the Nozzle:

Stress Attenuation Diameter (for Insert Plates) per WRC 297:

$$= \text{NozzleOD} + 2 \cdot 1.65 \cdot \sqrt{R_{\text{mean}}(t - ca)}$$

$$= 355.6 + 2 \cdot 1.65 \cdot \sqrt{1258.5(18.0 - 3.0)}$$

$$= 809.005 \text{ mm}$$

WRC 297 Curve Access Parameters:

Vessel Mean Diameter	(D) =	2517.000	mm
Nozzle Outside Diameter	(d) =	355.600	mm
Vessel Thickness used	(T) =	31.000	mm
Nozzle Thickness used	(t) =	12.088	mm
T / t	=	2.565	
d / t	=	29.419	



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 229 of 275

Nozzle Calcs.: N2-Shell Outlet

Nozl: 17 6:05pm

Sep 8,2026

$$\lambda = [(d/D) \cdot \sqrt{(D/T)}] = 1.273$$

Nr/P	=	0.085
Mr/P	=	0.101
M0/P	=	0.076
N0/P	=	0.194
MrD/Mc	=	0.184
NrDL/Mc	=	0.119
M0d/Mc	=	0.165
N0DL/Mc	=	0.154
MrD/M1	=	0.133
NrDL/M1	=	0.094
M0D/M1	=	0.110
N0DL/M1	=	0.303

Vessel Stresses (N./mm²):

LONGITUDINAL PLANE (Stresses Normal to longitudinal plane)	Au Top Outside	Al Top Inside	Bu Bottom Outside	B1 Bottom Inside
Outplane Membrane (P)	5	5	5	5
Outplane Bending (P)	12	-12	12	-12
Outplane Membrane (Mc)	0	0	0	0
Outplane Bending (Mc)	0	0	0	0
Outplane Membrane (ML)	-15	-15	15	15
Outplane Bending (ML)	-33	33	33	-33
Normal Pressure Stress	42	43	42	43
Outplane Stress Summary	12	54	108	18

Vessel Stresses (N./mm²):

LONGITUDINAL PLANE (Stresses parallel to longitudinal plane)	Au Top Outside	Al Top Inside	Bu Bottom Outside	B1 Bottom Inside
Inplane Membrane (P)	2	2	2	2
Inplane Bending (P)	16	-16	16	-16
Inplane Membrane (Mc)	0	0	0	0
Inplane Bending (Mc)	0	0	0	0
Inplane Membrane (ML)	-4	-4	4	4
Inplane Bending (ML)	-40	40	40	-40
Inplane Pressure Stress	21	21	21	21
Inplane Stress Summary	-4	42	85	-28

Vessel Stresses (N./mm²):

LONGITUDINAL PLANE (Shear stress normal to longitudinal plane)	Au Top Outside	Al Top Inside	Bu Bottom Outside	B1 Bottom Inside
Outplane Shear (Vc)	1	1	-1	-1
Outplane Shear (Vl)	0	0	0	0
Outplane Shear (Mt)	3	3	3	3
Shear Stress Summary	4	4	2	2

Vessel Stresses (N./mm²):

LONGITUDINAL PLANE (Stress Intensities)	Au Top Outside	Al Top Inside	Bu Bottom Outside	B1 Bottom Inside
Two * Max Shear Stress	19	56	109	47

Vessel Stresses (N./mm²):



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 230 of 275

Nozzle Calcs.: N2-Shell Outlet

Nozl: 17

6:05pm

Sep 8, 2026

CIRCUMFERENTIAL PLANE (Stresses Normal to circumferential plane)	Cu Left Outside	Cl Left Inside	Du Right Outside	Dl Right Inside
Outplane Membrane (P)	5	5	5	5
Outplane Bending (P)	12	-12	12	-12
Outplane Membrane (Mc)	-7	-7	7	7
Outplane Bending (Mc)	-49	49	49	-49
Outplane Membrane (ML)	0	0	0	0
Outplane Bending (ML)	0	0	0	0
Normal Pressure Stress	21	21	21	21

Outplane Stress Summary	-18	56	96	-27
-------------------------	-----	----	----	-----

Vessel Stresses (N./mm²):

CIRCUMFERENTIAL PLANE (Stresses parallel to circumferential plane)	Cu Left Outside	Cl Left Inside	Du Right Outside	Dl Right Inside
Inplane Membrane (P)	2	2	2	2
Inplane Bending (P)	16	-16	16	-16
Inplane Membrane (Mc)	-5	-5	5	5
Inplane Bending (Mc)	-55	55	55	-55
Inplane Membrane (ML)	0	0	0	0
Inplane Bending (ML)	0	0	0	0
Inplane Pressure Stress	42	43	42	43

Inplane Stress Summary	0	79	123	-19
------------------------	---	----	-----	-----

Vessel Stresses (N./mm²):

CIRCUMFERENTIAL PLANE (Shear stress normal to circumferential plane)	Cu Left Outside	Cl Left Inside	Du Right Outside	Dl Right Inside
Outplane Shear (Vc)	0	0	0	0
Outplane Shear (Vl)	-1	-1	1	1
Torsional Shear (Mt)	3	3	3	3

Shear Stress Summary	2	2	4	4
----------------------	---	---	---	---

Vessel Stresses (N./mm²):

CIRCUMFERENTIAL PLANE (Stress Intensities)	Cu Left Outside	Cl Left Inside	Du Right Outside	Dl Right Inside
Two * Max Shear Stress	19	79	123	30

Nozzle Stresses (N./mm²):

LONGITUDINAL PLANE (Stresses in the hoop direction)	Au Top Outside	Al Top Inside	Bu Bottom Outside	Bl Bottom Inside
Hoop Membrane (P)	5	5	5	5
Hoop Bending (P)	0	0	0	0
Hoop Membrane (Mc)	0	0	0	0
Hoop Bending (Mc)	0	0	0	0
Hoop Membrane (ML)	-15	-15	15	15
Hoop Bending (ML)	0	0	0	0
Hoop Pressure Stress	17	18	17	18

Hoop Stress Summary	7	8	37	38
---------------------	---	---	----	----

Nozzle Stresses (N./mm²):

LONGITUDINAL PLANE (Stresses Normal to	Au Top	Al Top	Bu Bottom	Bl Bottom
---	-----------	-----------	--------------	--------------



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 231 of 275

Nozzle Calcs.: N2-Shell Outlet

Nozl: 17

6:05pm

Sep 8, 2026

pipe cross-section)	Outside	Inside	Outside	Inside
Axial Membrane (P)	2	2	2	2
Axial Bending (P)	62	-62	62	-62
Axial Membrane (Mc)	0	0	0	0
Axial Bending (Mc)	0	0	0	0
Axial Membrane (ML)	-15	-15	15	15
Axial Bending (ML)	-170	170	170	-170
Axial Pressure Stress	8	8	8	8

Axial Stress Summary	-113	103	260	-207
----------------------	------	-----	-----	------

Nozzle Stresses (N./mm²):

LONGITUDINAL PLANE				
(Shear stress)	Au	Al	Bu	Bl
	Outside	Inside	Outside	Inside
Shear due to (Vc)	2	2	-2	-2
Shear due to (Vl)	0	0	0	0
Shear due to Torsion	10	10	10	10

Shear Stress Summary	12	12	7	7
----------------------	----	----	---	---

Nozzle Stresses (N./mm²):

LONGITUDINAL PLANE				
(Stress Intensities	Au	Al	Bu	Bl
	Outside	Inside	Outside	Inside
Two * Max Shear Stress	123	104	260	246

Nozzle Stresses (N./mm²):

CIRCUMFERENTIAL PLANE				
(Stresses in the	Cu	Cl	Du	Dl
hoop direction)	Left	Left	Right	Right
	Outside	Inside	Outside	Inside
Hoop Membrane (P)	5	5	5	5
Hoop Bending (P)	0	0	0	0
Hoop Membrane (Mc)	-7	-7	7	7
Hoop Bending (Mc)	0	0	0	0
Hoop Membrane (ML)	0	0	0	0
Hoop Bending (ML)	0	0	0	0
Hoop Pressure Stress	17	18	17	18

Hoop Stress Summary	14	16	30	31
---------------------	----	----	----	----

Nozzle Stresses (N./mm²):

CIRCUMFERENTIAL PLANE				
(Stresses Normal to	Cu	Cl	Du	Dl
pipe cross-section)	Left	Left	Right	Right
	Outside	Inside	Outside	Inside
Axial Membrane (P)	2	2	2	2
Axial Bending (P)	62	-62	62	-62
Axial Membrane (Mc)	-15	-15	15	15
Axial Bending (Mc)	-247	247	247	-247
Axial Membrane (ML)	0	0	0	0
Axial Bending (ML)	0	0	0	0
Axial Pressure Stress	8	8	8	8

Axial Stress Summary	-189	179	336	-283
----------------------	------	-----	-----	------

Nozzle Stresses (N./mm²):

CIRCUMFERENTIAL PLANE				
(Shear stress)	Cu	Cl	Du	Dl
	Outside	Inside	Outside	Inside
Shear due to (Vc)	0	0	0	0
Shear due to (Vl)	-2	-2	2	2
Shear due to Torsion	10	10	10	10



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 232 of 275

Nozzle Calcs.: N2-Shell Outlet

Nozl: 17 6:05pm

Sep 8, 2026

Shear Stress Summary	7	7	12	12
----------------------	---	---	----	----

Nozzle Stresses (N/mm²):

CIRCUMFERENTIAL PLANE (Stress Intensities	Cu Outside	Cl Inside	Du Outside	Dl Inside
Two * Max Shear Stress	204	179	336	315

Stress Computations at the Edge of the Reinforcing Pad:

Stress Attenuation Diameter (for Insert Plates) per WRC 297:

$$= \text{NozzleOD} + 2 \cdot 1.65 \cdot \sqrt{R_{\text{mean}}(t - c_a)}$$

$$= 355.6 + 2 \cdot 1.65 \cdot \sqrt{1250.5(18.0 - 3.0)}$$

$$= 807.561 \text{ mm}$$

WRC 297 Curve Access Parameters:

Vessel Mean Diameter	(D) =	2501.000 mm
Nozzle Outside Diameter	(d) =	595.600 mm
Vessel Thickness used	(T) =	15.000 mm
Nozzle Thickness used	(t) =	132.088 mm
T / t	=	0.114
d / t	=	10.000

$$\lambda = [(d/D) \cdot \sqrt{(D/T)}] = 3.075$$

Note: Re-pad thickness is added to nozzle thickness to simulate the Re-pad.

Nr/P	=	0.062
Mr/P	=	0.105
M0/P	=	0.031
N0/P	=	0.044
MrD/Mc	=	0.267
NrDL/Mc	=	0.107
M0d/Mc	=	0.080
N0DL/Mc	=	0.066
MrD/Ml	=	0.078
NrDL/Ml	=	0.079
M0D/Ml	=	0.023
N0DL/Ml	=	0.055

Vessel Stresses (N/mm²):

LONGITUDINAL PLANE (Stresses Normal to longitudinal plane)	Au Top Outside	Al Top Inside	Bu Bottom Outside	Bl Bottom Inside
Outplane Membrane (P)	5	5	5	5
Outplane Bending (P)	21	-21	21	-21
Outplane Membrane (Mc)	0	0	0	0
Outplane Bending (Mc)	0	0	0	0
Outplane Membrane (ML)	-6	-6	6	6
Outplane Bending (ML)	-17	17	17	-17
Normal Pressure Stress	89	90	89	90
Outplane Stress Summary	90	84	140	63

Vessel Stresses (N/mm²):

LONGITUDINAL PLANE (Stresses parallel to longitudinal plane)	Au Top Outside	Al Top Inside	Bu Bottom Outside	Bl Bottom Inside
Inplane Membrane (P)	7	7	7	7
Inplane Bending (P)	73	-73	73	-73



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 233 of 275

Nozzle Calcs.: N2-Shell Outlet

Nozl: 17 6:05pm

Sep 8, 2026

Inplane Membrane (Mc)	0	0	0	0
Inplane Bending (Mc)	0	0	0	0
Inplane Membrane (ML)	-10	-10	10	10
Inplane Bending (ML)	-60	60	60	-60
Inplane Pressure Stress	44	44	44	44

Inplane Stress Summary	55	28	195	-71
------------------------	----	----	-----	-----

Vessel Stresses (N./mm²):

LONGITUDINAL PLANE	Au	Al	Bu	Bl
(Shear stress normal to longitudinal plane)	Top Outside	Top Inside	Bottom Outside	Bottom Inside

Outplane Shear (Vc)	1	1	-1	-1
Outplane Shear (Vl)	0	0	0	0
Outplane Shear (Mt)	2	2	2	2

Shear Stress Summary	4	4	1	1
----------------------	---	---	---	---

Vessel Stresses (N./mm²):

LONGITUDINAL PLANE	Au	Al	Bu	Bl
(Stress Intensities)	Top Outside	Top Inside	Bottom Outside	Bottom Inside

Two * Max Shear Stress	91	84	195	135
------------------------	----	----	-----	-----

Vessel Stresses (N./mm²):

CIRCUMFERENTIAL PLANE	Cu	Cl	Du	Dl
(Stresses Normal to circumferential plane)	Left Outside	Left Inside	Right Outside	Right Inside

Outplane Membrane (P)	5	5	5	5
Outplane Bending (P)	21	-21	21	-21
Outplane Membrane (Mc)	-8	-8	8	8
Outplane Bending (Mc)	-61	61	61	-61
Outplane Membrane (ML)	0	0	0	0
Outplane Bending (ML)	0	0	0	0
Normal Pressure Stress	44	44	44	44

Outplane Stress Summary	1	81	140	-24
-------------------------	---	----	-----	-----

Vessel Stresses (N./mm²):

CIRCUMFERENTIAL PLANE	Cu	Cl	Du	Dl
(Stresses parallel to circumferential plane)	Left Outside	Left Inside	Right Outside	Right Inside

Inplane Membrane (P)	7	7	7	7
Inplane Bending (P)	73	-73	73	-73
Inplane Membrane (Mc)	-13	-13	13	13
Inplane Bending (Mc)	-204	204	204	-204
Inplane Membrane (ML)	0	0	0	0
Inplane Bending (ML)	0	0	0	0
Inplane Pressure Stress	89	90	89	90

Inplane Stress Summary	-48	214	388	-167
------------------------	-----	-----	-----	------

Vessel Stresses (N./mm²):

CIRCUMFERENTIAL PLANE	Cu	Cl	Du	Dl
(Shear stress normal to circumferential plane)	Left Outside	Left Inside	Right Outside	Right Inside

Outplane Shear (Vc)	0	0	0	0
Outplane Shear (Vl)	-1	-1	1	1
Torsional Shear (Mt)	2	2	2	2



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 234 of 275

Nozzle Calcs.: N2-Shell Outlet

Nozl: 17 6:05pm

Sep 8, 2026

Shear Stress Summary 1 1 4 4

Vessel Stresses (N./mm²):

CIRCUMFERENTIAL PLANE (Stress Intensities)	Cu Left Outside	Cl Left Inside	Du Right Outside	Dl Right Inside
Two * Max Shear Stress	50	214	388	167

WRC 297 Stress Summations per ASME Sec. VIII Div. 2:

Vessel Stress Summation at Vessel-Nozzle Junction (N./mm²):

Type of Stress Int. Location	Stress Values at							
	Au	Al	Bu	Bl	Cu	Cl	Du	Dl
Circ. Pm (SUS)	42	43	42	43	42	43	42	43
Circ. Pl (SUS)	-10	-10	20	20	-3	-3	7	7
Circ. Q (SUS)	-21	21	45	-45	-39	39	71	-71
Long. Pm (SUS)	21	21	21	21	21	21	21	21
Long. Pl (SUS)	-2	-2	6	6	-2	-2	12	12
Long. Q (SUS)	-24	24	56	-56	-37	37	61	-61
Shear Pm (SUS)	0	0	0	0	0	0	0	0
Shear Pl (SUS)	1	1	-1	-1	-1	-1	1	1
Shear Q (SUS)	3	3	3	3	3	3	3	3
Pm (SUS)	42.0	43.0	42.0	43.0	42.0	43.0	42.0	43.0
Pm+Pl (SUS)	32.1	33.1	62.0	63.0	39.0	40.0	49.1	50.1
Pm+Pl+Q (Total)	17.9	55.3	107.2	47.2	18.4	79.2	120.6	29.8

Vessel Stress Summation Comparison (N./mm²):

Type of Stress Int.	Max. S.I.	S.I. Allowable	Result
Pm (SUS)	43.00	138.00	Passed
Pm+Pl (SUS)	63.03	207.00	Passed
Pm+Pl+Q (TOTAL)	120.60	413.99	Passed

Because only sustained loads were specified, the Pm+Pl+Q allowable was 3 * Smh.

WRC 297 Stress Summations per ASME Sec. VIII Div. 2:

Vessel Stress Summation at Reinforcing Pad Edge (N./mm²):

Type of Stress Int. Location	Stress Values at							
	Au	Al	Bu	Bl	Cu	Cl	Du	Dl
Circ. Pm (SUS)	89	90	89	90	89	90	89	90
Circ. Pl (SUS)	-1	-1	11	11	-6	-6	20	20
Circ. Q (SUS)	4	-4	38	-38	-131	131	277	-277
Long. Pm (SUS)	44	44	44	44	44	44	44	44
Long. Pl (SUS)	-3	-3	17	17	-3	-3	13	13
Long. Q (SUS)	13	-13	133	-133	-40	40	82	-82
Shear Pm (SUS)	0	0	0	0	0	0	0	0
Shear Pl (SUS)	1	1	-1	-1	-1	-1	1	1



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 235 of 275

Nozzle Calcs.: N2-Shell Outlet

Nozl: 17

6:05pm

Sep 8, 2026

Shear Q (SUS)	2	2	2	2	2	2	2	2
Pm (SUS)	89.0	90.0	89.0	90.0	89.0	90.0	89.0	90.0
Pm+Pl (SUS)	88.0	89.0	100.0	101.0	83.0	84.0	109.0	110.0
Pm+Pl+Q (Total)	92.2	85.2	194.0	135.0	49.0	215.0	386.0	167.1

Vessel Stress Summation Comparison (N./mm²):

Type of Stress Int.	Max. S.I.	S.I. Allowable	Result
Pm (SUS)	90.00	138.00	Passed
Pm+Pl (SUS)	110.02	207.00	Passed
Pm+Pl+Q (TOTAL)	386.04	413.99	Passed

Because only sustained loads were specified, the Pm+Pl+Q allowable was 3 * Smh.

WRC 297 Stress Summations per ASME Sec. VIII Div. 2:

Nozzle Stress Summation at Vessel-Nozzle Junction (N./mm²):

Type of Stress Int. Location	Stress Values at							
	Au	Al	Bu	Bl	Cu	Cl	Du	Dl
Circ. Pm (SUS)	17	18	17	18	17	18	17	18
Circ. Pl (SUS)	-10	-10	20	20	-2	-2	12	12
Circ. Q (SUS)	0	0	0	0	0	0	0	0
Long. Pm (SUS)	8	8	8	8	8	8	8	8
Long. Pl (SUS)	-13	-13	17	17	-13	-13	17	17
Long. Q (SUS)	-108	108	232	-232	-185	185	309	-309
Shear Pm (SUS)	0	0	0	0	0	0	0	0
Shear Pl (SUS)	2	2	-2	-2	-2	-2	2	2
Shear Q (SUS)	10	10	10	10	10	10	10	10
Pm (SUS)	17.0	18.0	17.0	18.0	17.0	18.0	17.0	18.0
Pm+Pl (SUS)	12.6	13.6	37.3	38.3	20.4	21.4	29.8	30.7
Pm+Pl+Q (Total)	122.4	104.5	257.3	245.5	205.6	180.4	334.5	314.9

Nozzle Stress Summation Comparison (N./mm²):

Type of Stress Int.	Max. S.I.	S.I. Allowable	Result
Pm (SUS)	18.00	118.00	Passed
Pm+Pl (SUS)	38.30	177.00	Passed
Pm+Pl+Q (TOTAL)	334.47	353.99	Passed

Because only sustained loads were specified, the Pm+Pl+Q allowable was 3 * Smh.

PV Elite is a trademark of Hexagon AB, 2026, All rights reserved.



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 236 of 275

Nozzle Calcs.: N4-Tube Outlet

Nozl: 18

6:05pm

Sep 8, 2026

Input, Nozzle Desc: N4-Tube Outlet

From: 90

Pressure for Reinforcement Calculations	P	1080.770	KPa.
Temperature for Internal Pressure	Temp	130	°C
Design External Pressure	Pext	103.42	KPa.
Temperature for External Pressure	Tempex	130	°C
Parent Material		SA-516 70	
Parent Allowable Stress at Temperature	Sv	138.00	N./mm ²
Parent Allowable Stress At Ambient	Sva	138.00	N./mm ²
Inside Diameter of Cylindrical Shell	D	2480.00	mm
Design Length of Section	L	1757.4667	mm
Shell Finished (Minimum) Thickness	t	20.0000	mm
Shell Internal Corrosion Allowance	c	3.0000	mm
Shell External Corrosion Allowance	co	0.0000	mm
Distance from Bottom/Left Tangent		9545.70	mm
User Entered Minimum Design Metal Temperature		-12.00	°C

Type of Element Connected to the Parent : Nozzle

Material		SA-516 70	
Material UNS Number		K02700	
Material Specification/Type		Plate	
Allowable Stress at Temperature	Sn	138.00	N./mm ²
Allowable Stress At Ambient	Sna	138.00	N./mm ²
Diameter Basis (for tr calc only)		Outside	
Layout Angle		180.00	deg
Diameter		24.0157	in.
Size and Thickness Basis		Actual	
Actual Thickness	tn	17.4498	mm
Flange Material		SA-105	
Flange Type		Weld Neck Flange	
Corrosion Allowance	can	3.0000	mm
Joint Efficiency of Shell Seam at Nozzle	E1	1.00	
Joint Efficiency of Nozzle Neck	En	1.00	
Outside Projection	ho	400.0000	mm
Weld leg size between Nozzle and Pad/Shell	Wo	10.0000	mm
Groove weld depth between Nozzle and Vessel	Wgnv	16.0000	mm
Inside Projection	h	0.0000	mm
Weld leg size, Inside Element to Shell	Wi	0.0000	mm
Pad Material		SA-516 70	
Pad Allowable Stress at Temperature	Sp	138.00	N./mm ²
Pad Allowable Stress At Ambient	Spa	138.00	N./mm ²
Diameter of Pad along vessel surface	Dp	1030.0000	mm
Thickness of Pad	te	20.0000	mm
Weld leg size between Pad and Shell	Wp	16.0000	mm
Groove weld depth between Pad and Nozzle	Wgpn	20.0000	mm
Reinforcing Pad Width		210.0006	mm
Flange Class		150	
Flange Grade		GR 1.1	

The Pressure Design option was MAWP + static head (to the nozzle).



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)


Page 237 of 275

Nozzle Calcs.: N4-Tube Outlet

Nozl: 18

6:05pm

Sep 8, 2026

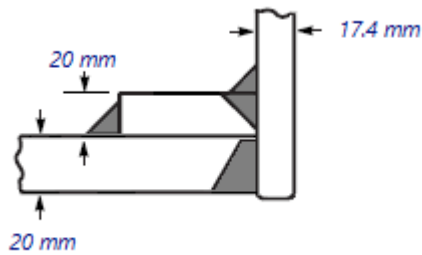

Reinforcement CALCULATION, Description: N4-Tube Outlet

ASME Code, Section VIII, Div. 1, UG-37 to UG-45

Actual Outside Diameter Used in Calculation	24.016 in.
Actual Thickness Used in Calculation	0.687 in.

Nozzle input data check completed without errors.

Reqd thk per UG-37(a) of Cylindrical Shell, tr [Int. Press]
 $= P \cdot R / (S_v \cdot E - 0.6 \cdot P)$ per UG-27 (c)(1)
 $= 1081 \cdot 1243 / (138 \cdot 1 - 0.6 \cdot 1081)$
 $= 9.7815 \text{ mm}$

Reqd thk per UG-37(a) of Nozzle Wall, trn [Int. Press]
 $= P \cdot R_o / (S_n \cdot E + 0.4 \cdot P)$ per Appendix 1-1 (a)(1)
 $= 1081 \cdot 305 / (138 \cdot 1 + 0.4 \cdot 1081)$
 $= 2.3814 \text{ mm}$

Required Nozzle thickness under External Pressure per UG-28 : 1.6380 mm

UG-40, Limits of Reinforcement: [Internal Pressure]

Parallel to Vessel Wall (Diameter Limit)	D1	1162.1984 mm
Parallel to Vessel Wall, opening length	d	581.0992 mm
Normal to Vessel Wall (Thickness Limit), pad side Tlwp		42.5000 mm

Weld Strength Reduction Factor [fr1]:
 $= \min(1, S_n / S_v)$
 $= \min(1, 138 / 138)$
 $= 1.000$

Weld Strength Reduction Factor [fr2]:
 $= \min(1, S_n / S_v)$
 $= \min(1, 138 / 138)$
 $= 1.000$

Weld Strength Reduction Factor [fr4]:
 $= \min(1, S_p / S_v)$
 $= \min(1, 138 / 138)$
 $= 1.000$

Weld Strength Reduction Factor [fr3]:
 $= \min(fr2, fr4)$
 $= \min(1, 1)$
 $= 1.000$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 238 of 275

Nozzle Calcs.: N4-Tube Outlet

Nozl: 18

6:05pm

Sep 8, 2026

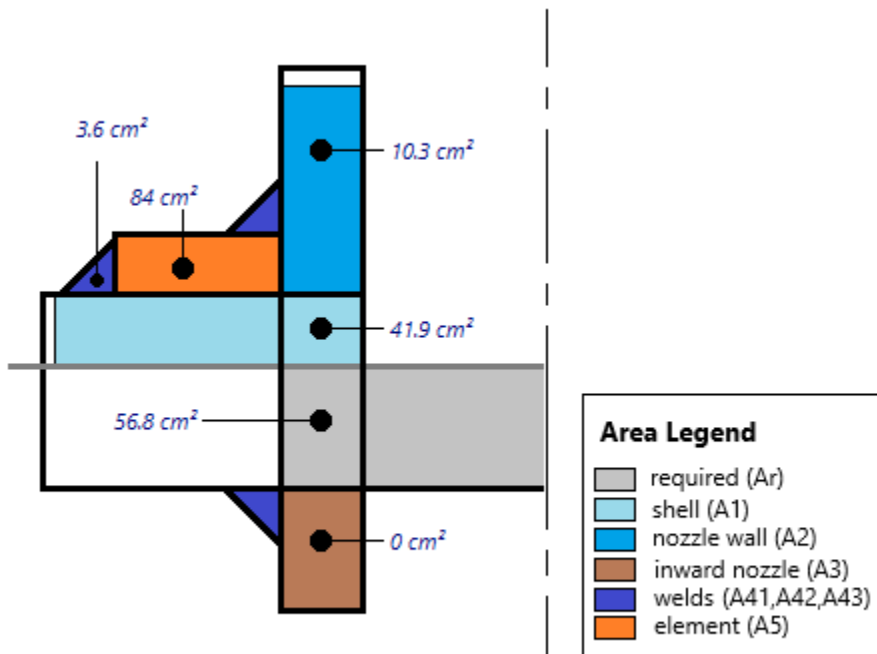


Figure UG 37.1 Nozzle Areas

Results of Nozzle Reinforcement Area Calculations: (cm²)

AREA AVAILABLE, A1 to A5		MAWP	External	Mapnc
Area Required	Ar	56.840	20.151	NA
Area in Shell	A1	41.947	58.486	NA
Area in Nozzle Wall	A2	10.258	10.890	NA
Area in Inward Nozzle	A3	0.000	0.000	NA
Area in Welds	A41+A42+A43	3.560	3.560	NA
Area in Element	A5	84.000	84.000	NA
TOTAL AREA AVAILABLE	Atot	139.765	156.936	NA

The MAWP Case Governs the Analysis.

Nozzle Angle Used in Area Calculations

90.00 degs.

The area available without a pad is Insufficient.

The area available with the given pad is Sufficient.

SELECTION OF POSSIBLE REINFORCING PADS:	Diameter	Thickness
Based on given Pad Thickness:	615.3740	20.0000 mm
Based on given Pad Diameter:	1030.0000	0.2560 mm
Based on Shell or Nozzle Thickness:	616.1595	17.4498 mm

Area Required [A]:

$$= (d \cdot tr \cdot F + 2 \cdot tn \cdot tr \cdot F \cdot (1 - fr1)) \text{ UG-37(c)}$$

$$= (581 \cdot 9.78 \cdot 1 + 2 \cdot 14.4 \cdot 9.78 \cdot 1 \cdot (1 - 1))$$

$$= 56.840 \text{ cm}^2$$

Reinforcement Areas per Figure UG-37.1

Area Available in Shell [A1]:

$$= d (E1 \cdot t - F \cdot tr) - 2 \cdot tn (E1 \cdot t - F \cdot tr) \cdot (1 - fr1)$$

$$= 581 (1 \cdot 17 - 1 \cdot 9.78) - 2 \cdot 14.4$$

$$(1 \cdot 17 - 1 \cdot 9.78) \cdot (1 - 1)$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 239 of 275

Nozzle Calcs.: N4-Tube Outlet

Noz1: 18

6:05pm

Sep 8, 2026

$$= 41.947 \text{ cm}^2$$

Area Available in Nozzle Wall Projecting Outward [A2]:

$$= (2 \cdot Tlwp) \cdot (tn - trn) \cdot fr2$$

$$= (2 \cdot 42.5) \cdot (14.4 - 2.38) \cdot 1$$

$$= 10.258 \text{ cm}^2$$

Area Available in Welds [A41 + A42 + A43]:

$$= Wo^2 \cdot fr3 + (Wi-can/0.707)^2 \cdot fr2 + Wp^2 \cdot fr4$$

$$= 10^2 \cdot 1 + (0)^2 \cdot 1 + 16^2 \cdot 1$$

$$= 3.560 \text{ cm}^2$$

Area Available in Element [A5]:

$$= (\min(Dp, DL) - (\text{Nozzle OD})) \cdot (\min(tp, Tlwp, te)) \cdot fr4$$

$$= (1030 - 610) \cdot 20 \cdot 1$$

$$= 84.000 \text{ cm}^2$$

UG-45 Minimum Nozzle Neck Thickness Requirement: [Int. Press.]

Wall Thickness for Internal/External pressures $ta = 5.3814 \text{ mm}$

Wall Thickness per UG16(b), $tr16b = 4.5000 \text{ mm}$

Wall Thickness, shell/head, internal pressure $trb1 = 12.7815 \text{ mm}$

Wall Thickness $tb1 = \max(trb1, tr16b) = 12.7815 \text{ mm}$

Wall Thickness, shell/head, external pressure $trb2 = 3.9320 \text{ mm}$

Wall Thickness $tb2 = \max(trb2, tr16b) = 4.5000 \text{ mm}$

Wall Thickness per table UG-45 $tb3 = 11.3312 \text{ mm}$

Determine Nozzle Thickness candidate [tb]:

$$= \min[tb3, \max(tb1, tb2)]$$

$$= \min[11.3, \max(12.8, 4.5)]$$

$$= 11.3312 \text{ mm}$$

Minimum Wall Thickness of Nozzle Necks [tUG-45]:

$$= \max(ta, tb)$$

$$= \max(5.38, 11.3)$$

$$= 11.3312 \text{ mm}$$

Available Nozzle Neck Thickness = 17.4498 mm -> OK

Stresses on Nozzle due to External and Pressure Loads per the ASME B31.3 Piping Code, (see 319.4.4 and 302.3.5):

Sustained : 27.1, Allowable : 138.0 N./mm² Passed

Expansion : 0.0, Allowable : 317.9 N./mm² Passed

Occasional : 10.6, Allowable : 183.5 N./mm² Passed

Shear : 12.6, Allowable : 96.6 N./mm² Passed

The number of cycles on this nozzle was assumed to be 7000 or less for the determination of the expansion stress allowable.

Nozzle Junction Minimum Design Metal Temperature (MDMT) Calculations:

Nozzle Neck to Flange Weld, min(Curve:B, Curve:A)

Govrn. thk, $t_g = 17.4$, $t_r = 2.38$, $c = 3 \text{ mm}$, $E^* = 1$

Thickness Ratio = $t_r \cdot E^* / (t_g - c) = 0.16$, Temp. Reduction = 78 °C

Min Metal Temp. w/o impact per UCS-66, Curve A 8 °C

Min Metal Temp per UCS-66 and UCS-68(c), PWHT credit -8 °C

Min Metal Temp. at Required thickness (UCS 66.1) -104 °C

Nozzle Neck to Pad Weld for the Nozzle, Curve: B

Govrn. thk, $t_g = 17.4$, $t_r = 2.38$, $c = 3 \text{ mm}$, $E^* = 1$

Thickness Ratio = $t_r \cdot E^* / (t_g - c) = 0.16$, Temp. Reduction = 78 °C



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 240 of 275

Nozzle Calcs.: N4-Tube Outlet

Nozl: 18 6:05pm

Sep 8, 2026

Min Metal Temp. w/o impact per UCS-66, Curve B	-11 °C
Min Metal Temp per UCS-66 and UCS-68(c), PWHT credit	-28 °C
Min Metal Temp. at Required thickness (UCS 66.1)	-104 °C
Min Metal Temp. w/o impact per UG-20(f)	-29 °C

Nozzle Neck to Pad Weld for Reinforcement pad, Curve: B

Govrn. thk, tg = 17.4, tr = 2.38, c = 3 mm, E* = 1

Thickness Ratio = $tr * E^* / (tg - c) = 0.16$, Temp. Reduction = 78 °C

Min Metal Temp. w/o impact per UCS-66, Curve B	-11 °C
Min Metal Temp per UCS-66 and UCS-68(c), PWHT credit	-28 °C
Min Metal Temp. at Required thickness (UCS 66.1)	-104 °C
Min Metal Temp. w/o impact per UG-20(f)	-29 °C

Shell to Pad Weld Junction at Pad OD, Curve: B

Govrn. thk, tg = 20, tr = 9.78, c = 3 mm, E* = 1

Thickness Ratio = $tr * E^* / (tg - c) = 0.58$, Temp. Reduction = 24 °C

Min Metal Temp. w/o impact per UCS-66, Curve B	-7 °C
Min Metal Temp per UCS-66 and UCS-68(c), PWHT credit	-24 °C
Min Metal Temp. at Required thickness (UCS 66.1)	-48 °C
Min Metal Temp. w/o impact per UG-20(f)	-29 °C

Nozzle-Shell/Head Weld (UCS-66(a)(b)), Curve: B

Govrn. thk, tg = 17.4, tr = 2.38, c = 3 mm, E* = 1

Thickness Ratio = $tr * E^* / (tg - c) = 0.16$, Temp. Reduction = 78 °C

Min Metal Temp. w/o impact per UCS-66, Curve B	-11 °C
Min Metal Temp per UCS-66 and UCS-68(c), PWHT credit	-28 °C
Min Metal Temp. at Required thickness (UCS 66.1)	-104 °C
Min Metal Temp. w/o impact per UG-20(f)	-29 °C

Gov. MDMT of the Nozzle	: -104 °C
Gov. MDMT of the Reinforcement Pad	: -48 °C
Gov. MDMT of the nozzle to shell joint welded assembly	: -48 °C

Flange MDMT including Temperature reduction per UCS-66.1:

Unadjusted MDMT of ASME B16.5/47 flanges per UCS-66(c)	-18 °C
Flange MDMT with Temp reduction per UCS-66(b)(1)(-b)	-44 °C

Where the Stress Reduction Ratio per UCS-66(b)(1)(-b) is :

Design Pressure/Ambient Rating = $1080.77 / 1960.01 = 0.551$

Weld Size Calculations, Description: N4-Tube Outlet

Intermediate Calc. for nozzle/shell Welds	Tmin	14.4498 mm
Intermediate Calc. for pad/shell Welds	TminPad	17.0000 mm

Results Per UW-16.1:

	Required Thickness	Actual Thickness
Nozzle Weld	$6.0000 = \text{Min per Code}$	$7.0700 = 0.7 * W_o \text{ mm}$
Pad Weld	$8.5000 = 0.5 * T_{minPad}$	$11.3120 = 0.7 * W_p \text{ mm}$

Weld Strength and Weld Loads per UG-41.1, Sketch (a) or (b)

Weld Load [W]:

$$= \max(0, (A - A_1 + 2 \cdot t_n \cdot f_r \cdot (E_1 \cdot t - t_r)) S_v)$$

$$= \max(0, (56.8 - 41.9 + 2 \cdot 14.4 \cdot 1 \cdot (1 \cdot 17 - 9.78)) 138)$$

$$= 23892.57 \text{ Kg}$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 241 of 275

Nozzle Calcs.: N4-Tube Outlet

Nozl: 18

6:05pm

Sep 8, 2026

Note: F is always set to 1.0 throughout the calculation.

Weld Load [W1]:

$$= (A2 + A5 + A4 - (W_i - \text{Can} / .707)^2 \cdot \text{fr}2) \cdot S_v$$

$$= (10.3 + 84 + 3.56 - 0 \cdot 1) \cdot 138$$

$$= 137645.86 \text{ Kgf}$$

Weld Load [W2]:

$$= (A2 + A3 + A4 + (2 \cdot t_n \cdot t \cdot \text{fr}1)) \cdot S_v$$

$$= (10.3 + 0 + 1 + (4.91)) \cdot 138$$

$$= 22755.27 \text{ Kgf}$$

Weld Load [W3]:

$$= (A2 + A3 + A4 + A5 + (2 \cdot t_n \cdot t \cdot \text{fr}1)) \cdot S$$

$$= (10.3 + 0 + 3.56 + 84 + (4.91)) \cdot 138$$

$$= 144559.12 \text{ Kgf}$$

Strength of Connection Elements for Failure Path Analysis

Shear, Outward Nozzle Weld [Sonw]:

$$= (\pi/2) \cdot D_{lo} \cdot W_o \cdot 0.49 \cdot S_{nw}$$

$$= (3.14/2.0) \cdot 610 \cdot 10 \cdot 0.49 \cdot 138$$

$$= 66067. \text{ Kgf}$$

Shear, Pad Element Weld [Spew]:

$$= (\pi/2) \cdot D_P \cdot W_P \cdot 0.49 \cdot S_{EW}$$

$$= (3.14/2.0) \cdot 1030 \cdot 16 \cdot 0.49 \cdot 138$$

$$= 178491. \text{ Kgf}$$

Shear, Nozzle Wall [Snw]:

$$= (\pi \cdot (D_{lr} + D_{lo})/4) \cdot (Thk - \text{Can}) \cdot 0.7 \cdot S_n$$

$$= (3.14 \cdot 298) \cdot (17.4 - 3) \cdot 0.7 \cdot 138$$

$$= 133150. \text{ Kgf}$$

Tension, Pad Groove Weld [Tpgw]:

$$= (\pi/2) \cdot D_{lo} \cdot W_{gpn} \cdot 0.74 \cdot S_{eg}$$

$$= (3.14/2) \cdot 610 \cdot 20 \cdot 0.74 \cdot 138$$

$$= 199551. \text{ Kgf}$$

Tension, Shell Groove Weld [Tngw]:

$$= (\pi/2) \cdot D_{lo} \cdot W_{gnvi} \cdot 0.74 \cdot S_{ng}$$

$$= (3.14/2.0) \cdot 610 \cdot (16 - 0) \cdot 0.74 \cdot 138$$

$$= 159640. \text{ Kgf}$$

See UG-41 and UW-15 for clarification of allowable stresses.

Strength of Failure Paths:

Failure Path [Path 1-1]:

$$= (S_{PEW} + S_{NW}) = (178491 + 133150) = 311640 \text{ Kgf}$$

Failure Path [Path 2-2]:

$$= (S_{onw} + T_{pgw} + T_{ngw} + S_{inw})$$

$$= (66067 + 199551 + 159640 + 0) = 425259 \text{ Kgf}$$

Failure Path [Path 3-3]:

$$= (S_{pew} + T_{ngw} + S_{inw})$$

$$= (178491 + 159640 + 0) = 338131 \text{ Kgf}$$

Summary of Failure Path Calculations:

Path 1-1 = 311640 Kgf, must exceed W = 23892 Kgf	or W1 = 137645 Kgf
Path 2-2 = 425259 Kgf, must exceed W = 23892 Kgf	or W2 = 22755 Kgf
Path 3-3 = 338131 Kgf, must exceed W = 23892 Kgf	or W3 = 144559 Kgf

Maximum Allowable Pressure for this Nozzle at this Location:



PV Elite 28 Licensee: SL User
 FileName : 108-CA-CB_(Top) Page 242 of 275
 Nozzle Calcs.: N4-Tube Outlet Nozl: 18 6:05pm Sep 8,2026

Converged Maximum Allowable Pressure in the Operating case: 1848 KPa.

Note: The MAWP of this junction was limited by the parent Shell/Head.

Nozzle is O.K. for the External Pressure: 103 KPa.

The Drop for this Nozzle is : 38.0952 mm

The Cut Length for this Nozzle is, Drop + Ho + H + T : 458.0952 mm

Percent Elongation Calculations:

% Elongation per Table UG-79-1 ($50 \cdot t_{nom} / R_f \cdot (1 - R_f / R_o)$) 2.945 %

Input Echo, WRC297 Item 1, Description: N4-Tube Outlet:

Diameter Basis for Cylindrical Shell	ID	
Shell Internal Corrosion Allowance	3.0000	mm
Shell External Corrosion Allowance	0.0000	mm
Shell Diameter	2480.000	mm
Shell Thickness	20.0000	mm
Shell Stress Concentration Factor	1.000	
Vessel Material	SA-516 70	
Vessel Cold S.I. Allowable	Smc 138.00	N./mm ²
Vessel Hot S.I. Allowable	Smh 138.00	N./mm ²

See ASME VIII Div. 2, 4.1.6.3, for determination of the SPS allowable.

Diameter Basis for Nozzle	OD	
Nozzle Corrosion Allowance	3.0000	mm
Nozzle Diameter	609.999	mm
Nozzle Thickness	17.4498	mm
Nozzle Stress Concentration Factor	1.000	
Nozzle Material	SA-516 70	
Nozzle Cold S.I. Allowable	SNmc 138.00	N./mm ²
Nozzle Hot S.I. Allowable	SNmh 138.00	N./mm ²

See ASME VIII Div. 2, 4.1.6.3, for determination of the SPS allowable.

Diameter of Reinforcing Pad	1030.000	mm
Thickness of Reinforcing Pad	20.0000	mm

Note:

*External Forces and Moments in WRC 107/537 Convention:
 These loads are assumed to be SUStained loads.*

Design Internal Pressure	Dp	1080.77	KPa.
Radial Load	P	-4589.03	Kgf
Circumferential Shear	Vc	3059.35	Kgf
Longitudinal Shear	Vl	3059.35	Kgf
Circumferential Moment	Mc	5137.73	Kg-m.
Longitudinal Moment	Ml	5137.73	Kg-m.
Torsional Moment	Mt	7339.62	Kg-m.

Include Axial Pressure Thrust	No
Include Pressure Stress Indices per Div. 2	No
Local Loads applied at end of Nozzle/Attachment	No

Stress Computations at the Edge of the Nozzle:

Stress Attenuation Diameter (for Insert Plates) per WRC 297:
 $= \text{NozzleOD} + 2 \cdot 1.65 \cdot \sqrt{R_{mean}(t - ca)}$
 $= 610.0 + 2 \cdot 1.65 \cdot \sqrt{1261.5(20.0 - 3.0)}$
 $= 1093.260 \text{ mm}$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 243 of 275

Nozzle Calcs.: N4-Tube Outlet

Nozl: 18 6:05pm

Sep 8, 2026

WRC 297 Curve Access Parameters:

Vessel Mean Diameter (D) = 2523.000 mm
 Nozzle Outside Diameter (d) = 609.999 mm
 Vessel Thickness used (T) = 37.000 mm
 Nozzle Thickness used (t) = 14.450 mm
 T / t = 2.561
 d / t = 42.215

$$\lambda = [(d/D) \cdot \sqrt{(D/T)}] = 1.997$$

Nr/P = 0.059
 Mr/P = 0.076
 M0/P = 0.053
 N0/P = 0.172
 MrD/Mc = 0.165
 NrDL/Mc = 0.094
 M0d/Mc = 0.138
 N0DL/Mc = 0.231
 MrD/M1 = 0.093
 NrDL/M1 = 0.060
 M0D/M1 = 0.070
 N0DL/M1 = 0.330

Vessel Stresses (N./mm²):

LONGITUDINAL PLANE (Stresses Normal to longitudinal plane)	Au Top Outside	Al Top Inside	Bu Bottom Outside	B1 Bottom Inside
Outplane Membrane (P)	5	5	5	5
Outplane Bending (P)	10	-10	10	-10
Outplane Membrane (Mc)	0	0	0	0
Outplane Bending (Mc)	0	0	0	0
Outplane Membrane (ML)	-19	-19	19	19
Outplane Bending (ML)	-25	25	25	-25
Normal Pressure Stress	35	36	35	36
Outplane Stress Summary	6	37	97	26

Vessel Stresses (N./mm²):

LONGITUDINAL PLANE (Stresses parallel to longitudinal plane)	Au Top Outside	Al Top Inside	Bu Bottom Outside	B1 Bottom Inside
Inplane Membrane (P)	1	1	1	1
Inplane Bending (P)	14	-14	14	-14
Inplane Membrane (Mc)	0	0	0	0
Inplane Bending (Mc)	0	0	0	0
Inplane Membrane (ML)	-3	-3	3	3
Inplane Bending (ML)	-33	33	33	-33
Inplane Pressure Stress	17	17	17	17
Inplane Stress Summary	-2	35	72	-25

Vessel Stresses (N./mm²):

LONGITUDINAL PLANE (Shear stress normal to longitudinal plane)	Au Top Outside	Al Top Inside	Bu Bottom Outside	B1 Bottom Inside
Outplane Shear (Vc)	0	0	0	0
Outplane Shear (Vl)	0	0	0	0
Outplane Shear (Mt)	3	3	3	3
Shear Stress Summary	4	4	2	2



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 244 of 275

Nozzle Calcs.: N4-Tube Outlet

Nozl: 18

6:05pm

Sep 8, 2026

Vessel Stresses (N./mm²):

LONGITUDINAL PLANE (Stress Intensities)	Au Top Outside	Al Top Inside	Bu Bottom Outside	Bl Bottom Inside
Two * Max Shear Stress	12	40	97	51

Vessel Stresses (N./mm²):

CIRCUMFERENTIAL PLANE (Stresses Normal to circumferential plane)	Cu Left Outside	Cl Left Inside	Du Right Outside	Dl Right Inside
Outplane Membrane (P)	5	5	5	5
Outplane Bending (P)	10	-10	10	-10
Outplane Membrane (Mc)	-13	-13	13	13
Outplane Bending (Mc)	-49	49	49	-49
Outplane Membrane (ML)	0	0	0	0
Outplane Bending (ML)	0	0	0	0
Normal Pressure Stress	17	17	17	17
Outplane Stress Summary	-29	49	97	-22

Vessel Stresses (N./mm²):

CIRCUMFERENTIAL PLANE (Stresses parallel to circumferential plane)	Cu Left Outside	Cl Left Inside	Du Right Outside	Dl Right Inside
Inplane Membrane (P)	1	1	1	1
Inplane Bending (P)	14	-14	14	-14
Inplane Membrane (Mc)	-5	-5	5	5
Inplane Bending (Mc)	-59	59	59	-59
Inplane Membrane (ML)	0	0	0	0
Inplane Bending (ML)	0	0	0	0
Inplane Pressure Stress	35	36	35	36
Inplane Stress Summary	-12	77	117	-30

Vessel Stresses (N./mm²):

CIRCUMFERENTIAL PLANE (Shear stress normal to circumferential plane)	Cu Left Outside	Cl Left Inside	Du Right Outside	Dl Right Inside
Outplane Shear (Vc)	0	0	0	0
Outplane Shear (Vl)	0	0	0	0
Torsional Shear (Mt)	3	3	3	3
Shear Stress Summary	2	2	4	4

Vessel Stresses (N./mm²):

CIRCUMFERENTIAL PLANE (Stress Intensities)	Cu Left Outside	Cl Left Inside	Du Right Outside	Dl Right Inside
Two * Max Shear Stress	30	78	118	31

Nozzle Stresses (N./mm²):

LONGITUDINAL PLANE (Stresses in the hoop direction)	Au Top Outside	Al Top Inside	Bu Bottom Outside	Bl Bottom Inside
Hoop Membrane (P)	5	5	5	5
Hoop Bending (P)	0	0	0	0
Hoop Membrane (Mc)	0	0	0	0
Hoop Bending (Mc)	0	0	0	0



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 245 of 275

Nozzle Calcs.: N4-Tube Outlet

Nozl: 18 6:05pm

Sep 8,2026

Hoop Membrane (ML)	-19	-19	19	19
Hoop Bending (ML)	0	0	0	0
Hoop Pressure Stress	25	26	25	26

Hoop Stress Summary	11	12	50	52
---------------------	----	----	----	----

Nozzle Stresses (N./mm²):

LONGITUDINAL PLANE	Au	Al	Bu	B1
(Stresses Normal to	Top	Top	Bottom	Bottom
pipe cross-section)	Outside	Inside	Outside	Inside

Axial Membrane (P)	1	1	1	1
Axial Bending (P)	59	-59	59	-59
Axial Membrane (Mc)	0	0	0	0
Axial Bending (Mc)	0	0	0	0
Axial Membrane (ML)	-12	-12	12	12
Axial Bending (ML)	-150	150	150	-150
Axial Pressure Stress	12	12	12	12

Axial Stress Summary	-89	92	236	-182
----------------------	-----	----	-----	------

Nozzle Stresses (N./mm²):

LONGITUDINAL PLANE	Au	Al	Bu	B1
(Shear stress)	Outside	Inside	Outside	Inside

Shear due to (Vc)	2	2	-2	-2
Shear due to (Vl)	0	0	0	0
Shear due to Torsion	8	8	8	8

Shear Stress Summary	10	10	6	6
----------------------	----	----	---	---

Nozzle Stresses (N./mm²):

LONGITUDINAL PLANE	Au	Al	Bu	B1
(Stress Intensities	Outside	Inside	Outside	Inside

Two * Max Shear Stress	102	93	236	234
------------------------	-----	----	-----	-----

Nozzle Stresses (N./mm²):

CIRCUMFERENTIAL PLANE	Cu	Cl	Du	D1
(Stresses in the	Left	Left	Right	Right
hoop direction)	Outside	Inside	Outside	Inside

Hoop Membrane (P)	5	5	5	5
Hoop Bending (P)	0	0	0	0
Hoop Membrane (Mc)	-13	-13	13	13
Hoop Bending (Mc)	0	0	0	0
Hoop Membrane (ML)	0	0	0	0
Hoop Bending (ML)	0	0	0	0
Hoop Pressure Stress	25	26	25	26

Hoop Stress Summary	17	18	44	46
---------------------	----	----	----	----

Nozzle Stresses (N./mm²):

CIRCUMFERENTIAL PLANE	Cu	Cl	Du	D1
(Stresses Normal to	Left	Left	Right	Right
pipe cross-section)	Outside	Inside	Outside	Inside

Axial Membrane (P)	1	1	1	1
Axial Bending (P)	59	-59	59	-59
Axial Membrane (Mc)	-12	-12	12	12
Axial Bending (Mc)	-279	279	279	-279
Axial Membrane (ML)	0	0	0	0
Axial Bending (ML)	0	0	0	0
Axial Pressure Stress	12	12	12	12



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 246 of 275

Nozzle Calcs.: N4-Tube Outlet

Nozl: 18 6:05pm

Sep 8, 2026

Axial Stress Summary -218 221 365 -311

Nozzle Stresses (N./mm²):

CIRCUMFERENTIAL PLANE (Shear stress)	Cu	Cl	Du	Dl
	Outside	Inside	Outside	Inside
Shear due to (Vc)	0	0	0	0
Shear due to (Vl)	-2	-2	2	2
Shear due to Torsion	8	8	8	8

Shear Stress Summary 6 6 10 10

Nozzle Stresses (N./mm²):

CIRCUMFERENTIAL PLANE (Stress Intensities)	Cu	Cl	Du	Dl
	Outside	Inside	Outside	Inside
Two * Max Shear Stress	235	221	365	358

Stress Computations at the Edge of the Reinforcing Pad:

Stress Attenuation Diameter (for Insert Plates) per WRC 297:

$$= \text{NozzleOD} + 2 \cdot 1.65 \cdot \sqrt{R_{\text{mean}}(t - c_a)}$$

$$= 610.0 + 2 \cdot 1.65 \cdot \sqrt{1251.5(20.0 - 3.0)}$$

$$= 1091.341 \text{ mm}$$

WRC 297 Curve Access Parameters:

Vessel Mean Diameter	(D) =	2503.000 mm
Nozzle Outside Diameter	(d) =	1030.000 mm
Vessel Thickness used	(T) =	17.000 mm
Nozzle Thickness used	(t) =	224.450 mm
T / t	=	0.076
d / t	=	10.000

$$\lambda = [(d/D) \cdot \sqrt{(D/T)}] = 4.993$$

Note: Re-pad thickness is added to nozzle thickness to simulate the Re-pad.

Nr/P	=	0.045
Mr/P	=	0.071
M0/P	=	0.019
N0/P	=	0.026
MrD/Mc	=	0.240
NrDL/Mc	=	0.100
M0d/Mc	=	0.072
N0DL/Mc	=	0.051
MrD/Ml	=	0.049
NrDL/Ml	=	0.048
M0D/Ml	=	0.015
N0DL/Ml	=	0.026

Vessel Stresses (N./mm²):

LONGITUDINAL PLANE (Stresses Normal to longitudinal plane)	Au	Al	Bu	Bl
	Top Outside	Top Inside	Bottom Outside	Bottom Inside
Outplane Membrane (P)	4	4	4	4
Outplane Bending (P)	17	-17	17	-17
Outplane Membrane (Mc)	0	0	0	0
Outplane Bending (Mc)	0	0	0	0
Outplane Membrane (ML)	-4	-4	4	4
Outplane Bending (ML)	-15	15	15	-15
Normal Pressure Stress	78	79	78	79



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 247 of 275

Nozzle Calcs.: N4-Tube Outlet

Nozl: 18 6:05pm

Sep 8, 2026

Outplane Stress Summary	80	76	120	54
-------------------------	----	----	-----	----

Vessel Stresses (N./mm²):

LONGITUDINAL PLANE	Au	Al	Bu	B1
(Stresses parallel to	Top	Top	Bottom	Bottom
longitudinal plane)	Outside	Inside	Outside	Inside

Inplane Membrane (P)	7	7	7	7
Inplane Bending (P)	65	-65	65	-65
Inplane Membrane (Mc)	0	0	0	0
Inplane Bending (Mc)	0	0	0	0
Inplane Membrane (ML)	-8	-8	8	8
Inplane Bending (ML)	-50	50	50	-50
Inplane Pressure Stress	39	39	39	39

Inplane Stress Summary	53	22	170	-61
------------------------	----	----	-----	-----

Vessel Stresses (N./mm²):

LONGITUDINAL PLANE	Au	Al	Bu	B1
(Shear stress normal to	Top	Top	Bottom	Bottom
longitudinal plane)	Outside	Inside	Outside	Inside

Outplane Shear (Vc)	1	1	-1	-1
Outplane Shear (Vl)	0	0	0	0
Outplane Shear (Mt)	2	2	2	2

Shear Stress Summary	3	3	1	1
----------------------	---	---	---	---

Vessel Stresses (N./mm²):

LONGITUDINAL PLANE	Au	Al	Bu	B1
(Stress Intensities	Top	Top	Bottom	Bottom
	Outside	Inside	Outside	Inside

Two * Max Shear Stress	81	76	170	116
------------------------	----	----	-----	-----

Vessel Stresses (N./mm²):

CIRCUMFERENTIAL PLANE	Cu	Cl	Du	D1
(Stresses Normal to	Left	Left	Right	Right
circumferential plane)	Outside	Inside	Outside	Inside

Outplane Membrane (P)	4	4	4	4
Outplane Bending (P)	17	-17	17	-17
Outplane Membrane (Mc)	-8	-8	8	8
Outplane Bending (Mc)	-72	72	72	-72
Outplane Membrane (ML)	0	0	0	0
Outplane Bending (ML)	0	0	0	0
Normal Pressure Stress	39	39	39	39

Outplane Stress Summary	-20	89	142	-38
-------------------------	-----	----	-----	-----

Vessel Stresses (N./mm²):

CIRCUMFERENTIAL PLANE	Cu	Cl	Du	D1
(Stresses parallel to	Left	Left	Right	Right
circumferential plane)	Outside	Inside	Outside	Inside

Inplane Membrane (P)	7	7	7	7
Inplane Bending (P)	65	-65	65	-65
Inplane Membrane (Mc)	-16	-16	16	16
Inplane Bending (Mc)	-243	243	243	-243
Inplane Membrane (ML)	0	0	0	0
Inplane Bending (ML)	0	0	0	0
Inplane Pressure Stress	78	79	78	79

Inplane Stress Summary	-109	247	412	-206
------------------------	------	-----	-----	------



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 248 of 275

Nozzle Calcs.: N4-Tube Outlet

Nozl: 18 6:05pm

Sep 8, 2026

Vessel Stresses (N./mm²):

CIRCUMFERENTIAL PLANE (Shear stress normal to circumferential plane)			Cu Left Outside	Cl Left Inside	Du Right Outside	Dl Right Inside
Outplane Shear (Vc)			0	0	0	0
Outplane Shear (Vl)			-1	-1	1	1
Torsional Shear (Mt)			2	2	2	2
Shear Stress Summary			1	1	3	3

Vessel Stresses (N./mm²):

CIRCUMFERENTIAL PLANE (Stress Intensities)			Cu Left Outside	Cl Left Inside	Du Right Outside	Dl Right Inside
Two * Max Shear Stress			109	247	412	206

WRC 297 Stress Summations per ASME Sec. VIII Div. 2:

Vessel Stress Summation at Vessel-Nozzle Junction (N./mm²):

Type of Stress Int. Location	Stress Values at							
	Au	Al	Bu	Bl	Cu	Cl	Du	Dl
Circ. Pm (SUS)	35	36	35	36	35	36	35	36
Circ. Pl (SUS)	-14	-14	24	24	-4	-4	6	6
Circ. Q (SUS)	-15	15	35	-35	-45	45	73	-73
Long. Pm (SUS)	17	17	17	17	17	17	17	17
Long. Pl (SUS)	-2	-2	4	4	-8	-8	18	18
Long. Q (SUS)	-19	19	47	-47	-39	39	59	-59
Shear Pm (SUS)	0	0	0	0	0	0	0	0
Shear Pl (SUS)	0	0	0	0	0	0	0	0
Shear Q (SUS)	3	3	3	3	3	3	3	3
Pm (SUS)	35.0	36.0	35.0	36.0	35.0	36.0	35.0	36.0
Pm+Pl (SUS)	21.0	22.0	59.0	60.0	31.0	32.0	41.0	42.0
Pm+Pl+Q (Total)	11.7	38.9	94.3	51.4	30.5	77.3	114.4	32.1

Vessel Stress Summation Comparison (N./mm²):

Type of Stress Int.	Max. S.I.	S.I. Allowable	Result
Pm (SUS)	36.00	138.00	Passed
Pm+Pl (SUS)	60.00	207.00	Passed
Pm+Pl+Q (TOTAL)	114.44	413.99	Passed

Because only sustained loads were specified, the Pm+Pl+Q allowable was 3 * Smh.

WRC 297 Stress Summations per ASME Sec. VIII Div. 2:

Vessel Stress Summation at Reinforcing Pad Edge (N./mm²):

Type of Stress Int. Location	Stress Values at							
	Au	Al	Bu	Bl	Cu	Cl	Du	Dl
Circ. Pm (SUS)	78	79	78	79	78	79	78	79



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 249 of 275

Nozzle Calcs.: N4-Tube Outlet

Nozl: 18

6:05pm

Sep 8, 2026

Circ. P1 (SUS)	0	0	8	8	-9	-9	23	23
Circ. Q (SUS)	2	-2	32	-32	-178	178	308	-308
Long. Pm (SUS)	39	39	39	39	39	39	39	39
Long. P1 (SUS)	-1	-1	15	15	-4	-4	12	12
Long. Q (SUS)	15	-15	115	-115	-55	55	89	-89
Shear Pm (SUS)	0	0	0	0	0	0	0	0
Shear P1 (SUS)	1	1	-1	-1	-1	-1	1	1
Shear Q (SUS)	2	2	2	2	2	2	2	2
Pm (SUS)	78.0	79.0	78.0	79.0	78.0	79.0	78.0	79.0
Pm+P1 (SUS)	78.0	79.0	86.0	87.0	69.0	70.0	101.0	102.0
Pm+P1+Q (Total)	80.3	77.2	169.0	116.0	109.0	248.0	409.0	206.1

Vessel Stress Summation Comparison (N./mm²):

Type of Stress Int.	Max. S.I.	S.I. Allowable	Result
Pm (SUS)	79.00	138.00	Passed
Pm+P1 (SUS)	102.02	207.00	Passed
Pm+P1+Q (TOTAL)	409.03	413.99	Passed

Because only sustained loads were specified, the Pm+P1+Q allowable was 3 * Smh.

WRC 297 Stress Summations per ASME Sec. VIII Div. 2:

Nozzle Stress Summation at Vessel-Nozzle Junction (N./mm²):

Type of Stress Int. Location	Stress Values at							
	Au	Al	Bu	Bl	Cu	Cl	Du	Dl
Circ. Pm (SUS)	25	26	25	26	25	26	25	26
Circ. P1 (SUS)	-14	-14	24	24	-8	-8	18	18
Circ. Q (SUS)	0	0	0	0	0	0	0	0
Long. Pm (SUS)	12	12	12	12	12	12	12	12
Long. P1 (SUS)	-11	-11	13	13	-11	-11	13	13
Long. Q (SUS)	-91	91	209	-209	-220	220	338	-338
Shear Pm (SUS)	0	0	0	0	0	0	0	0
Shear P1 (SUS)	2	2	-2	-2	-2	-2	2	2
Shear Q (SUS)	8	8	8	8	8	8	8	8
Pm (SUS)	25.0	26.0	25.0	26.0	25.0	26.0	25.0	26.0
Pm+P1 (SUS)	11.4	12.4	49.2	50.2	17.2	18.2	43.2	44.2
Pm+P1+Q (Total)	103.0	93.2	234.2	234.3	236.3	221.2	363.3	357.6

Nozzle Stress Summation Comparison (N./mm²):

Type of Stress Int.	Max. S.I.	S.I. Allowable	Result
Pm (SUS)	26.00	138.00	Passed
Pm+P1 (SUS)	50.16	207.00	Passed
Pm+P1+Q (TOTAL)	363.31	413.99	Passed

Because only sustained loads were specified, the Pm+P1+Q allowable was 3 * Smh.



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 250 of 275

Nozzle Calcs.: N4-Tube Outlet

Nozl: 18

6:05pm

Sep 8, 2026

PV Elite is a trademark of Hexagon AB, 2026, All rights reserved.



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 251 of 275

ASME TS Calc:

Case: 1 6:05p Sep 8,2026

Input Echo, Tubesheet Number 1, Description: Stationary Tube

Shell Data:

Main Shell Description: Main Shell

Shell Maximum Design Pressure	Psd,max	520.00 KPa.
Shell Maximum Operating Pressure	Psox,max	520.00 KPa.
Shell Minimum Operating Pressure	Psox,min	0.00 KPa.
Shell Thickness	ts	18.0000 mm
Shell Internal Corrosion Allowance	cas	3.0000 mm
Shell External Corrosion Allowance	casext	0.0000 mm
Inside Diameter of Shell	Ds	2480.000 mm
Shell Temperature for Internal Pressure	Ts	130.00 °C
Shell Material		SA-516 70

See ASME VIII Div. 1, UG-23(e), for determination of the SPS allowable.

Shell Material UNS Number		K02700
Shell Allowable Stress at Temperature	Ss	138.00 N./mm ²
Shell Allowable Stress at Ambient		138.00 N./mm ²

Channel Data:

Channel Description: LHS Ch Shell

Channel Type:		Cylinder
Channel Maximum Design Pressure	Ptd,max	1000.00 KPa.
Channel Maximum Operating Pressure	Ptox,max	1000.00 KPa.
Channel Minimum Operating Pressure	Ptox,min	0.00 KPa.
Channel Thickness	tc	20.0000 mm
Channel Internal Corrosion Allowance	cac	3.0000 mm
Channel External Corrosion Allowance	cacext	0.0000 mm
Inside Diameter of Channel	Dc	2480.000 mm
Channel Design Temperature	TEMPC	82.00 °C
Channel Flange Matl		SA-516 70

See ASME VIII Div. 1, UG-23(e), for determination of the SPS allowable.

Channel Material UNS Number		K02700
Channel Allowable Stress at Temperature	Sc	138.00 N./mm ²
Channel Allowable Stress at Ambient		138.00 N./mm ²

Tube Data:

Number of Tube Holes	Nt	6000
Tube Wall Thickness	et	2.1100 mm
Tube Outside Diameter	D	19.0500 mm
Total Straight Tube Length	Lt	6000.00 mm
Straight Tube Length (bet. inner tubsht faces) L		5770.00 mm
Design Temperature of the Tubes		130.00 °C
Tube Material		SA-179
Tube Material UNS Number		K01200
Is this a Welded Tube		No
Tube Material Specification used	Smls. tube	
Tube Allowable Stress at Temperature		92.40 N./mm ²
Tube Allowable Stress At Ambient		92.40 N./mm ²
Tube Yield Stress At design Temperature	Syt	160.40 N./mm ²
Tube Pitch (Center to Center Spacing)	P	25.4000 mm
Tube Layout Pattern		Triangular
Fillet Weld Leg	af	2.1100 mm
Groove Weld Leg	ag	2.1100 mm
Tube-Tubesheet Joint Weld Type		Full Strength
Method for Tube-Tubesheet Jt. Allowable		UW-20.3
Is the Tube Inset		No
Radius to Outermost Tube Hole Center	ro	1130.510 mm
Largest Center-to-Center Tube Distance	U1	0.0000 mm



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 252 of 275

ASME TS Calc:

Case: 1 6:05p Sep 8,2026

Length of Expanded Portion of Tube	ltx	0.0000 mm
Tube-side pass partition groove depth	hg	0.0000 mm
Area of Tube Layout	Ap	32948.0 cm ²
Perimeter of Tube Layout	Cp	7006.7 mm

Tubesheet Data:

Tubesheet TYPE: Stationary, Gasketed both Sides, Conf. d
Exchanger TYPE: With an Immersed Floating Head, Conf. a

Tubesheet Design Metal Temperature	T	82.00 °C
Tubesheet Material		SA-266 2

See ASME VIII Div. 1, UG-23(e), for determination of the SPS allowable.

Tubesheet Material UNS Number		K03506
Tubesheet Allowable Stress at Temperature	S	138.00 N./mm ²
Tubesheet Allowable Stress at Ambient	Tt	138.00 N./mm ²
Thickness of Tubesheet	h	115.0000 mm
Tubesheet Corr. Allowance (Shell side)	Cats	3.0000 mm
Tubesheet Corr. Allowance (Channel side)	Catc	3.0000 mm
Tubesheet Outside Diameter	A	2562.000 mm
Dimension G for the Channel Side	Gc	2537.285 mm
Area of the Untubed Lanes	AL	0.0 cm ²

Additional Data for Fixed/Floating Tubesheet Exchangers:

Unsupported Tube Span under consideration	l	635.910 mm
Tube End condition corresponding to Span (l)	k	1.00
Ignore Radial Thermal Exp. effects (4.18.8/4.18.9)		Yes
Perform Differential Pressure Design		No
Run Multiple Load Cases		Yes
Junction Stress Reduction option		Perform Plastic Calculation

Additional Data for Gasketed Tubesheets:

Tubesheet Gasket on which Side		Both
Flange Outside Diameter	A	2748.000 mm
Flange Inside Diameter	B	2480.000 mm
Flange Face Outside Diameter	Fod	2565.000 mm
Flange Face Inside Diameter	Fid	2480.000 mm
Gasket Outside Diameter	Go	2554.000 mm
Gasket Inside Diameter	Gi	2510.000 mm
Small end Hub thk.	g0	16.0000 mm
Large end Hub thk.	g1	35.0000 mm
Gasket Factor,	m	3.00
Gasket Design Seating Stress	y	68.95 N./mm ²
Flange Facing Sketch		Code Sketch 1a
Gasket Thickness	tg	3.1750 mm
Full face Gasket Flange Option		Program Selects
Length of Partition Gasket	lp	5118.000 mm
Width of Partition Gasket	wp	10.0000 mm
Partition Gasket Factor,	mPart	0.0000
Partition Gasket Design Seating Stress	yPart	0.00 N./mm ²
Partition Gasket Facing Sketch		Code Sketch 1a
Partition Gasket Column for Gasket Seating		Code Column II

Bolting Information:

Diameter of Bolt Circle	C	2663.000 mm
Nominal Bolt Diameter	dB	38.1000 mm
Thread Series		TEMA Thread Series
Number of Bolts	n	72
Bolt Material		SA-193 B7
Bolt Material UNS Number		G41400
Bolt Allowable Stress At Temperature	Sb	172.00 N./mm ²



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 253 of 275

ASME TS Calc:


Case: 1 6:05p Sep 8, 2026

Bolt Allowable Stress At Ambient	Sa	172.00 N./mm ²
Weld between Flange and Shell/Channel		0.0000 mm
Alternate Flange Operating Bolt Load, Wm1		570228.06 Kgf
Alternate Flange Seating Bolt Load, Wm2		468391.53 Kgf
Alternate Flange Design Bolt Load, W		1144638.00 Kgf

Note: The full bolt load Sa*Ab, was used for all load cases.

Tubesheet Integral with	None
Tubesheet Extended as Flange	No
Is Exchanger in Creep range (skip EP, Use 3S for Sps)	No

Tubesheet Gasketed w/Shell and Channel

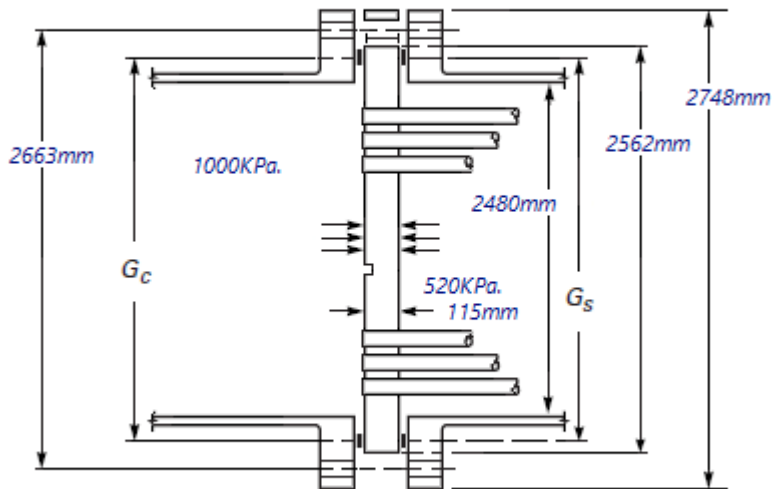

Configuration d:

ASME TubeSheet Results per Part UHX/4.18, 2025

Elasticity/Expansion Material Properties:

Shell - TE-1 Carbon & Low Alloy Steels, Group 1
Shell - TM-1 Carbon Steels with C<= 0.3%

Th. Exp. Coeff. Metal Temp. along Len	0.0 °C	0.0000112153 /°C
Elastic Mod. at Design Temperature	130.0 °C	0.19629E+09 KPa.
Th. Exp. Coeff. Metal Temp. at Tubsht	21.1 °C	0.0000115190 /°C
Elastic Mod. at Metal Temp. along Len	0.0 °C	0.20409E+09 KPa.
Elastic Mod. at Ambient Temperature	21.1 °C	0.20270E+09 KPa.

Channel - TE-1 Carbon & Low Alloy Steels, Group 1
Channel - TM-1 Carbon Steels with C<= 0.3%

Th. Exp. Coeff. Metal Temp. at Tubsht	21.1 °C	0.0000115190 /°C
Elastic Mod. at Design Temperature	82.0 °C	0.19921E+09 KPa.
Elastic Mod. at Ambient Temperature	21.1 °C	0.20270E+09 KPa.

Tubes - TE-1 Carbon & Low Alloy Steels, Group 1
Tubes - TM-1 Carbon Steels with C<= 0.3%



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 254 of 275

ASME TS Calc: Case: 1 6:05p Sep 8, 2026

Th. Exp. Coeff. Metal Temp. along Len	0.0 °C	0.0000112153 /°C
Elastic Mod. at Design Temperature	130.0 °C	0.19629E+09 KPa.
Elastic Mod. at Metal Temp. along Len	0.0 °C	0.20409E+09 KPa.
Elastic Mod. at Tubsht. Design Temp.	82.0 °C	0.19921E+09 KPa.
Elastic Mod. at Ambient Temperature	21.1 °C	0.20270E+09 KPa.

TubeSheet - TE-1 Carbon & Low Alloy Steels, Group 1
TubeSheet - TM-1 Carbon Steels with C> 0.3%

Elastic Mod. at Design Temperature	82.0 °C	0.19784E+09 KPa.
Elastic Mod. at Ambient Temperature	21.1 °C	0.20132E+09 KPa.

Note:

The Elasticity and Alpha values are taken from Tables in ASME II D.
Please insure these properties are consistent with the
type of Material for the tubes, shell, channel etc.

Tube Required Thickness under Internal Pressure (Tubeside pressure):

Thickness Due to Internal Pressure:
= $(P \cdot (D/2 - CAE)) / (S \cdot E + 0.4 \cdot P)$ per Appendix 1-1 (a)(1)
= $(1000 \cdot (19/2 - 0)) / (92.4 \cdot 1 + 0.4 \cdot 1000)$
= $0.1026 + 0.0000 = 0.1026$ mm

Tube Required Thickness under External Pressure (Shellside pressure) :

External Pressure Chart CS-1 at 130.00 °C
Elastic Modulus for Material 199943392.00 KPa.

Results for Max. Allowable External Pressure (Emapw):

TCA	ODCA	SLEN	D/T	L/D	Factor A	B
2.1100	19.05	5770.00	9.03	50.0000	0.0134948	95.84
Emapw = $(2.167 / (D/T) - 0.0833) \cdot B = 15019$ KPa.						

Results for Req'd Thickness for Ext. Pressure (Tca):

TCA	ODCA	SLEN	D/T	L/D	Factor A	B
0.2905	19.05	5770.00	65.57	50.0000	0.0002558	25.58
Emapw = $(4 \cdot B) / (3 \cdot (D/T)) = (4 \cdot 25.6) / (3 \cdot 65.6) = 520$ KPa.						

Summary of Tube Required Thickness Results:

Total Required Thickness including Corrosion all.	0.2905 mm
Allowable Internal Pressure at Corroded thickness	22456.99 KPa.
Required Internal Design Pressure	1000.00 KPa.
Allowable External Pressure at Corroded thickness	15019.20 KPa.
Required External Design Pressure	520.00 KPa.
Required Thickness due to Shell Side pressure	0.2905 mm

Detailed Results for load Case D3 un-corr. (Psd,max + Ptd,max)

Intermediate Calculations For Gasketed Tubesheets:

ASME Code, Section VIII Division 1, 2025

Gasket Contact Width,	$N = (Goc - Gic) / 2$	22.000 mm
Basic Gasket Width,	$b0 = N / 2$	11.000 mm
Effective Gasket Width,	$b = \text{sqrt}(b0) \cdot 2.5$	8.355 mm
Gasket Reaction Diameter,	$G = Go - 2.0 \cdot b$	2537.291 mm

Results for ASME Stationary Tubesheet Calculations for Configuration d:

Results for Tubesheet Calculations Original Thickness:



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 255 of 275

ASME TS Calc:

Case: 1 6:05p Sep 8, 2026

ASME Section VIII-2 Part 4.18.9.4 Step 1:

Tube expansion depth ratio $[\rho]$:

$$= l_{tx} / h \text{ (modified for corrosion if present)}$$

$$= 0/115$$

$$= 0.0000 \text{ (must be } 0 \leq \rho \leq 1 \text{)}$$

Effective tube hole diameter $[d^*]$:

$$= \max(dt - 2 \cdot tt(Et/E) \cdot (StT/S) \cdot (\rho); dt - 2 \cdot tt)$$

$$= \max(19 - 2 \cdot 2.11 (199214080/197835184) \cdot$$

$$(92.4/138) \cdot (0); 19 - 2 \cdot 2.11)$$

$$= 19.0500 \text{ mm}$$

Equivalent outer tube limit circle diameter $[Do]$:

$$= 2 \cdot r_o + dt$$

$$= 2 \cdot 1131 + 19$$

$$= 2280.070 \text{ mm}$$

Determine the basic ligament efficiency for shear $[\mu]$:

$$= (p - dt) / p$$

$$= (25.4 - 19) / 25.4$$

$$= 0.250$$

Equivalent outer tube limit radius $[ao]$:

$$= Do / 2$$

$$= 2280/2$$

$$= 1140.0350 \text{ mm}$$

Effective tube pitch $[p^*]$:

$$= p / \sqrt{ (1 - 4 \cdot \min(AL \cdot CNVfactor; 4 \cdot Do \cdot p) / (\pi \cdot Do^2)) }$$

$$= 25.4 / \sqrt{ (1 - 4 \cdot \min(0 \cdot 100 ; 4 \cdot 2280 \cdot 25.4) / (\pi \cdot 2280^2)) }$$

$$= 25.4000 \text{ mm}$$

Effective ligament efficiency for bending $[\mu^*]$:

$$= (p^* - d^*) / p^*$$

$$= (25.4 - 19) / 25.4$$

$$= 0.2500$$

Ratio $[ps]$:

$$= as / ao$$

$$= 1269/1140$$

$$= 1.1128$$

Ratio $[pc]$:

$$= ac / ao$$

$$= 1269/1140$$

$$= 1.1128$$

Compute parameter $[xt]$:

$$= 1 - Nt((dt - 2 \cdot tt) / (2 \cdot ao))^2$$

$$= 1 - 6000 ((19 - 2 \cdot 2.11) / (2 \cdot 1140))^2$$

$$= 0.7462$$

Determine parameter $[xs]$:

$$= 1 - Nt(dt / (2 \cdot ao))^2$$

$$= 1 - 6000 (19 / (2 \cdot 1140))^2$$

$$= 0.5812$$

Determine the value $[h'g]$:

$$= \max((hg - CATC); 0) \text{ (For pressure only cases)}$$

$$= \max((0 - 0); 0)$$

$$= 0.000 \text{ mm}$$

ASME Section VIII-2 Part 4.18.9.4 Step 2:



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 256 of 275

ASME TS Calc:

Case: 1 6:05p Sep 8, 2026

Intermediate parameters for Tubesheet Gasketed on the Shell Side:

$\beta_s, k_s, \lambda_s, \delta_s$ are all = 0

Intermediate parameters for Tubesheet Gasketed on the Channel Side:

$\beta_C, k_C, \lambda_C, \delta_C$ are all = 0

ASME Section VIII-2 Part 4.18.9.4 Step 3:

$h/p = 4.527559$; $\mu^* = 0.250000$; $E^* = 42853184$ KPa.

$E^*/E = 0.216611$; $\nu^* = 0.396457$

Note: As h/p (4.528) is > 2, data values for $h/p = 2$ were used.

Tube Bundle Stiffness Factor $[X_a]$:

$$= \left(\left(24(1 - \nu^{*2})Nt \cdot Et \cdot tt(dt - tt)ao^2 \right) / (E^* \cdot L \cdot H^3) \right)^{1/4}$$

$$= \left(\left(24(1 - 0.4^2)6000 \cdot 196289984 \cdot 2.11 \right. \right.$$

$$\left. \left(19 - 2.11 \right)1140^2 \right) / (42853184 \cdot 5770 \cdot 115^3) \right)^{1/4}$$

$$= 7.3654$$

Values from Table 4.18.3

$Z_d = 0.003715$; $Z_v = 0.018522$; $Z_m = 0.194582$

$Z_a = 0.468923E+03$; $Z_w = 0.018522$

ASME Section VIII-2 Part 4.18.9.4 Step 4:

Diameter ratio $[K]$:

$= A / Do$

$= 2562/2280$

$= 1.1236$

Compute coefficient $[F]$:

$$= (1 - \nu^*) / E^* \cdot (\lambda_s + \lambda_C + E \cdot \ln(K))$$

$$= (1 - 0.4) / 42853184 \cdot (0 + 0 +$$

$$197835184 \cdot \ln(1.12))$$

$$= 0.3248$$

Compute parameter $[\phi]$:

$$= (1 + \nu^*)F$$

$$= (1 + 0.4)0.32$$

$$= 0.4536$$

Compute parameter $[Q_1]$:

$$= (ps - 1 - \phi \cdot Z_v) / (1 + \phi \cdot Z_m)$$

$$= (1.11 - 1 - 0.45 \cdot 0.019) / (1 + 0.45 \cdot 0.19)$$

$$= 0.095940$$

ASME Section VIII-2 Part 4.18.9.4 Step 5:

Determine factor $[\gamma_b]$:

$$= (G_c - G_s) / Do \text{ (config d)}$$

$$= (2537 - 2537) / 2280 = 0$$

Calculate parameter $[\omega_s]$:

$$= ps \cdot ks \cdot \beta_s \cdot \delta_S (1 + h \cdot \beta_s)$$

$$= 1.11 \cdot 0 \cdot 0 \cdot 0.000 (1 + 115 \cdot 0)$$

$$= 0.0000 \text{ mm}^2$$

Calculate parameter $[\omega^*s]$:

$$= ao^2 (ps^2 - 1) \cdot (ps - 1) / 4 - \omega_s$$

$$= 1140^2 (1.11^2 - 1) \cdot (1.11 - 1) / 4 - 0$$

$$= 8736.4102 \text{ mm}^2$$

Parameter $[\omega_c]$:

$$= pc \cdot kc [\delta_C (C_m \theta + \beta_C + C_q \Delta \cdot h \cdot \beta_C^2) -$$

$$\zeta c (C_m \theta + h \cdot C_q \theta + h \cdot \beta_C / 2)]$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 257 of 275

ASME TS Calc:

Case: 1 6:05p Sep 8, 2026

$$= 1.11 \cdot 0 [0.000 (0 + 0 \cdot 0 \cdot 115) - 0.000 (0/115 + 0 \cdot 0/2)]$$

$$= 0.0000 \text{ mm}^2$$

Parameter [$\omega \cdot c$]:

$$= ao^2 [(pc^2 + 1) \cdot (pc - 1) / 4 - (ps - 1) / 2] - \omega c$$

$$= 1140^2 [(1.11^2 + 1) \cdot (1.11 - 1) / 4 - (1.11 - 1) / 2] - 0$$

$$= 8736.4131 \text{ mm}^2$$

Pressure [$P \cdot S$]:

= 0 For Pressure only cases or Configurations d,e,f,A,B,C,D

Pressure [$P \cdot C$]:

= 0 For Pressure only cases or Configurations b,c,d,B,C,D

ASME Section VIII-2 Part 4.18.9.4 Step 6:

$$Pe = Ps - Pt$$

$$= 520 - 1000 = -480 \text{ KPa.}$$

ASME Section VIII-2 Part 4.18.9.4 Step 7:

Determine factor [$Q2$]:

$$= [((\omega \cdot s \cdot Ps - \omega \cdot c \cdot Pt) - (\omega s \cdot P \cdot s - \omega c \cdot P \cdot c)) + W \cdot \gamma b / (2 \cdot \pi)] / (1 + \phi \cdot Zm)$$

$$= [((8736 \cdot 520 - 8736 \cdot 1000) - (0 \cdot 0 - 0 \cdot 0)) \cdot 0.0001 + 1144638 \cdot 0 / (2 \cdot \pi)] / (1 + 0.45 \cdot 0.19)$$

$$= -392.9491 \text{ Kgf}$$

Calculate factor [$Q3$]:

$$= Q1 + 2 \cdot Q2 / (Pe \cdot ao^2)$$

$$= 0.096 + 2 \cdot -393 / (-480 \cdot 1140^2)$$

$$= 0.10829$$

Fm Value from Table 4.18.3 = 0.075387

Tubesheet Bending Stress - original thickness [σ]:

$$= (1.5 \cdot Fm / \mu \cdot) \cdot (2 \cdot ao / (H - h'g))^2 \cdot Pe$$

$$= (1.5 \cdot 0.075 / 0.25) \cdot (2 \cdot 1140 / (115 - 0))^2 \cdot -480$$

$$= -85.3527 \text{ N./mm}^2$$

Allowable Tubesheet Bending Stress [σ allowed]:

$$= 1.5 \cdot S = 1.5 \cdot 138 = 207 \text{ N./mm}^2$$

Tubesheet Bending Stress - final thickness [σf]:

$$= (1.5 \cdot Fm / \mu \cdot) \cdot (2 \cdot ao / (h - h'g))^2 \cdot Pe$$

$$= (1.5 \cdot 0.07 / 0.25) \cdot (2 \cdot 1140 / (71 - 0))^2 \cdot -480$$

$$= -206.9883 \text{ N./mm}^2$$

Reqd Tubesheet Thickness, for Bending Stress (including CA) [HReqB]:

$$= h + Cats + Catc$$

$$= 71 + 0 + 0$$

$$= 71.0260 \text{ mm}$$

ASME Section VIII-2 Part 4.18.9.4 Step 8:

Shear Stress check [τ limit]:

$$= (2 \cdot \mu \cdot h / ao) \cdot \min(0.8S; 0.533Sy)$$

$$= (2 \cdot 0.25 \cdot 115 / 1140) \cdot 110$$

$$= 5.5681 \text{ N./mm}^2$$

Shear Stress is not required to be computed; [Pe] <= Taulimit

Tubesheet Shear Stress - final thickness [τf]:



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 258 of 275

ASME TS Calc:

Case: 1 6:05p Sep 8, 2026

$$\begin{aligned}
 &= (A_p \cdot P_e) / (\mu \cdot h \cdot C_p) \\
 &= (32948 \cdot -480) / (0.25 \cdot 8.18 \cdot 7007) \\
 &= 110.3980 \text{ N./mm}^2
 \end{aligned}$$

Reqd Tubesheet Thickness, for Shear Stress (including CA) [HreqS]:

$$\begin{aligned}
 &= H + C_{ats} + C_{atc} \\
 &= 8.18 + 0 + 0 \\
 &= 8.1786 \text{ mm}
 \end{aligned}$$

Reqd Tubesheet Thickness for Given Loadings (including CA) [Hreqd] :

$$\begin{aligned}
 &= \max(H_{reqB}; H_{reqS}) \\
 &= \max(71; 8.18) \\
 &= 71.0260 \text{ mm}
 \end{aligned}$$

ASME Section VIII-2 Part 4.18.9.4 Step 9:

The Ftmin and Ftmax Coefficients from Table 4.18.4:

$$F_{tmin} = -1.18, F_{tmax} = 8.42$$

First Extreme Tube Axial Stress from among all the tubes [σ_{t1}]:

$$\begin{aligned}
 &= ((P_s \cdot x_s - P_t \cdot x_t) - P_e \cdot F_{tmin}) / (X_t - X_s) \\
 &= ((520 \cdot 0.58 - 1000 \cdot 0.75) - (-480) \cdot -1.18) / \\
 &\quad (0.75 - 0.58) \\
 &= -6.1309 \text{ N./mm}^2
 \end{aligned}$$

Second Extreme value of Tube Axial Stress from among all the tubes [σ_{t2}]:

$$\begin{aligned}
 &= ((P_s \cdot x_s - P_t \cdot x_t) - P_e \cdot F_{tmax}) / (X_t - X_s) \\
 &= ((520 \cdot 0.58 - 1000 \cdot 0.75) - (-480) \cdot 8.42) / \\
 &\quad (0.75 - 0.58) \\
 &= 21.7959 \text{ N./mm}^2
 \end{aligned}$$

Maximum Tube Axial Stress [$\sigma_{t,max}$]:

$$= \max(|\sigma_{t,1}|; |\sigma_{t,2}|) = 21.8 \text{ N./mm}^2$$

Allowable Tube Stress [$\sigma_{t,A}$]:

$$= S_{ot} = 92.3983 \text{ N./mm}^2$$

Check for Buckling as some of the tubes are in compression.

Determine the Factor of Safety [Fs]:

$$\begin{aligned}
 &= \max((3.25 - 0.25(Z_d + Q_3 \cdot Z_w)X_a^4); 1.25) \\
 &= \max((3.25 - 0.25(0.0037 + 0.11 \cdot 0.019)7.37^4); 1.25) \\
 &= 1.2500 \text{ (Should be } \leq 2)
 \end{aligned}$$

Determine the factor [rt]:

$$\begin{aligned}
 &= (\sqrt{(d_t^2 + (d_t - 2 \cdot t_t)^2)}) / 4 \\
 &= (\sqrt{(19^2 + (19 - 2 \cdot 2.11)^2)}) / 4 \\
 &= 6.0355 \text{ mm}
 \end{aligned}$$

Determine the factor [Ct]:

$$\begin{aligned}
 &= \sqrt{(2 \cdot \pi^2 \cdot E_t / S_{yt})} \\
 &= \sqrt{(2 \cdot \pi^2 \cdot 196289984 / 160)} \\
 &= 155.4270
 \end{aligned}$$

Determine the factor [Ft]:

$$\begin{aligned}
 &= k \cdot L / r \\
 &= 1 \cdot 636 / 6.04 \\
 &= 105.3620
 \end{aligned}$$

Buckling Allowable Stress [Stb]:

$$\begin{aligned}
 &= (S_y / F_s) \cdot (1 - F_t / (2 \cdot C_t)) \\
 &= (160 / 1.25) \cdot (1 - 105 / (2 \cdot 155)) \\
 &= 84.826 \text{ N./mm}^2 \text{ (Never greater than } S_{ot})
 \end{aligned}$$

Note: The Axial Compressive stress in tubes is within limits.



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 259 of 275

ASME TS Calc:

Case: 1 6:05p Sep 8, 2026

Largest tube-to-tubesheet Joint Load [Wt]:

$$= \sigma_{t,max} \cdot \text{Tube Area}$$

$$= 21.8 \cdot 1.12$$

$$= 249.57 \text{ Kgf}$$

Tube Metal Area [At]:

$$= \pi (d_o - t) t$$

$$= \pi (19 - 2.11) 2.11$$

$$= 1.123 \text{ cm}^2$$

Tube Weld Size Results per UW-20.3:

Tube Strength [Ft]:

$$= \pi \cdot t (d_o - t) S$$

$$= \pi \cdot 2.11 (19 - 2.11) 92.4$$

$$= 1057.989 \text{ Kgf}$$

Groove Weld Strength [Fg]:

$$= 0.85 \cdot \pi \cdot a_g (d_o + 0.67 \cdot a_g) S_w \text{ (but not } > F_t)$$

$$= 0.85 \cdot \pi \cdot 2.11 (19 + 0.67 \cdot 2.11) 92.4$$

$$= 1057.9891 \text{ Kgf}$$

Weld Strength Factor [fw]:

$$= S / S_w \text{ where } S_w = \min(S \text{ and } S_t)$$

$$= 92.4/92.4$$

$$= 1.000$$

Design Strength Ratio [fd]:

$$= 1 \text{ for full strength welds}$$

Fillet Weld Strength [Ff]:

$$= 0.55 \cdot \pi \cdot a_f (d_o + 0.67 \cdot a_f) S_w \text{ (but not } > F_t)$$

$$= 0.55 \cdot \pi \cdot 2.11 (19 + 0.67 \cdot 2.11) 92.4$$

$$= 702.9343 \text{ Kgf}$$

Minimum Length of Weld [ar]:

$$= 2 \left(\sqrt{(0.75 \cdot d_o)^2 + 1.07 \cdot t \cdot (d_o - t) f_w \cdot f_d} - 0.75 \cdot d_o \right)$$

$$= 2 \left(\sqrt{(0.75 \cdot 19)^2 + 1.07 \cdot 2.11 \cdot (19 - 2.11) 1 \cdot 1} - 0.75 \cdot 19 \right)$$

$$= 2.562 \text{ mm}$$

Minimum Required Fillet Weld Leg [afr]: 1.2810 mm

Minimum Required Groove Weld Leg [agr]: 1.2810 mm

Tube-Tubesheet Jt allowable, 1058 is $\geq$ tube strength 1058 Kgf

Note: This tube-tubesheet joint is a Full Strength joint

Computations completed for ASME tubesheet configuration: d

Stress/Force Summary for Loadcase D3 un-corr. (Psd,max + Ptd,max):

Stress Description	Actual	Allowable	Pass/Fail
Tubesheet Bend. Stress	85.4 $\leq$	207.0 N./mm ²	Pass
Tubesheet Shear Stress	7.9 $\leq$	110.4 N./mm ²	Pass
Maximum Stress in the Tubes	21.8 $\leq$	92.4 N./mm ²	Pass
Minimum Tube Stress (Buckling)	-6.1 $\leq$	-84.8 N./mm ²	Pass
Maximum Force on any one Tube	249.6 $\leq$	1058.0 Kgf	Pass

Thickness Results for Loadcase D3 un-corr. (Psd,max + Ptd,max):



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 260 of 275

ASME TS Calc:

Case: 1 6:05p Sep 8,2026

Thickness (mm)	Required	Actual	P/F
Tubesheet Thickness :	71.026	115.000	Ok
Tube-Tubesheet Fillet Weld Leg :	1.281	2.110	Ok
Tube-Tubesheet Groove Weld Leg :	1.281	2.110	Ok

Stationary Tubesheet results per ASME Div. 2 Part 4.18.9 2025

Results for 6 Load Cases:

--Reqd. Thk. + CA			---- Tubesheet		Stresses		Case	Pass/	
Case#	Tbsht	Extnsn	Bend	Allwd	Shear	Allwd	Type	Fail	
D1uc	105.782	5.684	178	207	16	110	Ps+Pt-Th	D1	Ok
D2uc	74.158	2.956	92	207	9	110	Ps+Pt-Th	D2	Ok
D3uc	71.026	2.728	85	207	8	110	Ps+Pt-Th	D3	Ok
D1c	111.769	5.684	196	207	17	110	Ps+Pt-Th-c	D1	Ok
D2c	80.152	2.956	102	207	9	110	Ps+Pt-Th-c	D2	Ok
D3c	77.028	2.728	94	207	8	110	Ps+Pt-Th-c	D3	Ok
Max:	111.7694	5.684	mm	0.946		0.156	(Str. Ratio)		

Load Case Definitions:

[Ps & Pt]:

Shell-side and Tube-side Design or Operating Pressures derived from Psd,min Ptd,max, Psox,min, Ptox,max etc. per the Load Case Tables

[(+)-Th]:

With or Without Thermal Expansion, Tt,mx & Ts,mx

[c]:

With or Without Corrosion Allowance

[D1, D2, D3]:

Design Load Cases using the Maximum and Minimum Design Pressures

[D4]:

Design Load Case using the Minimum (Vacuum) Pressures (if specified)

[O1, O2, O3, O4]:

Operating Load Cases using the Maximum and Minimum Operating Pressures and Operating Temperatures

Tube, Shell and Channel Stress Summary:

Case#	Ten	---- Tube Stresses		Tube Loads		Shell Stress		Channel Stress		Pass	
		Allwd	Cmp	Allwd	Ld	Allwd	Stress	Allwd	Stress	Allwd	Fail
D1uc	46	92	-12	-84	532	1057	...	...	...	...	Ok
D2uc	25	92	-25	-84	283	1057	...	...	...	...	Ok
D3uc	22	92	-6	-84	250	1057	...	...	...	...	Ok
D1c	49	92	-12	-84	566	1057	...	...	...	...	Ok
D2c	26	92	-26	-84	300	1057	...	...	...	...	Ok
D3c	23	92	-6	-84	266	1057	...	...	...	...	Ok
Max RATIO		0.535		0.309		0.535		...		...	

Summary of Thickness Comparisons for 6 Load Cases:

Thickness (mm)	Required	Actual	P/F
Tubesheet thickness :	111.769	115.000	Ok



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 261 of 275

ASME TS Calc:

Case: 1 6:05p Sep 8, 2026

Tube thickness :	0.291	2.110	Ok
Tube-tubesheet fillet weld leg :	1.281	2.110	Ok
Tube-tubesheet groove weld leg :	1.281	2.110	Ok

Note: This is a full strength Tube to Tubesheet Joint.

Tubesheet MAWP used to Compute Hydrotest Pressure:

Stress / Force Condition	Tubeside MAWP	Ø shellside Stress Rat.	Shellside MAWP	Ø tubeside Stress Rat.
Tubesheet Bending Stress	1056.66	1.000	1056.66	1.000
Tubesheet Shear Stress	6397.19	1.000	6397.19	1.000
Tube Tensile Stress	1868.32	1.000	1831.29	1.000
Tube Compressive Stress	7015.19	1.000	1681.20	1.000
Tube-Tubesheet Joint load	1868.32	1.000	1831.28	1.000
Tube Pressure Stress	22456.98	1.000	15019.19	1.000
Minimum MAWP	1056.66		1056.66	

Tubesheet MAPnc used to Compute Hydrotest Pressure:

Stress / Force Condition	Tubeside MAPnc	Ø shellside Stress Rat.	Shellside MAPnc	Ø tubeside Stress Rat.
Tubesheet Bending Stress	1166.65	1.000	1166.65	1.000
Tubesheet Shear Stress	6749.33	1.000	6749.33	1.000
Tube Tensile Stress	1976.17	1.000	1934.79	1.000
Tube Compressive Stress	7878.08	1.000	1934.79	1.000
Tube-Tubesheet Joint load	1976.17	1.000	1934.79	1.000
Tube Pressure Stress	22456.98	1.000	15019.19	1.000
Minimum MAPnc	1166.65		1166.65	

(*) Only the design load cases were analyzed to compute the MAWP for determining the test pressure.

Tubesheet MDMT Calculations:

Determine the governing MDMT considering the governing condition:

Governing thickness on the shell side per figure UCS-66.3 (c):

= tubesheet thickness/4

= 115/4

= 28.750 mm

Thickness Ratio = 0.86, Temperature Reduction per Fig. UCS 66.1 = 8 °C

Min Metal Temp. w/o impact per UCS-66, Curve B 3 °C

Min Metal Temp. at Required thickness (UCS 66.1) -5 °C

where the MDMT reduction ratio per UCS 66 (b)(1)(b) is:

= max(pt/Tubeside MAPnc, ps/Shellside MAPnc), must be ≤ 1

= max(1000/1167, 520/1167)

= 0.857

PV Elite is a trademark of Hexagon AB, 2026, All rights reserved.



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 262 of 275

ASME Fl-TS Calc:

Case: 1 6:05p Sep 8,2026

Input Echo, Tubesheet Number 1, Description: Floatating tube

Shell Data:

Main Shell Description: Main Shell

Shell Maximum Design Pressure	Psd,max	520.00 KPa.
Shell Maximum Operating Pressure	Psox,max	520.00 KPa.
Shell Minimum Operating Pressure	Psox,min	0.00 KPa.
Shell Thickness	ts	18.0000 mm
Shell Internal Corrosion Allowance	cas	3.0000 mm
Shell External Corrosion Allowance	casext	0.0000 mm
Inside Diameter of Shell	Ds	2480.000 mm
Shell Temperature for Internal Pressure	Ts	130.00 °C
Shell Material		SA-516 70

See ASME VIII Div. 1, UG-23(e), for determination of the SPS allowable.

Shell Material UNS Number		K02700
Shell Allowable Stress at Temperature	Ss	138.00 N./mm ²
Shell Allowable Stress at Ambient		138.00 N./mm ²

Channel Data:

Channel Description: LHS Ch Shell

Channel Type:		Cylinder
Channel Maximum Design Pressure	Ptd,max	1000.00 KPa.
Channel Maximum Operating Pressure	Ptox,max	1000.00 KPa.
Channel Minimum Operating Pressure	Ptox,min	0.00 KPa.
Channel Thickness	tc	20.0000 mm
Channel Internal Corrosion Allowance	cac	3.0000 mm
Channel External Corrosion Allowance	cacext	0.0000 mm
Inside Diameter of Channel	Dc	2480.000 mm
Channel Design Temperature	TEMPC	82.00 °C
Channel Flange Matl		SA-516 70

See ASME VIII Div. 1, UG-23(e), for determination of the SPS allowable.

Channel Material UNS Number		K02700
Channel Allowable Stress at Temperature	Sc	138.00 N./mm ²
Channel Allowable Stress at Ambient		138.00 N./mm ²

Tube Data:

Number of Tube Holes	Nt	6000
Tube Wall Thickness	et	2.1100 mm
Tube Outside Diameter	D	19.0500 mm
Total Straight Tube Length	Lt	6000.00 mm
Straight Tube Length (bet. inner tubsht faces) L		5770.00 mm
Design Temperature of the Tubes		130.00 °C
Tube Material		SA-179
Tube Material UNS Number		K01200
Is this a Welded Tube		No
Tube Material Specification used		Smls. tube
Tube Allowable Stress at Temperature		92.40 N./mm ²
Tube Allowable Stress At Ambient		92.40 N./mm ²
Tube Yield Stress At design Temperature	Syt	160.40 N./mm ²
Tube Pitch (Center to Center Spacing)	P	25.4000 mm
Tube Layout Pattern		Triangular
Fillet Weld Leg	af	2.1100 mm
Groove Weld Leg	ag	2.1100 mm
Tube-Tubesheet Joint Weld Type		Full Strength
Method for Tube-Tubesheet Jt. Allowable		UW-20.3
Is the Tube Inset		No
Radius to Outermost Tube Hole Center	ro	1130.510 mm
Largest Center-to-Center Tube Distance	Ul	0.0000 mm



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 263 of 275

ASME Fl-TS Calc:

Case: 1 6:05p Sep 8, 2026

Length of Expanded Portion of Tube	ltx	0.0000 mm
Tube-side pass partition groove depth	hg	0.0000 mm
Area of Tube Layout	Ap	32948.0 cm ²
Perimeter of Tube Layout	Cp	7006.7 mm

Tubesheet Data:

Tubesheet TYPE: Floating, Tubesheet Gasketed, Conf. B
Exchanger TYPE: With an Immersed Floating Head, Conf. a

Tubesheet Design Metal Temperature	T	82.00 °C
Tubesheet Material		SA-266 2

See ASME VIII Div. 1, UG-23(e), for determination of the SPS allowable.

Tubesheet Material UNS Number		K03506
Tubesheet Allowable Stress at Temperature	S	138.00 N./mm ²
Tubesheet Allowable Stress at Ambient	Tt	138.00 N./mm ²
Thickness of Tubesheet	h	115.0000 mm
Tubesheet Corr. Allowance (Shell side)	Cats	3.0000 mm
Tubesheet Corr. Allowance (Channel side)	Catc	3.0000 mm
Tubesheet Outside Diameter	A	2465.000 mm

Additional Data for Stepped Tubesheets:

Is the Tubesheet Stepped?		No
Area of the Untubed Lanes	AL	0.0 cm ²

Additional Data for Fixed/Floating Tubesheet Exchangers:

Unsupported Tube Span under consideration	l	635.910 mm
Tube End condition corresponding to Span (l)	k	1.00
Ignore Radial Thermal Exp. effects (4.18.8/4.18.9)		Yes
Perform Differential Pressure Design		No
Run Multiple Load Cases		Yes
Junction Stress Reduction option		Perform Plastic Calculation

Additional Data for Gasketed Tubesheets:

Tubesheet Gasket on which Side		Channel
Flange Outside Diameter	A	2465.000 mm
Flange Inside Diameter	B	2297.000 mm
Flange Face Outside Diameter	Fod	2326.000 mm
Flange Face Inside Diameter	Fid	2297.000 mm
Gasket Outside Diameter	Go	2323.000 mm
Gasket Inside Diameter	Gi	2297.000 mm
Gasket Factor,	m	3.00
Gasket Design Seating Stress	y	68.95 N./mm ²
Flange Facing Sketch		Code Sketch 1a
Gasket Thickness	tg	6.3500 mm
Full face Gasket Flange Option		Program Selects

Bolting Information:

Diameter of Bolt Circle	C	2368.000 mm
Nominal Bolt Diameter	dB	38.1000 mm
Thread Series		TEMA Thread Series
Number of Bolts	n	72
Bolt Material		SA-193 B7M
Bolt Material UNS Number		G41400
Bolt Allowable Stress At Temperature	Sb	138.00 N./mm ²
Bolt Allowable Stress At Ambient	Sa	138.00 N./mm ²
Weld between Flange and Shell/Channel		0.0000 mm

Note: The full bolt load Sa*Ab, was used for all load cases.

Tubesheet Extended as Flange		Yes
------------------------------	--	-----



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 264 of 275


ASME Fl-TS Calc:

Case: 1 6:05p Sep 8, 2026

Thickness of Extended Portion of Tubesheet Tf 99.0000 mm
Is Bolt Load Transferred to the Tubesheet Yes

Is Exchanger in Creep range (skip EP, Use 3S for Sps) No

Tubesheet Gasketed, Extended as a Flange

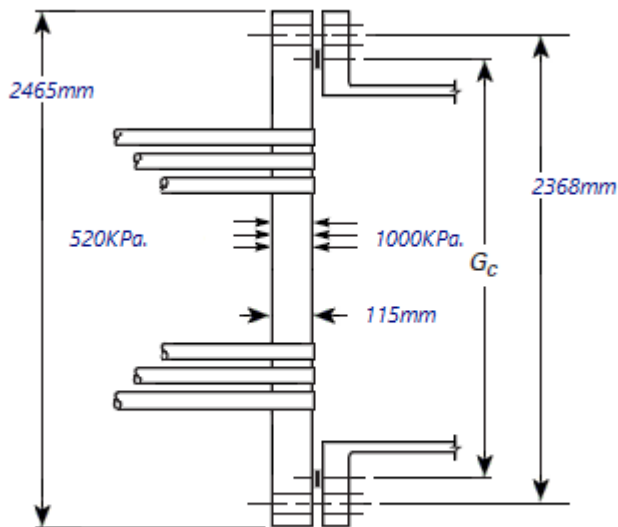

Configuration B:

ASME TubeSheet Results per Part UHX/4.18, 2025

Elasticity/Expansion Material Properties:

Shell - TE-1 Carbon & Low Alloy Steels, Group 1
Shell - TM-1 Carbon Steels with C<= 0.3%

Th. Exp. Coeff. Metal Temp. along Len	0.0 °C	0.0000112153 /°C
Elastic Mod. at Design Temperature	130.0 °C	0.19629E+09 KPa.
Th. Exp. Coeff. Metal Temp. at Tubsht	21.1 °C	0.0000115190 /°C
Elastic Mod. at Metal Temp. along Len	0.0 °C	0.20409E+09 KPa.
Elastic Mod. at Ambient Temperature	21.1 °C	0.20270E+09 KPa.

Channel - TE-1 Carbon & Low Alloy Steels, Group 1
Channel - TM-1 Carbon Steels with C<= 0.3%

Th. Exp. Coeff. Metal Temp. at Tubsht	21.1 °C	0.0000115190 /°C
Elastic Mod. at Design Temperature	82.0 °C	0.19921E+09 KPa.
Elastic Mod. at Ambient Temperature	21.1 °C	0.20270E+09 KPa.

Tubes - TE-1 Carbon & Low Alloy Steels, Group 1
Tubes - TM-1 Carbon Steels with C<= 0.3%

Th. Exp. Coeff. Metal Temp. along Len	0.0 °C	0.0000112153 /°C
Elastic Mod. at Design Temperature	130.0 °C	0.19629E+09 KPa.
Elastic Mod. at Metal Temp. along Len	0.0 °C	0.20409E+09 KPa.
Elastic Mod. at Tubsht. Design Temp.	82.0 °C	0.19921E+09 KPa.
Elastic Mod. at Ambient Temperature	21.1 °C	0.20270E+09 KPa.

TubeSheet - TE-1 Carbon & Low Alloy Steels, Group 1
TubeSheet - TM-1 Carbon Steels with C> 0.3%



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 265 of 275

ASME Fl-TS Calc:

Case: 1 6:05p Sep 8,2026

Elastic Mod. at Design Temperature	82.0 °C	0.19784E+09 KPa.
Elastic Mod. at Ambient Temperature	21.1 °C	0.20132E+09 KPa.

Note:

The Elasticity and Alpha values are taken from Tables in ASME II D.
Please insure these properties are consistent with the
type of Material for the tubes, shell, channel etc.

Tube Required Thickness under Internal Pressure (Tubeside pressure):

Thickness Due to Internal Pressure:

$$= (P \cdot (D/2 - CAE)) / (S \cdot E + 0.4 \cdot P)$$
 per Appendix 1-1 (a)(1)

$$= (1000 \cdot (19/2 - 0)) / (92.4 \cdot 1 + 0.4 \cdot 1000)$$

$$= 0.1026 + 0.0000 = 0.1026 \text{ mm}$$

Tube Required Thickness under External Pressure (Shellside pressure) :

External Pressure Chart	CS-1	at	130.00 °C
Elastic Modulus for Material			199943392.00 KPa.

Results for Max. Allowable External Pressure (Emawp):

TCA	ODCA	SLEN	D/T	L/D	Factor A	B
2.1100	19.05	5770.00	9.03	50.0000	0.0134948	95.84

EMAWP = $(2.167 / (D/T) - 0.0833) \cdot B = 15019 \text{ KPa.}$

Results for Req'd Thickness for Ext. Pressure (Tca):

TCA	ODCA	SLEN	D/T	L/D	Factor A	B
0.2905	19.05	5770.00	65.57	50.0000	0.0002558	25.58

EMAWP = $(4 \cdot B) / (3 \cdot (D/T)) = (4 \cdot 25.6) / (3 \cdot 65.6) = 520 \text{ KPa.}$

Summary of Tube Required Thickness Results:

Total Required Thickness including Corrosion all.	0.2905 mm
Allowable Internal Pressure at Corroded thickness	22456.99 KPa.
Required Internal Design Pressure	1000.00 KPa.
Allowable External Pressure at Corroded thickness	15019.20 KPa.
Required External Design Pressure	520.00 KPa.
Required Thickness due to Shell Side pressure	0.2905 mm

Detailed Results for load Case D3 un-corr. (Psd,max + Ptd,max)

Intermediate Calculations For Tubesheets Extended As Flanges:

ASME Code, Section VIII Division 1, 2025

Gasket Contact Width,	$N = (Goc - Gic) / 2$	13.000 mm
Basic Gasket Width,	$b0 = N / 2$	6.500 mm
Effective Gasket Width,	$b = \text{sqrt}(b0) \cdot 2.5$	6.422 mm
Gasket Reaction Diameter,	$G = Go - 2.0 \cdot b$	2310.156 mm

Results for ASME Floating Tubesheet Calculations for Configuration B:

Results for Tubesheet Calculations Original Thickness:

ASME Section VIII-2 Part 4.18.9.4 Step 1:

Tube expansion depth ratio [ρ]:

$= ltx / h$ (modified for corrosion if present)
 $= 0/115$
 $= 0.0000$ (must be $0 \leq \rho \leq 1$)

Effective tube hole diameter [d*]:

$= \max(dt - 2 \cdot tt(Et/E) \cdot (StT/S) \cdot (\rho); dt - 2 \cdot tt)$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 266 of 275

ASME Fl-TS Calc: Case: 1 6:05p Sep 8, 2026

$$= \max(19 - 2 \cdot 2.11 (199214080/197835184) \cdot (92.4/138) \cdot (0); 19 - 2 \cdot 2.11)$$

$$= 19.0500 \text{ mm}$$

Equivalent outer tube limit circle diameter [Do]:

$$= 2 \cdot r_o + dt$$

$$= 2 \cdot 1131 + 19$$

$$= 2280.070 \text{ mm}$$

Determine the basic ligament efficiency for shear [μ]:

$$= (p - dt) / p$$

$$= (25.4 - 19) / 25.4$$

$$= 0.250$$

Equivalent outer tube limit radius [ao]:

$$= D_o / 2$$

$$= 2280 / 2$$

$$= 1140.0350 \text{ mm}$$

Effective tube pitch [p*]:

$$= p / \sqrt{1 - 4 \cdot \min(AL \cdot CNVfactor; 4 \cdot D_o \cdot p) / (\pi \cdot D_o^2)}$$

$$= 25.4 / \sqrt{1 - 4 \cdot \min(0 \cdot 100; 4 \cdot 2280 \cdot 25.4) / (\pi \cdot 2280^2)}$$

$$= 25.4000 \text{ mm}$$

Effective ligament efficiency for bending [μ^*]:

$$= (p^* - d^*) / p^*$$

$$= (25.4 - 19) / 25.4$$

$$= 0.2500$$

Ratio [ps]:

$$= a_s / a_o$$

$$= 1155 / 1140$$

$$= 1.0132$$

Ratio [pc]:

$$= a_c / a_o$$

$$= 1155 / 1140$$

$$= 1.0132$$

Compute parameter [xt]:

$$= 1 - Nt((dt - 2 \cdot tt) / (2 \cdot a_o))^2$$

$$= 1 - 6000 ((19 - 2 \cdot 2.11) / (2 \cdot 1140))^2$$

$$= 0.7462$$

Determine parameter [xs]:

$$= 1 - Nt(dt / (2 \cdot a_o))^2$$

$$= 1 - 6000 (19 / (2 \cdot 1140))^2$$

$$= 0.5812$$

Determine the value [h'g]:

$$= \max((h_g - CATC); 0) \text{ (For pressure only cases)}$$

$$= \max((0 - 0); 0)$$

$$= 0.000 \text{ mm}$$

ASME Section VIII-2 Part 4.18.9.4 Step 2:

Intermediate parameters for Tubesheet Gasketed on the Shell Side:

β_s , k_s , λ_s , δ_s are all = 0

Intermediate parameters for Tubesheet Gasketed on the Channel Side:

β_C , k_C , λ_C , δ_C are all = 0

ASME Section VIII-2 Part 4.18.9.4 Step 3:

$h/p = 4.527559$; $\mu^* = 0.250000$; $E^* = 42853184 \text{ KPa}$.



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 267 of 275

ASME Fl-TS Calc:

Case: 1 6:05p Sep 8, 2026

$$E^*/E = 0.216611 ; v^* = 0.396457$$

Note: As h/p (4.528) is > 2 , data values for $h/p = 2$ were used.

Tube Bundle Stiffness Factor $[X_a]$:

$$\begin{aligned} &= \left(\left(24(1 - v^*)Nt \cdot Et \cdot tt(dt - tt)ao^2 \right) / (E^* \cdot L \cdot H^3) \right)^{1/4} \\ &= \left(\left(24(1 - 0.4^2)6000 \cdot 196289984 \cdot 2.11 \right. \right. \\ &\quad \left. \left. (19 - 2.11)1140^2 \right) / (42853184 \cdot 5770 \cdot 115^3) \right)^{1/4} \\ &= 7.3654 \end{aligned}$$

Values from Table 4.18.3

$$\begin{aligned} Z_d &= 0.003715 ; Z_v = 0.018522 ; Z_m = 0.194582 \\ Z_a &= 0.468923E+03 ; Z_w = 0.018522 \end{aligned}$$

ASME Section VIII-2 Part 4.18.9.4 Step 4:

Diameter ratio $[K]$:

$$\begin{aligned} &= A / Do \\ &= 2465/2280 \\ &= 1.0811 \end{aligned}$$

Compute coefficient $[F]$:

$$\begin{aligned} &= (1 - v^*) / E^* \cdot (\lambda_s + \lambda_c + E \cdot \ln(K)) \\ &= (1 - 0.4) / 42853184 \cdot (0 + 0 + \\ &\quad 197835184 \cdot \ln(1.08)) \\ &= 0.2173 \end{aligned}$$

Compute parameter $[\phi]$:

$$\begin{aligned} &= (1 + v^*)F \\ &= (1 + 0.4)0.22 \\ &= 0.3034 \end{aligned}$$

Compute parameter $[Q_1]$:

$$\begin{aligned} &= (\rho_s - 1 - \phi \cdot Z_v) / (1 + \phi \cdot Z_m) \\ &= (1.01 - 1 - 0.3 \cdot 0.019) / (1 + 0.3 \cdot 0.19) \\ &= 0.007152 \end{aligned}$$

ASME Section VIII-2 Part 4.18.9.4 Step 5:

Determine factor $[\gamma_b]$:

$$\begin{aligned} &= (G_c - C) / Do \text{ (config b)} \\ &= (2310 - 2368) / 2280 = -0.025 \end{aligned}$$

Calculate parameter $[\omega_s]$:

$$\begin{aligned} &= \rho_s \cdot k_s \cdot \beta_s \cdot \delta S(1 + h \cdot \beta_s) \\ &= 1.01 \cdot 0 \cdot 0 \cdot 0.000(1 + 115 \cdot 0) \\ &= 0.0000 \text{ mm}^2 \end{aligned}$$

Calculate parameter $[\omega^*s]$:

$$\begin{aligned} &= ao^2(\rho_s^2 - 1) \cdot (\rho_s - 1) / 4 - \omega_s \\ &= 1140^2(1.01^2 - 1) \cdot (1.01 - 1) / 4 - 0 \\ &= 113.8897 \text{ mm}^2 \end{aligned}$$

Parameter $[\omega_c]$:

$$\begin{aligned} &= \rho_c \cdot k_c [\delta C(C_m \theta + \beta C + C_q \Delta \cdot h \cdot \beta C^2) - \\ &\quad \zeta c(C_m \theta + h \cdot C_q \theta \cdot h \cdot \beta C / 2)] \\ &= 1.01 \cdot 0 [0.000(0 + 0 \cdot 0 \cdot 115) - \\ &\quad 0.000(0/115 + 0 \cdot 0/2)] \\ &= 0.0000 \text{ mm}^2 \end{aligned}$$

Parameter $[\omega^*c]$:

$$\begin{aligned} &= ao^2[(\rho_c^2 + 1) \cdot (\rho_c - 1) / 4 - (\rho_s - 1) / 2] - \omega_c \\ &= 1140^2[(1.01^2 + 1) \cdot (1.01 - 1) / 4 - (1.01 - 1) / 2] - 0 \\ &= 113.8891 \text{ mm}^2 \end{aligned}$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 268 of 275

ASME Fl-TS Calc:

Case: 1 6:05p Sep 8, 2026

Pressure [P*S]:

= 0 For Pressure only cases or Configurations d,e,f,A,B,C,D

Pressure [P*C]:

= 0 For Pressure only cases or Configurations b,c,d,B,C,D

ASME Section VIII-2 Part 4.18.9.4 Step 6:

$$P_e = P_s - P_t$$

$$= 520 - 1000 = -480 \text{ KPa.}$$

ASME Section VIII-2 Part 4.18.9.4 Step 7:

Determine factor [Q2]:

$$= \left[\left(\omega_s \cdot P_s - \omega_c \cdot P_t \right) - \left(\omega_s \cdot P_s - \omega_c \cdot P_c \right) \right] + \frac{W \cdot \gamma_b}{(2 \cdot \pi)} \cdot \frac{1}{(1 + \phi \cdot Z_m)}$$

$$= \left[\left(114 \cdot 520 - 114 \cdot 1000 \right) - \left(0 \cdot 0 - 0 \cdot 0 \right) \right] \cdot 0.0001 + \frac{918372 \cdot -0.025}{(2 \cdot \pi)} \cdot \frac{1}{(1 + 0.3 \cdot 0.19)}$$

$$= -3506.6316 \text{ Kgf}$$

Calculate factor [Q3]:

$$= Q_1 + 2 \cdot Q_2 / (P_e \cdot a_o^2)$$

$$= 0.0072 + 2 \cdot -3507 / (-480 \cdot 1140^2)$$

$$= 0.11739$$

Fm Value from Table 4.18.3 = 0.079278

Tubesheet Bending Stress - original thickness [σ]:

$$= (1.5 \cdot F_m / \mu) \cdot (2 \cdot a_o / (H - h'g))^2 \cdot P_e$$

$$= (1.5 \cdot 0.079 / 0.25) \cdot (2 \cdot 1140 / (115 - 0))^2 \cdot -480$$

$$= -89.7573 \text{ N./mm}^2$$

Allowable Tubesheet Bending Stress [σ allowed]:

$$= 1.5 \cdot S = 1.5 \cdot 138 = 207 \text{ N./mm}^2$$

Tubesheet Bending Stress - final thickness [σ_f]:

$$= (1.5 \cdot F_m / \mu) \cdot (2 \cdot a_o / (h - h'g))^2 \cdot P_e$$

$$= (1.5 \cdot 0.073 / 0.25) \cdot (2 \cdot 1140 / (72.8 - 0))^2 \cdot -480$$

$$= -206.9849 \text{ N./mm}^2$$

Reqd Tubesheet Thickness, for Bending Stress (including CA) [HReqB]:

$$= h + C_{ats} + C_{atc}$$

$$= 72.8 + 0 + 0$$

$$= 72.7655 \text{ mm}$$

$$H_{reqd.} = H_{ReqB} = 72.7655 \text{ mm}$$

Computations completed for ASME tubesheet configuration: B

Stress/Force Summary for Loadcase D3 un-corr. (Psd,max + Ptd,max):

Stress Description	Actual	Allowable	Pass/Fail
Tubesheet bend. stress	89.8 <=	207.0 N./mm ²	Pass

Floating Tubesheet results per ASME Div. 2 Part 4.18.9 2025

Results for 6 Load Cases:

Case#	--Reqd. Thk. + CA Tbsht Extnsn	----	Tubesheet Stresses Bend Allwd Shear Allwd	Case Type	Pass/Fail
D1uc	86.945 55.424	130 207	...	Ps+Pt-Th	D1 Ok



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 269 of 275

ASME Fl-TS Calc:

Case: 1 6:05p Sep 8, 2026

D2uc	37.934	...	43	207	...	...	Ps+Pt-Th	D2	Ok
D3uc	72.766	...	90	207	...	...	Ps+Pt-Th	D3	Ok
D1c	92.944	55.424	142	207	...	...	Ps+Pt-Th-c	D1	Ok
D2c	43.923	...	47	207	...	...	Ps+Pt-Th-c	D2	Ok
D3c	78.749	...	99	207	...	...	Ps+Pt-Th-c	D3	Ok

Max: 92.9437 55.424 mm 0.686 ... (Str. Ratio)

Load Case Definitions:

[Ps & Pt]:

Shell-side and Tube-side Design or Operating Pressures
derived from Psd,min Ptd,max, Psox,min, Ptox,max etc. per the
Load Case Tables

[(+)-Th]:

With or Without Thermal Expansion, Tt,mx & Ts,mx

[c]:

With or Without Corrosion Allowance

[D1, D2, D3]:

Design Load Cases using the Maximum and Minimum Design Pressures

[D4]:

Design Load Case using the Minimum (Vacuum) Pressures (if specified)

[O1, O2, O3, O4]:

Operating Load Cases using the Maximum and Minimum Operating Pressures and
Operating Temperatures

Summary of Thickness Comparisons for 6 Load Cases:

Thickness (mm)	Required	Actual	P/F
Tubesheet thickness :	92.944	115.000	Ok
Tubesheet thickness flanged extension :	55.424	99.000	Ok
Tube thickness :	0.291	2.110	Ok
Tube-tubesheet fillet weld leg :	0.000	2.110	Ok
Tube-tubesheet groove weld leg :	0.000	2.110	Ok

Tubesheet MAWP used to Compute Hydrotest Pressure:

Stress / Force Condition	Tubeside MAWP	Ø shellside Stress Rat.	Shellside MAWP	Ø tubeside Stress Rat.
Tubesheet Bending Stress	1808.00	1.000	2308.45	1.000
Tube Pressure Stress	22456.98	1.000	15019.19	1.000
Tubesheet Extension Stress	2014.18	...	No Calc	No Calc
Minimum MAWP	1808.00		2308.45	

Tubesheet MAPnc used to Compute Hydrotest Pressure:

Stress / Force Condition	Tubeside MAPnc	Ø shellside Stress Rat.	Shellside MAPnc	Ø tubeside Stress Rat.
Tubesheet Bending Stress	1963.91	1.000	2489.49	1.000
Tube Pressure Stress	22456.98	1.000	15019.19	1.000
Tubesheet Extension Stress	2014.18	...	No Calc	No Calc
Minimum MAPnc	1963.91		2489.49	



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 270 of 275

ASME Fl-TS Calc:

Case: 1 6:05p Sep 8, 2026

(*) Only the design load cases were analyzed to compute the MAWP for determining the test pressure.

Tubesheet MDMT Calculations:

Determine the governing MDMT considering the governing condition:

Governing thickness on the shell side per figure UCS-66.3 (c):

= tubesheet thickness/4

= 115/4

= 28.750 mm

Thickness Ratio = 0.51, Temperature Reduction per Fig. UCS 66.1 = 31 °C

Min Metal Temp. w/o impact per UCS-66, Curve B 3 °C

Min Metal Temp. at Required thickness (UCS 66.1) -28 °C

where the MDMT reduction ratio per UCS 66 (b)(1)(b) is:

= max(pt/Tubeside MAPnc, ps/Shellside MAPnc), must be ≤ 1

= max(1000/1964, 520/2489)

= 0.509

PV Elite is a trademark of Hexagon AB, 2026, All rights reserved.



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 271 of 275

Floating Head: Operating

Case: 1 6:05p Sep 8,2026

Input Echo, Floating Head Item 1, Description: Operating

Floating Head Type		D	
Tube Side (Internal) Design Pressure	Pts	1000.00	KPa.
Shell Side (External) Design Pressure	Pss	520.00	KPa.
Design Temperature for Spherical Head	Temp	130.00	°C
Head Material		SA-516 70	
Head Material UNS Number		K02700	
Head Allowable Stress at Temperature	Sho	138.00	N./mm ²
Head Allowable Stress at Ambient	Sha	138.00	N./mm ²
Crown Radius for Spherical Head	L	2067.000	mm
Head Thickness	Th	30.000	mm
Tube Side (Internal) Corrosion Allowance	Cats	3.0000	mm
Shell Side (External) Corrosion Allowance	Cass	3.0000	mm
Flange Material		SA-266	
Flange Allowable Stress at Temperature	Sfo	138.00	N./mm ²
Flange Allowable Stress at Ambient	Sfa	138.00	N./mm ²
Flange Outside Diameter	Fod	2465.000	mm
Flange Inside Diameter	Fid	2297.000	mm
Flange Thickness	Tf	170.0000	mm
Bolt Material		SA-193 B7M	
Bolt Material UNS Number		G41400	
Bolt Allowable Stress At Temperature	Sb	138.00	N./mm ²
Bolt Allowable Stress At Ambient	Sa	138.00	N./mm ²
Diameter of Bolt Circle	C	2368.000	mm
Nominal Bolt Diameter	dB	38.1000	mm
Type of Threads		TEMA Thread Series	
Number of Bolts		72	
Full face Gasket Flange Option		Program Selects	
Flange Face Outside Diameter	Ffod	2326.000	mm
Flange Face Inside Diameter	Ffid	2297.000	mm
Gasket Outside Diameter	Go	2323.000	mm
Gasket Inside Diameter	Gi	2297.000	mm
Gasket Factor,	m	3.0000	
Gasket Design Seating Stress	y	68.95	N./mm ²
Flange Facing Sketch		Code Sketch 1a	
Column for Gasket Seating		Code Column I	
Gasket Thickness		6.3500	mm
Width of raised face		0.0000	mm
Dist. from Head Centerline to Flange Centroid hr		15.0566	mm
The Flange is not Slotted.			
This unit does not have a Backing Ring.			
Use Full Bolt Load in Flange Design		Yes	




PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 272 of 275

Floating Head: Operating

Case: 1 6:05p Sep 8, 2026

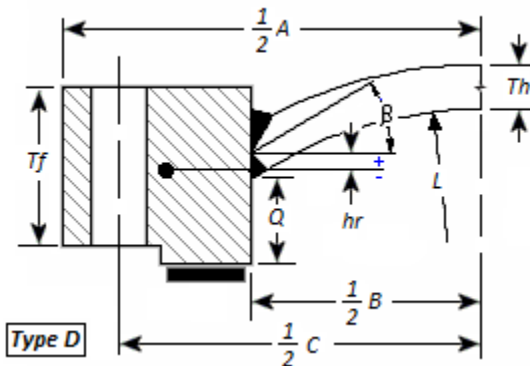

Internal Pressure results for Spherical Heads:

ASME Code, Section VIII, Division 1, 2025, App. 1-6

Thickness Due to Internal Pressure[thr]:

$$\begin{aligned} &= 5PL / 6Sho \\ &= (5 \cdot 1000 \cdot 2070) / (6 \cdot 138) \\ &= 12.5010 \text{ mm} \end{aligned}$$

Maximum Allowable Working Pressure at Given Thickness[Pa]:

$$\begin{aligned} &= 6Sho \cdot (Th - Cass - Cats) / 5L \\ &= (6 \cdot 138 \cdot 24) / (5 \cdot 2070) \\ &= 1919.85 \text{ KPa.} \end{aligned}$$

Maximum Allowable Pressure, New and Cold[Pnc]:

$$\begin{aligned} &= 6Sha / 5L \\ &= (6 \cdot 138 \cdot 30) / (5 \cdot 2067) \\ &= 2403.30 \text{ KPa.} \end{aligned}$$

Actual Stress at given Pressure and Thickness[Sact]:

$$\begin{aligned} &= 5PL / 6(Th - Cass - Cats) \\ &= (5 \cdot 1000 \cdot 2070) / (6 \cdot 24) \\ &= 72. \text{ N./mm}^2 \end{aligned}$$

Spherical head Percent Elongation $(75 \cdot t_{nom} / R_f) \cdot (1 - R_f / R_o)$: 1.081 %

External Pressure results, Spherical Head

ASME Code, Section VIII Division 1, 2025

External Pressure Chart CS-2 at 130.00 °C
Elastic Modulus for Material 199943392.00 KPa.

Results for Maximum Allowable External Pressure:

Corroded Thickness of Shell	TCA	24.0000	mm
Outside Crown Radius of Shell	OD/2	2093.9998	mm
Crown Radius / Thickness Ratio	$(OD/2)/T$	87.2500	
Geometry Factor, A	f(D/T, LD)	0.0014327	
Materials Factor, B	f(A, Chart)	95.5859	N./mm ²
Maximum Allowable Working Pressure		1095.48	KPa.
$EMAWP = B / ((OD/T)/2) = 95.6 / (174/2.0) = 1095$			

Results for Req'd Thickness for Ext. Pressure (Tca):

Corroded Thickness of Head	TCA	13.7756	mm
Outside Diameter of Shell	ODCA	4188.000	mm
Diameter / Thickness Ratio	(D/T)	304.0156	
Geometry Factor, A	f(DT, LD)	0.0008223	
Materials Factor, B	f(A, Chart)	79.0583	N./mm ²
Maximum Allowable Working Pressure		520.06	KPa.
$EMAWP = B / ((D/T)/2) = 79.1 / (304/2) = 520$			



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 273 of 275

Floating Head: Operating

Case: 1 6:05p Sep 8, 2026

Intermediate Calculations for Flanged portion:

ASME Code, Section VIII, Div. 1, 2025 App. 2

Gasket Contact Width,	$N = (G_{oc} - G_{ic}) / 2$	13.000 mm
Basic Gasket Width,	$b_0 = N / 2$	6.500 mm
Effective Gasket Width,	$b = \text{sqrt}(b_0) * 2.5$	6.422 mm
Gasket Reaction Diameter,	$G = G_o - 2.0 * b$	2310.156 mm

ASME Maximum Circumferential Spacing between Bolts per App. 2 eq. (3) [Bsm_{ax}]:

$= 2a + 6t / (m + 0.5)$
 $= 2 * 38.1 + 6 * 170 / (3 + 0.5)$
 $= 367.629 \text{ mm}$

Actual Circumferential Bolt Spacing [Bs]:

$= C * \sin(\pi / n)$
 $= 2368 * \sin(\pi / 72)$
 $= 103.291 \text{ mm}$

ASME Moment Multiplier for Bolt Spacing per App. 2 eq. (7) [Bsc]:

$= \max(\sqrt{Bs / (2a + t)}, 1)$
 $= \max(\sqrt{103 / (2 * 38.1 + 170)}, 1)$
 $= 1.0000$

Bolting Information for TEMA Imperial Thread Series (Non Mandatory):

Total Area of Bolts 652.644 cm²

	Minimum	Actual	Maximum
Radial Distance between Bolts and Edge:	38.100	45.500	
Circ. Spacing between the Bolts:	82.550	103.291	367.629

Results for the Internal Pressure case:

Basic Flange and Bolt loads:

Hydrostatic End Load due to Pressure	H	427433.9	Kgf
Contact Load on Gasket Surfaces	Hp	28518.3	Kgf
Hydrostatic End Load at Flange ID	Hd	424790.1	Kgf
Pressure Force on Flange Face	Ht	2643.8	Kgf
Radial Component of Head Membrane Force	Hr	637624.7	Kgf
Operating Bolt Load:	Wm1	455952.2	Kgf
Gasket Seating Bolt Load	Wm2	327703.7	Kgf
Required Bolt Area	Am	324.024	cm ²

Min. Gasket Contact Width (Brownell Young) [Not an ASME Calculation]:

$= A_b * S_b / (y * P * (G_o + G_i))$
 $= 653 * 138 / (68.9 * 3.14 * (2323 + 2297))$
 $= 9.000 \text{ mm}$

Note: Recommended Min. Width for Sheet and Composite Gaskets per table 2-4 :

= 38.100 mm [Note: Exceeds actual gasket width, 13.000]

Flange Design Bolt Load (Seating)	W	918372.3	Kgf
Gasket Seating Force (Operating)	Hg	28518.3	Kgf
Distance to Gasket Load Reaction	hg	28.9222	mm
Distance to Face Pressure Reaction	ht	30.7111	mm
Distance to End Pressure Reaction	hd	32.5000	mm

Summary of Moments for Internal Pressure:

Loading	Force	Distance	Bolt Corr	Moment
End Pressure,	Md	424790.	32.5000	1.0000 13806. Kg-m.



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 274 of 275

Floating Head: Operating

Case: 1 6:05p Sep 8,2026

Face Pressure,	Mt	2644.	30.7111	1.0000	81. Kg-m.
Gasket Load,	Mg	28518.	28.9222	1.0000	825. Kg-m.
Floating Hd. Load,	Mh	637625.	15.0566	1.0000	-9601. Kg-m.
Gasket Seating,	Ma	918372.	28.9222	1.0000	26562. Kg-m.

Total Moment for Operation (Internal Pressure) 5111.304 Kg-m.

Total Moment for Gasket Seating (Int. Pressure) 26561.844 Kg-m.

Results for the External Pressure case:

Basic Flange and Bolt loads:

Hydrostatic End Load due to Pressure	H	222265.6	Kgf
Hydrostatic End Load at Flange ID	Hd	220890.8	Kgf
Pressure Force on Flange Face	Ht	1374.8	Kgf
Radial Component of Head Membrane Force	Hr	331564.9	Kgf
Gasket Seating Bolt Load	Wm2	327703.7	Kgf
Required Bolt Area	Am	232.884	cm ²

Flange Design Bolt Load (Seating)	W	918372.3	Kgf
Distance to Gasket Load Reaction	hg	28.9222	mm
Distance to Face Pressure Reaction	ht	30.7111	mm
Distance to End Pressure Reaction	hd	32.5000	mm

Summary of Moments for External Pressure:

Loading		Force	Distance	Bolt Corr	Moment
End Pressure,	Md	220891.	3.5778	1.0000	790. Kg-m.
Face Pressure,	Mt	1375.	1.7889	1.0000	2. Kg-m.
Floating Hd. Load,	Mh	331565.	15.0566	1.0000	-4992. Kg-m.
Gasket Seating,	Ma	918372.	28.9222	1.0000	26562. Kg-m.

Total Moment for Operation (External Pressure) 4199.563 Kg-m.

Total Moment for Gasket Seating (Ext. Pressure) 26561.844 Kg-m.

Factor for integral type flanges [F]:

$$= P \cdot B \cdot \sqrt{(4 \cdot L \cdot L - B \cdot B) / (8 \cdot S(A - B))}$$

$$= 1000 \cdot 2303 \cdot \sqrt{(4 \cdot 2070 \cdot 2070 - 2303 \cdot 2303) / (8 \cdot 138(2459 - 2303))}$$

$$= 46.0079 \text{ mm}$$

Factor [J]:

$$= Mo(A + B) / (S \cdot B)(A - B)$$

$$= 5111(2459 + 2303) / (138 \cdot 2303)(2459 - 2303)$$

$$= 4814.5029 \text{ mm}^2$$

Required thickness for Main Flange, Internal Operating Condition [T]:

$$= F + \sqrt{(F \cdot F + J)} \text{ per 1-6(g)}$$

$$= 46 + \sqrt{(46 \cdot 46 + 4815)}$$

$$= 129.2619 \text{ mm}$$

Factor [J]:

$$= Mo(A + B) / (S \cdot B)(A - B)$$

$$= 26562(2459 + 2303) / (138 \cdot 2303)(2459 - 2303)$$

$$= 25019.4629 \text{ mm}^2$$

Required thickness for Main Flange, Internal Bolt-up Condition [T]:

$$= F + \sqrt{(F \cdot F + J)} \text{ per 1-6(g)}$$

$$= 0 + \sqrt{(0 \cdot 0 + 25019)}$$

$$= 158.1754 \text{ mm}$$

Factor for integral type flanges [F]:

$$= P \cdot B \cdot \sqrt{(4 \cdot L \cdot L - B \cdot B) / (8 \cdot S(A - B))}$$

$$= 520 \cdot 2303 \cdot \sqrt{(4 \cdot 2070 \cdot 2070 - 2303 \cdot 2303) / (8 \cdot 138(2459 - 2303))}$$



PV Elite 28 Licensee: SL User

FileName : 108-CA-CB_(Top)

Page 275 of 275

Floating Head: Operating

Case: 1 6:05p Sep 8, 2026

= 23.9241 mm

Factor [J]:

= $Mo(A + B)/(S \cdot B)(A - B)$

= $4200(2459+2303)/(138 \cdot 2303)(2459-2303)$

= 3955.7051 mm²

Required thickness for Main Flange, External Operating Condition [T]:

= $F + \sqrt{(F \cdot F + J)}$ per 1-6(g)

= $23.9 + \sqrt{(23.9 \cdot 23.9 + 3956)}$

= 91.2150 mm

Factor [J]:

= $Mo(A + B)/(S \cdot B)(A - B)$

= $26562(2459+2303)/(138 \cdot 2303)(2459-2303)$

= 25019.4629 mm²

Required thickness for Main Flange, External Bolt-up Condition [T]:

= $F + \sqrt{(F \cdot F + J)}$ per 1-6(g)

= $0 + \sqrt{(0 \cdot 0 + 25019)}$

= 158.1754 mm

Summary of Required Thicknesses(mm):

	Head	Flange
Tubeside (Internal) Pressure	12.5010	129.2619
Shellside (External) Pressure	13.7756	91.2150
Tubeside Gasket Seating Load		158.1754
Shellside Gasket Seating Load		158.1754
Maximum + Corrosion Allowance	19.7756	164.1754
Actual Thickness as Given	30.0000	170.0000

Floating Head MAWP and MAPnc (KPa.):

Stress Condition	Tubeside		Shellside	
	MAWP	MAPnc	MAWP	MAPnc
Flange Stress	1353.56	1440.87	1182.90	1412.60
Floating head Stress	1919.75	2403.20	1095.38	1447.07
Bolt Stress	2014.09	2014.09	...	...
Minimum MAWP & MAPnc	1353.56	1440.87	1095.38	1412.60

PV Elite is a trademark of Hexagon AB, 2026, All rights reserved.



PV Elite® Pressure Vessel Design Notes

Project Information	
Project Number	
Client	
Date	
Designer	
Design Code	
Additional Standards	

Design Conditions		
Internal Design Pressure:		
External Design Pressure:		
Design Int. Temperature:		
Design Ext. Temperature:		
Corrosion Allowance:		

Vessel Geometry		
Vessel Type		
Diameter		
Tangent-to-Tangent Length		
Head Type		
Number of Segments		

Material Specifications	
Shell:	
Head:	
Nozzle:	

Nozzle/Opening Details	ID/OD	Size	Rating	Matl.	Reinf.

Miscellaneous		
Support Type		
Number of Supports		
Support Material		
Seismic Code		
Wind Code		
Insulation		
Pressure Test		
Radiography		
Fatigue Analysis		

Analysis Notes: