# Datasheet



# HD-TH4075Y

### General

- Indoor
- Downlight
- Recessed
- Version: round
- Housing: white
- Reflector: chrome
- System Output: 490lm
- IP 20

### LED

- 2700K/3000K/3500K/4000K
- CRI>90
- 50000h@L80B10
- SDCM: 2

### Optics

- Beam angle: 36°/60°
- UGR <19

### Electric

- LED Driver: ON-OFF
- LED Power: 7W
- 36V
- 150mA


### Dimensions

- Measurement: Ø84mm
- Cutout: Ø75mm
- Height: 34mm

### Description

- Round fixed Recessed Downlight (75 Series) made of die-cast aluminum with white powder-coating finish (RAL 9016) and white/black/chrome reflector;
- ON-OFF Driver;
- LED 7W;
- Measurement Ø84mm; ceiling cutout of Ø75mm with a narrow mounting trim;
- High color rendering at an index of CRI90;
- After a lifetime of 50000h min. 80% of the luminous flux with energy efficient Luminus LED Chips;
- 5 years warranty;
- Beam characteristic with 36°/60° beam angles;
- Lighting perfectly suitable for reading, writing as well as computer and control work according to DIN EN 12464-1(UGR<19);
- Degree of housing protection according to DIN EN 60529 (IP20).


### Light distribution




7W 36°

Lux

| h(m) | d(m) | Em | Emax |
|---|---|---|---|
| 1 | 0.61 | 1040 | 1481 |
| 2 | 1.22 | 260.6 | 370.3 |
| 3 | 1.83 | 115.8 | 164.6 |





7W 60°

Lux

| h(m) | d(m) | Em | Emax |
|---|---|---|---|
| 1 | 1.03 | 435.1 | 790.3 |
| 2 | 2.06 | 108.8 | 197.6 |
| 3 | 3.09 | 48.35 | 87.81 |




### Technical drawing

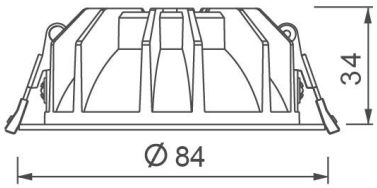


The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors.