HDL-MPWPID00LN.18(16)-A

Wireless Power Interface EU(US) (L+N Type)

buspro WIRELESS

**Datasheet**

Issued: August 15, 2019

Edition: V1.0.0

## Overview

Wireless Power Interface EU(US) (L+N Type) (See Figure 1 - 2) is used in conjunction with the wireless panel and provides working voltage for wireless panel. The power interface is divided into two types: European standard and American standard.

## Functions

- Provides DC 5V working voltage for wireless panels
- Overheat protection for power interface chip

## Important Notes

- The wireless power interface must be wall box mounted.
- The wireless power interface must work in conjunction with wireless panel.
- The newly replaced fuse must be the same type, no more than 2A fast fuse (aR type).



Figure 1. HDL-MPWPID00LN.18-A



Figure 2. HDL-MPWPID00LN.16-A

## Product Information

**Dimensions - See Figure 3 - 5**

**Components - See Figure 6**

**1. Interface:** Connects to the panel

**2. Hole for fixing screw**

**3. Fuse**

**Wiring - See Figure 7**

**FAQ**

If the wireless power interface cannot supply power and the panel cannot work properly, please try the following operations:

1. Separate the panel and wireless power interface, and install again, then check.
2. If the panel cannot work properly, check the fuse.
3. Use multimeter to measure the voltage of the wireless power interface and the panel. If the voltage is not DC5V (±1V), the wireless power interface is damaged.

**Installation - See Figure 8**

Step 1. Install the wall box in the wall.

Step 2. Fix the power interface onto the wall box with screws.

Step 3. Hold the edge of the panel, and insert the panel in the slots of power interface vertically.





Figure 3. Dimensions - Front View





Figure 4. Dimensions - Side View





Figure 5. Dimensions - Back View





Figure 6. Components - Front View

## Safety Precautions

- The installation and commissioning of the device must be carried out by HDL or the organization designated by HDL. For planning and construction of electric installations, the relevant guidelines, regulations and standards of the respective country are to be considered.
- The device should be installed in wall box. HDL does not take responsibility for all the consequences caused by installation and wire connection that are not in accordance with this document.
- Please do not privately disassemble the device or change components, otherwise it may cause mechanical failure, electric shock, fire or body injury.
- Please resort to our customer service department or designated agencies for maintenance service. The warranty is not applicable for the product fault caused by private disassembly.





Figure 7. Wiring

## Package Contents

HDL-MPWPID00LN.18(16)-A*1 / Datasheet*1 / Screw*4(long screw*2 and short screw*2)

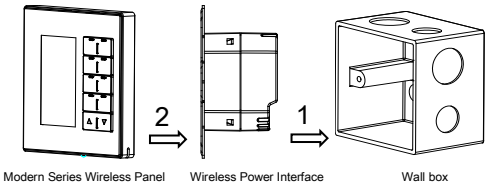



Figure 8. Installation

## Technical Data

| Basic Parameters | |
|---|---|
| Input voltage | AC100-240V (50/60Hz) |
| Maximum output current | 100mA / 5V DC |
| Fuse | 2A, aR type |
| **External Environment** | |
| Working temperature | -5℃~45℃ |
| Working relative humidity | ≤90% |
| Storage temperature | -20℃~60℃ |
| Storage relative humidity | ≤93% |
| **Specifications** | |
| Dimensions | 80×80×39 (mm) (EU)<br>80×110.5×39 (mm) (US) |
| Net weight | 128g (EU)<br>138g (US) |
| Housing material | Flame-retardant nylon, iron |
| Installation | Wall box (See Figure 8) |
| Protection rating (Compliant with EN60529) | IP20 |
| Fire and neutral wire | 2.5mm² copper cable |

### Name and Content of Hazardous Substances in Products

| Components | Hazardous substances | | | | | |
|---|---|---|---|---|---|---|
| | Lead (Pb) | Mercury (Hg) | Cadmium (Cd) | Chromium VI (Cr (VI)) | Poly-brominated biphenyls (PBB) | Poly-brominated diphenyl ethers ( PBDE ) |
| Plastic | o | o | o | o | o | o |
| Hardware | o | o | o | o | - | - |
| Screw | o | o | o | × | - | - |
| Solder | × | o | o | o | - | - |
| PCB | × | o | o | o | o | o |
| IC | o | o | o | o | × | × |

The symbol “-” indicates that the hazardous substance is not contained.
The symbol "o" indicates that the content of the hazardous substances in all the homogeneous materials of the component is below the limit requirement specified in the Standard IEC62321-2015.
The symbol “×” indicates that the content of the hazardous substance in at least one of the homogeneous materials of the part exceeds the limit requirement specified in the Standard IEC62321-2015.

**ЧТУП «ОллВижн»**

г. Минск, ул. Богдановича, 11
**+375 33 370 20 20, +375 29 370 20 20**
info@allvision.by
hdl.by
ТЕХНИЧЕСКАЯ ПОДДЕРЖКА: **+375 29 7 511 611**

©Copyright by HDL Automation Co., Ltd. All rights reserved.
Specifications subject to change without notice.