HDL-MSP750.431

750mA Power Supply Module

buspro

**Datasheet**

Issued: March 6, 2019

File Edition: V1.0.0

## Overview

750mA Power Supply Module (See Figure 1) can provide 24V DC voltage, 750mA current with 2 connection types. The total current can reach 750mA.

## Functions

- Protection: Short circuit and over current protection
- Voltage Supply: 24V DC
- Ripple Wave: Less than 150mV




Figure 1. 750mA Power Supply Module

## Important Notes

- Buspro cable - CAT5E or dedicated HDL Buspro cable
- Buspro connection - Series connection (hand-in-hand)
- When two or more power supply modules are needed, ensure correct connection. And the 24V DC terminals of the power supply modules should be disconnected.





Figure 2. Dimensions - Front View





Figure 3. Dimensions - Side View

## Product Information

**Dimensions - See Figure 2 - 3**

**Wiring - See Figure 4 - 5**

**Installation - See Figure 6 - 8**

Step 1. Fix the DIN rail with screws.

Step 2. Buckle the bottom cap of the 750mA Power Supply Module on the edge of the DIN rail.

Step 3. Press the device on the DIN rail, slide it and fix it up until an appropriate position is adjusted.

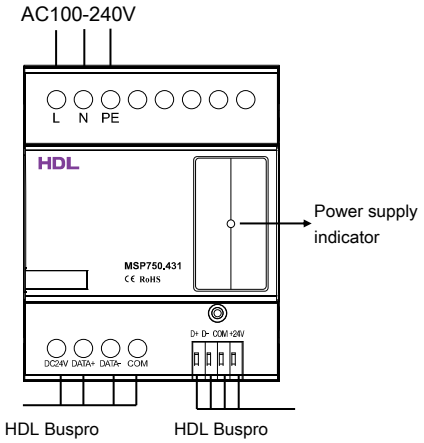



Figure 4. Wiring

## Safety Precautions

- The installation and commissioning of the device must be carried out by HDL or the organization designated by HDL. For planning and construction of electric installations, the relevant guidelines, regulations and standards of the respective country are to be considered.
- The device should be installed with DIN rail in DB box. HDL does not take responsibility for all the consequences caused by installation and wire connection that are not in accordance with this document.
- Please do not privately disassemble the device or change components, otherwise it may cause mechanical failure, electric shock, fire or body injury.
- Please resort to our customer service department or designated agencies for maintenance service. The warranty is not applicable for the product fault caused by private disassembly.

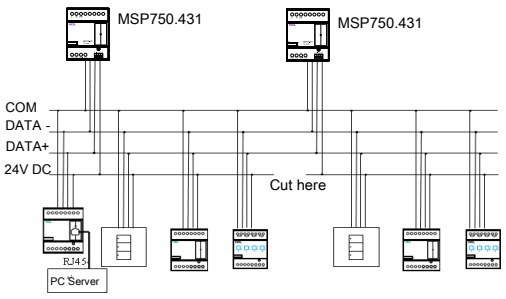



Figure 5. Wiring

## Package Contents

HDL-MSP750.431*1 / Buspro connector*1 / Label*5 / Datasheet*1



Figure 6

1




Figure 7

2




Figure 8

Figure 6 – 8. Installation

## Technical Data

| Basic Parameters | |
|---|---|
| Input voltage | AC100-240V(50/60Hz) |
| Output current | 750mA |
| Output voltage | 24V DC |
| Output ripple wave | Less than 150mV |
| **External Environment** | |
| Working temperature | -5℃~45℃ |
| Working relative humidity | ≤90% |
| Storage temperature | -20℃~60℃ |
| Storage relative humidity | ≤93% |
| **Specifications** | |
| Dimensions | 72mm×90mm×64mm |
| Net weight | 188g |
| Housing material | Nylon, PC |
| Installation | 35mm DIN rail installation (See Figure 6 - 8) |
| Protection rating (Compliant with EN 60529) | IP20 |

### Name and Content of Hazardous Substances in Products

| Components | Hazardous substances | | | | | |
|---|---|---|---|---|---|---|
| | Lead (Pb) | Mercury (Hg) | Cadmium (Cd) | Chromium VI (Cr (VI)) | Poly-brominated biphenyls (PBB) | Poly-brominated diphenyl ethers ( PBDE ) |
| Plastic | o | o | o | o | o | o |
| Hardware | o | o | o | o | - | - |
| Screw | o | o | o | × | - | - |
| Solder | × | o | o | o | - | - |
| PCB | × | o | o | o | o | o |

The symbol “-” indicates that the hazardous substance is not contained.

The symbol "o" indicates that the content of the hazardous substances in all the homogeneous materials of the component is below the limit requirement specified in the Standard IEC62321-2015.

The symbol “×” indicates that the content of the hazardous substance in at least one of the homogeneous materials of the part exceeds the limit requirement specified in the Standard IEC62321-2015.

## HDL Buspro Cable Guide

| HDL Buspro | HDL Buspro Cable | CAT5/CAT5E |
|---|---|---|
| DATA+ | Yellow | Blue/Green |
| DATA- | White | Blue white/Green white |
| COM | Black | Brown white/Orange white |
| 24V DC | Red | Brown/Orange |

**ЧТУП «ОллВижн»**

г. Минск, ул. Богдановича, 11

**+375 33 370 20 20, +375 29 370 20 20**

info@allvision.by

hdl.by

ТЕХНИЧЕСКАЯ ПОДДЕРЖКА: **+375 29 7 511 611**

©Copyright by HDL Automation Co., Ltd. All rights reserved.
Specifications subject to change without notice.