M/PTL43.1

KNX Granite 4.3''

Hardware Version: A3

Datasheet

Issued: January 25, 2022

File Edition: B

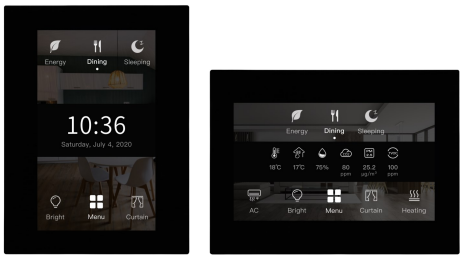


Figure 1. KNX Granite 4.3''

Overview

KNX Granite 4.3'' (See Figure 1) is a high-end and multi-function control panel for home automation. With 4.3-inch LCD screen and full-screen touch control, it is convenient for the users to control devices of lighting, curtain, scene, AC/FCU, floor heating, music and fresh air in an intuitive way.

Its functions include:

- The factory default panel is portrait display and can be set to landscape display on the setting page. (when the engineer installs and debugs)
- Built-in temperature and humidity sensor
- Built-in proximity sensor, when the panel detects someone (maximum sensing distance: 20~30cm), the LCD screen will wake up.
- Adjustable LCD backlight
- LCD screen wakes up automatically.
- Screen lock setting
- 3 shortcut scene buttons, 2 function navigation buttons (vertical screen)/4 function navigation buttons (horizontal screen), and 1 main menu button available in main interface
- Time and environment status display setting
- Dedicated pages for lighting, curtain, scene, AC/FCU, floor heating, music and fresh air control
- A total of 20 control keys can be set on the lighting page. The control types are: Switch, dimmer, RGB, and CCT light.
- Curtain control: Up to 8 curtains supported. Supports opening/closing, stopping, percentage adjustment, swing angle control
- Scene control: Up to 20 scenes supported
- AC/FCU control: Supports switching, temperature adjustment, fan speed adjustment, mode switching of up to 6 AC/FCU(s)
- Floor heating control: Supports switching, temperature adjustment, mode switching of up to 8 floor heating controls, Floor heating modes: Normal, Day, Night, Away, Timer.
- Music play: 1 music player supported
- Fresh air control: Supports switching, fan speed adjustment, mode switching of 1 fresh air control




Figure 2. Dimensions - Front View



Figure 3. Side View




Figure 4. Back View

Components and Operation

Dimensions - See Figure 2 - 8

A1. LCD screen: 4.3-inch touch screen

A2. Communication interface: KNX connector for connecting to KNX Panel Power Interface US (with External Power Supply) (M/PCI2PU.2)

A3. Mounting slot: Connects to KNX Panel Power Interface US (with External Power Supply) .

A4. Temperature and humidity sensor




Figure 5. Dimensions - Side View

Portrait View

Note(s)

- The panel must be wall box installation.
- The panel must work in conjunction with KNX Panel Power Interface US (with External Power Supply) (M/PCI2PU.2).
- The device is compliant with the KNX standard and the parameters are set by the Engineering Tool Software (ETS).

Safety Precautions

- The installation and testing for the product must be carried out by HDL Automation Co., Ltd. or its appointed service agencies. The electric construction shall comply with local laws and safety regulations.
- HDL will not be responsible for any consequence caused by the inexpert or faulty installation and wiring methods, which are not in accordance with the instructions contained in this operating instruction.
- Please do not privately disassemble or replace any parts of the product. Otherwise, it may cause mechanical fault, electric shock, fire or personal injuries.
- Please contact our after-sales departments or our designated service agencies for your maintenance service. Product failures caused by private disassembly are not subject to this warranty.




Figure 6. Dimensions - Front View




Figure 7. Side View




Figure 8. Back View

Landscape View

Package Contents

M/PTL43.1*1 / Datasheet*1

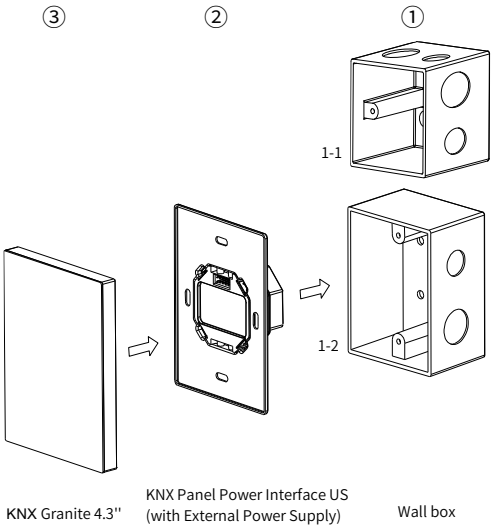


Figure 9. Portrait Installation

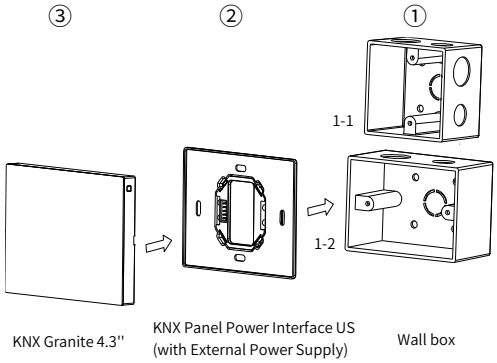


Figure 10. Landscape Installation

ЧТУП «ОллВижн»

г. Минск, ул. Богдановича, 11
+375 33 370 20 20, +375 29 370 20 20
info@allvision.by
hdl.by
ТЕХНИЧЕСКАЯ ПОДДЕРЖКА: **+375 29 7 511 611**

©Copyright by HDL Automation Co., Ltd. All rights reserved.
Specifications subject to change without notice.

Technical Data

Basic Parameters	
Working voltage	21~30V DC
Working current	15mA/30V DC
Auxiliary voltage	20~30V DC
Auxiliary current	110mA/24V DC
Communication	KNX
Cable diameter of KNX terminal	0.6 - 0.8mm
External Environment	
Working temperature	-5℃~45℃
Working relative humidity	⩽90%
Storage temperature	-20℃~60℃
Storage relative humidity	⩽93%
Specifications	
LCD screen resolution	480x800
Dimensions	86×116.5×11(mm)
Net weight	138g
Housing material	Glass, aluminum, PC
Installation	Wall box (See Figure 9-10)
Protection rating (Compliant with EN 60529)	IP20
Approved	
CE, RoHS	
KNX	

KNX Cable Guide

KNX	KNX Cable
-	Black
+	Red

Installation

Installation - See Figure 9 - 10

Step ①: Install the wall box (1-1 or 1-2) in the wall.

Step ②: Fix the power interface onto the wall box with screws.

Step ③: Hold the edge of the panel, and insert the panel in the slots of power interface vertically.