HDL-MSM.431

Security Command Module

buspro

Datasheet

Issued: August 1, 2019

Edition: V1.0.1



Figure 1. Security Command Module




Figure 2. Dimensions - Front View




Figure 3. Dimensions - Side View

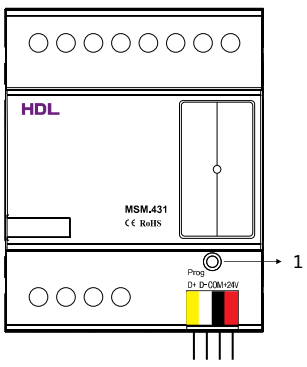


Figure 4. Components - Front View

Overview

Security Command Module (See Figure 1) enables the creation of zone security areas. The module is also able to provide a user with a real time SMS notification if a security device is triggered.

Functions

- It can protect the 8 different areas.
- Multiple security modes: away, holiday, evening, daytime, timing, etc.
- Multiple alarm modes: invade, fire, temperature, emergency, etc.
- Support review alarm history record.
- Multi-level security protection.
- Up to 8 zones of security protection can be set at one time.
- Sends SMS message or calls the specified person to ask for help or sound the alarm if there is security problem.
- Online upgrading is available.

Important Notes

- Buspro cable - CAT5E or dedicated HDL Buspro cable.
- Buspro connection - Series connection (hand-in-hand recommended).

Product Information

Dimensions - See Figure 2 - 3

Components - See Figure 4

1. Programming button & indicator: The indicator will flash when the device is running properly. Keep pressing the button for 3 seconds, the ID can be read and modified via HDL Buspro Setup Tool.

Installation - See Figure 5 - 7

Step 1. Fix the DIN rail with screws.

Step 2. Buckle the bottom cap of the Security Command Module on the edge of the DIN rail.

Step 3. Press the device on the DIN rail, slide it and fix it up until an appropriate position is adjusted.

Safety Precautions

- The installation and commissioning of the device must be carried out by HDL or the organization designated by HDL. For planning and construction of electric installations, the relevant guidelines, regulations and standards of the respective country are to be considered.
- The device should be installed with DIN rail in DB box. HDL does not take responsibility for all the consequences caused by installation and wire connection that are not in accordance with this document.
- Please do not privately disassemble the device or change components, otherwise it may cause mechanical failure, electric shock, fire or body injury.
- Please resort to our customer service department or designated agencies for maintenance service. The warranty is not applicable for the product fault caused by private disassembly.

Package Contents

HDL-MSM.431*1 / Buspro connector*1 / Label*5 / Datasheet*1



Figure 5

1




Figure 6

2




Figure 7

Figure 5 – 7. Installation

Technical Data

Basic Parameters	
Working voltage	15~30V DC
Working current	15mA/24V DC
Communication	HDL Buspro
External Environment	
Working temperature	-5℃~45℃
Working relative humidity	≤90%
Storage temperature	-20℃~60℃
Storage relative humidity	≤93%
Specifications	
Dimensions	72mm×90mm×64mm
Net weight	121g
Housing material	Nylon, PC
Installation	35mm DIN rail installation (See Figure 5 - 7)
Protection rating (Compliant with EN 60529)	IP20

Name and Content of Hazardous Substances in Products

Components	Hazardous substances					
	Lead (Pb)	Mercury (Hg)	Cadmium (Cd)	Chromium VI (Cr (VI))	Poly-brominated biphenyls (PBB)	Poly-brominated diphenyl ethers (PBDE)
Plastic	o	o	o	o	o	o
Hardware	o	o	o	o	-	-
Screw	o	o	o	×	-	-
Solder	×	o	o	o	-	-
PCB	×	o	o	o	o	o
IC	o	o	o	o	×	×

The symbol “-” indicates that the hazardous substance is not contained.
The symbol "o" indicates that the content of the hazardous substances in all the homogeneous materials of the component is below the limit requirement specified in the Standard IEC62321-2015.
The symbol “×” indicates that the content of the hazardous substance in at least one of the homogeneous materials of the part exceeds the limit requirement specified in the Standard IEC62321-2015.

HDL Buspro Cable Guide

HDL Buspro	HDL Buspro Cable	CAT5/CAT5E
DATA+	Yellow	Blue/Green
DATA-	White	Blue white/Green white
COM	Black	Brown white/Orange white
24V DC	Red	Brown/Orange

ЧТУП "ОллВижн"
г. Минск, ул. Богдановича, 11
Техническая поддержка
+375 29 7 511 611
E-mail: info@allvision.by
Website: https://hdl.by

©Copyright by HDL Automation Co., Ltd. All rights reserved.
Specifications subject to change without notice.

Technical support

©Copyright by HDL Automation Co., Ltd. All rights reserved.
Specifications subject to change without notice.