## **ASSIGNMENT 2**

NAME: TUSHAR RASURE EMAIL ID:tushar.sunil2019@vitbhopal.ac.in

Develop an "Automatic garage door opening system". Use an Ultrasonic sensor to detect if there is a vehicle in front of the garage. If any vehicle is detected, open the garage door (rotate the servo motor) for some time and close it.


## CODE

```
#include<Servo.h
> Servo servo; int
trig=5; int echo=6;
void setup()
{
    servo.attach(3);
    pinMode(trig, OUTPUT);
    pinMode(echo, INPUT);
    Serial.begin(9600);
    servo.write(0);
}

void loop()
{
    digitalWrite(trig,LOW);
    digitalWrite(trig,HIGH); delay(10); //
    Wait for 1000 millisecond(s)
    digitalWrite(trig,LOW);
```

```
float dur=pulseIn(echo,HIGH);
 float dis=(dur*0.0343)/2;
 Serial.print("distance in cm;");
 Serial.println(dis);
 if(dis > = 250){
  servo.write(180);
  Serial.println("door closed");
  Serial.print("distance ");
  Serial.println(dis);
  delay(500);
 }
 else{
  servo.write(0);
  Serial.println( "door open");
  Serial.print("distance");
  Serial.println(dis);
  delay(500);
 }
}
```

## **DESIGN**

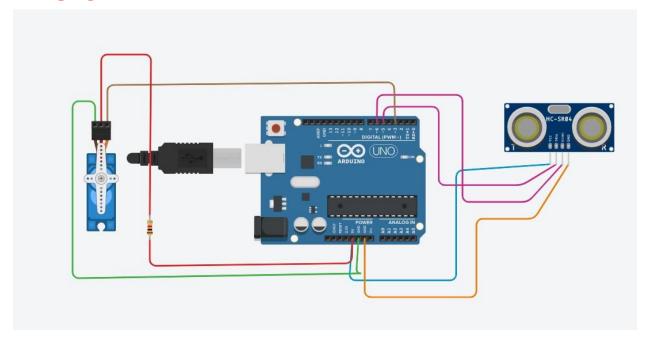

## **OUTPUT**

distance in cm;333.45 door closed distance 333.45 distance in cm;333.41 door closed distance 333.41 distance in cm;334.22 door closed distance 334.22 distance in cm;333.41 distance in cm;167.74 door open distance167.74 distance in cm;166.85 door open distance166.85 distance in cm;166.85 door open distance166.85 distance in cm;167.64 door open distance167.64 distance in cm;168.41 door open distance168.41 distance in cm; 168.41 door open distance168.41