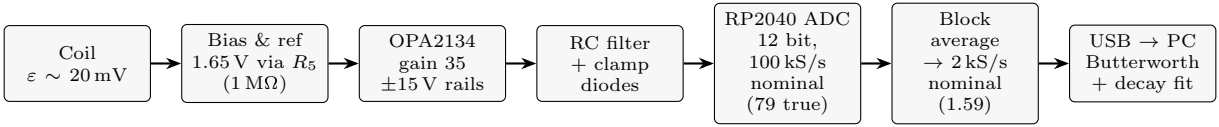
Coil
$\varepsilon \sim 20\,\mathrm{mV}$
Bias & ref
1.65 V via R_5
(1 MΩ)
OPA2134
gain 35
±15 V rails
RC filter
+ clamp
diodes
RP2040 ADC
12 bit,
100 kS/s
nominal
(79 true)
Block
average
→ 2 kS/s
nominal
(1.59)
USB → PC
Butterworth
+ decay fit