




**Dedicated  
In Painting**  
[www.dpairless.com](http://www.dpairless.com)



2019

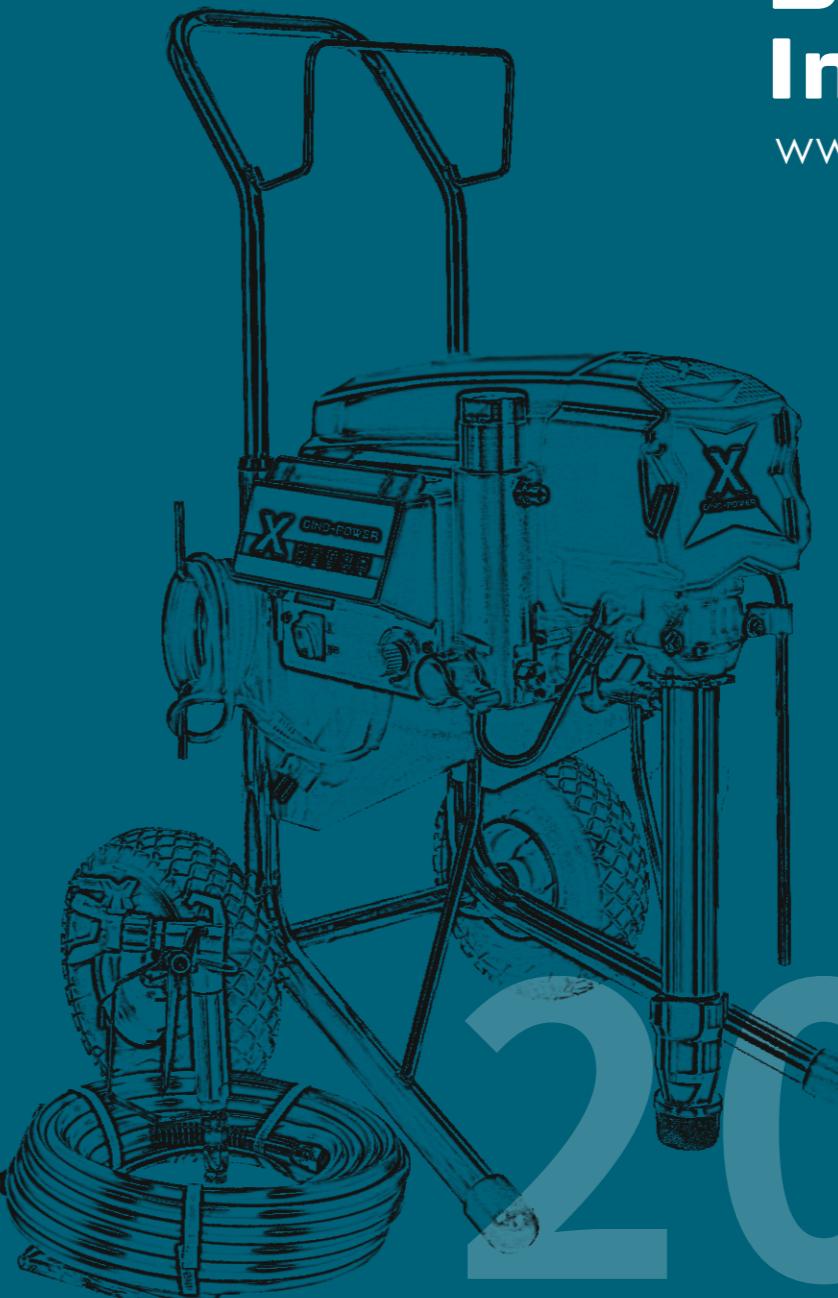


NINGBO DINO-POWER MACHINERY CO.,LTD.

Add: NO.168 Mingguang Road, Yinzhou, Ningbo, China.

Tel: +86-574-88278841, 88278851  
Fax: +86-574-88278831

Skype: dino-power  
WeChat: +86-13566005805  
WhatsApp: +86-13566005805



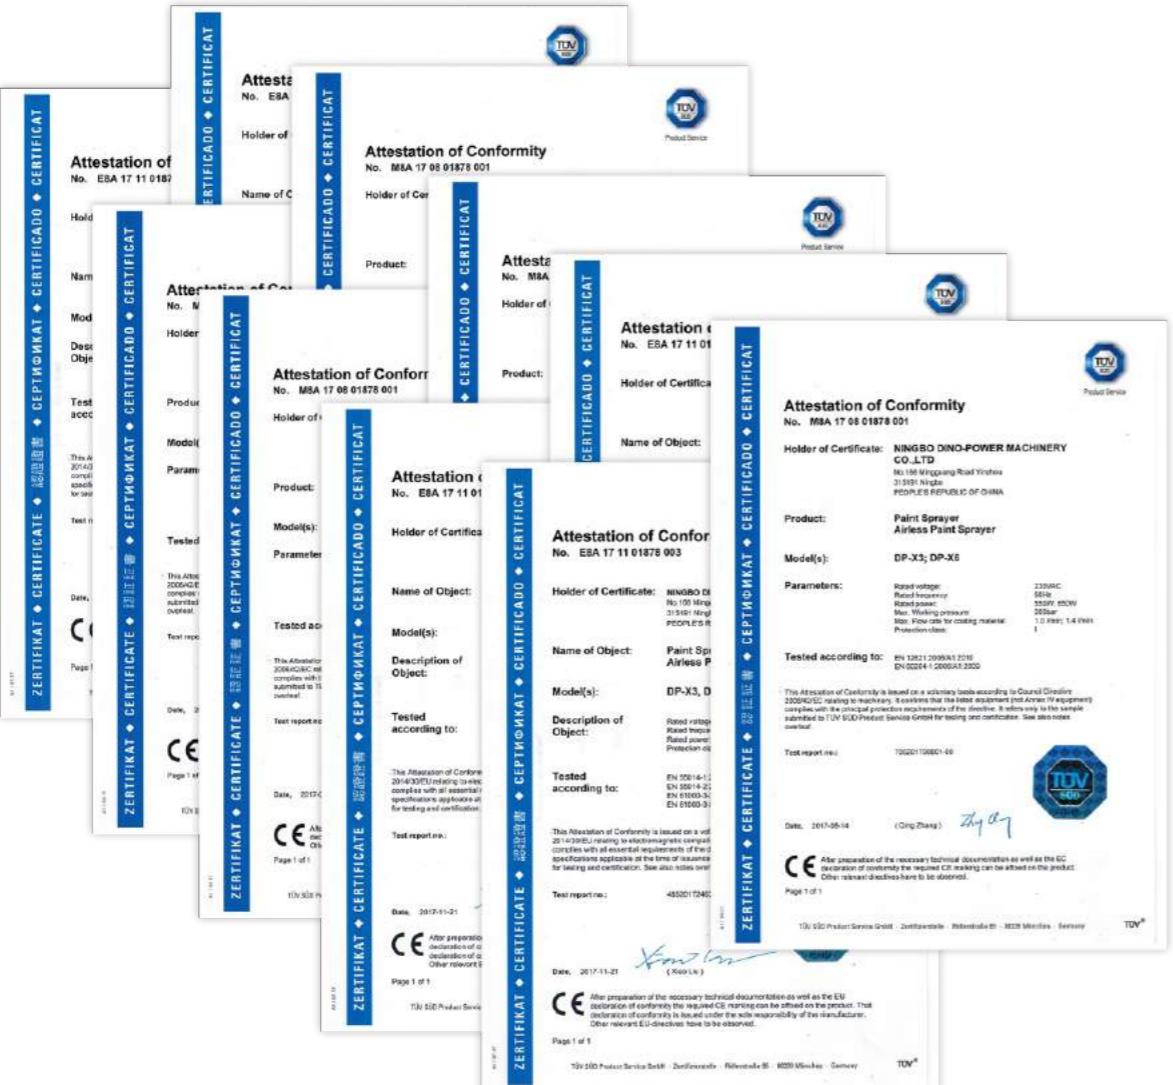


## About Us

We Dino-power is professional manufacturer and supplier for **airless paint sprayer / painting equipment**, we have over 12 years experience in producing and sales in China domestic market, and over 9 years for exporting to overseas.

At present we have the full range of Airless Sprayer for Electric / Pneumatic / Hydraulic and Gasoline powered airless equipment. Piston pump and Diaphragm pump, Double-membrane pump, Line striping machine, Putty sprayer, Airless spray guns and tips / hose / filters etc. Accessories. We have big range from 1L to 25L capacity to meet you request for all kinds of painting jobs.

Most of our products have 1 year warranty, some professional products two years warranty, and we'll ensure you the best after-sales services and very competitive price.

We have CE approval for our products, and had exported to over 50 countries already. Just contact us now for more details!

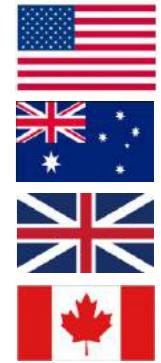

Компания Dino-power – один из профессиональных производителей и поставщиков оборудования безвоздушного распыления краски, имеет опыт работы на внутреннем рынке Китая в течение больше чем 12 лет, а также историю экспорта в течение 9 лет.

У нас есть полный спектр продукции окрасочных агрегатов безвоздушного распыления: электрические/Пневматическая агрегаты безвоздушного распыления (мембранный и плунжерного типа) и агрегат распыления с бензиновым двигателем, пневматические двухмембранные насосы, машины для разметки дорог, безвоздушный пистолет-распылители, комплектующие изделия, поток от 1 литра до 25 литров, позволяет удовлетворить ваши разные требования к нанесению красок.

Продукция проходит сертификацию CE, экспортится в больше чем 50 стран.

Связывайтесь сейчас с нами, получите больше подробную информацию.

Dino-power es un fabricante y proveedor profesional de máquinas de pintar airless que ya tiene una experiencia en el mercado doméstico de China de más de 12 años y una historia de exportación de 9 años.

Nuestros productos de máquinas de pintar airless abarcan: Pintar bomba eléctrica (tipo diafragma y tipo pistón), pintar bomba neumática y de gas, bomba neumática de doble membrana, máquina de señalización de carretera, airless pistola de pintar, partes y accesorios, etc. El rango de flujo es desde 1L a 25L que puede cumplir con sus diferentes demandas sobre la pulverización.

Dino-power é um fabricante e um fornecedor profissional dos pulverizadores de pintura airless, que já tem mais de 12 anos de experiência do mercado doméstico da China e a história de 9 anos da exportação.

Os nossos produtos de pulverizadores de pintura sem ar incluem: pulverizadores de pintura eléctricos airless (bomba de diafragma e bomba de pistão), pulverizadores airless e pneumática, e do motor de gasolina, bombas pneumáticas de duplas membranas, máquinas de sinalização da estrada, pistolas de pulverização airless, os acessórios e etc.. O âmbito do caudal fica entre 1 litro e 25 litros, o que pode satisfazer as suas necessidades para todos os tipos do trabalho de pulverização.

Os produtos já passou os certificados de CE, e são postas a venda em mais de 50 países no mundo inteiro. Agora contacta connosco, para adquirir mais informações detalhadas.

Dino-power est un fabricant-fournisseur professionnel de pulvérisateurs airless, A plus de 12 années d'expérience dans le marché intérieur de la Chine, et cinq ans d'histoire de l'exportation.

Nos peinture pulvérisateurs airless comprennent ceux électriques et pneumatique et gaz, pompe à diaphragme & pompe à piston, pompe à double diaphragme à basse pression de grand débit et pulvérisateur de bouches-pores, etc., ils peuvent satisfaire à vos exigences de divers travaux de pulvérisation.

Nos produits se sont déjà obtenus l'authentification CE. nos produits de pulvérisation privée d'air se sont déjà vendus à 50 de pays.

Nous vous espérons de devenir notre agent dans votre pays. Veuillez nous contacter.

Dino-power ist ein spezieller Hersteller und Lieferant, Hat mehr als 10 Jahre Erfahrung in heimischen Markt in China, und fünf-jährigen Geschichte des Exports.

Unser Airless-Spritzgerät beinhaltet: elektrische Airless-Spritzgerät und luftunterstützt pneumatische Spritzgerät, Membran-und Kolbenpumpen, Doppel-Membranpumpe, Spritzspachtel-Gerät, und so weiter, diese können auf Ihre verschiedenen Bedürfnisse über die Arbeiter von Aufspritzung treffen. Und all unsere Produkte bestehen CE-Zertifizierung.

Unser Airless-Spritzgerät besitzt CE-Zeichen. Bisher haben unsere Airless-Maschine sind nach 50 land.

Wir begrüßen Sie als unseren Vertreter in Ihrem Land. Jetzt und kontaktieren Sie uns bitte für weitere Informationen



Dino-power è un' azienda specializzata in produzione e fornitura di attrezzature di verniciatura airless con oltre 10 anni di esperienza di mercato in Cina e 5 anni di esperienza in esportazione.

La nostra gamma di pompa airless comprendono: attrezzature di sistema di pompe elettriche airless (Diaframma Pompe e pompe a pistoni), aria compressore assistita, airless pistola suggerimenti, macchine traccialinee, pistole airless, accessori, ecc. Con portate da 1 ai 25 litri per soddisfare le vostre esigenze a seconda delle necessità.

I prodotti hanno superato la certificazione CE e già in vendita in più di 50 nazioni in tutto il mondo. Contattaci adesso per richiedere più notizie.



Dino-power is een professionele fabrikant en leverancier van airless verfspuitapparatuur die meer dan 10 jaar marktveraring in China heeft en intussen al 5 jaar aan export doet.

Onze producten van airless verfspuitapparatuur omvatten o.a. elektrische airless verfspuitapparatuur (membraanpomp & zuigerpomp), gasmotor aangedreven spuitmachines, luchtgedreven pompen met dubbel membraan, wegmarkering machines, luchtloos spuitpistool en accessoires. Het stromingsbereik varieert van 1 t/m 25 liter om allerlei vereisten van verschillend spuitwerk te voldoen.

Onze producten zijn CE gecertificeerd en worden verkocht in 50 landen wereldwijd. Neem contact met ons op. Wij voorzien u graag vrijblijvend van meer informatie.



Dino-power on ammattitoitoinen airless laitteet valmistaja ja toimittaja, jolla on yli 10 vuoden kokemus kotimaiselta markkinoilta ja 5 vuoden kokemus vientimarkkinoilta.

Meidän airless laitteet tuotteet ovat: sähköiset airless laitteet (pallea tai mäntä pumppu), pneumatisch Airless verfspuit, ja bensiinimoottoriset väripistoolit, paineilmatoimiset tupla-kalvopumput, tienmerkitälaiteet, ilmattoman maaliruiskut ja lisätarvikkeet. Säiliön tilavuus on 1L-25L, joka voi täyttää erillaiset maalaustyön vaatimukset.

Se on tehokas ja säästäävien. Tuotteella on CE todistus, ja tuotteita myydään 50 maassa ympäri maailmaa. Ota yhteyttä meihin saadaksesi lisää tietoa.



Dino-power jest producentem i dostawcą profesjonalnych Airless farby pistoletów o ponad 10-letnich doświadczeniach na rynku domowym w i 5-letnich doświadczeniach eksportowych.

Nasza oferta: Airless pompy elektryczne (membranowych i tłokowych) oraz agregaty malarskie na bazie benzyny, pompy dwukrotno-membranowe, pistolety natryskowe bezpowietrzne, armatury itp. Ich pojemnik różni się od 1L do 25L, zapewnia Państwa wymagania do wszystkich natrysków.

Towary są zgodne wymagania i dostały certyfikaty atestów CE, eksportowane do 50 krajów na całym świecie. Kontaktujcie się z nami, osiągnij więcej informacji.



Profesyonel bir Airless püskürtücü tedarikçi olan olan Dino-power Çin'de 10' yıldan fazla iç piyasa deneyimine ve 5 yıllık ihracat deneyimine sahiptir.

Havasız püskürtücü ürünlerimiz şunlardır: Elektrikli havasız püskürtücü (diyafram ve piston tipi), benzin motorlu püskürtücü, pnomatik havalı airless pompa, pnömatik çift fiyafaklı pompa, yol çizgi makinesi, airless püskürtme tabancası ve aksuarlar vb. 1L den 25 L arasındaki kapasite aralığı ile çeşitli püskürtme uygulama ihtiyaçlarınızı karşılayabilecektir.

Ürünler CE belgesi almış ve 50 den fazla ülkelerde pazarlanmaktadır. Daha fazla bilgi için lütfen bizimle irtibaga geçiniz.



# Electric Airless Paint Sprayer





**DIY**

### Easy Pressure Control

Easy Pressure Control with user-friendly symbols for simple selection of operating modes from low pressure cleaning, medium pressure rolling, and high pressure airless painting.

### Portable and light weight

Convenient and Lightweight with built-in carrying handle, easy to take, and easy to store.

### Piston Pump

Powerful Piston Pump offers modular components, easy maintenance and less problem.

### Replaceable worn parts

The piston rod, O-rings, gasket etc. Worn parts could be replaced which will save your maintenance cost.



### Pump Repair Kits

Spring Seal & S.S Rod prolong the lifetime.



Enjoy your  
painting,  
and enjoy your life !



DP-X6H



DP-X6

### Includes:

1/4"x7.5M high pressure hose, X-450 spray gun, 30cm extension pole, 517 X airless tip and manuals.

### The High Quality Valves

With high grade Stainless Steel Tungsten Carbide, Ceramic ball ensure the durability

## Optional Accessories




### The 637PR Paint Roller

The paint roller and Straight gun are optional which can be used for refurbishment without any splashing.



X-3 X-6 sprayers make it easy for DIY homeowners and handymen to finish the medium size project with speed and finesse. The high-pressure pump delivers a finely atomized spray for a flawless professional finish. It will be one full series based on that.

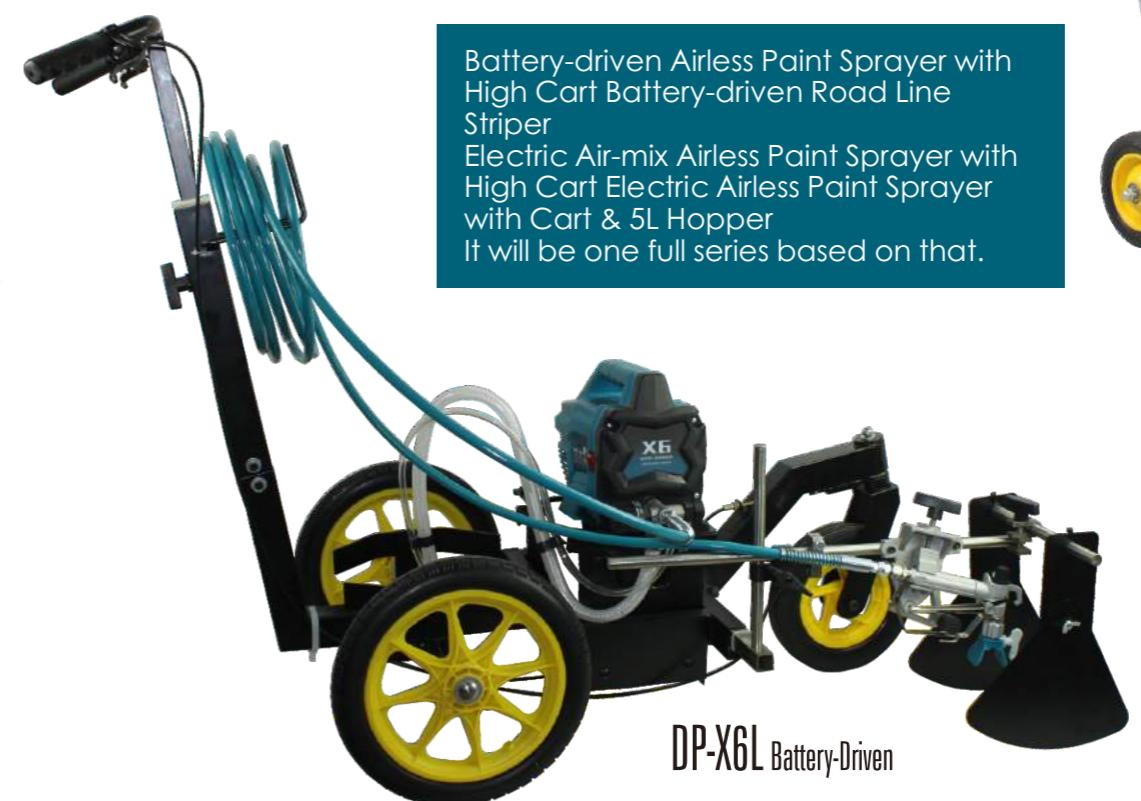

DP-X6L  
Battery-Driven



DP-X6AM  
Air-Mixed

| Item No.              | DP-X6                | DP-X6H              | DP-X6L             |
|-----------------------|----------------------|---------------------|--------------------|
| Voltage/frequency     | 230V/50HZ& 110V/60HZ | 230V/50HZ&110V/60HZ | 48V/20Ah           |
| Pressure controlling  | Mechanical           | Mechanical          | Mechanical         |
| Motor power           | 650W                 | 650W                | 650W               |
| Max. pumping capacity | 1.4L/min (0.37GPM)   | 1.4L/min (0.37GPM)  | 1.4L/min (0.37GPM) |
| Max. tip size         | 0.019"               | 0.019"              | 0.019"             |
| Max. pressure         | 200bar/2900psi       | 200bar/2900psi      | 200bar/2900psi     |



## Piston Pumps

### The micro process or pressure control

The microprocessor control system will ensure the consistent fan and constant spraying pressure with low pulse and tight pressure dead band (5%). Just set your desired pressure easily, and the microprocessor will generate the fast response when spraying.



X30



X40/50/60

### TEFC/ Brushless Motor

The brushless motor is more powerful, durable and reliable, no carbon brush and no spark during the spraying, the oil paint or the flammable paint will be no problems.

### Chromed cart

Chrome trolley with telescoping handle & hose wrap, and tools box for frequently used accessories and included with bigger wheels, Quick & easy maneuverability.

| Item No.             | DP-X30              | DP-X40                | DP-X50                | DP-X60                |
|----------------------|---------------------|-----------------------|-----------------------|-----------------------|
| Voltage/frequency    | 230V/50HZ&110V/60HZ | 230V/50HZ&110V/60HZ   | 230V/50HZ&110V/60HZ   | 230V/50HZ&110V/60HZ   |
| Pressure controlling | Electronic Type     | Electronic Type       | Electronic Type       | Electronic Type       |
| Motor power          | 1500W Brushless     | 1800W Brushless Motor | 2000W Brushless Motor | 2500W Brushless Motor |
| Max.pumping capacity | Motor3.0L/min       | 4.0L/min              | 5.0L/min              | 6.0L/min              |
| Max.tip size         | 0.027"              | 0.031                 | 0.035"                | 0.041"                |
| Max.pressure         | 210bar/3045psi      | 210bar/3045psi        | 210bar/3045psi        | 210bar/3045psi        |


# AUTOMATIC PAINT ROLLER



### NO SPLASH DOWN

Paint Roller gives sharp edge finishing, no extra spreading and leak through

### EXTENSION POLE ISOPTIONAL

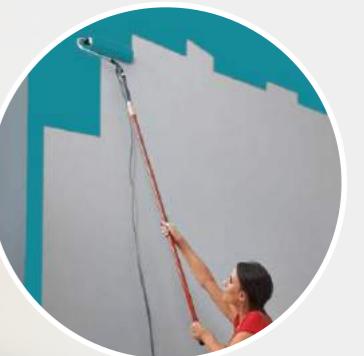

### Barrel Base

The machine will be fixed by paint barrel



### Telescopic Hook

The telescopic hook allow the paint barrel from 5L to 20L



### Cleaning Connector

Patent Pending  
Quick Connector to garden hose for faster cleanup



# X Electric Piston Pump

Long lifetime V-packings and Piston rod  
30 000 to 50 000 square meters based on  
paints materials and working conditions



X20

Equipped with X450 250bar High Quality Airless Spray Gun that comes with in-gun filter resides in the handle to help ensure a clean spray.

## Easy Out Manifold Filter

The pump filter from the inside out so it won't collapse or get stuck when removed. the filter comes out with the cap for less mess to help ease cleaning.



X24 X28



X45 X52

## Brushless Motor

The Brushless Motor is more powerful, durable and reliable, no carbon brush and no spark during the spraying, the oil paint or the flammable paint will be no problem.

## Chromed Cart

Chrome trolley with telescoping handle & hose wrap, and tools box for frequently used accessories and included with bigger wheels, Quick& easy maneuverability.

## Easy Out Manifold Filter

The pump filter from the inside out so it won't collapse or get stuck when removed. the filter comes out with the cap for less mess to help ease cleaning.



## SmartControl

The digital pressure control &display for easy adjusting the pressure




The low position of the inlet valve of the X52L & X80L improves the suction power for high viscosity materials.



X52L



X80L

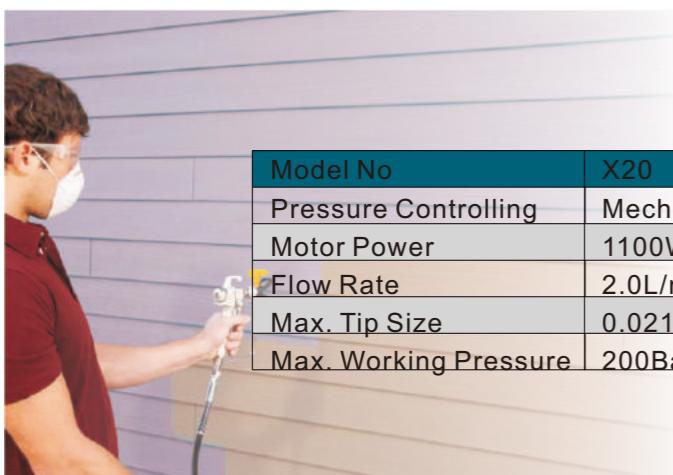



## Piston Pumps

### Triple filter system

3-steps Filtering system(Suction, manifold and gun filters) will reduce the tip clogs and ensure a quality finish.



### PMDC motor

Powerful permanent magnet DC motor for strong power.

**DP-6321i  
DP-6325i**

### The Mechanical+Digital pressure display.

The pressure gauge shows the accurate pressure during the spraying. And the digital display is optional.(For DP-6321i&DP-6325i)



**U-Cart is optional**

### EzControl

Our EzControl system will ensure you consistent fan and constant spraying pressure with low pulse and tight pressure dead band (5%). Just set your desired pressure easily, and the microprocessor will generate the fast response when spraying.



**DP-6321  
DP-6325**



## Piston Pumps

### Big volume output

Big volume spraying capacity support large tip size, high efficiency for large painting job.



### Digital Pressure control& display

The accurately spraying pressure and paint volume display for easy operation.



### The Enhanced Fluid Pump Design.

The low suction valve will be suitable for the high viscosity material. Such as putty spraying.



**DP-6331ip**

### Portable carry type

Portable airless sprayer with built-in carrying handle. It's ideal for one gun residential and maintenance applications.

### Chrome coated trolley with Pneumatic tyre

For easy moving and transportation.

| Item No.             | DP-6321(H)        | DP-6321(H)        | DP-6325(H)        | DP-6325(H)        |
|----------------------|-------------------|-------------------|-------------------|-------------------|
| Voltage/frequency    | 230V/50HZ         | 230V/50HZ         | 230V/50HZ         | 230V/50HZ         |
| Pressure controlling | Mechanical        | Electronical      | Mechanical        | Electronical      |
| Motor power          | 1.7HP 1300W       | 1.7HP 1300W       | 1.8HP 1400W       | 1.8HP 1400W       |
| Max.pumping capacity | 2.2L/min(0.58GPM) | 2.2L/min(0.58GPM) | 2.4L/min(0.63GPM) | 2.4L/min(0.63GPM) |
| Max.tip size         | 0.023"            | 0.023"            | 0.025"            | 0.025"            |
| Max.pressure         | 210bar/3040psi    | 210bar/3040psi    | 210bar/3040psi    | 210bar/3040psi    |

| Item No.             | DP-6331i                     | DP-6331IP                    | DP-6335i                     |
|----------------------|------------------------------|------------------------------|------------------------------|
| Pressure controlling | Electronical+Digital display | Electronical+Digital display | Electronical+Digital display |
| Cart type            | high cart type               | four-feet carry type         |                              |
| Motor power          | 2.4HP 1800W                  | 2.4HP 1800W                  | 2.6HP 2000W                  |
| Max.pumping capacity | 3.8L/min(1.0GPM)             | 3.8L/min(1.0GPM)             | 5.0L/min(1.32GPM)            |
| Max.tip size         | 0.031**1gun                  | 0.031**1gun                  | 0.035**1gun                  |
|                      | 0.021**2guns"                | 0.021**2guns"                | 0.023**2guns                 |
| Max.pressure         | 210bar/3040psi               | 210bar/3040psi               | 210bar/3040psi               |

# Airless Piston Pumps



## The High Pressure Filter

It is easy to disassemble and quick to clean.

## The microprocessor pressure control

The microprocessor control system will ensure the consistent fan and constant spraying pressure with low pulse and tight pressure dead band (5%). Just set your desired pressure easily, and the microprocessor will generate the fast response when spraying.

## Automatic Speed Adjustment

When the paint finished in the tank, the microprocessor will reduce the speed of the motor, for reducing the wear of the piston rod&V- packing.



DP-6336iB

## TWO Guns available

2 guns is available at the same time for the painting job, with higher efficiency.



DP-6337iB

## TEFC/Brush less Motor

The brushless motor is more powerful, durable and reliable, no carbon brush and no spark during the spraying, the oil paint or the flammable paint will be no problems.



## Semi-automatic Oiler

You only need to press the Oiling button everyday before spraying, the machine will be self-lubricated and it will absolutely prolong the sprayer's lifetime and with less parts replacing/repairing.



# Airless Piston Pumps



## Mechanical pressurecontrol

Durable and reliable



## Portable carry type

Portable airless sprayer with built-in carrying handle. It's ideal for one gun residential and maintenance applications.




## Quality proven fluid pump

Stainless steel fluid section is durable, light weight and rust proof; could be used for both water-based and also oil-based paint. Also, Innovation design makes it easy for putting/removing siphon swivel into/from lower inlet housing



## Quality proven fluid pump

Stainless steel fluid section is durable, light weight and rust proof; could be used for both water-based and also oil-based paint. Also, Innovation design makes it easy for putting/removing siphon swivel into/from lower inlet housing



## Chromed cart

Chrome trolley with telescoping handle & hose wrap, included with bigger wheels, Quick & easy maneuverability.



## PMDC motor

Powerful permanent magnet DC motor for strong power.



DP-6318H  
DP-6320H

| Item No.             | DP-6336i                     | DP-6337i                     |
|----------------------|------------------------------|------------------------------|
| Pressure controlling | Electronical+Digital display | Electronical+Digital display |
| Motor power          | 3.3HP 2500W brushless        | 3.3HP 2500W brushless        |
| Max.pumping capacity | 6.0 L/min(1.58GPM)           | 7.0 L/min(1.85GPM)           |
| Max.tip size         | 0.037"                       | 0.043"                       |
| Max.pressure         | 210bar/3040psi               | 210bar/3040psi               |

| Item No.             | DP-6318           | DP-6318H          | DP-6320           |
|----------------------|-------------------|-------------------|-------------------|
| Pressure controlling | Mechanical        | Mechanical        | Mechanical        |
| Motor power          | 1.3HP 1000W       | 1.3HP 1000W       | 1.8HP 1400W       |
| Max.pumping capacity | 1.8L/min(0.47GPM) | 1.8L/min(0.47GPM) | 2.2L/min(0.58GPM) |
| Max.tip size         | 0.019"            | 0.019"            | 0.023"            |
| Max.pressure         | 210bar/3040psi    | 210bar/3040psi    | 210bar/3040psi    |

# Electric Diaphragm Airless Paint Sprayer



## X AIRLESS DIAPHRAGM PUMP

### Brushless Motor

Powerful brushless motor and big diaphragm surface for perfect usage with high viscosity materials.

### Soft-start

Smart soft-start function to protect the motor and gear box for a long life time.

X980IB



### Low Pressure Airless Innovation

Innovative low-pressure airless technology achieves up to 55% less overspray.

### Professional Crack Injection

When combined with hopper and injection nozzle, it becomes perfect for precise concrete repair and injection.

### Air-Mix Technology

With Air-mix technology, it achieves particularly fine atomization for a perfect finish and ideal balance of low overspray and high efficiency.

### Compact Size

Trolley and wheel design for easy moving around for demanding construction site use.

### Easy Maintenance

Service, cleaning and maintenance directly on the job site is no problems.

| Item No.             | X980IB                |
|----------------------|-----------------------|
| Pressure controlling | Mechanical            |
| Motor power          | 2000W Brushless Motor |
| Max.pumping capacity | 4.0L/min (1.1GPM)     |
| Max.tip size         | 0.025"                |
| Max.pressure         | 220bar/3190psi        |



## High Delivery Capacity

Reliable powerful induction motor generates high delivering capacity, suitable for everyday use on all residential and commercial painting projects.

## Easy Maintenance

Service, cleaning and maintenance directly on the job site is no problems.

## Compact Size

Trolley and pneumatic wheel design for easy moving around for demanding construction site use.

## Affordable Price

Durable & Reliable performance at quite affordable price.

## Variety of Coatings

Suitable for spraying varnish, color ant, latex paint, emulsion, primers, and other common water-based/oil-based coatings.

## Optional with Hopper for injection and repair jobs.



X980



X990



DP-6860E  
2.4hp 6.0L



## Compact size

Cart type and pneumatic wheels design for easy moving to any working places you want.

## Easy maintenance

The diaphragm can be replaced within 15 mins



DP-7000  
4.2hp 7.0L

## High delivery capacity

Extreme duty airless paint sprayer with diaphragm pump system. Reliable powerful induction motor, generate high delivering capacity, specially designed to be used everyday on all residential, industrial, and commercial project. Capable of supporting two guns spraying and long distance painting.

Gravity & Suction 2 in 1 Could be used in both Suction type (suction tube attached already) or Gravity type (Hopper cup is available with extra cost)

| Item No.             | X980                  | X990                  |
|----------------------|-----------------------|-----------------------|
| Pressure controlling | Mechanical            | Mechanical            |
| Motor power          | 1500W Induction Motor | 2000W Induction Motor |
| Max.pumping capacity | 3.6L/min(0.96GPM)     | 4.0L/min(1.1GPM)      |
| Max.tip size         | 0.023"                | 0.025"                |
| Max.pressure         | 220bar/3190psi        | 220bar/3190psi        |

| Item No.             | DP-6860E       | DP-7000            |
|----------------------|----------------|--------------------|
| Pressure controlling | Mechanical     | Mechanical         |
| Motor power          | 2.4HP1800W     | 4-4.2hp 3000-3200W |
| Max.pumping capacity | 6L/min(1.6GPM) | 8L/min(2GPM)       |
| Max.tip size         | 0.025"         | 0.035"             |
| Max.pressure         | 227bar/3300psi | 250bar/3625psi     |

# Pneumatic Airless Paint Sprayer



## Proven quality of mechanical reverser system.

High quality pneumatic airless paint sprayer with reliable Mechanical transducer / reverser, quick action and no ice low air consumption. Provides higher efficiency & minimum maintenance, for industrial usage.



## Stainless steel fluid pump

K301 use Hardened stainless steel fluid pump and stainless steel piston rod, could be used for both oil-based and water-based coating.

| Model No.                     | DP-K301         | DP-K151            | DP-K451     |
|-------------------------------|-----------------|--------------------|-------------|
| Fluid pressure ratio          | 30:1            | 15:1               | 45:1        |
| Max. paint delivery (L/min)   | 6(1.585gpm)     | 12(3.17gpm)        | 5(1.32gpm)  |
| Cylinder diameter             |                 | 153mm              |             |
| Max. Pump Speed               |                 | 100 cycles per min |             |
| Stroke(mm)                    |                 | 100                |             |
| App. Air consumption at 6 bar |                 | 200-400L/min       |             |
| Air Compressor Pressure       |                 | 5-8 bar            |             |
| Maximum Discharge             | 240bar          | 120bar             | 360bar      |
| Air Inlet (inch)              |                 | 1/4                |             |
| Fluid Outlet(inch)            |                 | 3/8                |             |
| NW(kgs)                       | 31.5kgs/69.3lbs | 33kgs/72.6lbs      | 30kgs/66lbs |

## Built-in air filter group

Equipped with air filter regulator & lubricator for easy air controlling, filtering, and lubricating. Surely prolong the machine's lifetime and performance.

## Large manifold filter

The large manifold filter will always ensure you equal and nice finishing without pressure fluctuate. Mean while reduce the tip clogging also.

## Pneumatic big wheels

The inflating pneumatic wheels for easy moving on rugged jobsite roads.

## Durable v-packings

Teflon + Leather V-packings will always works like new, only replace it once per year. Save you time and money on your maintenance and repairing.

## Compact size and light weight

Small size and light weight, ideal for furniture painting, factory, steel structure, etc. Commercial or industrial painting jobs which last 12 hours every day.



## X-Pro Series

High Performance Pneumatic Pump



**XPRO-401  
XPRO-561  
XPRO-681**



**XPRO-301  
XPRO-451  
XPRO-631**

## Advanced technology, high performance

The working performance of this new and improved X-PRO series equipment is outperformed than other pumps in their class.  
More durable and many models and pressure ratios are available for all of your painting demands.

X-PRO pump with many air motor sizes and different pressure ratios to choose, to improve productivity, reduce costs and lower emissions, meet all your strict requirements for painting jobs

| Model No.            | XPRO-301 | XPRO-451 | XPRO-631 | XPRO-401 | XPRO-561 | XPRO681 |
|----------------------|----------|----------|----------|----------|----------|---------|
| Fluid pressure ratio | 30:1     | 45:1     | 63:1     | 40:1     | 56:1     | 68:1    |
| Cycle/min            |          |          | 50       |          | 50       |         |
| Delivery/cycle (cc)  | 193.3    | 250.81   | 193.3    | 290      | 220      | 180     |
| Delivery/min (liter) | 11.6     | 12.54    | 9.67     | 14.5     | 11       | 9       |
| Max. pressure (bar)  | 210      | 315      | 441      | 280      | 392      | 476     |
| Air pressure (bar)   |          |          | 3-7      |          |          |         |
| Stroke (mm)          |          |          | 120      |          |          |         |



## Advanced Displacement Pump

Dual piston rod design.  
Rapid check valve action results in minimal pulsation.  
Easy servicing with multipurpose wrench.  
One-point dis-assembly.  
Energized seal design ensures long seal life and  
Reversible valve seats offer double operating life time.

| Improved Piston Rod   |
|---|
| Chrome plated rod having the advantage to surface roughness, lubricative surface, high-hardness of base material, high-build coating on base material, chemical resistant.<br>Improved rod results in sealing parts long-life without leakage trouble and high maintenance cost caused by frequency recycles. |

## Heavy duty Air Motor

Anti icing/Ice breaking  
Quick changeover speed  
No condensate pooling in cylinder  
Easy servicing due to modular structure  
Low noise.



**XPRO-731**



**XPRO-281**



DP-6C



DP-9C



DP-6391A/B/C



RAM PUMP

DP-551E

| Model No.            | XPRO-551E | XPRO-551P | XPRO-401P |
|----------------------|-----------|-----------|-----------|
| Fluid pressure ratio | 55:1      | 50:1      | 40:1      |
| Cycle/min            | 50        | 50        | 50        |
| Delivery/cycle (cc)  | 200       | 90.65     | 126.16    |
| Delivery/min (liter) | 10        | 4.53      | 6.3       |
| Max. pressure (bar)  | 385       | 350       | 280       |
| Air pressure (bar)   | 3-7       |           |           |
| Stroke (mm)          |           | 120       |           |

## Applications

DP-6C could spray thick heavy duty anti-corrosive paint, waterproofing coatings and other conventional oil-based paint.

DP-9C could spray Inorganic zinc coatings, epoxy zinc-rich primer, enamel, fire-resistant coating, other water and oil based paint.

|                        | DP-6C       | DP-9C       |
|------------------------|-------------|-------------|
| pressure ratio         | 65: 1       | 33:1        |
| Paint delivery(L/min)  | 12          | 24          |
| Inlet pressure(MPa )   | 0.4-0.6     | 0.4-0.6     |
| Air consumption(L/min) | 250-2400    | 100-1000    |
| Cylinder diameter(mm)  | Φ240        | Φ240        |
| Dimension(mm)          | 520×430×670 | 460×430×920 |
| Net weight(kg )        | 45          | 55          |



|                                      | DP6391A            |       | DP6391B            |       |       | DP6391C            |      |      |
|--------------------------------------|--------------------|-------|--------------------|-------|-------|--------------------|------|------|
| Fluid pressure ratio                 | 30:1               | 45:1  | 38:1               | 46:1  | 69:1  | 45:1               | 60:1 | 76:1 |
| Max. paint delivery (L/min)          | 8.4                | 7     | 13.5               | 10.4  | 7     | 13.5               | 11   | 8    |
| Free load delivery (L/min)           | 20.8L              | 13.8L | 33L                | 20.8L | 13.8L | 33L                | 22L  | 15L  |
| Cycle per Liter                      | 12                 | 14    | 7                  | 10    | 14    | 7                  | 9    | 12   |
| Cycle per gallon                     | 48                 | 57    | 29                 | 40    | 57    | 29                 | 36   | 50   |
| Max. Pump Speed                      | 100 cycles per min |       | 100 cycles per min |       |       | 100 cycles per min |      |      |
| Air Motor Effective Diameter (mm)    | 200                | 200   | 250                | 250   | 250   | 280                | 280  | 280  |
| Stroke (mm)                          | 100                | 100   | 100                | 100   | 100   | 100                | 100  | 100  |
| App. Air consumption at 5bar (L/min) | 450                | 450   | 650                | 650   | 650   | 900                | 900  | 900  |
| Air Compressor Pressure Range (bar)  | 3-6                | 3-6   | 3-6                | 3-6   | 3-6   | 3-6                | 3-6  | 3-6  |
| Noise Level (dBA)                    | 75                 | 75    | 75                 | 75    | 75    | 75                 | 75   | 75   |
| Maximum Discharge pressure (bar)     | 180                | 270   | 228                | 276   | 414   | 270                | 360  | 456  |
| Air Inlet (inch)                     | 1/4                | 1/4   | 3/4                | 1/2   | 3/4   | 3/4                | 3/4  | 3/4  |
| Fluid Outlet (mm)                    | 8                  | 8     | 8                  | 8     | 8     | 8                  | 8    | 8    |
| NW (kgs)                             | 55                 | 55    | 67                 | 64    | 64    | 79                 | 76   | 73   |
| GW (kgs)                             | 75                 | 75    | 87                 | 84    | 84    | 99                 | 96   | 93   |
| Packing size                         | 65×70×110cm        |       | 65×70×110cm        |       |       | 65×70×110cm        |      |      |
| Can 2-guns spraying sametime?        | yes                | no    | yes                | yes   | no    | yes                | yes  | no   |



| CYLINDER(ID/mm) | 275 |
|-----------------|-----|
| CYCLE/min       | 160 |
| STROKE (mm)     | 115 |

| CYLINDER(ID/mm) | 254 |
|-----------------|-----|
| CYCLE/min       | 50  |
| STROKE (mm)     | 100 |

| CYLINDER(ID/mm) | 254 |
|-----------------|-----|
| CYCLE/min       | 50  |
| STROKE (mm)     | 120 |



| CYLINDER(ID/mm) | 178 |
|-----------------|-----|
| CYCLE/min       | 60  |
| STROKE (mm)     | 120 |

| CYLINDER(ID/mm) | 153 |
|-----------------|-----|
| CYCLE/min       | 60  |
| STROKE (mm)     | 100 |

| CYLINDER(ID/mm) | 108 |
|-----------------|-----|
| CYCLE/min       | 60  |
| STROKE (mm)     | 80  |



| SLEEVE(ID X L/mm) | 43.6X170  | 43.6X170            |
|-------------------|-----------|---------------------|
| CHARACTERISTIC    | SEPARATED | SEPARATED/STAINLESS |
| WEIGHT (NET:kgs)  | 19.5      | 19                  |

| SLEEVE(ID X L/mm) | 45.3X177  | 51.6X177  |
|-------------------|-----------|-----------|
| CHARACTERISTIC    | SEPARATED | SEPARATED |
| WEIGHT (NET:kgs)  | 21        | 20.5      |

| SLEEVE(ID X L/mm) | 45.3X177  | 51.6X177  |
|-------------------|-----------|-----------|
| CHARACTERISTIC    | SEPARATED | SEPARATED |
| WEIGHT (NET:kgs)  | 20        | 19.5      |



| SLEEVE(ID X L/mm) | 27.8X150 | 21.4X150 |
|-------------------|----------|----------|
| CHARACTERISTIC    | GENERAL  |          |
| WEIGHT (NET:kgs)  | 4.5      | 4.7      |

| SLEEVE(ID X L/mm) | 27.8X150  |
|-------------------|-----------|
| CHARACTERISTIC    | STAINLESS |
| WEIGHT (NET:kgs)  | 4.5       |

| SLEEVE(ID X L/mm) | 43.8X188  | 47.8 X 195 | 51.5 X 195 | 55.2 X 195 |
|-------------------|-----------|------------|------------|------------|
| CHARACTERISTIC    | SEPARATED |            |            |            |
| WEIGHT (NET:kgs)  | 23.5      | 26         | 28         | 30.5       |

# Gasoline Airless Sprayer



## New series of Gasoline + Piston pumps

Chrome plated rod having the advantage to surface roughness, Meet request of most professional contractors who want to get piston pump for High Viscosity coating on the new building / new construction job site. Equipped with reliable HONDA engine for ensure you the plenty of power for your heavy jobs.



X80GL



HONDA



X80G

### The Enhanced Fluid Pump Design

The low suction valve will be suitable for the high viscosity material.

| Model No.             | X80G              | X80GL             |
|-----------------------|-------------------|-------------------|
| Suction system        | normal            | low suction       |
| Engine power          | 8.5HP Honda       | 8.5HP Honda       |
| Max. pumping capacity | 8.0L/min(2.19GPM) | 8.0L/min(2.19GPM) |
| Max. nozzle size      | 0.047"            | 0.047"            |
| Max. pressure         | 227bar/3300psi    | 227bar/3300psi    |



**DP-6331G**

|                       |                        |
|-----------------------|------------------------|
| Model No.             | DP-6331G               |
| Type                  | gasoline + Piston pump |
| Engine power          | 5.5HP                  |
| Max. pumping capacity | 4.0L/min (0.88GPM)     |
| Max. nozzle size      | 0.031"                 |
| Max. pressure         | 210bar / 3045psi       |

**DP-7900**

(Engine Power) 8.3L Max.0.048"

**DP-7900E**

(Electric Power) 8.0L Max.0.047"



- Adjustable pressure control 0-3650psi / 250bar.
- Powered by 6.5hp 0-3300psi/227bar
- Telescoping handle with hose wrap, Quick easy maneuverability.
- Pneumatic tires for easy transportation on rugged construction job-site.
- Could be used for indoor / outdoor panting, acrylics, enamels, latex, primer, floor painting, fire-proofing etc. From medium to high viscosity.

| Model No.             | DP-7900   | DP-7900E(Electric)  | DP-7900TX   |
|-----------------------|---|---|---|
| Suction system        | normal  | normal  | low suction   |
| Engine power          | 6.5HP 4875W   | 4.0HP 3000W   | 6.5HP 4875W   |
| Max. pumping capacity | 8.3L/min (2.19GPM)  | 8.0L/min (2.19GPM)  | 8.3L/min (2.19GPM)  |
| Max. nozzle size      | 0.048"  | 0.047"  | 0.048"  |
| Max. pressure         | 227bar / 3300psi  | 227bar / 3300psi  | 227bar / 3300psi  |
| Guns support          | "1gun 0.048"<br>"2guns 0.035"<br>"3guns 0.027"<br>"4guns 0.023" | "1gun 0.047"<br>"2guns 0.033"<br>"3guns 0.025"<br>"4guns 0.021" | "1gun 0.048"<br>"2guns 0.035"<br>"3guns 0.027"<br>"4guns 0.023" |



**DP-7900 TX**

## EZ pressure control system

delivers a consistent spray fan without pressure fluctuations at all spraying pressures.



## The telescopic handle

The adjustable height telescopic handle makes for convenient transport on the building site or in the car.



**DP-9600**

## The Practical Swing cart

It is possible to swing up the pump: when working from a bucket or a container but also for transport.



**HONDA**



**DP-9600E**



**P9800G/DP-9900G**

## Multiple Choice

380 V electric drive or independent of mains. electricity with the Honda petrol Engine are optional



**DP9800E/DP-9900E  
Direct-Connected Motor**

| Item No.          | DP-9800E           | DP-9600E           | DP-9800G           | DP-9600X70(7900)   |
|-------------------|--------------------|--------------------|--------------------|--------------------|
| Driven            | Electric+hydraulic | Electric+hydraulic | Gasoline+hydraulic | Gasoline+hydraulic |
| Transmission      | Direct             | Belt               | Direct             | Belt               |
| Motor power       | 3.75KW             | 3.75KW             | 5.5KW              | 5.5KW              |
| Voltage/Frequency | 380V 50Hz          | 380V 50Hz          | HONAD or LUDWIG    | HONAD or LUDWIG    |
| Flow rate         | 10.0L/MIN          | 10.0L/MIN          | 12.0L/MIN          | 12.0L/MIN          |
| Max. tip size     | 0.049"             | 0.049"             | 0.052"             | 0.052"             |

## Heavy-strength Frame

Easy-roll tubed pneumatic tires  
Enamel painted steel tubing – corrosion protection  
Multi-function design converts to skid mount in seconds

DP-GH6833



## Long life Fluid Pump

Proven design and performance  
Long life rod and sleeve delivers unmatched durability and life  
Easy Change Pump System and quick Intake Valve eliminates downtime

| Model No.             | DP-GH6300   | DP-GH6833   |
|-----------------------|---|---|
| Engine power          | 9HP 6750W   | 13HP 9750W  |
| Max. pumping capacity | 11.4L/min (3GPM)  | 18L/min (4.76GPM)   |
| Max. tip size         | 0.057"  | 0.065"  |
| Max. pressure         | 227bar / 3300psi  | 275bar / 4000psi  |
| Max. hose length      | 90m / 295ft   | 90m / 295ft   |
| Gun support           | one gun 0.057"<br>two guns 0.039"<br>three guns 0.033"<br>four guns 0.029"<br>five guns 0.025"<br>six guns 0.023" | one gun 0.065"<br>two guns 0.046"<br>three guns 0.037"<br>four guns 0.032"<br>five guns 0.029"<br>six guns 0.026" |


## Honda Engine Or Diesel motor

13 HP Honda engine with integrated fuel tank to deliver maximum performance  
Contractor preferred engine with Oil Alert  
Back-up Pull Start  
High-capacity, 12 Volt 18 Amp Charging System



# Airless Line Stripper

## Professional Road line marking machine

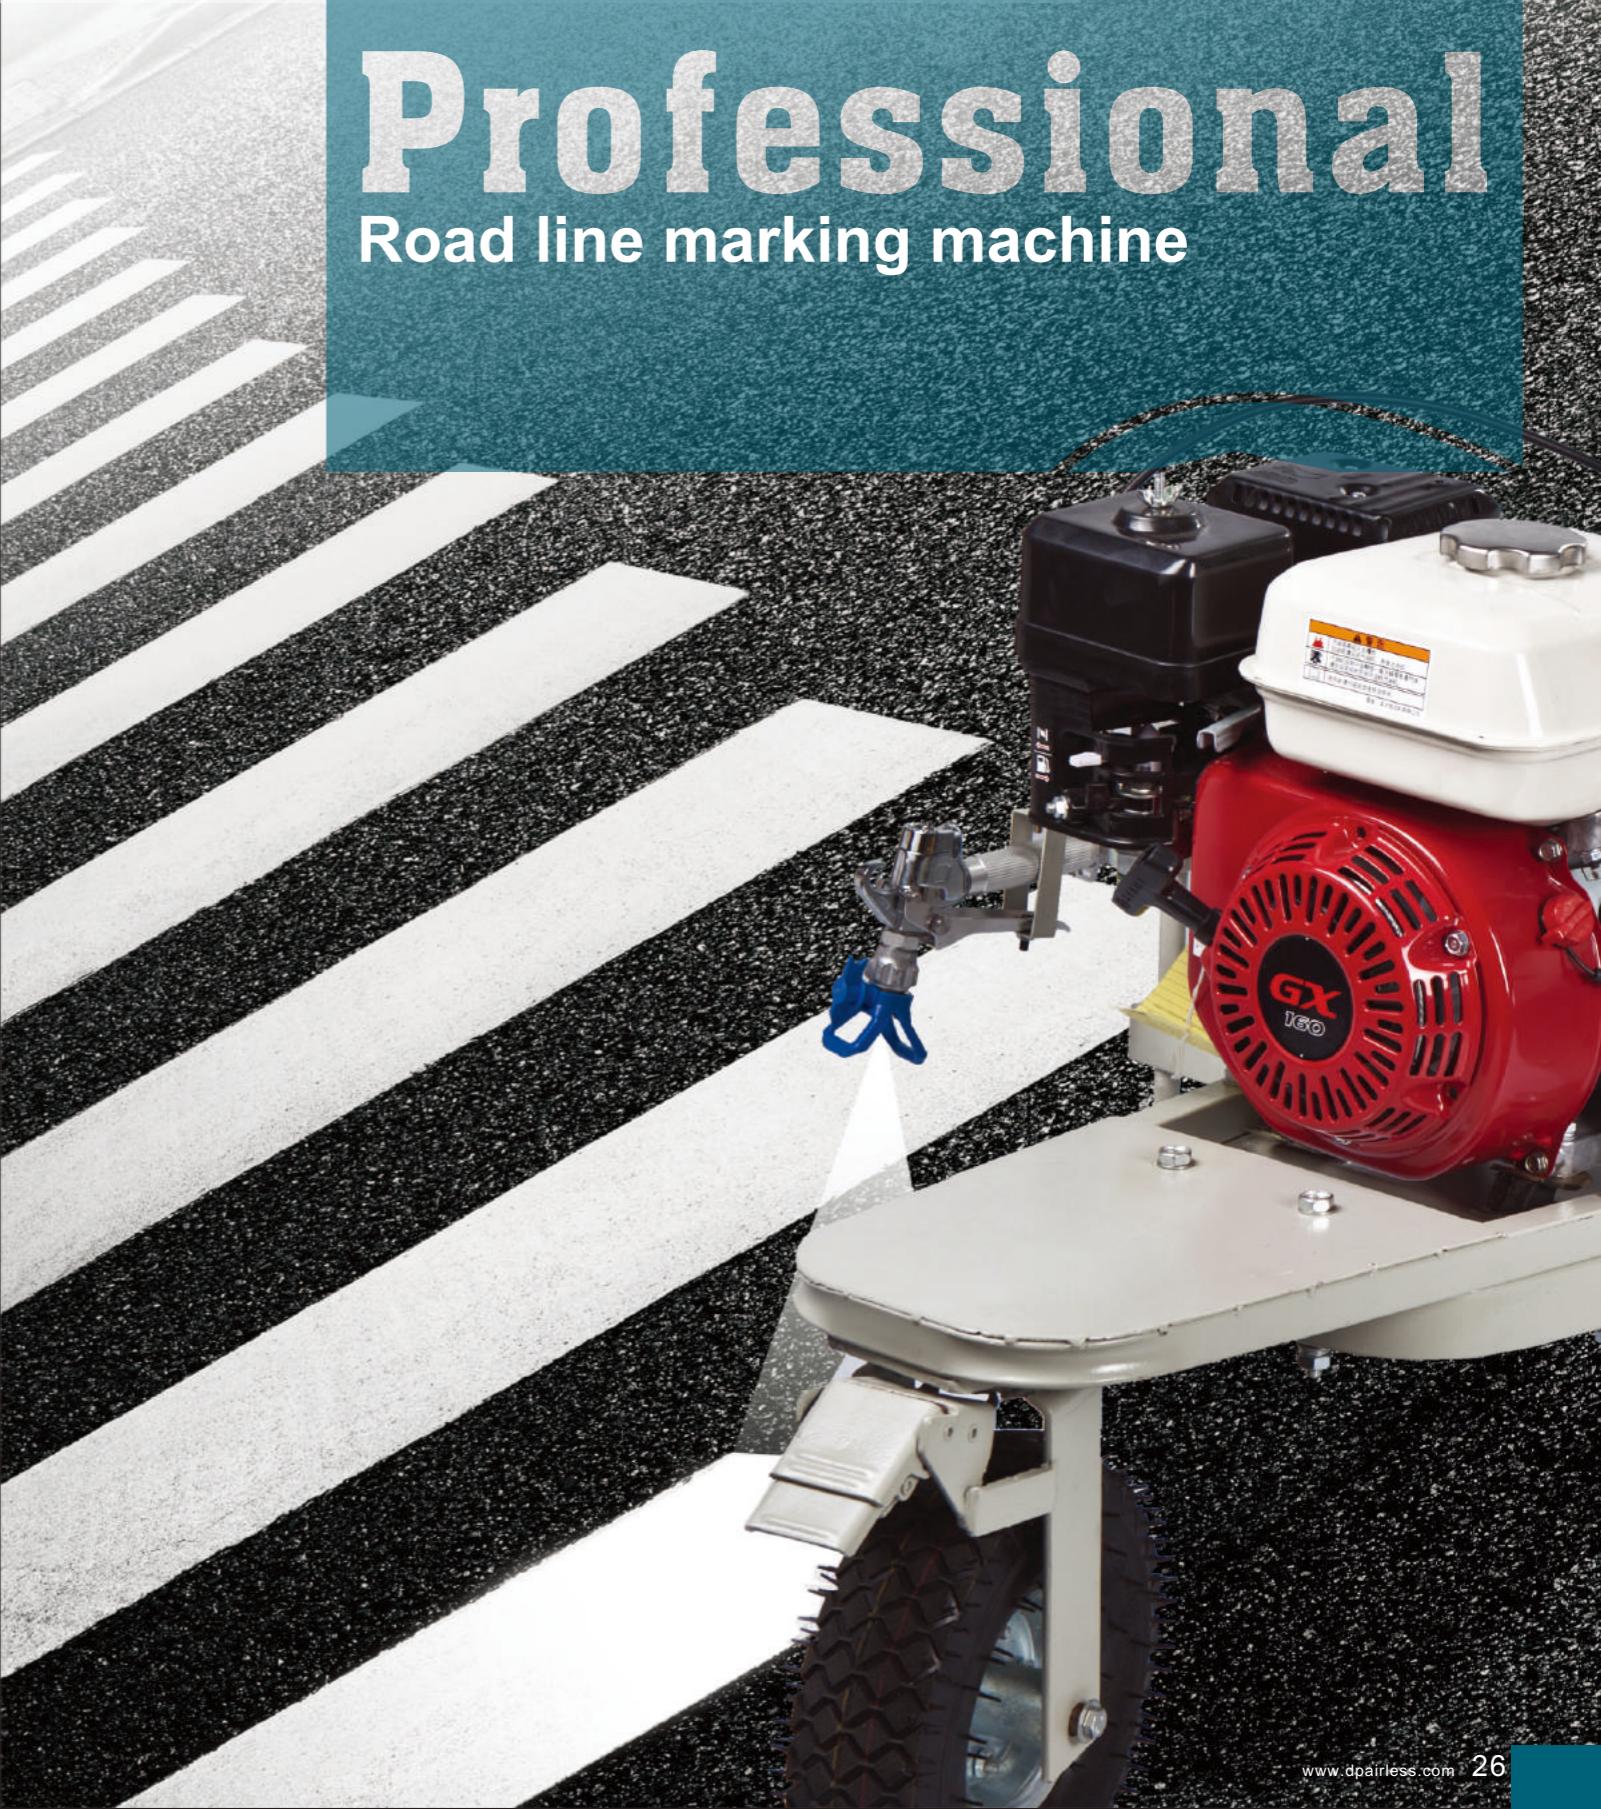

## High-Efficiency Cooling System

Large 15L hydraulic reservoir  
Return line hydraulic filter extends life  
No special hydraulic fluid needed  
Quality assured cooler and blower system

## Heavy-Duty Hydraulic System

Faster, more responsive changeover O-ring sealed to eliminate leaks High-precision pressure control  
No hydraulic reset button needed  
Durable hydraulic lines for long life

It's the preferred choice with line striping parking lots, athletic fields. It is ideal for most low to medium VOC, waterborne traffic paints. This is a great entry level Gas engine powered stiper, and can be used for small to medium sized parking lots, runways, roads marking, paths and sports fields.

- Operator spraying controls are located right at the handle bars, designed for more comfortable and better control. You can fine tune the striping system operation without stopping
- Provides easier "up to the curb" parking lot striping ,and With the Front wheel LOCK system, you can also stripe arcs and curves in any angle.
- High-comfort handle-bar design for greater stiper control and less operator fatigue
- Tall, low friction easy-roll wheels in big size, push easily for less operator fatigue.
- The valves are precised machined in stainless steel + tungsten carbide material for long life.




- Proven durable Piston Pump with Long-life V-packings, and stainless piston rod.
- Easy operate, easy control, and easy turn in any direction.
- Fluid section has slower-stroking piston, slower cycle rate and larger displacement for longer performance life.
- Ideal for most low to medium viscosity, waterborne traffic paints.
- Versatile gun bracket can be positioned to spray on left, right, front or rear of stiper.
- Ideal fro small to medium-size line marking projects on athletic fields and pavement, parking lots, roads marking etc.

| Technical data        | DP-6325L            | DP-6335L            |
|-----------------------|---------------------|---------------------|
| Motor power           | 5.5HP               | 5.5HP               |
| Max. pumping capacity | 2.5 L/min (0.66GPM) | 5.0 L/min (1.32GPM) |
| Max. nozzle size      | up to 0.025"        | up to 0.035"        |
| Max. pressure         | 210bar / 3045psi    | 210bar / 3045psi    |

## Hydraulic Road Line Stripper


- Proven durable Piston Pump with Long-life V-packings, and stainless piston rod.
- Easy operate, easy control, and easy turn in any direction.
- Fluid section has slower-stroking piston, slower cycle rate and larger displacement for longer performance life.
- Ideal for most low to medium viscosity, waterborne traffic paints.
- Versatile gun bracket can be positioned to spray on left, right, front or rear of stiper.
- Ideal fro small to medium-size line marking projects on athletic fields and pavement, parking lots, roads marking etc.

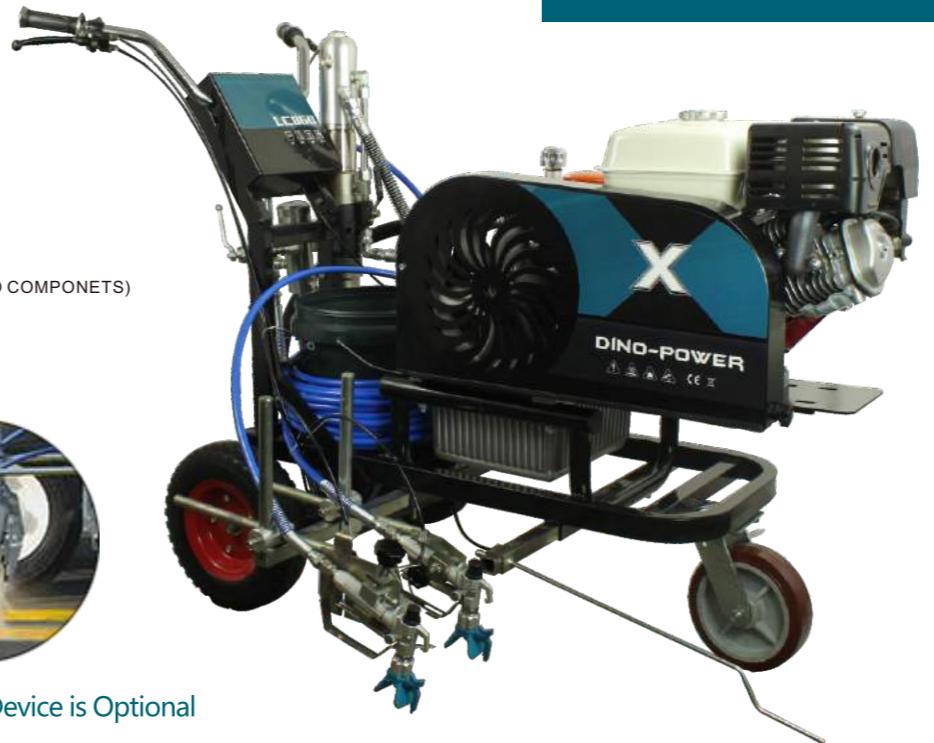

- Operator spraying controls are located right at the handle bars, designed for more comfortable and better control. You can fine tune the striping system operation without stopping
- Provides easier "up to the curb" parking lot striping ,and With the Front wheel LOCK system, you can also stripe arcs and curves in any angle.
- High-comfort handle-bar design for greater stiper control and less operator fatigue
- Tall, low friction easy-roll wheels in big size, push easily for less operator fatigue.
- The valves are precised machined in stainless steel + tungsten carbide material for long life.

| Model No.      | DP-LC860            |
|----------------|---------------------|
| Engine power   | 9.0HP               |
| Max. pressure  | 228bar / 3306psi    |
| Max. flow rate | 12L/min (3.17GPM)   |
| Guns           | one gun or two guns |

# Double diaphragm pump

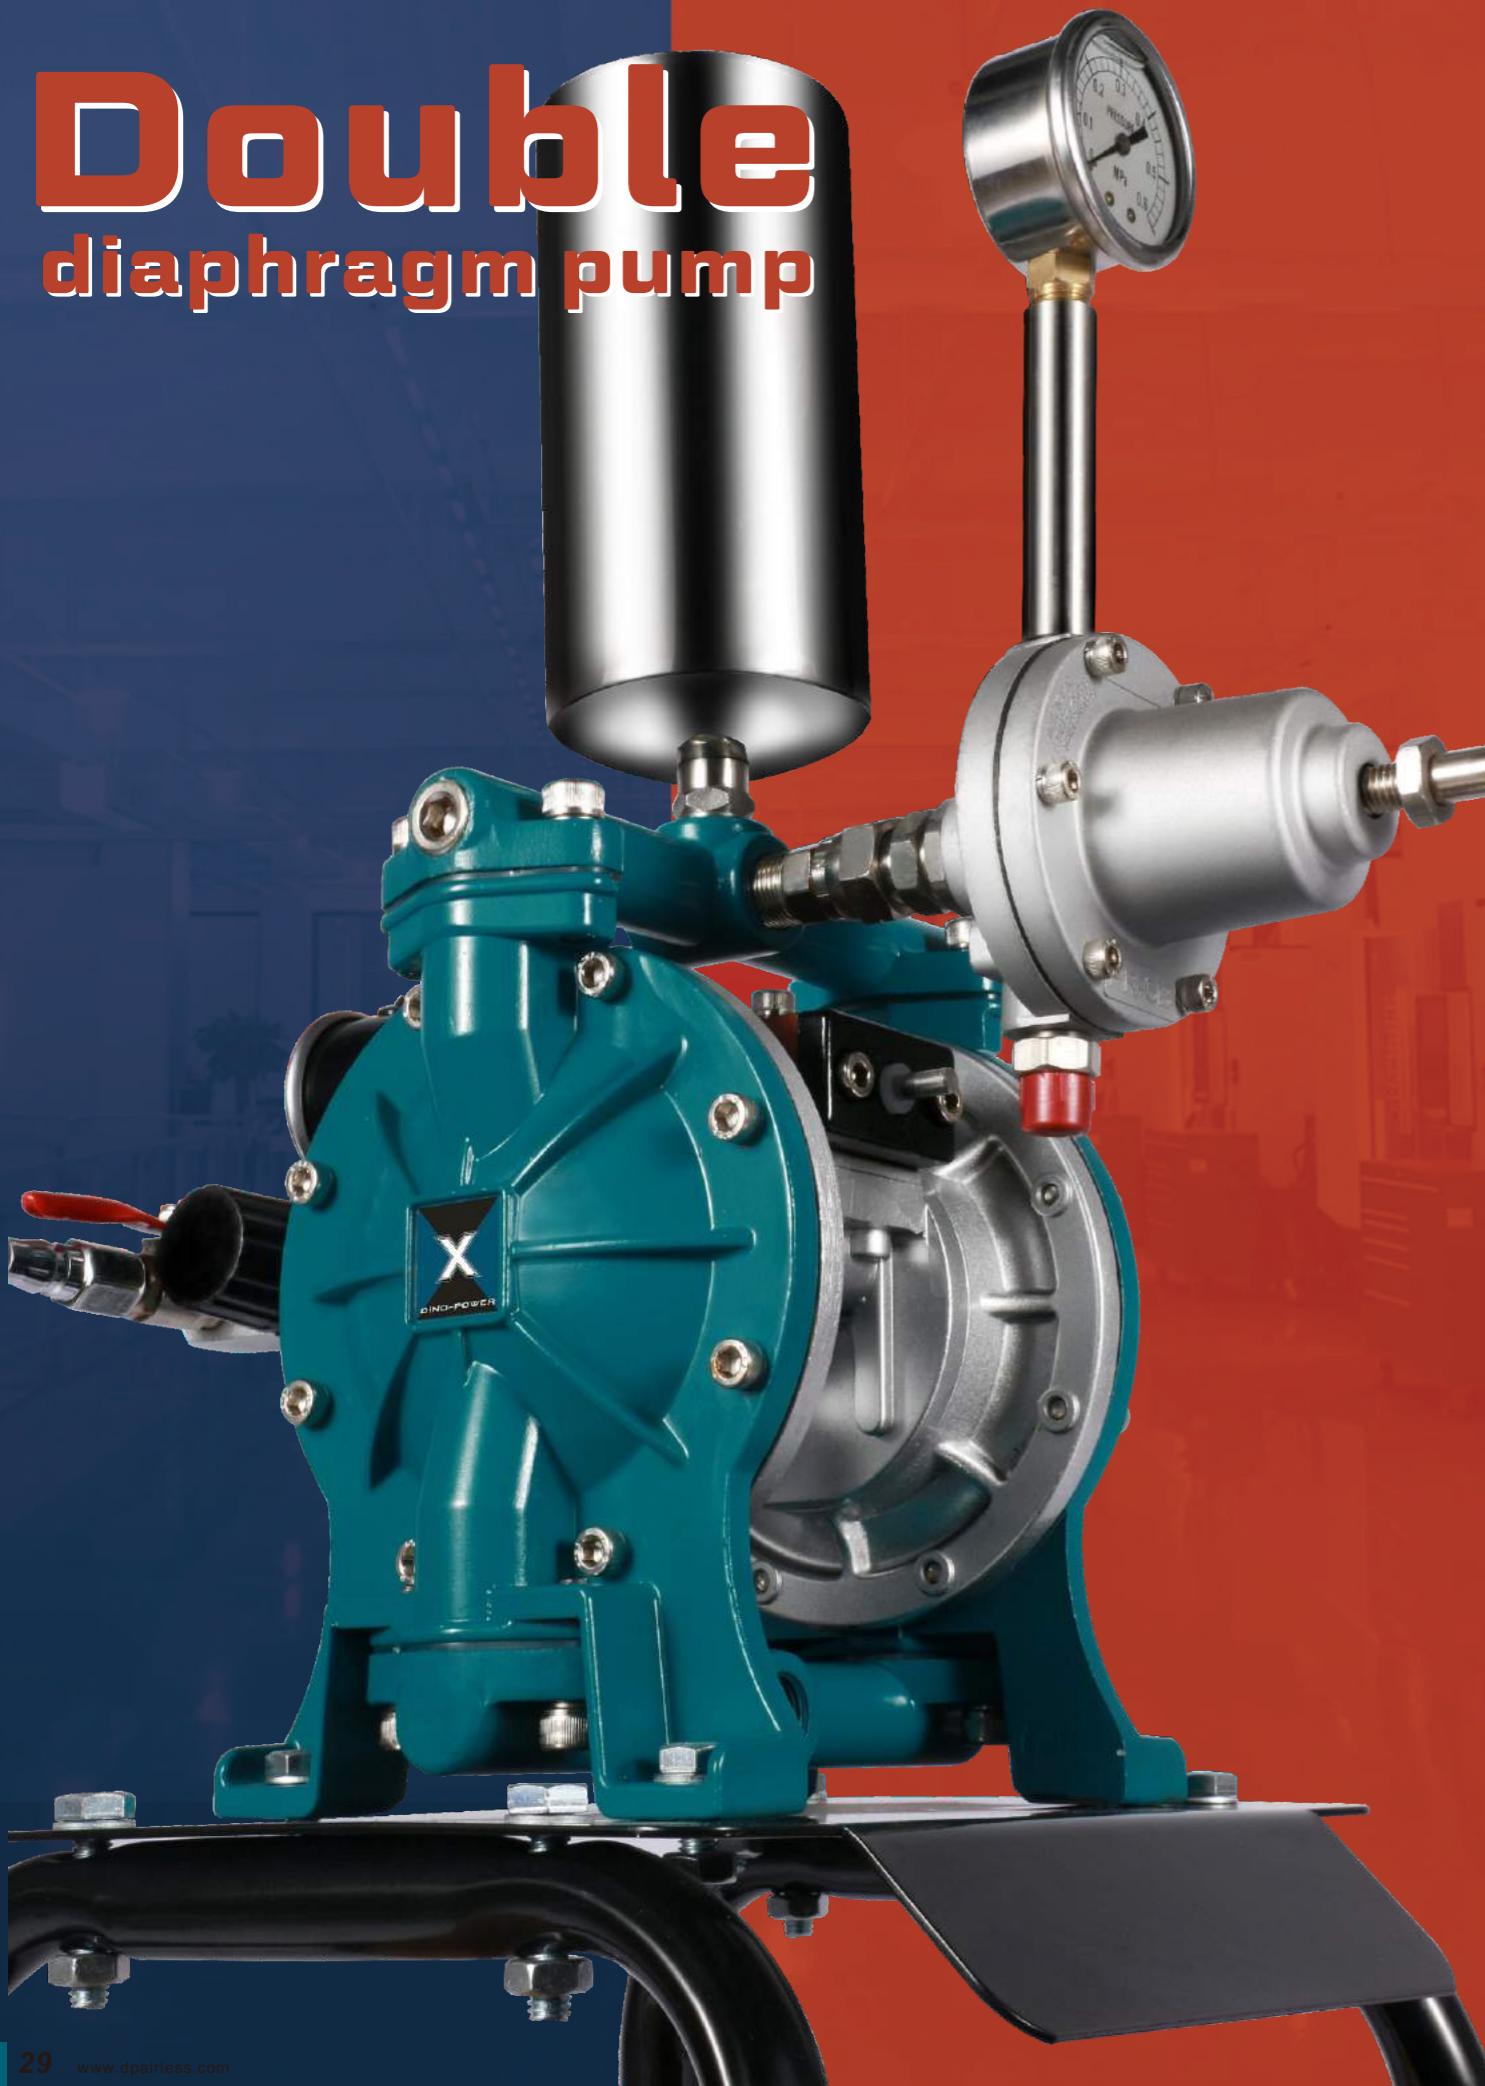

## Double Diaphragm Pump

Delivers stable output where constant material supply is required.  
Fewer moving parts & simple structure ensures easy maintenance.  
Ready to use after connecting to the air supply, hose & gun.  
Flexible suction & return hoses for easy color change.



K17



K18



Main spare parts



K25



Precious regulation valve assembly



K40

| Model No.                     | DP-K13               | DP-K17            | DP-K18            | DP-K25           | DP-K40          | DP-K56             | DP-K180             |
|-------------------------------|----------------------|-------------------|-------------------|------------------|-----------------|--------------------|---------------------|
| Fluid Input Size              | 3/8 inch             | 3/8 inch          | 3/8 inch          | 3/8 inch         | 1/2 inch        | 3/4 inch           | 1 inch              |
| Max. Pressure                 | 7bar / 101.5psi      | 7bar / 101.5psi   | 7bar / 101.5psi   | 7bar / 101.5psi  | 7bar / 101.5psi | 7bar / 101.5psi    | 8bar / 116psi       |
| Air Input Size                | 1/4" NPT             | 1/4" NPT          | 1/4" NPT          | 1/4" NPT         | 1/4" NPT        | 1/4" NPT           | 3/8" NPT            |
| Starting Pressure             | Planar Valve 1.6 bar | 1.6 bar           | 1.6 bar           | 1.6 bar          | 1.6 bar         | 1.6 bar            | 1.6 bar             |
| Low-Pressure Valve            | 0.5bar               | 0.5bar            | 0.5bar            | 0.5bar           | 0.5bar          | 0.5bar             | 0.7bar              |
| Max. Passage Amount           | 13L/Min (3.43GPM)    | 18L/Min (4.75GPM) | 18L/Min (4.75GPM) | 25L/Min (6.6GPM) | 42L/Min (11GPM) | 60L/Min (15.85GPM) | 180L/min (47.55GPM) |
| Max. Air Consumption Capacity | 150NL/Min            | 150NL/Min         | 150NL/Min         | 200NL/Min        | 350NL/Min       | 380NL/Min          | 960NL/Min           |
| Particle Maximum Diameter     | Φ2mm                 | Φ2mm              | Φ2mm              | Φ2mm             | Φ3mm            | Φ3mm               | Φ6mm                |
| Net Weight                    | 7kgs                 | 9kgs              | 8kgs              | 8.5kgs           | 9kgs            | 9kgs               | 9kgs                |
| Carton Box Size               | 46*35*44cm           | 38*37*47cm        | 53.5*40*25cm      | 53.5*40*25cm     | 53.5*40*25cm    | 53.5*40*25cm       | 31*27*39cm          |



DP-K13



DP-K56



DP-K180



DP-6401/6402/6403

With Spray Gun & Hose  
8L 10L 15L

DP-6411H/12H/13H/14H/16H

With S.S. Inner Tank  
(Hand Mix-10L 20L 30L 40L 60L)

DP-K25M With Mixer



PR-5B



DP-W101

Optional for Fine Finish  
with DD pumps.

## Fluid Regulator



WJ-JT



WK-CT



WK-GS

## Surge Tank

| Model                | PR-5B            | WK-JT            | WK-CT            |
|----------------------|------------------|------------------|------------------|
| Material             | 304 S.S.         | 304 S.S.         | 304 S.S.         |
| Max. Pressure        | 250 Bar/ 3625Psi | 250 Bar/ 3625Psi | 250 Bar/ 3625Psi |
| Fluid Input size     | G3/8" NPT        | G1/4" NPT        | G1/4" NPT        |
| Fluid export size    | G1/4" NPT        | G1/4" NPT        | G1/4" NPT        |
| Max. delivery volume | 2L/min           | 2L/min           | 3L/min           |
| Pressure Ratio       | 1:1              | 4:1              | 1:1              |
| Weight               | 0.9kgs           | 0.5kgs           | 0.4kgs           |

| Model             | WK-GS            |
|-------------------|------------------|
| Material          | 304 S.S.         |
| Max.WPR           | 350Bar / 5000Psi |
| Fluid Input size  | G3/8"NPT         |
| Fluid export size | G1/4" NPT        |
| Filter(M)         | 60/100/150/200   |
| Weight            | 1.2kg            |



Stainless Steel Tank

SS-3 SS-5 SS-10 SS-20

3L 5L 10L 20L



Stainless Steel Tank With Mixer &amp; DD Pump

SS-10M

SS-10MD

10L 10L



DP-6411A/12A/13A/14A/16A

With S.S. Inner Tank  
(AIR Mix-10L 20L 30L 40L 60L)

## Stainless Steel Paint Tank

| Model No.  | DP-6401   | DP-6402   | DP-6403   | DP-6411H   | DP-6411A   |
|--|---|---|---|--|--|
| Tank Volume  | 8L  | 10L   | 15L   | 10L  | 10L  |
| Agitator Type  | NONE  | NONE  | NONE  | Manual Agitator  | Air Agitator   |
| Outer Surface Treatment                                  | Galvanized & Powder Coating   | Galvanized & Powder Coating   | Galvanized & Powder Coating   | Powder Coating   | Powder Coating   |
| Inner Surface Treatment                                  | Teflon Finishing  | Teflon Finishing  | Teflon Finishing  | Powder Coating   | Powder Coating   |
| Stainless Steel inner tank Dimension (Diameter X Height) | NONE  | NONE  | NONE  | Φ22cm X 28cm   | Φ22cm X 28cm   |
| Spraying Pressure  | 1-3.5bar  | 1-3.5bar  | 1-3.5bar  | 1-5bar   | 1-5bar   |
| Release Pressure   | 4.5bar  | 4.5bar  | 4.5bar  | 5.5bar   | 5.5bar   |
| Air Inlet Connector                                      | 1/4"  | 1/4"  | 1/4"  | 1/4"   | 1/4"   |
| Paint Outlet Connector                                   | 3/8"  | 3/8"  | 3/8"  | 1/4"   | 1/4"   |
| Tank Outer Dimension (Diameter X Height)                 | Φ24cm X 26cm  | Φ24cm X 29cm  | Φ24cm X 35cm  | Φ24cm X 33cm   | Φ24cm X 33cm   |
| Agitator Motor Power                                     | NONE  | NONE  | NONE  | NONE   | 1/4HP  |
| Contents in Package                                      | 1. paint tank<br>2. spray gun<br>3. 3.5m hose<br>4. pressure gauge<br>5. regulator<br>6. safety valve<br>7. on-off ball valve<br>8. manual, etc." | 1. paint tank<br>2. spray gun<br>3. 3.5m hose<br>4. pressure gauge<br>5. regulator<br>6. safety valve<br>7. on-off ball valve<br>8. manual, etc." | 1. paint tank<br>2. spray gun<br>3. 3.5m hose<br>4. pressure gauge<br>5. regulator<br>6. safety valve<br>7. on-off ball valve<br>8. manual, etc." | 1. paint tank<br>2. pressure gauge<br>3. regulator<br>4. CE safety valve<br>5. on-off ball valve<br>6. manual, etc." | 1. paint tank<br>2. pressure gauge<br>3. regulator<br>4. CE safety valve<br>5. on-off ball valve<br>6. manual, etc." |


| Model No.  | DP-6412H   | DP-6412A   | DP-6413H   | DP-6413A   |
|--|--|--|--|--|
| Tank Volume  | 20L  | 20L  | 30L  | 30L  |
| Agitator Type  | Manual Agitator  | Air Agitator   | Manual Agitator  | Air Agitator   |
| Outer Surface Treatment                                  | Powder Coating   | Powder Coating   | Powder Coating   | Powder Coating   |
| Inner Surface Treatment                                  | Powder Coating   | Powder Coating   | Powder Coating   | Powder Coating   |
| Stainless Steel inner tank Dimension (Diameter X Height) | Φ30cm X 30cm   | Φ30cm X 30cm   | Φ30cm X 40cm   | Φ30cm X 40cm   |
| Spraying Pressure  | 1-5bar   | 1-5bar   | 1-5bar   | 1-5bar   |
| Release Pressure   | 5.5bar   | 5.5bar   | 5.5bar   | 5.5bar   |
| Air Inlet Connector                                      | 1/4"   | 1/4"   | 1/4"   | 1/4"   |
| Paint Outlet Connector                                   | 1/4"   | 1/4"   | 1/4"   | 1/4"   |
| Tank Outer Dimension (Diameter X Height)                 | Φ31.8cm X 34cm   | Φ31.8cm X 34cm   | Φ31.8cm X 41cm   | Φ31.8cm X 41cm   |
| Agitator Motor Power                                     | NONE   | 1/4HP  | NONE   | 1/4HP  |
| Contents in Package                                      | 1. paint tank<br>2. pressure gauge<br>3. regulator<br>4. CE safety valve<br>5. on-off ball valve<br>6. manual, etc." | 1. paint tank<br>2. pressure gauge<br>3. regulator<br>4. CE safety valve<br>5. on-off ball valve<br>6. manual, etc." | 1. paint tank<br>2. pressure gauge<br>3. regulator<br>4. CE safety valve<br>5. on-off ball valve<br>6. manual, etc." | 1. paint tank<br>2. pressure gauge<br>3. regulator<br>4. CE safety valve<br>5. on-off ball valve<br>6. manual, etc." |

| Model No.  | DP-6414H   | DP-6414A   | DP-6416H   | DP-6416A   |
|--|--|--|--|--|
| Tank Volume  | 40L  | 40L  | 60L  | 60L  |
| Agitator Type  | Manual Agitator  | Air Agitator   | Manual Agitator  | Air Agitator   |
| Outer Surface Treatment                                  | Powder Coating   | Powder Coating   | Powder Coating   | Powder Coating   |
| Inner Surface Treatment                                  | Powder Coating   | Powder Coating   | Powder Coating   | Powder Coating   |
| Stainless Steel inner tank Dimension (Diameter X Height) | Φ35cm X 35cm   | Φ35cm X 35cm   | Φ35cm X 50cm   | Φ35cm X 50cm   |
| Spraying Pressure  | 1-5bar   | 1-5bar   | 1-5bar   | 1-5bar   |
| Release Pressure   | 5.5bar   | 5.5bar   | 5.5bar   | 5.5bar   |
| Air Inlet Connector                                      | 1/4"   | 1/4"   | 1/4"   | 1/4"   |
| Paint Outlet Connector                                   | 1/4"   | 1/4"   | 1/4"   | 1/4"   |
| Tank Outer Dimension (Diameter X Height)                 | Φ38cm X 40cm   | Φ38cm X 40cm   | Φ38cm X 55cm   | Φ38cm X 55cm   |
| Agitator Motor Power                                     | NONE   | 1/4HP  | NONE   | 1/4HP  |
| Contents in Package                                      | 1. paint tank<br>2. pressure gauge<br>3. regulator<br>4. CE safety valve<br>5. on-off ball valve<br>6. manual, etc." | 1. paint tank<br>2. pressure gauge<br>3. regulator<br>4. CE safety valve<br>5. on-off ball valve<br>6. manual, etc." | 1. paint tank<br>2. pressure gauge<br>3. regulator<br>4. CE safety valve<br>5. on-off ball valve<br>6. manual, etc." | 1. paint tank<br>2. pressure gauge<br>3. regulator<br>4. CE safety valve<br>5. on-off ball valve<br>6. manual, etc." |

## Pneumatic Mixer



Hand-held Type

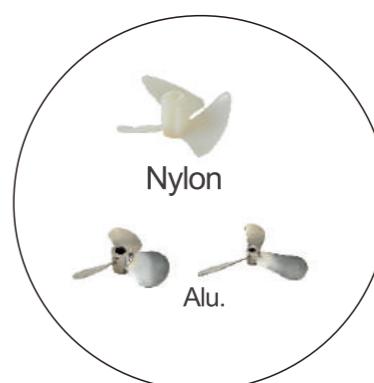

Alu. & Nylon & Stainless Steel Blade



Clamped Type



Lift Type




Stationary Type

## Handheld, Clamping & Stationary Type Air Agitator

| Model No.       | PM201A    | PM201B    | PM202A    | PM202B    | PM203A    | PM203B    | PM204A     | PM204B    | PM205A        | PM208B    |
|-----------------|-----------|-----------|-----------|-----------|-----------|-----------|------------|-----------|---------------|-----------|
| Description     | Air Motor |           | Hand-Held |           | Easy Lift |           | Stationery |           | Clamping Type |           |
| Motor Power     | 1/4HP     | 1/2HP     | 1/4HP     | 1/2HP     | 1/4HP     | 1/2HP     | 1/4HP      | 1/2HP     | 1/4HP         | 1/2HP     |
| Free Load Speed | 0-2000rpm | 0-1000rpm | 0-2000rpm | 0-1000rpm | 0-2000rpm | 0-1000rpm | 0-2000rpm  | 0-1000rpm | 0-2000rpm     | 0-1000rpm |
| Air Consumption | /         |           | 260L/min  |           | 260L/min  |           | 260L/min   |           | 260L/min      |           |
| Tank Capacity   | /         |           | 10gal     |           | 10gal     |           | 5gal       |           | 50gal         |           |
| Axis Dimension  | 12mm      |           | 12mm      |           | 12mm      |           | 12mm       |           | 12mm          |           |
| Impeller Size   | /         |           | 105mm     |           | 105mm     |           | 105mm      |           | 160mm         |           |

## Electric Mixer

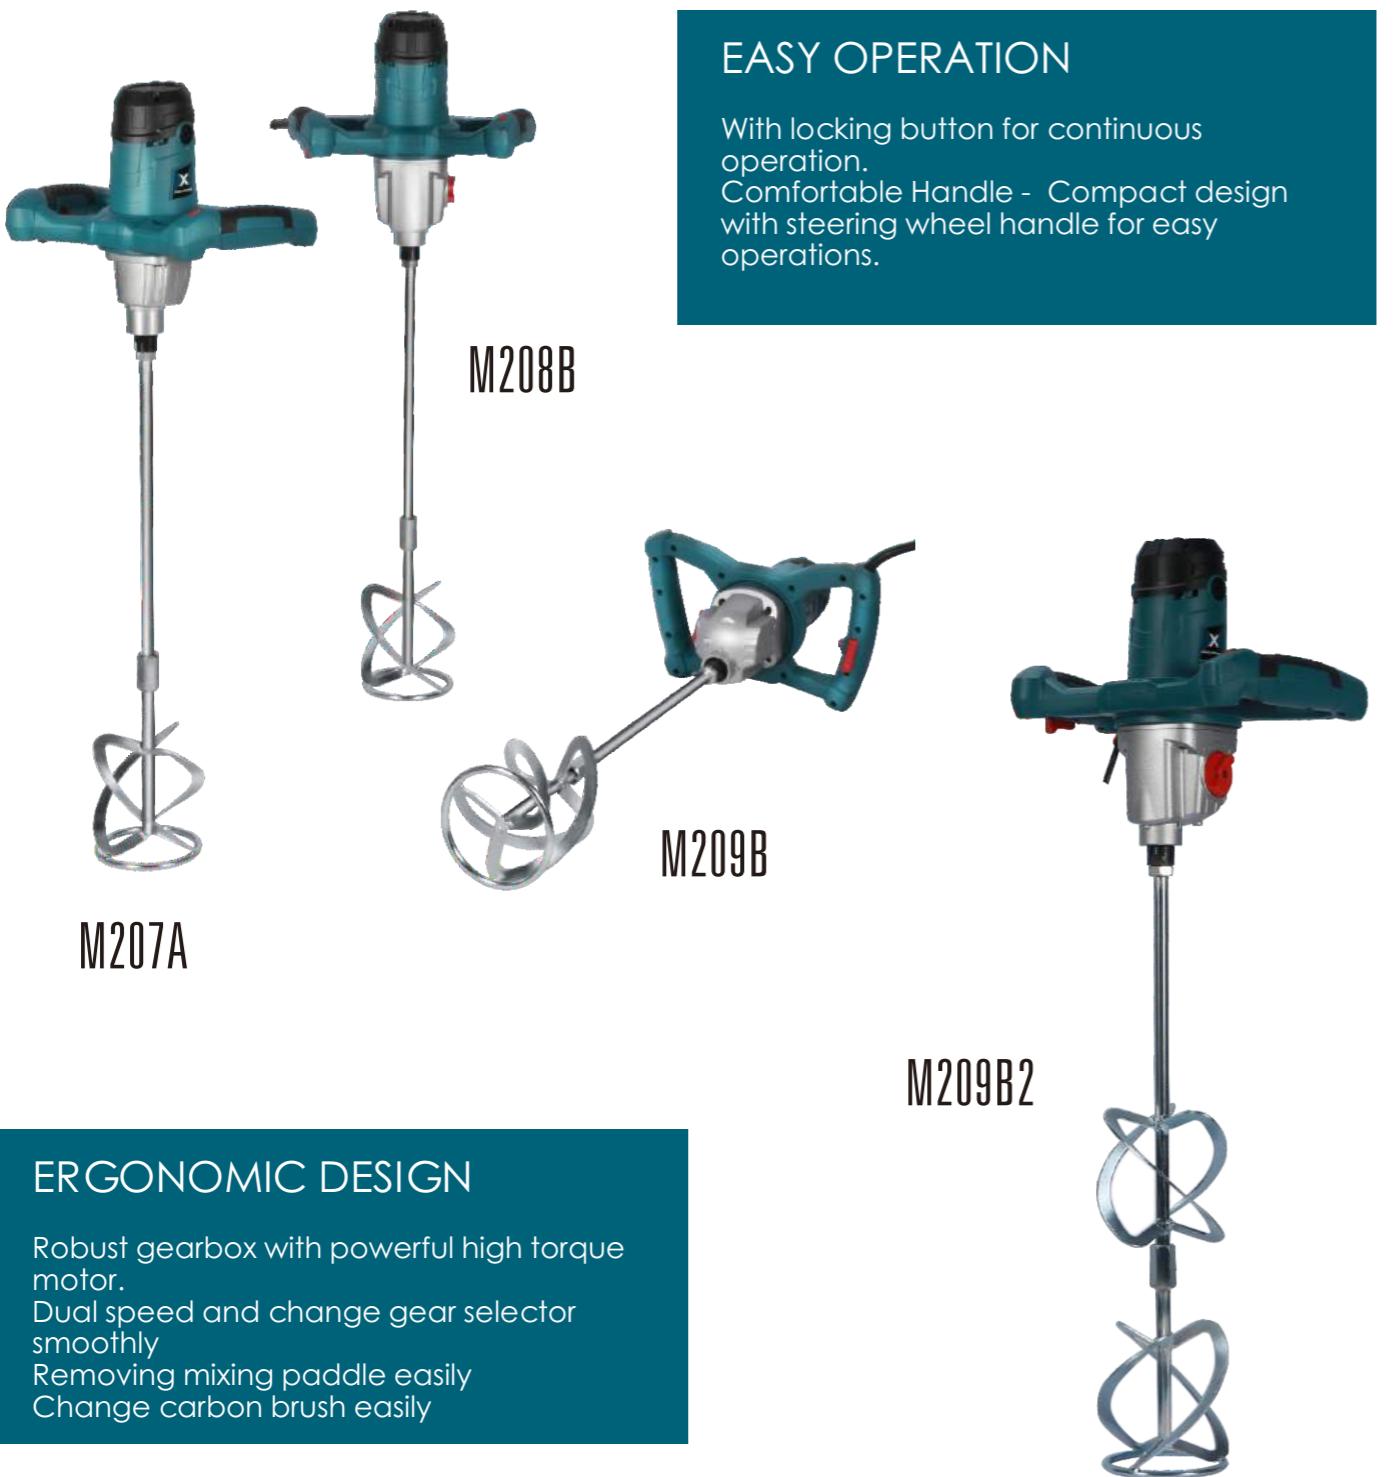

| Model No.          | DP-M207A/B                 | DP-M208A/B                 | DP-M209A/B                 | DP-M209A2/B2               |
|--------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| Voltage            | 220V 50hz or 110V 60hz     |
| Motor power        | 1200W                      | 1400W                      | 1600W                      | 1600W                      |
| Speed I            | A:400-800rpm B: 250-500rpm | A:400-800rpm B: 250-500rpm | A:400-800rpm B: 250-500rpm | A:400-800rpm B: 250-500rpm |
| Speed II           | N/A                        | 400-800rpm                 | N/A                        | 400-800rpm                 |
| Mixing paddle dia. | 120mm                      | 120mm                      | 140mm                      | 140mm                      |

## DRYWALL SANDER



## Electric HandHeld Drywall Sander



DP-700A

### SATISFYING LIFETIME

The robust drive system transfers the power efficiently to the sanding pad and ensures a long service life.

### Fatigue-free working

Very handy, light-weight machine with optimum ease of operation. Provides comfortable and ergonomic working conditions and avoids unnecessary physical strain when long time working.



DP-600A


### EXTRACT DUST WITHOUT VACUUM CLEANER

Self-suction, with dust extracting system, no vacuum cleaner is required, making the whole sanding operation extremely convenient.

| Model No.             | DP-600A(A2)            | DP-700A2(A3/A4)        |
|-----------------------|------------------------|------------------------|
| Voltage               | 220V 50hz or 110V 60hz | 220V 50hz or 110V 60hz |
| Motor power           | 800W                   | 800W                   |
| No load speed         | 1200-2300rpm           | 1200-2300rpm           |
| Sanding motion        | Rotation               | Rotation               |
| Grinding pad diameter | 180mm                  | 180mm                  |
| Sandpaper diameter    | 190mm                  | 190mm                  |
|                       | Portable hand-held     | Portable hand-held     |

A: without LED light A2: with LED light A3: with 2 strips 7W LED light A4: with 1 strip 7W LED light

## Long-Reach Drywall Sander

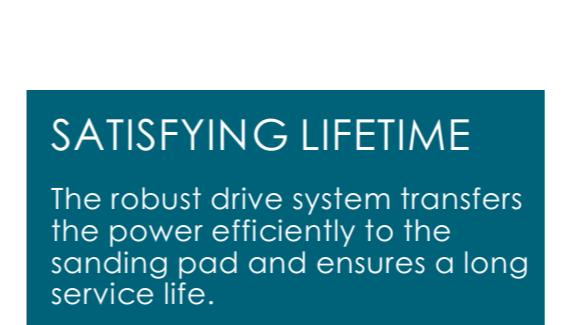

DP-1000 series



DP-2000 series



DP-3000 series

### EXTRACT DUST WITHOUT VACUUM CLEANER

Self-suction, with dust extracting system, no vacuum cleaner is required, making the whole sanding operation extremely convenient.

| Model No.             | DP-1000F2(FD2/L2)      | DP-2000F(F2/F3/FD2)    | DP-3000F(F2/F3/L2)     | DP-3000T               |
|-----------------------|------------------------|------------------------|------------------------|------------------------|
| Voltage               | 220V 50hz or 110V 60hz |
| Motor power           | 710W                   | 710W                   | 800W                   | 710W                   |
| No load speed         | 600-1500rpm            | 800-1800rpm            | 800-1800rpm            | 800-1800rpm            |
| Sanding motion        | Rotation               | Rotation               | Rotation               | Rotation               |
| Grinding pad diameter | 215mm                  | 215mm                  | 215mm                  | 215mm                  |
| Sandpaper diameter    | 225mm                  | 225mm                  | 225mm                  | 225mm                  |
| Length                | 165cm                  | 165cm                  | 165cm                  | 165cm                  |

F: foldable type L: unfoldable type D: dust T: two sanding pads(round+triangle pads)  
 1: without LED light 2: with LED light 3: with 2 strips 7W LED light

## LIGHT BODY

Simple and compact design result in light weight and save physical energy, increasing working efficiency.



## Vacuum cleaner

DP-750 Multifunctional Vacuum Cleaner for Drywall Sander



**DP-750**

Dust-collector 2 in 1 function with 70L big capacity dust bag soft starting with minimized starting pulsations 1.9kgs light weight and portable design, easy to carry



**DP-506** Vacuum  
Cleaner  
1400W 38L



| Model No.     | DP-750                 | DP-506                 |
|---------------|------------------------|------------------------|
| Voltage       | 220V 50Hz or 110V 60Hz | 220V 50Hz or 110V 60Hz |
| Motor power   | 750w                   | 1400w                  |
| No load speed | 400-800rpm             |                        |
| Air Volume    | 3.5M3/min              |                        |
| Capacity      | 70L                    | 38L                    |



**DP-FA20**



**DP-FA30**

Application: Polyurethane foam, 2-components spray, spouting, heat insulation, Foam insulate packing, PU foam filling jobs, Tank and pipe coating, Roof insulation.



For spraying



For injection



**DP-FA50/FA60**

| Model No.               | DP-FA20               | DP-FA30               | DP-FA50               |
|-------------------------|-----------------------|-----------------------|-----------------------|
| Drive                   | Air-driven            | Air-driven            | Air-driven            |
| Voltage                 | 220V 50HZ             | 3-ph 380V 50hz        | 3-ph 380V 50hz        |
| Mixing volumetric ratio | 1:1                   | 1:1                   | 1:1 or 1:2            |
| Max. pressure           | 150bar / 2175psi      | 200bar / 2900psi      | 200bar / 2900psi      |
| Max. output volume      | 8kgs/min (17 lbs/min) | 8kgs/min (18 lbs/min) | 9kgs/min (20 lbs/min) |
| Heater power(watt)      | 7700w                 | 8800w                 | 10500w                |
| Heating temperature     | 0-80°C (176°F)        | 0-80°C (176°F)        | 0-80°C (176°F)        |
| Max. hose length        | 60m (197ft)           | 75m (246ft)           | 90m (295ft)           |

## Polyurea Sprayer



HXP30



Fusion Type Gun



- Accurate temperature control and easy monitoring for result in good quality of spraying polyurea or Polyurethane material.
- Easy operating, easy cleaning, easy moving, high productivity polyurea or Polyurethane sprayer machine.
- User friendly machine's control board which indicate all the data of the heating temperature, pressure, and digital volume meter for easy monitoring of the A+B two components volume.



HXP20



Polyurea  
spray gun



HXP20B  
(Mixing ratio adjustable)

| Model No.               | DP-HXP20              | DP-HXP20B             | DP-HXP30               | DP-FA60                     |
|-------------------------|-----------------------|-----------------------|------------------------|-----------------------------|
| Drive                   | Hydraulic-driven      | Hydraulic-driven      | Hydraulic-driven       | Air-driven                  |
| Voltage                 | 3-ph 380V 50h         | 3-ph 380V 50h         | 3-ph 380V 50h          | 3-ph 380V 50hz or 220v 50hz |
| Mixing volumetric ratio | 1:1                   | 1:1 to 1:3            | 1:1                    | 1:1 or 1:2                  |
| Max. pressure           | 240bar / 3480psi      | 240bar / 3480psi      | 200bar / 2900psi       | 200bar / 2900psi            |
| Max. output volume      | 9kgs/min (20 lbs/min) | 9kgs/min (20 lbs/min) | 10kgs/min (23 lbs/min) | 9.5kgs/min (21lbs/min)      |
| Heater power(watt)      | 11000-15000w          | 11000-15000w          | 20400w                 | 16000w                      |
| Heating temperature     | 0-90°C (194°F)        | 0-90°C (194°F)        | 0-88°C (190°F)         | 0-90°C (194°F)              |
| Max. hose length        | 90m (295ft)           | 90m (295ft)           | 90m (295ft)            | 90m (295ft)                 |

## Putty I plaster I texture sprayer



DP-T3



DP-TX450

- 1 KW motor&retarder: to drives the twister for material transportation.
- 25L material hopper: for material storage
- Control box: the core of the machine, to drive the motor, and air pump.
- 2.2KW Twin-piston air compressor with aluminum housing: offer enough air pressure for the atomization in the spray outlet.
- Spinning form twister&Screw Pump: the material will be transport to the outlet by the screw pump after the quick and even mixing by twister.
- Cart with four wheels; with high load bearing, resist pressure, solid drag link, multi directional wheels, easy transportation.



DP-TX150  
DP-TX300



DP-830/860



| Model No.           | DP-TX150      | DP-TX300      |
|---------------------|---------------|---------------|
| Power type          | pneumatic     | pneumatic     |
| Delivering pressure | 4bar / 58psi  | 4bar / 58psi  |
| Delivering distance | 7.5m (25ft)   | 7.5m (25ft)   |
| Nozzle size         | 4, 6, 8, 10mm | 4, 6, 8, 10mm |
| Max. grain size     | 3mm           | 3mm           |
| Tank capacity       | 30L           | 60L           |
| Feature             | For texture   | For texture   |

| Model No.           | DP-TX450         | DP-T3           | DP-830            | DP-N1                 | DP-N2            | DP-N5             |
|---------------------|------------------|-----------------|-------------------|-----------------------|------------------|-------------------|
| Power (v/Hz)        | 220V             | 220V            | 220V 50Hz         | 220V / 50hz 60hz      | 3phase 380V      | 3phase 380V       |
| Motor power         | 2.4HP 1800W      | 2.4HP 1800W     | 2.4HP 1800W       | 1.3HP 1000W           | 5.3HP 4000W      | 5.3HP 4000W       |
| Output capacity     | 8.0L (2.11GPM)   | 12.0L (3.17GPM) | 12L/min (3.17GPM) | 10-15L/min (2.6-4GPM) | 20L/min (5.2GPM) | 85L/min (22.5GPM) |
| Delivering pressure | 20bar            | 20bar           | 40bar / 580psi    | 20bar / 290psi        | 30bar / 435psi   | 30bar / 435psi    |
| Delivering height   | 7.5M             | 7.0M            | 15m (49ft)        | 3-15m (10-49ft)       | 30m (98ft)       | 30m (98ft)        |
| Delivering distance | 30M              | 20M             | 30m (98ft)        | 1-50m (164ft)         | 50m (164ft)      | 50m (164ft)       |
| Nozzle size         | 4.6.8.10.        | 4.6.8.10.       | 6, 8, 10, 12mm    | 4, 6, 8mm             | 6, 8, 10, 12     | 10, 12, 14mm      |
| Max. grain size     | 3MM              | 3MM             | 3mm               | 2-3mm                 | 3mm              | 4mm               |
| Tank capacity       | 50L              | 40L             | 45L               | 25L                   | 50L              | 50L               |
| Feature             | Peristaltic pump | For Texture     | For texture/putty | for putty             | for cement       | Automatic mixing  |

## Cement mortar sprayer

- Control box: the core of the machine, to drive the motor, and air pump.
- 4 KW motor&retarder: to drives the twister for material transportation.
- 2.2KW Twin-piston air compressor with aluminum housing: offer enough air pressure, also the air for the atomization of spray gun.
- 50L material hopper: for material storage
- Spinning form twister&D6-3 Screw Pump: the material will be transport to the outlet by the screw pump after the quick and even mixing by twister.
- 33.5cm lead screw: fix the screw pump for easy working.
- Mortar pipe connector; very easy to connect with the machine.
- Cart with four wheels; with high load bearing, resist pressure, solid drag link, multidirectional wheels, easy transportation.
- Lamp: it will be available to work during the nights
- Quick snap: easy to fix the material hopper and the cart.



DP-N1

DP-N2  
Cement mortar sprayer  
(without mixing)DP-N5  
Cement mortar sprayer  
(auto-mixing)

- Control box: the core of the machine, to drive the motor, air&water pump.
- Safety cover& quick unpack gear&material hopper: the material can be unpack by the gear on the net cover, and be even poured into the tank.
- Quick snap: easy to fix the material hopper and the cart.
- 4 KW motor&retarder: to drives the twister for material transportation.
- Stirrer tank: quick and even mixing material.
- Water inlet: lead water into the machine from outside.
- Spinning form twister&Screw Pump: the material will be transport to the outlet by the screw pump after the quick and even mixing by twister. 8. Pressure controller+adjust the pressure of the mortar pipe to avoid the suddenness mortar pipe connector; very easy to connect with the machine.
- Water regulating valve; adjust the rate between water and material.
- 2.2KW Twin-piston air compressor with aluminum housing: offer enough air pressure for the atomization of the spray outlet.
- Mixing tube : for material processing.
- Star wheel Motor: drive the material from the hopper to mixing tube.
- Cart with four wheels; with high load bearing, resist pressure,solid drag link, multidirectional wheels, easy transportation.

## Cement mortar sprayer

DP-N7  
DP-N7D

**N7**  
cement mortar sprayer (electrical)  
**N7D**  
cement mortar sprayer (diesel engine drive)

DP-N6

**N6**  
cement mortar sprayer (electrical)  
**N6M**  
cement mortar sprayer with mixer  
**N6C**  
cement mortar sprayer with compressor  
**N6MC**  
cement mortar sprayer with mixer & compressor

DP-N3

**N3**  
cement mortar sprayer (electrical)  
**N3M**  
cement mortar sprayer with mixer  
**N3C**  
cement mortar sprayer with compressor  
**N3MC**  
cement mortar sprayer with mixer & compressor



| Model                  | N6C  | N6MC                             | N7D                           | N7                               | N3C                              | N3M                              |
|------------------------|--|----------------------------------|-------------------------------|----------------------------------|----------------------------------|----------------------------------|
| Power (v/Hz)           | 3phase 220 or 380v<br>50 or 60hz   | 3phase 220 or 380v<br>50 or 60hz | 8.5hp (186F)<br>Diesel engine | 3phase 220 or 380v<br>50 or 60hz | 3phase 220 or 380v<br>50 or 60hz | 3phase 220 or 380v<br>50 or 60hz |
| Motor power            | 6/7.3HP 4.5/5.5kw  | 6/7.3HP 4.5/5.5kw                | 8.5hp (186F)                  | 6/7.3HP 4.5/5.5kw                | 4.4/5.3hp 3.3/4 kw               | 4.4/5.3hp 3.3/4 kw               |
| Output capacity        | 40L/min (40.6GPM)  | 40L/min (40.6GPM)                | 60L/min (16GPM)               | 50L/min (13.2GPM)                | 30L/min (8GPM)                   | 30L/min (8GPM)                   |
| Max. pressure          | 40bar / 580psi   | 40bar / 580psi                   | 30bar / 435psi                | 30bar / 435psi                   | 30bar / 435psi                   | 30bar / 435psi                   |
| Max. Delivery height   | 40m (131ft)  | 40m (131ft)                      | 30m (98ft)                    | 30m (98ft)                       | 20m (66ft)                       | 20m (66ft)                       |
| Max. Delivery distance | 60m (197ft)  | 60m (197ft)                      | 60m (197ft)                   | 60m (197ft)                      | 40m (131ft)                      | 40m (131ft)                      |
| Max.Grain size         | 6mm  | 6mm                              | 8mm                           | 8mm                              | 5mm                              | 5mm                              |
| Nozzle size            | Standard 4 nozzles included. Available size 8 / 10 / 12 / 14 / 16 / 20mm |                                  |                               |                                  |                                  |                                  |
| Hopper capacity        | 100 L  | 100 L                            | 100L                          | 100L                             | 65L                              | 65L                              |
| Mixer capacity         | /  | 120 L                            | /                             | /                                | /                                | 100(120) L                       |
| Mixer power            | /  | 4HP 3kw                          | /                             | /                                | /                                | 4HP 3000w                        |
| Feature                | with compressor  | with compressor & mixer          | engine driven                 | electric drive                   | with compressor                  | with mixer                       |

## Electrostatic Powder/Liquid Coating Machine



**EP500**



**EP660**



**G3 GUN**

Excellent extraction rate, significantly reducing the amount of powder  
 One-touch buttons for quick get the best coating result for different complex shapes work pieces  
 New pulse plus the intelligent technologies generate static manner, maximizing the electrostatic effect  
 Advanced design make great contributes towards high powder covering ratio in spraying various of shapes of work pieces.  
 Distinctive design of three air ways in spraying gun guarantee to obtain good conditions of powder output and ideal layer quality  
 The control unit connection all using quick coupling way easy to use  
 Super quality with specially wheel.



**EP800D**



**EP900S**



**EF 100 For Liquid**



**G6 GUN**



**G1 GUN**

# Airless Accessories



| Model No.                  | DP-EP500                     | DP-EP610              | DP-EP800D             | DP-EP900S             | DP-EF100              |
|----------------------------|------------------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| Mains input voltage        | 220V/110V                    | 220V/110V             | 220V/110V             | 220V/110V             | 220V/110V             |
| Operating frequency        | 50Hz /60Hz                   | 50Hz /60Hz            | 50Hz /60Hz            | 50Hz /60Hz            | 50Hz /60Hz            |
| Input power                | 50W                          | 50W                   | 50W                   | 50W                   | 50W                   |
| Nominal output voltage     | 0-100KV ( adjustable)        | 0-100KV ( adjustable) | 0-100KV ( adjustable) | 0-100KV ( adjustable) | 15-60KV ( adjustable) |
| Nominal output current     | 180Ua(max)                   | 180UA(max)            | 180Ua(max)            | 180UA(max)            | 80UA(max)             |
| Protection type            | IP54                         | IP54                  | IP54                  | IP54                  |                       |
| Ambient temperature range  | 0°C - +40°C (+32°F - +104°F) |                       |                       |                       |                       |
| Max. operating temperature | 50°C                         |                       |                       |                       |                       |



**X450 Gun Repair Kits**  
Factory set needle  
5 minutes to exchange  
the repair kits



**DP-550/650**

High pressure  
airless spray gun

Designed for pneumatic airless paint sprayer (with filter inside.)  
Max.pressure:  
DP-550: 345bar / 5000psi  
DP-650: 500bar / 7250psi  
Inlet connector: 1/4"NPSM, 1/4"PT.  
Outlet thread: 7/8", 11/16".



**DP-6371**



**DP-660**



**DP-670**



**DP-450**

Airless spray gun (max.250bar)  
Built-in gun filter, swivel connector

Airless spray gun with tip & tip guard  
Max.270bar / 3920psi pressure  
Inlet connector: 1/4" NPSM, 1/4"PT, M16\*1.5Output connector: 11/16", 7/8" 4-finger trigger  
Anodized aluminium Forged gun body for light weight (0.58kgs) and highpressure .  
Built-in airless filter could be easily replaced. (standard filter included is 100mesh yellow color)

**DP-600 High pressure airless spray gun**  
forged aluminum + quench / hardening process 7mm super big fluid passing way without clog  
Specially designed for putty / plaster (max.350bar)

**DP-690 High pressure airless spray gun** 500bar(no filter inside)  
forged aluminum + quench 1 hardening process body for pneumatic driven airless pump (max.500bar)



**DP-600**

Color available: Gold, Blue, Red, Chrome coating etc.



**DP-690**

**DP-6375L Straight handle airless spray gunwith swivel outlet, with tip & tip guardWith 50cm extension pole**



Max.270bar / 3900psi pressure  
Inlet connector: 1/4"NPSM, 1/4"PT, M16\*1.5Output connector: 7/8"4-finger trigger  
Built-in airless filter (standard is 60mesh white color)  
Straight design reduce the hand fatigue for long time spraying, and easy spray to any angle.



**DP-6376 Silver Plus type airless spray gun (w/o filter inside)**  
Large fluid passing way for big painting project  
Painting go through the tip nozzle directly, without touch to the needle or spring. Reduce the parts worn or rusting.  
2-finger or 4-finger types are both available.Max.pressure: 345bar / 5000psiOutlet thread: 11/16" or 7/8".  
Inlet connector: 1/4" NPSM, 1/4"PT, M16\*1.5

## 500bar high pressure airless gun

**Air-Mixed Airless Spray Gun**  
**Air-Assisted Airless Spray Gun**



**G40**

Type of Feed: Pressure  
Standard Nozzle: 0.43mm(517)Optional  
Inozzle: 0.28mm-0.48mmOperating  
pressure: 1000-4000psiPatten width:  
250-310mmPaint distance: 30cm  
Paint inlet connection: 1/4-NPSM or 1/4PT



**DP-6377**  
**High pressure airless spray gun**

Designed for pneumatic airless paintsprayer (without filter inside.)Max.pressure: 500bar 17250psiInlet connector: 1/4"NPSM, 1/4"PT,M16\*1.5 Outlet thread: 7/8", 11/16",M16\*1.5

## AIRLESS SPRAY TIPS

### DP-637XT

X Design Reversible Airless Spray Tip, Tip Gasket & Tip Guard Combo Kit  
Stainless steel shank + Tungsten carbide orifice  
Nylon + stainless steel tip gasket, Durable and easily reversed for cleaning.  
Tip Shank Diameter: 11.1mm Max.5000 PSI (345BAR)



### DP-637LPT

SPRAYS AT LOWER PRESSURE  
EASY PREP AND CLEANUP  
LONGER LIFE TIME  
LESS OVERSPRAY



| Orifice Size | Fan Width - Inches |          |          |           |            |            |            |
|--------------|--------------------|----------|----------|-----------|------------|------------|------------|
|              | 2"-4"Fan           | 4"-6"Fan | 6"-8"Fan | 8"-10"Fan | 10"-12"Fan | 12"-14"Fan | 16"-18"Fan |
| inch         | 2"-4"Fan           | 4"-6"Fan | 6"-8"Fan | 8"-10"Fan | 10"-12"Fan | 12"-14"Fan | 16"-18"Fan |
| 0.008"       | 108                | 208      | 308      |           |            |            |            |
| 0.010"       | 110                | 210      | 310      | 410       | 510        |            |            |
| 0.012"       | 112                | 212      | 312      | 412       | 512        |            |            |
| 0.014"       | 114                | 214      | 314      | 414       | 514        |            |            |
| 0.016"       | 116                |          |          | 516       | 616        |            |            |
| 0.018"       |                    |          |          | 518       | 618        |            |            |
| 0.020        |                    |          |          | 520       | 620        |            |            |



637S

DP-637S Safety guard / tip holder

Size: 7/8", 11/16"  
Max. 5000 PSI (345 BAR)

## Safety Guard

Reversible Airless tips & tip gasket combo kit Stainless steel shank + Tungsten carbide orifice  
Nylon + stainless steel tip gasket, Durable and easily reversed for cleaning. Tip Shank Diameter: 11.1mm Max.5000 PSI (345 BAR)  
This tip could fit Titan, Wagner, ASM, Airlessco etc. Most kind of airless guns.  
Guaranteed perfect quality, fine atomization. Over 5000 m<sup>2</sup> lifetime. Tip size available: from 0.011" to 0.035" (2xx to 6xx) Best quality, best selling.



DP-637TT



DP-637T5



DP-637TX



DP-637TL

Reversible Airless tips & tip gasket combo kit Airless tip in RAC V type, used for old Graco guns. Stainless steel shank + Tungsten carbide orifice Nylon + stainless steel tip gasket, Durable and easily reversed for cleaning. Tip Shank Diameter: 11.1mm Max.5000 PSI (345 BAR)  
Tip size available: from 0.011" to 0.035" (2xx to 8xx)

Reversible Airless tips & tip gasket combo kit Airless tip in RAC X type, used for new Graco contractor guns. Stainless steel shank + Tungsten carbide orifice New material tip gasket, for easily reversed for cleaning. Tip Shank Diameter: 11.4mm Max.5000 PSI (345 BAR)  
Guaranteed perfect quality, fine atomization. Over 5000 m<sup>2</sup> lifetime. Tip size available: from 0.011" to 0.035" (2xx to 6xx)

LineLaser road marking tips 1708&1908 with width 14cm specially for road line marking  
Creates clean, laser-sharp lines with no fuzzy edges or thin spots  
Designed specifically for parking lots, roads, warehouse floors, crosswalks and athletic fields  
Ensures consistent paint thickness, from edge to edge, less overspray  
and long-lasting lines Sprays heavy water-base to thin alkyd traffic paints



DP-637TW



DP-637XHD  
(500bar)



Blister Package

### Chart for airless tips

| Orifice Size | Fan Width - Inches |           |           |            |             |             |             |             |           |             | Flow Rate   | Application | Filter |
|--------------|--------------------|-----------|-----------|------------|-------------|-------------|-------------|-------------|-----------|-------------|-------------|-------------|--------|
|              | 2"-4" Fan          | 4"-6" Fan | 6"-8" Fan | 8"-10" Fan | 10"-12" Fan | 12"-14" Fan | 16"-18" Fan | 24"-26" Fan | 4"-6" Fan | gpm / L/min |             |             |        |
| inch         | 2"-4" Fan          | 4"-6" Fan | 6"-8" Fan | 8"-10" Fan | 10"-12" Fan | 12"-14" Fan | 16"-18" Fan | 24"-26" Fan | 4"-6" Fan | 0.12 / 0.45 |             |             |        |
| 0.011"       | 111                | 211       | 311       | 411        |             |             |             |             |           | 0.18 / 0.68 |             |             |        |
| 0.013"       | 113                | 213       | 313       | 413        | 513         | 613         |             |             |           | 0.24 / 0.91 |             |             |        |
| 0.015"       | 115                | 215       | 315       | 415        | 515         | 615         |             |             |           | 0.31 / 1.17 |             |             |        |
| 0.017"       | 117                | 217       | 317       | 417        | 517         | 617         |             |             |           | 1708        | 0.38 / 1.44 |             |        |
| 0.019"       | 119                | 219       | 319       | 419        | 519         | 619         | 819         | 1219        | 1908      | 0.47 / 1.78 |             |             |        |
| 0.021"       | 121                | 221       | 321       | 421        | 521         | 621         | 821         | 1221        |           | 0.57 / 2.16 |             |             |        |
| 0.023"       | 223                | 323       | 423       | 523        | 623         | 823         | 1223        |             |           | 0.67 / 2.54 |             |             |        |
| 0.025"       | 225                | 325       | 425       | 525        | 625         | 825         | 1225        |             |           | 0.77 / 2.91 |             |             |        |
| 0.027"       | 227                | 327       | 427       | 527        | 627         | 827         | 1227        |             |           |             |             |             |        |
| 0.029"       | 229                | 329       | 429       | 529        | 629         | 829         | 1229        |             |           | 0.9 / 3.41  |             |             |        |
| 0.031"       | 231                | 331       | 431       | 531        | 631         | 831         | 1231        |             |           | 1.03 / 3.9  |             |             |        |
| 0.033"       | 233                | 333       | 433       | 533        | 633         | 833         | 1233        |             |           | 1.17 / 4.43 |             |             |        |
| 0.035"       | 235                | 335       | 435       | 535        | 635         | 835         | 1235        |             |           | 1.31 / 4.96 |             |             |        |
|              | 237                | 337       | 437       | 537        | 637         |             |             |             |           | 3.41        |             |             |        |
|              | 239                | 339       | 439       | 539        | 639         |             |             |             |           | 3.9         |             |             |        |
|              | 241                | 341       | 441       | 541        | 641         |             |             |             |           | 4.43        |             |             |        |
|              | 243                | 343       | 443       | 543        | 643         |             |             |             |           | 4.96        |             |             |        |
|              |                    |           | 445       | 545        | 645         |             |             |             |           | 3.41        |             |             |        |
|              |                    |           | 447       | 547        | 647         |             |             |             |           | 3.9         |             |             |        |
|              |                    |           | 449       | 549        | 649         |             |             |             |           | 4.43        |             |             |        |
|              |                    |           | 451       | 551        | 651         |             |             |             |           | 4.96        |             |             |        |
|              |                    |           | 453       | 553        | 653         |             |             |             |           | 4.43        |             |             |        |
|              |                    |           | 455       | 555        | 655         |             |             |             |           | 4.96        |             |             |        |

Example: For a tip with a .017" orifice and a 10" - 12" fan pattern, order DP637T-517 Reversible Tip. Fan width of a spray pattern is measured at 12" from the surface.

## AIRLESS FILTERS



DP-637FM Airless filter for pump manifold  
Size: 27mm diameter, 144mm height  
Filter with wing: Fit Graco / Airlessco / Astro etc.  
Filter without wing: Fit Larius, Titan, etc.  
DP-637FM30 30 mesh (637FM30W without wing)  
DP-637FM60 60 mesh (637FM60W without wing)  
DP-637FM100 100 mesh (637FM100W without wing)  
DP-637FM150 150 mesh (637FM150W without wing)

DP-637FT Airless filter for pump manifold  
Size: 27mm diameter, 72mm height  
Filter Fit Graco / Larius etc.  
DP-637FT30 30 mesh  
DP-637FT60 60 mesh  
DP-637FT100 100 mesh  
DP-637FT150 150 mesh  
DP-637FT200 200mesh

DP-637FB Airless manifold filter for Graco pumps  
Size: 20.6mm diameter, 91mm height  
DP-637FB60 black (60 mesh)  
DP-637FB100 blue (100 mesh)

DP-637FB2 Airless manifold filter for Graco pumps  
Size: 31.0mm diameter, 110mm&180mm height  
DP-637FB60 black (60 mesh)  
DP-637FB100 blue (100 mesh)

DP-637SF Suction filter  
Size: 3/4", 1", 1-1/4",  
One-layer or Two-layers are available.

## Airless Parts Accessories

Airless filters for spray gun  
Stainless steel + welded  
(A. Plug-in type, B. Thread screw-in type)

DP-637F150 red (150 mesh)  
(Suitable for tip size: 0.009", 0.011", 0.013")

DP-637F180 red (180 mesh)  
(Suitable for tip size: 0.009", 0.011", 0.013")

Airless filters for spray gun  
Stainless steel + welded  
(A. Plug-in type, B. Thread screw-in type)

DP-637F100 yellow (100 mesh)  
(Suitable for tip size: 0.013", 0.015", 0.017")

Airless filters for spray gun  
Stainless steel + welded  
(A. Plug-in type, B. Thread screw-in type)

DP-637F60 white (60 mesh)  
(Suitable for tip size: 0.019", 0.021", 0.023", 0.027")

DP-637F80 white (80 mesh)  
(Suitable for tip size: 0.019", 0.021", 0.023")

Airless filters for spray gun  
Stainless steel + welded  
(A. Plug-in type, B. Thread screw-in type)

DP-637F30 Green (30 mesh)  
(Suitable for tip size: 0.027", 0.029", 0.031", 0.033")

DP-637FG Airless filter for Graco guns  
Size: 7.3mm diameter, 111.5mm height  
DP-637FG60 black (60 mesh)  
DP-637FG100 blue (100 mesh)  
Fit Graco (Screw-in end)



DP-637F30 #  
Green (30 mesh)

DP-637F60 #  
white (60 mesh)

DP-637F80 #  
white (80 mesh)

DP-637F100 #  
yellow (100 mesh)

DP-637F150 #  
red (150 mesh)

DP-637F180 #  
red (180 mesh)





DP-637LT  
Extension pole for airless spray gun  
(Aluminium material)



DP-637LS15 15cm extension pole with swivel safety guard  
DP-637LS30 30cm extension pole with swivel safety guard  
DP-637LS50 50cm extension pole with swivel safety guard  
DP-637LS75 75cm extension pole with swivel safety guard  
DP-637LS100 100cm extension pole with swivel safety guard



DP-637LG15 15cm extension pole with safety guard  
DP-637LG30 30cm extension pole with safety guard  
DP-637LG50 50cm extension pole with safety guard  
DP-637LG75 75cm extension pole with safety guard  
DP-637LG100 100cm extension pole with safety guard

With extra long tube (150cm) for high rolling jobs  
Ideal for refinishing your house.  
Recommend to connect with DP6375 straight-hand airless spray gun



DP-637H01  
1/4"\*15M



DP-637H03  
3/8"\*15M

2-layers WIRE braided (Standard SAE100 R7)

| Model  | Size  | Diameter (in*out) | Working pressure | Bursting pressure |
|--------|-------|-------------------|------------------|-------------------|
|        | inch  | mm                | Bar psi          | Bar Psi           |
| 637H01 | 1/4"  | 6.3X13.3          | 400 5800         | 1450 21000        |
| 637H02 | 5/16" | 7.9X14.9          | 380 5500         | 1300 18850        |
| 637H03 | 3/8"  | 9.5X16.7          | 350 5070         | 1160 17400        |
| 637H04 | 1/2 " | 12.7X19.8         | 310 4490         | 1050 15900        |

2-layers FIBRE braided (Standard SAE100 R7)

| Model  | Size  | Diameter (in*out) | Working pressure | Bursting pressure |
|--------|-------|-------------------|------------------|-------------------|
|        | inch  | mm                | Bar psi          | Bar Psi           |
| 637H05 | 1/4"  | 6.3X12.7          | 340 4930         | 1360 19270        |
| 637H06 | 5/16" | 7.9X115.0         | 310 4495         | 1240 17980        |
| 637H07 | 3/8"  | 9.5X18            | 250 3625         | 1000 14500        |
| 637H08 | 1/2 " | 12.7X21.6         | 220 3190         | 880 12760         |

## DP-637H High pressure airless painting hose (with spring protected at both ends)

Material: nylon inner tube, Polyurthane covered. Color: Blue, Red, Yellow, Black  
The hose is conductive (static free)UL approved.



### DP-637SG Swivel Hose Connector

Size: 1/4"\*1/4", 3/8"\*3/8", 1/4"\*3/8"  
etc.Thread in BSP, PT, NPSM, and Metric size .Available in female or male end.



### DP-637SP Swivel free connector for extension pole

Size: 7/8", or 11/16"Max.pressure: 250bar



### DP-637CS Swivel free connector for airless gun or machine

Size: 1/4"\*1/4", 3/8"\*3/8", 1/4"\*3/8"  
etc.Thread in BSP, PT, NPSM, and Metric size



### DP-637C Hose Connector

Size: 1/4"\*1/4", 3/8"\*3/8", 1/4"\*3/8"  
etc.Thread in BSP, PT, NPSM, and Metric size  
Material: steel

## Aluminium Stilts



DP-ST4864

Name: 48" -64" aluminium stilts  
Adjustable height: 48" -64"  
Load limit: 225LBS  
Package: carton box  
N.W: 10.5KGS  
G.W: 11.5KGS  
Dimension:  
32\*23\*128CM



DP-ST1523

Name: 15" -23" aluminium stilts  
Adjustable height: 15" -23"  
Load limit: 225LBS  
Package: carton box  
N.W: 5.7KGS  
G.W: 6.3KGS  
Dimension:  
31\*21\*58CM



DP-ST2440

Name: 24" -40" aluminium stilts  
Adjustable height: 24" -40"  
Load limit: 225LBS  
Package: carton box  
N.W: 7.0KGS  
G.W: 8.0KGS  
Dimension:  
31\*21\*76CM



DP-637SPT Spray Guide Painting Tool

Quickly cut-in around windows, doors and roof lines with the ability to cover 30 feet in just 15 seconds  
Eliminates time consuming masking or cutting in with a brush  
Attaches to an extension pole decreasing ladder work  
Unique freewheeling disc glides smoothly over



Plaster box PB-10

\* Smooth roller design for easy mounting on the wall surface  
\* The pressure of the top head is adjustable for apply different surface shape or corner  
\* The degree of the plaster box and bar is adjustable  
\* The degree between work surface and bar is adjustable & locked.  
\* Telescope design to meet different length



Wall Smoothen Board WSB-20

\*Width: 40 / 45 / 50 / 60cm  
\*Length adjustable from 1.3 to 2.4 / 3.6 / 5 / 6m

## Aireless Parts

