

# Modeling the hydro-mechanical reinforcement of vegetation to the stability of a shallow slope based on the dynamic root growth

Yang Yang<sup>1</sup>

Received: date / Accepted: date

**Abstract Keywords** Herb

## 1 Introduction

## 2 Methodology

### 2.1 The mechanical reinforcement model

### 2.2 Soil hydrological dynamic model

The SWAP (Soil, Water, Atmosphere, and Plant) model has been applied widely to simulate soil water dynamics in the vegetated slope (Romano et al, 2011). In this study, we employed the Richards' equation to simulate the soils-vegetation-atmosphere interactions under unsaturated conditions; The modified Richards' equation can be written as follows:

$$\frac{\partial \theta}{\partial t} = \frac{\partial}{\partial z} \left( k \frac{\partial h}{\partial z} \right) + S(z) \quad (1)$$

where  $k$  is the unsaturated soil permeability at a given suction;  $h$  is the hydraulic head;  $x$ , and  $z$  are the coordinates in the horizontal and vertical directions, respectively;  $\theta$  is the volumetric water content;  $t$  is the time;  $S$  is the source/sink term.

The soil water characteristic curve (SWCC) and hydraulic conductivity functions (HFC) are written according to the Van-Genuchten Genuchten (1980)

$$\Theta = \frac{\theta - \theta_r}{\theta_s - \theta_r} = \left[ \frac{1}{1 + |\alpha h|^n} \right]^m \quad (2)$$

---

\* Yang Yang  
E-mail: smiba@qq.com

<sup>1</sup> College of Water Conservancy and Hydropower Engineering, Hohai University, Nanjing 210098, China

where  $\Theta$  is the soil saturation;  $\theta$  is the soil water content;  $\theta_s$  is the saturated water content;  $\theta_r$  is the residual water content;  $n$  and  $m$  are the shape parameters, if  $n > 1$ , then  $m = 1 - \frac{1}{n}$ ;  $\alpha$  is a scale parameter.

$$K(h) = K_s \Theta^{0.5} [1 - (1 - \Theta^{1/m})^m]^2 \quad (3)$$

where  $K(h)$  is the hydraulic conductivity at a given suction head  $h$ ;  $K_s$  is the saturated hydraulic conductivity.

The vegetation transpiration is modelled using the water extraction from the roots,  $S(h)$  is defined as:

$$S(h) = \gamma(h)(T_{pot}/L_r)L_{nrd}(z_r) \quad (4)$$

In this study, the function parameter  $\gamma(h)$  is simplified as follows:

$$\gamma(h) = \begin{cases} 0, & h \geq h_1 \text{ or } h < h_4 \\ \frac{h-h_1}{h_2-h_1}, & h_2 \leq h < h_1 \\ 1, & h_3 \leq h < h_2 \\ \frac{h-h_4}{h_3-h_4}, & h_4 \leq h < h_3 \end{cases} \quad (5)$$

### 2.3 Transpiration

$$ET_c = T_{pot} + E_{pot} = (K_{cb} + K_e)ET_0 \quad (6)$$

where:

### 2.4 Dynamic root growth model

#### 2.4.1 Root penetration

Root growth calculation is based on cumulative day-degrees, which is common for root models and has been shown in field trials to be applicable to both monocot and dicot crops Pedersen et al (2009).

$$DD = \begin{cases} 0; & T_{min} \geq T_{air} \\ T_{air} - T_{min} & T_{min}; \leq T_{air} < T_{max} \\ T_{max} - T_{min} & T_{air}; \geq T_{max} \end{cases} \quad (7)$$

The root penetration depth ( $R_z$ ) is calculated as follows:

$$R_z = \begin{cases} R_{z,min}; & \sum DD \leq DD_{lag} \\ \sum((DD - DD_{lag})k_{rz} + R_{z,min}); & \sum DD > DD_{lag} \\ R_{z,min}; & \sum(DD - DD_{lag})k_{rz} + R_{z,min} > R_{z,max} \end{cases} \quad (8)$$

where  $DD$  is the Day-degrees;  $DD_{lag}$  is the lag phase for initiating root growth;  $R_{z,max}$  is the maximum rooting depth;  $R_{z,min}$  is the rooting depth at sowing or planting;  $T_{min}$  is minimum temperature for root growth;  $T_{max}$  is the maximum temperature for root growth.

### 2.4.2 Root length density

Wu et al (1999) shown that the root density of each crop can using a single normalized function to describe for the whole growth. A third-order polynomial equation was utilized to fit the pooled data of each plant as follows:

$$L_{nrd}(z_r) = R_0 + R_1 z_r + R_2 z_r^2 + R_3 z_r^3 \quad (9)$$

where  $R_i (i = 0, 1, 2, 3)$  are the polynomial coefficients.

### 2.4.3 Root additional cohesion

A dense root density can more significantly increasing the root additional cohesion (Osman and Barakbah, 2006; Zhang et al, 2015).

$$c_r = A_0 L_{nrd} + A_1 \quad (10)$$

where  $c_r$  is the root additional cohesion,  $A_i (i = 0, 1)$  are the polynomial coefficients.

## 2.5 Infinite slope model

For many rainfall-induced landslides, the failure surfaces are often shallow and parallel to the slope surface. The infinite slope model serves as an excellent illustration for slope stability analysis (Lu and Godt, 2013; Cho and Lee, 2002). Lu and Godt (2008) present a generalized framework for the stability of infinite slopes under steady unsaturated seepage conditions. This framework allows the water table to be located at any depth below the ground surface and variation of soil suction and moisture content above the water table under steady infiltration conditions. The schematic diagram of infinite slope is shown in Fig. 2.5. The factor of safety ( $F_s$ ) of a slope is evaluated as follows:

$$F = \frac{c_s + (\gamma z \cos^2 \beta - \sigma^s) \tan \phi'}{\gamma z \sin \beta \cos \beta} \quad (11)$$

where  $c_s$  is the soil effective cohesion;  $\gamma$  is the soil specific weight of soil;  $z$  is the depth of soil;  $\beta$  is the slope angle;  $\sigma^s$  is the suction stress characteristic curve;  $\phi'$  is the effective soil friction angle.


The suction stress can be expressed in terms of normalized volumetric water content or degree of saturation as (Lu and Godt, 2008):

$$\sigma^s = -\frac{\theta - \theta_r}{\theta_s - \theta_r} (u_a - u_w) \quad (12)$$

where  $\theta$  is the volumetric water content,  $\theta_r$  is the residual volumetric water content;  $\theta_s$  is the saturated volumetric water content;  $u_a$  is the pore air pressure;  $u_s$  is the pore water pressure.

For vegetated slope, the mechanical reinforcement provided by roots is quantified by means of a root cohesion term  $c_r$  (Pollen, 2007; Arnone et al, 2016), so that the total cohesion of root-soil  $c_{tot} = c_r + c_s$  and the factor of safety becomes

$$F = \frac{c_r + c_s + (\gamma z \cos^2 \beta - \sigma^s) \tan \phi'}{\gamma z \sin \beta \cos \beta} \quad (13)$$

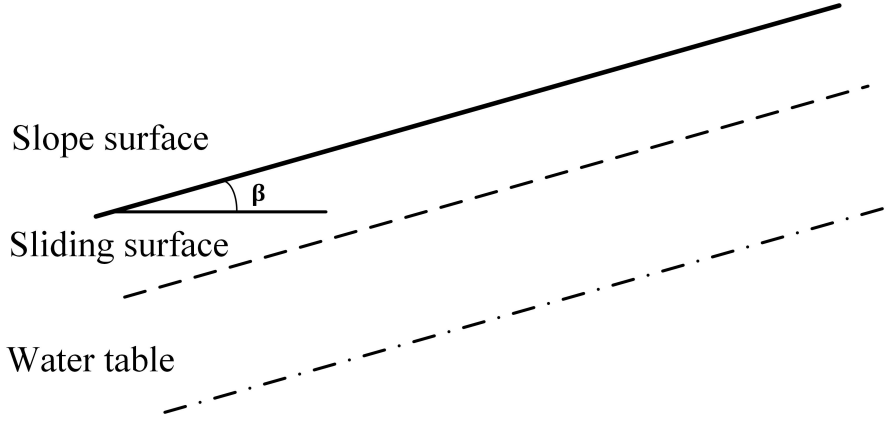

**Fig. 1** Schematic diagram of infinite slope

which, after rearranging and applying trigonometric identities, becomes:

$$F_s = \underbrace{\frac{\tan\phi'}{\tan\beta}}_1 + \underbrace{\frac{2c_s}{\gamma z \sin 2\beta}}_2 + \underbrace{\frac{2c_r}{\gamma z \sin 2\beta}}_3 - \underbrace{\frac{\sigma^s (\tan\beta + \cot\beta) \tan\phi}{\gamma z}}_4 \quad (14)$$

In the Eq.(14), terms 1 and 2 are, respectively, the slope stability contribution due to the internal frictional  $\phi'$  and the soil cohesion  $c_s$ . Terms 3 and 4 are, respectively, the slope stability contribution due to the root cohesion  $c_r$  and the suction stress.

### 3 Numerical experiment

#### 3.1 Numerical models and boundary conditions

#### 3.2 Model parameters

### 4 Results

#### 4.1 Effects of root system on the slope stability

#### 4.2 Effects of slope geometry on the slope stability

### 5 Discussions

### 6 Conclusions

### 7 Acknowledgment

### References

- Arnone E, Caracciolo D, Noto LV, Preti F, Bras RL (2016) Modeling the hydrological and mechanical effect of roots on shallow landslides. *Water Resources Research* 52(11)

- Cho SE, Lee SR (2002) Evaluation of surficial stability for homogeneous slopes considering rainfall characteristics. *Journal of Geotechnical and Geoenvironmental Engineering* 128(9):756–763
- Genuchten MTV (1980) A closed-form equation for predicting the hydraulic conductivity of unsaturated soils. *Soil Science Society of America Journal* 44(44):892–898
- Lu N, Godt J (2008) Infinite slope stability under steady unsaturated seepage conditions. *Water Resources Research* 44(11):2276–2283
- Lu N, Godt JW (2013) *Hillslope hydrology and stability*. Cambridge University Press
- Osman N, Barakbah S (2006) Parameters to predict slope stabilitysoil water and root profiles. *Ecological Engineering* 28(1):90–95
- Pedersen A, Zhang K, Thorup-Kristensen K, Jensen LS (2009) Modelling diverse root density dynamics and deep nitrogen uptakea simple approach. *Plant & Soil* 326(1-2):493–510
- Pollen N (2007) Temporal and spatial variability in root reinforcement of stream-banks: accounting for soil shear strength and moisture. *Catena* 69(3):197–205
- Romano N, Palladino M, Chirico GB (2011) Parameterization of a bucket model for soil-vegetation-atmosphere modeling under seasonal climatic regimes. *Hydrology and Earth System Sciences* 15(3):3877–3893
- Wu J, Zhang R, Gui S (1999) Modeling soil water movement with water uptake by roots. *Plant & Soil* 215(1):7–17
- Zhang HR, Fa-Hu LI, Zhang XP (2015) Effects of wild herbaceous vegetation roots on undisturbed surface soil shear strength. *Journal of China Agricultural University* 20(4):189–195