SubController: analogue audio, digital control

All audio remains continuous analogue. Main speakers remain full range. P68 amplifier is separate.

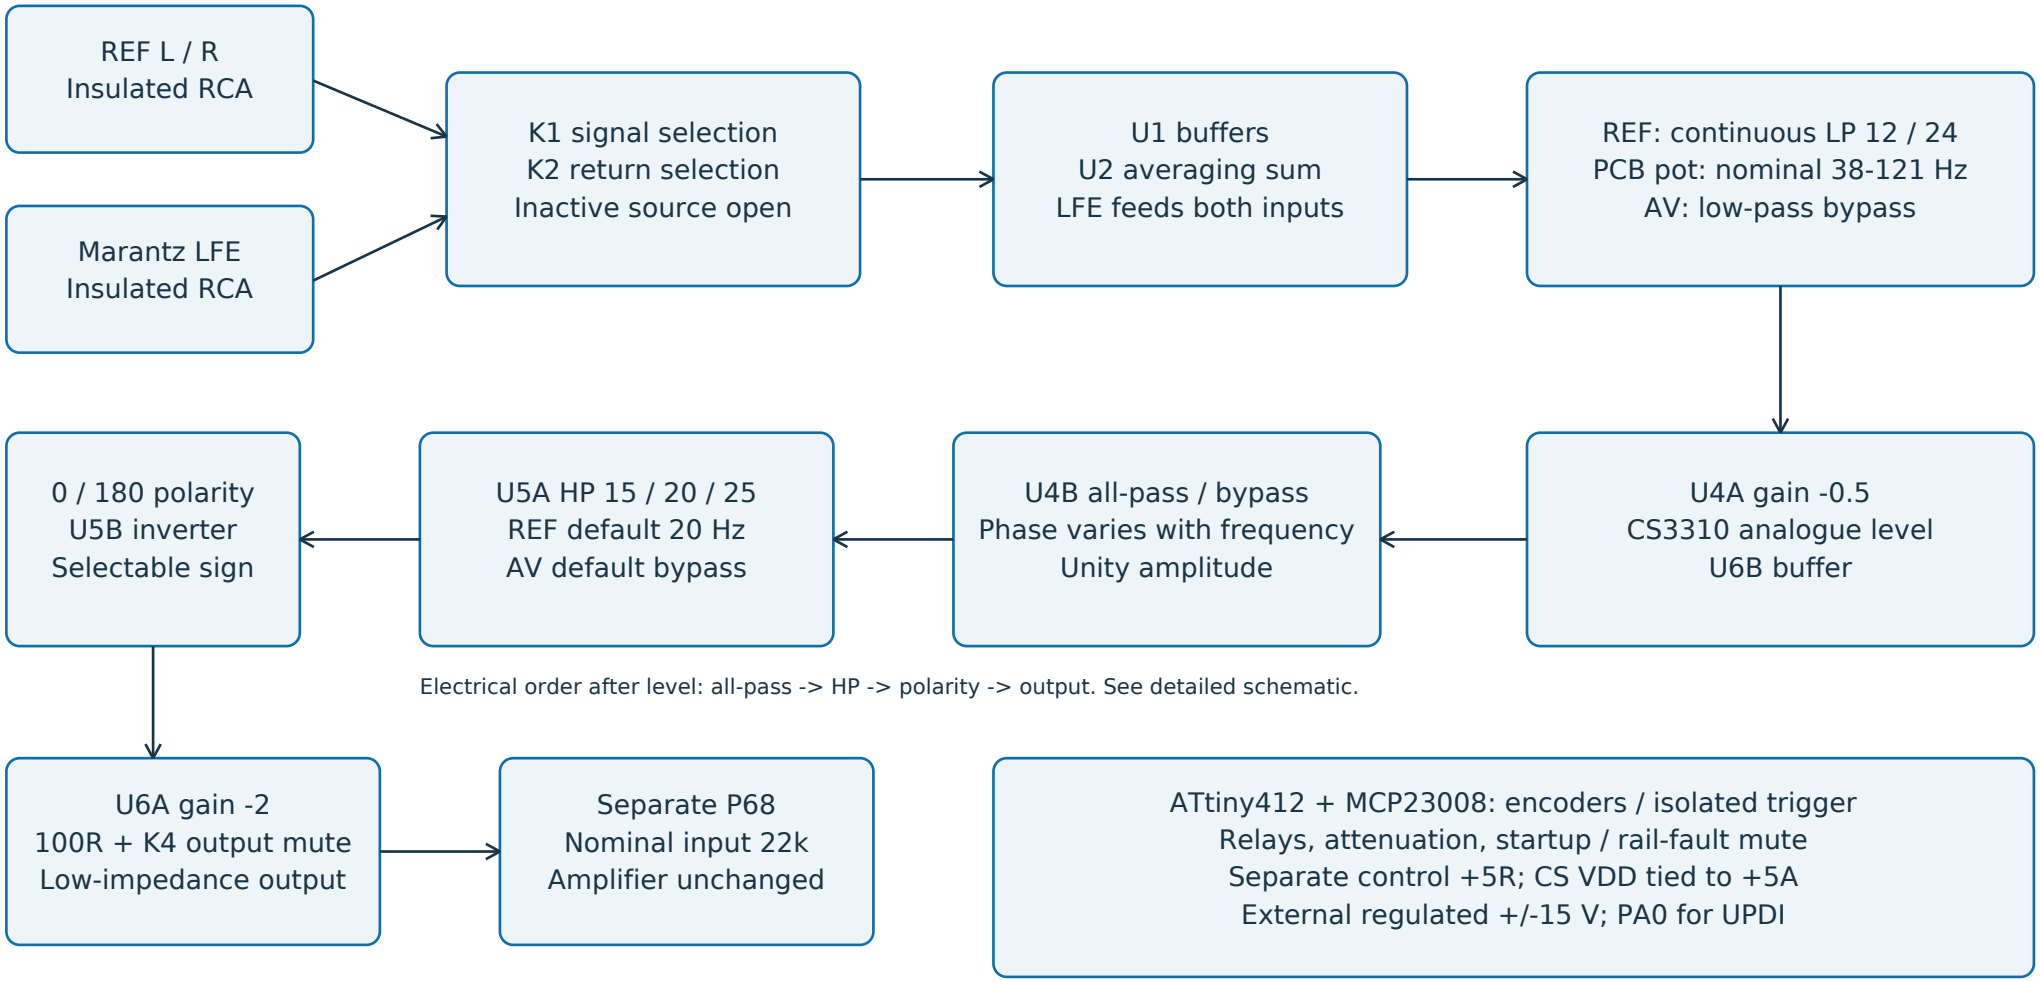

Electrical order after level: all-pass -> HP -> polarity -> output. See detailed schematic.

GND: one board net. Selected RCA return connects to it; inactive source has no board-ground path.

Protective earth bonds directly to chassis outside this SELV PCB. RCA shells must remain insulated.