
70 Hz calibration: slope and protection


LP pole 70.000 Hz with matched gangs; HP pole 20.100 Hz. Curves normalised to nominal passband gain.

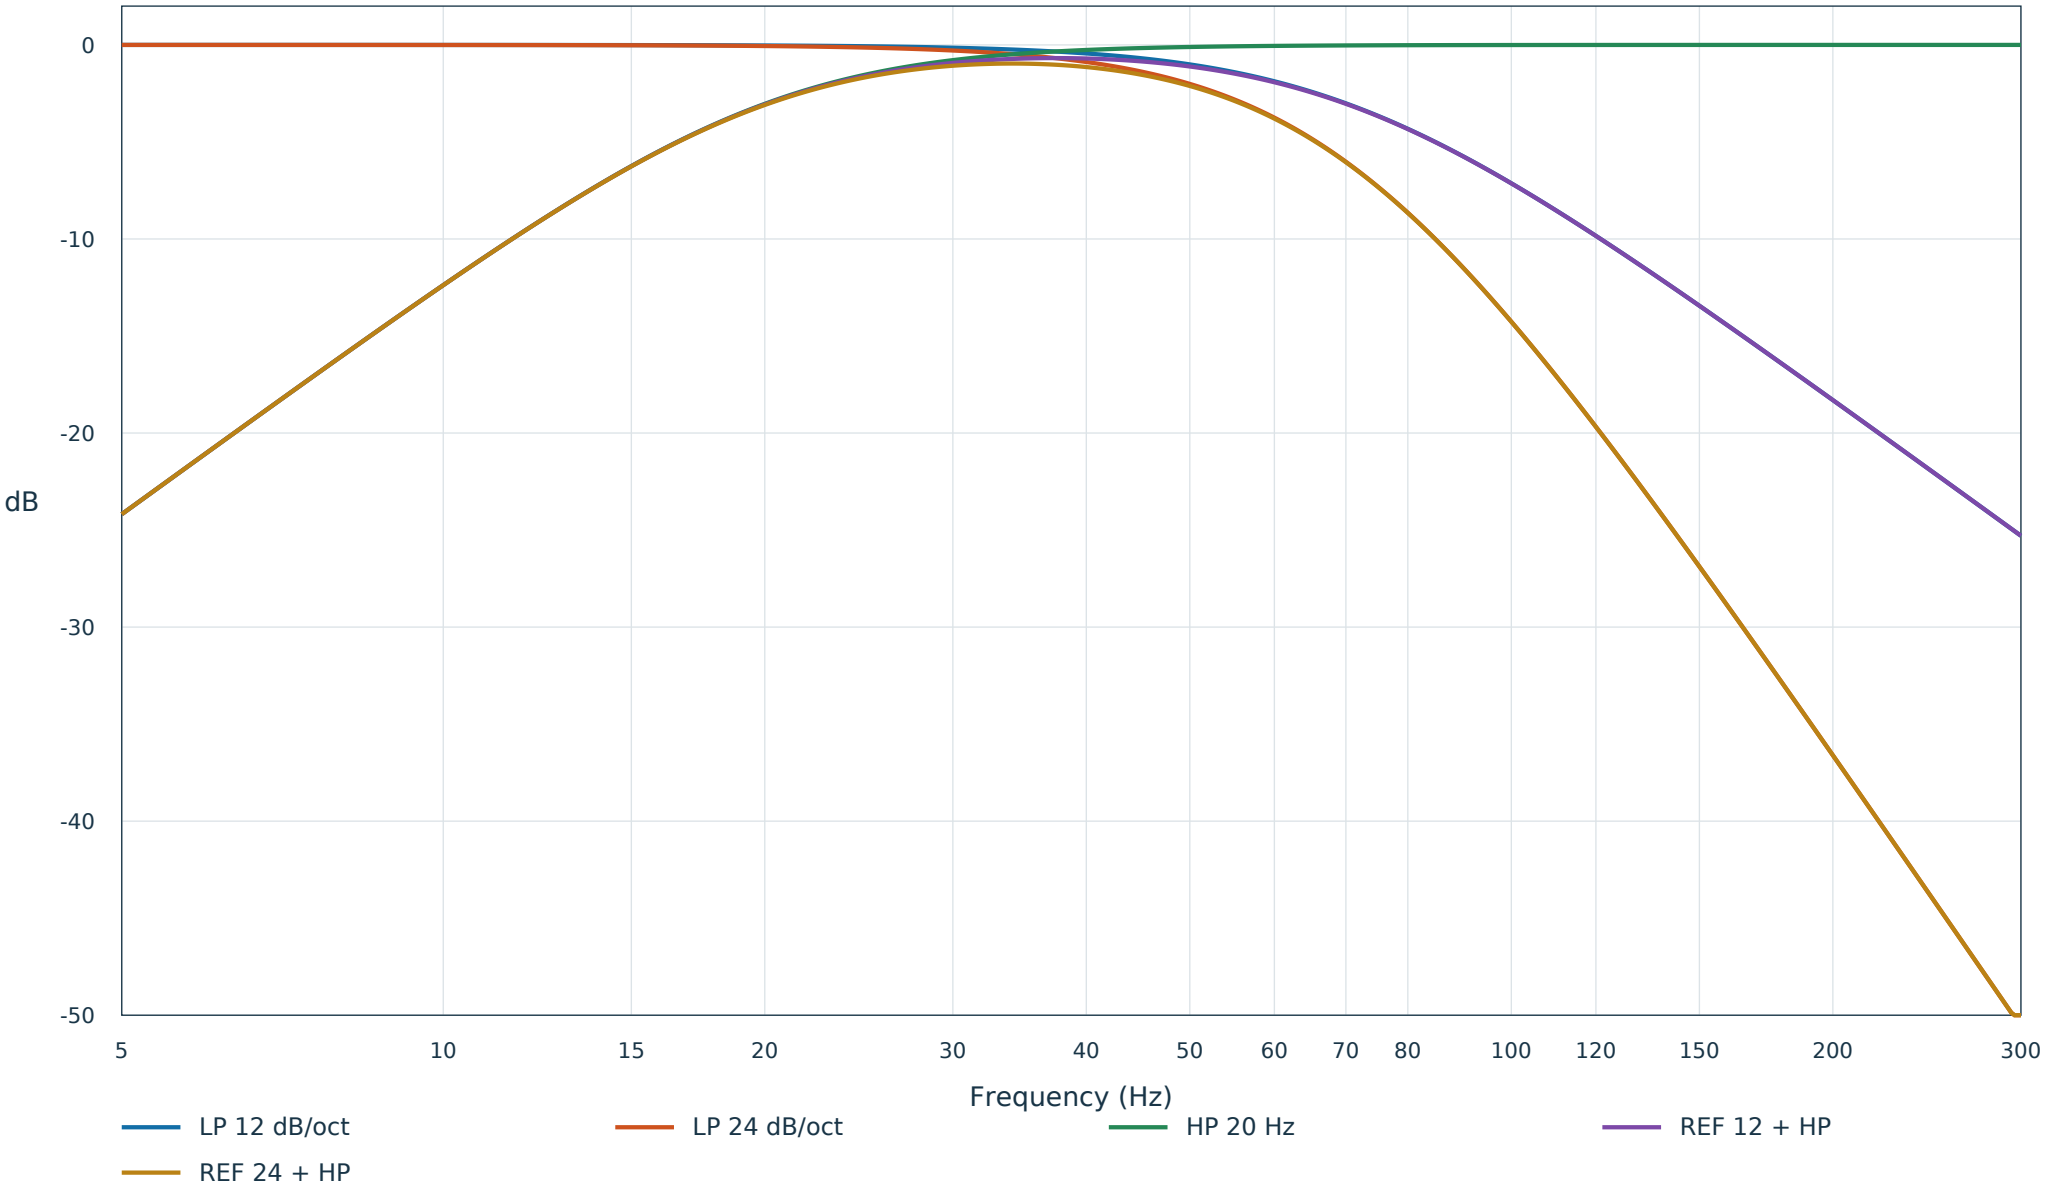

Ideal electrical responses; exclude driver, enclosure, GR10 response, room and propagation delay.

Continuous crossover: illustrative calibrations


Matched PTD904 gangs; nominal end stops 38.4-120.9 Hz. These curves are examples, not switch positions.

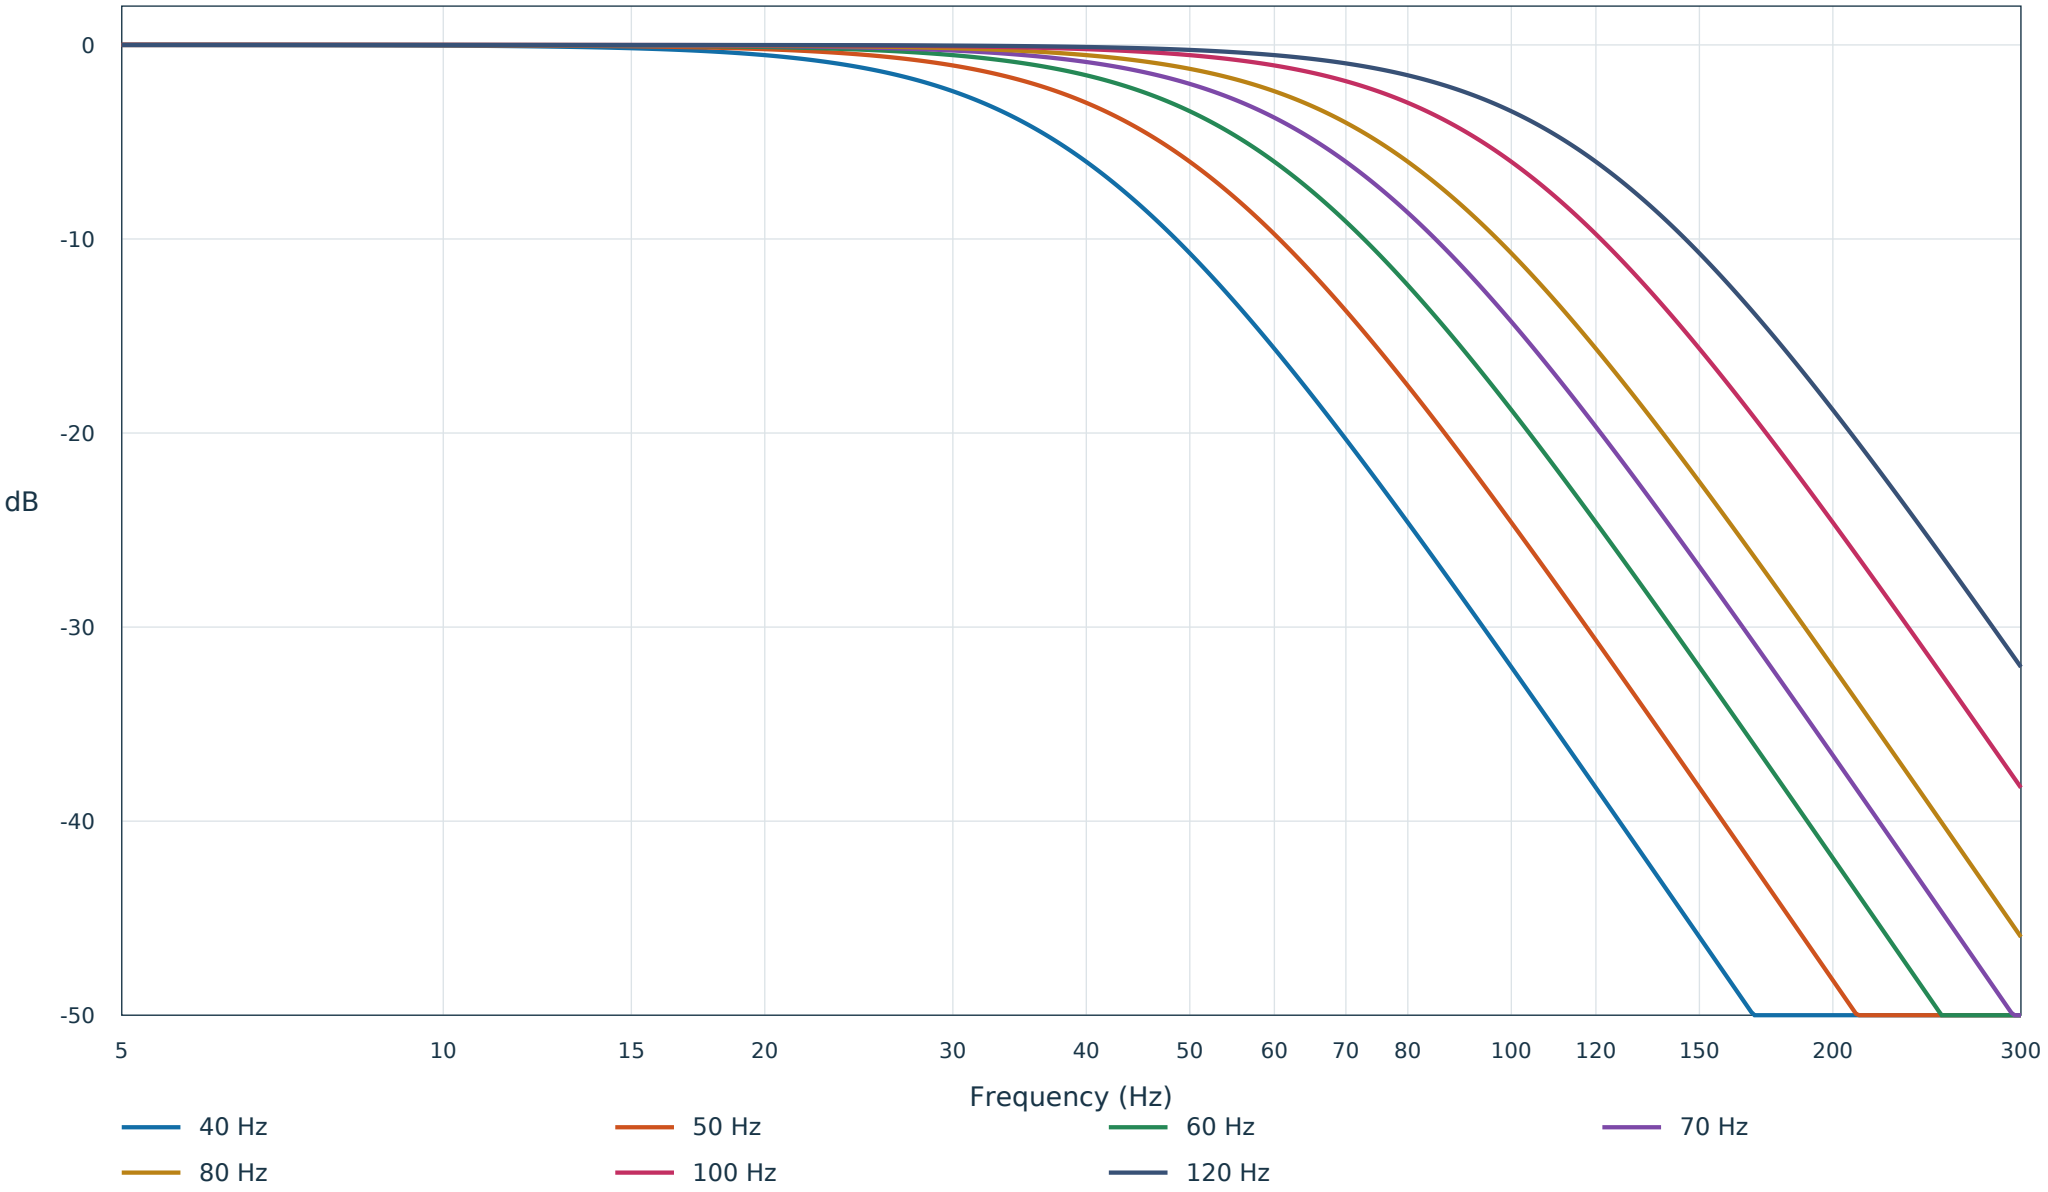

Ideal electrical responses; exclude driver, enclosure, GR10 response, room and propagation delay.

Optional all-pass phase

Unity amplitude; phase varies with frequency. Bypass gives 0 degrees; polarity switch adds 180 degrees.

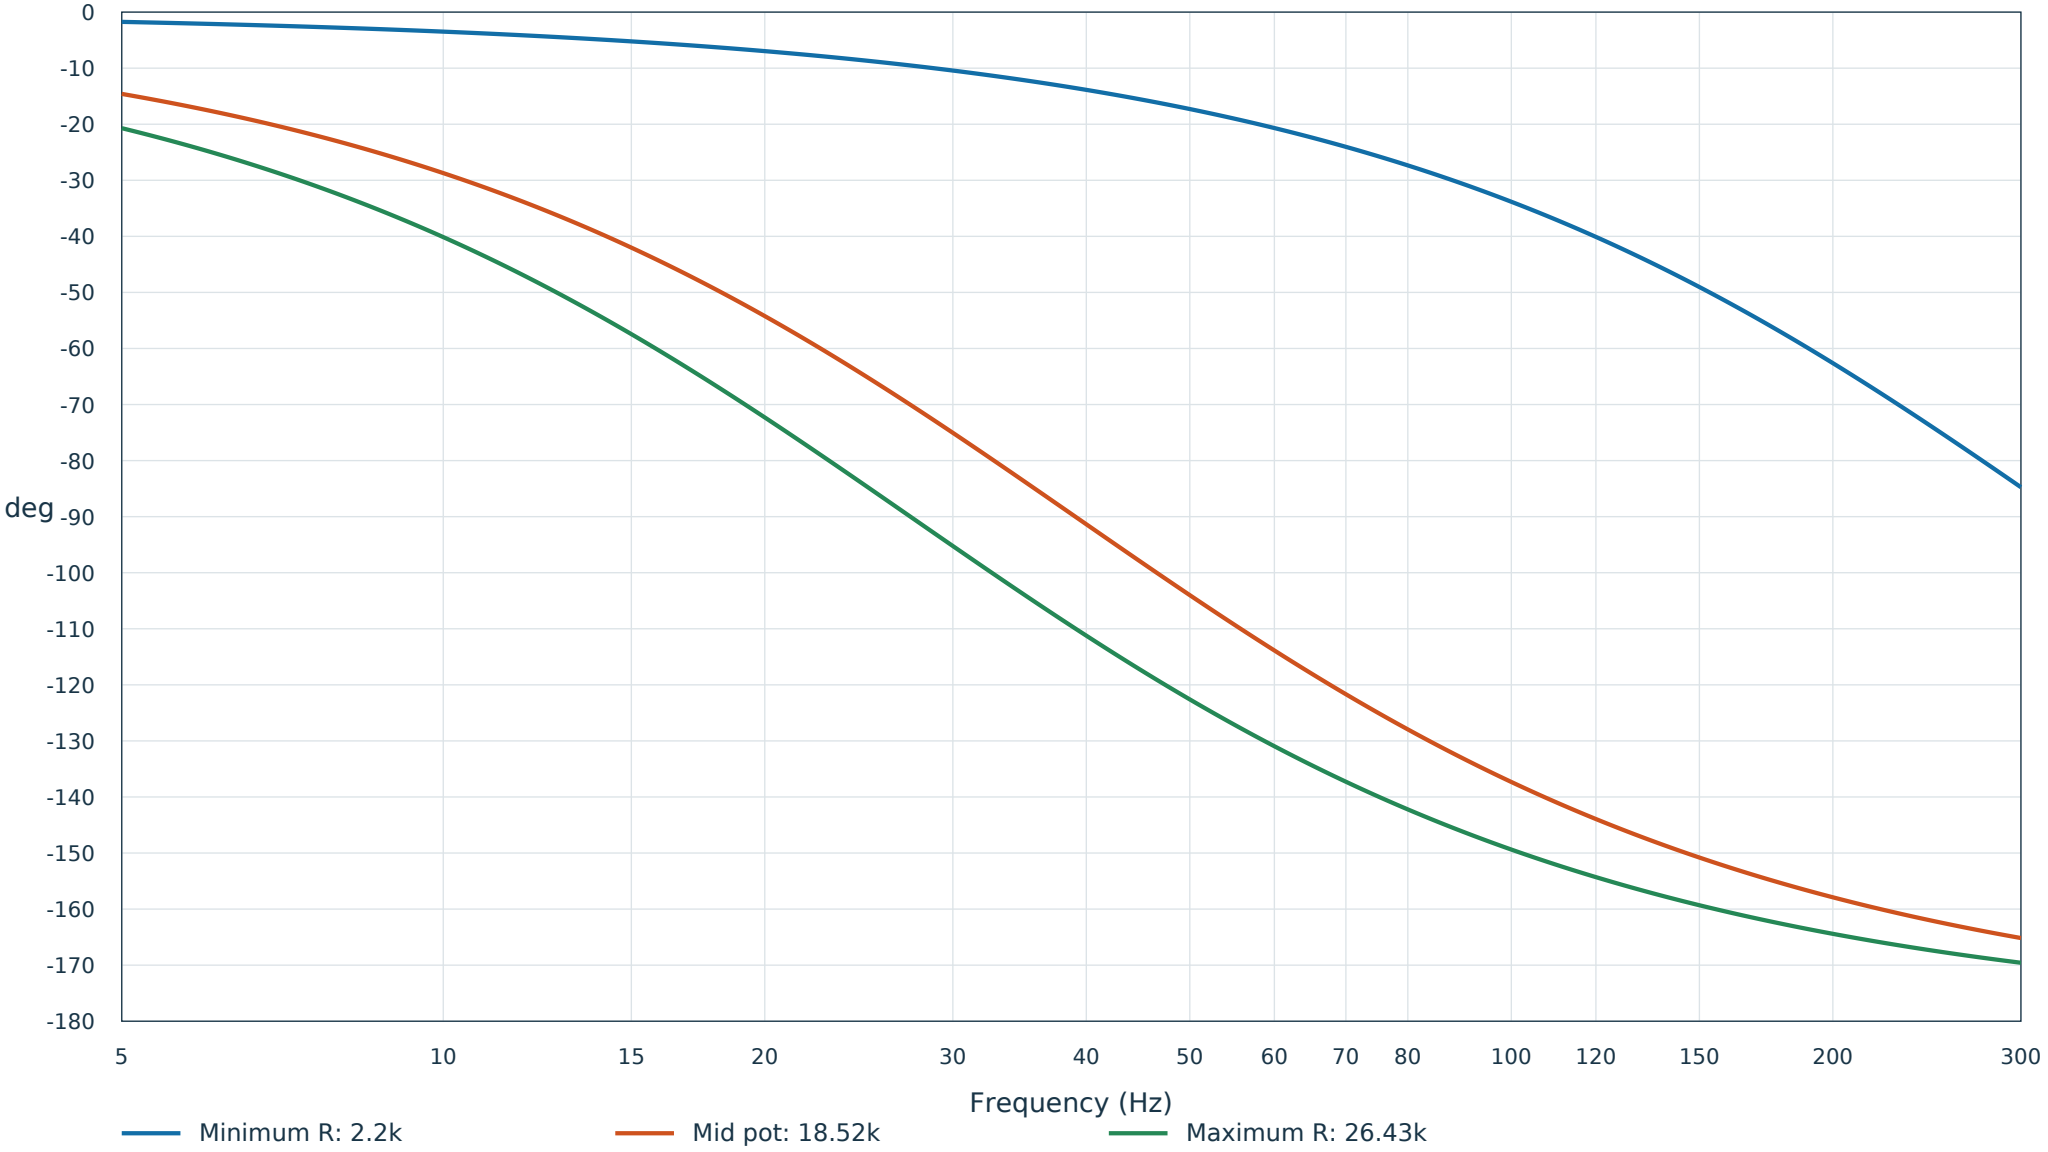

Ideal electrical responses; exclude driver, enclosure, GR10 response, room and propagation delay.