

64 / 99 35 PUEB
 62 7.2 45
 62.5 7.2
 70 - 100
 (61) - 56 - 5m
 LINDA 8mm

FUNKI BUEB

- WASSER RECHAS
- EXT POWDER RECHAS
- 12C PORT OUT
- PIREC
- 10-CLIGHT
- SERIAL PORT OUT
- LHSER DOT

PA-01

- A4988 - STEPPER
- REAN BESSON.

PA-02

- SS-CO DITROLER
- TASTEN
- SENVO

✓	✓	✓				✓	✓	✓		
Rel	Rel	Rel								
1	2	3	4	5	6	7	8	9	10	
Ext Power	Wasser	Wireless Power	IR	PEEP	Pixel	Taster	Read Contact			

Vin	GND	D13	D12	D14	D27	D26	D25	D33	D32	D35	D34	VN	VP	EN
		OK	OK	OK	OK	OK	OK	OK	OK	INP	INP	INP	INP	
		T4	T5	T6	T7	DAC2	DAC1	T8	T9	NoPull	NoPull	NoPull	NoPull	
		ADC2_4	ADC2_5	ADC2_6	ADC2_7	ADC2_9	ADC2_8	ADC1_5	ADC1_4	ADC1_7	ADC1_6	ADC1_3	ADC1_0	
		RTC	RTC	RTC	RTC	RTC	RTC	RTC	RTC	RTC	RTC	RTC	RTC	
		RTC	RTC	RTC										
		ADC2_3	ADC2_2	ADC2_0										
		T3	T2	T0	RX2	TX2	SS	SCK	MISO	SDA	D3	D1	SCL	MOSI
		OK	"OK"	OK	OK	OK	"OK"	OK	OK	OK	-	-	OK	OK
3V3	GND	D15	D2	D4	D16	D17	D5	D18	D19	D21	RxD	TxD	D22	D23
		RxD2	TxD2	RxD3	TxD3	SDA2	SCL2	Laser	SDA	SCL			Direction	Step
		1	2	3	4	5	6	7	!	!				

- D2 connected to on-board LED, must be left floating or LOW to enter flashing mode
- D5 outputs PWM signal at boot, strapping pin
- D3 RxD, HIGH at boot
- D1 TxD, debug output at boot

RECALLS HIGH - LOW
 SDA - SCL WIRELESS SDA 19 / SCL 21 - 0x36
 STEPPER SDA 21 / SCL 19 - 0x20

ALL LOW → 0,2

GPIO	PA-01 plus	PA-01/02	
0			
1			
2			
3			
4			
5			
6			
7			
8			
9			
10			
11			
12	Ext. Power		
13	Wasser		
14	Pixel		
15	IR		
16	RxD2		
17	TxD2		
18			
19			
21	SDA		
22	SCL		
23			
25	Laser		
26	Direction		
27	Step		
32	Taster		
33	read contact		
34			
35			
36			
39			

POWER
WASSER (12V)
IR (5V)

LASER (5V)

1' PIXEL
2' WASSER
3' NEXT POWER
4' V1R
5' SDA 2
6' SCL 2
7' TASTER
8' WEAN CONTACT
9' DIRECTION
10' STEP

INTERNAL

EXTERNAL

1' RxD 2
2' TxD 2
3' RxD 3
4' TxD 3
5' SDA
6' SCL
7' LASER
8' 5V
9' GND

232 x 454

STICKER

MS - SW

15V - RT

PIXEL - WS

FASTFOLD

10108

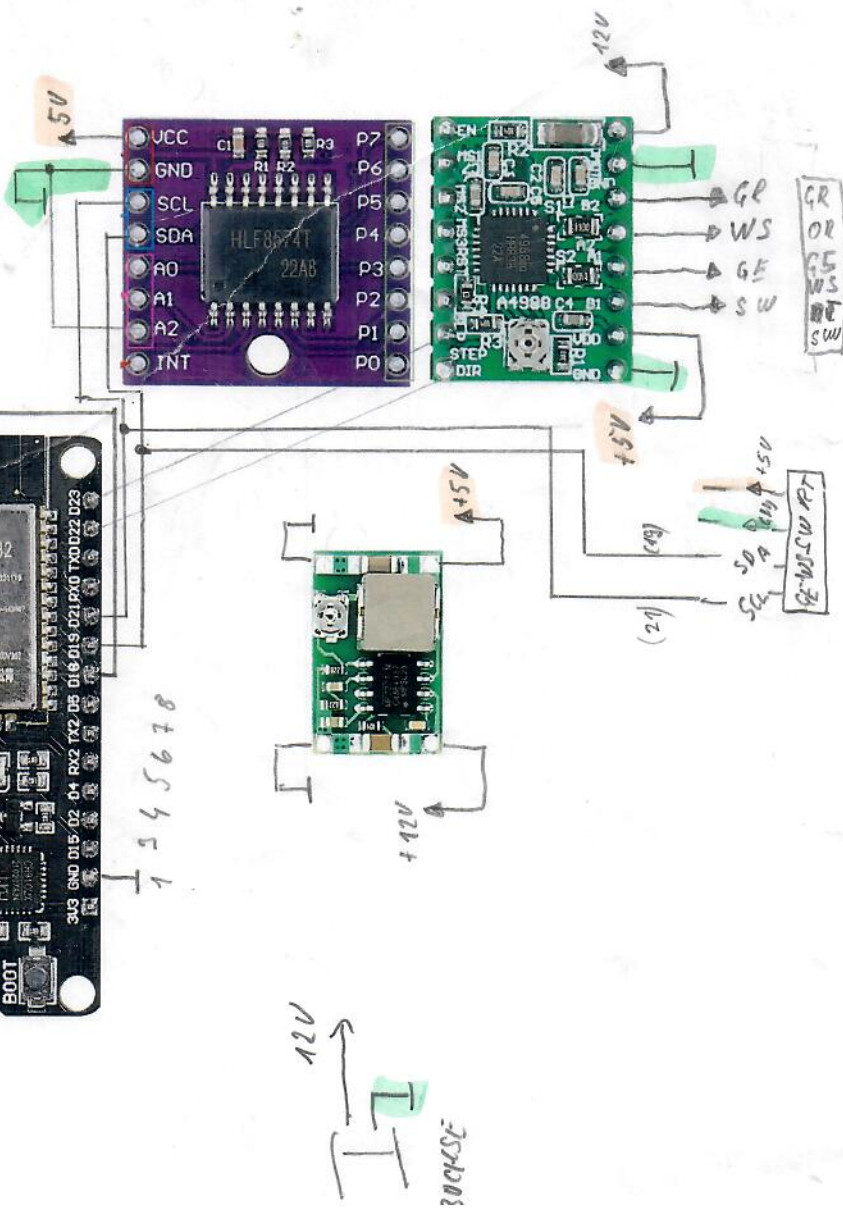
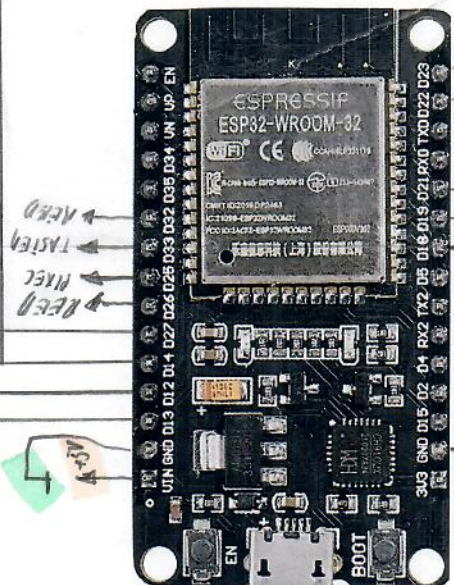
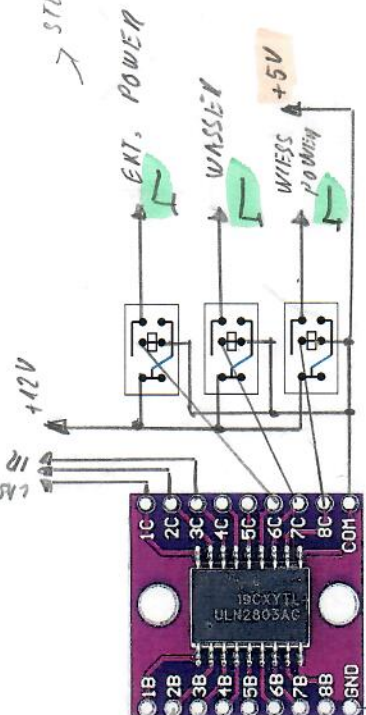
127 GP ~~GP~~

+5V

4 x 1000

4. NO 10 R

POWER

[illegible]

Label	GPIO	Input	Output	Notes
D0	GPIO16	no interrupt	no PWM or I2C support	HIGH at boot used to wake up from deep sleep
D1	GPIO5	OK	OK <i>10 1</i>	often used as SCL (I2C)
D2	GPIO4	OK	OK <i>10 2</i>	often used as SDA (I2C)
D3	GPIO0	pulled up	OK	connected to FLASH button, boot fails pulled LOW
D4	GPIO2	pulled up	OK	HIGH at boot connected to on-board LED, boot fails pulled LOW
D5	GPIO14	OK	OK <i>10 3</i>	SPI (SCLK)
D6	GPIO12	OK	OK <i>10 4</i>	SPI (MISO)
D7	GPIO13	OK	OK <i>LED 100Ω</i>	SPI (MOSI)
D8	GPIO15	pulled to GND	OK	SPI (CS) Boot fails if pulled HIGH
RX	GPIO3	OK	RX pin	HIGH at boot
TX	GPIO1	TX pin	OK	HIGH at boot debug output at boot, boot fails if pulled LOW
A0	ADC0	Analog Input	X	

DIODE + CAP

$$500A \quad 7,6mA = 1,92V$$

$$\frac{3,3V}{7,6mA} =$$

$$3,3V - 1,92V = \frac{1,38}{7,6mA} = 189\Omega$$

$$3,3V - 1,98V \rightarrow \frac{1,32}{15mA} = 88\Omega \rightarrow 100\Omega$$