

1. MENSURATION FORMULAS :

r : radius ; d = diameter ;
 V = Volume S.A = surface area
 (a) Circle

Perimeter : $2\pi r = \pi d$, Area : $\pi r^2 = \frac{1}{4}\pi d^2$

(b) Sphere

Surface area = $4\pi r^2 = \pi d^2$, Volume = $\frac{4}{3}\pi r^3 = \frac{1}{6}\pi d^3$

(c) Spherical Shell (Hollow sphere)

Surface area = $4\pi r^2 = \pi d^2$

Volume of material used = $(4\pi r^2)(dr)$, dr = thickness

(d) Cylinder

Lateral area = $2\pi rh$

$V = \pi r^2 h$

Total area = $2\pi rh + 2\pi r^2 = 2\pi r(h + r)$

(e) Cone

Lateral area = $\pi r \sqrt{r^2 + h^2}$ h = height

Total area = $\pi r (\sqrt{r^2 + h^2} + r)$ $V = \frac{1}{3}\pi r^2 h$

(f) Ellipse

Circumference $\approx 2\pi \sqrt{\frac{a^2 + b^2}{2}}$

area = πab

a = semi major axis

b = semi minor axis

(g) Parallelogram

$A = bh = ab \sin \theta$

a = side ; h = height ; b = base

θ = angle between sides a and b

(h) Trapezoid

area = $\frac{h}{2}(a+b)$

(i) Triangle

area = $\frac{bh}{2} = \frac{ab}{2} \sin \gamma = \sqrt{s(s-a)(s-b)(s-c)}$

a, b, c sides are opposite to angles α, β, γ






b = base ; h = height

$s = \frac{1}{2}(a+b+c)$

(j) Rectangular container

Lateral area = $2(\ell b + bh + h\ell)$

$V = \ell bh$

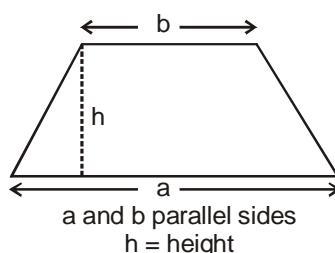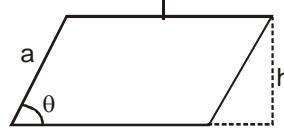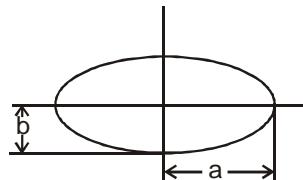

Mathematics is the language of physics. It becomes easier to describe, understand and apply the physical principles, if one has a good knowledge of mathematics.

2. LOGARITHMS:

- (i) $e \approx 2.7183$
- (ii) If $e^x = y$, then $x = \log_e y = \ln y$
- (iii) If $10^x = y$, then $x = \log_{10} y$
- (iv) $\log_{10} y = 0.4343 \log_e y = 2.303 \log_{10} y$
- (v) $\log(ab) = \log(a) + \log(b)$
- (vi) $\log\left(\frac{a}{b}\right) = \log(a) - \log(b)$
- (vii) $\log a^n = n \log(a)$

3. TRIGONOMETRIC PROPERTIES:

- (i) Measurement of angle & relationship between degrees & radian


In navigation and astronomy, angles are measured in degrees, but in calculus it is best to use units called radians because they simplify later calculations.

Let ACB be a central angle in circle of radius r , as in figure.

Then the angle ACB or θ is defined in radius as -

$$\theta = \frac{\text{Arc length}}{\text{Radius}} \Rightarrow \theta = \frac{\widehat{AB}}{r}$$

If $r = 1$ then $\theta = AB$



The radian measure for a circle of unit radius of angle ABC is defined to be the length of the circular arc AB . Since the circumference of the circle is 2π and one complete revolution of a circle is 360° , the relation between radians and degrees is given by the following equation.

$$\pi \text{ radians} = 180^\circ$$

ANGLE CONVERSION FORMULAS

$$1 \text{ degree} = \frac{\pi}{180^\circ} \quad (\approx 0.02) \text{ radian} \quad \text{Degrees to radians : multiply by } \frac{\pi}{180^\circ}$$

$$1 \text{ radian} \approx 57 \text{ degrees} \quad \text{Radians to degrees : multiply by } \frac{180^\circ}{\pi}$$

Ex.1 Convert 45° to radians : $45 \cdot \frac{\pi}{180} = \frac{\pi}{4}$ rad

Convert $\frac{\pi}{6}$ rad to degrees : $\frac{\pi}{6} \cdot \frac{180}{\pi} = 30^\circ$

Ex.2 Convert 30° to radians :

Sol. $30^\circ \times \frac{\pi}{180^\circ} = \frac{\pi}{6}$ rad

Ex.3 Convert $\frac{\pi}{3}$ rad to degrees.

Sol. $\frac{\pi}{3} \times \frac{180}{\pi} = 60$

Standard values

(1) $30^\circ = \frac{\pi}{6}$ rad

(2) $45^\circ = \frac{\pi}{4}$ rad

(3) $60^\circ = \frac{\pi}{3}$ rad

(4) $90^\circ = \frac{\pi}{2}$ rad

(5) $120^\circ = \frac{2\pi}{3}$ rad

(6) $135^\circ = \frac{3\pi}{4}$ rad


$$(7) 150^\circ = \frac{5\pi}{6} \text{ rad}$$

$$(8) 180^\circ = \pi \text{ rad}$$


$$(9) 360^\circ = 2\pi \text{ rad}$$

(Check these values yourself to see that they satisfy the conversion formulae)


(ii) Measurement of positive & Negative Angles :

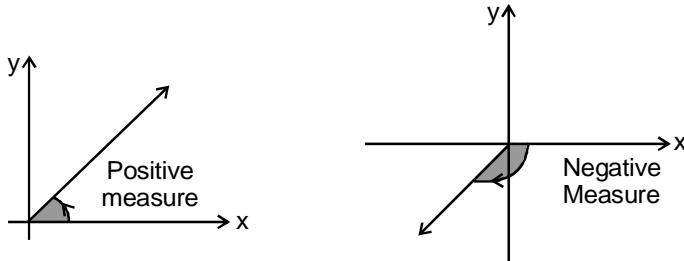

An angle in the xy-plane is said to be in standard position if its vertex lies at the origin and its initial ray lies along the positive x-axis (Fig.). Angles measured counterclockwise from the positive x-axis are assigned positive measures; angles measured clockwise are assigned negative measures.

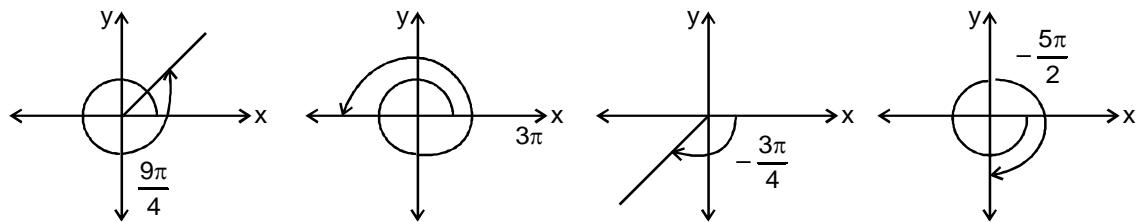

(iii) Six Basic Trigonometric Functions :

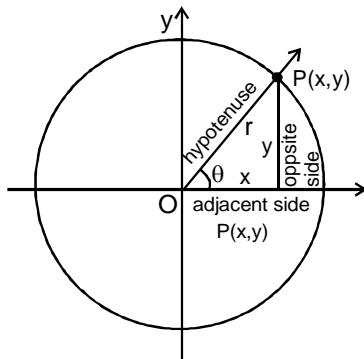

The trigonometric functions of a general angle θ are defined in terms of x , y and r .

$$\text{Sine : } \sin \theta = \frac{\text{opp}}{\text{hyp}} = \frac{y}{r} \quad \text{Cosecant : } \csc \theta = \frac{\text{hyp}}{\text{opp}} = \frac{r}{y}$$

$$\text{Cosine: } \cos \theta = \frac{\text{adj}}{\text{hyp}} = \frac{x}{r} \quad \text{Secant : } \sec \theta = \frac{\text{hyp}}{\text{adj}} = \frac{r}{x}$$

$$\text{Tangent: } \tan \theta = \frac{\text{opp}}{\text{adj}} = \frac{y}{x} \quad \text{Cotangent: } \cot \theta = \frac{\text{adj}}{\text{opp}} = \frac{x}{y}$$


VALUES OF TRIGONOMETRIC FUNCTIONS

If the circle in (Fig. above) has radius $r = 1$, the equations defining $\sin \theta$ and $\cos \theta$ become
 $\cos \theta = x, \quad \sin \theta = y$

We can then calculate the values of the cosine and sine directly from the coordinates of P.


Ex.4 Find the six trigonometric ratios from given fig. (see above)

$$\begin{aligned} \text{Sol. } \sin\theta &= \frac{\text{opp}}{\text{hyp}} = \frac{4}{5} & \cos\theta &= \frac{\text{adj}}{\text{hyp}} = \frac{3}{5} \\ \tan\theta &= \frac{\text{opp}}{\text{adj}} = \frac{4}{3} & \cot\theta &= \frac{\text{adj}}{\text{opp}} = \frac{3}{4} \\ \sec\theta &= \frac{\text{hyp}}{\text{opp}} = \frac{5}{3} & \cosec\theta &= \frac{\text{hyp}}{\text{opp}} = \frac{5}{4} \end{aligned}$$

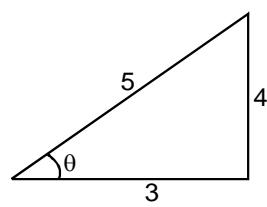

Ex.5 Find the sine and cosine of angle θ shown in the unit circle if coordinate of point P are as shown.

Sol.

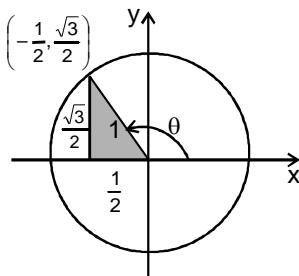


$$\cos\theta = \text{x-coordinate of } P = -\frac{1}{2} \quad \sin\theta = \text{y-coordinate of } P = \frac{\sqrt{3}}{2}$$

4. Values of $\sin\theta$, $\cos\theta$ and $\tan\theta$ for some standard angles.

Degree	0	30	37	45	53	60	90	120	135	180
Radians	0	$\pi/6$	$37\pi/180$	$\pi/4$	$53\pi/180$	$\pi/3$	$\pi/2$	$2\pi/3$	$3\pi/4$	π
$\sin\theta$	0	$1/2$	$3/5$	$1/\sqrt{2}$	$4/5$	$\sqrt{3}/2$	1	$\sqrt{3}/2$	$1/\sqrt{2}$	0
$\cos\theta$	1	$\sqrt{3}/2$	$4/5$	$1/\sqrt{2}$	$3/5$	$1/2$	0	$-1/2$	$-1/\sqrt{2}$	-1
$\tan\theta$	0	$1/\sqrt{3}$	$3/4$	1	$4/3$	$\sqrt{3}$	∞	$-\sqrt{3}$	-1	0

A useful rule for remembering when the basic trigonometric functions are positive and negative is the CAST rule. If you are not very enthusiastic about CAST. You can remember it as ASTC (After school to college)

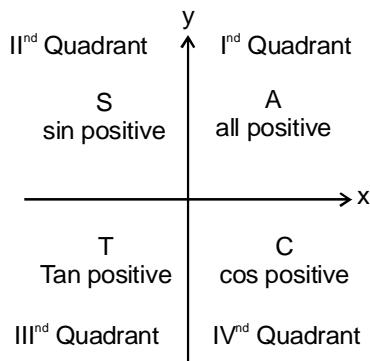

The CAST rule

RULES FOR FINDING TRIGONOMETRIC RATIO OF ANGLES GREATER THAN 90° .

Step 1 → Identify the quadrant in which angle lies.

Step 2 → (a) If angle = $(n\pi \pm \theta)$ where n is an integer. Then

(b) If angle = $\left[(2n+1)\frac{\pi}{2} + \theta\right]$ where n is an integer. Then

trigonometric function of $\left[(2n+1)\frac{\pi}{2} \pm \theta\right]$ = complimentary trigonometric function of θ

and sign will be decided by CAST Rule.

Ex.6 Evaluate $\sin 120^\circ$

$$\text{Sol. } \sin 120^\circ = \sin (90^\circ + 30^\circ) = \cos 30^\circ = \frac{\sqrt{3}}{2}$$

$$\text{Aliter } \sin 120^\circ = \sin (180^\circ - 60^\circ) = \sin 60^\circ = \frac{\sqrt{3}}{2}$$

Ex.7 Evaluate $\cos 210^\circ$

$$\text{Sol. } \cos 210^\circ = \cos (180^\circ + 30^\circ) = -\cos 30^\circ = -\frac{\sqrt{3}}{2}$$

$$\text{Ex.8 } \tan 210^\circ = \tan (180^\circ + 30^\circ) = \tan 30^\circ = +\frac{1}{\sqrt{3}}$$

5. IMPORTANT FORMULAS

$$(i) \sin^2\theta + \cos^2\theta = 1$$

$$(iii) 1 + \cot^2\theta = \operatorname{cosec}^2\theta$$

$$(v) \cos 2\theta = 2\cos^2\theta - 1 = 1 - 2\sin^2\theta = \cos^2\theta - \sin^2\theta$$

$$(vi) \sin(A \pm B) = \sin A \cos B \pm \cos A \sin B$$

$$(viii) \sin C + \sin D = 2\sin\left(\frac{C+D}{2}\right)\cos\left(\frac{C-D}{2}\right)$$

$$(x) \cos C + \cos D = 2\cos\frac{C+D}{2}\cos\frac{C-D}{2}$$

$$(xii) \tan 2\theta = \frac{2\tan\theta}{1-\tan^2\theta}$$

$$(xiv) \sin(90^\circ + \theta) = \cos \theta$$

$$(xvi) \tan(90^\circ + \theta) = -\cot \theta$$

$$(xviii) \cos(90^\circ - \theta) = \sin \theta$$

$$(xx) \sin(180^\circ - \theta) = \sin \theta$$

$$(xxii) \tan(180^\circ + \theta) = \tan \theta$$

$$(xxiv) \cos(-\theta) = \cos \theta$$

$$(ii) 1 + \tan^2\theta = \sec^2\theta$$

$$(iv) \sin 2\theta = 2 \sin \theta \cos \theta$$

$$(vii) \cos(A \pm B) = \cos A \cos B \mp \sin A \sin B$$

$$(ix) \sin C - \sin D = 2\sin\left(\frac{C-D}{2}\right)\cos\left(\frac{C+D}{2}\right)$$

$$(xi) \cos C - \cos D = 2\sin\frac{D-C}{2}\sin\frac{C+D}{2}$$

$$(xiii) \tan(A \pm B) = \frac{\tan A \pm \tan B}{1 \mp \tan A \tan B}$$

$$(xv) \cos(90^\circ + \theta) = -\sin \theta$$

$$(xvii) \sin(90^\circ - \theta) = \cos \theta$$

$$(xix) \cos(180^\circ - \theta) = -\cos \theta$$


$$(xxi) \cos(180^\circ + \theta) = -\cos \theta$$

$$(xxiii) \sin(-\theta) = -\sin \theta$$

$$(xxv) \tan(-\theta) = -\tan \theta$$

- Sine Rule $\frac{\sin A}{a} = \frac{\sin B}{b} = \frac{\sin C}{c}$

- Cosine rule $a^2 = b^2 + c^2 - 2bc \cos A$

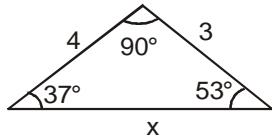


Ex.9

Find x :

$$\text{Sol. } \frac{\sin 90^\circ}{x} = \frac{\sin 53^\circ}{4}$$

$$x = 5$$



6. SMALL ANGLE APPROXIMATION


It is a useful simplification which is only approximately true for finite angles. It involves linearization of the trigonometric functions so that, when the angle θ is measured in radians.

$$\sin \theta \approx \theta$$

$$\cos \theta \approx 1 \text{ or } \cos \theta \approx 1 - \frac{\theta^2}{2} \text{ for the second - order approximation}$$

$$\tan \theta \approx \theta$$

Geometric justification

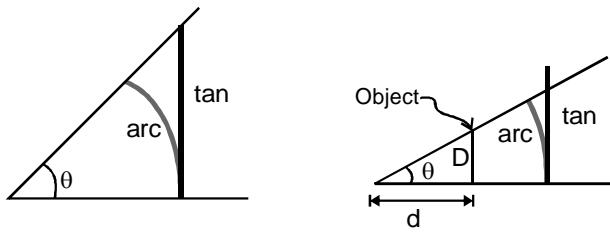

Small angle approximation. The value of the small angle θ in radians is approximately equal to its tangent.

- When one angle of a right triangle is small, its hypotenuse is approximately equal in length to the leg adjacent to the small angle, so the cosine is approximately 1.
 - The short leg is approximately equal to the arc from the long leg to the hypotenuse, so the sine and tangent are both approximated by the value of the angle in radians.
7. BI NOMIAL THEOREM :

$$(1 \pm x)^n = 1 \pm nx + \frac{n(n-1)x^2}{2!} \dots\dots\dots$$

$$(1 \pm x)^{-n} = 1 \mp nx + \frac{n(n+1)}{2!}x^2 \dots\dots\dots$$

If $x \ll 1$; then

$$(1 \pm x)^n = 1 \pm nx \text{ (neglecting higher terms)}$$

$$(1 \pm x)^{-n} = 1 \pm (-n)x = 1 \mp nx$$

$$(1+x)^2 = 1 + 2x + x^2$$

$$(1+x)^3 = 1 + 3x + x^3 - 3x^2$$

$$(1+x)^n = 1 + nx \quad \dots\dots\dots$$

if $x \ll 1$

Note : (1) When n is a positive integer, then expansion will have $(n + 1)$ terms

(2) When n is a negative integer, expansion will have infinite terms.

(3) When n is a fraction expansion will have infinite terms.

Ex. 10 Calculate $(1001)^{1/3}$.

Sol. We can write 1001 as : $1001 = 1000\left(1 + \frac{1}{1000}\right)$, so that we have

$$(1001)^{1/3} = \left[1000\left(1 + \frac{1}{1000}\right)\right]^{1/3} = 10\left[1 + \frac{1}{1000}\right]^{1/3}$$

$$= 10(1 + 0.001)^{1/3} = 10\left(1 + \frac{1}{3} \times 0.001\right)$$

$$= 10.003333$$

Ex.11 Expand $(1+x)^{-3}$.

$$\text{Sol. } (1+x)^{-3} = 1 + (-3)x + \frac{(-3)(-3-1)x^2}{2!} + \frac{(-3)(-3-1)(-3-2)}{3!}x^3 +$$


$$= 1 - 3x + \frac{12}{2}x^2 - \frac{60}{3 \times 2}x^3 + \dots\dots$$

$$= 1 - 3x + 6x^2 - 10x^3 + \dots\dots$$


8. GRAPHS :

Following graphs and their corresponding equations are frequently used in Physics.

(i) $y = mx$, represents a straight line passing through origin. Here, $m = \tan \theta$ is also called the slope of line, where θ is the angle which the line makes with positive x-axis, when drawn in anticlockwise direction from the positive x-axis towards the line.

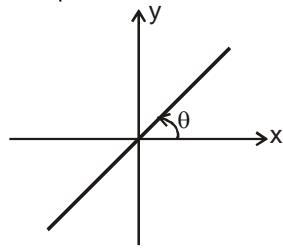

(i)

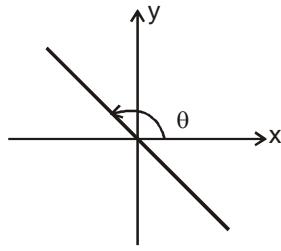


(ii)


The two possible cases are shown in figure 1.1 (i) $0 < \theta < 90^\circ$. Therefore, $\tan \theta$ or slope of line is positive. In fig. 1.1 (ii), $90^\circ < \theta < 180^\circ$. Therefore, $\tan \theta$ or slope of line is negative.

Note : That $y = mx$ of $y \propto x$ also means that value of y becomes 2 time if x is doubled. Or it becomes $\frac{1}{4}$ th if x


becomes $\frac{x}{4}$, and c the intercept on y-axis.

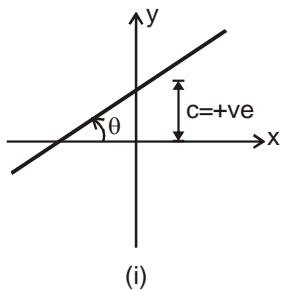

(i)

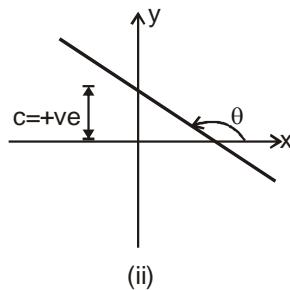

(ii)

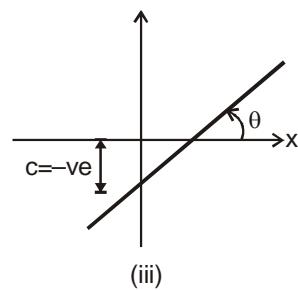


(iii)

In figure (i) : slope and intercept both are positive.


In figure (ii) : slope is negative but intercept is positive and

In figure (iii) : slope is positive but intercept is negative.

Note : That in $y = mx + c$, y does not become two times if x is doubled

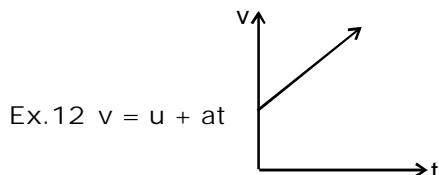

Ex.13 $P = mv$




Ex.14 Draw the graph for the equation : $2y = 3x + 2$

$$\text{Sol. } 2y = 3x + 2 \Rightarrow y = \frac{3}{2}x + 1$$

$$m = \frac{3}{2} > 0 \Rightarrow \theta < 90^\circ$$

$$c = +1 > 0 \\ \Rightarrow \text{The line will pass through } (0, 1)$$

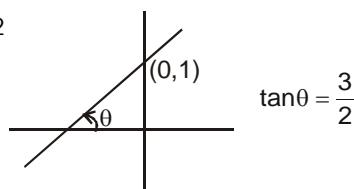


Ex.15 Draw the graph for the equation : $2y + 4x + 2 = 0$

Sol. $2y + 4x + 2 = 0 \Rightarrow y = -2x - 1$

$m = -2 < 0$ i.e., $\theta > 90^\circ$


$c = -1$ i.e.,

line will pass through $(0, -1)$




☞ : (i) If $c = 0$ line will pass through origin.

(ii) $y = c$ will be a line parallel to x axis.



(iii) $x = c$ will be a line perpendicular to y axis



(ii) Parabola

A general quadratic equation represents a parabola.


$$y = ax^2 + bx + c \quad a \neq 0$$

if $a > 0$; It will be a opening upwards parabola.


if $a < 0$; It will be a opening downwards parabola.

if $c = 0$; It will pass through origin.



$y \propto x^2$ or $y = 2x^2$, etc. represents a parabola passing through origin as shown in figure shown.

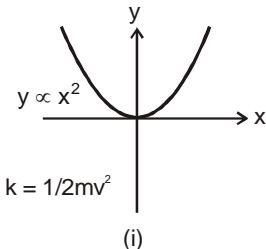

e.g. $y = 4x^2 + 3x$



e.g. $k = \frac{1}{2} mv^2$

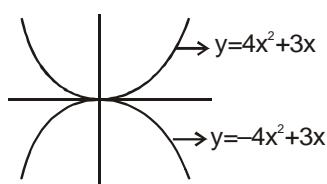

Note : That in the parabola $y = 2x^2$ or $y \propto x^2$, if x is doubled, y will become four times.


Graph $x \propto y^2$ or $x = 4y^2$ is again a parabola passing through origin as shown in figure shown. In this case if y is doubled, x will become four times.

$y = x^2 + 4$ or $x = y^2 - 6$ will represent a parabola but not passing through origin. In the first equation ($y = x^2 + 4$), if x doubled, y will not become four times.

9. SIMILAR TRIANGLE

Two given triangle are said to be similar if

- (1) All respective angle are same
or
- (2) All respective side ratio are same.

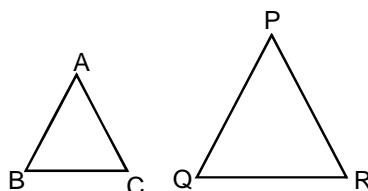

As example, ABC, PQR are two triangle as shown in figure.

If they are similar triangle then


$$(1) \angle A = \angle P$$

$$\angle B = \angle Q$$

$$\angle C = \angle R$$

OR

$$(2) \frac{AB}{PQ} = \frac{BC}{QR} = \frac{AC}{PR}$$

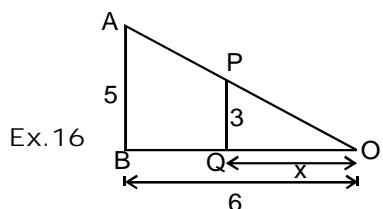

Find x :

Sol. By similar triangle concept

$$\frac{AB}{PQ} = \frac{OB}{OQ}$$

$$\frac{5}{3} = \frac{6}{x} \Rightarrow x = \frac{18}{5}$$

VECTOR

1. SCALAR :

In physics we deal with two type of physical quantity one is scalar and other is vector. Each scalar quantity has a magnitude and a unit.

For example mass = 4kg

Magnitude of mass = 4

and unit of mass = kg

Example of scalar quantities : mass, speed, distance etc.

Scalar quantities can be added, subtracted and multiplied by simple laws of algebra.

2. VECTOR :

Vector are the physical quantities having magnitude as well as specified direction.

For example :

Speed = 4 m/s (is a scalar)


Velocity = 4 m/s toward north (is a vector)

If someone wants to reach some location then it is not sufficient to provide information about the distance of that location it is also essential to tell him about the proper direction from the initial location to the destination.

The magnitude of a vector (\vec{A}) is the absolute value of a vector and is indicated by $|\vec{A}|$ or A .

Example of vector quantity : Displacement, velocity, acceleration, force etc.


Knowledge of direction

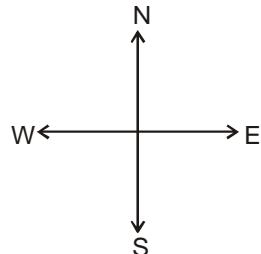

3. GENERAL POINTS REGARDING VECTORS :

3.1 Representation of vector :


Geometrically, the vector is represented by a line with an arrow indicating the direction of vector as



Mathematically, vector is represented by \vec{A} .

Sometimes it is represented by bold letter A .

Thus, the arrow in above figure represents a vector \vec{A} in xy -plane making an angle θ with x -axis.



A representation of vector will be complete if it gives us direction and magnitude.

Symbolic form : $\vec{v}, \vec{a}, \vec{F}, \vec{s}$ used to separate a vector quantity from scalar quantities (u, i, m)

Graphical form : A vector is represented by a directed straight line, having the magnitude and direction of the quantity represented by it.


e.g. if we want to represent a force of 5 N acting 45° N of E

(i) We choose direction co-ordinates.

(ii) We choose a convenient scale like $1 \text{ cm} \equiv 1 \text{ N}$

(iii) We draw a line of length equal in magnitude and in the direction of vector to the chosen quantity.

(iv) We put arrow in the direction of vector.

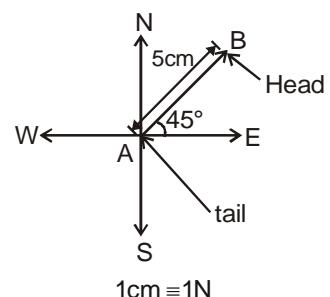


$$\overrightarrow{AB}$$

Magnitude of vector :


$$|\overrightarrow{AB}| = 5 \text{ N}$$

3.2 Angle between two Vectors (θ)

Angle between two vectors means smaller of the two angles between the vectors when they are placed tail to tail by displacing either of the vectors parallel to itself (i.e $0 \leq \theta \leq \pi$).

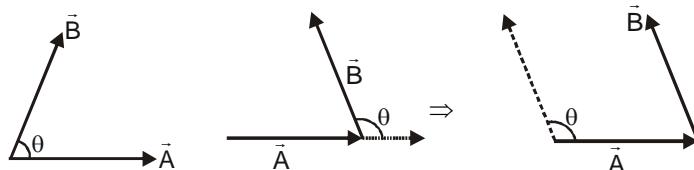


Ex.1 Three vectors $\vec{A}, \vec{B}, \vec{C}$ are shown in the figure. Find angle between (i) \vec{A} and \vec{B} , (ii) \vec{B} and \vec{C} , (iii) \vec{A} and \vec{C} .

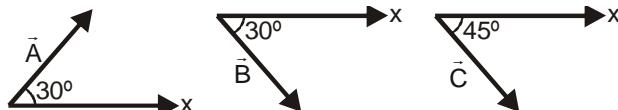

Sol. To find the angle between two vectors we connect the tails of the two vectors. We can shift \vec{B} & \vec{C} such that

tails of \vec{A}, \vec{B} and \vec{C} are connected as shown in figure.

Now we can easily observe that angle between \vec{A} and \vec{B} is 60° , \vec{B} and \vec{C} is 15° and between \vec{A} and \vec{C} is 75° .

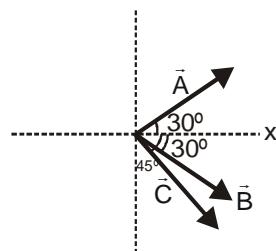


3.3 Negative of Vector

It implies vector of same magnitude but opposite in direction.

$$\begin{array}{c} \longrightarrow \\ \vec{A} \end{array} \quad \begin{array}{c} \longleftarrow \\ -\vec{A} \end{array}$$

3.4 Equality of Vectors.

Vectors having equal magnitude and same direction are called equal vectors

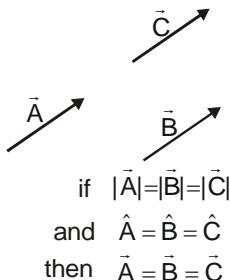


3.5 Collinear vectors :

Any two vectors are co-linear then one can be express in the term of other.

$$\vec{a} = \lambda \vec{b} \quad (\text{where } \lambda \text{ is a constant})$$

3.6 Co-initial vector : If two or more vector start from same point then they called co-initial vector.

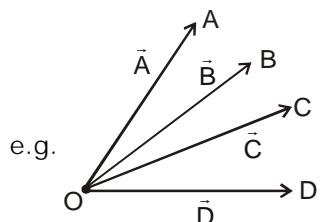


here A, B, C, D are co-initial.

3.7 Coplanar vectors :

Three (or more) vectors are called coplanar vectors if they lie in the same plane or are parallel to the same plane. Two (free) vectors are always coplanar.

Important points

- If the frame of reference is translated or rotated the vector does not change (though its components may change).



Two vectors are called equal if their magnitudes and directions are same, and they represent values of same physical quantity.

3.8 Multiplication and division of a vector by a scalar

Multiplying a vector \vec{A} with a positive number λ gives a vector ($\vec{B}=\lambda \vec{A}$) whose magnitude become λ times but the direction is the same as that of \vec{A} . Multiplying a vector \vec{A} by a negative number λ gives a vector \vec{B} whose direction is opposite to the direction of \vec{A} and whose magnitude is $-\lambda$ times $|\vec{A}|$.

The division of vector \vec{A} by a non-zero scalar m is defined as multiplication of \vec{A} by $\frac{1}{m}$.

At here \vec{A} and \vec{B} are co-linear vector

Ex.2 A physical quantity ($m = 3\text{kg}$) is multiplied by a vector \vec{a} such that $\vec{F} = m\vec{a}$. Find the magnitude and direction of \vec{F} if

- (i) $\vec{a} = 3\text{m/s}^2$ Eastwards
- (ii) $\vec{a} = -4 \text{ m/s}^2$ Northwards


Sol. (i) $\vec{F} = m\vec{a} = 3 \times 3\text{ms}^{-2}$ Eastwards
 $= 9 \text{ N}$ Eastwards

- (ii) $\vec{F} = m\vec{a} = 3 \times (-4)\text{N}$ Northwards
 $= -12 \text{ N}$ Northwards
 $= 12 \text{ N}$ Southwards

4. LAWS OF ADDITION AND SUBTRACTION OF VECTORS :

4.1 Triangle rule of addition : Steps for adding two vectors representing same physical quantity by triangle law.

- (i) Keep vectors s.t. tail of one vector coincides with head of other.
- (ii) Join tail of first to head of the other by a line with arrow at head of the second.
- (iii) This new vector is the sum of two vectors. (also called resultant)

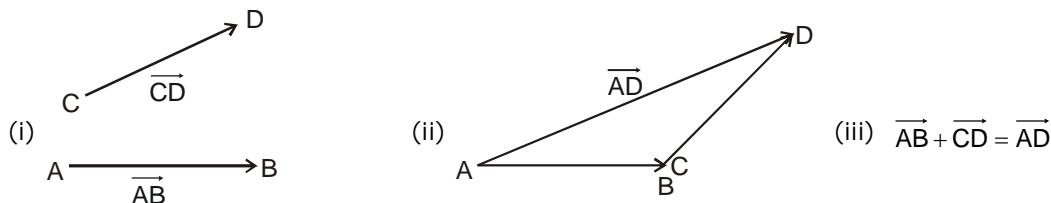


Take example here.

Q. A boy moves 4 m south and then 5 m in direction 37° E of N. Find resultant displacement.

4.2 Polygon Law of addition :

This law is used for adding more than two vectors. This is extension of triangle law of addition. We keep on arranging vectors s.t. tail of next vector lies on head of former.

When we connect the tail of first vector to head of last we get resultant of all the vectors.

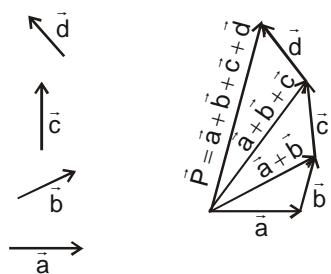


Note : $\vec{P} = (\vec{a} + \vec{b}) + \vec{c} + \vec{d} = (\vec{c} + \vec{a} + \vec{b}) + \vec{d}$ [Associative Law]

4.3 Parallelogram law of addition :

Steps :

- Keep two vectors such that their tails coincide.
- Draw parallel vectors to both of them considering both of them as sides of a parallelogram.
- Then the diagonal drawn from the point where tails coincide represents the sum of two vectors, with its tail at point of coincidence of the two vectors.

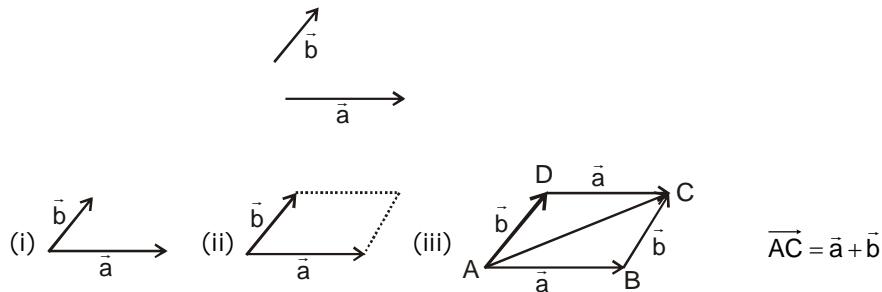

Note : $\vec{AC} = \vec{a} + \vec{b}$ and $\vec{AC} = \vec{b} + \vec{a}$ thus $\vec{a} + \vec{b} = \vec{b} + \vec{a}$ [Commutative Law]

Note : Angle between 2 vectors is the angle between their positive directions.

Suppose angle between these two vectors is θ , and $|\vec{a}|=a, |\vec{b}|=b$

$$\begin{aligned}
(AD)^2 &= (AE)^2 + (DE)^2 \\
&= (AB + BE)^2 + (DE)^2 \\
&= (a + b \cos \theta)^2 + (b \sin \theta)^2 \\
&= a^2 + b^2 \cos^2 \theta + 2ab \cos \theta + b^2 \sin^2 \theta \\
&= a^2 + b^2 + 2ab \cos \theta
\end{aligned}$$

$$\text{Thus, } AD = \sqrt{a^2 + b^2 + 2ab \cos \theta}$$


$$\text{or } |\vec{a} + \vec{b}| = \sqrt{a^2 + b^2 + 2ab \cos \theta}$$

angle α with vector a is

$$\tan \alpha = \frac{DE}{AE} = \frac{b \sin \theta}{(a + b \cos \theta)}$$

Important points :

- To a vector, only a vector of same type can be added that represents the same physical quantity and the resultant is also a vector of the same type.
- As $R = [A^2 + B^2 + 2AB \cos \theta]^{1/2}$ so R will be maximum when, $\cos \theta = \max = 1$, i.e., $\theta = 0^\circ$, i.e. vectors are like or parallel and $R_{\max} = A + B$.
- $|\vec{A}| = |\vec{B}|$ and angle between them θ then $R = 2A \cos \theta / 2$
- $|\vec{A}| = |\vec{B}|$ and angle between them $\pi - \theta$ then $R = 2A \sin \theta / 2$
- The resultant will be minimum if, $\cos \theta = \min = -1$, i.e., $\theta = 180^\circ$, i.e. vectors are antiparallel and $R_{\min} = A - B$.
- If the vectors A and B are orthogonal, i.e., $\theta = 90^\circ$, $R = \sqrt{A^2 + B^2}$




- As previously mentioned that the resultant of two vectors can have any value from $(A - B)$ to $(A + B)$ depending on the angle between them and the magnitude of resultant decreases as θ increases 0° to 180° .
- Minimum number of unequal coplanar vectors whose sum can be zero is three.
- The resultant of three non-coplanar vectors can never be zero, or minimum number of non coplanar vectors whose sum can be zero is four.


5. SUBTRACTION OF VECTOR :

Negative of a vector say $-\vec{A}$ is a vector of the same magnitude as vector \vec{A} but pointing in a direction opposite to that of \vec{A} .

Thus, $\vec{A} - \vec{B}$ can be written as $\vec{A} + (-\vec{B})$ or $\vec{A} - \vec{B}$ is really the vector addition of \vec{A} and $-\vec{B}$.

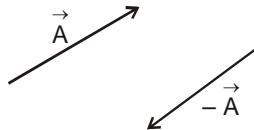

Suppose angle between two vectors \vec{A} and \vec{B} is θ . Then angle between \vec{A} and $-\vec{B}$ will be $180^\circ - \theta$ as shown in figure.

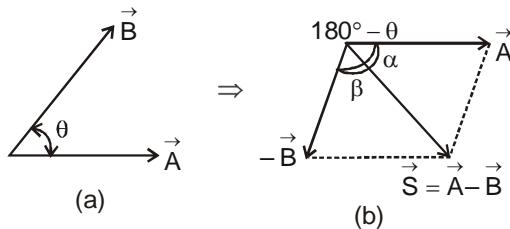

Magnitude of $\vec{S} = \vec{A} - \vec{B}$ will be thus given by

$$S = |\vec{A} - \vec{B}| = \sqrt{A^2 + B^2 + 2AB \cos(180^\circ - \theta)}$$

$$\text{or } S = \sqrt{A^2 + B^2 - 2AB \cos \theta} \quad \dots (\text{i})$$

For direction of \vec{S} we will either calculate angle α or β , where,

$$\tan \alpha = \frac{B \sin(180^\circ - \theta)}{A + B \cos(180^\circ - \theta)} = \frac{B \sin \theta}{A - B \cos \theta} \quad \dots (\text{ii})$$

$$\text{or } \tan \beta = \frac{A \sin(180^\circ - \theta)}{B + A \cos(180^\circ - \theta)} = \frac{A \sin \theta}{B - A \cos \theta} \quad \dots (\text{iii})$$


Ex.3 Two vectors of 10 units & 5 units make an angle of 120° with each other. Find the magnitude & angle of resultant with vector of 10 unit magnitude.

$$\text{Sol. } |\vec{a} + \vec{b}| = \sqrt{a^2 + b^2 + 2ab \cos \theta} = \sqrt{100 + 25 + 2 \times 10 \times 5(-1/2)} = 5\sqrt{3}$$

$$\tan \alpha = \frac{5 \sin 120^\circ}{10 + 5 \cos 120^\circ} = \frac{5\sqrt{3}}{20 - 5} = \frac{5\sqrt{3}}{5 \times 3} = \frac{1}{\sqrt{3}} \Rightarrow \alpha = 30^\circ$$


[Here shows what is angle between both vectors = 120° and not 60°]

Note : $\vec{A} - \vec{B}$ or $\vec{B} - \vec{A}$ can also be found by making triangles as shown in figure. (a) and (b)

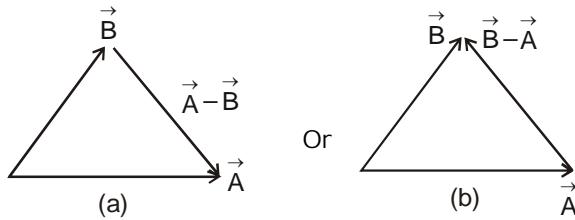


Ex.4 Two vectors of equal magnitude 2 are at an angle of 60° to each other find magnitude of their sum & difference.


Sol. $|\vec{a} + \vec{b}| = \sqrt{2^2 + 2^2 + 2 \times 2 \times 2 \cos 60^\circ} = \sqrt{4 + 4 + 4} = 2\sqrt{3}$



$$|\vec{a} - \vec{b}| = \sqrt{2^2 + 2^2 + 2 \times 2 \times 2 \cos 120^\circ} = \sqrt{4 + 4 - 4} = 2$$



Ex.5 Find $\vec{A} + \vec{B}$ and $\vec{A} - \vec{B}$ in the diagram shown in figure. Given $A = 4$ units and $B = 3$ units.



Sol. Addition :

$$\begin{aligned} R &= \sqrt{A^2 + B^2 + 2AB \cos \theta} \\ &= \sqrt{16 + 9 + 2 \times 4 \times 3 \cos 60^\circ} = \sqrt{37} \text{ units} \end{aligned}$$

$$\begin{aligned} \tan \alpha &= \frac{B \sin \theta}{A + B \cos \theta} = \frac{3 \sin 60^\circ}{4 + 3 \cos 60^\circ} = 0.472 \\ \therefore \alpha &= \tan^{-1}(0.472) = 25.3^\circ \end{aligned}$$


Thus, resultant of \vec{A} and \vec{B} is $\sqrt{37}$ units at angle 25.3° from \vec{A} in the direction shown in figure.

$$\begin{aligned}\text{Subtraction: } S &= \sqrt{A^2 + B^2 - 2AB \cos \theta} \\ &= \sqrt{16 + 9 - 2 \times 4 \times 3 \cos 60^\circ} = \sqrt{13} \text{ units}\end{aligned}$$

and $\tan \theta = \frac{B \sin \theta}{A - B \cos \theta}$

$$= \frac{3 \sin 60^\circ}{4 - 3 \cos 60^\circ} = 1.04$$

$$\therefore \alpha = \tan^{-1}(1.04) = 46.1^\circ$$

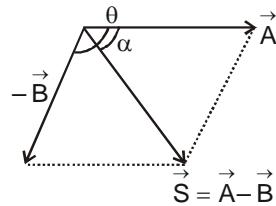


Thus, $\vec{A} - \vec{B}$ is $\sqrt{13}$ units at 46.1° from \vec{A} in the direction shown in figure.

6. UNIT VECTOR AND ZERO VECTOR

Unit vector is a vector which has a unit magnitude and points in a particular direction. Any vector (\vec{A}) can be written as the product of unit vector (\hat{A}) in that direction and magnitude of the given vector.

$$\vec{A} = A \hat{A} \quad \text{or} \quad \hat{A} = \frac{\vec{A}}{A}$$

A unit vector has no dimensions and unit. Unit vectors along the positive x-, y-and z-axes of a rectangular coordinate system are denoted by \hat{i} , \hat{j} and \hat{k} respectively such that $|\hat{i}| = |\hat{j}| = |\hat{k}| = 1$.



A vector of zero magnitude is called a zero or a null vector. Its direction is arbitrary.

- Ex.6 A unit vector along East is defined as \hat{i} . A force of 10^5 dynes acts westwards. Represent the force in terms of \hat{i} .

Sol. $\vec{F} = -10^5 \hat{i}$ dynes

7. RESOLUTION OF VECTORS

If \vec{a} and \vec{b} be any two non-zero vectors in a plane with different directions and \vec{A} be another vector in the same plane. \vec{A} can be expressed as a sum of two vectors-one obtained by multiplying \vec{a} by a real number and the other obtained by multiplying \vec{b} by another real number.

$$\vec{A} = \lambda \vec{a} + \mu \vec{b} \quad (\text{where } \lambda \text{ and } \mu \text{ are real numbers})$$


We say that \vec{A} has been resolved into two component vectors namely

$$\vec{A} = \lambda \vec{a} + \mu \vec{b} \quad (\text{where } \lambda \text{ and } \mu \text{ are real numbers})$$

We say that \vec{A} has been resolved into two component vectors namely


$$\lambda \vec{a} \text{ and } \mu \vec{b}$$

$\lambda \vec{a}$ and $\mu \vec{b}$ along \vec{a} and \vec{b} respectively. Hence one can resolve a given vector into two component vectors along a set of two vectors – all the three lie in the same plane.

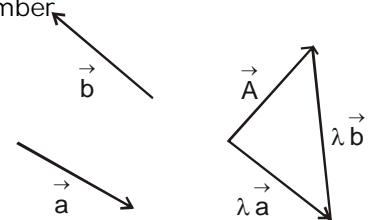

7.1 Resolution along rectangular component :

It is convenient to resolve a general vector along axes of a rectangular coordinate system using vectors of unit magnitude, which we call as unit vectors. \hat{i} , \hat{j} , \hat{k} are unit along x, y and z-axis as shown in figure below :

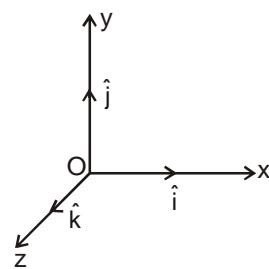

7.2 Resolution in two Dimension

Consider a vector \vec{A} that lies in xy plane as shown in figure,

$$\vec{A} = \vec{A}_1 + \vec{A}_2$$

$$\vec{A}_1 = A_x \hat{i}, \vec{A}_2 = A_y \hat{j} \Rightarrow \vec{A} = A_x \hat{i} + A_y \hat{j}$$

The quantities A_x and A_y are called x-and y-components of the vector \vec{A} .


A_x is itself not a vector but $A_x \hat{i}$ is a vector and so it $A_y \hat{j}$.

$$A_x = A \cos \theta \text{ and } A_y = A \sin \theta$$

It's clear from above equation that a component of a vector can be positive, negative or zero depending on the value of θ . A vector \vec{A} can be specified in a plane by two ways :

(a) its magnitude A and the direction θ it makes with the x-axis; or

$$(b) its components A_x and A_y $A = \sqrt{A_x^2 + A_y^2}$, $\theta = \tan^{-1} \frac{A_y}{A_x}$$$

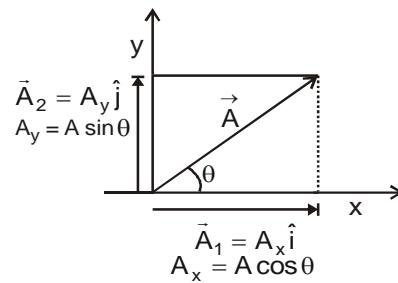

Note : If $A = A_x \Rightarrow A_y = 0$ and if $A = A_y \Rightarrow A_x = 0$ i.e.,

components of a vector perpendicular to itself is always zero. The rectangular components of each vector and those of the sum $\vec{C} = \vec{A} + \vec{B}$ are shown in figure. We saw that

$\vec{C} = \vec{A} + \vec{B}$ is equivalent to both

$$C_x = A_x + B_x$$

$$\text{and } C_y = A_y + B_y$$



Refer figure (b)

Vector \vec{R} has been resolved in two axes x and y not perpendicular to each other. Applying sine law in the triangle shown, we have


$$\frac{R}{\sin[180^\circ - (\alpha + \beta)]} = \frac{R_x}{\sin \beta} = \frac{R_y}{\sin \alpha}$$

$$\text{or } R_x = \frac{R \sin \beta}{\sin(\alpha + \beta)} \text{ and } R_y = \frac{R \sin \alpha}{\sin(\alpha + \beta)}$$

If $\alpha + \beta = 90^\circ$, $R_x = R \sin \beta$ and $R_y = R \sin \alpha$

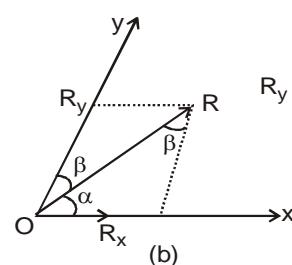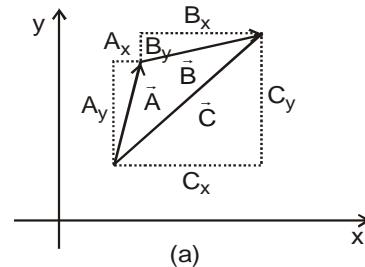

- Ex.7 Resolve the vector $\vec{A} = A_x \hat{i} + A_y \hat{j}$ along an perpendicular to the line which make angle 60° with x-axis.

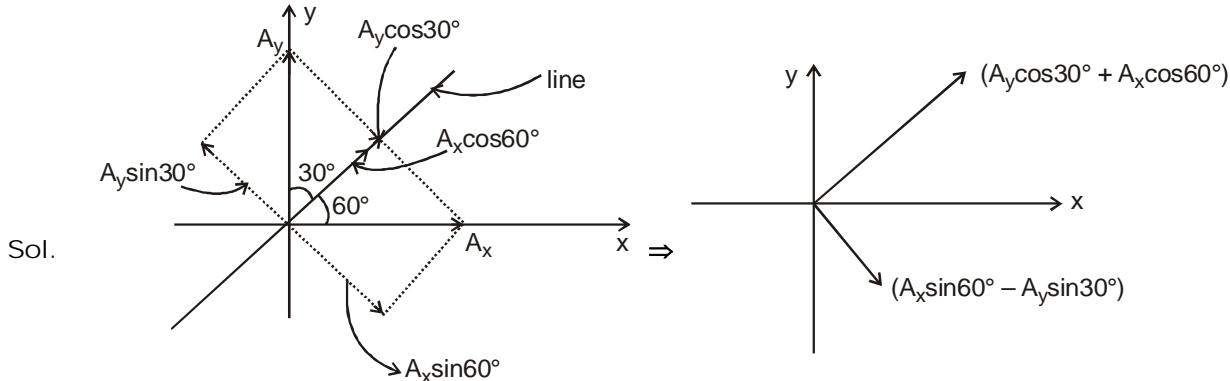

so the component along line = $|A_y \cos 30^\circ + A_x \cos 60^\circ|$
and perpendicular to line = $|A_x \sin 60^\circ - A_y \sin 30^\circ|$


- Ex.8 Resolve a weight of 10 N in two directions which are parallel and perpendicular to a slope inclined at 30° to the horizontal

Sol. Component perpendicular to the plane

$$\begin{aligned} W_{\perp} &= W \cos 30^\circ \\ &= (10) \frac{\sqrt{3}}{2} = 5\sqrt{3} \text{ N} \quad \text{Ans.} \end{aligned}$$

and component parallel to the plane

$$W_{\parallel} = W \sin 30^\circ = (10) \left(\frac{1}{2}\right) = 5 \text{ N}$$

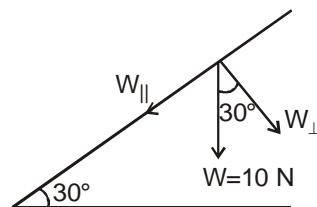


- Ex.9 Resolve horizontally and vertically a force $F = 8 \text{ N}$ which makes an angle of 45° with the horizontal.

Sol. Horizontal component of \vec{F} is

$$F_H = F \cos 45^\circ = (8) \left(\frac{1}{\sqrt{2}}\right) = 4\sqrt{2} \text{ N}$$

and vertical component of \vec{F} is

$$F_v = F \sin 45^\circ = (8) \left(\frac{1}{\sqrt{2}}\right) = 4\sqrt{2} \text{ N} \quad \text{Ans.}$$

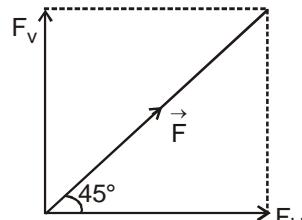

8. PROCEDURE TO SOLVE THE VECTOR EQUATION

$$\vec{A} = \vec{B} + \vec{C} \quad \dots(1)$$

- (a) There are 6 variables in this equation which are following :

- (1) Magnitude of \vec{A} and its direction
- (2) Magnitude of \vec{B} and its direction
- (3) Magnitude of \vec{C} and its direction.

- (b) We can solve this equation if we know the value of 4 variables [Note : two of them must be directions]
 (c) If we know the two direction of any two vectors then we will put them on the same side and other on the different side.



For example

If we know the directions of \vec{A} and \vec{B} and \vec{C} 's direction is unknown then we make equation as follows:-

$$\vec{C} = \vec{A} - \vec{B}$$

- (d) Then we make vector diagram according to the equation and resolve the vectors to know the unknown values.

Ex.10 Find the net displacement of a particle from its starting point if it undergoes two successive displacement given by $\vec{S}_1 = 20\text{m}$, 37° North of West, $\vec{S}_2 = 50\text{m}$, 53° North of East

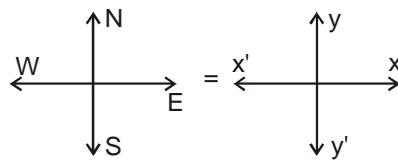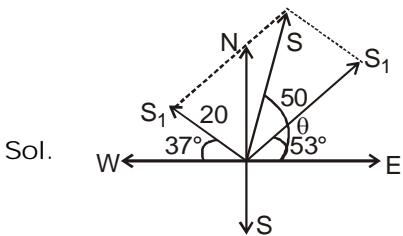

$$\vec{S} = \vec{S}_1 + \vec{S}_2$$

$$\begin{aligned} S_x &= S_{1x} + S_{2x} \\ &= -20 \cos 37^\circ + 50 \cos 53^\circ \\ &= 14 \end{aligned}$$

$$\begin{aligned} S_y &= S_{1y} + S_{2y} \\ &= 20 \sin 37^\circ + 50 \sin 53^\circ \\ &= 52 \end{aligned}$$

$$S = \sqrt{S_x^2 + S_y^2} = \sqrt{(14)^2 + (52)^2} = 53.85$$

Angle from west - east axis (x- axis)

$$\begin{aligned} \tan \theta &= \frac{S_y}{S_x} = \frac{52}{14} = \frac{26}{7} \\ \theta &= \tan^{-1}\left(\frac{26}{7}\right) \end{aligned}$$

Ex.11 Find magnitude of \vec{B} and direction of \vec{A} . If \vec{B} makes angle 37° and \vec{C} makes 53° with x axis and \vec{A} has magnitude equal to 10 and \vec{C} has 5. (given $\vec{A} + \vec{B} + \vec{C} = \vec{0}$)

Sol. $-\vec{A} = \vec{C} + \vec{B}$

$$\vec{A} = A_x \hat{i} + A_y \hat{j}$$


$$\Rightarrow -\vec{A} = -A_x \hat{i} - A_y \hat{j}$$

$$A_x = -(B \cos 37^\circ + C \cos 53^\circ)$$

$$A_y = -(B \sin 37^\circ + C \sin 53^\circ)$$

$$|\vec{A}|^2 = A_x^2 + A_y^2$$

$$A^2 = \left(B \times \frac{4}{5} + C \times \frac{3}{5}\right)^2 + \left(B \times \frac{3}{5} + C \times \frac{4}{5}\right)^2$$

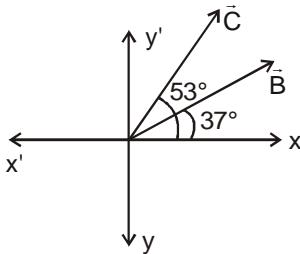

$$10^2 = \left(\frac{4B}{5} + 3\right)^2 + \left(\frac{3B}{5} + 4\right)^2$$

$$\Rightarrow 100 = \frac{16}{25}B^2 + \frac{9}{25}B^2 + 25 + 2\left(\frac{3 \times 4}{5} + \frac{4 \times 3}{5}\right)B$$

$$\Rightarrow B^2 + \frac{48}{5}B - 75 = 0$$

$B = 5$ (magnitude can not be negative)

& Angle made by A

$$\Rightarrow A_x = -\left(\frac{20}{5} + 3\right) = -12$$

$$A_y = -\left(\frac{15}{5} + 4\right) = -7$$

$$\tan \theta = \frac{A_y}{A_x} = \frac{-7}{-12}$$

$$\theta = 180^\circ + 25^\circ = 205^\circ$$


Ex.12 Find the magnitude of F_1 and F_2 . If F_1, F_2 make angle 30° and 45° with F_3 and magnitude of F_3 is 10 N. (given $\vec{F}_1 + \vec{F}_2 = \vec{F}_3$)

$$\text{Sol. } |\vec{F}_3| = F_1 \cos 30^\circ + F_2 \cos 45^\circ$$


$$\text{& } F_2 \sin 45^\circ = F_1 \sin 30^\circ$$

$$\Rightarrow 10 = \frac{\sqrt{3}F_1}{2} + \frac{F_2}{\sqrt{2}}, \frac{F_2}{\sqrt{2}} = \frac{F_1}{2}$$

$$\Rightarrow F_1 = \frac{20}{\sqrt{3}+1} \quad \text{&} \quad F_2 = \frac{20\sqrt{2}}{\sqrt{3}+1}$$

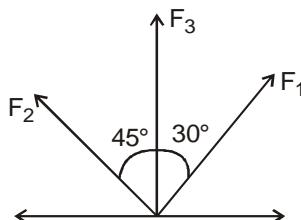

9. SHORT - METHOD

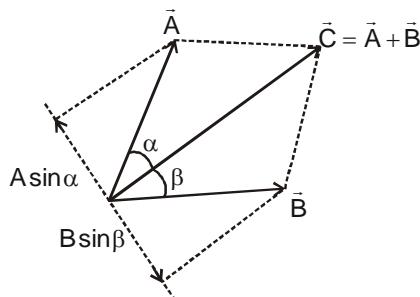


If there are two vectors \vec{A} and \vec{B} and their resultant make an angle α with \vec{A} and β with \vec{B} .
then $A \sin \alpha = B \sin \beta$

Means component of \vec{A} perpendicular to resultant is equal in magnitude to the component of \vec{B} perpendicular to resultant.

Ex.13 If two vectors \vec{A} and \vec{B} make angle 30° and 45° with their resultant and \vec{B} has magnitude equal to 10, then find magnitude of \vec{A} .


$$\begin{aligned} \text{So } B \sin 60^\circ &= A \sin 30^\circ \\ \Rightarrow 10 \sin 60^\circ &= A \sin 30^\circ \\ \Rightarrow A &= 10\sqrt{3} \end{aligned}$$

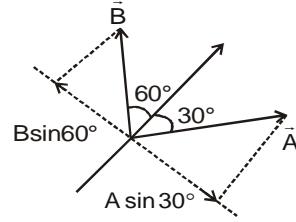

Ex.14 If \vec{A} and \vec{B} have angle between them equals to 60° and their resultant make, angle 45° with \vec{A} and \vec{A} have magnitude equal to 10. Then Find magnitude of \vec{B} .

Sol. here $\alpha = 45^\circ$ and $\beta = 60^\circ - 45^\circ = 15^\circ$
so $A \sin \alpha = B \sin \beta$
 $10 \sin 45^\circ = B \sin 15^\circ$

$$\begin{aligned} \text{So } B &= \frac{10}{\sqrt{2}} \sin 15^\circ \\ &= \frac{10}{\sqrt{2}} \sqrt{\frac{1-\cos(2 \times 15)}{2}} = \frac{5}{\sqrt{2}} \sqrt{2-\sqrt{3}} \end{aligned}$$

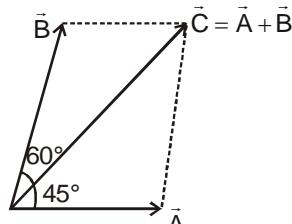

10. ADDITION AND SUBTRACTION IN COMPONENT FORM :

Suppose there are two vectors in component form. Then the addition and subtraction between these two are

$$\mathbf{A} = A_x \hat{i} + A_y \hat{j} + A_z \hat{k}$$

$$\mathbf{B} = B_x \hat{i} + B_y \hat{j} + B_z \hat{k}$$

$$\mathbf{A} \pm \mathbf{B} = (A_x \pm B_x) \hat{i} + (A_y \pm B_y) \hat{j} + (A_z \pm B_z) \hat{k}$$

Also if we are having a third vector present in component form and this vector is added or subtracted from the addition or subtraction of above two vectors then

$$\mathbf{C} = C_x \hat{i} + C_y \hat{j} + C_z \hat{k}$$

$$\mathbf{A} \pm \mathbf{B} \pm \mathbf{C} = (A_x \pm B_x \pm C_x) \hat{i} + (A_y \pm B_y \pm C_y) \hat{j} + (A_z \pm B_z \pm C_z) \hat{k}$$

Note : Modulus of vector A is given by

$$|\mathbf{A}| = \sqrt{A_x^2 + A_y^2 + A_z^2}$$

Ex.15 Obtain the magnitude of $2\vec{A} - 3\vec{B}$ if

$$\vec{A} = \hat{i} + \hat{j} - 2\hat{k} \text{ and } \vec{B} = 2\hat{i} - \hat{j} + \hat{k}$$


$$\text{Sol. } 2\vec{A} - 3\vec{B} = 2(\hat{i} + \hat{j} - 2\hat{k}) - 3(2\hat{i} - \hat{j} + \hat{k})$$

$$\therefore \text{ Magnitude of } 2\vec{A} - 3\vec{B} = \sqrt{(-4)^2 + (5)^2 + (-7)^2}$$


$$= \sqrt{16 + 25 + 49} = \sqrt{90}$$

Ans.

Ex. 16 Find $\vec{A} + \vec{B}$ and $\vec{A} - \vec{B}$ if \vec{A} make angle 37° with positive x-axis and \vec{B} make angle 53° with negative x-axis as shown and magnitude of \vec{A} is 5 and of \vec{B} is 10.

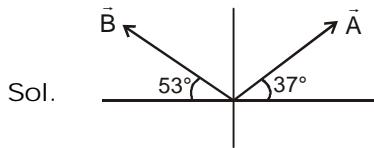


for $\vec{A} + \vec{B}$

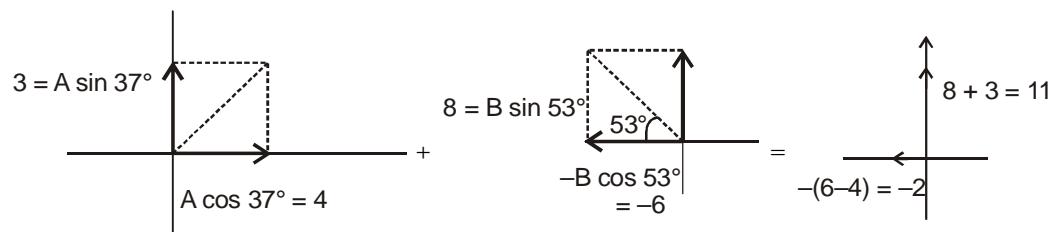

$$\text{so the magnitude of resultant will be } = \sqrt{11^2 + (-2)^2} = 5\sqrt{5}$$

and have angle $\theta = \tan^{-1}\left(\frac{11}{2}\right)$ from negative x - axis towards up

for $\vec{A} - \vec{B}$

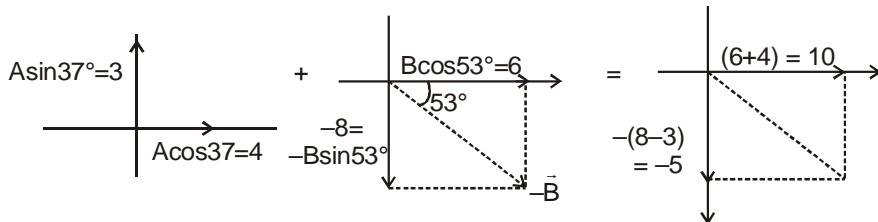

So the magnitude of resultant will be

$$= \sqrt{10^2 + (-5)^2} = 5\sqrt{5}$$


and have angle $\theta = \tan^{-1}\left(\frac{5}{10}\right)$ from positive x-axis towards down.

11. MULTIPLICATION OF VECTORS (The Scalar and vector products) :

11.1 Scalar Product

The scalar product or dot product of any two vector \vec{A} and \vec{B} , denoted as $\vec{A} \cdot \vec{B}$ (read \vec{A} dot \vec{B}) is defined as the product of their magnitude with cosine of angle between them. Thus,


$$\vec{A} \cdot \vec{B} = AB \cos \theta \quad (\text{here } \theta \text{ is the angle between the vectors})$$



Properties :


- It is always a scalar which is positive if angle between the vectors is acute (i.e. $< 90^\circ$) and negative if angle between them is obtuse (i.e., $90^\circ < \theta \leq 180^\circ$)
- It is commutative i.e. $\vec{A} \cdot \vec{B} = \vec{B} \cdot \vec{A}$
- It is distributive, i.e. $\vec{A} \cdot (\vec{B} + \vec{C}) = \vec{A} \cdot \vec{B} + \vec{A} \cdot \vec{C}$
- As by definition $\vec{A} \cdot \vec{B} = AB \cos \theta$. The angle between the vectors $\theta = \cos^{-1} \left[\frac{\vec{A} \cdot \vec{B}}{AB} \right]$
- $\vec{A} \cdot \vec{B} = A(B \cos \theta) = B(A \cos \theta)$

Geometrically, $B \cos \theta$ is the projection of \vec{B} onto \vec{A} and vice versa

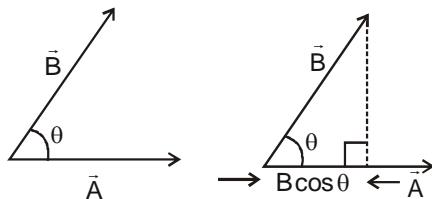

$$\text{Component of } \vec{B} \text{ along } \vec{A} = B \cos \theta = \frac{\vec{A} \cdot \vec{B}}{A} = \hat{A} \cdot \vec{B} \text{ (Projection of } \vec{B} \text{ on } \vec{A})$$

$$\text{Component of } \vec{A} \text{ along } \vec{B} = A \cos \theta = \frac{\vec{A} \cdot \vec{B}}{B} = \vec{A} \cdot \hat{B} \text{ (Projection of } \vec{A} \text{ on } \vec{B})$$

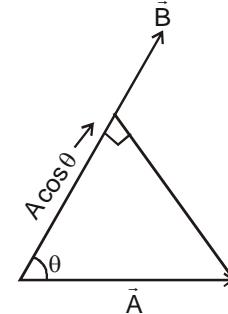

- Scalar product of two vectors will be maximum when $\cos \theta = \max = 1$, i.e., $\theta = 0^\circ$,
i.e., vectors are parallel $\Rightarrow (\vec{A} \cdot \vec{B})_{\max} = AB$
- If the scalar product of two non-zero vectors vanishes then the vectors are perpendicular.
- The scalar product of a vector by itself is termed as self dot product and is given by

$$(\vec{A})^2 = \vec{A} \cdot \vec{A} = AA \cos 0^\circ = A^2 \Rightarrow A = \sqrt{\vec{A} \cdot \vec{A}}$$

- In case of unit vector \hat{n} ,

$$\hat{n} \cdot \hat{n} = 1 \times 1 \times \cos 0^\circ = 1 \Rightarrow \hat{n} \cdot \hat{n} = \hat{i} \cdot \hat{i} = \hat{j} \cdot \hat{j} = \hat{k} \cdot \hat{k} = 1$$

In case of orthogonal unit vectors, \hat{i} , \hat{j} and \hat{k} ; $\hat{i} \cdot \hat{j} = \hat{j} \cdot \hat{k} = \hat{k} \cdot \hat{i} = 0$

$$\vec{A} \cdot \vec{B} = (\hat{i}A_x + \hat{j}A_y + \hat{k}A_z) \cdot (\hat{i}B_x + \hat{j}B_y + \hat{k}B_z) = [A_x B_x + A_y B_y + A_z B_z]$$

Ex. 17 If the vectors $\vec{P} = a\hat{i} + a\hat{j} + 3\hat{k}$ and $\vec{Q} = a\hat{i} - 2\hat{j} - \hat{k}$ are perpendicular to each other. Find the value of a ?

Sol. If vectors \vec{P} and \vec{Q} are perpendicular

$$\begin{aligned} \Rightarrow \vec{P} \cdot \vec{Q} = 0 &\Rightarrow (a\hat{i} + a\hat{j} + 3\hat{k}) \cdot (a\hat{i} - 2\hat{j} - \hat{k}) = 0 \\ \Rightarrow a^2 - 2a - 3 = 0 &\Rightarrow a^2 - 3a + a - 3 = 0 \\ \Rightarrow a(a - 3) + 1(a - 3) &\Rightarrow a = -1, 3 \end{aligned}$$

Ex.18 Find the component of $\vec{A} = 3\hat{i} + 4\hat{j}$ along $\hat{i} + \hat{j}$?

Sol. Component of \vec{A} along \vec{B} is given by $\frac{\vec{A} \cdot \vec{B}}{|\vec{B}|}$ hence required component

$$= \frac{(3\hat{i} + 4\hat{j}) \cdot (\hat{i} + \hat{j})}{\sqrt{2}} = \frac{7}{\sqrt{2}}$$

Ex.19 Find angle between $\vec{A} = 3\hat{i} + 4\hat{j}$ and $\vec{B} = 12\hat{i} + 5\hat{j}$?

Sol. We have $\cos \theta = \frac{\vec{A} \cdot \vec{B}}{|\vec{A}| |\vec{B}|} = \frac{(3\hat{i} + 4\hat{j}) \cdot (12\hat{i} + 5\hat{j})}{\sqrt{3^2 + 4^2} \sqrt{12^2 + 5^2}}$

$$\cos \theta = \frac{36 + 20}{5 \times 13} = \frac{56}{65} \quad \theta = \cos^{-1} \left(\frac{56}{65} \right)$$

Ex.20 (i) For what value of m the vector $\vec{A} = 2\hat{i} + 3\hat{j} - 6\hat{k}$ is perpendicular to $\vec{B} = 3\hat{i} - m\hat{j} + 6\hat{k}$

(ii) Find the component of vector $\vec{A} = 2\hat{i} + 3\hat{j}$ along the direction of $\hat{i} + \hat{j}$?

Sol. (i) $m = -10$ (ii) $\frac{5}{\sqrt{2}}$

Important Note :

Components of b along and perpendicular to a.

Let $\vec{OA} \cdot \vec{OB}$ represent two (non-zero) given vectors a, b respectively. Draw BM perpendicular to \vec{OA}

From $\triangle OMB$, $\vec{OB} = \vec{OM} + \vec{MB}$

$$\Rightarrow b = \vec{OM} + \vec{MB}$$

Thus \vec{OM} and \vec{MB} are components of b along a and perpendicular to a.


Now $\vec{OM} = (\vec{OM})\hat{a} = (OB \cos \theta) \hat{a}$

$$\begin{aligned} &= |b| \cos \theta \hat{a} = |b| \cdot a \cdot b / |a| \cdot |b| \cdot \hat{a} \\ &= a \cdot b / |a| \cdot a / |a| = (a \cdot b) a / |a|^2 \\ &= (a \cdot b) a / a^2 \end{aligned}$$

$$\vec{MB} = b - \vec{OM} = b - (a \cdot b / |a|^2) \cdot a$$

Hence, components of b along a perpendicular to a are.

$(a \cdot b / |a|^2) a$ and $b - (a \cdot b / |a|^2) a$ respectively.

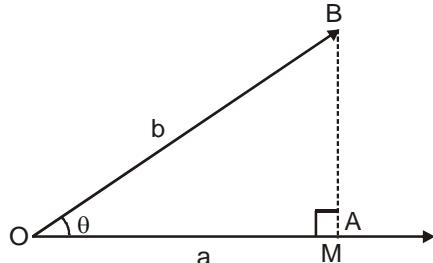

Ex.21 The velocity of a particle is given by $\vec{v} = 3\hat{i} + 2\hat{j} + 3\hat{k}$. Find the vector component of its velocity parallel to the line $\vec{l} = \hat{i} - \hat{j} + \hat{k}$.

Sol. Component of \vec{v} along \vec{l}

$$\begin{aligned} &= v \cos \theta \hat{l} = v \frac{\vec{v} \cdot \vec{l}}{|l|} \hat{l} = \frac{\vec{v} \cdot \vec{l}}{|l|^2} \vec{l} \\ &= \frac{(3\hat{i} + 2\hat{j} + 3\hat{k})(\hat{i} - \hat{j} + \hat{k})}{|\hat{i} - \hat{j} + \hat{k}|^2} = \frac{4}{3}(\hat{i} - \hat{j} + \hat{k}) \end{aligned}$$

11.2 Vector product

The vector product or cross product of any two vectors \vec{A} and \vec{B} , denoted as


$\vec{A} \times \vec{B}$ (read \vec{A} cross \vec{B}) is defined as :

$$\vec{A} \times \vec{B} = AB \sin \theta \hat{n}$$

Here θ is the angle between the vectors and the direction \hat{n} is given by the right - hand - thumb rule.

Right - Hand - Thumb Rule :

To find the direction of \hat{n} , draw the two vectors \vec{A} and \vec{B} with both the tails coinciding. Now place your stretched right palm perpendicular to the plane of \vec{A} and \vec{B} in such a way that the fingers are along the vector \vec{A} and when the fingers are closed they go towards \vec{B} . The direction of the thumb gives the direction of \hat{n} .

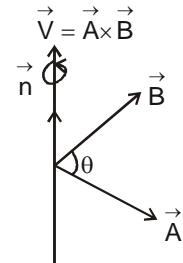

Properties :

- Vector product of two vectors is always a vector perpendicular to the plane containing the two vectors i.e. orthogonal to both the vectors \vec{A} and \vec{B} , though the vectors \vec{A} and \vec{B} may or may not be orthogonal.
- Vector product of two vectors is not commutative i.e. $\vec{A} \times \vec{B} \neq \vec{B} \times \vec{A}$

$$\text{But } |\vec{A} \times \vec{B}| = |\vec{B} \times \vec{A}| = AB \sin \theta$$

- The vector product is distributive when the order of the vectors is strictly maintained i.e.

$$\vec{A} \times (\vec{B} + \vec{C}) = \vec{A} \times \vec{B} + \vec{A} \times \vec{C}$$

- The magnitude of vector product of two vectors will be maximum when $\sin \theta = \max = 1$. i.e. $\theta = 90^\circ$

$$|\vec{A} \times \vec{B}|_{\max} = AB$$


- The magnitude of vector product of two non-zero vectors will be minimum when $|\sin \theta| = \min = 0$, i.e., $\theta = 0^\circ$ or 180° and $|\vec{A} \times \vec{B}|_{\min} = 0$ i.e., if the vector product of two non-zero vectors vanishes, the vectors are collinear.
- The self cross product i.e. product of a vector by itself vanishes i.e. is a null vector.

$$\vec{A} \times \vec{A} = AA \sin 0^\circ \hat{n} = \vec{0}$$

- In case of unit vector \hat{n} , $\hat{n} \times \hat{n} = \vec{0} \Rightarrow \hat{i} \times \hat{i} = \hat{j} \times \hat{j} = \hat{k} \times \hat{k} = \vec{0}$

- In case of orthogonal unit vectors \hat{i}, \hat{j} and \hat{k} in accordance with right-hand-thumb-rule,

$$\hat{i} \times \hat{j} = \hat{k} \quad \hat{j} \times \hat{k} = \hat{i} \quad \hat{k} \times \hat{i} = \hat{j}$$

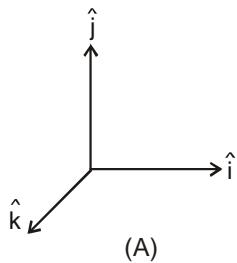

- In terms of components, $\vec{A} \times \vec{B} = \begin{vmatrix} \hat{i} & \hat{j} & \hat{k} \\ A_x & A_y & A_z \\ B_x & B_y & B_z \end{vmatrix}$

$$\vec{A} \times \vec{B} = \hat{i}(A_y B_z - A_z B_y) + \hat{j}(A_z B_x - A_x B_z) + \hat{k}(A_x B_y - A_y B_x)$$

Ex.22 \vec{A} is Eastwards and \vec{B} is downwards. Find the direction of $\vec{A} \times \vec{B}$?

Sol. Applying right hand thumb rule we find that $\vec{A} \times \vec{B}$ is along North.

Ex.23 If $\vec{A} \cdot \vec{B} = |\vec{A} \times \vec{B}|$, find angle between \vec{A} and \vec{B}

Sol. $\vec{A} \cdot \vec{B} = |\vec{A} \times \vec{B}| \quad AB \cos \theta = AB \sin \theta \quad \tan \theta = 1 \quad \Rightarrow \theta = 45^\circ$

Ex.24 $\vec{A} \times \vec{B} = AB \sin \theta \hat{n} \Rightarrow \hat{n} = \frac{\vec{A} \times \vec{B}}{AB \sin \theta}$ here \hat{n} is perpendicular to both \vec{A} and \vec{B}

Ex.25 Find $\vec{A} \times \vec{B}$ if $\vec{A} = \hat{i} - 2\hat{j} + 4\hat{k}$ and $\vec{B} = 2\hat{i} - \hat{j} + 2\hat{k}$

Sol. $\vec{A} \times \vec{B} = \begin{vmatrix} \hat{i} & \hat{j} & \hat{k} \\ 1 & -2 & 4 \\ 3 & -1 & 2 \end{vmatrix} = \hat{i}(-4 - (-4)) - \hat{j}(2 - 12) + \hat{k}(1 - (-6)) = 10\hat{j} + 5\hat{k}$

Ex.26 (i) \vec{A} is North-East and \vec{B} is down wards, find the direction of $\vec{A} \times \vec{B}$


(ii) Find $\vec{B} \times \vec{A}$ if $\vec{A} = 3\hat{i} - 2\hat{j} + 6\hat{k}$ and $\vec{B} = \hat{i} - \hat{j} + \hat{k}$

Ans. (i) North - West. (ii) $-4\hat{i} - 3\hat{j} + \hat{k}$

12. POSITION VECTOR :

Position vector for a point is vector for which tail is origin & head is the given point itself.

Position vector of a point defines the position of the point w.r.t. the origin.

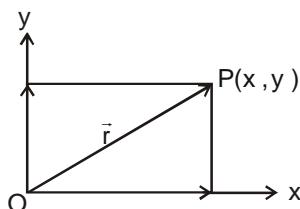

$$\overrightarrow{OP} = \vec{r}$$

$$\vec{r} = x\hat{i} + y\hat{j}$$

13. DISPLACEMENT VECTOR :


Change in position vector of particle is known as displacement vector.

$$\overrightarrow{OP} = \vec{r}_1 = x_1\hat{i} + y_1\hat{j}$$

$$\overrightarrow{OQ} = \vec{r}_2 = x_2\hat{i} + y_2\hat{j}$$

$$\overrightarrow{PQ} = \vec{r}_2 - \vec{r}_1 = (x_2 - x_1)\hat{i} + (y_2 - y_1)\hat{j}$$

Thus we can represent a vector in space starting from (x_1, y_1) & ending at (x_2, y_2) as $(x_2 - x_1)\hat{i} + (y_2 - y_1)\hat{j}$

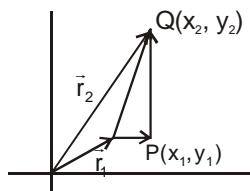

CALCULUS

14. **CONSTANTS :** They are fixed real number which value does not change

Ex. 3, e, a, -1, etc.

15. **VARIABLE :**

Somthing that is likly to vary, somthing that is subject to variation.

or

A quantity that can assume any of a set of value.

Types of variables.

- (i) Independent variables : Indepedent variables is typically the variable being manipulated or change
- (ii) dependent variables : The dependent variables is the object result of the independent variable being manipulated.

Ex. $y = x^2$

here y is dependent variable and x is independent variable

16. **FUNCTION :**

Function is a rule of relationship between two variables in which one is assumed to be dependent and the other independent variable.

The temperatures at which water boils depends on the elevation above sea level (the boiling point drops as you ascend). Here elevation above sea level is the independent & temperature is the dependent variable.

The interest paid on a cash investment depends on the length of time the investment is held. Here time is the independent and interest is the dependent variable.

In each case, the value of one variable quantity (dependent variable), which we might call y , depends on the value of another variable quantity (independent variable), which we might call x . Since the value of y is completely determined by the value of x , we say that y is a function of x and represent it mathematically as $y = f(x)$.



all possible values of independent variables (x) are called domain of function.

all possible values of dependent variable (y) are called Range of fucntion.

Think of function f as a kind machine that produces an output value $f(x)$ in its range whenever we feed it an input value x from its domain (figure).

When we study circles, we usually call the area A and the radius r . Since area depends on radius, we say that A is a function of r , $A = f(r)$. The equation $A = \pi r^2$ is a rule that tells how to calculate a unique (single) output value of A for each possible input value of the radius r .

$A = f(x) = \pi r^2$. (Here the rule of relationship which describes the function may be described as square & multiply by π)

$$\text{if } r = 1 \quad A = \pi$$

$$\text{if } r = 2 \quad A = 4\pi$$

$$\text{if } r = 3 \quad A = 9\pi$$

The set of all possible input values for the radius is called the domain of the function. The set of all output values of the area is the range of the function.

We usually denote functions in one of the two ways :

1. By giving a formula such as $y = x^2$ that uses a dependent variable y to denote the value of the function.
2. By giving a formula such as $f(x) = x^2$ that defines a function symbol f to name the function.
Strictly speaking, we should call the function f and not $f(x)$.
 $y = \sin x$. Here the function is y since, x is the independent variable.

Ex.27 The volume V of ball (solid sphere) of radius r is given by the function $V(r) = \frac{4}{3}\pi r^3$

The volume of a ball of radius 3m is ?

$$\text{Sol. } V(3) = \frac{4}{3}\pi(3)^3 = 36\pi m^3.$$

Ex.28 Suppose that the function F is defined for all real numbers r by the formula.

$$F(r) = 2(r - 1) + 3.$$

Evaluate F at the input values 0, $2x + 2$, and $F(2)$.

Sol. In each case we substitute the given input value for r into the formula for F :

$$F(0) = 2(0 - 1) + 3 = -2 + 3 = 1$$

$$F(2) = 2(2 - 1) + 3 = 2 + 3 = 5$$

$$F(2x + 2) = 2(2x + 2 - 1) + 3 = 2x + 5$$

$$F(F(2)) = F(5) = 2(5 - 1) + 3 = 11$$

Ex.29 function $f(x)$ is defined as

$$f(x) = x^2 + 3, \text{ Find}$$

$f(0), f(1), f(x^2), f(x + 1)$ and $f(f(1))$

$$\begin{aligned} \text{Sol. } f(0) &= 0^2 + 3 &= 3 \\ f(1) &= 1^2 + 3 &= 4 \\ f(x^2) &= (x^2)^2 + 3 &= x^4 + 4 \\ f(x + 1) &= (x + 1)^2 + 3 &= x^2 + 2x + 4 \\ f(f(1)) &= f(4) &= 4^2 + 3 = 19 \end{aligned}$$

17. DIFFERENTIATION

Finite difference :

The finite difference between two values of a physical is represented by Δ notation.

For example :

Difference in two values of y is written as Δy as given in the table below.

y_2	100	100	100
y_1	50	99	99.5
$\Delta y = y_2 - y_1$	50	1	0.5

Infinitey small difference :

The infinitely small difference means very-very small difference. And this difference is represented by 'd' notation insted of ' Δ '.

For example infinitely small difference in the values of y is written as 'dy'

if $y_2 = 100$ and $y_1 = 99.99999999999999.....$

then $dy = 0.000000000000000.....00001$

Definition of differentiation

Another name of differentiation is derivative. Suppose y is a function of x or $y = f(x)$

Differentiation of y with respect to x is denoted by symbols $f'(x)$

where $f'(x) = \frac{dy}{dx}$; dx is very small change in x and dy is corresponding very small change in y .

Notation : There are many ways to denote the derivative of function $y = f(x)$, the most common notations are these :

y'	"y prime"	Nice and brief and does not name the independent variable
$\frac{dy}{dx}$	" dy by dx"	Names the variables and uses d for derivative
$\frac{df}{dx}$	" df by dx"	Emphasizes the function's name
$\frac{d}{dx}f(x)$	" d by dx of f "	Emphasizes the idea that differentiation is an operation performed on f .
$D_x f$	" dx of f "	A common operator notation
\cdot y	" y dot"	One of Newton's notations, now common for time derivative i.e. dy/dt

Average rates of change :

Given an arbitrary function $y = f(x)$ we calculate the average rate of change of y with respect to x over the interval $(x, x + \Delta x)$ by dividing the change in value of y , i.e., $\Delta y = f(x + \Delta x) - f(x)$, by length of interval Δx over which the change occurred.

The average rate of change of y with respect to x over the interval $[x, x + \Delta x]$


$$= \frac{\Delta y}{\Delta x} = \frac{f(x + \Delta x) - f(x)}{\Delta x}$$

Geometrically

$$\frac{\Delta y}{\Delta x} = \frac{QR}{PR} = \tan \theta = \text{Slope of the line PQ}$$

$$\text{In triangle QPR } \tan \theta = \frac{\Delta y}{\Delta x}$$

therefore we can say that average rate of change of y with respect to x is equal to slope of the line joining P & Q .

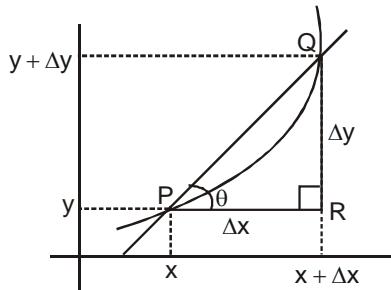

The derivative of a function

We know that Average rate of change of y w.r.t x is -

$$\frac{\Delta y}{\Delta x} = \frac{f(x + \Delta x) - f(x)}{\Delta x}$$

If the limit of this ratio exists as $\Delta x \rightarrow 0$, then it is called the derivative of given function $f(x)$ and is denoted as


$$f'(x) = \frac{dy}{dx} = \lim_{\Delta x \rightarrow 0} \frac{f(x + \Delta x) - f(x)}{\Delta x}$$

18. GEOMETRICAL MEANING OF DIFFERENTIATION :

The geometrical meaning of differentiation is very much useful in the analysis of graphs in physics. To understand the geometrical meaning of derivatives we should have knowledge of secant and tangent to a curve.

Secant and Tangent to a Curve

Secant : - A secant to a curve is a straight line, which intersects the curve at any two points.

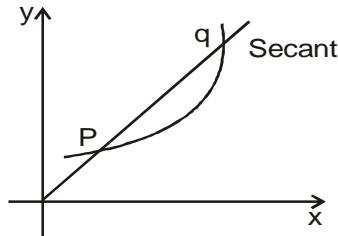

Tangent :

A tangent is straight line, which touches the curve at a particular point. Tangent is limiting case of secant which intersects the curve at two overlapping point.

In the figure - 1 shown, if value of Δx is gradually reduced then the point Q will move nearer to the point P. If the process is continuously repeated (Figure-2) value of Δx will be infinitely small and secant PQ to the given curve will become a tangent at point P.

Therefore

$$\lim_{\Delta x \rightarrow 0} \left(\frac{\Delta y}{\Delta x} \right) = \frac{dy}{dx} = \tan \theta$$

we can say that differentiation of y with respect to x, i.e. $\left(\frac{dy}{dx} \right)$ is equal to slope of the tangent at point P (x, y)

$$\text{or } \tan \theta = \frac{dy}{dx}$$

(From fig-1 the average rate change of y from x to $x + \Delta x$ is identical with the slope of secant PQ)

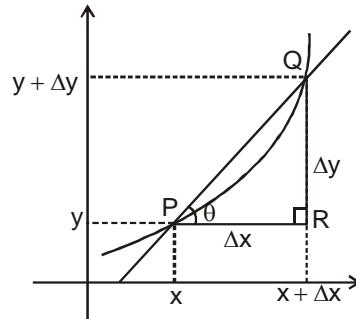


Figure-1

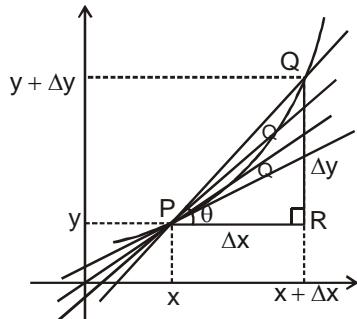


Figure-2

Rule No. 1 Derivative Of A Constant

The first rule of differentiation is that the derivative of every constant function is zero.

If c is constant, then $\frac{d}{dx}c = 0$

$$\text{Ex. 30 } \frac{d}{dx}(8) = 0, \quad \frac{d}{dx}\left(-\frac{1}{2}\right) = 0, \quad \frac{d}{dx}(\sqrt{3}) = 0$$

Rule No.2 Power Rule

If n is a real number, then $\frac{d}{dx} x^n = nx^{n-1}$

To apply the power Rule, we subtract 1 from the original exponent (n) and multiply the result by n .

Ex.31	f	x	x^2	x^3	x^4
	f'	1	2x	3x ²	4x ³

$$\text{Ex.32 (i)} \frac{d}{dx}\left(\frac{1}{x}\right) = \frac{d}{dx}(x^{-1}) = (-1)x^{-2} = -\frac{1}{x^2} \quad \text{(ii)} \frac{d}{dx}\left(\frac{4}{x^3}\right) = 4\frac{d}{dx}(x^{-3}) = 4(-3)x^{-4} = -\frac{12}{x^4}$$

$$\text{Ex.33 (a)} \frac{d}{dx}(x^{1/2}) = \frac{1}{2}x^{-1/2} = \frac{1}{2\sqrt{x}}$$

Function defined for $x \geq 0$ derivative defined only for $x > 0$

$$\text{(b)} \frac{d}{dx}(x^{1/5}) = \frac{1}{5}x^{-4/5}$$

Function defined for $x \geq 0$ derivative not defined at $x = 0$

Rule No.3 The Constant Multiple Rule

If u is a differentiable function of x , and c is a constant, then $\frac{d}{dx}(cu) = c \frac{du}{dx}$

In particular, if n is a positive integer, then $\frac{d}{dx}(cx^n) = cn x^{n-1}$

Ex.34 The derivative formula

$$\frac{d}{dx}(3x^2) = 3(2x) = 6x$$

says that if we rescale the graph of $y = x^2$ by multiplying each y-coordinate by 3, then we multiply the slope at each point by 3.

Ex.35 A useful special case

The derivative of the negative of a differentiable function is the negative of the function's derivative. Rule 3 with $c = -1$ gives.

$$\frac{d}{dx}(-u) = \frac{d}{dx}(-1 \cdot u) = -1 \cdot \frac{d}{dx}(u) = -\frac{d}{dx}(u)$$

Rule No.4 The Sum Rule

The derivative of the sum of two differentiable functions is the sum of their derivatives.

If u and v are differentiable functions of x , then their sum $u + v$ is differentiable at every point where u and v are both differentiable functions in their derivatives.

$$\frac{d}{dx}(u - v) = \frac{d}{dx}[u + (-1)v] = \frac{du}{dx} + (-1)\frac{dv}{dx} = \frac{du}{dx} - \frac{dv}{dx}$$

The sum Rule also extends to sums of more than two functions, as long as there are only finite functions in the sum. If u_1, u_2, \dots, u_n are differentiable at x , then so if $u_1 + u_2 + \dots + u_n$, then

$$\frac{d}{dx}(u_1 + u_2 + \dots + u_n) = \frac{du_1}{dx} + \frac{du_2}{dx} + \dots + \frac{du_n}{dx}$$

Ex.36 (a) $y = x^4 + 12x$

$$\frac{dy}{dx} = \frac{d}{dx}(x^4) + \frac{d}{dx}(12x)$$

$$= 4x^3 + 12$$

(b) $y = x^3 + \frac{4}{3}x^2 - 5x + 1$

$$\begin{aligned}\frac{dy}{dx} &= \frac{d}{dx}x^3 + \frac{d}{dx}\left(\frac{4}{3}x^2\right) - \frac{d}{dx}(5x) + \frac{d}{dx}(1) \\ &= 3x^2 + \frac{4}{3} \cdot 2x - 5 + 0 \\ &= 3x^2 + \frac{8}{3}x - 5\end{aligned}$$

Notice that we can differentiate any polynomial term by term, the way we differentiated the polynomials in above example.

Rule No. 5 The Product Rule

If u and v are differentiable at x , then if their product uv is considered, then $\frac{d}{dx}(uv) = u\frac{dv}{dx} + v\frac{du}{dx}$.

The derivative of the product uv is u times the derivative of v plus v times the derivative of u . In prime notation

$$(uv)' = uv' + vu'.$$

While the derivative of the sum of two functions is the sum of their derivatives, the derivative of the product of two functions is not the product of their derivatives. For instance,

$$\frac{d}{dx}(x \cdot x) = \frac{d}{dx}(x^2) = 2x, \quad \text{while } \frac{d}{dx}(x) \cdot \frac{d}{dx}(x) = 1 \cdot 1 = 1, \text{ which is wrong}$$

Ex.37 Find the derivatives of $y = (x^2 + 1)(x^3 + 3)$

Sol. Using the product Rule with $u = x^2 + 1$ and $v = x^3 + 3$, we find

$$\begin{aligned}\frac{d}{dx}[(x^2 + 1)(x^3 + 3)] &= (x^2 + 1)(3x^2) + (x^3 + 3)(2x) \\ &= 3x^4 + 3x^2 + 2x^4 + 6x = 5x^4 + 3x^2 + 6x\end{aligned}$$

Example can be done as well (perhaps better) by multiplying out the original expression for y and differentiating the resulting polynomial. We now check :

$$y = (x^2 + 1)(x^3 + 3) = x^5 + x^3 + 3x^2 + 3$$

$$\frac{dy}{dx} = 5x^4 + 3x^2 + 6x$$

This is in agreement with our first calculation.

There are times, however, when the product Rule must be used. In the following examples. We have only numerical values to work with.

Ex.38 Let $y = uv$ be the product of the functions u and v . Find $y'(2)$ if $u(2) = 3$, $u'(2) = -4$, $v(2) = 1$, and $v'(2) = 2$.

Sol. From the Product Rule, in the form

$$y' = (uv)' = uv' + vu',$$

we have $y'(2) = u(2)v'(2) + v(2)u'(2)$

$$= (3)(2) + (1)(-4) = 6 - 4 = 2$$

Rule No.6 The Quotient Rule

If u and v are differentiable at x , and $v(x) \neq 0$, then the quotient u/v is differentiable at x ,

$$\text{and } \frac{d}{dx}\left(\frac{u}{v}\right) = \frac{v\frac{du}{dx} - u\frac{dv}{dx}}{v^2}$$

Just as the derivative of the product of two differentiable functions is not the product of their derivatives, the derivative of the quotient of two functions is not the quotient of their derivatives.

Ex.39 Find the derivative of $y = \frac{t^2 - 1}{t^2 + 1}$

Sol. We apply the Quotient Rule with $u = t^2 - 1$ and $v = t^2 + 1$

$$\begin{aligned} \frac{dy}{dt} &= \frac{(t^2 + 1)2t - (t^2 - 1).2t}{(t^2 + 1)^2} & \left[\text{As } \frac{d}{dt}\left(\frac{u}{v}\right) = \frac{v(du/dt) - u(dv/dt)}{v^2} \right] \\ &= \frac{2t^3 + 2t - 2t^3 + 2t}{(t^2 + 1)^2} = \frac{4t}{(t^2 + 1)^2} \end{aligned}$$

Rule No. 7 Derivative Of Sine Function

$$\frac{d}{dx}(\sin x) = \cos x$$

Ex.40 (a) $y = x^2 - \sin x : \frac{dy}{dx} = 2x - \frac{d}{dx}(\sin x) = 2x - \cos x$ Difference Rule

$$\begin{aligned} (\text{b}) \quad y &= x^2 \sin x : \frac{dy}{dx} = x^2 \frac{d}{dx}(\sin x) + 2x \sin x & \text{Product Rule} \\ &= x^2 \cos x + 2x \sin x \end{aligned}$$

$$\begin{aligned} (\text{c}) \quad y &= \frac{\sin x}{x} : \frac{dy}{dx} = \frac{x \cdot \frac{d}{dx}(\sin x) - \sin x \cdot 1}{x^2} & \text{Quotient Rule} \\ &= \frac{x \cos x - \sin x}{x^2} \end{aligned}$$

Rules No.8 Derivative Of Cosine Function

$$\frac{d}{dx}(\cos x) = -\sin x$$

Ex.41 (a) $y = 5x + \cos x$ Sum Rule

$$\frac{dy}{dx} = \frac{d}{dx}(5x) + \frac{d}{dx}(\cos x) = 5 - \sin x$$

(b) $y = \sin x \cos x$

$$\begin{aligned} \frac{dy}{dx} &= \sin x \frac{d}{dx}(\cos x) + \cos x \frac{d}{dx}(\sin x) & \text{Product Rule} \\ &= \sin x(-\sin x) + \cos x(\cos x) \\ &= \cos^2 x - \sin^2 x = \cos 2x \end{aligned}$$

Rule No. 9 Derivatives Of Other Trigonometric Functions

Because $\sin x$ and $\cos x$ are differentiable functions of x , the related functions

$$\tan x = \frac{\sin x}{\cos x} ; \quad \sec x = \frac{1}{\cos x}$$

$$\cot x = \frac{\cos x}{\sin x} ; \quad \operatorname{cosec} x = \frac{1}{\sin x}$$

are differentiable at every value of x at which they are defined. Their derivatives, calculated from the Quotient Rule, are given by the following formulas.

$$\frac{d}{dx}(\tan x) = \sec^2 x ; \quad \frac{d}{dx}(\sec x) = \sec x \tan x$$

$$\frac{d}{dx}(\cot x) = -\operatorname{cosec}^2 x ; \quad \frac{d}{dx}(\operatorname{cosec} x) = -\operatorname{cosec} x \cot x$$

Ex.42 Find dy/dx if $y = \tan x$.

$$\begin{aligned} \text{Sol. } \frac{d}{dx}(\tan x) &= \frac{d}{dx}\left(\frac{\sin x}{\cos x}\right) = \frac{\cos x \frac{d}{dx}(\sin x) - \sin x \frac{d}{dx}(\cos x)}{\cos^2 x} \\ &= \frac{\cos x \cos x - \sin x(-\sin x)}{\cos^2 x} = \frac{\cos^2 x + \sin^2 x}{\cos^2 x} = \frac{1}{\cos^2 x} = \sec^2 x \end{aligned}$$

$$\text{Ex.43 (a) } \frac{d}{dx}(3x + \cot x) = 3 + \frac{d}{dx}(\cot x) = 3 - \operatorname{cosec}^2 x$$

$$\begin{aligned} \text{(b) } \frac{d}{dx}\left(\frac{2}{\sin x}\right) &= \frac{d}{dx}(2\operatorname{cosec} x) = 2 \frac{d}{dx}(\operatorname{cosec} x) \\ &= 2(-\operatorname{cosec} x \cot x) = -2 \operatorname{cosec} x \cot x \end{aligned}$$

Rule No. 10 Derivative Of Logarithm And Exponential Functions

$$\frac{d}{dx}(\log_e x) = \frac{1}{x}, \quad \frac{d}{dx}(e^x) = e^x$$

Ex.44 $y = e^x \cdot \log_e(x)$

$$\frac{dy}{dx} = \frac{d}{dx}(e^x) \cdot \log_e(x) + \frac{d}{dx}[\log_e(x)]e^x \Rightarrow \frac{dy}{dx} = e^x \cdot \log_e(x) + \frac{e^x}{x}$$

Rule No. 11 Chain Rule Or 'Outside Inside' Rule

$$\frac{dy}{dx} = \frac{dy}{du} \cdot \frac{du}{dx}$$

It sometimes helps to think about the Chain Rule the following way. If $y = f(g(x))$,

$$\frac{dy}{dx} = f'[g(x)] \cdot g'(x)$$

In words : To find dy/dx , differentiate the "outside" function f and leave the "inside" $g(x)$ alone; then multiply by the derivative of the inside.

We now know how to differentiate $\sin x$ and $x^2 - 4$, but how do we differentiate a composite like $\sin(x^2 - 4)$?

The answer is, with the Chain Rule, which says that the derivative of the composite of two differentiable functions is the product of their derivatives evaluated at appropriate points. The Chain Rule is probably the most widely used differentiation rule in mathematics. This section describes the rule and how to use it. We begin with examples.

Ex.45 The function $y = 6x - 10 = 2(3x - 5)$ is the composite of the functions $y = 2u$ and $u = 3x - 5$. How are the derivatives of these three functions related?

Sol. We have $\frac{dy}{dx} = 6, \frac{dy}{du} = 2, \frac{du}{dx} = 3$

$$\text{Since } 6 = 2 \times 3 \quad \frac{dy}{dx} = \frac{dy}{du} \cdot \frac{du}{dx}$$

$$\text{Is it an accident that } \frac{dy}{dx} = \frac{dy}{du} \cdot \frac{du}{dx} ?$$

If we think of the derivative as a rate of change, our intuition allows us to see that this relationship is reasonable. For $y = f(u)$ and $u = g(x)$, if y changes twice as fast as u and u changes three times as fast as x , then we expect y to change six times as fast as x .

Ex.46 Let us try this again on another function.

$$y = 9x^4 + 6x^2 + 1 = (3x^2 + 1)^2$$

is the composite $y = u^2$ and $u = 3x^2 + 1$. Calculating derivatives. We see that

$$\frac{dy}{du} \cdot \frac{du}{dx} = 2u \cdot 6x = 2(3x^2 + 1) \cdot 6x = 36x^3 + 12x$$

$$\text{and } \frac{dy}{dx} = \frac{d}{dx}(9x^4 + 6x^2 + 1) = 36x^3 + 12x$$

$$\text{Once again, } \frac{dy}{du} \cdot \frac{du}{dx} = \frac{dy}{dx}$$

The derivative of the composite function $f(g(x))$ at x is the derivative of f at $g(x)$ times the derivative of g at x .

Ex.47 Find the derivation of $y = \sqrt{x^2 + 1}$

Sol. Here $y = f(g(x))$, where $f(u) = \sqrt{u}$ and $g(x) = x^2 + 1$. Since the derivatives of f and g are

$$f'(u) = \frac{1}{2\sqrt{u}} \text{ and } g'(x) = 2x,$$

the Chain Rule gives

$$\frac{dy}{dx} = \frac{d}{dx} f(g(x)) = f'(g(x)) \cdot g'(x) = \frac{1}{2\sqrt{g(x)}} \cdot g'(x) = \frac{1}{2\sqrt{x^2 + 1}} \cdot (2x) = \frac{x}{\sqrt{x^2 + 1}}$$

$$\begin{aligned} \text{Ex.48} \quad & \frac{d}{dx} \sin(x^2 + x) = \cos(x^2 + x) \cdot (2x + 1) \\ & \begin{array}{c} \text{outside} \quad \text{derivative of} \\ | \quad \quad \quad | \\ \frac{d}{dx} \underbrace{\sin(x^2 + x)}_{\text{Inside}} = \underbrace{\cos(x^2 + x)}_{\text{Inside}} \cdot \underbrace{(2x + 1)}_{\substack{\text{derivative} \\ \text{left along} \\ \text{of the inside}}} \end{array} \end{aligned}$$

$$\text{Ex.49 (a)} \quad \frac{d}{dx} (1-x^2)^{1/4} = \frac{1}{4} (1-x^2)^{-3/4} (-2x) \quad u = 1-x^2 \text{ and } n = 1/4$$

(Function defined) on $[-1, 1]$

$$= \frac{-x}{2(1-x^2)^{3/4}} \text{ (derivative defined only on } (-1, 1))$$

$$(b) \frac{d}{dx} \sin 2x = \cos 2x \cdot 2 = 2 \cos 2x$$

$$(c) \frac{d}{dt} (A \sin(\omega t + \phi)) = A \cos(\omega t + \phi) \cdot \omega = A \omega \cos(\omega t + \phi)$$

Rule No. 12 Power Chain Rule

* If $\frac{d}{dx} u^n = n u^{n-1} \frac{du}{dx}$

$$\text{Ex.50 } \frac{d}{dx} \left(\frac{1}{3x-2} \right) = \frac{d}{dx} (3x-2)^{-1} = -1 (3x-2)^{-2} \frac{d}{dx} (3x-2) \\ = -1 (3x-2)^{-2} (3) = -\frac{3}{(3x-2)^2}$$

In part (d) we could also have found the derivation with the Quotient Rule.

$$\text{Ex.51 (a)} \frac{d}{dx} (Ax+B)^n$$

Sol. Here $u = Ax + B, \frac{du}{dx} = A$

$$\therefore \frac{d}{dx} (Ax+B)^n = n(Ax+B)^{n-1} \cdot A$$

$$(b) \frac{d}{dx} \sin(Ax+B) = \cos(Ax+B) \cdot A \quad (c) \frac{d}{dx} \log(Ax+B) = \frac{1}{Ax+B} \cdot A$$

$$(d) \frac{d}{dx} \tan(Ax+B) = \sec^2(Ax+B) \cdot A \quad (e) \frac{d}{dx} e^{(Ax+B)} = e^{(Ax+B)} \cdot A$$

Note : These results are important

19. DOUBLE DIFFERENTIATION

If f is differentiable function, then its derivative f' is also a function, so f' may have a derivative of its own, denoted by $(f')' = f''$. This new function f'' is called the second derivative of because it is the derivative of the derivative of f . Using Leibniz notation, we write the second derivative of $y = f(x)$ as

$$\frac{d}{dx} \left(\frac{dy}{dx} \right) = \frac{d^2y}{dx^2}$$

Another notation is $f''(x) = D_2 f(x)$.

Ex.52 If $f(x) = x \cos x$, find $f''(x)$

Sol. Using the Product Rule, we have $f'(x) = x \frac{d}{dx} (\cos x) + \cos x \frac{d}{dx}(x) = -x \sin x + \cos x$

To find $f''(x)$ we differentiate $f'(x)$:

$$f''(x) = \frac{d}{dx} (-x \sin x + \cos x) = -x \frac{d}{dx} (\sin x) + \sin x \frac{d}{dx} (-x) + \frac{d}{dx} (\cos x) \\ = -x \cos x - \sin x - \sin x = -x \cos x - 2 \sin x$$

20. APPLICATION OF DERIVATIVE DIFFERENTIATION AS A RATE OF CHANGE

$\frac{dy}{dx}$ is rate of change of 'y' with respect to 'x' :

For examples :

(i) $v = \frac{dx}{dt}$ this means velocity 'v' is rate of change of displacement 'x' with respect to time 't'

(ii) $a = \frac{dv}{dt}$ this means acceleration 'a' is rate of change of velocity 'v' with respect to time 't'.

(iii) $F = \frac{dp}{dt}$ this means force 'F' is rate of change of momentum 'p' with respect to time 't'.

(iv) $\tau = \frac{dL}{dt}$ this means torque ' τ ' is rate of change of angular momentum 'L' with respect to time 't'

(v) Power = $\frac{dW}{dt}$ this means power 'P' is rate of change of work 'W' with respect to time 't'

The area A of a circle is related to its diameter by the equation $A = \frac{\pi}{4}D^2$.

$$\frac{dA}{dD} = \frac{\pi}{4} 2D = \frac{\pi D}{2}$$

When $D = 10\text{m}$, the area is changing at rate $(\pi/2) = 5\pi \text{ m}^2/\text{m}$. This mean that a small change ΔD m in the diameter would result in a changed of about $5\pi \Delta D \text{ m}^2$ in the area of the circle.

Physical Example:

Ex.54 Boyle's Law state that when a sample of gas is compressed at a constant temperature, the product of the pressure and the volume remains constant : $PV = C$. Find the rate of change of volume with respect to pressure.

$$\text{Sol. } \frac{dV}{dP} = -\frac{C}{P^2}$$

Ex.55 (a) Find the average rate of change of the area of a circle with respect to its radius r as r changed from

(b) Find the instantaneous rate of change when $r = 2$.

(c) Show that the rate of change of the area of a circle with respect to its radius (at any r) is equal to the circumference of the circle. Try to explain geometrically when this is true by drawing a circle whose radius is increased by an amount Δr . How can you approximate the resulting change in area ΔA if Δr is small?

Sol. (a) (i) 5π (ii) 4.5π (iii) 4.1π


(b) 4 π

$$(c) \Delta A \approx 2\pi r \Delta r$$

21. MAXIMA & MINIMA

Suppose a quantity y depends on another quantity x in a manner shown in figure. It becomes maximum at x_1 and minimum at x_2 . At these points the tangent to the curve is parallel to the x -axis and hence its slope is $\tan \theta = 0$. Thus, at a maxima or a minima slope

$$\Rightarrow \frac{dy}{dx} = 0$$

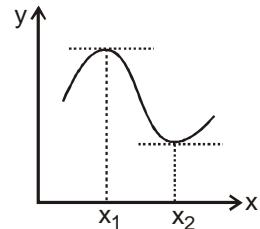

Maxima


Just before the maximum the slope is positive, at the maximum it

is zero and just after the maximum it is negative. Thus, $\frac{dy}{dx}$ decrease

at a maximum and hence the rate of change of $\frac{dy}{dx}$ is negative at

a maximum i.e., $\frac{d}{dx}\left(\frac{dy}{dx}\right) < 0$ at maximum. The quantity $\frac{d}{dx}\left(\frac{dy}{dx}\right)$ is the rate of change of the slope. It is written

as $\frac{d^2y}{dx^2}$. Conditions for maxima are : (a) $\frac{dy}{dx} = 0$ (b) $\frac{d^2y}{dx^2} < 0$

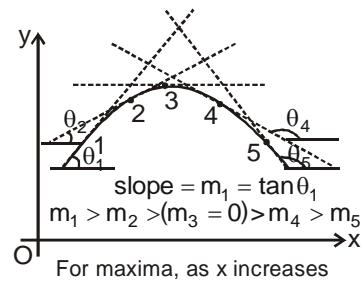

Minima


Similarly, at a minimum the slope changes from negative to positive,

Hence with the increases of x . The slope is increasing that means the rate of change of slope with respect to x is positive.

Hence $\frac{d}{dx}\left(\frac{dy}{dx}\right) > 0$

Conditions for minima are :

$$(a) \frac{dy}{dx} = 0 \quad (b) \frac{d^2y}{dx^2} > 0$$

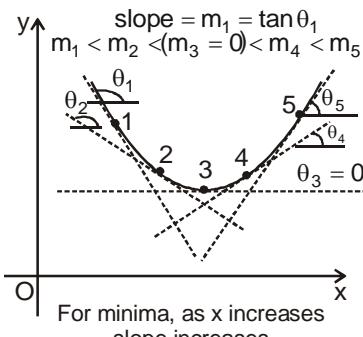

Quite often it is known from the physical situation whether the quantity is a maximum or a minimum.

The test on $\frac{d^2y}{dx^2}$ may then be omitted.

Ex.56 Find maximum or minimum values of the functions :

$$(A) y = 25x^2 + 5 - 10x \quad (B) y = 9 - (x - 3)^2$$

Sol. (A) For maximum and minimum value, we can put $\frac{dy}{dx} = 0$

$$\text{or } \frac{dy}{dx} = 50x - 10 = 0 \therefore x = \frac{1}{5}$$

$$\text{Further, } \frac{d^2y}{dx^2} = 50$$

or $\frac{d^2y}{dx^2}$ has positive value at $x = \frac{1}{5}$. Therefore, y has minimum value at $x = \frac{1}{5}$. Therefore, y has

minimum value at $x = \frac{1}{5}$. Substituting $x = \frac{1}{5}$ in given equation, we get

$$y_{\min} = 25\left(\frac{1}{5}\right)^2 + 5 - 10\left(\frac{1}{5}\right) = 4$$

(B) $y = 9 - (x - 3)^2 = 9 - x^2 - 9 + 6x$
or $y = 6x - x^2$

$$\therefore \frac{dy}{dx} = 6 - 2x$$

For minimum or maximum value of y we will substitute $\frac{dy}{dx} = 0$

or $6 - 2x = 0$
 $x = 3$

To check whether value of y is maximum or minimum at $x = 3$ we will have to check whether $\frac{d^2y}{dx^2}$ is positive or negative.

$$\frac{d^2y}{dx^2} = -2$$

or $\frac{d^2y}{dx^2}$ is negative at $x = 3$. Hence, value of y is maximum. This maximum value of y is,
 $y_{\max} = 9 - (3 - 3)^2 = 9$

22. INTEGRATION

Definitions :

A function $F(x)$ is a antiderivative of a function $f(x)$ if

$$F'(x) = f(x)$$

for all x in the domain of f . The set of all antiderivatives of f is the indefinite integral of f with respect to x , denoted by

$$\int f(x) dx$$

The symbol \int is an integral sign. The function f is the integrand of the integral and x is the variable of integration.

For example $f(x) = x^3$ then $f'(x) = 3x^2$

So the integral of $3x^2$ is x^3

Similarly if $f(x) = x^3 + 4$

there for general integral of $3x^2$ is $x^3 + c$ where c is a constant

One antiderivative F of a function f , the other antiderivatives of f differ from F by a constant. We indicate this in integral notation in the following way :

$$\int f(x) dx = F(x) + C \quad \dots\dots (i)$$

The constant C is the constant of integration or arbitrary constant, Equation (1) is read, "The indefinite integral of f with respect to x is $F(x) + C$." When we find $F(x) + C$, we say that we have integrated f and evaluated the integral.

Ex.57 Evaluate $\int 2x \, dx$

Sol. $\int 2x \, dx = x^2 + C$

an antiderivative of $2x$
the arbitrary constant

The formula $x^2 + C$ generates all the antiderivatives of the function $2x$. The function $x^2 + 1$, $x^2 - \pi$, and $x^2 + \sqrt{2}$ are all antiderivatives of the function $2x$, as you can check by differentiation.

Many of the indefinite integrals needed in scientific work are found by reversing derivative formulas.

Integral Formulas

Indefinite Integral

$$1. \quad \int x^n \, dx = \frac{x^{n+1}}{n+1} + C, \quad n \neq -1, \quad n \text{ rational}$$

$$\int dx = \int 1 \, dx = x + C \quad (\text{special case})$$

$$2. \quad \int \sin kx \, dx = -\frac{\cos kx}{k} + C$$

$$3. \quad \int \cos kx \, dx = \frac{\sin kx}{k} + C$$

$$4. \quad \int \sec^2 x \, dx = \tan x + C$$

$$5. \quad \int \csc^2 x \, dx = -\cot x + C$$

$$6. \quad \int \sec x \tan x \, dx = \sec x + C$$

$$7. \quad \int \csc x \cot x \, dx = -\csc x + C$$

Reversed derived formula

$$\frac{d}{dx} \left(\frac{x^{n+1}}{n+1} \right) = x^n$$

$$\frac{d}{dx}(x) = 1$$

$$\frac{d}{dx} \left(-\frac{\cos kx}{k} \right) = \sin kx$$

$$\frac{d}{dx} \left(\frac{\sin kx}{k} \right) = \cos kx$$

$$\frac{d}{dx} \tan x = \sec^2 x$$

$$\frac{d}{dx} (-\cot x) = \csc^2 x$$

$$\frac{d}{dx} \sec x = \sec x \tan x$$

$$\frac{d}{dx} (-\csc x) = \csc x \cot x$$

Ex.58 Examples based on above formulas :

(a) $\int dx = x + C$

(b) $\int x^5 \, dx = \frac{x^6}{6} + C$

Formula 1 with $n = 5$

(c) $\int \frac{1}{\sqrt{x}} \, dx = \int x^{-1/2} \, dx = 2x^{1/2} + C = 2\sqrt{x} + C$

Formula 1 with $n = -\frac{1}{2}$

(d) $\int \sin 2x \, dx = \frac{-\cos 2x}{2} + C$

Formula 2 with $k = 2$

(e) $\int \cos \frac{x}{2} \, dx = \int \cos \frac{1}{2} x \, dx = \frac{\sin(1/2)x}{1/2} + C = \int 2 \sin \frac{x}{2} \, dx + C$ Formula 3 with $k = \frac{1}{2}$

Ex.59 Right : $\int x \cos x dx = x \sin x + \cos x + C$

Reason : The derivative of the right-hand side is the integrand :

Check : $\frac{d}{dx}(x \sin x + \cos x + C) = x \cos x + \sin x - \sin x + 0 = x \cos x.$

Wrong : $\int x \cos x dx = x \sin x + C$

Reason : The derivative of the right-hand side is not the integrand :

Check : $\frac{d}{dx}(x \sin x + C) = x \cos x + \sin x + 0 \neq x \cos x$

Rule No. 1 Constant Multiple Rule

- A function is an antiderivative of a constant multiple k of a function f if and only if it is k times an antiderivative of f .

$$\int k f(x) dx = k \int f(x) dx$$

Ex.60 $\int 5x^n dx = 5 \int x^n dx = \frac{5(x)^{n+1}}{n+1} + C$

Rule No.2 Sum And Difference Rule

A function is an antiderivative of a sum or difference $f \pm g$ if and only if it is the sum or difference of an antiderivative of f an antiderivative of g .

$$\int [f(x) \pm g(x)] dx = \int f(x) dx \pm \int g(x) dx$$

Ex.61 Term-by-term integration

Evaluate : $\int (x^2 - 2x + 5) dx$

Sol. If we recognize that $(x^3/3) - x^2 + 5x$ is an antiderivative of $x^2 - 2x + 5$, we can evaluate the integral as

$$\int (x^2 - 2x + 5) dx = \underbrace{\frac{x^3}{3} - x^2 + 5x}_\text{antiderivative} + C \quad \text{arbitrary constant}$$

If we do not recognize the antiderivative right away, we can generate it term by term with the sum and difference Rule :

$$\begin{aligned} \int (x^2 - 2x + 5) dx &= \int x^2 dx - \int 2x dx + \int 5 dx \\ &= \frac{x^3}{3} + C_1 - x^2 + C_2 + 5x + C_3 \end{aligned}$$

This formula is more complicated than it needs to be. If we combine C_1 , C_2 and C_3 into a single constant $C = C_1 + C_2 + C_3$, the formula simplifies to

$$\frac{x^3}{3} - x^2 + 5x + C$$

and still gives all the antiderivatives there are. For this reason we recommend that you go right to the final form even if you elect to integrate term by term. Write

$$\int (x^2 - 2x + 5)dx = \int x^2 dx - \int 2x dx + \int 5 dx = \frac{x^3}{3} - x^2 + 5x + C$$

Find the simplest antiderivative you can for each part add the constant at the end.

Ex.62 We can sometimes use trigonometric identities to transform integrals we do not know how to evaluate into integrals. The integral formulas for $\sin^2 x$ and $\cos^2 x$ arise frequently in applications.

$$(a) \int \sin^2 x dx = \int \frac{1 - \cos 2x}{2} dx \quad \sin^2 x = \frac{1 - \cos 2x}{2}$$

$$= \frac{1}{2} \int (1 - \cos 2x) dx = \frac{1}{2} \int dx - \frac{1}{2} \int \cos 2x dx$$

$$\frac{x}{2} + \left(-\frac{1}{2} \right) \frac{\sin 2x}{2} + C = \frac{x}{2} - \frac{\sin 2x}{4} + C$$

$$(b) \int \cos^2 x dx = \int \frac{1 + \cos 2x}{2} dx \quad \cos^2 x = \frac{1 + \cos 2x}{2}$$

$$= \frac{x}{2} + \frac{\sin 2x}{4} + C \text{ As in part (a), but with a sign change}$$

23. SOME INDEFINITE INTEGRALS (AN ARBITRARY CONSTANT SHOULD BE ADDED TO EACH OF THESE INTEGRALS.)

$$(a) \int (ax + b)^n dx = \frac{(ax + b)^{n+1}}{a(n+1)} \text{ (provided } n \neq -1) + C$$

$$(b) \int \frac{1}{x} dx = \ln x + C$$

$$(c) \int \frac{dx}{a + bx} = \frac{1}{b} \ln(a + bx) + C$$

$$(d) \int e^{ax} dx = \frac{1}{a} e^{ax} + C$$

$$(e) \int \sin(ax + b) dx = \frac{-1}{a} \cos(ax + b) + C$$

$$(f) \int \cos(ax + b) dx = \frac{1}{a} \sin(ax + b) + C$$

$$\text{Ex.63 (a)} \int (3x + 2)^3 dx = \frac{(3x + 2)^4}{4 \times 3} + C = \frac{(3x + 2)^4}{12} + C$$

$$(b) \int \frac{2dx}{x} = 2 \ln x + C$$

$$(c) \int \frac{dx}{5 + 2x} = \frac{1}{2} \ln(5 + 2x) + C$$

$$(d) \int \frac{dx}{3 - 5x} = -\frac{1}{5} \ln(3 - 5x) + C$$


$$(e) \int e^{3x} dx = \frac{1}{3} e^{3x} + C$$

$$(f) \int e^{-x/2} dx = -2 e^{-x/2} + C$$

$$(g) \int \sin(3x + 5) dx = -\frac{1}{3} \cos(3x + 5) + C$$

$$(h) \int \cos(2x - 5) dx = \frac{1}{2} \sin(2x - 5) + C$$

24. DEFINITE INTEGRATION OR INTEGRATION WITH LIMITS

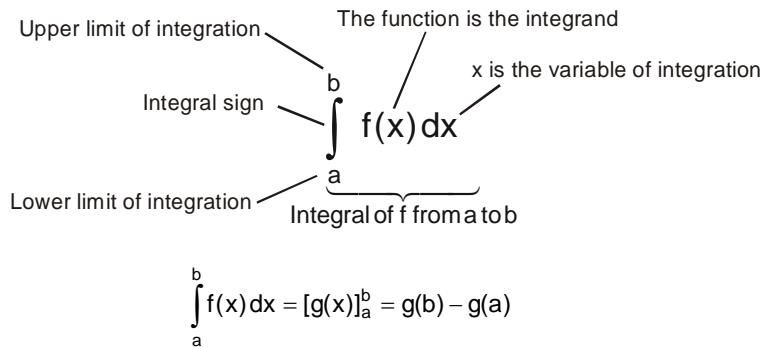


$$\text{Ex. 64} \quad \int_{-1}^4 3dx = 3 \int_{-1}^4 dx = 3[x]_{-1}^4 = 3[4 - (-1)] = (3)(5) = 15$$

$$\int_0^{\pi/2} \sin x dx = [-\cos x]_0^{\pi/2} = -\cos\left(\frac{\pi}{2}\right) + \cos(0) = -0 + 1 = 1$$

$$\text{Ex. 65} \quad (1) \int_0^a x^2 dx = \left[\frac{x^3}{3} \right]_0^a = \frac{a^3}{3} \quad (2) \int_3^5 x dx = \left[\frac{x^2}{2} \right]_3^5 = \frac{5^2 - 3^2}{2} = 8 \quad (3) \int_0^b x^{3/2} dx = \left[\frac{x^{5/2}}{5/2} \right]_0^b = \frac{2}{5} b^{5/2}$$

25. APPLICATION OF DEFINITE INTEGRAL

Calculation Of Area Of A Curve.

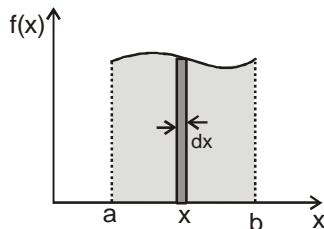

From graph shown in figure if we divide whole area in infinitely small strips of dx width.

We take a strip at x position of dx width.

Small area of this strip $dA = f(x) dx$

So, the total area between the curve and x-axis = sum of area of all strips = $\int_a^b f(x) dx$

Let $f(x) \geq 0$ be continuous on $[a,b]$. The area of the region between the graph of f and the x-axis is

$$A = \int_a^b f(x) dx$$


Ex.66 Using an area to evaluate a definite integral

$$\text{Evaluate } \int_a^b x dx \quad 0 < a < b.$$

Sol. We sketch the region under the curve $y = x$, $a \leq x \leq b$ (figure) and see that it is a trapezoid with height $(b - a)$ and bases a and b . The value of the integral is the area of this trapezoid :

$$\text{Thus } \int_a^b x dx = (b-a) \cdot \frac{a+b}{2} = \frac{b^2}{2} - \frac{a^2}{2}$$

$$\int_1^{\sqrt{5}} x dx = \frac{(\sqrt{5})^2}{2} - \frac{(1)^2}{2} = 2$$

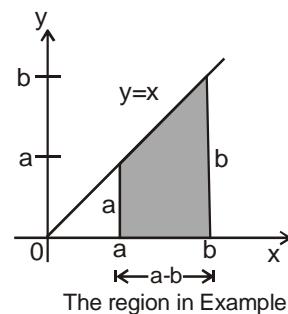

and so on.

Notice that $x^2/2$ is an antiderivative of x , further evidence of a connection between antiderivatives and summation.

(i) To find impulse


$$dF = \frac{dp}{dt} \text{ so impulse} = \int F dt$$

Ex.67 If $F = kt$ then find impulse at $t = 3$ sec.


so impulse will be area under $f - t$ curve

$$I = \int_0^3 kt dt = K \left[\frac{t^2}{2} \right]_0^3$$

$$\Rightarrow I = \frac{9k}{2}$$

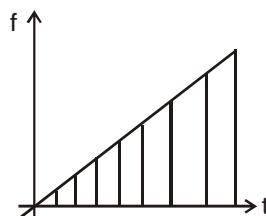

2. To calculate work done by force :

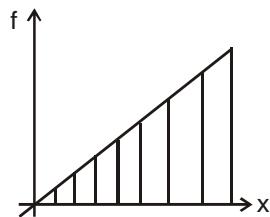

$$w = \int f dx$$

So area under $f - x$ curve will give the value of work done.

EXERCISE - I

SECTION - A : FUNCTION

1. $f(x) = \cos x + \sin x$ Find $f(\pi/2)$

2. $f(x) = 4x + 3$ Find $f(f(2))$

3. $f(x) = \log x^3$ and $g(x) = \log x$

Which of the following statement is / are true-

- (a) $f(x) = g(x)$ (b) $3f(x) = g(x)$
 (c) $f(x) = 3g(x)$ (d) $f(x) = (g(x))^3$

SECTION - B : DIFFERENTIATION OF ELEMENTARY FUNCTIONS

Find the derivative of given function w.r.t. corresponding independent variable.

4. $y = x^2 + x + 8$

5. $s = 5t^3 - 3t^5$

6. $y = 5\sin x$

7. $y = x^2 + \sin x$

8. $y = \tan x + \cot x$

Find the first derivative & second derivative of given functions w.r.t. corresponding independent variable.

9. $y = 6x^2 - 10x - 5x^{-2}$

10. $r = \frac{12}{\theta} - \frac{4}{\theta^3} + \frac{1}{\theta^4}$

11. $\omega = 3z^7 - 7z^3 + 21z^2$

12. $y = \sin x + \cos x$

13. $y = \ln x + e^x$

SECTION - C : DIFFERENTIATION BY PRODUCT RULE

Find derivative of given functions w.r.t. the independent variable x.

14. $x \sin x$

15. $y = e^x \ln x$

16. $y = (x-1)(x^2 + x + 1)$

17. $y = (x^2 + 1)\left(x + 5 + \frac{1}{x}\right)$

18. $y = \sin x \cos x$

SECTION - D : DIFFERENTIATION BY QUOTIENT RULE

Find derivative of given function w.r.t. the independent variable.

19. $y = \frac{\sin x}{\cos x}$

20. $y = \frac{2x+5}{3x-2}$

21. $y = \frac{\ln x}{x}$

22. $f(t) = \frac{t^2 - 1}{t^2 + t - 2}$, find $f'(t)$

23. $z = \frac{2x+1}{x^2 - 1}$

24. $y = x^2 \cot x$

SECTION - E : DIFFERENTIATION BY CHAIN RULE

Find $\frac{dy}{dx}$ as a function of x

25. $y = (2x+1)^5$

26. $y = (4-3x)^9$

27. $y = \left(1 - \frac{x}{7}\right)^{-7}$

28. $y = \left(\frac{x}{2} - 1\right)^{-10}$

29. $y = \sin 5x$

30. $y = \sin(x) + \ln(x^2) + e^{2x}$

31. $y = 2\sin(\omega x + \phi)$ where ω and ϕ constants

SECTION - G : DIFFERENTIATION AS A RATE MEASUREMENT

32. Suppose that the radius r and area $A = \pi r^2$ of a circle are differentiable functions of t. Write an equation that relates da/dt to dr/dt .33. Suppose that the radius r and surface area $S = 4\pi r^2$ of a sphere are differentiable functions of t. Write an equation that relates ds/dt to dr/dt .

SECTION - H : MAXIMA & MINIMA

34. Particle's position as a function of time is given by $x = -t^2 + 4t + 4$ find the maximum value of position coordinate of particle.35. Find the maximum and minimum values of function $2x^3 - 15x^2 + 36x + 11$

SECTION - I

Given $y = f(u)$ and $u = g(x)$ Find $\frac{dy}{dx}$

36. $y = 2u^3, u = 8x - 1$

37. $y = \sin u, u = 3x + 1$

38. $y = 6u - 9, u = (1/2)x^4$

39. $y = \cos u, u = -\frac{x}{3}$

7. $(1-x^2 - 3x^5)$

8. $3\sin x$

9. $\frac{1}{3x}$

Integrate by using the substitution suggested in bracket.

10. $\int \sin 3x dx, \quad (\text{use, } u = 3x)$

11. $\int \sec 2t \tan 2t dt, \quad (\text{use, } u = 2t)$

12. $\int_{-2}^1 5 dx$

13. $\int_{-4}^{-1} \frac{\pi}{2} d\theta$

14. $\int_{-2}^4 \left(\frac{x}{2} + 3 \right) dx$

15. $\int_{\sqrt{2}}^{5\sqrt{2}} r dr$

16. $\int_0^{2\pi} \sin \theta d\theta$

17. $\int_0^1 e^x dx$

Use a definite integral to find the area of the region between the given curve and the x-axis on the interval $[0, b]$

18. $y = 2x$

19. $y = \frac{x}{2} + 1$

Use a definite integral to find the area of the region between the given curve and the x-axis on the interval $[0, \pi]$

20. $y = \sin x$

PART - III VECTOR


SECTION - A : DEFINITION OF VECTOR & ANGLE BETWEEN VECTORS

6. (a) $\frac{1}{2}x^{-1/2}$

(b) $-\frac{1}{2}x^{-3/2}$


(c) $-\frac{3}{2}x^{-5/2}$

1. Vectors \vec{A}, \vec{B} and \vec{C} are shown in figure. Find angle between



- (i) \vec{A} and \vec{B} (ii) \vec{A} and \vec{C} (iii) \vec{B} and \vec{C} .

2. The forces, each numerically equal to 5 N, are acting as shown in the Figure. Find the angle between forces?



3. Rain is falling vertically down wards with a speed 5 m/s. If unit vector along upward is defined as \hat{j} , represent velocity of rain in vector form.

4. The vector joining the points A(1, 1, -1) and B(2, -3, 4) & pointing from A to B is

- (a) $-\hat{i} + 4\hat{j} - 5\hat{k}$ (b) $\hat{i} + 4\hat{j} + 5\hat{k}$
 (c) $\hat{i} - 4\hat{j} + 5\hat{k}$ (d) $-\hat{i} - 4\hat{j} - 5\hat{k}$

SECTION - B : ADDITION OF VECTORS

5. A man walks 40 m North, then 30 m East and then 40 m South. Find the displacement from the starting point?

6. Two forces \vec{F}_1 and \vec{F}_2 are acting at right angles to each other, find their resultant?

7. A vector of magnitude 30 and direction eastwards is added with another vector of magnitude 40 and direction Northwards. Find the magnitude and direction of resultant with the east.

8. Two force of $\vec{F}_1 = 500\text{N}$ due east and $\vec{F}_2 = 250\text{N}$ due north. Find $\vec{F}_2 - \vec{F}_1$?

9. Two vectors \vec{a} and \vec{b} inclined at an angle θ w.r.t. each other have a resultant \vec{c} which makes an angle β with \vec{a} . If the directions of \vec{a} and \vec{b} are interchanged, then the resultant will have the same

- (A) magnitude
 (B) direction
 (C) magnitude as well as direction
 (D) neither magnitude nor direction.

10. Two vectors \vec{A} and \vec{B} lie in a plane. Another vector \vec{C} lies outside this plane. The resultant $\vec{A} + \vec{B} + \vec{C}$ of these three vectors

- (A) can be zero
 (B) cannot be zero
 (C) lies in the plane of $\vec{A} + \vec{B}$
 (D) lies in the plane of $\vec{A} - \vec{B}$

11. The vector sum of the forces of 10 N and 6 N can be

- (A) 2N (B) 8N (C) 18N (D) 20N

12. A set of vectors taken in a given order gives a closed polygon. Then the resultant of these vectors is a

- (A) scalar quantity (B) pseudo vector
 (C) unit vector (D) null vector

13. The vector sum of two force P and Q is minimum when the angle θ between their positive directions, is

- (A) $\frac{\pi}{4}$ (B) $\frac{\pi}{3}$ (C) $\frac{\pi}{2}$ (D) π

14. The vector sum of two vectors \vec{A} and \vec{B} is maximum, then the angle θ between two vectors is

- (A) 0° (B) 30° (C) 45° (D) 60°

15. Given : $\vec{C} = \vec{A} + \vec{B}$. Also, the magnitude of \vec{A} , \vec{B} and \vec{C} are 12, 5 and 13 units respectively. The angle between \vec{A} and \vec{B} is

- (A) 0° (B) $\frac{\pi}{4}$ (C) $\frac{\pi}{2}$ (D) π

16. If $\vec{P} + \vec{Q} = \vec{P} - \vec{Q}$ and θ is the angle between \vec{P} and \vec{Q} , then

- (A) $\theta = 0^\circ$ (B) $\theta = 90^\circ$ (C) $P = 0$ (D) $Q = 0$

17. The sum and difference of two perpendicular vectors of equal lengths are

- (A) of equal lengths and have an acute angle between them
 (B) of equal lengths and have an obtuse angle between them

- (C) also perpendicular to each other and are of different lengths
 (D) also perpendicular to each other and are of equal lengths

SECTION - C : RESOLUTION OF VECTORS

18. Find the magnitude of $3\hat{i} + 2\hat{j} + \hat{k}$?

19. If $\vec{A} = 3\hat{i} + 4\hat{j}$ then find \hat{A}

20. What are the x and the y components of a 25 m

displacement at an angle of 210° with the x-axis (clockwise) ?

21. One of the rectangular components of a velocity of 60 km h^{-1} is 30 km h^{-1} . Find other rectangular component ?

22. If $0.5\hat{i} + 0.8\hat{j} + C\hat{k}$ is a unit vector. Find the value of C

23. The rectangular components of a vector are $(2, 2)$. The corresponding rectangular components of another vector are $(1, \sqrt{3})$. Find the angle between the two vectors.

24. The x and y components of a force are 2N and -3N . The force is

- (A) $2\hat{i} - 3\hat{j}$ (B) $2\hat{i} + 3\hat{j}$ (C) $-2\hat{i} - 3\hat{j}$ (D) $3\hat{i} + 2\hat{j}$


SECTION-D : PRODUCT OF VECTORS

25. If $\vec{A} = \hat{i} + \hat{j} + \hat{k}$ and $\vec{B} = 2\hat{i} + \hat{j}$ find

- (a) $\vec{A} \cdot \vec{B}$ (b) $\vec{A} \times \vec{B}$

26. If $|\vec{A}|=4$, $|\vec{B}|=3$ and $\theta = 60^\circ$ in the figure. Find

- (a) $\vec{A} \cdot \vec{B}$ (b) $|\vec{A} \times \vec{B}|$



27. Three non-zero vectors \vec{A}, \vec{B} & \vec{C} satisfy the relation $\vec{A} \cdot \vec{B} = 0$ & $\vec{A} \cdot \vec{C} = 0$. Then \vec{A} can be parallel to:

- (A) \vec{B} (B) \vec{C} (C) $\vec{B} \cdot \vec{C}$ (D) $\vec{B} \times \vec{C}$

28. The magnitude of scalar product of two vectors is 8 and that of vector product is $8\sqrt{3}$. The angle between them is

- (A) 30° (B) 60° (C) 120° (D) 150°

EXERCISE - II

SECTION - A : FUNCTION

1. If $f(x) = \frac{x-1}{x+1}$ then find $f\{f(x)\}$

2. If $f(x) = \begin{cases} x+2, & x < 2 \\ 2x-1, & x \geq 2 \end{cases}$ Evaluate $f(2)$, $f(1)$, and $f(3)$

SECTION - B : DIFFERENTIATION OF ELEMENTARY FUNCTIONS

Find the first derivative and second derivative of given functions w.r.t. the independent variable x .

3. $y = \ln x^2 + \sin x$

4. $y = \sqrt[7]{x} + \tan x$

SECTION - C : DIFFERENTIATION BY PRODUCT RULE

Find derivative of given functions w.r.t. the corresponding independent variable.

5. $y = e^x \tan x$

6. $y = x^2 \sin^4 x + x \cos^{-2} x$

7. $y = \left(x + \frac{1}{x}\right) \left(x - \frac{1}{x} + 1\right)$

8. $y = x^2 \sin x + 2x \cos x - 2 \sin x$

9. $y = x^2 \cos x - 2x \sin x - 2 \cos x$

10. $r = (1 + \sec \theta) \sin \theta$

SECTION - D : DIFFERENTIATION BY QUOTIENT RULE

Find derivative of given functions w.r.t. the respective independent variable.

11. $y = \frac{\sin x + \cos x}{\cos x}$

12. $y = \frac{\cot x}{1 + \cot x}$

13. $y = \frac{\cos x}{x} + \frac{x}{\cos x}$

14. $p = \frac{\tan q}{1 + \tan q}$

SECTION - E : DIFFERENTIATION BY CHAIN RULE

Find $\frac{dy}{dx}$ as a function of x

15. $y = \sin^3 x + \sin 3x$

16. $\sin^2(x^2 + 1)$

17. $y = x(x^2 + 1)^{-1/2}$

18. $q = \sqrt{2r - r^2}$, find $\frac{dq}{dr}$

19. $y = \left(\frac{x^2}{8} + x - \frac{1}{x}\right)^4$

SECTION - F : DIFFERENTIATION AS A RATE MEASUREMENT

20. The radius r and height h of a circular cylinder are related to the cylinder's volume V by the formula $V = \pi r^2 h$.

(a) If height is increasing at a rate of 5 m/s while radius is constant, Find rate of increase of volume of cylinder.

(b) If radius is increasing at a rate of 5 m/s while height is constant, Find rate of increase of volume of cylinder.

(c) If height is increasing at a rate of 5 m/s and radius is increasing at a rate of 5 m/s. Find rate of increase of volume of cylinder.

SECTION - G : MAXIMA & MINIMA

21. Find two positive numbers x & y such that $x + y = 60$ and xy is maximum.

22. A sheet of area 40 m^2 is used to make an open tank with a square base, then find the dimensions of the base such that volume of this tank is maximum.

SECTION - H : MISCELLANEOUS

23. Find y'' if

(a) $y = \cos x$

(b) $y = \sec x$

24. $y = \cos u$, $u = \sin x$

25. $y = \sin u$, $u = x - \cos x$

PART - II : INTEGRATION

Find integrals of given functions

1. $\int (2x^3 - 5x + 7) dx$

2. $\int \left(\frac{1}{5} - \frac{2}{x^3} + 2x\right) dx$

3. $\int (\sqrt{x} + \sqrt[3]{x}) dx$

4. $\int x^{-3}(x+1) dx$

5. $\int \frac{t\sqrt{t} + \sqrt{t}}{t^2} dt$

6. $\int \frac{4 + \sqrt{t}}{t^3} dt$

7. $\int \cos \theta (\tan \theta + \sec \theta) d\theta$

8. $\int_{\pi}^{2\pi} \theta d\theta$

9. $\int_0^{\sqrt[3]{7}} x^2 dx$

10. $\int_0^{\pi} \cos x dx$

11. $\int_0^1 \frac{dx}{3x+2}$

Use a definite integral to find the area of the region between the given curve and the x-axis on the interval $[0, b]$

12. $y = 3x^2$

13. $y = \sqrt{b^2 - x^2}$

PART - III : VECTOR

SECTION - A : DEFINITION OF VECTOR & ANGLE BETWEEN VECTORS

1. Vector \vec{A} points N-E and its magnitude is 3 kg ms^{-1} . It is multiplied by the scalar λ such that $\lambda = -4$ second. Find the direction and magnitude of the new vector quantity. Does it represent the same physical quantity or not?

2. A hall has the dimensions $10 \text{ m} \times 12 \text{ m} \times 14 \text{ m}$. A fly starting at one corner ends up at a diametrically opposite corner. The magnitude of its displacement is nearly

- | | |
|----------|----------|
| (A) 16 m | (B) 17 m |
| (C) 18 m | (D) 21 m |







3. A vector is not changed if

- | |
|--|
| (A) it is displaced parallel to itself |
| (B) it is rotated through an arbitrary angle |

(C) it is cross-multiplied by a unit vector

(D) it is multiplied by an arbitrary scalar

4. Which of the arrangement of axes in fig. can be labelled "right handed coordinate system"? As usual, each axis label indicates the positive side of the axis.

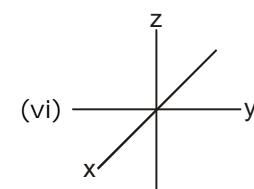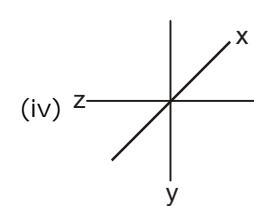

(A) (i), (ii)

(B) (iii), (iv)


(C) (vi)

(D) (v)

SECTION : B ADDITION OF VECTOR

5. The angle θ between directions of forces \vec{A} and \vec{B} is 90° where $A = 8 \text{ dyne}$ and $B = 6 \text{ dyne}$. If the resultant \vec{R} makes an angle α with \vec{A} then find the value of ' α '?

6. Find the resultant of three vectors \vec{OA}, \vec{OB} and \vec{OC} each of magnitude r as shown in figure ?



7. If the angle between two forces increases, the magnitude of their resultant

- | |
|---------------|
| (A) decreases |
|---------------|

- (B) increases
 - (C) remains unchanged
 - (D) first decreases and then increases

8. A car is moving on a straight road due north with a uniform speed of 50 km h^{-1} when it turns left through 90° . If the speed remains unchanged after turning, the change in the velocity of the car in the turning process is :

- (A) zero
 - (B) $50\sqrt{2}\text{kmh}^{-1}$ S – W direction
 - (C) $50\sqrt{2}\text{kmh}^{-1}$ N – W direction
 - (D) 50kmh^{-1} due West

9. Which of the following sets of displacements might be capable of bringing a car to its returning point ?

- (A) 5, 10, 30 and 50 km
 - (B) 5, 9, 9 and 16 km
 - (C) 40, 40, 90 and 200 km
 - (D) 10, 20, 40 and 90 km

10. When two vectors \vec{a} and \vec{b} are added, the magnitude of the resultant vector is always

- (A) greater than $(a + b)$
 - (B) less than or equal to $(a + b)$
 - (C) less than $(a + b)$
 - (D) equal to $(a + b)$

11. Given : $\vec{A} = 2\hat{i} + 3\hat{j}$ and $\vec{B} = 5\hat{i} - 6\hat{j}$. The magnitude of $\vec{A} + \vec{B}$ is

12. Given : $\vec{A} = 2\hat{i} - \hat{j} + 2\hat{k}$ and $\vec{B} = -\hat{i} - \hat{j} + \hat{k}$. The unit vector of $\vec{A} - \vec{B}$ is

- (A) $\frac{3\hat{i} + \hat{k}}{\sqrt{10}}$ (B) $\frac{3\hat{i}}{\sqrt{10}}$ (C) $\frac{\hat{k}}{\sqrt{10}}$ (D) $\frac{-3\hat{i} - \hat{k}}{\sqrt{10}}$

13. If $|\vec{A} + \vec{B}| = |\vec{A}| = |\vec{B}|$, then the angle between \vec{A} and \vec{B} is

- (A) 0 (B) 60° (C) 90° (D) 120°

14. Given : $\vec{a} + \vec{b} + \vec{c} = 0$. Out of the three vectors \vec{a}, \vec{b} and \vec{c} two are equal in magnitude. The magnitude of the third vector is $\sqrt{2}$ times that of either of the two having equal magnitude. The angles between the vectors are

- (A) $90^\circ, 135^\circ, 135^\circ$ (B) $30^\circ, 60^\circ, 90^\circ$
 (C) $45^\circ, 45^\circ, 90^\circ$ (D) $45^\circ, 60^\circ, 90^\circ$

15. Which of the following is a true statement ?
(A) A vector cannot be divided by another vector
(B) Angular displacement can either be a scalar or a vector

(C) Since addition of vectors is commutative therefore vector subtraction is also commutative

(D) The resultant of two equal forces of magnitude F acting at a point is F if the angle between the two forces is 120° .

SECTION - C : RESOLUTION OF VECTORS

16. If $\vec{A} = 3\hat{i} + 4\hat{j}$ and $\vec{B} = \hat{i} + \hat{j} + 2\hat{k}$ then find out unit vector along $\vec{A} + \vec{B}$.

17. Vector \vec{A} is of length 2 cm and is 60° above the x-axis in the first quadrant. Vector \vec{B} is of length 2 cm and 60° below the x-axis in the fourth quadrant. The sum $\vec{A} + \vec{B}$ is a vector of magnitude.

- (A) 2 along + y axis (B) 2 along + x-axis
 (C) 1 along - x-axis (D) 2 along - x-axis

18. Six forces, 9.81 N each, acting at a point are coplanar. If the angles between neighbouring forces are equal, then the resultant is

SECTION : D PRODUCT OF VECTORS

19. If $\vec{a} = x_1 \hat{i} + y_1 \hat{j}$ & $\vec{b} = x_2 \hat{i} + y_2 \hat{j}$. The condition that would make \vec{a} & \vec{b} parallel to each other is _____.

20. A vector \vec{A} points vertically downward & \vec{B} points towards east, then the vector product $\vec{A} \times \vec{B}$ is

- (A) along west (B) along east
(C) zero (D) none of above

EXERCISE - III

LEVEL - I

1. Match the statements given in column-I with statements given in column-II

Column - I	Column - II
(A) If $ \vec{A} = \vec{B} $ and $ \vec{A}+\vec{B} = \vec{A} $ then angle between \vec{A} and \vec{B} is	(p) 90°
(B) Magnitude of resultant of two forces $ \vec{F}_1 =8\text{N}$ and $ \vec{F}_2 =4\text{N}$ may be	(q) 120°
(C) Angle between $\vec{A}=2\hat{i}+2\hat{j}$ & $\vec{B}=3\hat{k}$ is	(r) 12 N
(D) Magnitude of resultant of vectors $\vec{A}=2\hat{i}+\hat{j}$ & $\vec{B}=3\hat{k}$ is	(s) $\sqrt{14}$

(A) If $|\vec{A}|=|\vec{B}|$ and $|\vec{A}+\vec{B}|=|\vec{A}|$ then angle between \vec{A} and \vec{B} is

(B) Magnitude of resultant of two forces $|\vec{F}_1|=8\text{N}$ and $|\vec{F}_2|=4\text{N}$ may be

(C) Angle between $\vec{A}=2\hat{i}+2\hat{j}$ & $\vec{B}=3\hat{k}$ is

(D) Magnitude of resultant of vectors $\vec{A}=2\hat{i}+\hat{j}$ & $\vec{B}=3\hat{k}$ is

$\vec{A}=2\hat{i}+\hat{j}$ & $\vec{B}=3\hat{k}$ is

2. Position of particle is given by $S = t^3 - 2t^2 + 5t + 4$

(a) Find the position of particle at $t = 1 \text{ sec}$

(b) Find the first derivative of S at $t = 1 \text{ sec}$

(c) Find the second derivative of S at $t = 1 \text{ sec}$

3. Two forces $\vec{F}_1 = 2\hat{i} + 2\hat{j}\text{N}$ and $\vec{F}_2 = 3\hat{i} + 4\hat{k}\text{N}$ are acting on a particle

(a) Find the resultant force acting on particle

(b) Find the angle between \vec{F}_1 & \vec{F}_2

(c) Find the component of force \vec{F}_1 along force \vec{F}_2

4. Statement-1 : A vector is a quantity that has both magnitude and direction and obeys the triangle law of addition.

Statement-2 : The magnitude of the resultant vector of two given vectors can never be less than the magnitude of any of the given vector.

(A) Statement-1 is True, Statement-2 is True; Statement-2 is a correct explanation for Statement-1

(B) Statement-1 is True, Statement-2 is True; Statement-2 is NOT a correct explanation for Statement-1

(C) Statement-1 is True, Statement-2 is False

(D) Statement-1 is False, Statement-2 is True

5. Statement-1 : If the rectangular components of a force are 8 N and 6 N, then the magnitude of the force is 10 N.

Statement-2 : If $|\vec{A}|=|\vec{B}|=1$ then $|\vec{A} \times \vec{B}|^2 + |\vec{A} \cdot \vec{B}|^2=1$.

(A) Statement-1 is True, Statement-2 is True; Statement-2 is a correct explanation for Statement-1

(B) Statement-1 is True, Statement-2 is True; Statement-2 is NOT a correct explanation for Statement-1

(C) Statement-1 is True, Statement-2 is False

(D) Statement-1 is False, Statement-2 is True

6. Statement-1 : If three vectors \vec{A}, \vec{B} and \vec{C} satisfy the relation $\vec{A} \cdot \vec{B} = 0$ & $\vec{A} \cdot \vec{C} = 0$ then the vector \vec{A} is parallel to $\vec{B} \times \vec{C}$.

Statement-2 : $\vec{A} \perp \vec{B}$ and $\vec{A} \perp \vec{C}$ hence A is perpendicular to plane formed by \vec{B} and \vec{C}

(A) Statement-1 is True, Statement-2 is True; Statement-2 is a correct explanation for Statement-1

(B) Statement-1 is True, Statement-2 is True; Statement-2 is NOT a correct explanation for Statement-1

(C) Statement-1 is True, Statement-2 is False

(D) Statement-1 is False, Statement-2 is True

7. Statement-1 : The minimum number of vectors of unequal magnitude required to produce zero resultant is three.

Statement-2 : Three vectors of unequal magnitude which can be represented by the three sides of a triangle taken in order, produce zero resultant.

(A) Statement-1 is True, Statement-2 is True; Statement-2 is a correct explanation for Statement-1

(B) Statement-1 is True, Statement-2 is True; Statement-2 is NOT a correct explanation for Statement-1

(C) Statement-1 is True, Statement-2 is False

(D) Statement-1 is False, Statement-2 is True

8. Statement-1 : The angle between the two vectors $(\hat{i}+\hat{j})$ and (\hat{k}) is $\frac{\pi}{2}$ radian.

Statement-2 : Angle between two vectors \vec{A} and \vec{B}

is given by $\theta = \cos^{-1} \left(\frac{\vec{A} \cdot \vec{B}}{AB} \right)$.

(A) Statement-1 is True, Statement-2 is True; Statement-2 is a correct explanation for Statement-1

(B) Statement-1 is True, Statement-2 is True; Statement-2 is NOT a correct explanation for Statement-1

(C) Statement-1 is True, Statement-2 is False

(D) Statement-1 is False, Statement-2 is True

9. Statement-1 : Distance is scalar quantity.

Statement-2 : Distance is the length of path transversed.

(A) Statement-1 is True, Statement-2 is True; Statement-2 is a correct explanation for Statement-1

(B) Statement-1 is True, Statement-2 is True; Statement-2 is NOT a correct explanation for Statement-1

(C) Statement-1 is True, Statement-2 is False

(D) Statement-1 is False, Statement-2 is True

10. State true or false

(i) If \vec{A} & \vec{B} are two force vectors $\vec{A} \cdot \vec{B} = \vec{B} \cdot \vec{A}$

(ii) If \vec{A} & \vec{B} are two force vectors then $\vec{A} \times \vec{B} = \vec{B} \times \vec{A}$

(iii) If the vector product of two non-zero vectors vanishes, the vectors are collinear.

(iv) If a function has maximum value at point P then slope of tangent drawn on function at point P is zero.

11. Fill in the blanks

(i) The scalar product of vector $\vec{A} = 2\hat{i} + 5\hat{k}$ and $\vec{B} = 3\hat{j} + 5\hat{k}$ is

(ii) If $\vec{A} = 3\hat{i} + 4\hat{j}$ and $\vec{B} = 7\hat{i} + 24\hat{j}$, then the vector having the same magnitude as \vec{B} and parallel to \vec{A} is

(iii) If $\vec{A} \parallel \vec{B}$ then $\vec{A} \times \vec{B} =$

(iv) The magnitude of area of the parallelogram formed by the adjacent sides of vectors $\vec{A} = 3\hat{i} + 2\hat{j}$ and $\vec{B} = 2\hat{i} - 2\hat{k}$ is

(v) A force is represented by $2\hat{i} + 3\hat{j} + 6\hat{k}$. The magnitude of the force is

(vi) The unit vector along vector $\hat{i} + \hat{j} + \hat{k}$ is

(vii) If \vec{A} is to \vec{B} , then $\vec{A} \cdot \vec{B} = 0$

(viii) The vector $\vec{A} = \hat{i} + \hat{j}$, where \hat{i} and \hat{j} are unit vectors along x-axis and y-axis respectively, makes an angle of degree with x-axis.

(ix) If $\vec{A} + \vec{B} + \vec{C} = \vec{0}$, then $\vec{A} \cdot (\vec{B} \times \vec{C}) =$

LEVEL - II

1. If the resultant of two forces of magnitudes P and Q acting at a point at an angle of 60° is $\sqrt{7}Q$, then P/Q is

- (A) 1 (B) $3/2$ (C) 2 (D) 4

2. The resultant of two forces F_1 and F_2 is P. If F_1 is reversed, then resultant is Q. Then the value of $(P^2 + Q^2)$ in terms of F_1 and F_2 is

- (A) $2(F_1^2 + F_2^2)$ (B) $F_1^2 + F_2^2$
 (C) $(F_1 + F_2)^2$ (D) none of these

3. A man moves towards 3m north then 4m towards east and finally 5m towards 37° south of west. His displacement from origin is

- (A) $5\sqrt{2}$ m (B) 0 m (C) 1 m (D) 12 m

4. Three forces P, Q & R are acting at a point in the plane. The angle between P & Q and Q & R are 150° & 120° respectively, then for equilibrium, forces P, Q & R are in the ratio

- (A) $1 : 2 : 3$ (B) $1 : 2 : \sqrt{3}$ (C) $3 : 2 : 1$ (D) $\sqrt{3} : 2 : 1$

5. A man rows a boat with a speed of 18 km/hr in northwest direction. The shoreline makes an angle of 15° south of west. Obtain the component of the velocity of the boat along the shoreline.

- (A) 9 km/hr (B) $18 \frac{\sqrt{3}}{2}$ km / hr
 (C) $18 \cos 15^\circ$ km/hr (D) $18 \cos 75^\circ$ km/hr
6. A bird moves from point $(1, -2, 3)$ to $(4, 2, 3)$. If the speed of the bird is 10m/sec, then the velocity vector of the bird is

- (A) $5(\hat{i} - 2\hat{j} + 3\hat{k})$ (B) $5(4\hat{i} + 2\hat{j} + 3\hat{k})$
 (C) $0.6\hat{i} + 0.8\hat{j}$ (D) $6\hat{i} + 8\hat{j}$

7. The resultant of two forces, one double the other in magnitude is perpendicular to the smaller of the two forces. The angle between the two forces is

- (A) 150° (B) 90° (C) 60° (D) 120°


8. If the angle between the unit vectors \hat{a} and \hat{b} is 60° , then

- $|\hat{a} - \hat{b}|$ is
- (A) 0 (B) 1 (C) 2 (D) 4

9. For a particle moving in a straight line, the position of the particle at time (t) is given by $x = t^3 - 6t^2 + 3t + 7$ what is the velocity of the particle when its acceleration is zero?

- (A) -9ms^{-1} (B) -12ms^{-1} (C) 3ms^{-1} (D) 42ms^{-1}

10. Two forces each numerically equal to 10 dynes are acting as shown in the following figure, then their resultant is -

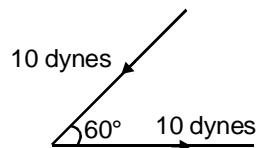

- (A) 10 dynes (B) 20 dynes
 (C) $10\sqrt{3}$ dynes (D) 5 dynes

11. Two vectors \vec{A} and \vec{B} are such that $|\vec{A} + \vec{B}| = |\vec{A} - \vec{B}|$. The angle between the vectors \vec{A} and \vec{B} is -

- (A) 0 (B) $\pi/3$ (C) $\pi/2$ (D) π

12. A particle moves through angular displacement θ on a circular path of radius r. The linear displacement will be -

- (A) $2r \sin(\theta/2)$ (B) $2r \cos(\theta/2)$
 (C) $2r \tan(\theta/2)$ (D) $2r \cot(\theta/2)$

13. The vector \vec{P} makes 120° with the x-axis and vector \vec{Q} makes 30° with the y-axis. What is their resultant ?

- (A) $P + Q$ (B) $P - Q$ (C) $\sqrt{P^2 + Q^2}$ (D) $\sqrt{P^2 - Q^2}$

14. A man travels 1 mile due east, then 5 miles due south, then 2 miles due east and finally 9 miles due north, how far is he from the starting point -

- (A) 3 miles (B) 5 miles
 (C) 4 miles (D) between 5 and 9 miles

15. The angle that the vector $\vec{A} = 2\hat{i} + 3\hat{j}$ makes with y-axis is-

- (A) $\tan^{-1}(3/2)$ (B) $\tan^{-1}(2/3)$
 (C) $\sin^{-1}(3/2)$ (D) $\cos^{-1}(3/2)$

16. A man moves towards 3m north then 4m towards east and finally 5 m towards 37° south of west. His displacement from origin is -

- (A) $5\sqrt{2}$ m (B) 0 m (C) 12 m (D) 5 m

17. If $3\hat{i} + 2\hat{j} + 8\hat{k}$ and $2\hat{i} + x\hat{j} + \hat{k}$ are at right angles that $x =$

- (A) 7 (B) -7 (C) 5 (D) -4

18. $a_1\hat{i} + a_2\hat{j}$ is a unit vector perpendicular to $4\hat{i} - 3\hat{j}$ if -

- (A) $a_1 = .6, a_2 = .8$ (B) $a_1 = 3, a_2 = 4$
 (C) $a_1 = .8, a_2 = .6$ (D) $a_1 = 4, a_2 = 3$

19. If \vec{a} is a vector and x is a non-zero scalar, then -

- (A) $x\vec{a}$ is a vector in the direction of \vec{a}

- (B) $x\vec{a}$ is a vector collinear to \vec{a}

- (C) $x\vec{a}$ and \vec{a} have independent directions

- (D) none of these


20. Two vectors have magnitudes 3 unit and 4 unit respectively. What should be the angle between them if the magnitude of the resultant is

- (a) 1 unit,
- (b) 5 unit and
- (c) 7 unit.

21. When two forces of magnitude P and Q are perpendicular to each other, their resultant is of magnitude R. When they are at an angle of 180° to each

other their resultant is of magnitude $\frac{R}{\sqrt{2}}$. Find the ratio of P and Q.


22. A body acted upon by 3 given forces is under equilibrium.

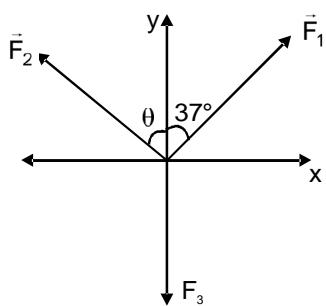

(a) If $|F_1|=10\text{ N}$, $|F_2|=6\text{ N}$. Find the values of $|F_3|$ & angle (θ).

(b) Express \vec{F}_2 in unit vector form

23. If the four forces as shown are in equilibrium Express \vec{F}_1 & \vec{F}_2 in unit vector form.

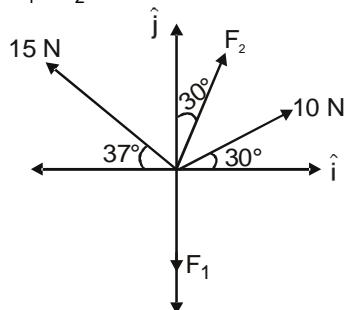

24. A particle is acted upon by the forces

$\vec{F}_1=2\hat{i}+a\hat{j}-3\hat{k}$, $\vec{F}_2=5\hat{i}+c\hat{j}-b\hat{k}$, $\vec{F}_3=b\hat{i}+5\hat{j}-7\hat{k}$, $\vec{F}_4=c\hat{i}+6\hat{j}-a\hat{k}$. Find the values of the constants a, b, c in order that the particle will be in equilibrium.

25. A plane body has perpendicular axes OX and OY marked on it and is acted on by following forces

5P in the direction OY

4P in the direction OX

10P in the direction OA where A is the point (3a, 4a)

15P in the direction AB where B is the point (-a, a)

Express each force in the unit vector form & calculate the magnitude & direction of sum of the vector of these forces.

26. A vector \vec{A} of length 10 units makes an angle of 60° with the vector \vec{B} of length 6 units. Find the magnitude of the vector difference $\vec{A}-\vec{B}$ & the angle it makes with vector \vec{A} .

27. (a) Calculate $\vec{r}=\vec{a}-\vec{b}+\vec{c}$ where $\vec{a}=5\hat{i}+4\hat{j}-6\hat{k}$, $\vec{b}=-2\hat{i}+2\hat{j}+3\hat{k}$ and $\vec{c}=4\hat{i}+3\hat{j}+2\hat{k}$.

(b) Calculate the angle between \vec{r} and the z-axis.

(c) Find the angle between \vec{a} and \vec{b}

EXERCISE - I

PART - I
SECTION - A

1. 1 2. 47 3. (c)

SECTION - B

4. $\frac{dy}{dx} = 2x + 1$ 5. $\frac{ds}{dt} = 15t^2 - 15t^4$ 6. $\frac{dy}{dx} = 5\cos x$ 7. $\frac{dy}{dx} = 2x + \cos x$ 8. $\sec^2 x - \operatorname{cosec}^2 x$

9. $\frac{dy}{dx} = 12x - 10 + 10x^{-3}$, $\frac{d^2y}{dx^2} = 12 - 30x^{-4}$

10. $\frac{dr}{d\theta} = -12\theta^{-2} + 12\theta^{-4} - 4\theta^{-5}$, $\frac{d^2r}{d\theta^2} = 24\theta^{-3} - 48\theta^{-5} + 20\theta^{-6}$

11. $\frac{d\omega}{dz} = 21z^6 - 21z^2 + 42z$, $\frac{d^2\omega}{dz^2} = 126z^5 - 42z + 42$

12. $\frac{dy}{dx} = \cos x - \sin x$, $\frac{d^2y}{dx^2} = -\sin x - \cos x$ 13. $\frac{dy}{dx} = \frac{1}{x} + e^x$, $\frac{d^2y}{dx^2} = -\frac{1}{x^2} + e^x$

SECTION - C

14. $\sin x + x \cos x$ 15. $e^x \ln x + \frac{e^x}{x}$ 16. $\frac{dy}{dx} = 3x^2$ 17. $y' = 3x^2 + 10x + 2 - \frac{1}{x^2}$

18. $\cos^2 x - \sin^2 x$

SECTION - D

19. $\sec^2 x$ 20. $y' = \frac{-19}{(3x-2)^2}$ 21. $\frac{1}{x^2} - \frac{\ln x}{x^2}$ 22. $f'(t) = \frac{t^2 - 2t + 1}{(t^2 + t - 2)^2}$

23. $\frac{dz}{dx} = \frac{-2x^2 - 2x - 2}{(x^2 - 1)^2}$ 24. $\frac{dy}{dx} = -x^2 \csc^2 x + 2x \cot x$

SECTION - E

25. With $u = (2x+1)$

$$y = u^5 : \frac{dy}{dx} = \frac{dy}{du} = 5u^4 \cdot 2 = 10(2x+1)^4$$

26. $\frac{dy}{dx} = -27(4-3x)^8$

27. With $u = (1 - \left(\frac{x}{7}\right))$ $y = u^{-7} : \frac{dy}{dx} = \frac{dy}{du} \frac{du}{dx} = -7u^{-8} \cdot \left(-\frac{1}{7}\right) = \left(1 - \frac{x}{7}\right)^{-8}$

28. $\frac{dy}{dx} = -5\left(\frac{x}{2} - 1\right)^{-11}$ 29. $5\cos 5x$ 30. $\cos(x) + \frac{2}{x} + 2e^{2x}$ 31. $2\omega \cos(\omega x + \phi)$

SECTION - G

32. $\frac{dA}{dt} = 2\pi r \frac{dr}{dt}$ 33. $\frac{ds}{dt} = 8\pi r \frac{dr}{dt}$

SECTION - H

34. 8 35. $y_{\max} = 39$, $y_{\min} = 38$

SECTION - I

36. $\frac{dy}{dx} = 48(8x-1)^2$ 37. $3\cos(3x+1)$ 38. $12x^3$ 39. $\frac{dy}{dx} = -\frac{1}{3} \sin \frac{x}{3}$

PART - II

1. (a) x^2 (b) $\frac{x^3}{3}$ (c) $\frac{x^3}{3} - x^2 + x$ 2. (a) x^{-3} (b) $-\frac{1}{3}x^{-3}$ (c) $-\frac{1}{3}x^{-3} + x^2 + 3x$

3. (a) $-\frac{1}{x}$ (b) $-\frac{5}{x}$ (c) $2x + \frac{5}{x}$ 4. (a) $\sqrt{x^3}$ (b) $3\sqrt{x}$ (c) $\frac{2\sqrt{x^3}}{3} + 2\sqrt{x}$

5. (a) $x^{4/3}$ (b) $\frac{x^{\frac{3}{2}}}{2}$ (c) $\frac{3x^{\frac{4}{3}}}{4} + \frac{3x^{\frac{2}{3}}}{2}$ 6. (a) $x^{1/2}$ (b) $x^{-1/2}$ (c) $x^{-3/2}$ 7. $x - \frac{x^3}{3} - \frac{x^6}{2} + C$

8. $-3\cos x$ 9. $\frac{1}{3}\ln x$ 10. $-\frac{1}{3}\cos 3x + C$

11. $\frac{1}{2}\sec 2t + C$ 12. 15 13. $\frac{3\pi}{2}$ 14. Area = 21 15. 24 16. 0

17. $e - 1$ 18. Using n subintervals of length $\Delta x = \frac{b}{n}$ and right-endpoint values : Area = $\int_0^b 2x \, dx = b^2$

19. $\frac{b^2}{4} + b = \frac{b(4+b)}{4}$ 20. 2

PART - III**SECTION - A**

1. (i) 105° , (ii) 150° , (iii) 105° 2. 120° 3. $\vec{V}_R = -5\hat{j}$ 4. (C)

SECTION - B

5. 30m East 6. $\sqrt{F_1^2 + F_2^2}$ 7. $50, 53^\circ$ with East 8. $250\sqrt{5}$ N, $\tan^{-1}(2)$ W of N
 9. (A) 10. (B) 11. (B) 12. (D) 13. (D) 14. (A)
 15. (C) 16. (B) 17. (D)

SECTION - C

18. $\sqrt{14}$ 19. $\frac{3\hat{i} + 4\hat{j}}{5}$ 20. $-25 \cos 30^\circ$ and $+25 \sin 30^\circ$ 21. $30\sqrt{3}$ km h $^{-1}$
 22. $\sqrt{0.11}$ 23. 15° 24. (A)

SECTION - D

25. (a) 3 (b) $-\hat{i} + 2\hat{j} - \hat{k}$ 26. (a) 6 (b) $6\sqrt{3}$ 27. (D) 28. (B)

**PART-I
SECTION-A**

1. $-\frac{1}{x}$ 2. $f(2) = 3, f(1) = 3, f(3) = 5$

SECTION-B

3. $\frac{dy}{dx} = \frac{2}{x} + \cos x, \quad \frac{d^2y}{dx^2} = \frac{-2}{x^2} - \sin x$ 4. $\frac{dy}{dx} = \frac{x^{\frac{6}{7}}}{7} + \sec^2 x \Rightarrow \frac{d^2y}{dx^2} = \frac{-6}{49} \times \frac{-13}{7} + 2\tan x \sec^2 x$

SECTION-C

5. $e^x(\tan x + \sec^2 x)$ 6. $2x\sin^4 x + 4x^2 \sin^3 x \cos x + \cos^{-2} x + 2x\cos^{-3} x \sin x$ 7. $\frac{dy}{dx} = 1 + 2x + \frac{2}{x^3} - \frac{1}{x^2}$

EXERCISE - II

8. $x^2 \cos x$ 9. $\frac{dy}{dx} = -x^2 \sin x$ 10. $\frac{dr}{d\theta} = \cos \theta + \sec^2 \theta$

SECTION-D

11. $\frac{dy}{dx} = \sec^2 x$ 12. $\frac{-\csc^2 x}{(1+\cot x)^2}$ 13. $\frac{dy}{dx} = \frac{-x \sin x - \cos x}{x^2} + \frac{x \sin x + \cos x}{\cos^2 x}$ 14. $\frac{\sec^2 q}{(1+\tan q)^2}$

SECTION-E

15. $3\sin^2 x \cos x + 3\cos 3x$ 16. $4x \sin(x^2 + 1) \cos(x^2 + 1)$ 17. $\frac{1}{(x^2 + 1)^{3/2}}$ 18. $\frac{1-r}{\sqrt{2r-r^2}}$

19. With $u = \left(\frac{x^2}{8}\right) + x - \left(\frac{1}{x}\right)$, $y = u^4$: $\frac{dy}{dx} = \frac{dy}{du} \frac{du}{dx} = 4u^3 \cdot \left(\frac{x}{4} + 1 + \frac{1}{x^2}\right) = 4$, $4\left(\frac{x^2}{8} + x - \frac{1}{x}\right)^3 \left(\frac{x}{4} + 1 + \frac{1}{x^2}\right)$

SECTION-F

20. (a) $\frac{dV}{dt} = \pi r^2 \frac{dh}{dt} = 5\pi r^2$ (b) $\frac{dV}{dt} = 2\pi hr \frac{dr}{dt} = 10\pi rh$ (c) $\frac{dV}{dt} = \pi r^2 \frac{dh}{dt} + 2\pi hr \frac{dr}{dt} = 5\pi r^2 + 10\pi rh$

SECTION - G

21. $x = 30$ & $y = 30$ 22. $x = \sqrt{\frac{40}{3}}m$

SECTION-H

23. (a) $-\cos x$, (b) $2 \sec^3 x - \sec x$

Given $y = f(u)$ and $u = g(x)$, find $\frac{dy}{dx}$

24. $-\sin(\sin x) \cos x$. 25. $\frac{dy}{dx} = \cos(x - \cos x)(1 + \sin x)$

PART - II

1. $\frac{x^4}{2} - \frac{5x^2}{2} + 7x + C$	2. $\frac{x}{5} + \frac{1}{x^2} + x^2 + C$	3. $\frac{2}{3}x^{3/2} + \frac{3}{4}x^{4/3} + C$	4. $-\frac{1}{x} - \frac{1}{2x^2} + C$	5. $2\sqrt{t} - \frac{2}{\sqrt{t}} + C$
6. $-2t^{-2} - \frac{2}{3}t^{-3/2} + C$	7. $-\cos \theta + \theta + C$	8. $\frac{3\pi^2}{2}$	9. $\frac{7}{3}$	10. 0
				11. $\frac{1}{3} \ln \frac{5}{2}$

12. Using n subintervals of length $\Delta x = \frac{b}{n}$ and right-end point values : Area = $\int_0^b 3x^2 dx = b^3$ 13. $\frac{\pi b^2}{4}$

PART - III SECTION - A

1. $\vec{B} = \lambda \vec{A} = -4 \times 3N - E = 12 S-W$

No it does not represent the same physical quantity.

2. (D) 3. (A) 4. (A), (B), (C)

SECTION-B

5. 37° 6. $r(1 + \sqrt{2})$ 7. (A) 8. (B) 9. (B) 10. (B) 11. (C)

12. (A) 13. (D) 14. (A) 15. (A), (B), (D)

SECTION-C

16. $\frac{4\hat{i} + 5\hat{j} + 2\hat{k}}{\sqrt{45}}$ 17. B 18. (A)

SECTION- D

19. $\frac{x_1}{x_2} = \frac{y_1}{y_2}$ 20. (D)

EXERCISE - III

LEVEL - I

1. (A) \rightarrow Q, (B) \rightarrow R, (C) \rightarrow P, (D) \rightarrow S

2. (a) 8, (b) 4, (c) 2 (b) $\cos \theta = \frac{\vec{F}_1 \cdot \vec{F}_2}{|\vec{F}_1||\vec{F}_2|} \Rightarrow \theta = \cos^{-1} \left(\frac{3}{5\sqrt{2}} \right)$ (c) $F_1 \cos \theta = \frac{\vec{F}_1 \cdot \vec{F}_2}{|\vec{F}_2|} = \frac{6}{5}$

3. (a) $\vec{F}_R = \vec{F}_1 + \vec{F}_2 = 2\hat{i} + 5\hat{j} + 4\hat{k}$

4. (C) 5. (B) 6. (A) 7. (A) 8. (A) 9. (B)

10. (i) True (ii) False (iii) True (iv) True

11. (i) 25 Units. (ii) $15\hat{i} + 20\hat{j}$ (iii) Null vector (iv) $\sqrt{224}$ units (v) 7 units
 Perpendicular (viii) 45 (ix) zero. (vi) $\frac{1}{\sqrt{3}}\hat{i} + \frac{1}{\sqrt{3}}\hat{j} + \frac{1}{\sqrt{3}}\hat{k}$ (v i i)

LEVEL - II

1.	C	2.	A	3.	B	4.	D	5.	A	6.	D	7.	D	8.
B	9.	A	10	A	11.	C	12.	A	13.	A	14.	B	15.	B

16.	B	17.	B	18.	A	19.	B
-----	---	-----	---	-----	---	-----	---

20. (a) 180° , (b) 90° , (c) 0 21. $2 \pm \sqrt{3}$ 22. (a) $|\vec{F}_3| = 8$ N, $\theta = 90^\circ$ (b) $\vec{F}_2 = -6\hat{i}$

23. $\vec{F}_1 = -(12\sqrt{3} - 1)\hat{j}$ & $\vec{F}_2 = (12 - 5\sqrt{3})\hat{i} + (12\sqrt{3} - 15)\hat{j}$ 24. a = -7, b = -3, c = -4


25. $5P\hat{j}, 4P\hat{i}, 6P\hat{i} + 8P\hat{j}, -12P\hat{i} - 9P\hat{j}, \sqrt{20}P$, $\tan^{-1}[-2]$ with the +ve x axis. 26. $2\sqrt{19}$; $\cos^{-1} \frac{7}{2\sqrt{19}}$

27. (a) $11\hat{i} + 5\hat{j} - 7\hat{k}$, (b) $\cos^{-1} \left(\frac{-7}{\sqrt{195}} \right)$, (c) $\cos^{-1} \left(\frac{-20}{\sqrt{1309}} \right)$

1. PHYSICAL QUANTITY

The quantities which can be measured by an instrument and by means of which we can describe the laws of physics are called physical quantities.

Types of physical quantities :

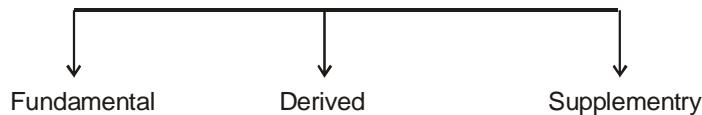

1.1 Fundamental

Although the number of physical quantities that we measure is very large, we need only a limited number of units for expressing all the physical quantities since they are interrelated with one another. So, certain physical quantities have been chosen arbitrarily and their units are used for expressing all the physical quantities, such quantities are known as Fundamental, Absolute or Base Quantities (such as length, time and mass in mechanics)

- (i) All other quantities may be expressed in terms of fundamental quantities.
- (ii) They are independent of each other and cannot be obtained from one another.

An international body named General Conference on Weights and Measures chose seven physical quantities as fundamental :

- | | | | |
|-------------------------------|----------|----------|-------------------------|
| (1) length | (2) mass | (3) time | (4) electric current, |
| (5) thermodynamic temperature | | | (6) amount of substance |
| (7) luminous intensity. | | | |

Note : These are also called as absolute or base quantities.

In mechanics, we treat length, mass and time as the three basic or fundamental quantities.

1.2 Derived : Physical quantities which can be expressed as combination of base quantities are called as derived quantities.

For example : Speed, velocity, acceleration, force, momentum, pressure, energy etc.

$$\text{Ex.1} \quad \text{Speed} = \frac{\text{distance}}{\text{time}} = \frac{\text{length}}{\text{time}}$$

1.3 Supplementary : Beside the seven fundamental physical quantities two supplementary quantities are also defined, they are :

- (1) Plane angle
- (2) Solid angle.

Note : The supplementary quantities have only units but no dimensions.

2. MAGNITUDE :

Magnitude of physical quantity = (numerical value) \times (unit)

Magnitude of a physical quantity is always constant. It is independent of the type of unit.

$$\Rightarrow \text{numerical value} \propto \frac{1}{\text{unit}}$$

$$\text{or} \quad n_1 u_1 = n_2 u_2 = \text{constant}$$

- Ex.2 Length of a metal rod bar is unchanged whether it is measured as 2 metre or 200 cm.
 Observe the change in the Numerical value (from 2 to 200) as unit is changed from metre to cm.
3. UNIT:
- Measurement of any physical quantity is expressed in terms of an internationally accepted certain basic reference standard called unit.
- The units for the fundamental or base quantities are called fundamental or base unit. Other physical quantities are expressed as combination of these base units and hence, called derived units.
- A complete set of units, both fundamental and derived is called a system of unit.

3.1. Principle systems of Unit

There are various system in use over the world : CGS, FPS, SI (MKS) etc

Table 1 : Units of some physical quantities in different systems.

	Physical Quantity	System		
		CGS (Gaussian)	MKS (SI)	FPS (British)
Fundamental	Length	centimeter	meter	foot
	Mass	gram	kilogram	pound
	Time	second	second	second
Derived	Force	dyne	newton → N	poundal
	Work or Energy	erg	joule → J	ft-poundal
	Power	erg/s	watt → W	ft-poundal/s

3.2 Supplementary units :

- (1) Plane angle : radian (rad)
- (2) Solid angle : steradian (sr)

* The SI system is at present widely used throughout the world. In IIT JEE only SI system is followed.

3.3 Definitions of some important SI Units

(i) Metre : 1 m = 1,650, 763.73 wavelengths in vaccum, of radiation corresponding to organ-red light of Krypton-86.

(ii) Second : 1 s = 9,192, 631, 770 time periods of a particular from Cesium - 133 atom.

(iii) Kilogram : 1kg = mass of 1 litre volume of water at 4°C

(iv) Ampere : It is the current which when flows through two infinitely long straight conductors of negligible cross-section placed at a distance of one metre in vacuum produces a force of 2×10^{-7} N/m between them.

(v) Kelvin : 1 K = 1/273.16 part of the thermodynamic temperature of triple point of water.

(vi) Mole : It is the amount of substance of a system which contains as many elementary particles (atoms, molecules, ions etc.) as there are atoms in 12g of carbon - 12.

(vii) Candela : It is luminous intensity in a perpendicular direction of a surface of $\left(\frac{1}{600000}\right)m^2$ of a black body at the temperature of freezing point under a pressure of 1.013×10^5 N/m².

(viii) Radian : It is the plane angle between two radii of a circle which cut-off on the circumference, an arc equal in length to the radius.

(ix) Steradian : The steradian is the solid angle which having its vertex at the centre of the sphere, cut-off an area of the surface of sphere equal to that of a square with sides of length equal to the radius of the sphere.

Ex.3 Find the SI unit of speed, acceleration

Sol. speed = $\frac{\text{distance}}{\text{time}} = \frac{\text{meter(m)}}{\text{second(s)}} = \text{m/s}$ (called as meter per second)

$$\begin{aligned}\text{acceleration} &= \frac{\text{velocity}}{\text{time}} = \frac{\text{displacement / time}}{\text{time}} \\ &= \frac{\text{displacement}}{(\text{time})^2} = \frac{\text{meter}}{\text{second}^2} = \text{m/s}^2 \text{ (called as meter per second square)}$$

4. SI PREFIXES

The magnitudes of physical quantities vary over a wide range. The CGPM recommended standard prefixes for magnitude too large or too small to be expressed more compactly for certain power of 10.

Power of 10	Prefix	Symbol	Power of 10	Prefix	Symbol
10^{18}	exa	E	10^{-1}	deci	d
10^{15}	peta	P	10^{-2}	centi	c
10^{12}	tera	T	10^{-3}	milli	m
10^9	giga	G	10^{-6}	micro	μ
10^6	mega	M	10^{-9}	nano	n
10^3	kilo	k	10^{-12}	pico	p
10^2	hecto	h	10^{-15}	femto	f
10^1	deca	da	10^{-18}	atto	a

5. GENERAL GUIDELINES FOR USING SYMBOLS FOR SI UNITS, SOME OTHER UNITS, SOME OTHER UNITS, AND SI PREFIXES

(a) Symbols for units of physical quantities are printed/written in Roman (upright type), and not in italics

For example : 1 N is correct but 1 N is incorrect

(b) (i) Unit is never written with capital initial letter even if it is named after a scientist.

For example : SI unit of force is newton (correct) Newton (incorrect)

(ii) For a unit named after a scientist, the symbol is a capital letter.

But for other units, the symbol is NOT a capital letter.

For example :

force	→	newton (N)
energy	→	joule (J)
electric current	→	ampere (A)
temperature	→	kelvin (K)
frequency	→	hertz (Hz)

For example :

length	→	meter (m)
mass	→	kilogram (kg)
luminous intensity	→	candela (cd)
time	→	second (s)

Note : The single exception is L, for the unit litre.

(c) Symbols for units do not contain any final full stop all the end of recommended letter and remain unaltered in the plural, using only singular form of the unit.

For example :

Quantity	Correct	Incorrect
25 centimeters	25 cm	25 c m 25 cms.

- (d) Use of solidus (/) is recommended only for indicating a division of one letter unit symbol by another unit symbol. Not more than one solidus is used.

For example :

Correct	Incorrect
m/s^2	$m / s / s$
$N\ s/m^2$	$N\ s / m / m$
$J/K\ mol$	$J / K / mol$
$kg/m\ s$	$kg / m / s$

- (e) Prefix symbols are printed in roman (upright) type without spacing between the prefix symbol and the unit symbol. Thus certain approved prefixes written very close to the unit symbol are used to indicate decimal fractions or multiples of a SI unit, when it is inconveniently small or large.

For example

megawatt	$1\ MW = 10^6\ W$
centimetre	$1\ cm = 10^{-2}\ m$
kilometre	$1\ km = 10^3\ m$
millivolt	$1\ mV = 10^{-3}\ V$
kilowatt-hour	$1\ kW\ h = 10^3\ W\ h = 3.6\ M\ J = 3.6 \times 10^6\ J$
microampere	$1\ \mu A = 10^{-6}\ A$
angstrom	$1\ \text{\AA} = 0.1\ nm = 10^{-10}\ m$
nanosecond	$1\ ns = 10^{-9}\ s$
picofarad	$1\ pF = 10^{-12}\ F$
microsecond	$1\ \mu s = 10^{-6}\ s$
gigahertz	$1\ GHz = 10^9\ Hz$
micron	$1\ \mu m = 10^{-6}\ m$

The unit 'fermi', equal to a femtometre or $10^{-15}\ m$ has been used as the convenient length unit in nuclear studies.

- (f) When a prefix is placed before the symbol of a unit, the combination of prefix and symbol is considered as a new symbol, for the unit, which can be raised to a positive or negative power without using brackets. These can be combined with other unit symbols to form compound unit.

For example :

Quantity	Correct	Incorrect
cm^3	$(cm)^3 = (0.01\ m)^3 = (10^{-2}m)^3 = 10^{-6}\ m^3$	$0.01\ m^3$ or $10^{-2}\ m^3$
mA^2	$(mA)^2 = (0.001\ A)^2 = (10^{-3}A)^2 = 10^{-6}\ A^2$	$0.001\ A^2$

- (g) A prefix is never used alone. It is always attached to a unit symbol and written or fixed before the unit symbol.

For example :

$10^3/\text{m}^3 = 1000/\text{m}^3$ or 1000 m^{-3} , but not k/m^3 or k m^{-3} .

- (h) Prefix symbol is written very close to the unit symbol without spacing between them, while unit symbols are written separately with spacing when units are multiplied together.

For example :

Quantity	Correct	Incorrect
1 ms^{-1}	1 metre per second	1 milli per second
1 ms	1 millisecond	1 metre second
1 C m	1 coulomb metre	1 centimetre
1 cm	1 centimetre	1 coulomb metre

- (i) The use of double prefixes is avoided when single prefixes are available.

For example :

Quantity	Correct	Incorrect
10^{-9} m	1 nm (nanometre)	1 m μ m (milli micrometre)
10^{-6} m	1 μ m (micron)	1 m m m (milli millimetre)
10^{-12} F	1 pF (picofarad)	1 μ μ F (micro microfarad)
10^9 F	1 GW (giga watt)	1 kM W (kilo megawatt)

- (j) The use of a combination of unit and the symbols for unit is avoided when the physical quantity is expressed by combining two or more units.

Quantity	Correct	Incorrect
joule per mole Kelvin	J/mol K or J mol ⁻¹ K ⁻¹	Joule / mole K or J/mol Kelvin or J/mole K
newton metre second	N m s	newton m second or N m second or N metre s or newton metre s

- ### 5.1. Characteristics of base units or standards:

- ## 5.2 Some special types of units :

- | | | | | | |
|----|--------------|----------------------------|--------------------------|--------------------------|------------|
| 1. | 1 Micron | (1μ) | $= 10^{-4}$ cm | $= 10^{-6}$ m | (length) |
| 2. | 1 Angstrom | (1 \AA) | $= 10^{-8}$ cm | $= 10^{-10}$ m | (length) |
| 3. | 1 fermi | $(1f)$ | $= 10^{-13}$ cm | $= 10^{-15}$ m | (length) |
| 4. | 1 inch | $= 2.54$ cm | | | (length) |
| 5. | 1 mile | $= 5280$ feet | $= 1.609$ km | | (length) |
| 6. | 1 atmosphere | $= 10^5$ N/m ² | $= 76$ torr | $= 76$ mm of Hg pressure | (pressure) |
| 7. | 1 litre | $= 10^{-3}$ m ³ | $= 1000$ cm ³ | | (volume) |
| 8. | 1 carat | $= 0.0002$ kg | | | (weight) |
| 9. | 1 pound (lb) | $= 0.4536$ kg | | | (weight) |

6. DIMENSIONS

Dimensions of a physical quantity are the power to which the fundamental quantities must be raised to represent the given physical quantity.

$$\text{For example, density} = \frac{\text{mass}}{\text{volume}} = \frac{\text{mass}}{(\text{length})^3}$$

$$\text{or density} = (\text{mass}) (\text{length})^{-3} \quad \dots (i)$$

Thus, the dimensions of density are 1 in mass and -3 in length. The dimensions of all other fundamental quantities are zero.

For convenience, the fundamental quantities are represented by one letter symbols. Generally mass is denoted by M, length by L, time by T and electric current by A.

The thermodynamic temperature, the amount of substance and the luminous intensity are denoted by the symbols of their units K, mol and cd respectively. The physical quantity that is expressed in terms of the base quantities is enclosed in square brackets.

$$[\sin\theta] = [\cos\theta] = [\tan\theta] = [e^x] = [M^0 L^0 T^0]$$

7. DIMENSIONAL FORMULA

It is an expression which shows how and which of the fundamental units are required to represent the unit of physical quantity.

Different quantities with units, symbol and dimensional formula.

Quantity	Symbol	Formula	S.I. Unit	D.F.
Displacement	s	ℓ	Metre or m	$M^0 L T^0$
Area	A	$\ell \times b$	(Metre) ² or m ²	$M^0 L^2 T^0$
Volume	V	$\ell \times b \times h$	(Metre) ³ or m ³	$M^0 L^3 T^0$
Velocity	v	$v = \frac{\Delta s}{\Delta t}$	m/s	$M^0 L T^{-1}$
Momentum	p	$p = mv$	kgm/s	$M L T^{-1}$
Acceleration	a	$a = \frac{\Delta v}{\Delta t}$	m/s ²	$M^0 L T^{-2}$
Force	F	$F = ma$	Newton or N	$M L T^{-2}$
Impulse	-	$F \times t$	N.sec	$M L T^{-1}$
Work	W	$F \cdot d$	N . m	$M L^2 T^{-2}$
Energy	KE or U	$K.E. = \frac{1}{2}mv^2$ P.E. = mgh	Joule or J	$M L^2 T^{-2}$
Power	P	$P = \frac{W}{t}$	watt or W	$M L^2 T^{-3}$
Density	d	$d = \text{mass/volume}$	kg/m ³	$M L^{-3} T^0$
Pressure	P	$P = F/A$	Pascal or Pa	$M L^{-1} T^{-2}$
Torque	τ	$\tau = r \times F$	N.m.	$M L^2 T^{-2}$
Angular displacement θ		$\theta = \frac{\text{arc}}{\text{radius}}$	radian or rad	$M^0 L^0 T^0$
Angular velocity ω	ω	$\omega = \frac{\theta}{t}$	rad/sec	$M^0 L^0 T^{-1}$
Angular acceleration α		$\alpha = \frac{\Delta \omega}{\Delta t}$	rad/sec ²	$M^0 L^0 T^{-2}$

Moment of Inertia	I	$I = mr^2$	$\text{kg}\cdot\text{m}^2$	ML^2T^0
Frequency		v or f	$f = \frac{1}{T}$	hertz or Hz $\text{M}^0\text{L}^0\text{T}^{-1}$
Stress	-	F/A	N/m^2	$\text{ML}^{-1}\text{T}^{-2}$
Strain	-	$\frac{\Delta\ell}{\ell}; \frac{\Delta A}{A}; \frac{\Delta V}{V}$	-	$\text{M}^0\text{L}^0\text{T}^0$
Youngs modulus	Y	$Y = \frac{F/A}{\Delta\ell/\ell}$	N/m^2	$\text{ML}^{-1}\text{T}^{-2}$
(Bulk modulus of rigidity)				
Surface tension	T	$\frac{F}{\ell}$ or $\frac{W}{A}$	$\frac{\text{N}}{\text{m}}; \frac{\text{J}}{\text{m}^2}$	ML^0T^{-2}
Force constant (spring)	k	$F = kx$	N/m	ML^0T^{-2}
Coefficient of viscosity	η	$F = \eta \left(\frac{dv}{dx} \right) A$	kg/ms(poise in C.G.S.)	$\text{ML}^{-1}\text{T}^{-1}$
Gravitation constant	G	$F = \frac{Gm_1 m_2}{r^2}$	$\frac{\text{N}\cdot\text{m}^2}{\text{kg}^2}$	$\text{M}^{-1}\text{L}^3\text{T}^{-2}$
Gravitational potential	V_g	$V_g = \frac{PE}{m}$	$\frac{\text{J}}{\text{kg}}$	$\text{M}^0\text{L}^2\text{T}^{-2}$
Temperature	θ	-	Kelvin or K	$\text{M}^0\text{L}^0\text{T}^0\theta^{+1}$
Heat	Q	$Q = m \times S \times \Delta t$	Joule or Calorie	ML^2T^{-2}
Specific heat	S	$Q = m \times S \times \Delta t$	$\frac{\text{Joule}}{\text{kg.Kelvin}}$	$\text{M}^0\text{L}^2\text{T}^{-2}\theta^{-1}$
Latent heat	L	$Q = mL$	$\frac{\text{Joule}}{\text{kg}}$	$\text{M}^0\text{L}^2\text{T}^{-2}$
Coefficient of thermal conductivity	K	$Q = \frac{KA(\theta_1 - \theta_2)t}{d}$	$\frac{\text{Joule}}{\text{msecK}}$	$\text{MLT}^{-3}\theta^{-1}$
Universal gas constant	R	$PV = nRT$	$\frac{\text{Joule}}{\text{mol.K}}$	$\text{ML}^2\text{T}^{-2}\theta^{-1}$
Mechanical equivalent of heat	J	$W = JH$	-	$\text{M}^0\text{L}^0\text{T}^0$
Charge	Q or q	$I = \frac{Q}{t}$	Coulomb or C	$\text{M}^0\text{L}^0\text{TA}$
Current	I	-	Ampere or A	$\text{M}^0\text{L}^0\text{T}^0\text{A}$
Electric permittivity	ϵ_0	$\epsilon_0 = \frac{1}{4\pi F} \cdot \frac{q_1 q_2}{r^2}$	$\frac{(\text{coul.})^2}{\text{N}\cdot\text{m}^2}$ or $\frac{C^2}{\text{N}\cdot\text{m}^2}$	$\text{M}^{-1}\text{L}^{-3}\text{T}^4\text{A}^2$
Electric potential	V	$V = \frac{\Delta W}{q}$	Joule/coul	$\text{ML}^2\text{T}^{-3}\text{A}^{-1}$
Intensity of electric field	E	$E = \frac{F}{q}$	N/coul.	$\text{MLT}^{-3}\text{A}^{-1}$

Capacitance	C	$Q = CV$	Farad	$M^{-1}L^{-2}T^4A^2$
Dielectric constant	ϵ_r	$\epsilon_r = \frac{\epsilon}{\epsilon_0}$	-	$M^0L^0T^0$
or relative permittivity				
Resistance	R	$V = IR$	Ohm	$ML^2T^{-3}A^{-2}$
Conductance	S	$S = \frac{1}{R}$	Mho	$M^{-1}L^{-2}T^{-3}A^2$
Specific resistance	ρ	$\rho = \frac{RA}{l}$	Ohm × meter	$ML^3T^{-3}A^{-2}$
or resistivity				
Conductivity or specific conductance	s	$\sigma = \frac{1}{\rho}$	Mho/meter	$M^{-1}L^{-3}T^3A^2$
Magnetic induction	B	$F = qvB\sin\theta$ or $F = BIL$	Tesla or weber/m ²	$MT^{-2}A^{-1}$
Magnetic flux	ϕ	$e = \frac{d\phi}{dt}$	Weber	$ML^2T^{-2}A^{-1}$
Magnetic intensity	H	$B = \mu H$	A/m	$M^0L^{-1}T^0A$
Magnetic permeability of free space or medium	μ_0	$B = \frac{\mu_0}{4\pi} \frac{Id\sin\theta}{r^2}$	$\frac{N}{amp^2}$	$MLT^{-2}A^{-2}$
Coefficient of self or	L	$e = L \cdot \frac{dI}{dt}$	Henery	$ML^2T^{-2}A^{-2}$
Mutual inductance				
Electric dipole moment	p	$p = q \times 2\ell$	C.m.	M^0LTA
Magnetic dipole moment	M	$M = NIA$	amp.m ²	$M^0L^2AT^0$

8. USE OF DIMENSIONS

Theory of dimensions have following main uses :

8.1 Conversion of units :

This is based on the fact that the product of the numerical value (n) and its corresponding unit (u) is a constant, i.e.,

$$n[u] = \text{constant}$$

$$\text{or } n_1[u_1] = n_2[u_2]$$

Suppose the dimensions of a physical quantity are a in mass, b in length and c in time. If the fundamental units in one system are M_1 , L_1 and T_1 and in the other system are M_2 , L_2 and T_2 respectively. Then we can write.

$$n_1[M_1^a L_1^b T_1^c] = n_2[M_2^a L_2^b T_2^c] \quad \dots (i)$$

Here n_1 and n_2 are the numerical values in two system of units respectively. Using Eq. (i), we can convert the numerical value of a physical quantity from one system of units into the other system.

Ex.4 The value of gravitation constant is $G = 6.67 \times 10^{-11} \text{ Nm}^2/\text{kg}^2$ in SI units. Convert it into CGS system of units.

Sol. The dimensional formula of G is $[M^{-1} L^3 T^{-2}]$.

Using equation number (i), i.e.,

$$n_1[M_1^{-1} L_1^3 T_1^{-2}] = n_2[M_2^{-1} L_2^3 T_2^{-2}]$$

$$n_2 = n_1 \left[\frac{M_1}{M_2} \right]^{-1} \left[\frac{L_1}{L_2} \right]^3 \left[\frac{T_1}{T_2} \right]^{-2}$$

Here, $n_1 = 6.67 \times 10^{-11}$

$M_1 = 1 \text{ kg}, M_2 = 1 \text{ g} = 10^{-3} \text{ kg}$ $L_1 = 1 \text{ m}, L_2 = 1 \text{ cm} = 10^{-2} \text{ m}$, $T_1 = T_2 = 1 \text{ s}$

Substituting in the above equation, we get

$$n_2 = 6.67 \times 10^{-11} \left[\frac{1\text{kg}}{10^{-3}\text{kg}} \right]^{-1} \left[\frac{1\text{m}}{10^{-2}\text{m}} \right]^3 \left[\frac{1\text{s}}{1\text{s}} \right]^{-2}$$

or $n_2 = 6.67 \times 10^{-8}$

Thus, value of G in CGS system of units is $6.67 \times 10^{-8} \text{ dyne cm}^2/\text{g}^2$.

8.2 To check the dimensional correctness of a given physical equation :

Every physical equation should be dimensionally balanced. This is called the 'Principle of Homogeneity'. The dimensions of each term on both sides of an equation must be the same. On this basis we can judge whether a given equation is correct or not. But a dimensionally correct equation may or may not be physically correct.

Ex.5 Show that the expression of the time period T of a simple pendulum of length l given by $T = 2\pi\sqrt{\frac{l}{g}}$ is dimensionally correct.

Sol.

$$T = 2\pi\sqrt{\frac{l}{g}}$$

$$\text{Dimensionally } [T] = \sqrt{\frac{[L]}{[LT^{-2}]}} = [T]$$

As in the above equation, the dimensions of both sides are same. The given formula is dimensionally correct.

8.3 Principle of Homogeneity of Dimensions.

This principle states that the dimensions of all the terms in a physical expression should be same. For

example, in the physical expression $s = ut + \frac{1}{2}at^2$, the dimensions of s, ut and $\frac{1}{2}at^2$ all are same.

Note : The physical quantities separated by the symbols +, -, =, >, < etc., have the same dimensions.

Ex.6 The velocity v of a particle depends upon the time t according to the equation $v = a + bt + \frac{c}{d+t}$.

Write the dimensions of a, b, c and d.

Sol. From principle of homogeneity

$$[a] = [v]$$

or $[a] = [LT^{-1}]$ Ans.

$$[bt] = [v]$$

or $[b] = \frac{[v]}{[t]} = \frac{[LT^{-1}]}{[T]}$

or $[b] = [LT^{-2}]$

Similarly, $[d] = [t] = [T]$ Ans.

Further, $\frac{[c]}{[d+t]} = [v]$

or $[c] = [v][d+t]$

or $[c] = [LT^{-1}][T]$

or $[c] = [L]$ Ans.

8.4 To establish the relation among various physical quantities :

If we know the factors on which a given physical quantity may depend, we can find a formula relating the quantity with those factors. Let us take an example.

Ex. 7 The frequency (f) of a stretched string depends upon the tension F (dimensions of force), length l of the string and the mass per unit length μ of string. Derive the formula for frequency.

Sol. Suppose, that the frequency f depends on the tension raised to the power a , length raised to the power b and mass per unit length raised to the power c . Then.

$$f \propto [F]^a [l]^b [\mu]^c$$

or $f = k[F]^a [l]^b [\mu]^c$

Here, k is a dimensionless constant. Thus,

$$[f] = [F]^0 [l]^b [\mu]^c$$

or $[M^0 L^0 T^{-1}] = [MLT^{-2}]^a [L]^b [ML^{-1}]^c$

or $[M^0 L^0 T^{-1}] = [M^{a+c} L^{a+b-c} T^{-2a}]$

For dimensional balance, the dimension on both sides should be same.

Thus, $a + c = 0 \dots \text{(ii)}$

$$a + b - c = 0 \dots \text{(iii)}$$

and $-2a = -1 \dots \text{(iv)}$

Solving these three equations, we get

$$a = \frac{1}{2}, \quad c = -\frac{1}{2} \quad \text{and} \quad b = -1$$

Substituting these values in Eq. (i), we get

$$f = k(F)^{1/2}(l)^{-1}(\mu)^{-1/2}$$

or $f = \frac{k}{l} \sqrt{\frac{F}{\mu}}$

Experimentally, the value of k is found to be $\frac{1}{2}$

Hence, $f = \frac{1}{2l} \sqrt{\frac{F}{\mu}}$

8.5 Limitations of Dimensional Analysis

The method of dimensions has the following limitations :

(i) By this method the value of dimensionless constant can not be calculated.

(ii) By this method the equation containing trigonometrical, exponential and logarithmic terms cannot be analysed.

(iii) If a physical quantity depends on more than three factors, then relation among them cannot be established because we can have only three equations by equalising the powers of M , L and T .

EXERCISE - I

SECTION A : UNITS

17. One watt-hour is equivalent to
 (A) 6.3×10^3 Joule (B) 6.3×10^{-7} Joule
 (C) 3.6×10^3 Joule (D) 3.6×10^{-3} Joule

18. Which of the following statement is wrong ?
 (A) Unit of K.E. is Newton-metre
 (B) Unit of viscosity is poise
 (C) Work and energy have same dimensions
 (D) Unit of surface tension is Newton metre

SECTION : B DIMENSIONS

19. What are the dimensions of length in force \times displacement/time
 (A) -2 (B) 0 (C) 2 (D) none of these

20. The angular frequency is measured in rad s⁻¹. Its dimension in length are :
 (A) -2 (B) -1 (C) 0 (D) 2

21. [M L T⁻¹] are the dimensions of -
 (A) power (B) momentum
 (C) force (D) couple

22. The dimensional formula for angular momentum is-
 (A) ML²T⁻² (B) ML²T⁻¹
 (C) MLT⁻¹ (D) M⁰L²T⁻²

23. The dimensions of universal gravitational constant are
 (A) M⁻¹ L³ T⁻² (B) M⁻¹ L³ T⁻¹
 (C) M⁻¹ L⁻¹ T⁻² (D) M⁻² L² T⁻²

24. The SI unit of Stefan's constant is :
 (A) Ws⁻¹ m⁻² K⁻⁴ (B) Js m⁻¹ K⁻¹
 (C) Js⁻¹ m⁻² K⁻¹ (D) W m⁻² K⁻⁴

25. What are the dimensions of Boltzmann's constant?
 (A) MLT⁻²K⁻¹ (B) ML²T⁻²K⁻¹
 (C) M⁰LT⁻² (D) M⁰L²T⁻²K⁻¹

26. Dimensions of magnetic flux density is -
 (A) M¹ L⁰ T⁻¹A⁻¹ (B) M¹ L⁰ T⁻²A⁻¹
 (C) M¹ L¹ T⁻²A⁻¹ (D) M¹ L⁰ T⁻¹A⁻²

27. A pair of physical quantities having the same dimensional formula is :
 (A) angular momentum and torque
 (B) torque and energy
 (C) force and power
 (D) power and angular momentum

28. Dimensions of pressure are the same as that of
 (A) force per unit volume
 (B) energy per unit volume
 (C) force
 (D) energy

29. Which one of the following has the dimensions of ML⁻¹T⁻²?
 (A) torque (B) surface tension
 (C) viscosity (D) stress

30. The dimensions of the quantity $\frac{L}{RCV}$ are -
 (A) M⁰ L⁰ T¹A¹ (B) M⁰ L⁰ T⁻¹A⁻¹
 (C) M⁰ L⁰ T⁰A¹ (D) M⁰ L⁰ T⁰A⁻¹

31. For $10^{(at+3)}$, the dimension of a is-

(A) $M^0 L^0 T^0$ (B) $M^0 L^0 T^1$

(C) $M^0 L^0 T^{-1}$ (D) None of these

32. The pressure of 10^6 dyne/cm² is equivalent to

(A) 10^5 N/m^2 (B) 10^6 N/m^2

(C) 10^7 N/m^2 (D) 10^8 N/m^2

33. The SI unit of length is the meter. Suppose we adopt a new unit of length which equals to

x meters. The area 1m^2 expressed in terms of the new unit has a magnitude-

(A) x (B) x^2

(C) $\frac{1}{x}$ (D) $\frac{1}{x^2}$

34. $\rho = 2 \text{ g/cm}^3$ convert it into MKS system -

(A) $2 \times 10^{-3} \frac{\text{kg}}{\text{m}^3}$ (B) $2 \times 10^3 \frac{\text{kg}}{\text{m}^3}$

(C) $4 \times 10^3 \frac{\text{kg}}{\text{m}^3}$ (D) $2 \times 10^6 \frac{\text{kg}}{\text{m}^3}$

35. Given that v is the speed, r is radius and g is acceleration due to gravity. Which of the following is dimension less

(A) $\frac{v^2 g}{r}$ (B) $v^2 r g$ (C) $v r^2 g$ (D) $\frac{v^2}{r g}$

36. Choose the correct statement(s) :

(A) A dimensionally correct equation must be correct.

(B) A dimensionally correct equation may be correct.

(C) A dimensionally incorrect equation may be correct.

(D) A dimensionally incorrect equation may be incorrect.

37. The value of $G = 6.67 \times 10^{-11} \text{ N m}^2 (\text{kg})^{-2}$. Its numerical value in CGS system will be :

(A) 6.67×10^{-8} (B) 6.67×10^{-6}

(C) 6.67 (D) 6.67×10^{-5}

38. The density of mercury is 13600 kg m^{-3} . Its value of CGS system will be :

(A) 13.6 g cm^{-3} (B) 1360 g cm^{-3}

(C) 136 g cm^{-3} (D) 1.36 g cm^{-3}

BASIC MATHEMATICS

39. The radius of two circles are r and $4r$ what will be the ratio of their Area and perimeter.

40. Internal radius of a ball is 3 cm and external radius is 4 cm. What will be the volume of the material used.

EXERCISE - II

19. In above question 16, the dimensional formula for ab is

- (A) ML^2T^{-2} (B) ML^4T^{-2} (C) ML^6T^{-2} (D) ML^8T^{-2}

20. Which pair of following quantities has dimensions different from each other.

- (A) Impulse and linear momentum
 (B) Plank's constant and angular momentum
 (C) Moment of inertia and moment of force
 (D) Young's modulus and pressure

21. If force (F) is given by $F = Pt^{-1} + \alpha t$, where t is time. The unit of P is same as that of

- (A) velocity (B) displacement
 (C) acceleration (D) momentum

22. The product of energy and time is called action. The dimensional formula for action is same as that for

- (A) power (B) angular energy
 (C) force \times velocity (D) impulse \times distance

23. When a wave traverses a medium, the displacement of a particle located at x at time t is given by

$$y = a \sin(bt - cx)$$

where a, b and c are constants of the wave. The dimensions of b are the same as those of

- (A) wave velocity (B) amplitude
 (C) wavelength (D) wave frequency

24. In the above question dimensions of $\frac{b}{c}$ are the same as those of

- (A) wave velocity (B) wavelength
 (C) wave amplitude (D) wave frequency

25. What is the physical quantity whose dimensions are $M L^2 T^{-2}$?

- (A) Kinetic energy (B) pressure
 (C) momentum (D) power

26. If force, acceleration and time are taken as fundamental quantities, then the dimensions of length will be :

- (A) FT^2 (B) $F^{-1} A^2 T^{-1}$ (C) $FA^2 T$ (D) AT^2

27. The dimensions $ML^{-1}T^{-2}$ can correspond to

- (A) moment of a force or torque
 (B) surface tension
 (C) pressure
 (D) co-efficient of viscosity

(useful relation are $\vec{\tau} = \vec{r} \times \vec{F}$, $S = F/I$, $F = 6\pi\eta r v$, where symbols have usual meaning)

28. Which of the following can be a set of fundamental quantities

- (A) length, velocity, time
 (B) momentum, mass, velocity
 (C) force, mass, velocity
 (D) momentum, time, frequency

29. If area (A) velocity (v) and density (ρ) are base units, then the dimensional formula of force can be represented as

- (A) $A v \rho$ (B) $A v^2 \rho$ (C) $A v \rho^2$ (D) $A^2 v \rho$

30. In a certain system of units, 1 unit of time is 5 sec, 1 unit of mass is 20 kg and unit of length is 10m.

In this system, one unit of power will correspond to

- (A) 16 watts (B) $1/16$ watts
 (C) 25 watts (D) none of these

31. In a book, the answer for a particular question is

expressed as $b = \frac{ma}{k} \sqrt{1 + \frac{2kl}{ma}}$ here m represents

mass, a represents accelerations, l represents length. The unit of b should be

- (A) m/s (B) m/s² (C) meter (D) /sec

32. $\alpha = \frac{F}{V^2} \sin(\beta t)$ (here V = velocity, F = force, t = time) : Find the dimension of α and β -

- (A) $\alpha = [M^1 L^1 T^0]$, $\beta = [T^{-1}]$
 (B) $\alpha = [M^1 L^1 T^{-1}]$, $\beta = [T^1]$
 (C) $\alpha = [M^1 L^1 T^{-1}]$, $\beta = [T^{-1}]$
 (D) $\alpha = [M^1 L^{-1} T^0]$, $\beta = [T^{-1}]$

33. If E, M, J and G denote energy, mass, angular momentum and gravitational constant respectively,

then $\frac{EJ^2}{M^5 G^2}$ has the dimensions of

- (A) length (B) angle (C) mass (D) time

34. The dimensions $ML^{-1}T^{-2}$ may correspond to

- (A) work done by a force (B) linear momentum
 (C) pressure (D) energy per unit volume

35. The velocity of water waves may depend on their wavelength λ , the density of water ρ and the acceleration due to gravity g. The method of dimensions gives the relation between these quantities as

- (A) $v^2 = k \lambda^{-1} g^{-1} \rho^{-1}$
 (B) $v^2 = k g \lambda$
 (C) $v^2 = k g \lambda \rho$
 (D) $v^2 = k \lambda^3 g^{-1} \rho^{-1}$ where k is a dimensionless constant

36. If the unit of force is 1 kilonewton, the length is 1 km and time is 100 second, what will be the unit of mass :

- (A) 1000 kg (B) 10 kg
 (C) 10000 kg (D) 100 kg

37. A body moving through air at a high speed 'v' experiences a retarding force 'F' given by $F = K A d v^x$ where 'A' is the surface area of the body, 'd' is the density of air and 'K' is a numerical constant. The value of 'x' is :

- (A) 1 (B) 2 (C) 3 (D) 4

38. The velocity of a freely falling body changes as $g^p h^q$ where g is acceleration due to gravity and h is the height. The values of p and q are :

- (A) $1, \frac{1}{2}$ (B) $\frac{1}{2}, \frac{1}{2}$

- (C) $\frac{1}{2}, 1$ (D) 1, 1

39. If the acceleration due to gravity is 10 ms^{-2} and the units of length and time are changed to kilometre and hour, respectively, the numerical value of the acceleration is :

- (A) 360000 (B) 72000
(C) 36000 (D) 129600

40. If 'c' the velocity of light 'g' the acceleration due to gravity and 'P' the atmospheric pressure are fundamental units, then the dimensions of length will be

- (A) c/g (B) $P \times c \times g$ (C) c/P (D) c^2/g

41. The units of length, velocity and force are doubled. Which of the following is the correct change in the other units ?

- (A) unit of time is doubled
(B) unit of mass is doubled
(C) unit of momentum is doubled
(D) unit of energy is doubled

42. If the units of force and that of length are doubled, the unit of energy will be :

- (A) $1/4$ times (B) $1/2$ times
(C) 2 times (D) 4 times


43. If the units of M , L are doubled then the unit of kinetic energy will become

- (A) 2 times (B) 4 times
(C) 8 times (D) 16 times

44. Binomial


- (a) $(99)^{1/2}$ (b) $(120)^{1/2}$ (c) $(126)^{1/3}$

45. A normal human eye can see an object making an angle of 1.8° at the eye. What is the approximate height of object which can be seen by an eye placed at a distance of 1 m from the eye.

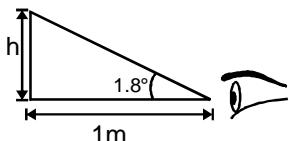

46. Draw graph for following equations :

- (i) $v = v_0 - at$ (ii) $x = 4t - 3$
(iii) $x = 4at^2$ (iv) $v = -gt$

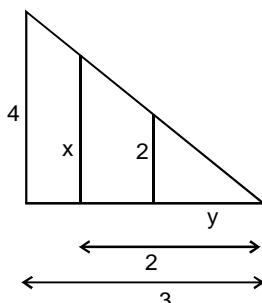

47. Find x and y :

48. Which of the following is not the unit length :
(A) micron (B) light year
(C) angstrom (D) radian

49. A particle is in a uni-directional potential field where the potential energy (U) of a particle depends on the x -coordinate given by $U_x = k(1 - \cos ax)$ & k and ' a ' are constants. Find the physical dimensions of ' a ' & k .

50. The time period (T) of a spring mass system depends upon mass (m) & spring constant (k) & length

of the spring (l) [$k = \frac{\text{Force}}{\text{length}}$]. Find the relation among, (T), (m), (l) & (k) using dimensional method.

51. The equation of state for a real gas at high temperature is given by $P = \frac{nRT}{V-b} - \frac{a}{T^{1/2}V(V+b)}$ where

n , P V & T are number of moles, pressure, volume & temperature respectively & R is the universal gas constant. Find the dimensions of constant ' a ' in the above equation.

52. The distance moved by a particle in time t from centre of a ring under the influence of its gravity is given by $x = a \sin \omega t$ where a & ω are constants. If ω is found to depend on the radius of the ring (r), its mass (m) and universal gravitational constant (G), find using dimensional analysis an expression for ω in terms of r , m and G .


53. If the velocity of light c , Gravitational constant G & Plank's constant h be chosen as fundamental units, find the dimension of mass, length & time in the new system.

54. A satellite is orbiting around a planet. Its orbital velocity (v_o) is found to depend upon

- (a) Radius of orbit (R)
(b) Mass of planet (M)
(c) Universal gravitation constant (G)

Using dimensional analysis find an expression relating orbital velocity (v_o) to the above physical quantities.

55. The angle subtended by the moon's diameter at a point on the earth is about 0.50° . Use this and the fact that the moon is about 384000 km away to find the approximate diameter of the moon.

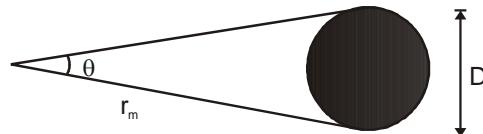

- (A) 192000 km (B) 3350 km
(C) 1600 km (D) 1920 km

56. Use the approximation $(1 + x)^n \approx 1 + nx$, $|x| \ll 1$, to find approximate value for

- (a) $\sqrt{99}$ (b) $\frac{1}{1.01}$

57. Use the small angle approximations to find approximate values for


- (a) $\sin 8^\circ$ and (b) $\tan 5^\circ$

EXERCISE - I

1. A 2. C 3. C 4. B 5. C 6. C 7. C 8. B
 9. B 10. D 11. A 12. D 13. D 14. A 15. D 16. D
 17. C 18. D 19. C 20. C 21. B 22. B 23. A 24. D
 25. B 26. B 27. B 28. B 29. D 30. D 31. C 32. A
 33. D 34. B 35. D 36. ABD 37. A 38. A 39. $\frac{1}{16}, \frac{1}{4}$ 40. $\frac{148\pi}{3}$

EXERCISE - II

1. B 2. B 3. B 4. D 5. D 6. C 7. A 8. C
 9. C 10. ABC 11. D 12. C 13. C 14. B 15. C 16. B
 17. B 18. A 19. D 20. C 21. D 22. D 23. D 24. A
 25. A 26. D 27. C 28. C 29. B 30. A 31. C 32. D
 33. B 34. CD 35. B 36. C 37. B 38. B 39. D 40. D
 41. C 42. D 43. C 44. (a) 9.9498 (b) 10.954 (c) 5.0132 45. π cm

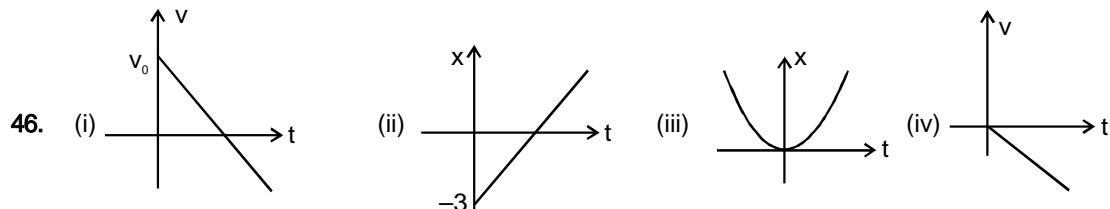

47. $x = \frac{8}{3}$, $y = \frac{3}{2}$ 48. D 49. L^{-1}, ML^2T^{-2} 50. $T = a\sqrt{\frac{m}{k}}$ 51. $ML^5T^{-2}K^{1/2}$ 52. $\omega = K\sqrt{\frac{Gm}{r^3}}$

53. $[M] = [h^{1/2} \cdot c^{1/2} \cdot G^{-1/2}]$; $[L] = [h^{1/2} \cdot c^{-3/2} \cdot G^{1/2}]$; $[T] = [h^{1/2} \cdot c^{-5/2} \cdot G^{1/2}]$ 54. $v_0 = k\sqrt{\frac{Gm}{R}}$

55. B 56. (a) 9.95, (b) 0.99 57. 0.14, 0.09

KINEMATICS

Kinematics is such a branch of mechanics which deals with study of motion of a body without going into the cause of motion such as force or torque. It only analyses the effect caused in the motion of the body (**variations in the motional parameters**) due to applications of force or torque.

For detailed analysis of kinematics it is divided into three parts

1. Motion in one Dimension (Motion along a straight line)
Requires only one co-ordinate
2. Motion in two Dimensions (Motion in a plane)
Requires minimum two co-ordinates
3. Motion in three Dimensions (Motion in space)
Requires all the three co-ordinates

MOTION IN ONE DIMENSION

Displacement

The **displacement** of a particle is defined as the difference between its final position and its initial position. We represent the displacement as Δx .

$$\Delta x = x_f - x_i$$

The subscripts *i* and *f* refer to be *initial* and *final* positions. These are not necessarily the positions from which the particle starts its motion nor where its motion ceases. The *i* and *f* designate the particular initial and final positions we are considering out of the entire motion of the object.

Note *The order : final position minus initial position . Whenever we calculate "delta" anywhere, we always take the final value minus the initial value.*

Average Velocity and Average Speed

The **average velocity** of an object travelling along the *x*-axis is defined as the ratio of its displacement to the time taken for that displacement.

$$v_{av} = \frac{\Delta x}{\Delta t} = \frac{x_f - x_i}{t_f - t_i}$$

The **average speed** of a particle is defined as the ratio of the total distance travelled to the total time taken.

$$\text{Average speed} = \frac{\text{Total distance travelled}}{\Delta t}$$

Note: that *velocity* and *speed* have *different meanings*.


If a body moves along a straight line and its direction does not change then in this case

- Distance and displacement have same value
- Velocity and speed have also same value
- Average velocity \leq average speed and displacement \leq distance is always true. The equality of the quantities is true only when the motion is taking place on a straight line and that too only along one direction.

One-dimensional motion can be classified in two parts

(a) Non-accelerated motion

(b) Acceleration motion

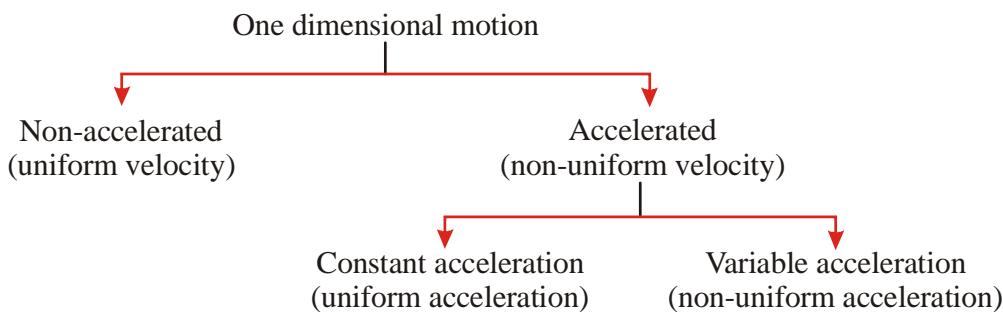


Ex. 1 A bird flies toward east at 10 m/s for 100 m . It then turns around and flies at 20 m/s for 15 s .

Find

- its average speed
- its average velocity

Solution
find the

Required quantities, we need the total time interval. The first part of the journey took $\Delta t_1 = (100 \text{ m}) / (10 \text{ m/s}) = 10 \text{ s}$, and we are given $t_2 = 15 \text{ s}$ for the second part. Hence the total time interval is

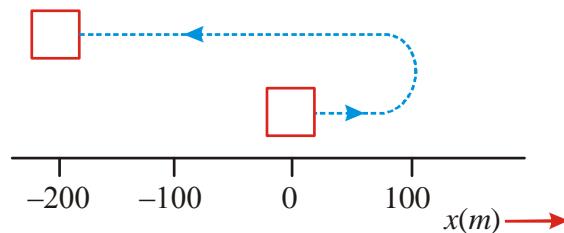

$$\Delta t = \Delta t_1 + \Delta t_2 = 25 \text{ s}$$

The bird flies 100 m east and then $(20 \text{ m/s}) (15 \text{ s}) = 300 \text{ m}$ west

$$(a) \text{ Average speed} = \frac{\text{Distance}}{\Delta t} = \frac{100\text{m} + 300\text{m}}{25\text{s}} = 16 \text{ m/s}$$

$$(b) \text{ The net displacement is } x = \Delta x_1 + \Delta x_2 = 100 \text{ m} - 300 \text{ m} = 200 \text{ m}$$

So that $v_{av} = \frac{\Delta x}{\Delta t} = \frac{-200\text{m}}{25\text{s}} = -8 \text{ m/s}$. The *negative sign* means that v_{av} is directed toward the west.

CAUTION

Sometimes students try to calculate the average velocity by just adding the two given velocities and dividing by two. This procedure is wrong, and it can be clearly illustrated with the following example.

A college student drives a car 1 kilometer at 30 kmph . How fast must the student drive a second kilometer in order to average 60 kmph for the 2 minute trip.

If you believe that the average velocity is the average of the velocities, then the answer will be


60 kmph because $\frac{30+90}{2} = 60 \text{ kmph}$. But the correct answer is "*not possible*". There is *no way*

the student can average 60 kmph for the trip! Sixty kmph means 1 km/min . In order to average 60 kmph for 2 km , the trip must be driven in 2 min . But going the first kilometer at 30 kmph takes 2 min . So the driver has no time left at all to go the second kilometer.

Ex. 2 A jogger runs his first 100 m at 4 m/s and the second 100 m at 2 m/s in the same direction. What is the average velocity?

Solution A sketch of his motion is shown in figure. His net displacement

$$\Delta x = \Delta x_1 + \Delta x_2 = 100 \text{ m} + 100 \text{ m} = 200 \text{ m}$$

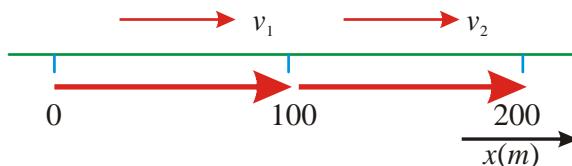

The first half took $\Delta t_1 = (100 \text{ m})/(4 \text{ m/s}) = 25 \text{ s}$,

while the second took $\Delta t_2 = (100 \text{ m})/(2 \text{ m/s}) = 50 \text{ s}$,

The total time interval is $\Delta t = \Delta t_1 + \Delta t_2 = 75 \text{ s}$

$$\text{Therefore, his average velocity is } v_{av} = \frac{\Delta x}{\Delta t} = \frac{200 \text{ m}}{75 \text{ s}} = 2.67 \text{ m/s}$$

Since $2.67 \neq \frac{1}{2}(4+2)$, we see that the average velocity is not, in general, equal to


the

average of the velocities.

Ex. 3 Ram takes path 1 (straight line) to go from *P* to *Q* and Shyam takes path 2 (semicircle).

(a) Find the distance travelled by Ram and Shyam?

(b) Find the displacement of Ram and Shyam?

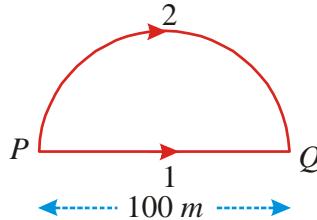

Solution

(a) Distance travelled by Ram = 100 m

Distance travelled by Shyam = $\pi(50 \text{ m}) = 50\pi \text{ m}$

(b) Displacement of Ram = 100 m

Displacement of Shyam = 100 m

Average Acceleration is defined as the ratio of the change in velocity to the time taken.

$$a_{av} = \frac{\Delta v}{\Delta t} = \frac{v_f - v_i}{t_f - t_i}$$

When the time interval in the average calculation becomes too small such that $\Delta t \rightarrow 0$ then this situation

represents a point. Now we can state this situation as an instant.

Instantaneous Velocity is defined as the value approached by the average velocity when the time interval for

measurement becomes closer and closer to zero, i.e. $\Delta t \rightarrow 0$. Mathematically

$$v(t) = \lim_{\Delta t \rightarrow 0} v_{av} = \lim_{\Delta t \rightarrow 0} \frac{\Delta x}{\Delta t}$$

The *instantaneous velocity function* is the derivative with respect to the time of the displacement function.

$$v(t) = \frac{dx(t)}{dt}$$

Instantaneous Acceleration is defined analogous to the method for defining instantaneous velocity. That is, instantaneous acceleration is the value approached by the average acceleration as the time interval for the measurement becomes closer and closer to zero.

The *Instantaneous acceleration* function is the derivative with respect to time of the velocity function

$$a(t) = \frac{dv(t)}{dt}$$

Ex. 4 The position of a particle is given by $x = 40 - 5t - 5t^2$, where x is in metre and t is in seconds.

- (a) Find the average velocity between 1 s and 2 s
- (b) Find its instantaneous velocity at 2 s
- (c) Find its average acceleration between 1 s and 2 s
- (d) Find its instantaneous acceleration at 2 s

Solution (a) At $t = 1$ s $x_i = 30$ m

$$t = 2 \text{ s} \quad x_f = 10 \text{ m}$$

$$v_{av} = \frac{x_f - x_i}{t_f - t_i} = \frac{10 - 30}{2 - 1} = -20 \text{ m/s}$$

$$(b) v = \frac{dx}{dt} = -5 - 10t$$

$$\text{At } t = 2 \text{ s} \quad v = -5 - 10(2) = -25 \text{ m/s}$$

$$(c) \text{At } t = 1 \text{ s} \quad v_i = -5 - 10(1) = -15 \text{ m/s}$$

$$t = 2 \text{ s} \quad v_f = -5 - 10(1) = -25 \text{ m/s}$$

$$v_{av} = \frac{v_f - v_i}{t_f - t_i} = \frac{-25 - (-15)}{2 - 1} = -10 \text{ m/s}^2$$

$$(d) a = \frac{dv}{dt} = -10 \text{ m/s}^2$$

Ex. 5 A particle travels half of total distance with speed v_1 and next half with speed v_2 along a straight line. Find out the average speed of the particle?

Solution Let total distance travelled by the particle be $2s$.

$$\text{Time taken to travel first half} = \frac{s}{v_1}$$

$$\text{Time taken to travel next half} = \frac{s}{v_2}$$

$$\text{Average speed} = \frac{\text{Total distance covered}}{\text{Total time taken}} = \frac{2s}{\frac{s}{v_1} + \frac{s}{v_2}} = \frac{2v_1v_2}{v_1 + v_2}$$

UNIFORM MOTION

- definition of velocity
- Solve for displacement in terms of velocity and time

$$v = \frac{\Delta d}{\Delta t}$$

$$\Delta d = v \Delta t$$

Features of Uniform motion

- Uniform motion is a straight-line motion with constant velocity.
- In uniform motion, displacement and distance are equal.
- The average and instantaneous velocities have same values in uniform motion.
- No net force is required for an object to be in uniform motion.
- The velocity in uniform motion does not depend upon the time interval
- The velocity in uniform motion is independent of the choice of origin.

UNIFORMLY ACCELERATED MOTION

- definition of acceleration

$$a = \frac{\Delta v}{\Delta t} \text{ or } a = \frac{v_2 - v_1}{\Delta t}$$

- Solve for final velocity in terms of initial velocity, acceleration and time interval.

$$v_2 = v_1 + a \Delta t$$

- displacement in terms of initial velocity, final velocity, and time interval

$$\Delta d = \frac{(v_1 + v_2)}{2} \Delta t$$

- displacement in terms of initial velocity, acceleration, and time interval

$$\Delta d = v_1 \Delta t + \frac{1}{2} a \Delta t^2$$

- final velocity in terms of initial velocity, acceleration, and displacement

$$v_2^2 = v_1^2 + 2a \Delta d$$

- Using derivative concept we can have

$$a = \frac{dv}{dt}$$

- by using integration technique

$$\Rightarrow dv = adt \Rightarrow \int dv = \int adt .$$

- Velocity varies from u (initial) to v (final)

$$\Rightarrow \int_u^v dv = \int_0^t adt \Rightarrow v - u = at$$

$$v = u + at$$

- Velocity is given by rate of change of displacement

$$v = \frac{dx}{dt} \quad (v = u + at)$$

$$\Rightarrow dx = v dt \Rightarrow dx = (u + at)dt$$

- by using integration technique

$$\int_{x_0}^x dx = \int_0^t (u + at) dt$$

- x_0 is the initial position

$$\Rightarrow x - x_0 = ut + \frac{1}{2} at^2$$

$$\Rightarrow x = x_0 + ut + \frac{1}{2} at^2$$

- if $x_0 = 0$ (origin)

$$\Rightarrow x = ut + \frac{1}{2} at^2$$

- if $x_0 = 0$ and $u = 0$ (at rest at origin)

$$\Rightarrow x = \frac{1}{2} at^2$$

- ♦ Eliminating t (time) from the above two equations we get
- ♦ In addition to the above derived equations,

by proper substitutions we can also have

$$v^2 = u^2 + 2as.$$

$$x = x_0 + \frac{1}{2}(u + v)t$$

Problem Solving Strategy

- i. Always try to make a simple sketch of the situation described
- ii. Set up a co-ordinate system and clearly indicate the origin.
- iii. (a) List the given quantities with appropriate signs. (by using vector analysis properties)
(b) List the unknown quantities.
- iv. Find the equation that has the quantity you need as the only unknown. (This is not always possible). But you need to generate an idea about the situation.
- v. It is often helpful to obtain a rough graphical solution. (Try to obtain graphs for different situations.)
- vi. Solve the equation (s) to find the desired unknown(s).

Ex. 6 A car accelerates with a constant acceleration from rest to 30 m/s in 10 s. It then continues at a constant velocity. Find

- (a) its acceleration
- (b) how far it travels while speeding up
- (c) the distance it covers while its velocity changes from 10 m/s to 20 m/s

Solution

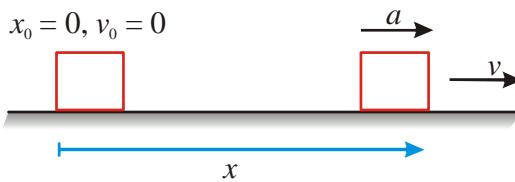


Figure (a)

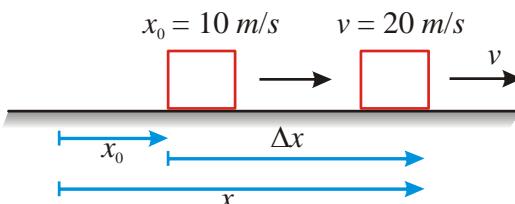


Figure (b)

(a) Given

$$v_0 = 0 \quad a = \frac{v - v_0}{t}$$

$$v = 30 \text{ m/s} \quad \Rightarrow a = \frac{30 - 0}{10} = +3 \text{ m/s}^2$$

$$t = 10 \text{ s}$$

(b) Given

$$v_0 = 0 \quad x = v_0 t + 0.5 a t^2$$

$$v = 30 \text{ m/s} \quad \Rightarrow x = 0.5 a t^2$$

$$t = 10 \text{ s} \quad \Rightarrow x = 0.5 \times 3 \times 100 = 150 \text{ m}$$

$$a = 3 \text{ m/s}^2$$

we can also solve by using $x = x_0 + 0.5 (v_0 + v) t$

$$\Rightarrow x = 0 + 0.5 (30 + 0) \times 10 = 150 \text{ m}$$

(c) Given

$$v_0 = 10 \text{ m/s}$$

$$v^2 = v_0^2 + 2a(\Delta x)$$

$$v = 20 \text{ m/s}$$


$$\Rightarrow 400 = 100 + 6 (\Delta x)$$

$$a = 3 \text{ m/s}^2$$

$$\Rightarrow \Delta x = 50 \text{ m}$$

We don't need to find the total displacement according to the situation given

Ex. 7 A particle is at $x = 5 \text{ m}$ at $t = 2 \text{ s}$ and has a velocity $v = 10 \text{ m/s}$. Its acceleration is constant at -4 m/s^2 . Find the initial position at $t = 0$

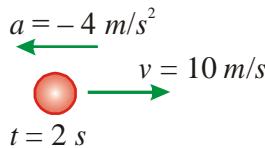**Solution**

Given

$$\text{by using } v = v_0 + at$$

$$x = 5 \text{ m}$$

$$10 = v_0 + (-4 \times 2)$$

$$v = 10 \text{ m/s}$$

$$\Rightarrow v_0 = 18 \text{ m/s}$$

$$a = -4 \text{ m/s}^2$$

$$\text{by using } x = x_0 + 0.5 (v_0 + v)t$$

$$t = 2 \text{ s}$$

$$\Rightarrow 5 = x_0 + 0.5 (18 + 10) \times 2$$

$$\Rightarrow x_0 = -23 \text{ m}$$

Ex. 8 Car A moves at a constant velocity 15 m/s . Another car B starts from rest just as the car A passes it. The car B accelerates at 2 m/s^2 until it reaches its maximum velocity of 20 m/s . Where and when does the car A is caught by other car B?


Solution When two particles are involved in the same problem, we use simple subscripts to distinguish the

variables, as shown in figure. The motion of the car B has two phases: one at constant acceleration

and other at constant velocity. In such problems it is convenient to use Δt instead of t in the equations.

The car B may or may not catch the car A during the acceleration phase. This has to be checked. We

set the origin at the car B, which means $x_{0A} = x_{0B} = 0$

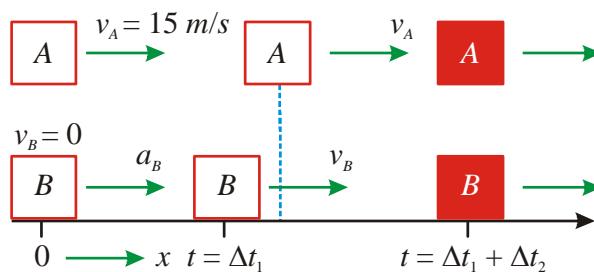

Acceleration Phase:

Given

$$v_A = 15 \text{ m/s}$$

$$v_B = u_B + a_B t$$

$$a_B = 2 \text{ m/s}^2$$

$$\Rightarrow t = \frac{v_B}{a_B} = \frac{20}{2} = 10 \text{ s}$$

$$u_B = 0$$

$$v_B = 20 \text{ m/s}$$

At this time, the positions are given by $x = x_0 + v_0 t + \frac{1}{2} a t^2$

$$x_A = (15)(10) = 150 \text{ m}$$

$$x_B = \frac{1}{2}(2)(10)^2 = 100 \text{ m}$$

The car A is still ahead

Constant velocity phase

Given

$$x_{0A} = 150 \text{ m}$$

The cars meet when they have same position $x_A = x_B$

$$x_{0B} = 100 \text{ m}$$

$$x_A = 150 + 15(\Delta t_2)$$

$$v_A = 15 \text{ m/s}$$

$$x_B = 100 + 20(\Delta t_2)$$

$$v_B = 20 \text{ m/s}$$

$$\Rightarrow 150 + 15(\Delta t_2) = 100 + 20(\Delta t_2)$$

$$\Rightarrow \Delta t_2 = 10 \text{ s}$$

$$\text{Also, } x_A = x_B = 300 \text{ m}$$

Ex. 9 A 150 m long train accelerates uniformly from rest. If the front of the train passes a railway worker 50 m away from the station at a speed of 25 m/s, what will be the speed of the back part of the train as it passes the worker?

Solution

$$v^2 = u^2 + 2as$$

$$25 \times 25 = 0 + 100 a$$

$$a = \frac{25}{4} \text{ m/s}^2$$

Now, for time taken by the back end of the train to pass the worker

$$\text{we have } v'^2 = v^2 + 2a l$$

$$\Rightarrow v'^2 = (25)^2 + 2 \times \frac{25}{4} \times 150$$

$$\Rightarrow v'^2 = 25 \times 25 \times 4$$

$$\Rightarrow v' = 50 \text{ m/s} \quad \text{Ans.}$$

Ex. 10 A particle moving rectilinearly with constant acceleration is having initial velocity of 10 m/s. After some time, its velocity becomes 30 m/s. Find out velocity of the particle at the mid point of its path?

Solution:

Let the total distance be $2x$.

∴ distance upto midpoint = x

Let the velocity at the mid point be v and acceleration be a .

From equations of motion

$$v^2 = u^2 + 2ax$$

$$30^2 = v^2 + 2ax$$

Subtracting

$$v^2 - 30^2 = 10^2 - v^2 \Rightarrow v^2 = 500$$

$$\Rightarrow v = 10\sqrt{5} \text{ m/s}$$

Ex. 11 A police inspector in a jeep is chasing a pickpocket on a straight road. The jeep is going at its maximum speed v (assumed uniform). The pickpocket rides on the motorcycle of a waiting friend when the jeep is at a distance d away, and the motorcycle

starts with a constant acceleration a . Show that the pickpocket will be caught if $v \geq \sqrt{2ad}$.

Solution: Suppose the pickpocket is caught at a time t after motorcycle starts. The distance travelled by the motorcycle during this interval is

$$s = \frac{1}{2}at^2$$

During this interval the jeep travels a distance

$$s + d = vt \quad \text{From the two equations}$$

$$0.5at^2 + d = vt \quad (\text{a quadratic equation in } t).$$

$$\Rightarrow t = \frac{v \pm \sqrt{v^2 - 2ad}}{a}$$

The pickpocket will be caught if t is real and positive.

$$\text{This will be possible if } v^2 \geq 2ad \Rightarrow v \geq \sqrt{2ad}$$

FREE FALL

Motion that occurs solely under the influence of gravity is called **free fall**.

In the absence of air resistance all falling bodies have the same acceleration due to gravity, regardless of their sizes or shapes.

The value of the acceleration due to gravity depends on both *latitude* and *altitude*. It is approximately 9.8 m/s^2 near the surface of the earth. For simplicity a value of 10 m/s^2 is being used in this package.

$$v = u + at \quad \Rightarrow \quad v = u - gt$$

$$s = s_0 + ut + 0.5 at^2 \quad \Rightarrow \quad s = s_0 + ut - 0.5 gt^2$$

$$v^2 = u^2 + 2as \quad \Rightarrow \quad v^2 = u^2 - 2gs$$


Negative sign of g is taken by considering the upward direction as always positive and downward direction as always negative.

We need to use the same kinematical equations as derived earlier for uniformly accelerated motion. **Motion under gravity is also uniformly accelerated motion.**

The only differences is that we need to replace a by $(-g)$.

The signs of v and v_0 are determined by their directions relative to the chosen $+y$ axis.

Note : Sign of the acceleration does not depend on whether the body is going up or coming down, because g always acts downwards and that is why it is always taken to be negative.

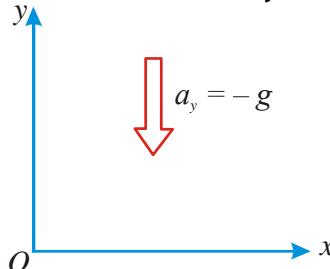

At the highest point of motion the object momentarily comes to rest.


$$\Rightarrow \text{At } h_{\max}, v = 0$$

But even $v = 0$ then also g is acting downwards.

⇒ In motion under gravity acceleration never goes to zero.

Ex. 12 A ball thrown up from the ground reaches a maximum height of 20 m. Find

- its initial velocity
- the time taken to reach the highest point
- its velocity just before hitting the ground
- its displacement between 0.5 and 2.5 s
- the time at which it is 15 m above the ground.

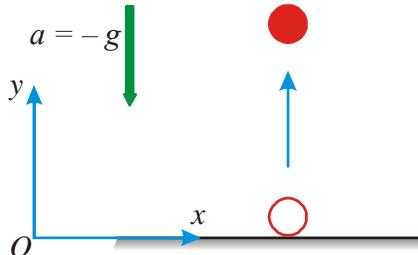

Solution

At the highest point the ball is instantaneously at rest, that is $v = 0$

(a) Given $y_0 = 0$ using $v^2 = u^2 + 2as$
 $y = 20 \text{ m}$ $\Rightarrow 0 = u^2 + 2(-10) \times 20$
 $v = 0$ $\Rightarrow u^2 = 400$
 $\Rightarrow u = 20 \text{ m/s}$

u is +ve because initially the motion is upwards.

(b) by using $v = u + at$ $\Rightarrow 0 = 20 - 10t \Rightarrow t = 2s$

(c) Given $y_0 = 0$ by using $v^2 = u^2 + 2a(\Delta s)$
 $y = 0$ $\Rightarrow v^2 = (20)^2 - 2(10)(0 - 0)$
 $u = 20 \text{ m/s}$ $\Rightarrow v^2 = 400 \Rightarrow v = \pm 20 \text{ m/s}$

At the single point $y = 0$, the velocity has two values $+u$ initially and $-u$ when it lands

$$\Rightarrow v = \pm u$$

(d) To find the displacement, $\Delta y = y_2 - y_1$

by using $s = ut + 0.5 at^2$

$$y_1 = 20(0.5) - 5(0.5)^2 = 8.75 \text{ m and } y_2 = 20(2.5) - 5(2.5)^2 =$$

18.75 m

Hence $\Delta y = +10 \text{ m}$

or at $t = 0.5 \text{ sec.}$

$$v = 20 - 10 \times 0.5 = 20 - 5 = 15 \text{ m/s} \quad (v = u - gt)$$

$$\Delta y = (15 + \Delta t) + 0.5(-10) \times \Delta t \quad (s = ut - 0.5 gt^2)$$

$$\Rightarrow \Delta y = 15 \times 2 - 5 \times 4 = 30 - 20 = 10 \text{ m}$$

(e) Given $y = 15 \text{ m}$ by using $s = ut + 0.5 at^2$

$$y_0 = 0 \quad 15 = 20t - 5t^2$$

$$u = 20 \text{ m/s} \quad \Rightarrow t = 1 \text{ sec and } 3 \text{ sec.}$$


Ex. 13 A ball is thrown upward with an initial velocity of 10 m/s from a rooftop 40 m high. Find

- its velocity on hitting the ground.
- the time of flight
- the maximum height
- the time to return to roof level
- the time it is 15 m below the rooftop.

Solution The origin is assumed at the ground level so that all positions are positive

Given: $y_0 = 40 \text{ m}$

$$u = +10 \text{ m/s}$$

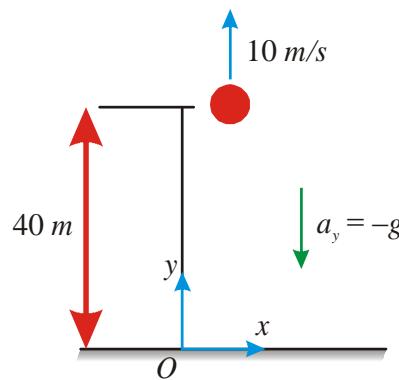

- (a) When the ball lands, its final position coordinate is $y = 0$
by using $v^2 = u^2 + 2a(\Delta s)$
 $\Rightarrow v^2 = 10^2 + 2(-10)(0 - 40)$
 $\Rightarrow v^2 = 100 + 800 = 900.$
 $\Rightarrow v = -30 \text{ m/s}$ ($-ve$ because final velocity is directed downwards)
- (b) by using $v = u + at$
 $-30 = 10 - 10t$
 $\Rightarrow 10t = 40 \Rightarrow t = 4 \text{ sec.}$
or by using $\Delta y = ut + 0.5 at^2$
 $-40 = 10t - 5t^2 \Rightarrow t = 4 \text{ sec.}$
- (c) At the maximum height $v = 0$
by using $v^2 = u^2 + 2a(\Delta y) \Rightarrow 0 = (10)^2 + 2(-10)(y - 40)$
Thus $y = 45 \text{ m.}$
- (d) At the roof level, the final position is $y = 40 \text{ m}$
using $\Delta y = ut + 0.5at^2$
 $\Rightarrow 0 = 10t - 5t^2 \Rightarrow t = 0 \text{ or } 2 \text{ sec}$
we pick $t = 2 \text{ s.}$
- (e) $\Delta y = -15 \text{ m}$
 $\Rightarrow -15 = 10t - 5t^2 \Rightarrow t = 3 \text{ sec.}$

Ex. 14 Two balls are thrown towards each other, ball A at 20 m/s upward from the ground, and two second later ball B at 10 m/s downward from a roof 30 m high.

- (a) Where and when do they meet
(b) What are their velocities on impact?

Solution general Remember in this kind of problem we have to find *when* before *where*. We need to write the

expression for the position coordinates. The coordinate system is shown in figure.

(a) Given $u_A = 20 \text{ m/s} \quad u_B = -10 \text{ m/s}$

If A has been in motion for time t , then B has been in motion for time $(t-2)$.

$$y_A = 20t - 5t^2 \quad y_B = 30 - 10(t-2) - 5(t-2)^2$$


They meet when $y_A = y_B$. This condition immediately leads to $t = 3 \text{ s}$. Substituting into either y_A or

gives $y = 15 \text{ m}$

(b) Since $t = 3 \text{ s}$, we have $v_A = 20 + (-10)(3) = -10 \text{ m/s}$

and $v_B = -10 + (-10)(3-2) = -20 \text{ m/s}$. Observe, A is already moving downward when it

collides with B.

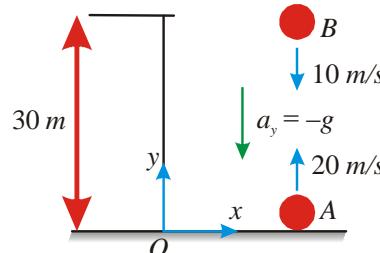

Ex. 15 A girl is standing in an elevator that is moving upward at a velocity of 5m/s and acceleration 2m/s^2 , when she drops her handbag. If she was originally holding the bag at a height of 1.5m above the elevator floor, how long will it take the bag to hit the floor.

Solution In such problems, generally called elevator problems we can use the concept of relative acceleration. Here we solve the problem with respect to elevator or we assume that we are observing from inside of elevator.

Imagine the situation, if you are standing in an elevator accelerating up with an acceleration a . If you are holding a box in your hand, it is also accelerating up with the same acceleration. If you release it free, it falls with acceleration g towards the elevator floor, which is coming up with acceleration a .

Here we can say that the approach acceleration of box towards the elevator floor is $(g + a)$, and we assume that elevator floor is at rest and box is going down with respect to floor with this acceleration called relative acceleration. Similarly if elevator is going down, we take relative acceleration $(g - a)$.

In this problem, elevator is going up with a velocity 5m/s, and an acceleration 2m/s^2 , when the bag is dropped. Bag's relative velocity with respect to elevator floor is zero as both at that instant have the same velocity but relative acceleration of the bag is taken as $10 + 2 = 12\text{m/s}^2$.

The distance fallen by the bag is 1.5 m, as we are assuming elevator is at rest

$$\text{Thus time required is } \sqrt{\frac{2H}{g}} = \sqrt{\frac{2 \times 1.5}{10}} = 0.55\text{s}.$$

Note : If we carefully imagine the situation from outside the elevator, bag has covered the actual distance less than 1.5 m.

Ex. 16 A particle is dropped from a tower. It is found that it travels 45 m in the last second of its journey. Find out the height of the tower?

Solution: Let the total time of journey be n seconds.

$$\text{Using; } s_n = u + \frac{a}{2}(2n-1)$$

$$45 = 0 + \frac{10}{2}(2n-1) \quad n = 5 \text{ sec}$$

Height of tower;

$$h = \frac{1}{2}gt^2 = \frac{1}{2} \times 10 \times 5^2 = 125 \text{ m}$$

DPP # 1

1. A man has to go 50 m due north, 40 m due east and 20 m due south to reach a field.
 - (a) What distance he has to walk to reach the field ?
 - (b) What is his displacement from his house to the field ?
2. A particle starts from the origin, goes along the X – axis to the point (20m, 0) and then returns along the same line to the point (- 20m, 0). Find the distance and displacement of the particle during the trip.
3. It is 260 km from Patna to Ranchi by air and 320 km by road. An aeroplane takes 30 minutes to go from Patna to Ranchi whereas a delux bus takes 8 hours.
 - (a) Find the average speed of the plane.
 - (b) Find the average speed of the bus.
 - (c) Find the average velocity of the plane.
 - (d) Find the average velocity of the bus.
4. When a person leaves his home for sightseeing by his car, the meter reads 12352 km. When he returns home after two hours the reading is 12416 km.
 - (a) What is the average speed of the car during this period?
 - (b) What is the average velocity?
5. An athlete takes 2.0s to reach his maximum speed of 18.0 km/h. What is the magnitude of his average acceleration ?
6. An object having a velocity 4.0 m/s is accelerated at the rate of 1.2 m/s^2 for 5.0s. Find the distance travelled during the period of acceleration.
7. A person travelling at 43.2 km/h applies the brake giving a deceleration of 6.0 m/s^2 to his scooter. How far will it travel before stopping ?
8. A train starts from rest and moves with a constant acceleration of 2.0 m/s^2 for half a minute. The brakes are then applied and the train comes to rest in one minute. Find
 - (a) the total distance moved by the train,
 - (b) the maximum speed attained by the train and
 - (c) the position (s) of the train at half the maximum speed.
9. A bullet travelling with a velocity of 16 m/s penetrates a tree trunk and comes to rest in 0.4 m. Find the time taken during the retardation.
10. A bullet going with speed 350 m/s enters a concrete wall and penetrates a distance of 5.0 cm before coming to rest. Find the deceleration.
11. A particle starting from rest moves with constant acceleration. If it takes 5.0 s to reach the speed 18.0 km/h find (a) the average velocity during this period, and (b) the distance travelled by the particle during this period.
12. A driver takes 0.20s to apply the brakes after he sees a need for it. This is called the reaction time of the driver. If he is driving a car at a speed of 54 km/h and the brakes cause a deceleration of 6.0 m/s^2 , find the distance travelled by the car after he sees the need to put the brakes on.
13. Complete the following table:

Car Model	Driver X Reaction time 0.20 s	Driver Y Reaction time 0.30 s
A (deceleration on hard braking = 6.0 m/s^2)	Speed = 54 km/h Breaking distance a = Total stopping distance b =	Speed = 72 km/h Breaking distance c = Total stopping distance d =

B (deceleration on hard braking = 7.5 m/s^2)	Speed = 54 km/h Breaking distance e = Total stopping distance f =	Speed = 72 km/h Breaking distance g = Total stopping distance h =
---	--	--

14. A police jeep is chasing a culprit going on a motorbike. The motorbike crosses a turning at a speed of 72 km/h. The jeep follows it at a speed of 90 km/h. crossing the turning ten seconds later than the bike. Assuming that they travel at constant speeds, how far from the turning will the jeep catch up with the bike ?
15. A car travelling at 60 km/h overtakes another car travelling at 42 km/h. Assuming each car to be 5.0 m long, find the time taken during the overtake and the total road distance used for the overtake.
16. A ball is projected vertically upward with a speed of 50 m/s. Find (a) the maximum height, (b) the time to reach the maximum height, (c) the speed at half the maximum height. Take $g = 10 \text{ m/s}^2$.
17. A ball is dropped from a balloon going up at a speed of 7 m/s. If the balloon was at a height 60 m at the time of dropping the ball, how long will the ball take in reaching the ground ?
18. A stone is thrown vertically upward with a speed of 28 m/s. (a) Find the maximum height reached by the stone. (b) Find its velocity one second before it reaches the maximum height. (c) Does the answer of part (b) change if the initial speed is more than 28 m/s such as 40 m/s or 80 m/s ?
19. A person sitting on the top of a tall building is dropping balls at regular intervals of one second. Find the positions of the 3rd, 4th and 5th ball when the 6th ball is being dropped.
20. A healthy youngman standing at a distance of 7 m from a 11.8 m high building sees a kid slipping from the top floor. With what speed (assumed uniform) should he run to catch the kid at the arms height (1.8 m) ?
21. An NCC parade is going at a uniform speed of 6 km/h through a place under a berry tree on which a bird is sitting at a height of 12.1 m. At a particular instant the bird drops a berry. Which cadet (give the distance from the tree at the instant) will receive the berry on his uniform ?
22. A ball is dropped from a height. If it takes 0.200s to cross the last 6.00 m before hitting the ground, find the height from which it was dropped. Take $g = 10 \text{ m/s}^2$.
23. A ball is dropped from a height of 5 m onto a sandy floor and penetrates the sand up to 10 cm before coming to rest. Find the retardation of the ball in sand assuming it to be uniform.
24. An elevator is descending with uniform acceleration. To measure the acceleration, a person in the elevator drops a coin at the moment the elevator starts. The coin is 6 ft above the floor of the elevator at the time it is dropped. The person observes that the coin strikes the floor in 1second. Calculate from these data the acceleration of the elevator.
25. The position of a particle moving on x-axis is given by $x = 4t^3 + 3t^2 + 6t + 4$. Find
 (a) The velocity and acceleration of particle at $t = 5 \text{ s}$.
 (b) The average velocity and average acceleration during the interval $t = 0$ to $t = 5 \text{ s}$, $x = 4t^3 + 3t^2 + 6t + 4$
 (a) The velocity and acceleration of particle at $t = 5 \text{ s}$.
 (b) The average velocity and average acceleration during the interval $t = 0$ to $t = 5 \text{ s}$.


MOTION, THEIR GRAPHS AND MEANING OF SLOPE

If θ is the angle at which a straight line is inclined to the positive direction of x -axis, & $0^\circ \leq \theta < 180^\circ$, then the slope of the line, denoted by m , is defined by $m = \tan \theta$. If θ is 90° , m does not exist, because the line is parallel to the y -axis. If $\theta = 0$, then $m = 0$ & the line is parallel to the x -axis.

Graph having $\theta = 90^\circ$ (slope $m = \tan 90^\circ = \infty$) is not possible.

Slope - intercept form: $y = mx + c$ is the equation of a straight line whose slope is m with respect to x -axis & which makes an intercept c on the y -axis. Similarly, $x = my + c$ is the equation of a straight line whose slope is m with respect to y -axis and makes an intercept of c on x -axis.

$$\text{Slope} = m = \tan \theta = \frac{\Delta y}{\Delta x} = \frac{dy}{dx} \quad (\text{where } \Delta x \text{ becomes very small})$$

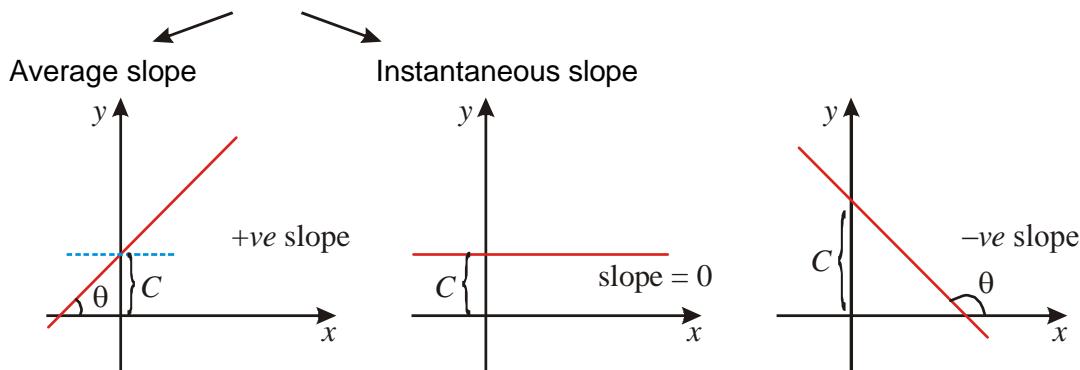


In case of a straight line graph, slope of the curve always remains constant.

Graphs having variable slope

All the given graphs are not straight line because change in x does not produce a constant proportionate change in y always.

Any quadratic equation gives a graph of variable slope also known as parabola

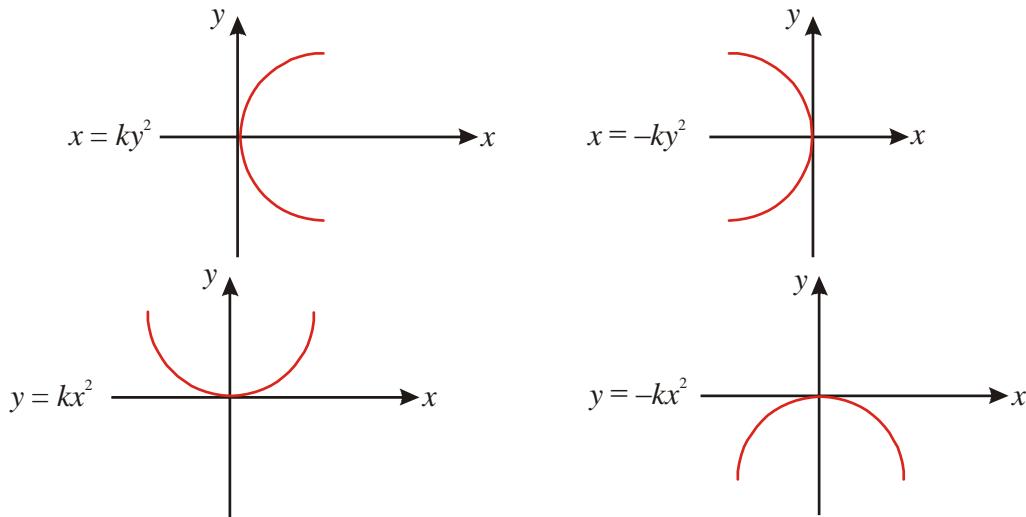


Where k is a positive constant.

Equation of parabola:

Case (i): $y = ax^2 + bx + c$

For $a > 0$

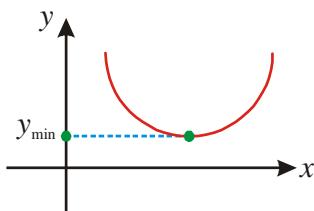

The nature of the parabola will be like that of the of nature $y = kx^2$

Minimum value of y exists at the vertex of the parabola.

$$y_{\min} = \frac{-D}{4a} \text{ where } D = b^2 - 4ac$$


$$\text{Coordinates of vertex} = \left(\frac{-b}{2a}, \frac{D}{4a} \right)$$

Case (ii) : $a < 0$

The nature of the parabola will be like that of the nature of $y = -kx^2$

Maximum value of y exists at the vertex of parabola.

$$y_{\max} = \frac{D}{4a} \text{ where } D = b^2 - 4ac$$

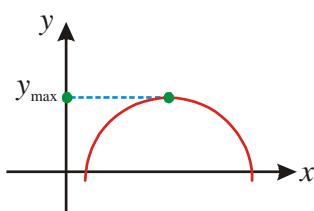

Graphical Interpretation of Displacement, Velocity and Acceleration

There are two important aspects related with the graphical analysis of motion.


- (i) Slope of the graph (which gives rate of change $\frac{\Delta y}{\Delta x}$ or dy/dx). Average as well as instantaneous.
- (ii) area under the graph.
- If you need to know about the quantity which the slope with respect to x -axis of the given graph will give, divide the units of quantity on y -axis by the units of quantity on x -axis. The resultant unit is the unit of the quantity represented by the slope.
- For the area under the graph concept you need to multiply the units of the two quantities represented on x and y axes respectively. Resultant unit is the unit of the quantity represented by the area under the graph.

Average Velocity

The *average velocity* between two points in a given time interval can be obtained from a *displacement versus time* graph by computing the *slope* of the *straight line* joining the coordinates of the two points.

Instantaneous Velocity (or velocity at a particular instant)


The *instantaneous velocity* at time t is the *slope* of the *tangent line* drawn to the *position versus time* graph at that time.

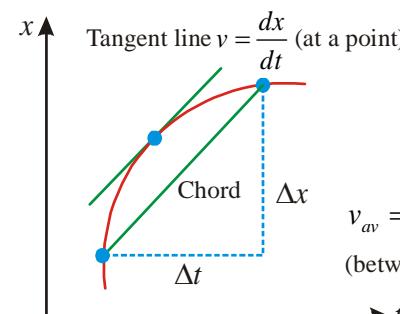

(i)

$$v_{av} = \frac{\Delta x}{\Delta t}$$

(between an interval)

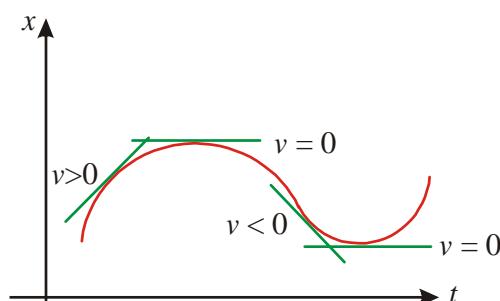

(ii)

$v = \frac{dx}{dt}$ = instantaneous velocity as the slope of the given graph changes at every point.

⇒ slope is variable

⇒ velocity is variable

In the graph (ii) we can show that sign of the slope gives the nature of velocity.

$m > 0 \Rightarrow v > 0 \Rightarrow$ velocity is in +ve or forward direction

$m = 0 \Rightarrow v = 0$


$m < 0 \Rightarrow v < 0 \Rightarrow$ velocity is in opposite or backward or -ve direction.

Average Acceleration


The average acceleration between two points in a time interval is equal to the slope of the chord connecting the points on a *velocity* versus *time* graph.

Instantaneous Acceleration

The *instantaneous acceleration* at time t is the *slope* of the *tangent* drawn to the *velocity* versus *time* graph.

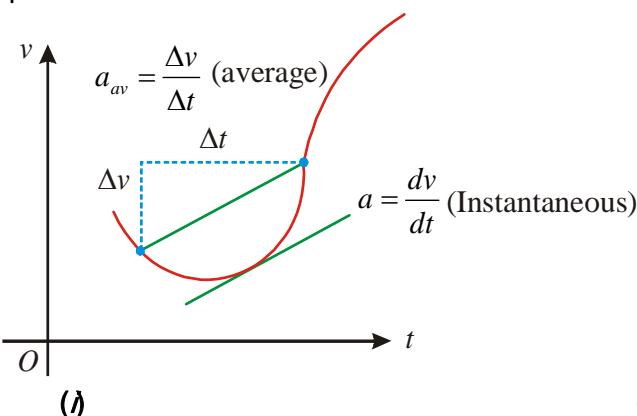

(i)

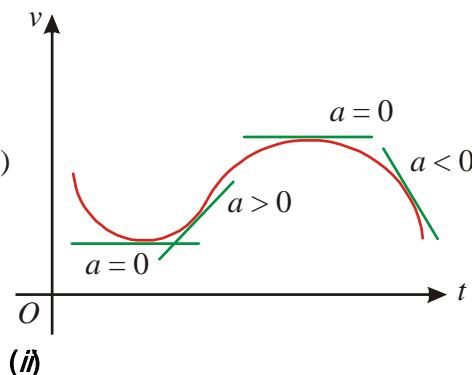

(ii)

$a = \frac{dv}{dt}$ = instantaneous acceleration as the slope of the given graph changes at every point.

⇒ slope is variable

⇒ acceleration is variable

In the graph (ii) we can show that sign of the slope gives the nature of acceleration.


$m > 0 \Rightarrow a > 0 \Rightarrow$ velocity is increasing

$m = 0 \Rightarrow a = 0 \Rightarrow$ velocity is constant

$m < 0 \Rightarrow a < 0 \Rightarrow$ velocity is decreasing

Displacement from Velocity Time Graphs


Given a *velocity* versus *time* graph, the *displacement* during an interval between time t_i and t_f is the *area bounded by the velocity curve* and the two vertical lines $t = t_i$ and $t = t_f$, as shown in the Fig.

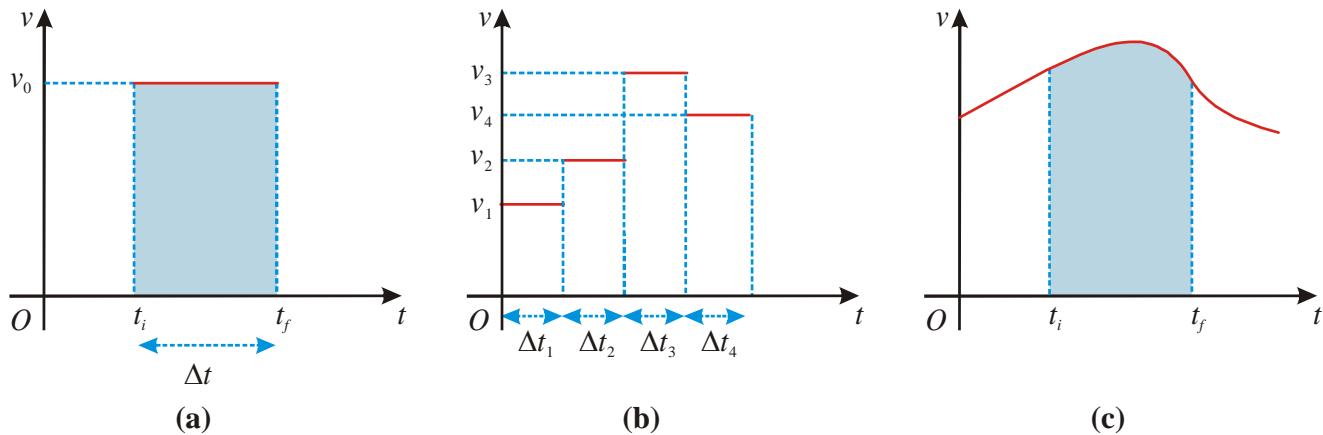

- The area under the v -versus- t curve is the displacement $\Delta x = v_0\Delta t$
- For each segment of motion, the velocity is a different constant. The displacement Δx_i during the i^{th} interval is the area $v_i\Delta t_i$. So the total displacement is $\Delta x = v_1\Delta t_1 + v_2\Delta t_2 + v_3\Delta t_3 + v_4\Delta t_4$
- When v versus t graph is a smooth complex curve, the area under the curve may be obtained using integration.

Velocity from Acceleration Time Graphs

Given an *acceleration*–versus–*time* graph, the change in velocity between $t = t_i$ and $t = t_f$ is the *area bounded by the acceleration curve* and the vertical lines $t = t_i$ and $t = t_f$,

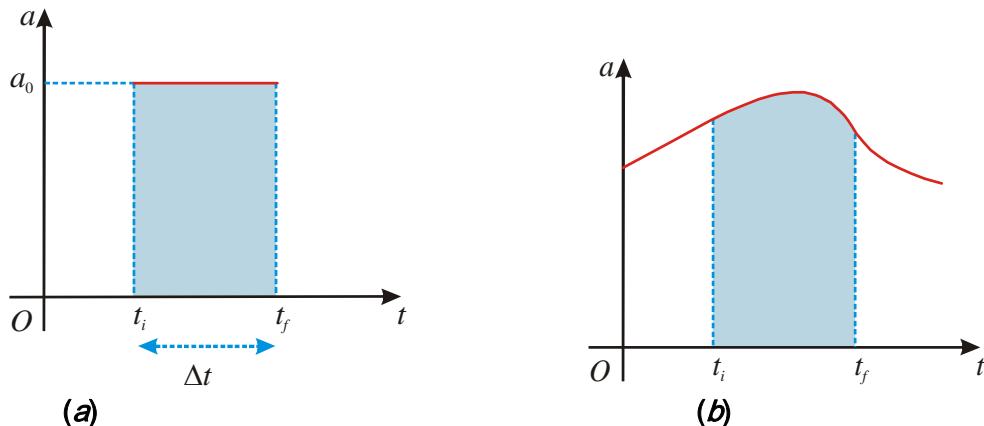

- The area under $a - t$ graph is change in velocity $\Delta v = (a_0\Delta t)$
- When $a - t$ graph is a smooth complex curve, the area under the curve can be obtained using integration.


Position vs Time Graph

1 Zero Velocity

As position of particle does not change with time, so the body is at rest.

$$\text{Slope} = \frac{dx}{dt} = \tan \theta = \tan 0^\circ = 0$$

Velocity of particle is zero

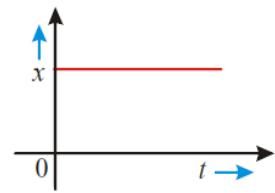


2 Uniform Velocity

Here $\tan \theta$ is constant

$$\Rightarrow \tan \theta = \frac{dx}{dt} \text{ is constant}$$

\Rightarrow velocity of particle is constant.

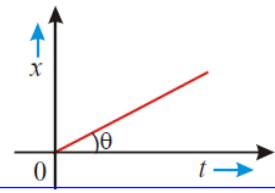


3 Non uniform velocity (increasing with time)

As time is increasing, θ is also increasing.

$$\Rightarrow \frac{dx}{dt} = \tan \theta \text{ is also increasing}$$

Hence, velocity of particle is increasing.

\Rightarrow motion is positively accelerated

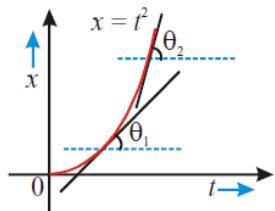


4 Non uniform velocity (decreasing with time)

As time increases, θ decreases.

$$\Rightarrow \frac{dx}{dt} = \tan \theta \text{ also decreases.}$$

Hence, velocity of particle is decreasing.

\Rightarrow motion is negatively accelerated

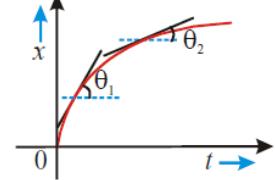

Velocity vs Time Graph


1 Zero acceleration

Velocity is constant.

$$\tan \theta = 0 \Rightarrow \frac{dv}{dt} = 0$$

Hence, acceleration is zero.

Average as well as instantaneous both

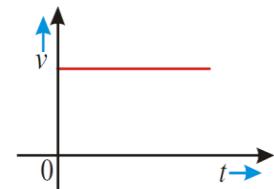


2 Uniform acceleration

$\tan \theta$ is constant.

$$\Rightarrow \frac{dv}{dt} = \text{constant}$$

Hence, it shows constant acceleration.

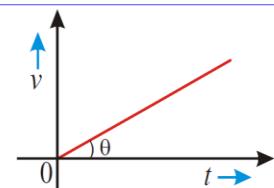


3 Uniform retardation

Since $\theta > 90^\circ$

$\Rightarrow \tan \theta$ is constant and negative.

$$\Rightarrow \frac{dv}{dt} = \text{negative constant}$$

Hence, it shows constant retardation.

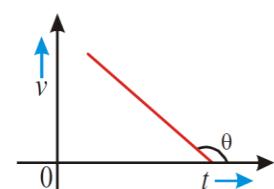


Acceleration vs Time Graph

1 Constant acceleration

$$\tan \theta = 0$$

$$\Rightarrow \frac{da}{dt} = 0$$

Hence, acceleration is constant.

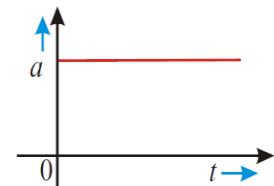


2 Uniformly increasing acceleration

θ is constant.

$$0^\circ < \theta < 90^\circ \Rightarrow \tan \theta > 0$$

$$\Rightarrow \frac{da}{dt} = \tan \theta = \text{constant} > 0$$

Hence, acceleration is uniformly increasing with time.

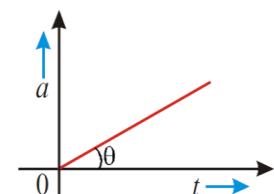


3 Uniformly decreasing acceleration

Since $\theta > 90^\circ$


$\Rightarrow \tan \theta$ is constant and negative.

$$\Rightarrow \frac{da}{dt} = \text{negative constant}$$

Hence, acceleration is uniformly decreasing with time

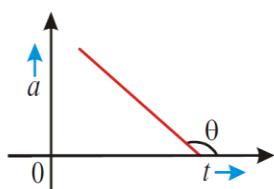


Ex. 17 The displacement vs time graph of a particle moving along a straight line is shown in the figure. Draw velocity vs time and acceleration vs time graph.

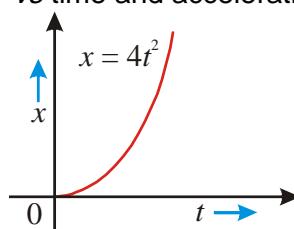

Solution: $x = 4t^2$

Hence, velocity-time graph is a straight line having slope $\tan \theta = 8$.

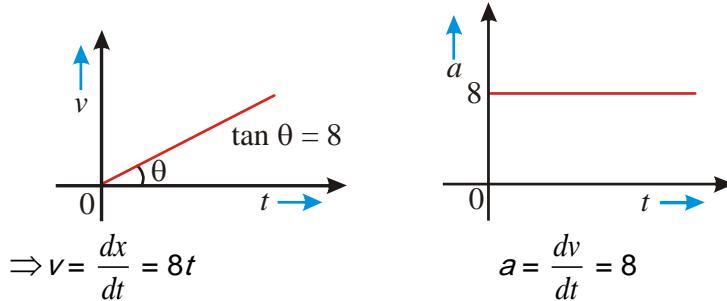

Important Points to Remember




- For uniformly accelerated motion ($a \neq 0$), $x-t$ graph is a parabola (opening upwards if $a > 0$ and opening downwards if $a < 0$). The slope of tangent at any point of the parabola gives the velocity at that instant.
- For uniformly accelerated motion ($a \neq 0$), $v-t$ graph is a straight line whose constant slope gives the acceleration of the particle.
- In general, the slope of tangent in $x-t$ graph is velocity and the slope of tangent in $v-t$ graph is the acceleration.
- The area under $a-t$ graph gives the change in velocity.
- The area between the $v-t$ graph gives the distance travelled by the particle, if we take all areas as positive.
- Area under $v-t$ graph gives displacement, if areas below the t -axis are taken negative.

For Vertical motion under gravity


A particle has been thrown from $y=0$ with initial velocity U upwards.

The general equations are

- $v = u - gt$
- $y = ut - 0.5gt^2$

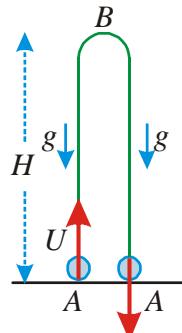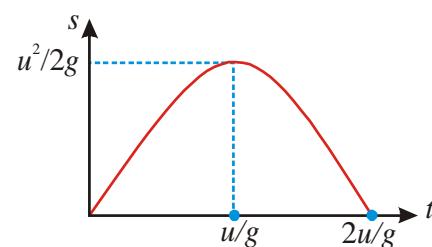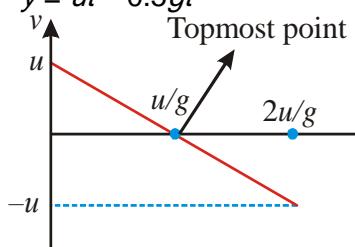

Graphs which are not possible

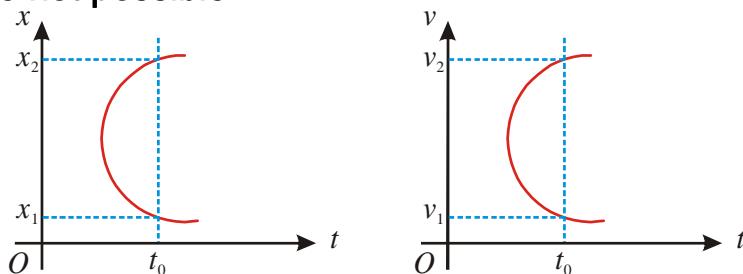

- Displacement time graph or velocity time graph having infinite slope.**
Infinite slope of displacement time graph means infinite velocity, which is not possible.
Infinite slope of velocity time graph means infinite acceleration, which is not possible.
- Any displacement time graph having two values of displacement at the same instant of time or velocity time graph having two values of velocity at the same instant of time are never possible.

Ex. 18 For a particle moving along x -axis, velocity-time graph is as shown in figure. Find the distance travelled and displacement of the particle?


Solution : Distance travelled = Area under $v-t$ graph (taking all areas as +ve.)
 \therefore Distance travelled = Area of trapezium + Area of triangle

$$= \frac{1}{2}(2+6) \times 8 + \frac{1}{2} \times 4 \times 5 \\ = 32 + 10 = 42 \text{ m}$$



Displacement = Area under $v-t$ graph (taking areas below time axis as -ive.)
 \therefore Displacement = Area of trapezium – Area of triangle

DPP # 2


1. From the following displacement-time graph find out the velocity of a moving body



- (a) $\frac{1}{\sqrt{3}} \text{ m/s}$ (b) 3 m/s (c) $\sqrt{3} \text{ m/s}$ (d) $\frac{1}{3}$
2. The acceleration-time graph of a particle moving in a straight line is as shown in figure. The velocity of the particle at time $t = 0$ is 2 m/s. The velocity after 2 seconds will be
 (a) 6 m/s (b) 4 m/s (c) 2 m/s (d) 8 m/s
3. The graph of displacement s/t time is shown. Its corresponding velocity-time graph will be

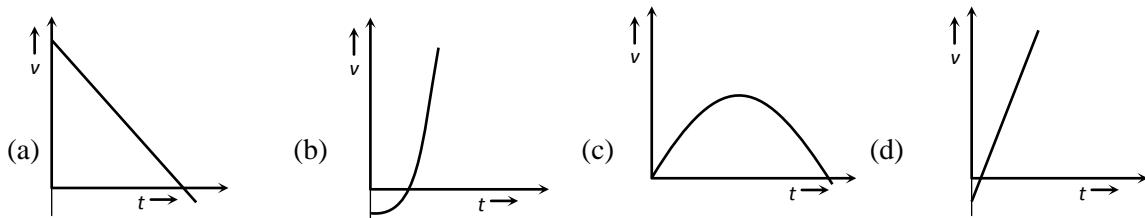


4. The acceleration of a particle traveling along a straight line is shown in the figure. The maximum speed of the particle is

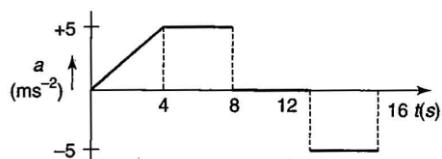


- (a) 20 ms^{-1} (b) 30 ms^{-1} (c) 40 ms^{-1} (d) 60 ms^{-1}

5. A particle starts from rest. Its acceleration (a) versus time (t) is as shown in the figure. The maximum speed of the particle will be

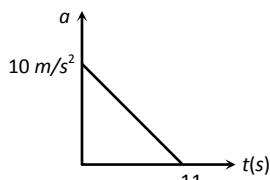


- (a) 110 m/s (b) $\frac{11}{5} \text{ m/s}$ (c) 550 m/s (d) 660 m/s

6. Figure gives the velocity-time graph. This shows that the body is





- (a) starting from rest and moving with uniform velocity
 (b) moving with uniform retardation
 (c) moving with uniform acceleration
 (d) having same initial and final velocity


7. A ball is thrown straight up with a velocity at $t = 0$ and returns to earth at $t = t_1$. Which graph shows the correct motion?

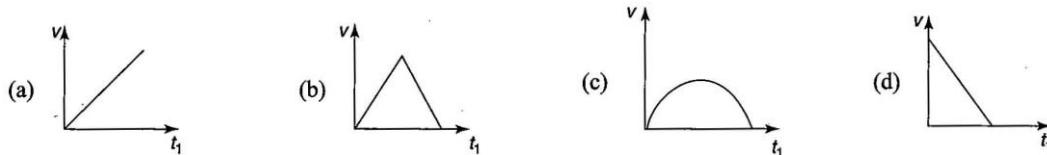

8. Figure shows the position time graph for a particle in one dimensional motion. Which of the graphs in figure represent the variation in the velocity of the particle with time?

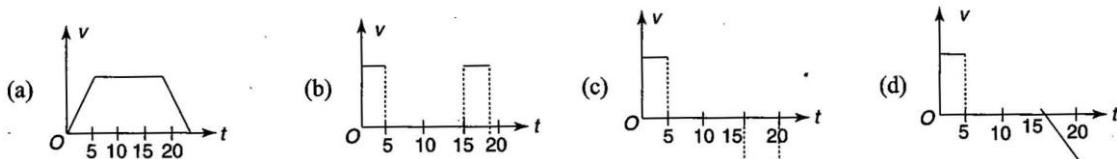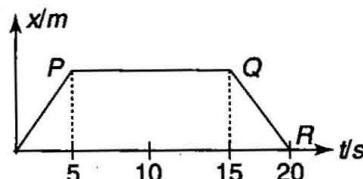


9. The velocity time graph of a body moving along a straight line is shown in figure. The ratio of the average velocities during the time t_1 and t_2 is

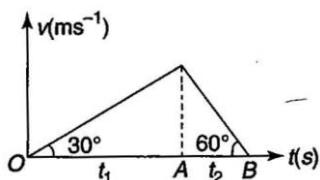


- (a) $1:1$ (b) $2 : 1$ (c) $3 : 1$ (d) $1 : 3$


- 10.** The velocity-time plot is shown in figure. Find the average speed in time interval $t = 0$ to $t = 40$ s during the period.

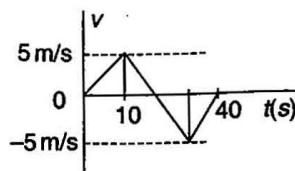

11. Figure shows the graph of acceleration of particle as a function of time. The maximum speed of the particle is (particle starts from rest)





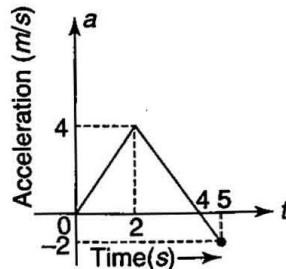


- 12.** The velocity-time graph of a body moving along a straight line is as follows:

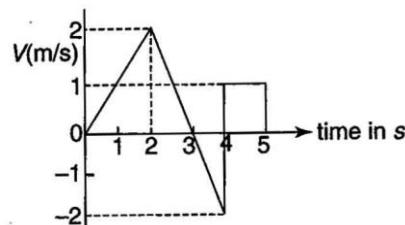


The displacement of the body in 5 s is


- 13.** A particle starts from rest and undergoes an acceleration as shown in figure. The velocity-time graph from figure will have a shape




- 14.** Which of the following graphs show the $v-t$ graph of a ball thrown upwards?

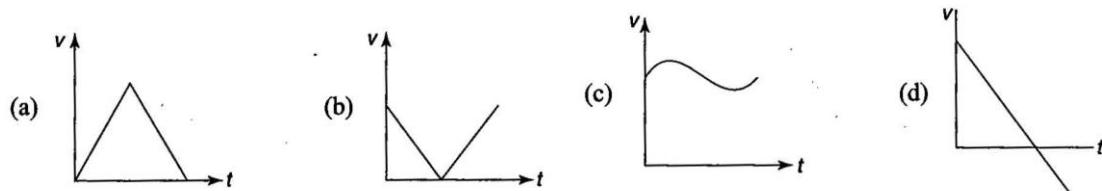



- 15.** In figure shown, the graph shows the variation of acceleration of body with time t . The velocity of the body at $t = 0$ is zero. The velocity of the body at $t = 30$ s is

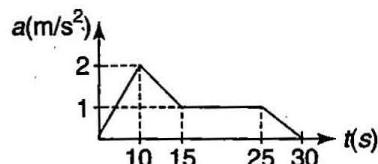


16. In which of the graphs both net displacement and velocity are negative?

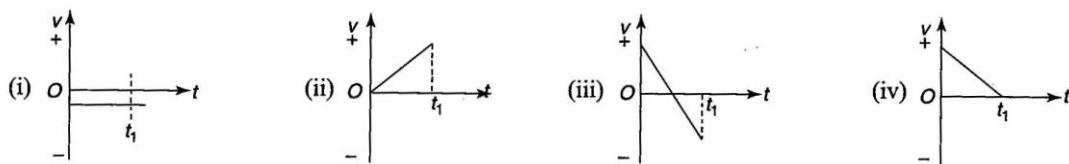

17. The given graph shows the variation of velocity with displacement. Which one of the graphs given below correctly represents the variation of acceleration with displacement?

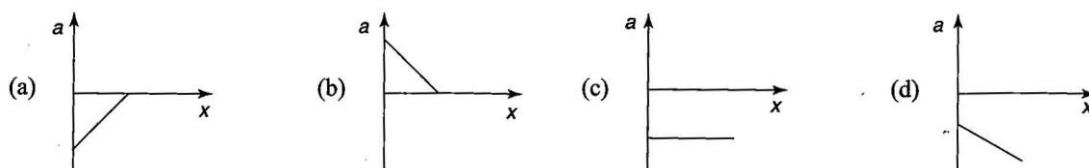


- 18.** Initially car A is 10.5 m ahead of car B. Both start moving at time $t = 0$ in the same direction along a straight line. The velocity-time graph of two cars is shown in figure. The time when the car B will catch the car A, will be

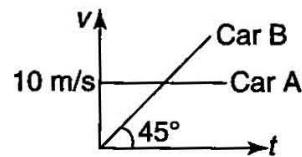


- (a) $f = 21$ sec (b) $t = 2\sqrt{5}$ sec (c) 20 sec (d) none



19. A ball is dropped vertically from a height d above the ground. It hits the ground and bounces up vertically to a height $d/2$. Neglecting subsequent motion and air resistance, its velocity v varies with the height h above the ground is

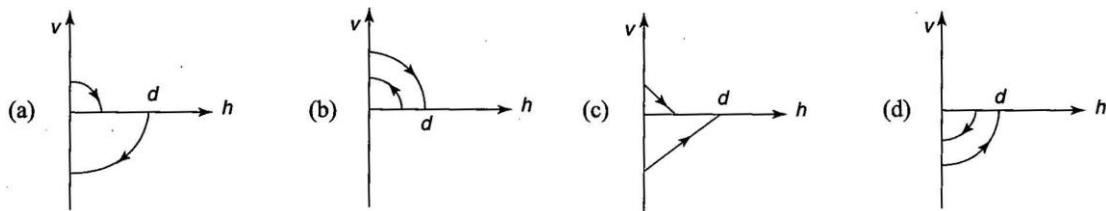

20. Graph of velocity versus displacement of a particle moving in a straight line is as shown in figure. The acceleration of the particle is

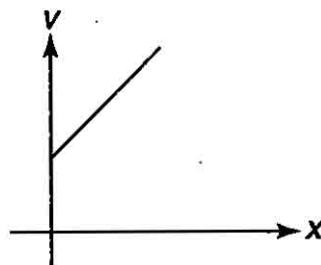


- (a) constant
 (b) increases linearly with x
 (c) increases parabolically with x
 (d) none of these
21. Velocity versus displacement graph of a particle moving in a straight line is shown in figure. Corresponding acceleration versus velocity graph will be

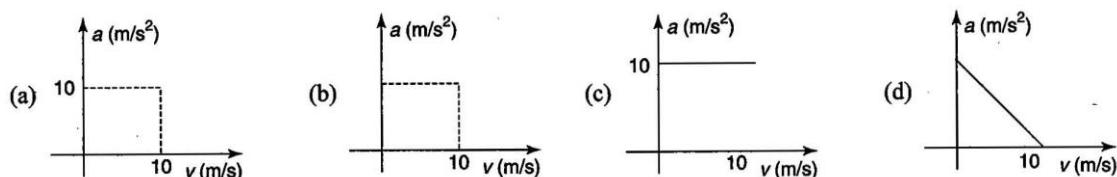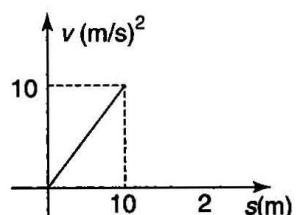

MOTION IN TWO DIMENSIONS

Whatever we have studied in the kinematics of one dimensional motion the same is applicable for motion in *two* and *three* dimensions also.

If the particle moves from P_1 at position r_1 to P_2 at position r_2 , as shown in figure its displacement is given by

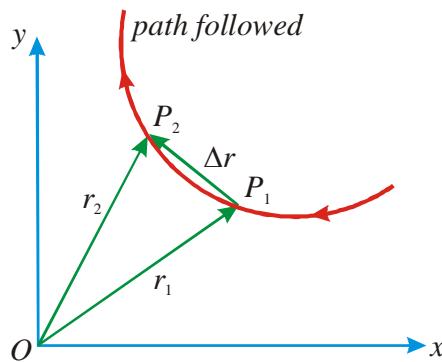

$$\begin{aligned} \text{Initial position vector } \overrightarrow{OP_1} &= \vec{r}_1 \\ \text{Final position vector } \overrightarrow{OP_2} &= \vec{r}_2 \\ \text{change in position vector } \overrightarrow{\Delta r} &= \text{final} - \text{initial} \\ \overrightarrow{\Delta r} &= \vec{r}_2 - \vec{r}_1 \\ \Rightarrow \overrightarrow{\Delta r} &= \vec{r}_2 - \vec{r}_1 \\ \overrightarrow{\Delta r} &\text{ is also known as displacement.} \\ \Rightarrow \overrightarrow{\Delta r} &= \Delta x \hat{i} + \Delta y \hat{j} \end{aligned}$$

In two dimensions the position vector r of a particle whose coordinate are (x, y) is $r = x\hat{i} + y\hat{j}$

$\Delta \vec{r}$ is the vector that must be added to the initial position vector \vec{r}_1 to give the final position vector \vec{r}_2 ,


$$\Rightarrow \vec{r}_2 = \vec{r}_1 + \Delta \vec{r}$$

Let $p_1 \equiv (x_1, y_1)$ and $p_2 \equiv (x_2, y_2)$

\Rightarrow change in x , $\Delta x = x_2 - x_1$ and change in y , $\Delta y = y_2 - y_1$

$\Delta \vec{r}$ must be taken with proper care of direction.

if for motion from p_1 to p_2 , $\Delta \vec{r}$ is taken as positive then for p_2 to p_1 , movement $\Delta \vec{r}$ will be negative.

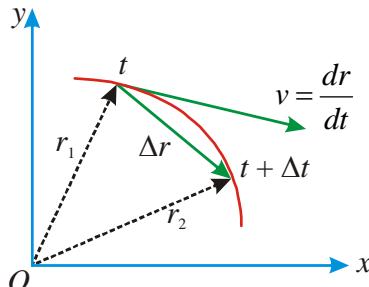

The average velocity is defined as the ratio of the displacement over the time interval


$$\vec{v}_{av} = \frac{\Delta \vec{r}}{\Delta t} \text{ (directed along the line joining initial and final position)}$$

instantaneous velocity is given by

$$\vec{v} = \frac{d\vec{r}}{dt} = v_x \hat{i} + v_y \hat{j} \quad \text{where } v_x = \frac{dx}{dt} \text{ and } v_y = \frac{dy}{dt}$$

The direction of v is along the tangent to the path

The instantaneous acceleration is the ratio of change of the velocity vector with respect to time.

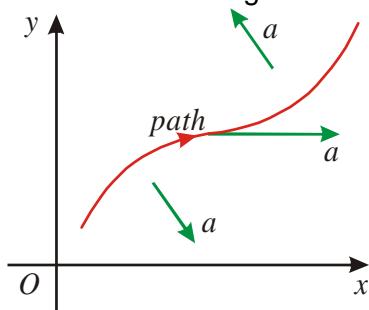

Possible direction of acceleration can also be found by visualizing the tendency of movement.

Tendency of movement is always in the direction of force and acceleration is always said to be in the direction of force.

$$\vec{a} = \frac{d\vec{v}}{dt} = a_x \hat{i} + a_y \hat{j}$$

$$\text{where } a_x = \frac{dv_x}{dt} \text{ and } a_y = \frac{dv_y}{dt}$$

Note : One cannot determine acceleration directly from the path of the particle. One needs to know how each component of the velocity varies as function of space and time.

General equations of kinematics for constant acceleration in 2-D

We need to use the same kinematical equation of motion that we used before but with proper care.

$$\vec{v} = \vec{u} + \vec{at}$$

$$\vec{S} = \vec{S}_0 + \vec{ut} + \frac{1}{2} \vec{at}^2$$

$$\vec{v} \cdot \vec{v} = \vec{u} \cdot \vec{u} = 2\vec{a} \cdot \vec{S}$$

$$\text{where } \vec{v} = v_x \hat{i} + v_y \hat{j} \quad \vec{a} = a_x \hat{i} + a_y \hat{j} \quad \vec{u} = u_x \hat{i} + u_y \hat{j} \quad \vec{S} = x \hat{i} + y \hat{j}$$

$$\Rightarrow v_x \hat{i} + v_y \hat{j} = (u_x \hat{i} + u_y \hat{j}) + (a_x \hat{i} + a_y \hat{j})t \quad \text{from } \vec{v} = \vec{u} + \vec{at}$$

$$\Rightarrow v_x \hat{i} + v_y \hat{j} = (u_x + a_x t) \hat{i} + (u_y + a_y t) \hat{j}$$

$$v_x = u_x + a_x t \text{ (one-D)}$$

$$\text{and } v_y = u_y + a_y t \text{ (one-D)}$$

$$\text{Similarly } S_x = S_{0x} + u_x t + 0.5 a_x t^2$$

$$\text{and } S_y = S_{0y} + u_y t + 0.5 a_y t^2$$


$$\Rightarrow \vec{S} = S_x \hat{i} + S_y \hat{j}$$

Ex. 19 A particle moves one quarter of a circular path of radius 20 m in 10 s. Its initial position is given by

$$\vec{r}_i = (20 \text{ m}) \hat{i} \text{ and its final position is } \vec{r}_f = (20 \text{ m}) \hat{j}.$$

(a) Find its displacement and average velocity

(b) Find the magnitude of its average velocity and its average speed.

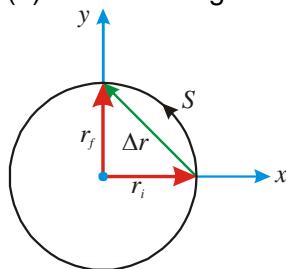

Solution

(a) The displacement is given by

$$\Delta \vec{r} = \vec{r}_f - \vec{r}_i = 20 \hat{j} - 20 \hat{i}$$

$$\Rightarrow \Delta \vec{r} = -20 \hat{i} + 20 \hat{j} (\text{m})$$

and the average velocity is

$$\vec{v}_{av} = \frac{\Delta \vec{r}}{\Delta t} = \frac{-20 \hat{i} + 20 \hat{j}}{10} = -2 \hat{i} + 2 \hat{j} (\text{m/s})$$


(b) The magnitude of the average velocity is

$$|\vec{v}_{av}| = v_{av} = \sqrt{(-2)^2 + (2)^2} = 2.83 \text{ m/s}$$

$$\text{Average speed} = \frac{\text{Total distance travelled}}{\text{Time Taken}} = \frac{\frac{1}{4}[2\pi(20)]}{10} = 3.14 \text{ m/s}$$

PROJECTILE MOTION

It is the best example to understand motion in a plane. If we project a particle obliquely from the surface of earth, as shown in the figure below, then it can be considered as two perpendicular 1D motions - one along the horizontal and other along the vertical.

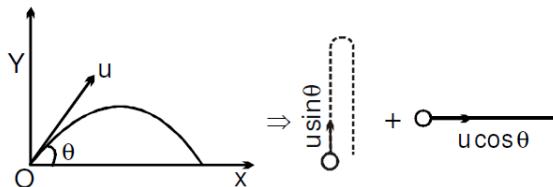

Assume that effect of air friction and wind resistance are negligible and value of 'acceleration due to gravity' \vec{g} is constant.

Take point of projection as origin and horizontal and vertical direction as +ve X and Y-axes, respectively.

For X-axis

$$u_x = u \cos\theta,$$

$$a_x = 0,$$

$$v_x = u \cos\theta, \text{ and}$$

$$x = u \cos\theta \times t \quad y = u \sin\theta t - \frac{1}{2}gt^2$$

For Y - axis

$$u_y = u \sin\theta$$

$$a_y = -g,$$

$$v_y = u \sin\theta - gt, \text{ and}$$

It is clear from above equations that horizontal component of velocity of the particle remains constant while vertical component of velocity is first decreasing, gets zero at the highest point of trajectory and then increases in the opposite direction. At the highest point, speed of the particle is minimum.

The time, which projectile takes to come back to same (initial) level is called the time of flight (T).

At initial and final points, $y = 0$,

$$\text{So } u \sin\theta t - \frac{1}{2}gt^2 = 0$$

$$\Rightarrow t = 0 \text{ and } t = \frac{2u \sin\theta}{g} \quad \text{So,} \quad T = \frac{2u \sin\theta}{g}$$

Range (R) The horizontal distance covered by the projectile during its motion is said to be range of the projectile

$$R = u \cos\theta \times T = \frac{u^2 \sin 2\theta}{g}$$

For a given projection speed, the range would be maximum for $\theta = 45^\circ$.

Maximum height attained by the projectile is

$$H = \frac{u^2 \sin^2 \theta}{2g}$$

at maximum height the vertical component of velocity is 0.

$$\text{Time of ascent} = \text{Time of descent} = \frac{u \sin\theta}{g} = \frac{T}{2}$$

Speed, kinetic energy, momentum of the particle initially decreases in a projectile motion and attains a minimum value (not equal to zero) and then again increases.

θ is the angle between \vec{v} and horizontal which decreases to zero. (at top most point) and again increases in the negative direction

Ex. 20 A body is projected with a velocity of 30 ms^{-1} at an angle of 30° with the vertical. Find the maximum height, time of flight and the horizontal range.

Sol. Here $u = 30 \text{ ms}^{-1}$,

Angle of projection, $\theta = 90 - 30 = 60^\circ$

Maximum height,

$$H = \frac{u^2 \sin^2 \theta}{2g} = \frac{30^2 \sin^2 60^\circ}{2 \times 9.8} = 34.44 \text{ m}$$


Time of flight,

$$T = \frac{2u \sin \theta}{g} = \frac{2 \times 30 \sin 60^\circ}{9.8} = 5.3 \text{ s}$$

Horizontal range,

$$R = \frac{u^2 \sin 2\theta}{g} = \frac{30^2 \sin 120^\circ}{9.8} = \frac{30^2 \sin 60^\circ}{9.8} = 79.53 \text{ m.}$$

Ex. 21 Find out the relation between u_A, u_B, u_C (where u_A, u_B, u_C are the initial velocities of particles A, B, C, respectively)

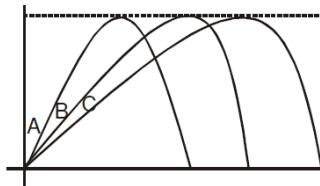

Sol. $\because H_{\max}$ is same for all three particles A, B, C

$$\Rightarrow H_{\max} = \frac{u_y^2}{2g}$$

$\Rightarrow u_y$ is same for all $\therefore u_{yA} = u_{yB} = u_{yC}$

$$\Rightarrow T_A = T_B = T_C \left(\frac{2u_y}{g} \right)$$

from figure $R_C > R_B > R_A$ $\therefore R = \frac{2u_x u_y}{g}$

$$\Rightarrow u_{xC} > u_{xB} > u_{xA} \Rightarrow u_A < u_B < u_C$$

(C) Coordinate of a particle after a given time t :


Particle reaches at a point P after time t then

$$x = u \cos \theta \cdot t$$

$$y = u \sin \theta \cdot t - \frac{1}{2} g t^2$$

Position vector

$$\vec{r} = (u \cos \theta \cdot t) \hat{i} + \left((u \sin \theta \cdot t) - \frac{1}{2} g t^2 \right) \hat{j}$$

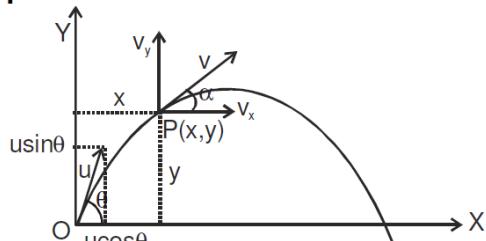

(D) Velocity and direction of motion after a given time :

After time 't' $v_x = u \cos \theta$ and $v_y = u \sin \theta - gt$

$$\text{Hence resultant velocity } v = \sqrt{v_x^2 + v_y^2} = \sqrt{u^2 \cos^2 \theta + (u \sin \theta - gt)^2}$$

$$\tan \alpha = \frac{v_y}{v_x} = \frac{u \sin \theta - gt}{u \cos \theta} \Rightarrow \alpha = \tan^{-1} \left(\frac{u \sin \theta - gt}{u \cos \theta} \right)$$

(E) Velocity and direction of motion at a given height :

At a height 'h', $v_x = u \cos \theta$

$$\text{And } v_y = \sqrt{u^2 \sin^2 \theta - 2gh}$$

\therefore Resultant velocity

$$v = \sqrt{v_x^2 + v_y^2} = \sqrt{(u \cos \theta)^2 + u^2 \sin^2 \theta - 2gh}$$

$$v = \sqrt{u^2 - 2gh}$$

Note that this is the velocity that a particle would have at height h if it is projected vertically from ground with u.

Ex. 22 A body is projected with a velocity of 20 ms^{-1} in a direction making an angle of 60° with the horizontal. Calculate its (i) position after 0.5 s and (ii) velocity after 0.5 s.

Sol. Here $u = 20 \text{ ms}^{-1}$, $\theta = 60^\circ$, $t = 0.5 \text{ s}$

$$(i) x = (u \cos \theta)t = (20 \cos 60^\circ) \times 0.5 = 5 \text{ m}$$

$$y = (u \sin \theta)t - \frac{1}{2}gt^2 = (20 \times \sin 60^\circ) \times 0.5$$

$$- \frac{1}{2} \times 9.8 \times (0.5)^2 = 7.43 \text{ m}$$

$$(ii) v_x = u \cos \theta = 20 \cos 60^\circ = 10 \text{ ms}^{-1}$$


$$v_y = u \sin \theta - gt = 20 \sin 60^\circ - 9.8 \times 0.5 \\ = 12.42 \text{ ms}^{-1}$$

$$\therefore v = \sqrt{v_x^2 + v_y^2} = \sqrt{(10)^2 + (12.42)^2} = 15.95 \text{ ms}^{-1} \quad \tan \beta = \frac{v_y}{v_x} = \frac{12.42}{10} = 1.242$$

$$\therefore \beta = \tan^{-1} 1.242 = 51.16^\circ.$$

Equation of trajectory of a projectile.

Suppose the body reaches the point P(x, y) after time t.

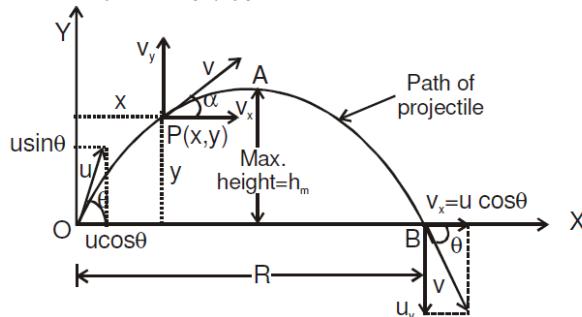

\therefore The horizontal distance covered by the body in time t,
 $x = \text{Horizontal velocity} \times \text{time} = u \cos \theta \cdot t$

$$\text{or } t = \frac{x}{u \cos \theta}$$

For vertical motion : $u = u \sin \theta$, $a = -g$, so the vertical distance covered in time t is given by

$$s = ut + \frac{1}{2}at^2 \quad \text{or} \quad y = u \sin \theta \cdot \frac{x}{u \cos \theta} - \frac{1}{2}g \cdot \frac{x^2}{u^2 \cos^2 \theta}$$

$$\text{or } y = x \tan \theta - \frac{1}{2}g \frac{x^2}{u^2 \cos^2 \theta} \quad \dots(1)$$

or $y = px - qx^2$, where p and q are constants.

Thus y is a quadratic function of x. Hence the trajectory of a projectile is a parabola.

From equation (1)

$$y = x \tan \theta \left[1 - \frac{gx \cos \theta}{2u^2 \cos^2 \theta \sin \theta} \right] \Rightarrow y = x \tan \theta \left[1 - \frac{gx}{2u^2 \cos \theta \sin \theta} \right]$$

$$y = x \tan \theta \left[1 - \frac{x}{R} \right] \quad \dots(2)$$

Equation (2) is another form of trajectory equation of projectile

Ex. 23 A ball is thrown from ground level so as to just clear a wall 4 m high at a distance of 4 m and falls at a distance of 14 m from the wall. Find the magnitude and direction of the velocity.

Sol. The ball passes through the point P(4, 4). So its range = 4 + 14 = 18m.

The trajectory of the ball is,

Now $x = 4\text{m}$, $y = 4\text{m}$ and $R = 18\text{m}$


$$\therefore 4 = 4 \tan \theta \left[1 - \frac{4}{18} \right] = 4 \tan \theta \cdot \frac{7}{9}$$

$$\text{or } \tan \theta = \frac{9}{7}, \sin \theta = \frac{9}{\sqrt{130}}, \cos \theta = \frac{7}{\sqrt{130}}$$

$$\text{or } u^2 = \frac{18 \times 9.8 \times 130}{2 \times 9 \times 7} = 182$$

$$\text{or } u = \sqrt{182} = 13.5 \text{ ms}^{-1}$$

$$\text{Also } \theta = \tan^{-1}(9/7) = 52.1^\circ$$

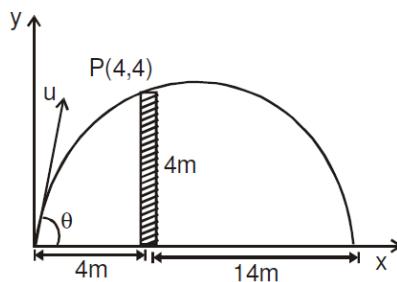

Ex. 24 A particle is projected over a triangle from one end of a horizontal base and grazing the vertex falls on the other end of the base. If α and β be the base angles and θ the angle of projection, prove that $\tan \theta = \tan \alpha + \tan \beta$.

Sol. If R is the range of the particle, then from the figure we have

$$\tan \alpha + \tan \beta = \frac{y}{x} + \frac{y}{R-x} = \frac{y(R-x)+xy}{x(R-x)}$$

$$\text{or } \tan \alpha + \tan \beta = \frac{y}{x} \times \frac{R}{(R-x)} \quad \dots(1)$$


Also, the trajectory of the particle is

$$y = x \tan \theta \left[1 - \frac{x}{R} \right]$$

$$\text{or } \tan \theta = \frac{y}{x} \times \frac{R}{(R-x)}$$


From equations (1) and (2), we get

$$\tan \theta = \tan \alpha + \tan \beta.$$

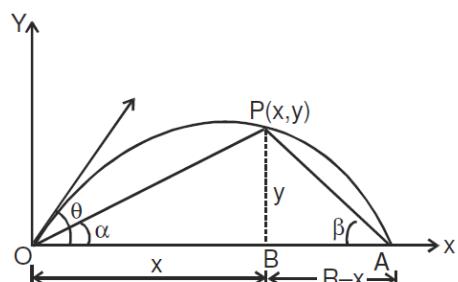

- 4.2 Projectile fired parallel to horizontal.** As shown in shown figure suppose a body is projected horizontally with velocity u from a point O at a certain height h above the ground level. The body is under the influence of two simultaneous independent motions:

- (i) Uniform horizontal velocity u .
 - (ii) Vertically downward accelerated motion with constant acceleration g .
- Under the combined effect of the above two motions, the body moves along the path OPA.

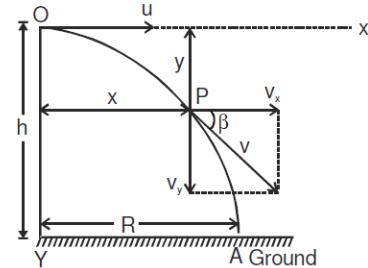

Trajectory of the projectile. After the time t , suppose the body reaches the point $P(x, y)$. The horizontal distance covered by the body in time t is

$$x = ut \quad \therefore t = \frac{x}{u}$$

The vertical distance travelled by the body in time t is given by

$$s = ut + \frac{1}{2}at^2$$

$$\text{or } y = 0 \times t + \frac{1}{2}gt^2 = \frac{1}{2}gt^2$$

[For vertical motion, $u = 0$]

$$\text{or } y = \frac{1}{2}g\left(\frac{x}{u}\right)^2 = \left(\frac{g}{2u^2}\right)x^2 \quad \left[\because t = \frac{x}{u}\right]$$

$$\text{or } y = kx^2 \quad [\text{Here } k = \frac{g}{2u^2} = \text{a constant}]$$

As y is a quadratic function of x , so the trajectory of the projectile is a parabola.

Time of flight. It is the total time for which the projectile remains in its flight (from O to A). Let T be its time of flight.

For the vertical downward motion of the body, we use

$$s = ut + \frac{1}{2}at^2$$

$$\text{or } h = 0 \times T + \frac{1}{2}gT^2 \quad \text{or } T = \sqrt{\frac{2h}{g}}$$

Horizontal range. It is the horizontal distance covered by the projectile during its time of flight. It is equal to OA = R . Thus $R = \text{Horizontal velocity} \times \text{time of flight} = u \times T$

$$\text{or } R = u\sqrt{\frac{2h}{g}}$$

Velocity of the projectile at any instant. At the instant t (when the body is at point P), let the velocity of the projectile be v . The velocity v has two rectangular components:

Horizontal component of velocity, $v_x = u$

Vertical component of velocity, $v_y = 0 + gt = gt$

\therefore The resultant velocity at point P is

$$v = \sqrt{v_x^2 + v_y^2} = \sqrt{u^2 + g^2t^2}$$

If the velocity v makes an angle β with the horizontal, then

$$\tan \beta = \frac{v_y}{v_x} = \frac{gt}{u} \quad \text{or } \beta = \tan^{-1}\left(\frac{gt}{u}\right)$$

Ex. 25 A body is thrown horizontally from the top of a tower and strikes the ground after three seconds at an angle of 45° with the horizontal. Find the height of the tower and the speed with which the body was projected. Take $g = 9.8 \text{ ms}^{-2}$.

Sol. As shown in figure, suppose the body is thrown horizontally from the top O of a tower of height y with velocity u . The body hits the ground after 3s. Considering vertically downward motion of the body,

$$y = u_y t + \frac{1}{2} g t^2 = 0 \times 3 + \frac{1}{2} \times 9.8 \times (3)^2 = 44.1 \text{ m} \quad [\therefore \text{Initial vertical velocity, } u_y = 0]$$

Final vertical velocity,

$$v_y = u_y + gt = 0 + 9.8 \times 3 = 29.4 \text{ ms}^{-1}$$

Final horizontal velocity, $v_x = u$

As the resultant velocity u makes an angle of 45° with the horizontal, so

$$\tan 45^\circ = \frac{v_y}{v_x} \text{ or } 1 = \frac{29.4}{x} \text{ or } u = 29.4 \text{ ms}^{-1}.$$

Ex. 26 A particle is projected horizontally with a speed u from the top of plane inclined at an angle θ with the horizontal. How far from the point of projection will the particle strike the plane?

Sol. The horizontal distance covered in time t ,

$$x = ut \text{ or } t = \frac{x}{u}$$

The vertical distance covered in time t ,

$$y = 0 + \frac{1}{2} g t^2 = \frac{1}{2} g \times \frac{x^2}{u^2} \quad [\text{using (1)}]$$

$$\text{Also } \frac{y}{x} = \tan \theta \text{ or } y = x \tan \theta \therefore \frac{gx^2}{2u^2} = x \tan \theta$$


$$\text{or } x \left(\frac{gx}{2u^2} - \tan \theta \right) = 0$$

$$\text{As } x = 0 \text{ is not possible, so } x = \frac{2u^2 \tan \theta}{g}$$

The distance of the point of strike from the point of projection is

$$D = \sqrt{x^2 + y^2} = \sqrt{x^2 + (x \tan \theta)^2}$$

$$= x \sqrt{1 + \tan^2 \theta} = x \sec \theta \text{ or } D = \frac{2u^2}{g} \tan \theta \sec \theta$$

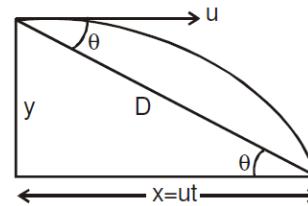

Ex. 27 A ball rolls off the top of a stairway with a constant horizontal velocity u . If the steps are h

metre high and w meter wide, show that the ball will just hit the edge of n th step if $n = \frac{2hu^2}{gw^2}$

Sol. Refer to figure. For n th step,

net vertical displacement = nh

net horizontal displacement = nw


Let t be the time taken by the ball to reach the n th step. Then

$$R = ut$$

$$\text{or } nw = ut \text{ or } t = \frac{nw}{u}$$

$$\text{Also, } y = u_y t + \frac{1}{2} g t^2$$

$$\text{or } nh = 0 + \frac{1}{2} g t^2 = \frac{1}{2} g \left(\frac{nw}{u} \right)^2 \text{ or } n = \frac{2hu^2}{gw^2}$$

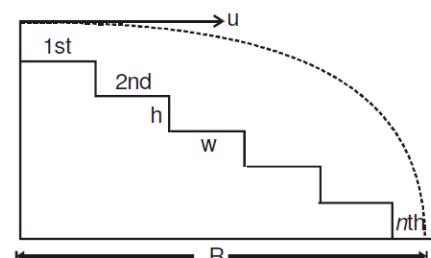

4.3 Projectile at an angle θ from height h

Consider the projectile as shown in the adjacent figure.

Take the point of projection as the origin the X and Y-axes as shown in figure.

For X-axis,

$$u_x = u \cos \theta$$

$$a_x = 0$$

$$v_x = u \cos \theta, \text{ and}$$


$$x = u \cos \theta \times t$$

For Y-axis,

$$u_y = u \sin \theta,$$

$$a_y = -g,$$

$$v_y = u \sin \theta - gt, \text{ and } y = u \sin \theta t - \frac{gt^2}{2}$$

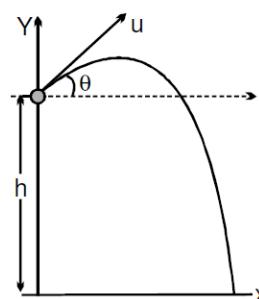

Ex. 28 From the top of a tower 156.8 m high a projectile is projected with a velocity of 39.2 ms^{-1} in a direction making an angle 30° with horizontal. Find the distance from the foot of tower where it strikes the ground and time taken to do so.

Sol. The situation is shown

Here height of tower

$$OA = 156.8 \text{ m}$$

$$u = 39.2 \text{ ms}^{-1}$$

$$\theta = 30^\circ$$

time for which projectile remain in air = $t = ?$

Horizontal distance covered $R = OD = ?$

Now $u_x = u \cos \theta$ and

$u_y = u \sin \theta$ be the components of velocity \vec{u} .

Motion of projectile from O to H to D

$$\text{Using equation } y = u_y t + \frac{1}{2} a_y t^2$$

$$\text{Here : } y = 156.8 \text{ m ; } u_y = -u \sin \theta \\ = 39.2 \sin 30^\circ$$

$$a_y = 9.8 \text{ m/s}^2 ; t = ?$$

$$156.8 = -39.2 \times 0.5 t + 4.9 t^2$$

$$156.8 = -19.6 t + 4.9 t^2$$

$$\text{or } 4.9 t^2 - 19.6 t - 156.8 = 0$$

$$\text{or } t^2 - 4t - 32 = 0 \Rightarrow (t - 8)(t + 4) = 0$$


We get $t = 8 \text{ s}; t = -4 \text{ s}$

$t = -4 \text{ s}$ is not possible, thus we take $t = 8 \text{ s}$.

Now horizontal distance covered in this time

$$R = u_x \times t = u \cos \theta \times t = 39.2 \times \cos 30^\circ \times t$$

$$R = 271.57 \text{ m}$$

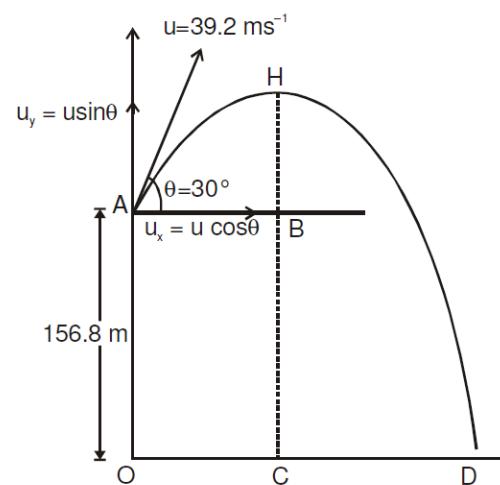


PROJECTION ON AN INCLINED PLANE

To solve the problem of projectile motion on an incline plane we can adopt two types of axis system as shown in the figures

Case (i) :

Up the incline

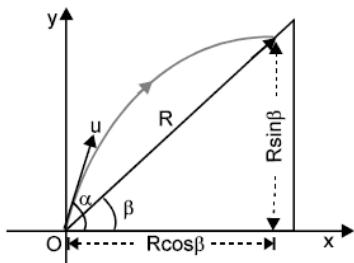


axis system 1

Here α is angle of projection with the horizontal.

In this case:

$$\begin{aligned} a_x &= 0 & u_x &= u \cos \alpha \\ a_y &= -g & u_y &= u \sin \alpha \end{aligned}$$

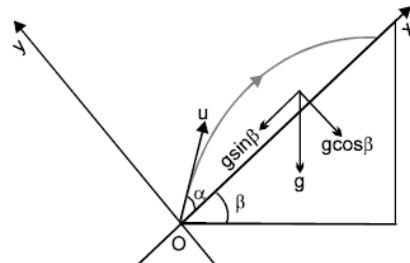

axis system 2

Here α is angle of projection with the inclined plane

In this case:

$$\begin{aligned} a_x &= -g \sin \beta & u_x &= u \cos \alpha \\ a_y &= -g \cos \beta & u_y &= u \sin \alpha \end{aligned}$$

Time of flight (T) :

when the particle strikes the inclined plane y coordinate becomes zero

$$\begin{aligned} y &= u_y t + \frac{1}{2} a_y t^2 \\ 0 &= u \sin \alpha t - \frac{1}{2} g \cos \beta t^2 \\ T &= \frac{2u \sin \alpha}{g \cos \beta} = \frac{2u_{\perp}}{g_{\perp}} \end{aligned}$$

Maximum height (H) :

when half of the time is elapsed y coordinate is equal to maximum height of the projectile

$$\begin{aligned} H &= u \sin \alpha \left(\frac{u \sin \alpha}{g \cos \beta} \right) - \frac{1}{2} g \sin \beta \left(\frac{u \sin \alpha}{g \cos \beta} \right)^2 \\ \Rightarrow H &= \frac{u^2 \sin^2 \alpha}{2g \cos \beta} = \frac{u^2_{\perp}}{2g_{\perp}} \end{aligned}$$


Range along the inclined plane (R) :

When the particle strikes the inclined plane x coordinate is equal to range of the particle


$$\begin{aligned} x &= u_x t + \frac{1}{2} a_x t^2 \\ \Rightarrow R &= u \cos \theta \left(\frac{2u \sin \alpha}{g \cos \beta} \right) - \frac{1}{2} g \cos \beta \left(\frac{2u \sin \alpha}{g \cos \beta} \right)^2 \\ \Rightarrow R &= \frac{2u^2 \sin \alpha \cos(\alpha + \beta)}{g \cos^2 \beta} \end{aligned}$$

Case (ii) :

Down the incline

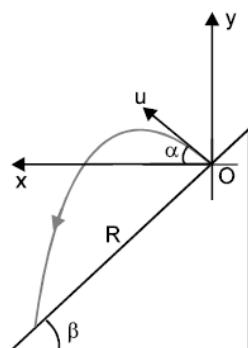

axis system 1

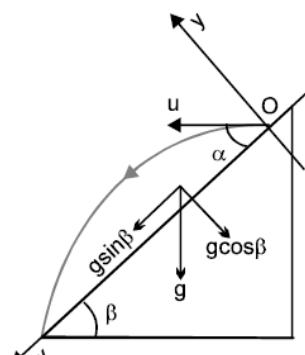

axis system 2

In this case :

$$\begin{aligned} a_x &= 0 & u_x &= u \cos \alpha \\ a_y &= -g & u_y &= u \sin \alpha \end{aligned}$$

In this case :

$$\begin{aligned} a_x &= g \sin \beta & u_x &= u \cos \alpha \\ a_y &= -g \cos \beta & u_y &= u \sin \alpha \end{aligned}$$

Time of flight (T) :

when the particle strikes the inclined plane y coordinate becomes zero

$$y = u_y t + \frac{1}{2} a_y t^2$$

$$\Rightarrow 0 = u \sin \alpha T - \frac{1}{2} g \cos \beta T^2$$

$$\Rightarrow T = \frac{2u \sin \alpha}{g \cos \beta} = \frac{2u_{\perp}}{g_{\perp}}$$

Maximum height (H) :

when half of the time is elapsed y coordinate is equal to maximum height of the projectile

$$H = u \sin \alpha \left(\frac{u \sin \alpha}{g \cos \beta} \right) - \frac{1}{2} g \sin \beta \left(\frac{u \sin \alpha}{g \cos \beta} \right)^2$$

$$\Rightarrow H = \frac{u^2 \sin^2 \alpha}{2g \cos \beta} = \frac{u_{\perp}^2}{2g_{\perp}}$$

Range along the inclined plane (R) :

When the particle strikes the inclined plane x coordinate is equal to range of the particle

$$x = u_x t + \frac{1}{2} a_x t^2$$

$$\Rightarrow R = u \cos \theta \left(\frac{2u \sin \alpha}{g \cos \beta} \right) + \frac{1}{2} g \cos \beta \left(\frac{2u \sin \alpha}{g \cos \beta} \right)^2$$

$$\Rightarrow R = \frac{2u^2 \sin \alpha \cos(\alpha - \beta)}{g \cos^2 \beta}$$

Table 1 : Standard results for projectile motion on an inclined plane


Range	Up the Incline	Down the Incline
	$\frac{2u^2 \sin \alpha \cos(\alpha + \beta)}{g \cos^2 \beta}$	$\frac{2u^2 \sin \alpha \cos(\alpha - \beta)}{g \cos^2 \beta}$
Time of flight	$\frac{2u \sin \alpha}{g \cos \beta}$	$\frac{2u \sin \alpha}{g \cos \beta}$
Angle of projection for maximum range	$\frac{\pi}{4} - \frac{\beta}{2}$	$\frac{\pi}{4} + \frac{\beta}{2}$
Maximum Range	$\frac{u^2}{g(1 + \sin \beta)}$	$\frac{u^2}{g(1 - \sin \beta)}$

Here α is the angle of projection with the incline and β is the angle of incline.

NOTE : For a given speed, the direction - which gives the maximum range of the projectile on an incline, bisects the angle between the incline and the vertical, for upward or downward projection.

Ex. 29 A particle is projected horizontally with a speed u from the top of a plane inclined at an angle θ with the horizontal. How far from the point of projection will the particle strike the plane?

Sol. Take X,Y-axes as shown in figure. Suppose that the particle strikes the plane at a point P with coordinates (x,y) . Consider the motion between A and P.



Motion in x direction :

$$\begin{aligned} \text{Initial velocity} &= u \\ \text{Acceleration} &= 0 \\ x &= ut \dots \text{(i)} \end{aligned}$$

Motion in y direction :

$$\begin{aligned} \text{Initial velocity} &= 0 \\ \text{Acceleration} &= g \end{aligned}$$

$$y = \frac{1}{2} gt^2 \dots \text{(ii)}$$

Eliminating t from (i) and (ii)

$$y = \frac{1}{2} g \frac{x^2}{u^2}$$

Also $y = x \tan \theta$

$$\text{Thus, } \frac{gx^2}{gu^2} = x \tan \theta \text{ giving } x = 0 \text{ or, } \frac{2u^2 \tan \theta}{g}$$

$$\text{Clearly the point P corresponds to } x = \frac{2u^2 \tan \theta}{g}$$

$$\text{then } y = x \tan \theta = \frac{2u^2 \tan^2 \theta}{g}$$

$$\text{The distance AP} = \sqrt{x^2 + y^2}$$

$$= \frac{2u^2}{g} \tan \theta \sqrt{1 + \tan^2 \theta} = \frac{2u^2}{g} \tan \theta \sec \theta$$

Ex. 30 A projectile is thrown at an angle θ with an inclined plane of inclination β as shown in figure. Find the relation between β and θ if :

- (a) projectile strikes the inclined plane perpendicularly,
- (b) projectile strikes the inclined plane horizontal.

Sol. (a) If projectile strikes perpendicularly.

$$v_x = 0 \text{ when projectile strikes}$$

$$v_x = u_x + a_x t$$


$$0 = u \cos \theta - g \sin \beta T$$

$$T = \frac{u \cos \theta}{g \sin \beta}$$

$$\text{we also know that } T = \frac{2u \sin \theta}{g \cos \beta}$$

$$\Rightarrow \frac{u \cos \theta}{g \sin \beta} = \frac{2u \sin \theta}{g \cos \beta} \Rightarrow 2 \tan \theta = \cot \beta$$

(b) If projectile strikes horizontally, then at the time of striking the projectile will be at the maximum height from the ground. Therefore :

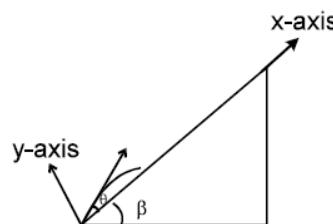


$$t_{OP} = \frac{2u \sin \theta}{g \cos \beta}$$

$$t_{OP} = \frac{2u \sin(\theta + \beta)}{2 \times g}$$

$$\Rightarrow \frac{2u \sin \theta}{g \cos \beta} = \frac{2u \sin(\theta + \beta)}{2g}$$

$$\Rightarrow 2 \sin \theta = \sin(\theta + \beta) \cos \beta .$$

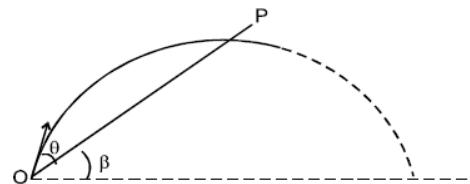


Elastic collision of a projectile with a wall :

Suppose a projectile is projected with speed u at an angle θ from point O on the ground. Range of the projectile is R . If a wall is present in the path of the projectile at a distance x from the point O. The collision with the wall is elastic, path of the projectile changes after the collision as described below.


Case I : If $x \geq \frac{R}{2}$

Direction of x component of velocity is reversed but its magnitude remains the same and y component of velocity remains unchanged, therefore the remaining distance $(R - x)$ is covered in the backward direction and projectile falls a distance $(R - 2x)$ ahead of the point O as shown in figure.

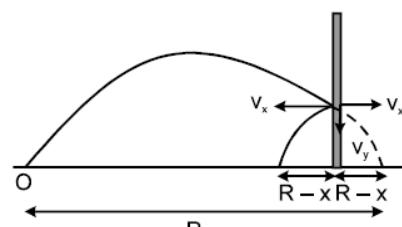


Case II : If $x < \frac{R}{2}$

Direction of x component of velocity is reversed but its magnitude remains the same and y component of velocity remains unchanged, therefore the remaining distance $(R - x)$ is covered in the backward direction and projectile falls a distance $(R - 2x)$ behind the point O as shown in figure.

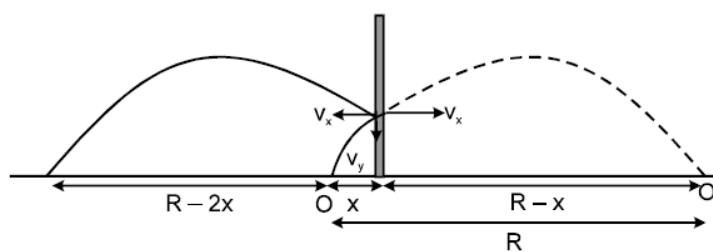


DPP # 3

1. A ball is thrown horizontally from a point 100 m above the ground with a speed of 20 m/s. Find (a) the time it takes to reach the ground, (b) the horizontal distance it travels before reaching the ground, (c) the velocity (direction and magnitude) with which it strikes the ground.
2. A ball is thrown at a speed of 40 m/s at an angle of 60° with the horizontal. Find (a) the maximum height reached and (b) the range of the ball. Take $g = 10 \text{ m/s}^2$.
3. In a soccer practice session the football is kept at the centre of the field 40 yards from the 10 ft high goalposts. A goal is attempted by kicking the football at a speed of 64 ft/s at an angle of 45° to the horizontal. Will the ball reach the goal post?
4. A popular game in Indian villages is goli which is played with small glass balls called golis. The goli of one player is situated at a distance of 2.0 m from the goli of the second player. This second player has to project his goli by keeping the thumb of the left hand at the place of his goli, holding the goli between his two middle fingers and making the throw. If the projected goli hits the goli of the first player, the second player wins. If the height from which the goli is projected is 19.6 cm from the ground and the goli is to be projected horizontally, with what speed should it be projected so that it directly hits the stationary goli without falling on the ground earlier?
5. Figure shows a 11.7 ft wide ditch, with the approach roads at an angle of 15° with the horizontal. With what minimum speed should a motorbike be moving on the road so that it safely crosses the ditch?




Assume that the length of the bike is 5 ft, and it leaves the road when the front part runs out of the approach road.

6. A person standing on the top of a cliff 171 ft high has to throw a packet to his friend standing on the ground 228 ft horizontally away. If he throws the packet directly aiming at the friend with a speed of 15.0 ft, how short will the packet fall?
7. A ball is projected from a point on the floor with a speed of 15 m/s at an angle of 60° with the horizontal. Will it hit a vertical wall 5 m away from the point of projection and perpendicular to the plane of projection without hitting the floor? Will the answer differ if the wall is 22 m away?
8. Find the average velocity of a projectile between the instants it crosses half the maximum height. It is projected with a speed u at an angle θ with the horizontal.
9. A bomb is dropped from a plane flying horizontally with uniform speed. Show that the bomb will explode vertically below the plane. Is the statement true if the plane flies with uniform speed but not horizontally?
10. A boy standing on a long railroad car throws a ball straight upwards. The car is moving on the horizontal road with an acceleration of 1 m/s^2 and the projection velocity in the vertical direction is 9.8 m/s. How far behind the boy will the ball fall on the car?
11. A staircase contains three steps each 10 cm high and 20 cm wide (figure). What should be the minimum horizontal velocity of a ball rolling off the uppermost plane so as to hit directly the lowest plane?

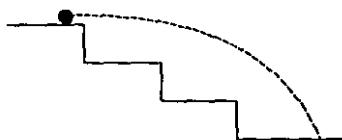


12. A person is standing on a truck moving with a constant velocity of 14.7 m/s on a horizontal road. The man throws a ball in such a way that it returns to the truck after the truck has moved 58.8 m. Find the speed and the angle of projection (a) as seen from the truck, (b) as seen from the road.
13. The benches of a gallery in a cricket stadium are 1 m wide and 1 m high. A batsman strikes the ball at a level one metre above the ground and hits a mammoth sixer. The ball starts at 35 m/s at an angle of 53° with the horizontal. The benches are perpendicular to the plane of motion and the first bench is 110 m from the batsman. On which bench will the ball hit?

14. A man is sitting on the shore of a river. He is in the line of a 1.0 m long boat and is 5.5 m away from the centre of the boat. He wishes to throw an apple into the boat. If he can throw the apple only with a speed of 10 m/s, find the minimum and maximum angles of projection for successful shot. Assume that the point of projection and the edge of the boat are in the same horizontal level.
15. A stone is thrown horizontally. In 0.5 second after the stone began to move, the numerical value of its velocity was 1.5 times its initial velocity. Find the initial velocity of stone.
16. A dive bomber, diving at an angle of 53° with the vertical, releases a bomb at an altitude of 2400 ft. The bomb hits the ground 5.0 s after being released. (a) What is the speed of the bomber ? (b) How far did the bomb travel horizontally during its flight? (c) What were the horizontal and vertical components of its velocity just before striking the ground ?
17. A boy throws a ball so as to clear a wall of height 'h' at a distance 'x' from him. Find minimum speed of the ball to clear the wall.
18. During the volcanic eruption chunks of solid rock are blasted out of the volcano.

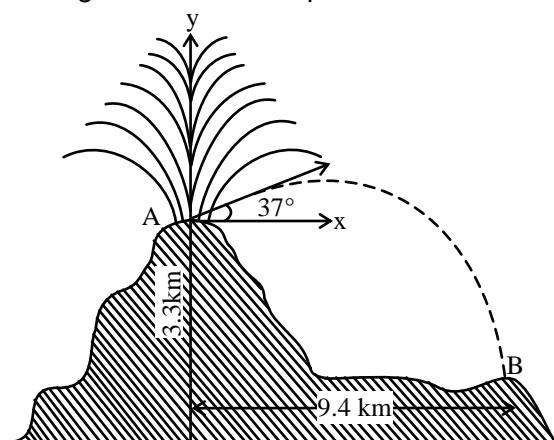

- (a) At what initial speed would a volcanic object have to be ejected at 37° to the horizontal from the vent A in order to fall at B as shown in figure. (b) What is the time of flight. ($g = 9.8 \text{ m/s}^2$)
19. At a harbour enemy ship is at a distance $180\sqrt{3}$ m from the security cannon having a muzzle velocity of 60 m/s (a) To what angle must the cannon be elevated to hit the ship? (b) What is the time of flight ? (c) How far should the ship be moved away from its initial position so that it becomes beyond the range of the cannon ($g = 10 \text{ m/s}^2$) ?
20. (a) A particle is projected with a velocity of 29.4 m/s at an angle of 60° to the horizontal. Find the range on a plane inclined at 30° to the horizontal when projected from a point of the plane up the plane.
 (b) Determine the velocity with which a stone must be projected horizontally from a point P, so that it may hit the inclined plane perpendicularly. The inclination of the plane with the horizontal is θ and P is h metre above the foot of the incline as shown in the figure.

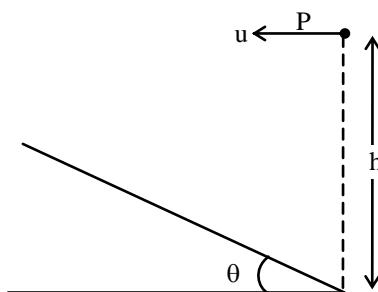

RELATIVE MOTION

The word 'relative' is a very general term, which can be applied to physical, nonphysical, scalar or vector quantities. For example, my height is five feet and six inches while my wife's height is five feet and four inches. If I ask you how high I am relative to my wife, your answer will be two inches. What you did? You simply subtracted my wife's height from my height. The same concept is applied everywhere, whether it is a relative velocity, relative acceleration or anything else. So, from the above discussion

we may now conclude that relative velocity of A with respect of B (written as \vec{v}_{AB}) is

$$\vec{v}_{AB} = \vec{v}_A - \vec{v}_B$$

Similarly, relative acceleration of A with respect of B is

$$\vec{a}_{AB} = \vec{a}_A - \vec{a}_B$$

If it is a one dimensional motion we can treat the vectors as scalars just by assigning the positive sign to one direction and negative to the other. So, in case of a one dimensional motion the above equations can be written as

$$v_{AB} = v_A - v_B$$

and $a_{AB} = a_A - a_B$

Further, we can see that

$$\vec{v}_{AB} = -\vec{v}_{BA} \quad \text{or} \quad \vec{a}_{BA} = -\vec{a}_{AB}$$

Ex. 31 Seeta is moving due east with a velocity of 1 m/s and Geeta is moving the due west with a velocity of 2 m/s. What is the velocity of Seeta with respect to Geeta?

Sol. It is a one dimensional motion. So, let us choose the east direction as positive and the west as negative. Now, given that

$$v_s = \text{velocity of Seeta} = 1 \text{ m/s}$$

and $v_g = \text{velocity of Geeta} = -2 \text{ m/s}$

$$\text{Thus, } v_{sg} = \text{velocity of Seeta with respect to Geeta}$$

$$= v_s - v_g = 1 - (-2) = 3 \text{ m/s}$$

Hence, velocity of Seeta with respect to Geeta is 3 m/s due east.

IMPORTANT NOTE :**PROCEDURE TO SOLVE THE VECTOR EQUATION.**

$$\vec{A} = \vec{B} + \vec{C} \quad \dots(1)$$

(a) There are 6 variables in this equation which are following :

- (1) Magnitude of \vec{A} and its direction
- (2) Magnitude of \vec{B} and its direction
- (3) Magnitude of \vec{C} and its direction.

(b) We can solve this equation if we know the value of 4 variables [Note : two of them must be directions]

(c) If we know the two direction of any two vectors then we will put them on the same side and other on the different side.

For example

If we know the directions of \vec{A} and \vec{B} and \vec{C} 's direction is unknown then we make equation as follows :-

$$\vec{C} = \vec{A} - \vec{B}$$

(d) Then we make vector diagram according to the equation and resolve the vectors to know the unknown values.

Ex. 32 Car A has an acceleration of 2 m/s^2 due east and car B, 4 m/s^2 due north. What is the acceleration of car B with respect to car A?

Sol. It is a two dimensional motion. Therefore,

\vec{a}_{BA} = acceleration of car B with respect to car A

$$= \vec{a}_B = - \vec{a}_A$$



Here, \vec{a}_B = acceleration of car
B = 4 m/s^2 (due north)

and \vec{a}_A = acceleration of car A = 2 m/s^2 (due east)

$$| \vec{a}_{BA} | = \sqrt{(4)^2 + (2)^2} = 2\sqrt{5} \text{ m/s}^2$$


$$\text{and } \alpha = \tan^{-1}\left(\frac{4}{2}\right) = \tan^{-1}(2)$$

Thus, \vec{a}_{BA} is $2\sqrt{5} \text{ m/s}^2$ at an angle of $\alpha = \tan^{-1}(2)$ from west towards north.

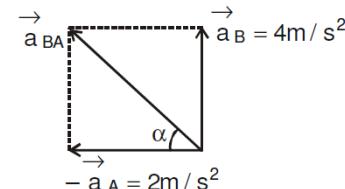

Ex. 33 Three particle A, B and C situated at the vertices of an equilateral triangle starts moving simultaneously at a constant speed "v" in the direction of adjacent particle, which falls ahead in the anti-clockwise direction. If "a" be the side of the triangle, then find the time when they meet.

Sol. Here, particle "A" follows "B", "B" follows "C" and "C" follows "A". The direction of motion of each particle keeps changing as motion of each particle is always directed towards other particle. The situation after a time "t" is shown in the figure with a possible outline of path followed by the particles before they meet.

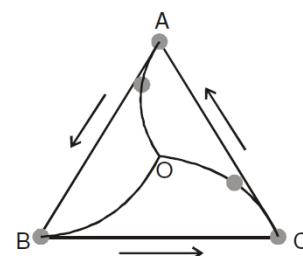

This problem appears to be complex as the path of motion is difficult to be defined. But, it has a simple solution in component analysis. Let us consider the pair "A" and "B". The initial component of velocities in the direction of line joining the initial position of the two particles is "v" and "vcosθ" as shown in the figure here :

The component velocities are directed towards each other. Now, considering the linear (one dimensional) motion in the direction of AB, the relative velocity of "A" with respect to "B" is :

$$\begin{aligned} V_{AB} &= V_A - V_B \\ V_{AB} &= v - (-v \cos \theta) = v + v \cos \theta \end{aligned}$$

In equilateral triangle, $\theta = 60^\circ$

$$V_{AB} = v + v \cos 60^\circ = v + \frac{v}{2} = \frac{3v}{2}$$

The time taken to cover the displacement "a" i.e. the side of the triangle

$$t = \frac{2a}{3v}$$

QUESTIONS BASED ON RELATIVE MOTION ARE USUALLY OF FOLLOWING FOUR TYPES :

- (a) Minimum distance between two bodies in motion
- (b) River-boat problems
- (c) Aircraft-wind problems
- (d) Rain problems

(a) Minimum distance between two bodies in motion

When two bodies are in motion, the questions like, the minimum distance between them or the time when one body overtakes the other can be solved easily by the principle of relative motion. In these type of problems one body is assumed to be at rest and the relative motion of the other body is considered. By assuming so two body problem is converted into one body problem and the solution becomes easy. Following example will illustrate the statement.


Ex. 34 Car A and car B start moving simultaneously in the same direction along the line joining them. Car A with a constant acceleration $a = 4 \text{ m/s}^2$, while car B moves with a constant velocity $v = 1 \text{ m/s}$. At time $t = 0$, car A is 10 m behind car B. Find the time when car A overtakes car B.

Sol. Given : $u_A = 0$, $u_B = 1 \text{ m/s}$, $a_A = 4 \text{ m/s}^2$ and $a_B = 0$



Assuming car B to be at rest, we have

$$\begin{aligned} u_{AB} &= u_A - u_B = 0 - 1 = -1 \text{ m/s} \\ a_{AB} &= a_A - a_B = 4 - 0 = 4 \text{ m/s}^2 \end{aligned}$$

Now, the problem can be assumed in simplified form as follow :

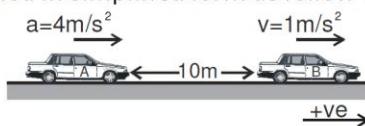

Substituting the proper values in equation

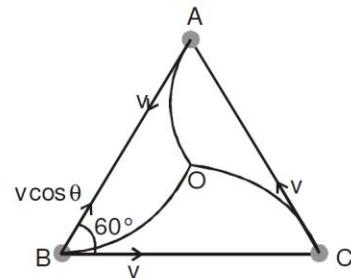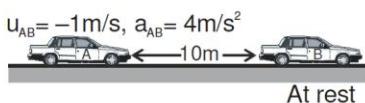

$$s = ut + \frac{1}{2}at^2$$

we get $10 = -t + \frac{1}{2}(4)(t^2)$ or $2t^2 - t - 10 = 0$

or $t = \frac{1 \pm \sqrt{1+80}}{4} = \frac{1 \pm \sqrt{81}}{4} = \frac{1 \pm 9}{4}$ or $t = 2.5\text{ s}$ and -2 s

Ignoring the negative value, the desired time is 2.5 s . **Ans.**

Note : The above problem can also be solved without using the concept of relative motion as under.

At the time when A overtakes B,

$$\begin{aligned}s_A &= s_B + 10 \\ \therefore \frac{1}{2} \times 4 \times t^2 &= 1 \times t + 10 \\ \text{or } 2t^2 - t - 10 &= 0\end{aligned}$$

Which on solving gives $t = 2.5\text{ s}$ and -2 s , the same as we found above.

As per my opinion, this approach (by taking absolute values) is more suitable in case of two body problem in one dimensional motion. Let us see one more example in support of it.

Ex. 35 An open lift is moving upwards with velocity 10 m/s . It has an upward acceleration of 2 m/s^2 . A ball is projected upwards with velocity 20 m/s relative to ground. Find :


- (a) time when ball again meets the lift.
- (b) displacement of lift and ball at that instant.
- (c) distance travelled by the ball upto that instant. Take $g = 10\text{ m/s}^2$

Sol. (a) At the time when ball again meets the lift,

$$\begin{aligned}s_L &= s_B \\ \therefore 10t + \frac{1}{2} \times 2 \times t^2 &= 20t - \frac{1}{2} \times 10t^2\end{aligned}$$

Solving this equation, we get

$$t = 0 \quad \text{and} \quad t = \frac{5}{3}\text{ s}$$

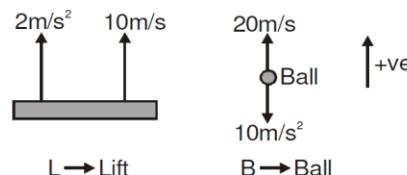

\therefore Ball will again meet the lift after $\frac{5}{3}\text{ s}$.

(b) At this instant

$$s_L = s_B = 10 \times \frac{5}{3} + \frac{1}{2} \times 2 \times \left(\frac{5}{3}\right)^2 = \frac{175}{9}\text{ m} = 19.4\text{ m}$$

(c) For the ball $u \uparrow \downarrow a$. Therefore, we will first find t_0 , the time when its velocity becomes zero.

$$t_0 = \frac{|u|}{|a|} = \frac{20}{10} = 2\text{ s}$$

As $t\left(=\frac{5}{3}\text{ s}\right) < t_0$, distance and displacement are equal

or $d = 19.4\text{ m}$ **Ans.**

Concept of relative motion is more useful in two body problem in two (or three) dimensional motion. This can be understood by the following example.


Ex. 36 Two ships A and B are 10 km apart on a line running south to north. Ship A farther north is streaming west at 20 km/h and ship B is streaming north at 20 km/h. What is their distance of closest approach and how long do they take to reach it?

Sol. Ships A and B are moving with same speed 20 km/h in the directions shown in figure. It is a two dimensional, two body problem with zero acceleration. Let us find \vec{v}_{BA}

$$\vec{v}_{BA} = \vec{v}_B - \vec{v}_A$$


$$\text{Here, } |\vec{v}_{BA}| = \sqrt{(20)^2 + (20)^2} \\ = 20\sqrt{2} \text{ km/h}$$

i.e., \vec{v}_{BA} is $20\sqrt{2}$ km/h at an angle of 45° from east towards north. Thus, the given problem can be simplified as :

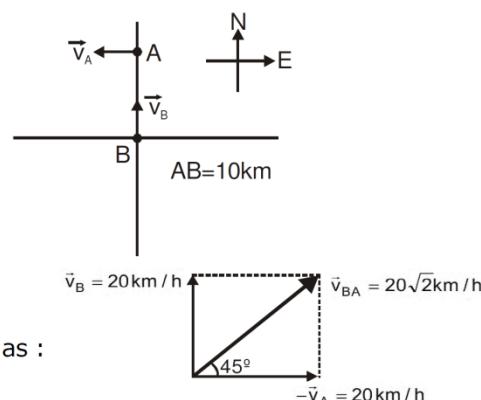

A is at rest and B is moving with \vec{v}_{BA} in the direction shown in figure. Therefore, the minimum distance between the two is

$$s_{\min} = AC = AB \sin 45^\circ \\ = 10 \left(\frac{1}{\sqrt{2}} \right) \text{ km} = 5\sqrt{2} \text{ km} \quad \text{Ans.}$$

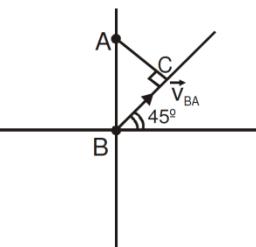


and the desired time is

$$t = \frac{BC}{|\vec{v}_{BA}|} = \frac{5\sqrt{2}}{20\sqrt{2}} \quad (\text{BC} = AC = 5\sqrt{2} \text{ km}) \\ = \frac{1}{4} \text{ h} = 15 \text{ min} \quad \text{Ans.}$$

(B) River - Boat Problems

In river-boat problems we come across the following three terms :

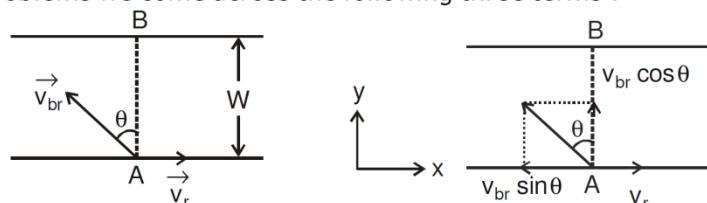

\vec{v}_r = absolute velocity of river

\vec{v}_{br} = velocity of boatman with respect to river or velocity of boatman is still water

and \vec{v}_b = absolute velocity of boatman.

- Here, it is important to note that \vec{v}_{br} is the velocity of boatman with which he steers and \vec{v}_b is the actual velocity of boatman relative to ground.

Further, $\vec{v}_b = \vec{v}_{br} + \vec{v}_r$

Now, let us derive some standard results and their special cases.

A boatman starts from point A on one bank of a river with velocity \vec{v}_{br} in the direction shown in fig. River is flowing along positive x-direction with velocity \vec{v}_r . Width of the river is w, then

$$\begin{aligned} \vec{v}_b &= \vec{v}_{br} + \vec{v}_r \\ \text{Therefore, } v_{bx} &= v_{rx} + v_{brx} = v_r - v_{br} \sin \theta \\ \text{and } v_{by} &= v_{ry} + v_{bry} \\ &= 0 + v_{br} \cos \theta = v_{br} \cos \theta \end{aligned}$$

Now, time taken by the boatman to cross the river is :

$$t = \frac{w}{v_{by}} = \frac{w}{v_{br} \cos \theta}$$

$$\text{or } t = \frac{w}{v_{br} \cos \theta} \quad \dots(i)$$

Further, displacement along x-axis when he reaches on the other bank (also called drift) is :


$$\begin{aligned} x &= v_{bx} t = (v_r - v_{br} \sin \theta) \frac{w}{v_{br} \cos \theta} \\ \text{or } x &= (v_r - v_{br} \sin \theta) \frac{w}{v_{br} \cos \theta} \quad \dots(ii) \end{aligned}$$

Three special cases :

(i) Condition when the boatman crosses the river in shortest interval of time

From Eq.(i) we can see that time (t) will be minimum when $\theta = 0^\circ$, i.e., the boatman should steer his boat perpendicular to the river current.

$$\text{Also, } t_{\min} = \frac{w}{v_{br}} \text{ as } \cos \theta = 1$$



(ii) Condition when the boatman wants to reach point B, i.e., at a point just opposite from where he started


In this case, the drift (x) should be zero.

$$\therefore x = 0$$

$$\text{or } (v_r - v_{br} \sin \theta) \frac{w}{v_{br} \cos \theta} = 0$$

$$\text{or } v_r = v_{br} \sin \theta$$

$$\text{or } \sin \theta = \frac{v_r}{v_{br}} \text{ or } \theta = \sin^{-1}\left(\frac{v_r}{v_{br}}\right)$$

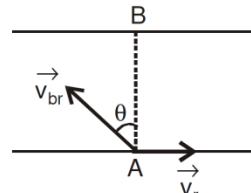

Hence, to reach point B the boatman should row at an angle $\theta = \sin^{-1}\left(\frac{v_r}{v_{br}}\right)$ upstream from AB.

Further, since $\sin \theta$ is not greater than 1.

So, if $v_r \geq v_{br}$, the boatman can never reach at point B. Because if $v_r = v_{br}$, $\sin \theta = 1$ or $\theta = 90^\circ$ and it is just impossible to reach at B if $\theta = 90^\circ$. Moreover it can be seen that $v_b = 0$ if $v_r = v_{br}$ and $\theta = 90^\circ$. Similarly, if $v_r > v_{br}$, $\sin \theta > 1$, i.e., no such angle exists. Practically it can be realized in this manner that it is not possible to reach at B if river velocity (v_r) is too high.

(iii) Shortest path

Path length travelled by the boatman when he reaches the opposite shore is

$$s = \sqrt{w^2 + x^2}$$

Here, w = width of river is constant. So for s to be minimum modulus of x (drift) should be minimum. Now two cases are possible.

When $v_r < v_{br}$: In this case $x = 0$,

$$\text{when } \theta = \sin^{-1}\left(\frac{v_r}{v_{br}}\right) \quad \text{or} \quad s_{\min} = w \quad \text{at } \theta = \sin^{-1}\left(\frac{v_r}{v_{br}}\right)$$

When $v_r > v_{br}$: In this case x is minimum, where $\frac{dx}{d\theta} = 0$

$$\text{or } \frac{d}{d\theta} \left\{ \frac{w}{v_{br} \cos \theta} (v_r - v_{br} \sin \theta) \right\} = 0$$

$$\text{or } -v_{br} \cos^2 \theta - (v_r - v_{br} \sin \theta) (-\sin \theta) = 0$$

$$\text{or } -v_{br} + v_r \sin \theta = 0$$

$$\text{or } \theta = \sin^{-1}\left(\frac{v_{br}}{v_r}\right)$$

Now, at this angle we can find x_{\min} and then s_{\min} which comes out to be

$$s_{\min} = w \left(\frac{v_r}{v_{br}} \right) \text{ at } \theta = \sin^{-1}\left(\frac{v_{br}}{v_r}\right)$$

Ex. 37 A man can row a boat with 4 km/h in still water. If he is crossing a river where the current is 2 km/h.

- (a) In what direction will his boat be headed, if he wants to reach a point on the other bank, directly opposite to starting point?
- (b) If width of the river is 4 km, how long will the man take to cross the river, with the condition in part (a)?
- (c) In what direction should he head the boat if he wants to cross the river in shortest time and what is this minimum time?
- (d) How long will it take him to row 2 km up the stream and then back to his starting point?

Sol. (a) Given, that $v_{br} = 4$ km/h and $v_r = 2$ km/h

$$\therefore \theta = \sin^{-1}\left(\frac{v_r}{v_{br}}\right) = \sin^{-1}\left(\frac{2}{4}\right) = \sin^{-1}\left(\frac{1}{2}\right) = 30^\circ$$

Hence, to reach the point directly opposite to starting point he should head the boat at an angle of 30° with AB or $90^\circ + 30^\circ = 120^\circ$ with the river flow.

(b) Time taken by the boatman to cross the river

$$w = \text{width of river} = 4 \text{ km}$$


$$v_{br} = 4 \text{ km/h and } \theta = 30^\circ$$

$$\therefore t = \frac{4}{4 \cos 30^\circ} = \frac{2}{\sqrt{3}} \text{ h} \quad \text{Ans.}$$

(c) For shortest time $\theta = 0^\circ$

$$\text{and } t_{\min} = \frac{w}{v_{br} \cos 0^\circ} = \frac{4}{4} = 1 \text{ h}$$

Hence, he should head his boat perpendicular to the river current for crossing the river in shortest time and this shortest time is 1 h.



$$(d) t = t_{CD} + t_{DC}$$

$$\text{or } t = \frac{CD}{v_{db} - v_r} + \frac{DC}{v_{br} + v_r} = \frac{2}{4-2} + \frac{2}{4+2} = 1 + \frac{1}{3} = \frac{4}{3} \text{ h} \quad \text{Ans.}$$

Ex. 38 A man can swim at a speed of 3 km/h in still water. He wants to cross a 500 m wide river flowing at 2 km/h. He keeps himself always at an angle of 120° with the river flow while swimming.

- (a) Find the time he takes to cross the river.
 (b) At what point on the opposite bank will he arrive?

Sol. The situation is shown in figure

Here $\vec{v}_{r,g}$ = velocity of the river with respect to the ground

$\vec{v}_{m,r}$ = velocity of the man with respect to the river

$\vec{v}_{m,g}$ = velocity of the man with respect to the ground.

(a) We have

$$\vec{v}_{m,g} = \vec{v}_{m,r} + \vec{v}_{r,g} \quad \dots(i)$$

Hence, the velocity with respect to the ground is along AC.
 Taking y-components in equation (i),

$$\vec{v}_{m,g} \sin \theta = 3 \text{ km/h} \cos 30^\circ + 2 \text{ km/h} \cos 90^\circ = \frac{3\sqrt{3}}{2} \text{ km/h}$$

Time taken to cross the river


$$= \frac{\text{displacement along the Y - axis}}{\text{velocity along the Y - axis}} = \frac{1/2 \text{ km}}{3\sqrt{3}/2 \text{ km/h}} = \frac{1}{3\sqrt{3}} \text{ h}$$

(b) Taking x-components in equation (i),

$$\vec{v}_{m,g} \cos \theta = -3 \text{ km/h} \sin 30^\circ + 2 \text{ km/h} = \frac{1}{2} \text{ km/h}$$

Displacement along the X-axis as the man crosses the river
 = (velocity along the X-axis) (time)

$$= \left(\frac{1 \text{ km}}{2 \text{ h}} \right) \times \left(\frac{1}{3\sqrt{3}} \text{ h} \right) = \frac{1}{6\sqrt{3}} \text{ km}$$

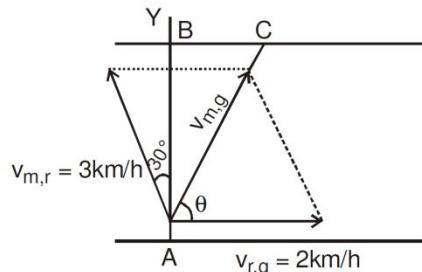

Ex. 39 A boat moves relative to water with a velocity v and river is flowing with $2v$. At what angle the boat shall move with the stream to have minimum drift?


- (A) 30° (B) 60° (C) 90° (D) 120°

Sol. (D) Let boat move at angle θ to the normal as shown in

$$\text{figure then time to cross the river} = \frac{1}{v \cos \theta}$$

$$\text{drift } x = (2v - v \sin \theta) \frac{1}{v \cos \theta} \text{ for } x \text{ to be minimum}$$

$$\frac{dx}{d\theta} = 0 = 1 (2 \sec \theta \tan \theta - \sec^2 \theta) \text{ or } \sin \theta = 1/2 \\ \text{or } \theta = 30^\circ \text{ and } \phi = 90 + 30 = 120^\circ$$

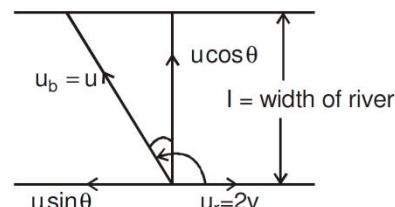

(C) Aircraft Wind Problems

This is similar to river boat problem. The only difference is that \vec{v}_{br} is replaced by \vec{v}_{aw} (velocity of aircraft with respect to wind or velocity of aircraft in still air), \vec{v}_r is replaced by \vec{v}_w (velocity of wind) and \vec{v}_b is replaced by \vec{v}_a (absolute velocity of aircraft). Further, $\vec{v}_a = \vec{v}_{aw} + \vec{v}_w$. The following example will illustrate the theory.


NOTE : SHORT - TRICK

If there are two vectors \vec{A} and \vec{B} and their resultant

make an angle α with \vec{A} and β with \vec{B} .

$$\text{then } A \sin \alpha = B \sin \beta$$

Means component of \vec{A} perpendicular to resultant is equal in magnitude to the component of \vec{B} also perpendicular to resultant.

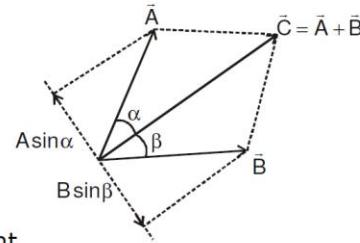

Ex. 40 If two vectors \vec{A} and \vec{B} make angle 30° and 60°


with their resultant and \vec{B} has magnitude equal to

10, then find magnitude of \vec{A} .

$$\text{So } B \sin 60^\circ = A \sin 30^\circ$$

$$\Rightarrow 10 \sin 60^\circ = A \sin 30^\circ$$

$$\Rightarrow A = 10\sqrt{3}$$

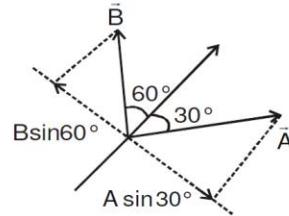

Ex. 41 An aircraft flies at 400 km/h in still air. A wind of $200\sqrt{2} \text{ km/h}$ is blowing from the south. The pilot wishes to travel from A to a point B north east of A. Find the direction he must steer and time of his journey if $AB = 1000 \text{ km}$.

Sol. Given that $v_w = 200\sqrt{2} \text{ km/h}$

$v_{aw} = 400 \text{ km/h}$ and \vec{v}_a should be along AB or in north-east direction. Thus, the direction of \vec{v}_{aw} should be such as the resultant of \vec{v}_w and \vec{v}_{aw} is along AB or in north - east direction.

Let \vec{v}_{aw} makes an angle α with AB as shown in figure.


Applying sine law in triangle ABC, we get

$$\frac{AC}{\sin 45^\circ} = \frac{BC}{\sin \alpha}$$

$$\text{or } \sin \alpha = \left(\frac{BC}{AC} \right) \sin 45^\circ = \left(\frac{200\sqrt{2}}{400} \right) \frac{1}{\sqrt{2}} = \frac{1}{2}$$

$$\therefore \alpha = 30^\circ$$

Therefore, the pilot should steer in a direction at an angle of $(45^\circ + \alpha)$ or 75° from north towards east.

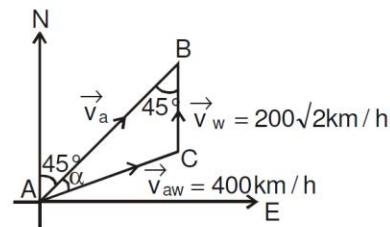

$$\text{Further, } \frac{|\vec{v}_a|}{\sin(180^\circ - 45^\circ - 30^\circ)} = \frac{400}{\sin 45^\circ} \text{ or } |\vec{v}_a| = \frac{\sin 105^\circ}{\sin 45^\circ} \times (400) \frac{\text{km}}{\text{h}}$$

$$= \left(\frac{\cos 15^\circ}{\sin 45^\circ} \right) (400) \frac{\text{km}}{\text{h}} = \left(\frac{0.9659}{0.707} \right) (400) \frac{\text{km}}{\text{h}}$$

$$= 546.47 \text{ km/h}$$

\therefore The time of journey from A to B is

$$t = \frac{AB}{|\vec{v}_a|} = \frac{1000}{546.47} \text{ h} \Rightarrow t = 1.83 \text{ h}$$

(D) Rain Problems

In these type of problems we again come across three terms \vec{v}_r , \vec{v}_m and \vec{v}_{rm} , Here,
 \vec{v}_r = velocity of rain


\vec{v}_m = velocity of man (it may be velocity of cyclist or velocity of motorist also)

and \vec{v}_{rm} = velocity of rain with respect to man.

Here, \vec{v}_{rm} is the velocity of rain which appears to the man. Now, let us take one example of this.

Ex. 42 A man standing on a road has to hold his umbrella at 30° with the vertical to keep the rain away. He throws the umbrella and starts running at 10 km/h. He finds that raindrops are hitting his head vertically. Find the speed of raindrops with respect to (a) the road, (b) the moving man.

Sol. When the man is at rest with respect to the ground, the rain comes to him at an angle 30° with the vertical. This is the direction of the velocity of raindrops with respect to the ground. The situation when the man runs is shown in the figure

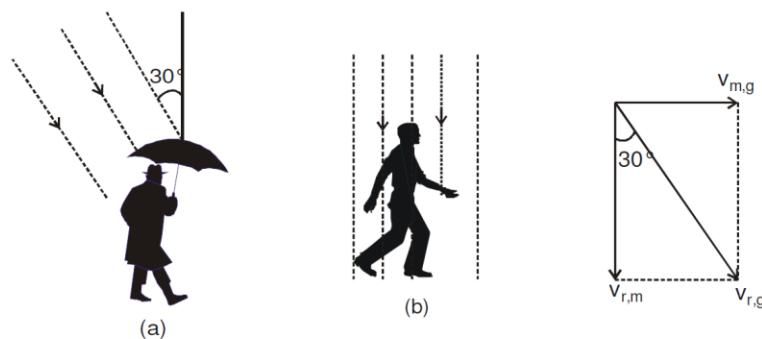

Here $\vec{v}_{r,g}$ = velocity of the rain with respect to the ground

$\vec{v}_{m,g}$ = velocity of the man with respect to the ground and $\vec{v}_{r,m}$ = velocity of the rain with respect to the man.

$$\text{We have, } \vec{v}_{r,g} = \vec{v}_{r,m} + \vec{v}_{m,g} \quad \dots(i)$$

Taking horizontal components, equation (i) gives

$$v_{r,g} \sin 30^\circ = u_{m,g} = 10 \text{ km/h or, } v_{r,g} = \frac{10 \text{ km/h}}{\sin 30^\circ} = 20 \text{ km/h}$$

Taking vertical components, equation (i) gives

$$v_{r,g} \cos 30^\circ = v_{r,m} \text{ or, } v_{r,m} = (20 \text{ km/h}) \frac{\sqrt{3}}{2} = 10\sqrt{3} \text{ km/h.}$$

Ex. 43 To a man walking at the rate of 3 km/h the rain appears to fall vertically. When he increases his speed to 6 km/h it appears to meet him at an angle of 45° with vertical. Find the speed of rain.


Sol. Let \hat{i} and \hat{j} be the unit vectors in horizontal and vertical directions respectively.

Let velocity of rain

$$\vec{v}_r = a\hat{i} + b\hat{j} \quad \dots(i)$$

Then speed of rain will be

$$|\vec{v}_r| = \sqrt{a^2 + b^2}$$

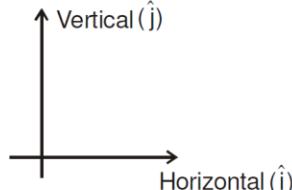

In the first case \vec{v}_m = velocity of man = $3\hat{i}$

$$\therefore \vec{v}_{rm} = \vec{v}_r - \vec{v}_m = (a - 3)\hat{i} + b\hat{j}$$

It seems to be in vertical direction. Hence,

$$a - 3 = 0 \text{ or } a = 3$$

In the second case \vec{v}_m = $6\hat{i}$

$$\therefore \vec{v}_{rm} = (a - 6)\hat{i} + b\hat{j} = -3\hat{i} + b\hat{j}$$

This seems to be at 45° with vertical.

$$\text{Hence, } |b| = 3$$

Therefore, from Eq. (ii) speed of rain is

$$|\vec{v}_r| = \sqrt{(3)^2 + (3)^2} = 3\sqrt{2} \text{ km/h Ans.}$$


DPP # 4

1. A river 400 m wide is flowing at a rate of 2.0 m/s. A boat is sailing at a velocity of 10 m/s with respect to the water, in a direction perpendicular to the river. (a) Find the time taken by the boat to reach the opposite bank. (b) How far from the point directly opposite to the starting point does the boat reach the opposite bank?
2. A swimmer wishes to cross a 500 m wide river flowing at 5 km/h. His speed with respect to water is 3 km/h. (a) If he heads in a direction making an angle θ with the flow, find the time he takes to cross the river. (b) Find the shortest possible time to cross the river.
3. Consider the situation of the previous problem. The man has to reach the other shore at the point directly opposite to his starting point. If he reaches the other shore somewhere else, he has to walk down to this point. Find the minimum distance that he has to walk.
4. An aeroplane has to go from a point A to another point B, 500 km away due 30° east of north. A wind is blowing due north at a speed of 20 m/s. The air-speed of the plane is 150 m/s. (a) Find the direction in which the pilot should head the plane to reach the point B. (b) Find the time taken by the plane to go from A to B.
5. Two friends A and B are standing a distance x apart in an open field and wind is blowing from A to B. A beats a drum and B hears the sound t_1 time after he sees the event. A and B interchange their positions and the experiment is repeated. This time B hears the drum t_2 time after he sees the event. Calculate the velocity of sound in still air v and the velocity of wind u . Neglect the time light takes in travelling between the friends.
6. Suppose A and B in the previous problem change their positions in such a way that the line joining them becomes perpendicular to the direction of wind while maintaining the separation x . What will be the time lag B finds between seeing and hearing the drum beating by A ?
7. Six particles situated at the corners of a regular hexagon of side a move at a constant speed v . Each particle maintains a direction towards the particle at the next corner. Calculate the time the particles will take to meet each other.
8. Men are running along a road at 15 km/h behind one another at equal intervals of 20 m. Cyclist are riding in the same direction at 25 km/h at equal intervals of 30 m. At what speed an observer travel along the road in opposite direction so that whenever he meets a runner he also meets a cyclist?

9. Two perpendicular rail tracks have two trains A & B respectively. Train A moves north with a speed of 54 km h^{-1} and train B moves west with a speed of 72 km h^{-1} . Assume that both trains starts from same point. Calculate the
 (a) rate of separation of the two trains
 (b) relative velocity of ground with respect to B
 (c) relative velocity of A with respect to B.
10. A man is swimming in a lake in a direction of 30° East of North with a speed of 5 km/hr and a cyclist is going on a road along the lake shore towards East at a speed of 10 km/hr. In what direction and with what speed would the man appear to swim to the cyclist.
11. A motor boat has 2 throttle position on its engine. The high speed position propels the boat at 10 km hr^{-1} in still water and the low position gives half the higher speed. The boat travels from its dock downstream on a river with the throttle at low position and returns to its dock with throttle at high position. The return trip took 15 % longer time than it did for the downstream trip. Find the velocity of the water current in the river.
12. (I) A man can swim with a speed of 4 km h^{-1} in still water. How long does he take to cross a river 1 km wide if the river flows steadily at 3 km h^{-1} and he makes his strokes normal to the river current ? How far down the river does he go when he reaches the other bank ?
 (II) If he keeps himself always at an angle of 120° with the river flow while swimming.
 (a) Find the time he takes to cross the river. (b) At what point on the opposite bank will he arrive ?
13. A river is flowing from west to east at a speed of 5 m/min. A man on the south bank of the river, capable of swimming at 10 m/min in still water, wants to swim across the river in shortest distance. In what direction should he swim ?
14. An airplane is flying with velocity $50\sqrt{2}$ km/hour in north-east direction. Wind is blowing at 25 km/hr from north to south. What is the resultant displacement of airplane in 2 hours ?
15. When a train has a speed of 10 m s^{-1} eastward, raindrops that are falling vertically with respect to the earth make traces that are inclined 30° to the vertical on the windows of the train.
 (a) What is the horizontal component of a drop's velocity with respect to the earth ? With respect to the train ?
 (b) What is the velocity of the raindrop with respect to the earth ? With respect to the train ?
16. To a man walking at 7 km/h due west, the wind appears to blow from the north-west, but when he walks at 3 km/h due west, the wind appears to blow from the north. What is the actual direction of the wind and what is its velocity ?
17. When a motorist is driving with velocity $6\hat{i} + 8\hat{j}$, the wind appears to come from the direction \hat{i} . When he doubles his velocity the wind appears to come from the direction $\hat{i} + \hat{j}$. Then the true velocity of the wind expressed in the form of $a\hat{i} + b\hat{j}$ is _____.
 18. 'n' numbers of particles are located at the vertices of a regular polygon of 'n' sides having the edge length 'a'. They all start moving simultaneously with equal constant speed 'v' heading towards each other all the time. How long will the particles take to collide?
19. Two ships are 10 km apart on a line running south to north. The one further north is streaming west at 40 km/hr. The other is streaming north at 40 km/hr. What is their distance of closest approach and how long do they take to reach it?
20. A ship is sailing towards north at a speed of $\sqrt{2}$ m/s. The current is taking it towards East at the rate of 1 m/s and a sailor is climbing a vertical pole on the ship at the rate of 1 m/s. Find the velocity of the sailor in space.


EXERCISE # 1

1. A particle moves from the position of rest and attains a velocity of 30 m/sec after 10sec. The acceleration will be
 (A) 9 m/sec^2 (B) 18 m/sec^2 (C) 3 m/sec^2 (D) 4 m/sec^2
2. The relation between time t and displacement x is expressed by $x = 2 - 5t + 6t^2$. What will be the initial velocity of the particle ?
 (A) -5m/sec (B) -3m/sec (C) 6m/sec (D) 3m/sec
3. A particle, after starting from rest , experiences, constant acceleration for 20 seconds. If it covers a distance of S_1 , in first 10 seconds and distance S_2 in next 10 sec, then
 (A) $S_2 = S_1/2$ (B) $S_2 = S_1$ (C) $S_2 = 2S_1$ (D) $S_2 = 3S_1$
4. A body sliding on a smooth inclined plane requires 4sec to reach the bottom after starting from rest at the top. How much time does it take to cover one fourth the distance starting from the top
 (A) 1sec (B) 2 sec (C) 0.4sec (D) 1.6 sec
5. The initial velocity of a particle is 10 m/sec and its retardation is 2 m/sec^2 . The distance covered in the fifth second of the motion will be
 (A) 1m (B) 19m (C) 50m (D) 75m
6. A moving train is stopped by applying brakes. It stops after travelling 80m. If the speed of the train is doubled and retardation remains the same, it will cover a distance
 (A) same as earlier (B) double the distance covered earlier
 (C) four times the distance covered earlier (D) half the distance covered earlier
7. If u is the initial velocity of a body and a the acceleration the value of distance travelled by n^{th} second is :
 (A) $u + \frac{1}{2} a (2n + 1)$ (B) $u + \frac{1}{2} a (2n - 1)$ (C) $u - \frac{1}{2} a (2n + 1)$ (D) $u - \frac{1}{2} a (2n - 1)$
8. A body starts from rest, the ratio of distances travelled by the body during 3rd and 4th seconds is :
 (A) 7/5 (B) 5/7 (C) 7/3 (D) 3/7
9. A body starting from rest and has uniform acceleration 8 m/s^2 . The distance travelled by it in 5th second will be
 (A) 36m (B) 40m (C) 100m (D) 200m
10. Which one of the following equations represent the motion of a body with finite constant acceleration. In these equations y denotes the position of the body at time t and a , b , and c are the constant of the motion
 (A) $y = a/t + bt$ (B) $y = at$ (C) $y = at + bt^2$ (D) $y = at + bt^2 + ct^3$
11. A particle travels for 40 seconds under the influence of a constant force. If the distance travelled by the particle is S_1 in the first twenty seconds and S_2 in the next twenty second, then
 (A) $S_2 = S_1$ (B) $S_2 = 2S_1$ (C) $S_2 = 3S_1$ (D) $S_2 = 4S_1$
12. A rocket is projected vertically upwards and its time-velocity graph is shown in the figure. The maximum height attained by the rocket is –
 (A) 1km (B) 10km (C) 100km (D) 60km

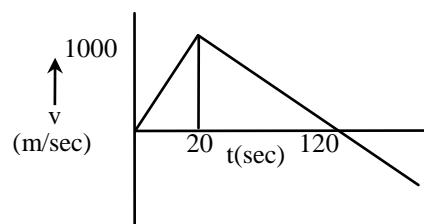

13. An object is released from some height. Exactly after one second, another object is released from the same height. The distance between the two objects exactly after 2 seconds of the release of second object will be:
 (A) 4.9 m (B) 9.8 m (C) 19.6 m (D) 24.5 m
14. A stone is thrown vertically upwards from the top of a tower with a velocity u and it reaches the ground with a velocity $3u$. The height of the tower is
 (A) $3u^2/g$ (B) $4u^2/g$ (C) $6u^2/g$ (D) $9u^2/g$
15. A ball is thrown from the ground with a velocity of 80 ft/sec. Then the ball will be at a height of 96 feet above the ground after time
 (A) 2 and 3 sec (B) only 3 sec (C) only 2 sec (D) 1 and 2 sec
16. A body is dropped from a height h under acceleration due to gravity g . If t_1 and t_2 are time intervals for its fall for first half and the second half distance, the relation between them is
 (A) $t_1 = t_2$ (B) $t_1 = 2t_2$ (C) $t_1 = 2.414 t_2$ (D) $t_1 = 4t_2$
17. A stone is dropped from a bridge and it reaches the ground in 4 seconds. The height of the bridge is:
 (A) 78.4 m (B) 64 m (C) 260 m (D) 2000 m
18. A rocket is launched from the earth surface so that it has an acceleration of 19.6 m/s^2 . If its engine is switched off after 5 seconds of its launch, then the maximum height attained by the rocket will be
 (A) 245 m (B) 490 m (C) 980 m (D) 735 m
19. Two bodies of different masses m_a and m_b are dropped from two different heights, viz a and b. The ratio of times taken by the two to drop through these distances is
 (A) $a : b$ (B) $\frac{m_a}{m_b} : \frac{b}{a}$ (C) $\sqrt{a} : \sqrt{b}$ (D) $a^2 : b^2$
20. A body thrown up with a finite speed is caught back after 4 sec. The speed of the body with which it is thrown up is
 (A) 10 m/sec (B) 20 m/sec (C) 30 m/sec (D) 40 m/sec
21. A stone is thrown vertically upwards with an initial velocity of 30 m/s. The time taken for the stone to rise to its maximum height is
 (A) 0.326 s (B) 3.26 s (C) 30.6 s (D) 3.06 s
22. A ball is thrown upward and reaches a height of 64 feet, its initial velocity should be ($g = 32 \text{ ft/sec}^2$)
 (A) 64 ft/sec (B) 72 ft/sec (C) 32 ft/sec (D) 4096 ft/sec
23. A body is thrown upward and reaches its maximum height. At that position-
 (A) its velocity is zero and its acceleration is also zero
 (B) its velocity is zero but its acceleration is maximum
 (C) its acceleration is minimum
 (D) its velocity is zero and its acceleration is the acceleration due to gravity
24. Two trains each of length 50 m are approaching each other on parallel rails. Their velocities are 10 m/sec and 15 m/sec. They will cross each other in -
25. A train is moving in the north at a speed 10 m/sec. Its length is 150 m. A parrot is flying parallel to the train in the south with a speed of 5 m/s. The time taken by the parrot to cross the train will be :
 (A) 12 sec (B) 8 sec (C) 15 sec (D) 10 sec


26. A thief is running away on a straight road on a jeep moving with a speed of 9 m/s. A police man chases him on a motor cycle moving at a speed of 10 m/s. If the instantaneous separation of jeep from the motor cycle is 100 m, how long will it take for the policemen to catch the thief ?
 (A) 1 second (B) 19 second (C) 90 second (D) 100 second
27. A horse rider is moving towards a big mirror with velocity v . The velocity of his image with respect to him is-
 (A) 0 (B) $4v$ (C) $2v$ (D) v
28. The velocity time graph of a particle in one-dimensional motion is shown in the figure. Which of the following formulae is correct for describing the motion of the particle over the time interval t_1 to t_2 ?



- (A) $x(t_2) = x(t_1) + v(t_1)(t_2 - t_1) + \left(\frac{1}{2}\right)a(t_2 - t_1)^2$
 (B) $v(t_2) = v(t_1) + a(t_2 - t_1)$
 (C) $a_{average} = \frac{(v(t_2) - v(t_1))}{(t_2 - t_1)}$
 (D) $V_{average} = \frac{(x(t_2) + x(t_1))}{(t_2 - t_1)}$
29. A man is walking on a road with a velocity 3 km/hr. Suddenly rain starts falling. The velocity of rain is 10 km/hr in vertically downward direction. The relative velocity of the rain is -
 (A) $\sqrt{13}$ km/hr (B) $\sqrt{7}$ km/hr (C) $\sqrt{109}$ km/hr (D) 13 km/hr
30. A car A is going north-east at 80 km/hr and another car B is going south-east at 60 km/hr. Then the direction of the velocity of A relative to B makes with the north an angle α such that $\tan \alpha$ is -
 (A) 1/7 (B) 3/4 (C) 4/3 (D) 3/5
31. A particle moves with constant speed v along a regular hexagon ABCDEF in same order (i.e. A to B , B to C, C to D, D to E, E to F, F to A...). Then magnitude of average velocity for its motion from A to C is –
 (A) v (B) $v/2$ (C) $\sqrt{3}v/2$ (D) None of these
32. A particle moves with a velocity v in a horizontal circular path. The change in its velocity for covering 60° will be -
 (A) $v\sqrt{2}$ (B) $v/\sqrt{2}$ (C) $v\sqrt{3}$ (D) v
33. A body is dropped from a height h from the state of rest. It covers a distance of $9h/25$ in the last second. What is the height from which the body falls? (in meter)
 (A) 12.5 (B) 1.25 (C) 125 (D) Zero
34. If the position vector of a particle is $\vec{r} = 3t\hat{i} - 4\hat{j} + \hat{k}$, the particle will be –
 (A) moving with uniform velocity (B) stationary
 (C) moving with uniform acceleration (D) insufficient data

35. A particle is executing a circular motion of radius R with a uniform speed v. After completing half the circle, the change in velocity and in speed will be respectively –
 (A) zero, zero (B) $2v$, zero (C) $2v$, $2v$ (D) zero, $2v$
36. A ball is thrown upward and it returns to ground describing a parabolic path. Which of the following remains constant?
 (A) kinetic energy of the ball (B) speed of the ball
 (C) horizontal component of velocity (D) vertical component of velocity
37. At the top of the trajectory of a projectile the direction of its velocity and acceleration are-
 (A) Parallel to each other (B) inclined at an angle of 45° to the horizontal
 (C) Perpendicular to each other (D) None of the above statement is correct
38. Three particles, A , B and C are projected from the same point with same initial speeds making angles 30° , 45° and 60° respectively with the horizontal. Which of the following statement is correct ?
 (A) A, B and C have equal ranges
 (B) ranges of A and C are equal and less than that of B
 (C) ranges of A and C are equal and greater than that of B
 (D) A, B and C have equal ranges
39. If a man wants to hit a target, he should point his rifle-
 (A) higher than the target (B) lower than the target
 (C) in the direction of the target (D) nothing can be said
40. The horizontal range covered by projectile is proportional to
 (A) its velocity (B) square of its velocity
 (C) sine of the angle of projection (D) square of the sine of the angle of projection
41. The horizontal range for projectile is given by
 (A) $\frac{u^2 \sin^2 \theta}{g}$ (B) $\frac{u^2 \sin 2\theta}{g}$ (C) $\frac{u^2 \sin 2\theta}{2g}$ (D) $\frac{u^2 \cos 2\theta}{g}$
42. The maximum vertical height attained by a projectile is
 (A) $\frac{U^2 \sin \theta}{g}$ (B) $\frac{U^2 \sin 2\theta}{g}$ (C) $\frac{U^2 \sin 2\theta}{2g}$ (D) $\frac{U^2 \sin^2 \theta}{2g}$
43. Equation of motion of a projectile is
 (A) $y = x \tan \theta - \frac{gx^2}{2u^2 \cos^2 \theta}$ (B) $y = x \tan \theta + \frac{gx^2}{2u^2 \cos^2 \theta}$
 (C) $y = x \sin \theta - \frac{gx^2}{2u \cos^2 \theta}$ (D) $y = x \sin \theta + \frac{gx^2}{2u^2 \cos^2 \theta}$
44. A cannon on a level plane is aimed at an angle α above the horizontal and a shell is fired with a muzzle velocity v towards a vertical cliff a distance R away. The height from the bottom at which the shell strikes the side walls of the cliff is-
 (A) $R \tan \alpha - \frac{1}{2} \frac{gR^2}{v_0^2 \cos^2 \alpha}$ (B) $R \tan \alpha - \frac{1}{2} \frac{gR^2}{v_0^2}$
 (C) $R \sin \alpha - \frac{1}{2} \frac{gR^2}{v_0^2 \sin^2 \alpha}$ (D) $R \tan \alpha + \frac{1}{2} \frac{gR^2}{v_0^2}$
45. A player kicks up a ball at an angle θ to the horizontal. The horizontal range is maximum when θ equals-
 (A) 30° (B) 45° (C) 60° (D) 90°

- 46.* The angle of projection of a body is 15° . The other angle for which the range is the same as the first one is equal to-
- (A) 30° (B) 45° (C) 60° (D) 75°
47. A particle is projected such that the horizontal range and vertical height are the same. Then the angle of projection is-
- (A) $\pi/4$ (B) $\tan^{-1}(4)$ (C) $\tan^{-1}(1)$ (D) $\pi/3$
48. A ball is thrown at an angle of 45° with the horizontal with kinetic energy E. The kinetic energy at the highest point during the flight is-
- (A) Zero (B) $E/2$ (C) E (D) $(2)^{1/2}E$
49. A ball is thrown with initial energy $100J$ at an angle θ to the horizontal. If its energy at the top becomes $30 J$ then angle of projection-
- (A) $\theta = 45^\circ$ (B) $\theta = 30^\circ$ (C) $\theta = \cos^{-1}(3/10)$. (D) $\theta = \cos^{-1}(3/10)^{1/2}$
50. The horizontal and vertical distances travelled by a particle in time t are given by $x = 6t$ and $y = 8t - 5t^2$. If $g = 10 \text{ m/sec}^2$, then the initial velocity of the particle is-
- (A) 8 m/sec (B) 10 m/sec (C) 5 m/sec (D) zero
51. A body is thrown with a velocity of 9.8 m/s making an angle of 30° with the horizontal. It will hit the ground after a time-
- (A) 3 s (B) 2 s (C) 1.5 s (D) 1 s
52. The maximum range of a projectile is 22 m . When it is thrown at an angle of 15° with the horizontal, its range will be-
- (A) 22 m (B) 6 m (C) 15 m (D) 11 m
53. A boy throws a ball with a velocity v_0 at an angle α to the horizontal. At the same instant he starts running with uniform velocity to catch the ball before it hits the ground. To achieve this, he should run with a velocity of-
- (A) $v_0 \cos \alpha$ (B) $v_0 \sin \alpha$ (C) $v_0 \tan \alpha$ (D) $\sqrt{v_0^2 \tan \alpha}$
54. The maximum range of a gun on a horizontal terrain is 16 km . If $g = 10 \text{ m/sec}^2$, the muzzle velocity of the shell must be-
- (A) 400 m/sec (B) $160 \sqrt{10} \text{ m/sec}$ (C) 1600 m/sec (D) 200 m/sec
55. The range of the particle which is projected at an angle of 15° is 1.5 km . What will be the range for an angle of projection 45° ?
- (A) 0.5 km (B) 1.5 km (C) 2.5 km (D) 3 km
56. A body is projected at an angle θ with horizontal. Another body is projected with the same velocity at an angle θ with the vertical. The ratio of the time of flights is-
- (A) $1:1$ (B) $\tan^2\theta : 1$ (C) $1 : \cot \theta$ (D) $\tan 2\theta : 1$
57. A projectile of mass m is fired with velocity v from the point P at an angle 45° with the horizon. The magnitude of change in momentum when it passes through the point Q on the same horizontal line on which P lies is-
- (A) $mv \sqrt{2}$ (B) $\frac{1}{2}mv$
 (C) Zero (D) $2mv$
58. The kinetic energy of a projectile at the highest point is-
- (A) Zero (B) Maximum
 (C) Minimum (D) Equal to total energy
59. The equation of a projectile is $y = \sqrt{3}x - \frac{gx^2}{2}$. The angle of projection is-
- (A) 30° (B) 60° (C) 45° (D) None
60. The equation of projectile is $y = 16x - \frac{5x^2}{4}$. The horizontal range is-
- (A) 16 m (B) 8 m (C) 3.2 m (D) 12.8 m

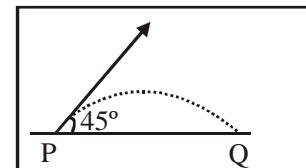


EXERCISE # 2

Choose the correct answer

1. Equation of motion of a body moving along x -axis at an instant t second is given by $x = 40 + 12t - t^2$ m. Displacement of the particle before coming to rest is
 (A) 16 m (B) 56 m (C) 24 m (D) 40 m

2. Velocity-time graph for a particle is shown in figure. Starting from $t = 0$, at what instant t , average acceleration is zero between 0 to t ?

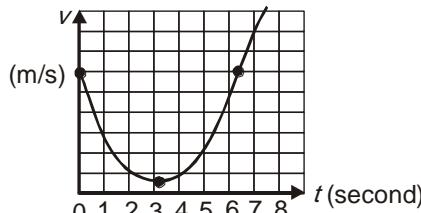


- (A) 1 s (B) 3.5 s (C) 6.3 s (D) 7.3 s
 3. If a particle is thrown with velocity more than 10 m/s vertically upward, then the distance travelled by the particle in last second of its ascent is

(A) g (B) $\frac{g}{2}$ (C) $\frac{g}{4}$ (D) $\frac{g}{8}$

4. A car starts from rest travelling with constant acceleration. If distance covered by it in 10th second of its journey is 19m, what will be the acceleration of car?
 (A) 4 m/s^2 (B) 3 m/s^2 (C) 2 m/s^2 (D) 1 m/s^2

5. A stone is dropped from the top of a tower and travels 24.5 m in the last second of its journey. The height of the tower is
 (A) 44.1 m (B) 49 m (C) 78.4 m (D) 72 m

6. For the velocity ~ time (v ~ t) graph as shown in figure, the incorrect statement is

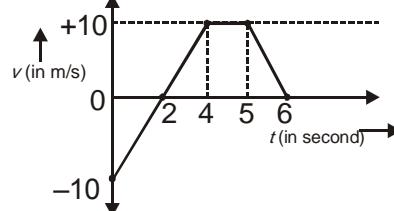

- (A) The average velocity for the entire journey is 2.5 m/s
 (B) The average acceleration from 1 s to 4 s is 5 m/s²
 (C) The average speed for the first 4 s is zero
 (D) The acceleration at $t = 3$ s is 5 m/s²

7. A body moves along curved path of a quarter circle. The ratio of magnitude of displacement to distance is


(A) $\frac{\pi}{2\sqrt{2}}$ (B) $\frac{\pi}{2}$ (C) $\frac{2\sqrt{2}}{\pi}$ (D) $\frac{3\pi}{2\sqrt{2}}$

8. A ball is released from certain height h reaches ground in time T . Where will it be from the ground at time $\frac{3T}{4}$?
 (A) $\frac{9h}{16}$ (B) $\frac{7h}{16}$ (C) $\frac{3h}{4}$ (D) $\frac{27h}{64}$


9. A particle moves along x -axis in such a way that its x -co-ordinate varies with time according to the equation $x = 8 - 4t + 6t^2$. The distance covered by particle between $t = 0$ to $t = \frac{2}{3}$ sec. is

(A) Zero (B) $\frac{8}{3}$ m (C) 8 m (D) $4/3$ m

10. Velocity of a particle changes with position according to following curve. Acceleration of the particle at $x = 1$ m

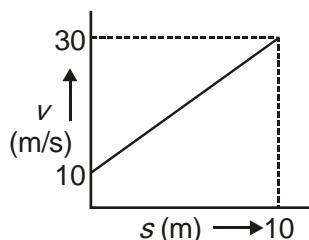


- (A) 24 m/s^2 (B) 2 m/s^2 (C) 20 m/s^2 (D) 3 m/s^2
 11. If acceleration of a particle is varying with x according to curve. Velocity of particle at A is 2 m/s. What is the velocity of particle at point B ?

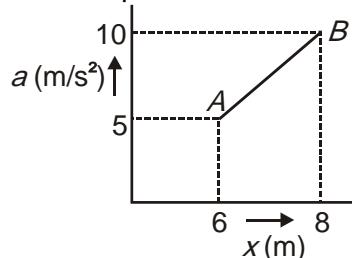

- (A) 4 m/s (B) $\sqrt{34}$ m/s (C) $\sqrt{28}$ m/s (D) 7 m/s
 12. A particle is thrown vertically upward. It is known that distance travelled in 6th second and 7th second is same then
 (A) The particle was thrown with 40 m/s (B) The particle was thrown with 70 m/s
 (C) Total vertical height is 245 m (D) Total vertical height is 180 m
 13. Two cars are moving in the same direction with same speed 30 km/h. They are separated from each other by 5 km. A third car moving in the same direction meets the two cars after an interval of 4 minutes. The speed of the third car is
 (A) 30 km/h (B) 105 km/h (C) 140 km/h (D) 45 km/h
 14. Velocity of particle starting from rest varies with position according to equation $v = \sqrt{\alpha x}$. What is distance travelled by particle in t second from start?
 (A) $\frac{1}{2}\alpha t^2$ (B) $\frac{1}{4}\alpha t^2$ (C) $\frac{1}{3}\alpha t^3$ (D) $\frac{1}{6}\alpha t^3$
 15. If speed of water in river is 4 m/s and speed of swimmer with respect to water is 3 m/s, then in which direction the swimmer must swim so that he will reach directly opposite end?
 (A) 127° with direction of river flow (B) 90° with direction of river flow
 (C) 143° with direction of river flow (D) Swimmer will never reach directly opposite end
 16. Uniform circular motion is not a type of
 (A) Uniform motion (B) Non-uniform motion
 (C) Curvilinear motion (D) Variable accelerated motion
 17. In case of an oblique projectile, the velocity is perpendicular to acceleration
 (A) Once only (B) Twice (C) Never (D) Four times
 18. The area under acceleration-time graph represents the
 (A) Change in velocity (B) Final velocity
 (C) Initial velocity (D) distance travelled
 19. For a given speed of projection, maximum range of a projectile is R . What will be the maximum height attained by projectile when it is projected with double speed by making 60° with vertical?


- (A) $\frac{R}{2}$ (B) $\frac{R}{4}$ (C) R (D) $\frac{3R}{2}$
 20. A particle is projected with velocity $(3\hat{i} + 4\hat{j})$ m/s from horizontal. What will be the height attained by it when velocity becomes perpendicular to acceleration?
 (A) 0.8 m (B) 5 m (C) 0.4 m (D) 1.6 m

21. The speed of a particle moving along a circular path is decreasing at the rate of 3 m/s^2 . If the radius of circle is 4 m, then what will be the instantaneous acceleration of particle when its speed is 4 m/s?
 (A) 4 m/s^2 towards center (B) 3 m/s^2 along tangent
 (C) 5 m/s^2 by making 37° with tangent (D) 5 m/s^2 by taking 53° with tangent
22. The speed of boat is 5 km/h in still water. It crosses a river of width 1 km along shortest possible path in 15 min. The velocity of river water is
 (A) 1 km/h (B) 3 km/h (C) 4 km/h (D) 5 km/h
23. A projectile has a time of flight T and range R . If time of flight is doubled keeping angle of projection same, then what will be the new range?
 (A) R (B) $2R$ (C) $\frac{R}{2}$ (D) $4R$
24. A particle moves along the positive part of the curve $y = \frac{x^2}{2}$, where $x = \frac{t^2}{2}$. What will be velocity of particle at $t = 2 \text{ sec}$.
 (A) $2\hat{i} - 4\hat{j}$ (B) $2\hat{i} + 4\hat{j}$ (C) $4\hat{i} + 2\hat{j}$ (D) $4\hat{i} - 2\hat{j}$
25. Two projectiles A and B are projected with same speed at angles 30° and 60° to horizontal, then choose the wrong statement? (symbols have their usual meaning)
 (A) $R_A = R_B$ (B) $H_B = 3H_A$ (C) $\sqrt{3}T_B = T_A$ (D) All of these
26. A ball B is at 300 cm distance from origin on a line 37° above horizontal. Another ball A is projected directly aiming B with initial velocity 700 cm/s. At the same instant B is released from its position. How far will B has fallen when it is hit by A ?

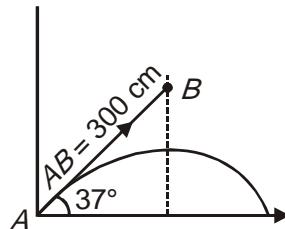


- (A) 90 cm (B) 80 cm (C) 70 cm (D) 60 cm
27. A particle is projected from ground at angle of 60° with horizontal. After one second its velocity is at angle of 45° . After one more second velocity become horizontal. With what speed the particle is projected?
 $(g = 10 \text{ m/s}^2)$
 (A) 10 m/s (B) $\frac{40}{\sqrt{3}} \text{ m/s}$ (C) $10\sqrt{5} \text{ m/s}$ (D) 30 m/s
28. A ball is projected with momentum p at angle θ . What is the change in momentum till it reaches highest point?
 (A) $\frac{p \sin \theta}{2}$ (B) $p \cos \theta$ (C) $p \sin \theta$ (D) $\frac{p \cos \theta}{2}$
29. A particle is projected in such a way that, taking point of projection as origin, $y = 8t - 5t^2$ and $x = 6t$. What is the range of projectile?
 (A) 48 m (B) 4.8 m (C) 9.6 m (D) 24 m
30. A projectile is thrown with an initial velocity $(3\hat{i} + a\hat{j}) \text{ m/s}$. If range of projectile is doubled, the maximum height is reached by it, value of a is
 (A) 1.5 m/s (B) 6 m/s (C) 3 m/s (D) 12 m/s

32. A stone is projected from a horizontal plane. It attains maximum height 'H' and strikes a stationary smooth wall and falls on the ground vertically below the maximum height. Assume the collision to be elastic, the height of the point on the wall where stone will strike is-




- (A) $H/2$ (B) $H/4$ (C) $3H/4$ (D) None of these
32. A ball is projected with velocity u at an angle α with horizontal plane. Its speed when it makes an angle β with the horizontal is -
 (A) $u \cos \alpha$ (B) $\frac{u}{\cos \beta}$ (C) $u \cos \alpha \cos \beta$ (D) $\frac{u \cos \alpha}{\cos \beta}$
33. It was calculated that a shell when fired from a gun with a certain velocity and at an angle of elevation $\frac{5\pi}{36}$ radians should strike a given target. In actual practice it was found that a hill just prevented in the trajectory. At what angle of elevation should the gun be fired to hit the target.
 (A) $\frac{5\pi}{36}$ radians (B) $\frac{11\pi}{36}$ radians (C) $\frac{7\pi}{36}$ radians (D) $\frac{13\pi}{36}$ radian
34. Time taken by the projectile to reach A to B is t. Then the distance AB is equal to -

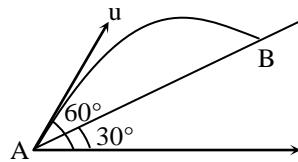


- (A) $\frac{ut}{\sqrt{3}}$ (B) $\frac{\sqrt{3}ut}{2}$ (C) $\sqrt{3}ut$ (D) $2ut$
35. A body is thrown from a point with speed 50 m/s at an angle 37° with horizontal. When it has moved a horizontal distance of 80 m then its distance from point of projection is -
 (A) 40 m (B) $40\sqrt{2}$ m (C) $40\sqrt{5}$ m (D) None
36. A particle moves in the plane xy with velocity $V = k_1 i + k_2 x j$, where i and j are the unit vectors of the x and y axes, and k_1 and k_2 are constants. At the initial moment of time the particle was located at the point $x = y = 0$ then the equation of the particle's trajectory $y(x)$ is -
 (A) $y = \frac{k_1}{2k_2} x^2$ (B) $y = \frac{k_2}{2k_1} x^2$ (C) $y = \frac{2k_1}{k_2} x^2$ (D) $y = \frac{2k_2}{k_1} x^2$

37. A golfer standing on level ground hits a ball with a velocity of $u = 52$ m/s at an angle α above the horizontal. If $\tan \alpha = 5/12$, then the time for which the ball is at least 15m above the ground (i.e. between A and B) will be (take $g = 10$ m/s²) -

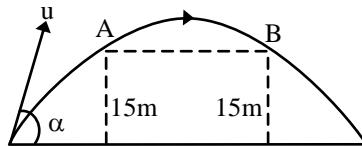

- (A) 1 sec (B) 2 sec (C) 3 sec (D) 4 sec
38. A ball is projected upwards from the top of the tower with a velocity 50 ms⁻¹ making an angle 30° with the horizontal. The height of tower is 70 m. After how many seconds the ball will strike the ground ?
 (A) 3 sec (B) 5 sec (C) 7 sec (D) 9 sec

39. A particle is projected from a point A with velocity $u\sqrt{2}$ at an angle of 45° with horizontal as shown in figure. It strikes the plane BC at right angles. The velocity of the particle at the time of collision is :

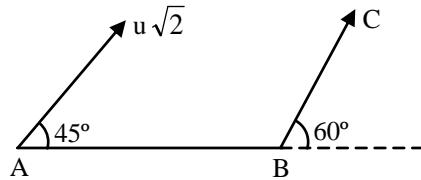

(A) $\frac{\sqrt{3}u}{2}$ (B) $\frac{u}{2}$ (C) $\frac{2u}{\sqrt{3}}$ (D) u

40. A particle is projected from the ground with an initial speed of v at an angle θ with horizontal. The average velocity of the particle between its point of projection and highest point of trajectory is –

(A) $\frac{v}{2}\sqrt{1+2\cos^2\theta}$ (B) $\frac{v}{2}\sqrt{1+\cos^2\theta}$ (C) $\frac{v}{2}\sqrt{1+3\cos^2\theta}$ (D) $v \cos \theta$

EXERCISE-3

IIT & JEE Mains Previous Year Questions

1. From a building two balls A and B are thrown such that A is thrown upwards and B downwards (both vertically) with same velocity. If v_A and v_B are their respective velocities on reaching the ground, then – [AIEEE-2002]
 (A) $v_B > v_A$ (B) $v_A = v_B$
 (C) $v_A > v_B$ (D) Their velocities depends on their masses

2. If a body looses half of its velocity on penetrating 3 cm in a wooden block, then how much will it penetrate more before coming to rest ? [AIEEE-2002]
 (A) 1 cm (B) 2 cm (C) 3 cm (D) 4 cm

3. Speeds of two identical cars are u and $4u$ at a specific instant. The ratio of the respective distance in which the two cars are stopped from that instant by same breaking force is – [AIEEE-2002]
 (A) 1 : 1 (B) 1 : 4 (C) 1 : 8 (D) 1 : 16

4. A ball whose kinetic energy is E, is projected at an angle of 45° to the horizontal. The kinetic energy of the ball at the highest point of its flight will – [AIEEE-2002]
 (A) E (B) $E\sqrt{2}$ (C) $E/2$ (D) Zero

5. A body is moved along a straight line by a machine delivering a constant power. The distance moved by the body in time 't' is proportional to – [AIEEE-2003]
 (A) $t^{3/2}$ (B) $t^{1/4}$ (C) $t^{1/2}$ (D) $t^{3/4}$

6. A car, moving with a speed of 50 km/hr, he can be stopped by brakes after at least 6m. If the same car is moving at a speed of 100 km/hr, the minimum stopping distance is [AIEEE-2003]
 (A) 18 m (B) 24 m (C) 6 m (D) 12 m


7. A boy playing on the roof of a 10 m high building throws a ball with a speed of 10 m/s at an angle of 30° with the horizontal. How far from the throwing point will the ball be at the height of 10m from the ground ? [$g = 10 \text{ m/s}^2$, $\sin 30^\circ = \frac{1}{2}$, $\cos 30^\circ = \sqrt{3}/2$] [AIEEE-2003]
 (A) 4.33 m (B) 2.60 m (C) 8.66 m (D) 5.20 m

8. A particle moves in a straight line with retardation proportional to its displacement. Its loss of kinetic energy for any displacement x is proportional to – [AIEEE-2004]
 (A) x_2 (B) ex (C) x (D) $\log ex$

9. A ball is released from the top of a tower of height h meters. It takes T seconds to reach the ground. What is the position of the ball at $T/3$ second – [AIEEE-2004]
 (A) $h/9$ meters from the ground (B) $7h/9$ meters from the ground
 (C) $8h/9$ meters from the ground (D) $17h/18$ meters from the ground


10. An automobile travelling with a speed of 60 km/h, can brake to stop, within a distance of 20 m. If the car is going twice as fast i.e., 120 km/h, the stopping distance will be – [AIEEE-2004]
 (A) 20 m (B) 40 m (C) 60 m (D) 80 m

11. A projectile can have the same range 'R' for two angles of projection. If ' T_1 ' and ' T_2 ' be the time of flights in the two cases, then the product of the two time of flights is directly proportional to – [AIEEE-2004]
 (A) $1/R^2$ (B) $1/R$ (C) R (D) R^2

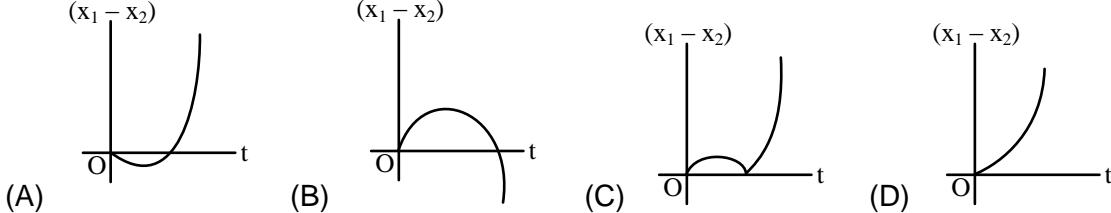12. A ball is thrown from a point with a speed ' v_0 ' at an elevation angle of θ . From the same point and at the same instant, a person starts running with a constant speed ' $v_0/2$ ' to catch the ball. Will the person be able to catch the ball ? If yes, what should be the angle of projection θ ? [AIEEE-2004]
- (A) Yes, 60° (B) Yes, 30° (C) No (D) Yes, 45°
13. A bullet fired into a fixed target loses half of its velocity after penetrating 3 cm. How much further it will penetrate before coming to rest assuming that it faces constant resistance to motion ? [AIEEE-2005]
- (A) 3.0 cm (B) 2.0 cm (C) 1.5 cm (D) 1.0 cm
14. The relation between time t and distance x is $t = ax^2 + bx$ where a and b are constants. The acceleration is [AIEEE-2005]
- (A) $-2abv^2$ (B) $2bv^3$ (C) $-2av^3$ (D) $2av^2$
15. A particle is moving eastwards with a velocity of 5 m/s . In 10 seconds the velocity changes to 5 ms^{-1} northwards. The average acceleration in this time is [AIEEE-2005]
- (A) $\frac{1}{\sqrt{2}}\text{ ms}^{-2}$ towards north-east (B) $\frac{1}{\sqrt{2}}\text{ ms}^{-2}$ towards north
 (C) zero (D) $\frac{1}{\sqrt{2}}\text{ ms}^{-2}$ towards north-west
16. A particle located at $x = 0$ at time $t = 0$, starts moving along the positive x -direction with a velocity ' n ' that varies as $n = a\sqrt{x}$. The displacement of the particle varies with time as [AIEEE 2006]
- (A) $t^{1/2}$ (B) t^3 (C) t^2 (D) t
17. A particle is projected at 60° to the horizontal with a kinetic energy K . The kinetic energy at the highest point is [AIEEE-2007]
- (A) K (B) zero (C) $K/4$ (D) $K/2$
18. A body is at rest at $x = 0$. At $t = 0$, it starts moving in the positive x -direction with a constant acceleration. At the same instant another body passes through $x = 0$ moving in the positive x -direction with a constant speed. The position of the first body is given by $x_1(t)$ after time ' t ' and that of second body by $x_2(t)$ after the same time interval. Which of the following graphs correctly describes $(x_1 - x_2)$ as a function of time ' t ' ? [AIEEE 2008]
- 
- (A) (B) (C) (D)
19. A particle moving with velocity $\vec{v} = K(y\hat{i} + x\hat{j})$, where K is a constant. The general equation for its path is [AIEEE-2010]
- (A) $y = x^2 + \text{constant}$ (B) $y^2 = x + \text{constant}$ (C) $xy = \text{constant}$ (D) $y^2 = x^2 + \text{constant}$

20. A point P moves in counter-clockwise direction on a circular path as shown in the figure. The movement of 'P' is such that it sweeps out a length $s = t^3 + 5$, where s is in metres and t is in seconds. The radius of the path is 20 m. The acceleration of 'P' when $t = 2s$ is nearly.

[AIEEE-2010]

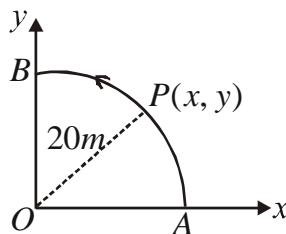

- (A) 14 m/s² (B) 13 m/s² (C) 12 m/s² (D) 7.2 m/s²
21. An object, moving with a speed of 6.25 m/s, is decelerated at a rate given by :

$\frac{dv}{dt} = 2.5\sqrt{v}$ where v is the instantaneous speed. The time taken by the object, to come to rest, would be :

[JEE Mains 2011]

- (A) 2s (B) 4s (C) 8s (D) 1s
22. A water fountain on the ground sprinkles water all around it. If the speed of water coming out of the fountain is v , the total area around the fountain that gets wet is : [JEE Mains 2011]

(A) $\pi \frac{v^4}{g^2}$ (B) $\frac{\pi v^4}{2 g^2}$ (C) $\pi \frac{v^4}{g^2}$ (D) $\pi \frac{v^2}{g}$

23. A boy can throw a stone up to a maximum height of 10 m. The maximum horizontal distance that the boy can throw the same stone up to will be : [JEE Mains 2012]

(A) $20\sqrt{2}$ m (B) 10m (C) $10\sqrt{2}$ m (D) 20m





24. A projectile is given an initial velocity of $(\hat{i} + 2\hat{j})$ m/s, where \hat{i} is along the ground and \hat{j} is along the vertical. If $g = 10$ m/s², the equation of its trajectory is : [JEE Mains 2013]

(A) $y = x - 5x^2$ (B) $y = 2x - 5x^2$ (C) $4y = 2x - 5x^2$ (D) $4y = 2x - 25x^2$

25. From a tower of height H, a particle is thrown vertically upwards with a speed u. The time taken by the particle, to hit the ground, is n times that taken by it to reach the highest point of its path. The relation between H, u and n is : [JEE Mains 2014]

(A) $2gH = n^2 u^2$ (B) $gH = (n-2)^2 u^2$
 (C) $2gH = nu^2 (n-2)$ (D) $gH = (n-2)u^2$

26. All the graphs below are intended to represent the same motion. One of them does it incorrectly. Pick it up. [Main 2018]

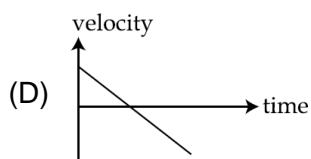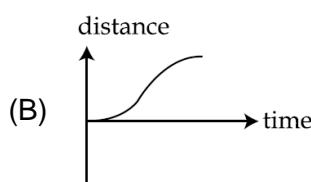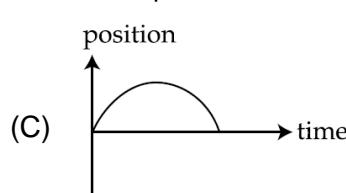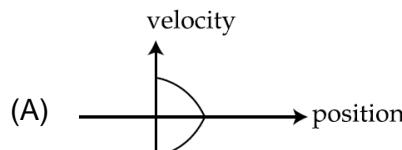


27. The trajectory of a projectile in a vertical plane is $y = ax - bx^2$, where a, b are constant, and x and y are respectively the horizontal and vertical distances of the projectile from the point of projection. The maximum height attained is.....and the angle of projection from the horizontal is.....

[IIT - 1997]

- (A) $a^2/4b, \tan^{-1}a$ (B) $b^2/4a, \tan^{-1}a$ (C) $b^2/4a, \tan^{-1}b$ (D) $a^2/4b, \tan^{-1}b$


28. A particle P is sliding down a frictionless hemispherical bowl. It passes the point A at $t = 0$. At this instant of time, the horizontal component of its velocity is v . A bead Q of the same mass as P is ejected from A at $t = 0$ along the horizontal string AB, with the speed v . Friction between the bead and the string may be neglected. Let t_P and t_Q be the respective times taken by P and Q to reach the point B. Then

[IIT - 1993]

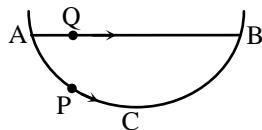

- (A) $t_P < t_Q$ (B) $t_P = t_Q$ (C) $t_P > t_Q$ (D) $\frac{t_P}{t_Q} = \frac{\text{length of arc ACB}}{\text{length of chord AB}}$


29. In 1.0 s, a particle goes from point A to point B, moving in a semicircle of radius 1.0 m (see figure). The magnitude of the average velocity is : [IIT - 1999]

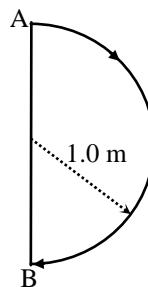

- (A) 3.14 m/s (B) 2.0 m/s (C) 1.0 m/s (D) zero


30. A ball is dropped vertically from a height d above the ground. It hits the ground and bounces up vertically to a height $d/2$. Neglecting subsequent motion and air resistance, its velocity v varies with the height h above the ground as –

[IIT - 2000]

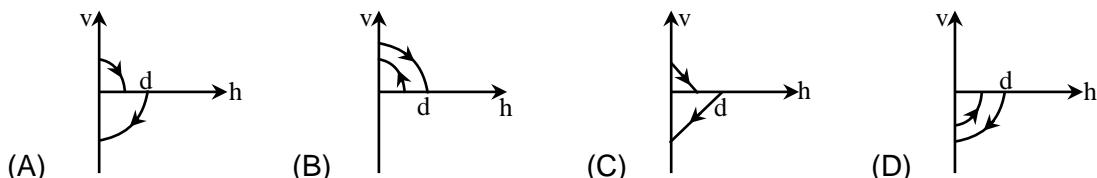

31. At $t = 0$, particle is at rest. Then the maximum speed achieved by particle

[IIT - 2004]





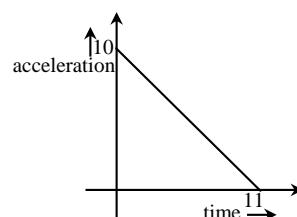


- (A) 110 m/s (B) 650 m/s (C) 55 m/s (D) 550 m/s

32. A block is released from rest at $t = 0$ on a frictionless inclined plane. The distance travelled by the block in t_n sec to t_{n+1} sec is represented by S_n . Then $\frac{S_n}{S_{n+1}}$ is [IIT - 2004]

(A) $\frac{2n+1}{2n-1}$ (B) $\frac{2n-1}{2n+1}$ (C) $\frac{2n}{2n-1}$ (D) $\frac{2n}{(2n+1)}$

33. If graph of velocity vs distance is as shown. The graph of acceleration vs distance is represented by [IIT - 2005]

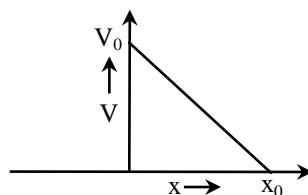

34. STATEMENT - 1 [IIT-2008]

For an observer looking out through the window of a fast moving train, the nearby objects appear to move in the opposite direction to the train, while the distant object appear to be stationary.

STATEMENT - 2

If the observer and the object are moving at velocities v and v' respectively with reference to a laboratory frame, the velocity of object with respect to the observer is .

(A) STATEMENT-1 is True, STATEMENT-2 is True; STATEMENT-2 is a correct explanation for STATEMENT-1

STATEMENT-1

(B) STATEMENT-1 is True, STATEMENT-2 is True; STATEMENT-2 is NOT a correct explanation for STATEMENT-1

(C) STATEMENT-1 is True, STATEMENT-2 is False

(D) STATEMENT-1 is False, STATEMENT-2 is True.

ANSWERS**DPP # 1**

1. (a) 110 m (b) $50 \text{ m}, \tan^{-1} \frac{3}{4}$ north to east
2. 60 m, 20 m in the negative direction
3. (a) 520 km/h (b) 40 km/h (c) 520 km/h Patna to Ranchi
(d) 32.5 km/h Patna to Ranchi
4. 32 km/h (b) zero
5. 2.5 m/s^2
6. 35 m
7. 12 m
8. (a) 2.7 km (b) 60 m/s (c) 225 m and 2.25 km
9. 0.05 s
10. $12.2 \times 105 \text{ m/s}^2$
11. (a) 2.5 m/s (b) 12.5 m
12. 22 m
13. (a) 19 m (b) 22m (c) 33m (d) 39 m (e) 15 m (f) 18 m
(g) 27 m (h) 33 m
14. 1.0 km
15. 2s, 38 m
16. (a) 125 m (b) 5 s (c) 35 m/s
17. 4.3 s
18. (a) 40 m (b) 9.8 m/s (c) No
19. 44.1 m, 19.6 m and 4.9 m below the top
20. 4.9 m/s
21. 2.62 m
22. 48 m
23. 490 m/s^2
24. 20 ft/s^2
25. (a) $v_{t=5 \text{ s}} = 336 \text{ units}, a_{t=5 \text{ s}} = 126 \text{ units}$; (b) $\langle v \rangle = 121 \text{ units}, \langle a \rangle = 66 \text{ units}$

DPP # 2

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
C	A	A	B	B	B	C	C	A	B	B	D	A	D	A
16	17	18	19	20	21									
C	A	A	A	B	A									

DPP # 3

1. (a) 4.5 s (b) 90 m (c) $49 \text{ m/s}, \theta = 66^\circ$ with horizontal
2. (a) 60 m (b) $80\sqrt{3} \text{ m}$
3. Yes
4. 10 m/s
5. 32 ft/s
6. 192 ft
7. Yes, Yes
8. $u \cos\theta$, horizontal in the plane of projection
10. 2m

11. 2m/s
 12. (a) 19.6 m/s upward (b) 24.5 m/s at 53° with horizontal
 13. Sixth
 14. Minimum angle 15° , maximum angle 75° but there is an interval of 53° between 15° and 75° , which is not allowed for successful shot
 15. 4.4 m/s
 16. (a) $v_0 = 667$ ft/s (b) 2667 ft (c) $v_x = 534$ ft/s, $v_y = 560$ ft/s
 17. $\sqrt{g \left[h + \sqrt{h^2 + x^2} \right]}$
 18. (a) $u = 255$ m/s (b) 46 s.
 19. (a) $\theta = 30^\circ$ or 60° , (b) $t_1 = 6$ s, $t_2 = 10.4$ s, (c) 48.2 m
 20. (a) 58.8 m (b) $\sqrt{\frac{2gh}{2 + \cot^2 \theta}}$

DPP # 4

1. (a) 40 s (b) 80 m
 2. (a) $\frac{10 \text{ minute}}{\sin \theta}$ (b) 10 minute
 3. 2/3 km
 4. (a) $\sin^{-1} \left(\frac{1}{15} \right)$ east of the line AB (b) 50 min
 5. $\frac{x}{2} \left(\frac{1}{t_1} + \frac{1}{t_2} \right), \frac{x}{2} \left(\frac{1}{t_1} - \frac{1}{t_2} \right)$
 6. $\frac{x}{\sqrt{v^2 - u^2}}$
 7. 2 a/v.
 8. 5 km/h
 9. (a) 25 m/s or 90 km/hr (b) 20 m/s or 72 km/hr due east (c) 25 m/s or 90 km/hr at 37° N of E
 10. 30° N of W at $5\sqrt{3}$ km/hr. 11. 3 km/hr.
 12. (I) 0.75 km
 (II) (a) $\frac{1}{2\sqrt{3}}$ h (b) $\frac{1}{2\sqrt{3}}$ km.
 13. At an angle 30° west of north.
 14. $50\sqrt{5}$ km
 15. (a) 0, 10 m/s West (b) $10\sqrt{3}$ m/s, 20 m/s
 16. Coming from 5 km/hr, 53° N of E
 17. $(4\hat{i} + 8\hat{j})$ 18. $\frac{a}{v \left(1 - \cos \frac{2\pi}{n} \right)}$
 19. $\frac{10}{\sqrt{2}}, \frac{1}{8}$ hr
 20. 2m/s in a direction making an angle of 60° with E, 45° with N and 60° with the vertical

EXERCISE # 1

1. (C)	2. (A)	3. (D)	4. (B)	5. (A)
6. (C)	7. (B)	8. (B)	9. (A)	10. (C)
11. (C)	12. (D)	13. (D)	14. (B)	15. (A)
16. (C)	17. (A)	18. (D)	19. (C)	20. (B)
21. (D)	22. (A)	23. (D)	24. (B)	25. (D)
26. (D)	27. (C)	28. (C)	29. (C)	30. (A)
31. (C)	32. (D)	33. (C)	34. (A)	35. (B)
36. (C)	37. (C)	38. (B)	39. (A)	40. (B)
41. (B)	42. (D)	43. (A)	44. (A)	45. (B)
46. (D)	47. (B)	48. (B)	49. (D)	50. (B)
51. (D)	52. (D)	53. (A)	54. (A)	55. (D)
56. (C)	57. (A)	58. (C)	59. (B)	60. (D)

EXERCISE # 2

1. (A)	2. (C)	3. (B)	4. (C)	5. (A)
6. (C)	7. (C)	8. (B)	9. (D)	10. (A)
11. (B)	12. (D)	13. (B)	14. (B)	15. (D)
16. (A)	17. (A)	18. (A)	19. (A)	20. (A)
21. (D)	22. (B)	23. (D)	24. (B)	25. (C)
26. (A)	27. (B)	28. (C)	29. (C)	30. (B)
31. (C)	32. (D)	33. (D)	34. (A)	35. (C)
36. (B)	37. (B)	38. (C)	39. (C)	40. (C)

EXERCISE-3

1. (B)	2. (A)	3. (D)	4. (C)	5. (A)
6. (B)	7. (C)	8. (A)	9. (C)	10. (D)
11. (C)	12. (A)	13. (D)	14. (C)	15. (D)
16. (C)	17. (C)	18. (A)	19. (D)	20. (A)
21. (A)	22. (A)	23. (D)	24. (B)	25. (C)
26. (B)	27. (A)	28. (A)	29. (B)	30. (A)
31. (C)	32. (B)	33. (B)	34. (B)	

1. FORCE

A pull or push which changes or tends to change the state of rest or of uniform motion or direction of motion of any object is called force. Force is the interaction between the object and the source (providing the pull or push). It is a vector quantity.

Effect of resultant force :

- may change only speed
- may change only direction of motion.
- may change both the speed and direction of motion.
- may change size and shape of a body

unit of force : newton and $\frac{\text{kg.m}}{\text{s}^2}$ (MKS System)

dyne and $\frac{\text{g.cm}}{\text{s}^2}$ (CGS System)

1 newton = 10^5 dyne


Kilogram force (kgf)

The force with which earth attracts a 1 kg body towards its centre is called kilogram force, thus

$$\text{kgf} = \frac{\text{Force in newton}}{\text{g}}$$

Dimensional Formula of force : $[\text{MLT}^{-2}]$

- For full information of force we require
 - Magnitude of force
 - direction of force
 - point of application of the force

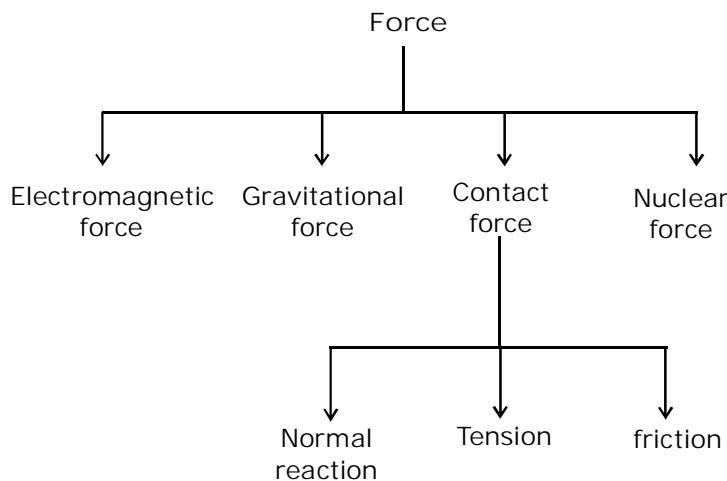

1.1 Electromagnetic Force

Force exerted by one particle on the other because of the electric charge on the particles is called electromagnetic force.

Following are the main characteristics of electromagnetic force

- These can be attractive or repulsive
- These are long range forces
- These depend on the nature of medium between the charged particles.
- All macroscopic force (except gravitational) which we experience as push or pull or by contact are electromagnetic, i.e., tension in a rope, the force of friction, normal reaction, muscular force, and force experienced by a deformed spring are electromagnetic forces. These are manifestations of the electromagnetic attractions and repulsions between atoms/molecules.

1.2 Gravitational force :

It acts between any two masses kept anywhere in the universe. It follows inverse square rule ($F \propto \frac{1}{\text{distance}^2}$) and is attractive in nature.

$$F = \frac{GM_1 M_2}{R^2}$$

The force mg , which Earth applies on the bodies, is gravitational force.

1.3 Nuclear force :


It is the strongest force. It keeps nucleons (neutrons and protons) together inside the nucleus inspite of large electric repulsion between protons. Radioactivity, fission, and fusion, etc. result because of unbalancing of nuclear forces. It acts within the nucleus that too upto a very small distance.

1.4 Contact force :


Forces which are transmitted between bodies by short range atomic molecular interactions are called contact forces. When two objects come in contact they exert contact forces on each other.

1.4.1 Normal force (N) :


It is the component of contact force perpendicular to the surface. It measures how strongly the surfaces in contact are pressed against each other. It is the electromagnetic force. A table is placed on Earth as shown in figure.




- Here table presses the earth so normal force exerted by four legs of table on earth are as shown in figure.




- Now a boy pushes a block kept on a frictionless surface.




Here, force exerted by boy on block is electromagnetic interaction which arises due to similar charges appearing on finger and contact surface of block, it is normal force.



- A block is kept on inclined surface. Component of its weight presses the surface perpendicularly due to which contact force acts between surface and block.



Normal force exerted by block on the surface of inclined plane is shown in figure.




Force acts perpendicular to the surface



:


- Normal force acts in such a fashion that it tries to compress the body
- Normal is a dependent force, it comes in role when one surface presses the other.

Ex.1 Two blocks are kept in contact on a smooth surface as shown in figure. Draw normal force exerted by A on B.




Sol. In above problem, block A does not push block B, so there is no molecular interaction between A and B. Hence normal force exerted by A on B is zero.

Ex.2 Draw normal forces on the massive rod at point 1 and 2 as shown in figure.



Sol. Normal force acts perpendicular to extended surface at point of contact.



Ex.3 Two blocks are kept in contact as shown in figure. Find
 (a) forces exerted by surfaces (floor and wall) on blocks
 (b) contact force between two blocks.



Sol. F.B.D. of 10 kg block

$$N_1 = 10 g = 100 \text{ N}$$

$$N_2 = 100 \text{ N}$$

...(1)

...(2)

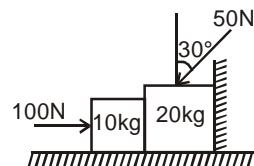

F.B.D. of 20 kg block


$$N_2 = 50 \sin 30^\circ + N_3$$

$$\therefore N_3 = 100 - 25 = 75 \text{ N}$$


and $N_4 = 50 \cos 30^\circ + 20 g$

$$N_4 = 243.30 \text{ N}$$

...(3)




Ex.4




Find out the normal reaction at point A and B if the mass of sphere is 10 kg.


Sol.

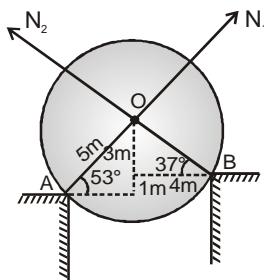

Now F.B.D.

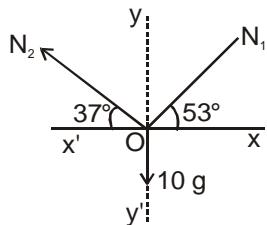

Now resolve the forces along x & y direction

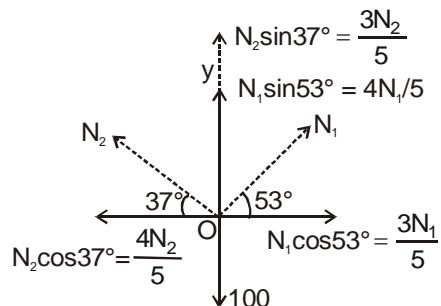

\therefore The body is in equilibrium so equate the force in x & y direction

$$\text{In x-direction } \frac{3N_1}{5} = \frac{4N_2}{5} \quad \dots(1)$$


$$\text{In y-direction } \frac{3N_2}{5} + \frac{4N_1}{5} = 100 \quad \dots(2)$$

after solving above equation

$$N_1 = 80 \text{ N}, N_2 = 60 \text{ N}$$

1.4.2 Tension :

Tension in a string is an electromagnetic force. It arises when a string is pulled. If a massless string is not pulled, tension in it is zero. A string suspended by rigid support is pulled by a force 'F' as shown in figure, for calculating the tension at point 'A' we draw F.B.D. of marked portion of the string; Here string is massless.

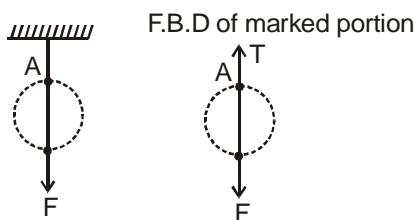


$$\Rightarrow T = F$$

String is considered to be made of a number of small segments which attracts each other due to electromagnetic nature. The attraction force between two segments is equal and opposite due to newton's third law.


Conclusion :

$$T = mg$$


- (i) Tension always acts along the string and in such a direction that it tries to reduce the length of string
- (ii) If the string is massless then the tension will be same along the string but if the string have some mass then the tension will continuously change along the string.




Ex.5 The system shown in figure is in equilibrium. Find the magnitude of tension in each string ; T_1 , T_2 , T_3 and T_4 . ($g = 10 \text{ m/s}^{-2}$)



Sol. F.B.D. of block 10 kg



F.B.D. of point 'A'



$$\sum F_y = 0 \\ T_2 \cos 30^\circ = T_0 = 100 \text{ N}$$

$$T_2 = \frac{200}{\sqrt{3}} \text{ N}$$


$$\sum F_x = 0$$

$$T_1 = T_2 \sin 30^\circ = \frac{200}{\sqrt{3}} \cdot \frac{1}{2} = \frac{100}{\sqrt{3}} \text{ N}$$

F.B.D of point of 'B'

$$\begin{aligned} \sum F_y &= 0 \Rightarrow T_4 \cos 60^\circ = T_2 \cos 30^\circ \\ \text{and } \sum F_x &= 0 \Rightarrow T_3 + T_2 \sin 30^\circ = T_4 \sin 60^\circ \end{aligned}$$

$$\therefore T_3 = \frac{200}{\sqrt{3}} \text{ N}, T_4 = 200 \text{ N}$$



1.4.3 Frictional force :

It is the component of contact force tangential to the surface. It opposes the relative motion (or attempted relative motion) of the two surfaces in contact. (which is explained later)

2. NEWTON'S FIRST LAW OF MOTION :

According to this law "A system will remain in its state of rest or of uniform motion unless a net external force act on it.

1st law can also be stated as "If the net external force acting on a body is zero, only then the body remains at rest."

- The word external means external to the system (object under observation), interactions within the system has not to be considered.
- The word net means the resultant of all the forces acting on the system.
- Newton's first law is nothing but Galileo's law of inertia.
- Inertia means inability of a body to change its state of motion or rest by itself.
- The property of a body that determines its resistance to a change in its motion is its mass (inertia). Greater the mass, greater the inertia.
- An external force is needed to set the system into motion, but no external force is needed to keep a body moving with constant velocity in its uniform motion.
- Newton's laws of motion are valid only in a set of frame of references, these frames of reference are known as inertial frames of reference.
- Generally, we take earth as an inertial frame of reference, but strictly speaking it is not an inertial frame.
- All frames moving uniformly with respect to an inertial frame are themselves inertial.
- We take all frames at rest or moving uniformly with respect to earth, as inertial frames.

3. NEWTON'S SECOND LAW OF MOTION :

Newton's second law states, "The rate of change of a momentum of a body is directly proportional to the applied force and takes place in the direction in which the force acts"

$$\text{i.e., } \vec{F} \propto \frac{d\vec{p}}{dt} \text{ or } \vec{F} = k \frac{d\vec{p}}{dt}$$

where k is a constant of proportionality.

$$\vec{p} = m\vec{v}, \text{ So } \vec{F} = k \frac{(dm\vec{v})}{dt}$$

For a body having constant mass,

$$\Rightarrow \vec{F} = km \frac{d\vec{v}}{dt} = m\vec{a}$$

From experiments, the value of k is found to be 1.

$$\text{So, } \vec{F}_{\text{net}} = m\vec{a}$$

- Force can't change the momentum along a direction normal to it, i.e., the component of velocity normal to the force doesn't change.
- Newton's 2nd law is strictly applicable to a single point particle. In case of rigid bodies or system of particles or system of rigid bodies, \vec{F} refers to total external force acting on system and \vec{a} refers to acceleration of centre of mass of the system. The internal forces, if any, in the system are not to be included in \vec{F} .
- Acceleration of a particle at any instant and at a particular location is determined by the force (net) acting on the particle at the same instant and at same location and is not in any way depending on the history of the motion of the particle.

PROBLEM SOLVING STRATEGY :

Newton's laws refer to a particle and relate the forces acting on the particle to its mass and to its acceleration. But before writing any equation from Newton's law, you should be careful about which particle you are considering. The laws are applicable to an extended body too which is nothing but collection of a large number of particles.

Follow the steps given below in writing the equations :

Step 1 : Select the body

The first step is to decide the body on which the laws of motion are to be applied. The body may be a single particle, an extended body like a block, a combination of two blocks-one kept over another or connected by a string. The only condition is that all the parts of the body or system must have the same acceleration.


Step 2 : Identify the forces

Once the system is decided, list down all the force acting on the system due to all the objects in the environment such as inclined planes, strings, springs etc. However, any force applied by the system shouldn't be included in the list. You should also be clear about the nature and direction of these forces.

Step 3 : Make a Free-body diagram (FBD)

Make a separate diagram representing the body by a point and draw vectors representing the forces acting on the body with this point as the common origin.

This is called a free-body diagram of the body.

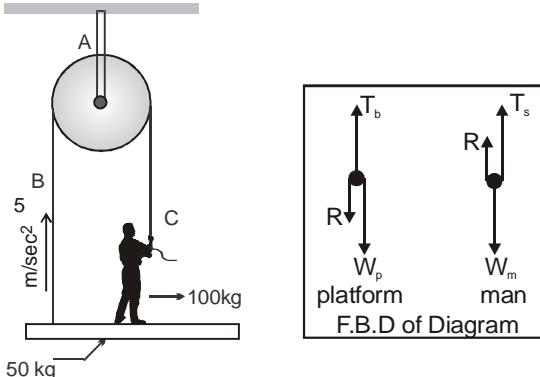

Look at the adjoining free-body diagrams for the platform and the man. Note that the force applied by the man on the rope hasn't been included in the FBD.

Once you get enough practice, you'd be able to identify and draw forces in the main diagram itself instead of making a separate one

Step 4 : Select axes and Write equations

When the body is in equilibrium then choose the axis in such a fashion that maximum number of force lie along the axis.

If the body is moving with some acceleration then first find out the direction of real acceleration and choose the axis one is along the real acceleration direction and other perpendicular to it.


Write the equations according to the newton's second law ($F_{net} = ma$) in the corresponding axis.

4. APPLICATIONS :**4.1 Motion of a Block on a Horizontal Smooth Surface.**

Case (i) : When subjected to a horizontal pull :


The distribution of forces on the body are shown. As there is no motion along vertical direction, hence, $R = mg$

For horizontal motion $F = ma$ or $a = F/m$



Case (ii) : When subjected to a pull acting at an angle (θ) to the horizontal :

Now F has to be resolved into two components, $F \cos\theta$ along the horizontal and $F \sin\theta$ along the vertical direction.

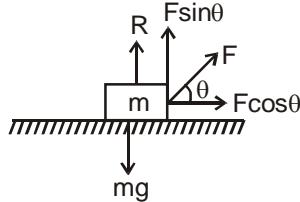

For no motion along the vertical direction.

we have $R + F \sin \theta = mg$
 or $R = mg - F \sin \theta$

 : Hence $R \neq mg$. $R < mg$

For horizontal motion

$$F \cos \theta = ma, a = \frac{F \cos \theta}{m}$$

Case (iii) : When the block is subjected to a push acting at an angle θ to the horizontal : (down ward)


The force equation in this case

$$R = mg + F \sin \theta$$

 : $R \neq mg$, $R > mg$

For horizontal motion


$$F \cos \theta = ma, a = \frac{F \cos \theta}{m}$$

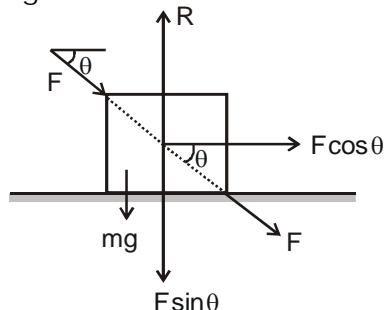

4.2 Motion of bodies in contact.

Case (i) : Two body system :

Let a force F be applied on mass m ,

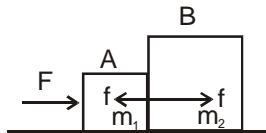

Free body diagrams :


(vertical force do not cause motion, hence they have not been shown in diagram)

$$\Rightarrow a = \frac{F}{m_1 + m_2} \text{ and } f = \frac{m_2 F}{m_1 + m_2}$$

(i) Here f is known as force of contact.

(ii) Acceleration of system can be found simply by


$$a = \frac{\text{force}}{\text{total mass}}$$

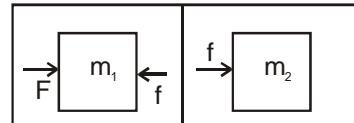

 : If force F be applied on m_2 , the acceleration will remain the same, but the force of contact will be different

$$\text{i.e., } f' = \frac{m_1 F}{m_1 + m_2}$$

Ex.6 Find the contact force between the 3 kg and 2kg block as shown in figure.



Sol. Considering both blocks as a system to find the common acceleration


$$F_{\text{net}} = F_1 - F_2 = 100 - 25 = 75 \text{ N}$$

common acceleration


$$a = \frac{F_{\text{net}}}{m} = \frac{75}{5} = 15 \text{ m/s}^2$$

To find the contact force between A & B we draw F.B.D of 2 kg block

from $(\sum F_{\text{net}})_x = ma_x$
 $\Rightarrow N - 25 = (2)(15)$
 $\Rightarrow N = 55 \text{ N}$

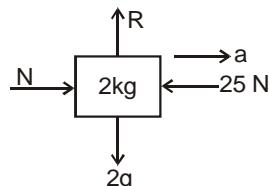

Case (ii) : Three body system :

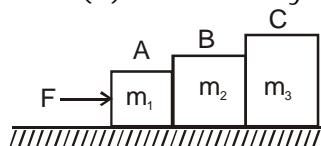

Free body diagrams :

$$\Rightarrow a = \frac{F}{m_1 + m_2 + m_3}$$

and $f_1 = \frac{(m_2 + m_3)F}{(m_1 + m_2 + m_3)}$

$$f_2 = \frac{m_3 F}{(m_1 + m_2 + m_3)}$$


f_1 = contact force between masses m_1 and m_2

f_2 = contact force between masses m_2 and m_3

Remember : Contact forces will be different if force F will be applied on mass C

For A	For B	For C
$F - f_1 = m_1 a$	$f_1 - f_2 = m_2 a$	$f_2 = m_3 a$
f_1	f_2	

Ex.7 Find the contact force between the block and acceleration of the blocks as shown in figure.

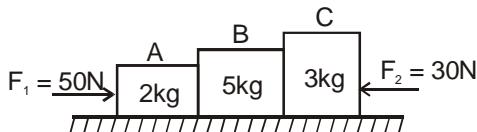


Sol. Considering all the three block as a system to find the common acceleration

$$F_{\text{net}} = 50 - 30 = 20 \text{ N}$$

$$a = \frac{20}{10} = 2 \text{ m/s}^2$$

To find the contact force between B & C we draw F.B.D. of 3 kg block.




$$(\sum F_{\text{net}})_x = ma$$

$$\Rightarrow N_1 - 30 = 3(2) \Rightarrow N_1 = 36 \text{ N}$$

To find contact force between A & B we draw F.B.D. of 5 kg block

$$\Rightarrow N_2 - N_1 = 5a$$


$$N_2 = 5 \times 2 + 36 \Rightarrow N_2 = 46 \text{ N}$$

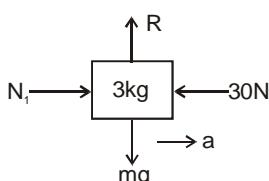

4.3 Motion of connected Bodies

Case (i) For Two Bodies :

F is the pull on body A of mass m_1 . The pull of A on B is exercised as tension through the string connecting A and B. The value of tension throughout the string is T only.

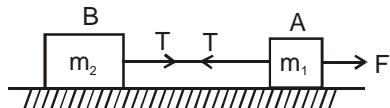


Free body diagrams :

For body A	For body B
 $R_1 = m_1 g$ $F - T = m_1 a$	 $R_2 = m_2 g$ $T = m_2 a$

$$\Rightarrow \quad a = \frac{F}{m_1 + m_2}$$

Case (ii) : For Three bodies :

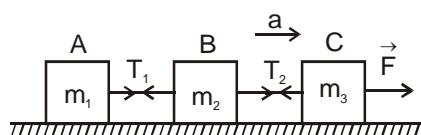


Free body diagrams :

For A	For B	For C
 $R_1 = m_1 g$ $T_1 = m_1 a$	 $R_2 = m_2 g$ $T_2 - T_1 = m_2 a$ $\Rightarrow T_2 = m_2 a + T_1$ $T_2 = (m_2 + m_1)a$	 $R_3 = m_3 g$ $F - T_2 = m_3 a$ $\Rightarrow F = m_3 a + T_2$ $= m_3 a + (m_1 + m_2)a$ $F = (m_1 + m_2 + m_3)a$


$$\Rightarrow \quad a = \frac{F}{m_1 + m_2 + m_3}$$

- Ex.8 A 5 kg block has a rope of mass 2 kg attached to its underside and a 3 kg block is suspended from the other end of the rope. The whole system is accelerated upward is 2 m/s^2 by an external force F_0 .



- (a) What is F_0 ?
 - (b) What is the force on rope?
 - (c) What is the tension at middle point of the rope?
- (g = 10 m/s^2)

Sol. For calculating the value of F_0 , consider two blocks with the rope as a system.
F.B.D. of whole system

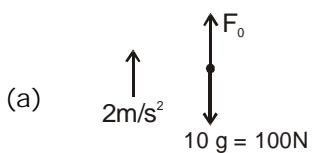

$$F_0 - 100 = 10 \times 2$$


$$F = 120 \text{ N} \quad \dots(1)$$

- (b) According to Newton's second law, net force on rope.

$$F = ma = (2)(2) = 4 \text{ N} \quad \dots(2)$$

- (c) For calculating tension at the middle point we draw F.B.D. of 3 kg block with half of the rope (mass 1 kg) as shown.


$$T - 4g = 4 \cdot (2) = 48 \text{ N}$$




4.4 Motion of a body on a smooth inclined plane :

Natural acceleration down the plane = $g \sin \theta$

Driving force for acceleration a up the plane, $F = m(a + g \sin \theta)$
and for an acceleration a down the plane, $F = m(a - g \sin \theta)$

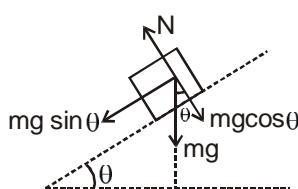


- Ex.9 Find out the contact force between the 2kg & 4kg block as shown in figure.




- Sol. On an incline plane acceleration of the block is independent of mass. So both the blocks will move with the same acceleration ($g \sin 37^\circ$) so the contact force between them is zero.


Ex.10 Find out the contact force between 2kg & 3kg block placed on the incline plane as shown in figure.



Sol. Considering both the block as a 5kg system because both will move the same acceleration.



Now show forces on the 5 kg block



\therefore Acceleration of 5kg block is down the incline.
So choose one axis down the incline and other perpendicular to it

From Newton's second Law

$$N = 5g \cos 37^\circ \quad \dots \text{(i)}$$

$$5g \sin 37^\circ - 20 = 5a \quad \dots \text{(ii)}$$



$$30 - 20 = 5a$$

$$a = 2 \text{m/s}^2 \text{ (down the incline)}$$

For contact force (N_1) between 2kg & 3kg block
we draw F.B.D. of 3kg block

From

$$\begin{aligned} F_{\text{net}} &= ma \\ \Rightarrow 3g \sin 37^\circ - N_1 &= 3 \times 2 \\ 18 - N_1 &= 6 \\ N_1 &= 12 \text{ N} \end{aligned}$$

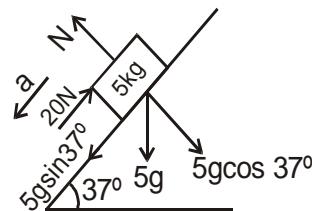

4.5 Pulley block system :

Ex.11 One end of string which passes through pulley and connected to 10 kg mass at other end is pulled by 100 N force. Find out the acceleration of 10 kg mass. ($g = 9.8 \text{ m/s}^2$)

Sol. Since string is pulled by 100N force.


So tension in the string is 100 N.

F.B.D. of 10 kg block


$$100 - 10 g = 10 a$$

$$100 - 10 \times 9.8 = 10 a$$

$$a = 0.2 \text{ m/s}^2$$

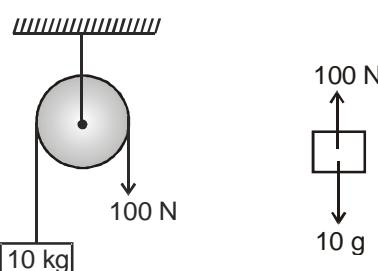

Ex.12 In the figure shown, find out acceleration of each block.

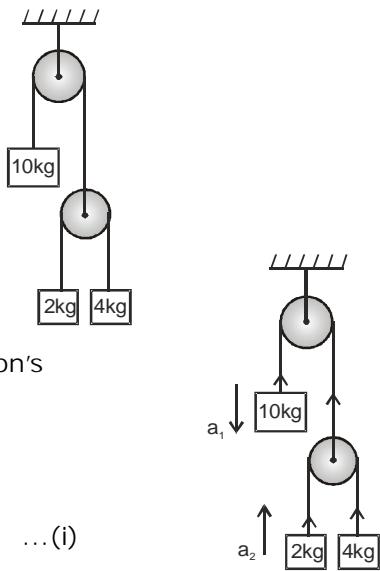

Sol. Now F.B.D. of each block and apply Newton's second law on each F.B.D

$$(1) \quad \begin{array}{c} \text{10 kg} \\ \uparrow 2T \\ \downarrow a_1 \\ \downarrow 10g \end{array} \Rightarrow 10g - 2T = 10a_1 \quad \dots(1)$$

$$(2) \quad \begin{array}{c} \text{2kg} \\ \uparrow T \\ \uparrow a_2 \\ \downarrow 2g \end{array} \Rightarrow T - 2g = 2a_2 \quad \dots(2)$$

$$(3) \quad \begin{array}{c} \text{4kg} \\ \uparrow T \\ \uparrow a_3 \\ \downarrow 4g \end{array} \Rightarrow T - 4g = 4a_3 \quad \dots(3)$$


from constrain relation $2a_1 = a_2 + a_3 \quad \dots(4)$

Solving equations (1), (2), (3) and (4) we get

$$T = \frac{800}{23} \text{ N}$$

$$a_1 = 70/23 \text{ m/s}^2 \text{ (downward)}, \quad a_2 = 170/23 \text{ m/s}^2 \text{ (upward)}, \quad a_3 = 30/23 \text{ m/s}^2 \text{ (downward)}$$

Ex.13 Find the acceleration of each block in the figure shown below; in terms of their masses m_1 , m_2 and g . Neglect any friction.

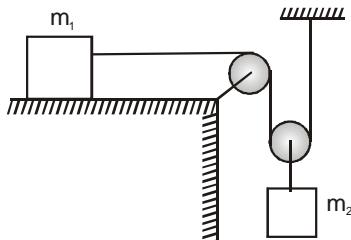

Sol. Let T be the tension in the string that is assumed to be massless.

For mass m_1 , the FBD shows that

$$N_1 = m_1 g$$

Where N_1 is the force applied upward by plane on the mass m_1 .

If acceleration of m_1 along horizontal is a_1 . then

$$T = m_1 a_1 \quad \dots (i)$$

For mass m_2 , the FBD shows that

$$m_2 g - 2T = m_2 a_2 \quad \dots (ii)$$

Where a_2 is vertical acceleration of mass m_2 .

Note that upward tension on m_2 is $2T$ applied by both sides of the string.

from constrain relation



$$a_2 = \frac{a_1}{2}$$

Thus, the acceleration of m_1 its twice that of m_2 .

with this input, solving (i) and (ii) we find


$$a_1 = \frac{2m_2 g}{4m_1 + m_2}$$

$$a_2 = \frac{m_2 g}{4m_1 + m_2}$$

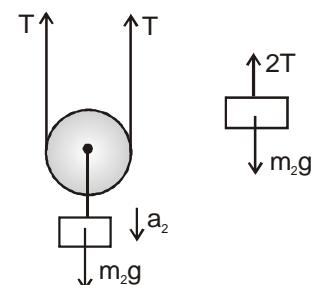


Ex.14 Two blocks A and B each having a mass of 20 kg, rest on frictionless surfaces as shown in the figure below. Assuming the pulleys to be light and frictionless, compute :

- (a) the time required for block A, to move down by 2m on the plane, starting from rest,
- (b) tension in the string, connecting the blocks.

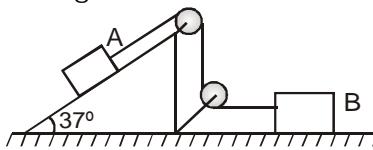


Sol.

Step 1. Draw the FBDs for both the blocks. If tension in the string is T , then we have

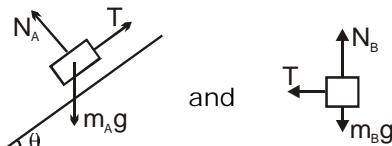

Note that $m_A g$, should better be resolved along and perpendicular to the plane, as the block A is moving along the plane.

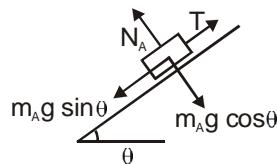

Step 2. From FBDs, we write the force equations '

for block A where

$$N_A = m_A g \cos \theta = 20 \times 10 \times 0.8 = 160 \text{ N}$$

$$\text{and } m_A g \sin \theta - T = m_A a \quad \dots (i)$$

Where ' a ' is acceleration of masses of blocks A and B.

Similarly, force equations for block B are

$$N_B = m_B g = 20 \times 10 = 200 \text{ N}$$

$$\text{and } T = m_B a \quad \dots (ii)$$

From (i) and (ii), we obtain

$$a = \frac{m_A g \sin \theta}{m_A + m_B} = \frac{20 \times 10 \times 0.6}{40} = 3 \text{ ms}^{-2}$$

$$T = m_B a = 20 \times 3 = 60 \text{ N}$$

Step 3. With constant acceleration $a = 3 \text{ ms}^{-2}$, the block A moves down the inclined plane a distance $S = 2 \text{ m}$ in time t given by

$$S = \frac{1}{2}at^2 \text{ or } t = \sqrt{\frac{2S}{a}} = \frac{2}{\sqrt{3}} \text{ seconds.}$$

Ex.15 Two blocks m_1 and m_2 are placed on a smooth inclined plane as shown in figure. If they are released from rest.

Find :

- (i) acceleration of mass m_1 and m_2
- (ii) tension in the string
- (iii) net force on pulley exerted by string

Sol. F.B.D of m_1 :

$$m_1 g \sin \theta - T = m_1 a$$

$$\frac{\sqrt{3}}{2}g - T = \sqrt{3}a \quad \dots (\text{i})$$

F.B.D. of m_2 :

$$T - m_2 g \sin \theta = m_2 a$$

$$T - 1 \cdot \frac{\sqrt{3}}{2}g = 1.a \quad \dots (\text{ii})$$




Adding eq. (i) and (ii) we get $a = 0$
Putting this value in eq. (i) we get

$$T = \frac{\sqrt{3}g}{2},$$

F.B.D. of pulley

$$F_R = \sqrt{2}T$$

$$F_R = \sqrt{\frac{3}{2}}g$$

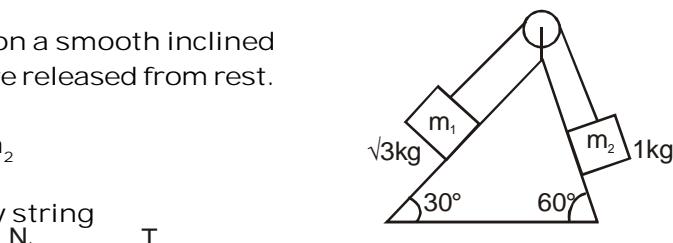

5. NEWTONS' 3RD LAW OF MOTION :

Statement : "To every action there is equal and opposite reaction".

But what is the meaning of action and reaction and which force is action and which force is reaction?


Every force that acts on body is due to the other bodies in environment. Suppose that a body A experiences a force \vec{F}_{AB} due to other body B. Also body B will experience a force \vec{F}_{BA} due to A. According to Newton third law two forces are equal in magnitude and opposite in direction Mathematically we write it as

$$\vec{F}_{AB} = -\vec{F}_{BA}$$

Here we can take either \vec{F}_{AB} or \vec{F}_{BA} as action force and other will be the reaction force.


-  : (i) Action-Reaction pair acts on two different bodies.
(ii) Magnitude of force is same.
(iii) Direction of forces are in opposite direction.
(iv) For action-reaction pair there is no need of contact

Ex.16 A block of mass 'm' is kept on the ground as shown in figure.




- (i) Draw F.B.D. of block
(ii) Are forces acting on block action - reaction pair
(iii) If answer is no, draw action reaction pair.

Sol. (i) F.B.D. of block

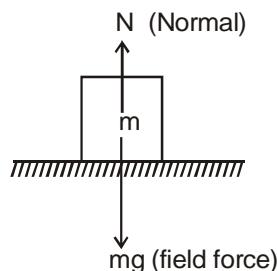


(ii) 'N' and Mg are not action - reaction pair. Since pair act on different bodies, and they are of same nature.


(iii) Pair of 'mg' of block acts on earth in opposite direction.

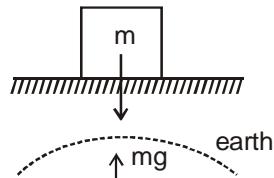

and pair of 'N' acts on surface as shown in figure.



5.1 Climbing on the Rope :

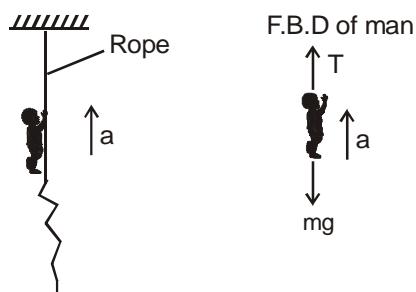

Now three condition arises.

- if $T > mg \Rightarrow$ man accelerates in upward direction
 $T < mg \Rightarrow$ man accelerates in downward direction
 $T = mg \Rightarrow$ man's acceleration is zero


* Either climbing or descending on the rope man exerts force downward

Ex.17 If the breaking strength of string is 600N then find out the maximum acceleration of the man with which he can climb up the road


Sol. Maximum force that can be exerted on the man by the rope is 600 N.

F.B.D of man

$$\Rightarrow 600 - 50g = 50a \\ a_{\max} = 2 \text{ m/s}^2$$

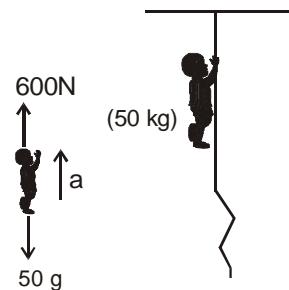

Ex.18 A 60 kg painter on a 15 kg platform. A rope attached to the platform and passing over an overhead pulley allows the painter to raise himself along with the platform.



- (i) To get started, he pulls the rope down with a force of 400 N. Find the acceleration of the platform as well as that of the painter.
- (ii) What force must he exert on the rope so as to attain an upward speed of 1 m/s in 1 s?
- (iii) What force should apply now to maintain the constant speed of 1 m/s?

Sol. The free body diagram of the painter and the platform as a system can be drawn as shown in the figure. Note that the tension in the string is equal to the force by which he pulls the rope.

(i) Applying Newton's Second Law


$$2T - (M+m)g = (M+m)a$$

$$\text{or } a = \frac{2T - (M+m)g}{M+m}$$

Here $M = 60 \text{ kg}$; $m = 15 \text{ kg}$; $T = 400 \text{ N}$

$$g = 10 \text{ m/s}^2$$

$$a = \frac{2(400) - (60+15)(10)}{60+15} = 0.67 \text{ m/s}^2$$



- (ii) To attain a speed of 1 m/s in one second the acceleration a must be 1 m/s^2
Thus, the applied force is

$$F = \frac{1}{2}(M+m)(g+a) = (60+15)(10+1) = 412.5 \text{ N}$$

(iii) When the painter and the platform move (upward) together with a constant speed, it is in a state of dynamic equilibrium


Thus, $2F - (M+m)g = 0$

$$\text{or } F = \frac{(M+m)g}{2} = \frac{(60+15)(10)}{2} = 375 \text{ N}$$

6. SPRING FORCE :


Every spring resists any attempt to change its length; when it is compressed or extended, it exerts force at its ends. The force exerted by a spring is given by $F = -kx$, where x is the change in length and k is the stiffness constant or spring constant (unit Nm^{-1})

When spring is in its natural length, spring force is zero.

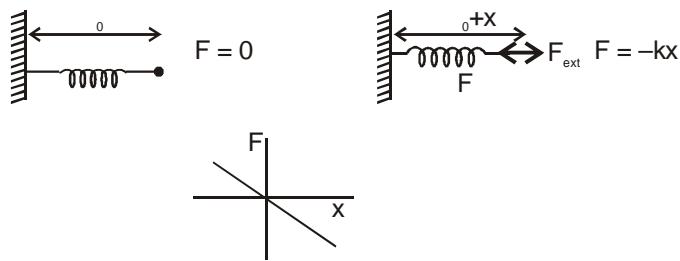


Graph between spring force v/s x

Ex.19 Two blocks are connected by a spring of natural length 2 m. The force constant of spring is 200 N/m. Find spring force in following situations.

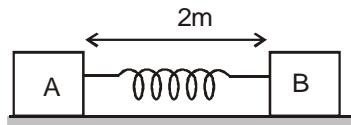

- Sol.
- (a) If block 'A' and 'B' both are displaced by 0.5 m in same direction.
 - (b) If block 'A' and 'B' both are displaced by 0.5 m in opposite direction.
- (a) Since both blocks are displaced by 0.5 m in same direction, so change in length of spring is zero. Hence, spring force is zero.
 (b) In this case, change in length of spring is 1 m. So spring force is $F = -Kx$
 $= -(200) \cdot (1)$
 $F = -200 \text{ N}$

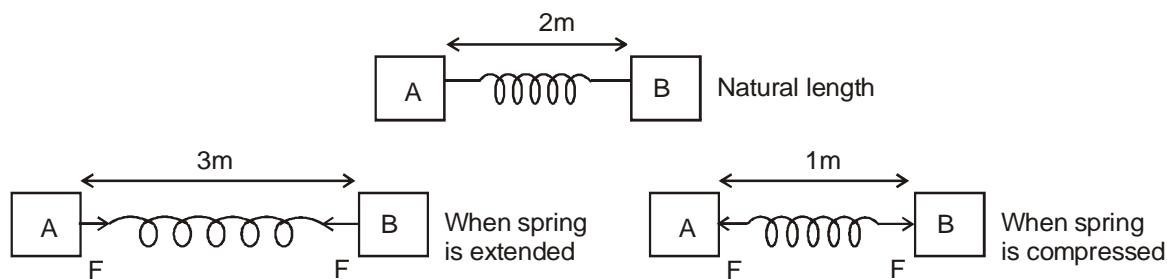

Ex.20 Force constant of a spring is 100 N/m. If a 10 kg block attached with the spring is at rest, then find extension in the spring ($g = 10 \text{ m/s}^2$)

Sol. In this situation, spring is in extended state so spring force acts in upward direction. Let x be the extension in the spring.



F.B.D. of 10 kg block :

$$F_s = 10g$$

$$\Rightarrow Kx = 100$$

$$\Rightarrow (100)x = (100)$$


$$\Rightarrow x = 1 \text{ m}$$




6.1 SPRING FORCE SYSTEM :

Initially the spring is in natural length at A with block m. But when the block displaced towards right then the spring is elongated and now block is released at B then the block move towards left due to spring force (kx).

Analysis of motion of block :

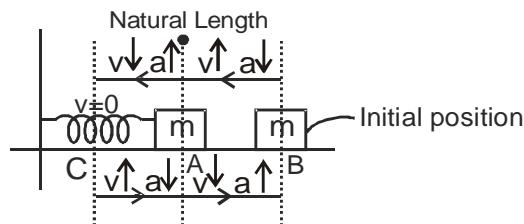


- (i) From B to A speed of block increase and acceleration decreases. (due to decrease in spring force kx)




- (ii) Due to inertia block crosses natural length at A.


From A to C speed of the block decreases and acceleration increases. (due to increase in spring force kx)



- (iii) At C the block stops momentarily at this instant and since the spring is compressed spring force is towards right and the block starts to move towards right. From C to A speed of block increases and acceleration decreases. (due to decrease in spring force kx)




- (iv) Again block crosses point A due to inertia then from A to B speed decreases and acceleration increases.




In this way block does SHM (to be explained later) if no resistive force is acting on the block.

Note :

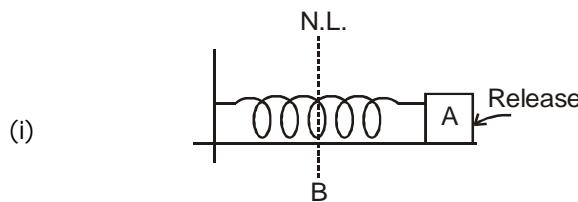


when the block A is released then it takes some finite time to reach at B. i.e., spring force doesn't change instantaneously.

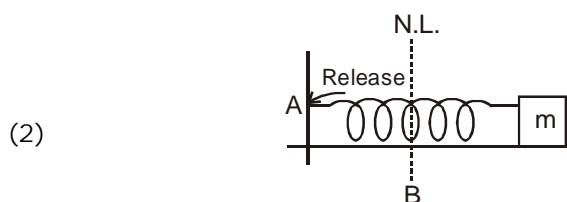


When point A of the spring is released in the above situation then the spring forces changes instantaneously and becomes zero because one end of the spring is free.

- (3) In string tension may change instantaneously.


Ex.21 Find out the acceleration of 2 kg block in the figures shown at the instant 1 kg block falls from 2 kg block. (at $t = 0$)

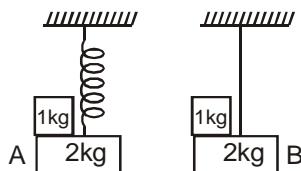

Sol. F.B.D.s before fall of 1kg block

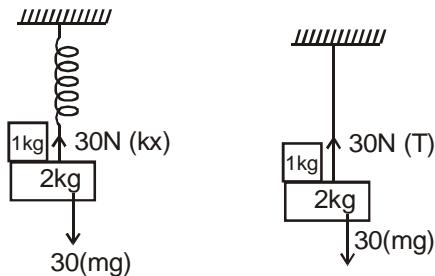



after the fall of the 1 kg block tension will change instantaneously but spring force (kx) doesn't change instantaneously. F.B.D.s just after the fall of 1 kg block

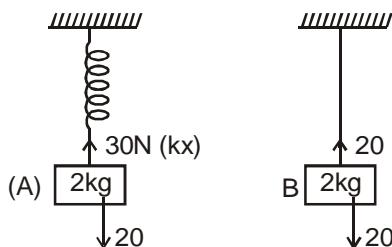


$$a_A = \frac{30 - 20}{2} = 5 \text{ m/s}^2 \text{ (upward)} \quad a_B = 0 \text{ m/s}^2$$

Ex.22 Two blocks 'A' and 'B' of same mass 'm' attached with a light spring are suspended by a string as shown in figure. Find the acceleration of block 'A' and 'B' just after the string is cut.

Sol. When block A and B are in equilibrium position
F.B.D of 'B'

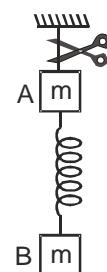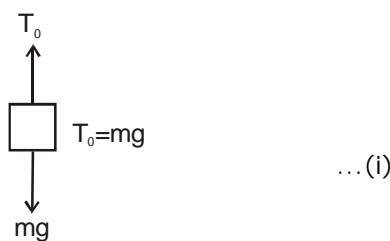


F.B.D of 'A'

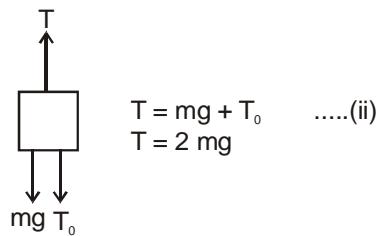


when string is cut, tension T becomes zero. But spring does not change its shape just after cutting. So spring force acts on mass B, again draw F.B.D. of block A and B as shown in figure

F.B.D of 'B'

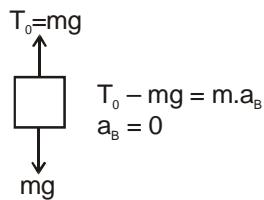


F.B.D. of 'A'

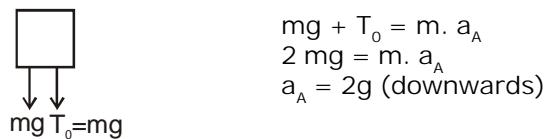

Ex.23 Find out the acceleration of 1kg, 2kg and 3kg block and tension in the string between 1 kg & 2 kg block just after cutting the string as shown in figure.

Sol. F.B.D before cutting of string

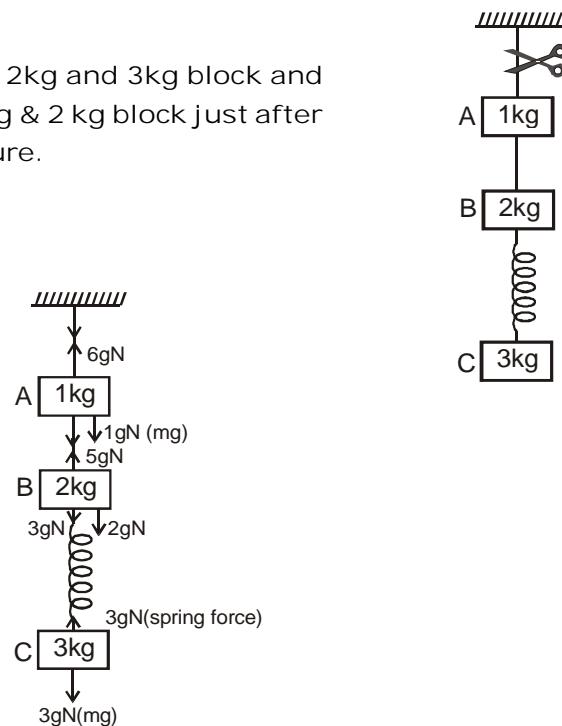

Let us assume the Tension in the string connecting blocks A & B becomes zero just after cutting the string then.



$$a_1 = \frac{1g}{1} = g \text{ ms}^{-2}$$




(weight) (spring force)

$$a_2 = \frac{5g}{2} = 2.5 \text{ g ms}^{-2}$$

$$\therefore a_2 > a_1 \text{ i.e., } \therefore T \neq 0$$


If $T \neq 0$ that means string is tight and Both block A & B will have same acceleration. So it will take as a system of 3 kg mass.

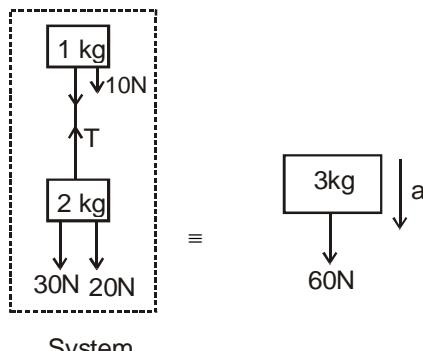


$$\text{Total force down ward} = 10 + 30 + 20 = 60 \text{ N}$$

$$\text{Total mass} = 3 \text{ kg} \Rightarrow a = \frac{60}{3} = 20 \text{ m/s}^2$$

Now apply $F_{\text{net}} = ma$ at block B.

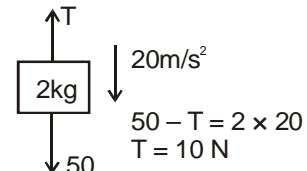

\therefore the spring force does not change instantaneously the F.B.D of 'C'



Reference Frame :


A frame of reference is basically a coordinate system in which motion of object is analyzed. There are two types of reference frames.

- (a) Inertial reference frame : Frame of reference moving with constant velocity or stationary
- (b) Non-inertial reference frame : A frame of reference moving with non-zero acceleration

- : (i) Although earth is a non inertial frame (due to rotation) but we always consider it as an inertial frame.
(ii) A body moving in circular path with constant speed is a non inertial frame (direction change cause acceleration)

7. PSEUDO FORCE :

Consider the following example to understand the pseudo force concept

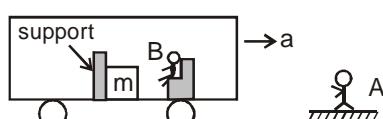

The block m in the bus is moving with constant acceleration a with respect to man A at ground. Force

required for this acceleration is the normal reaction exerted by the support

$$\text{So, } N = ma \quad \dots \text{(i)}$$

This block m is at rest with respect to man B who is in the bus (a non inertial frame). So the acceleration of the block with respect to man B is zero.

$$N = m(0) = 0 \quad \dots \text{(ii)}$$


But the normal force is exerted in a non-inertial frame also. So the equation (ii) is wrong therefore we conclude that Newton's law is not valid in non-inertial frame.

If we want to apply Newton's law in non-inertial frame, then we can do so by using of the concept pseudo force.

Pseudo force is an imaginary force, which in actual is not acting on the body. But after applying it on the body we can use Newton's laws in non-inertial frames.

This imaginary force is acting on the body only when we are solving the problem in a non-inertial frame of reference.

In the above example. The net force on the block m is zero with respect to man B after applying the pesudo force.




$$N = ma$$



:


1. Direction of pseudo force is opposite to the acceleration of frame
2. Magnitude of pseudo force is equal to mass of the body which we are analyzing multiplied by acceleration of frame
3. Point of application of pseudo force is the centre of mass of the body which we are analysing

Ex.24 A box is moving upward with retardation ' a ' $< g$, find the direction and magnitude of "pseudo force" acting on block of mass ' m ' placed inside the box. Also calculate normal force exerted by surface on block




Sol. Pseudo force acts opposite to the direction of acceleration of reference frame.
pseudo force = ma in upward direction

F.B.D of ' m ' w.r.t box (non-inertial)

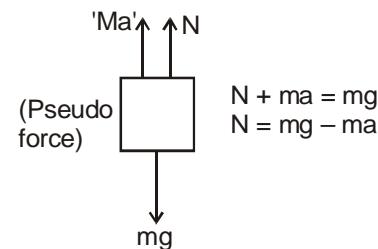

Ex.25 Figure shows a pendulum suspended from the roof of a car that has a constant acceleration a relative to the ground. Find the deflection of the pendulum from the vertical as observed from the ground frame and from the frame attached with the car.

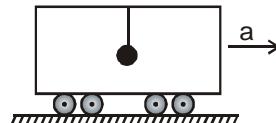

Sol.

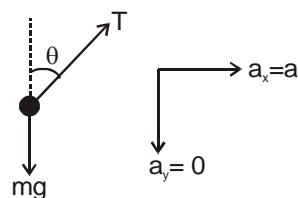
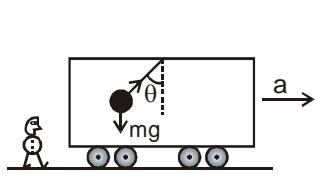


Figure represents free Body diagram of the bob w.r.t ground.

In an inertial frame the suspended bob has an acceleration a caused by the horizontal component of tension T .

$$\begin{aligned} T \sin \theta &= ma & \dots (i) \\ T \cos \theta &= mg & \dots (ii) \end{aligned}$$

From equation (i) and (ii)

$$\tan \theta = \frac{a}{g} \Rightarrow \theta = \tan^{-1}\left(\frac{a}{g}\right)$$

In a non-inertial frame

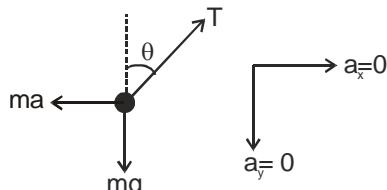
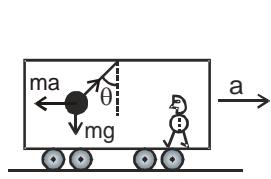


Figure represents free Body diagram of bob w.r.t car.


In the non-inertial frame of the car, the bob is in static equilibrium under the action of three forces, T , mg and ma (pseudo force)

$$\begin{aligned} T \sin \theta &= ma & \dots (iii) \\ T \cos \theta &= mg & \dots (iv) \end{aligned}$$



From equation (iii) and (iv)

$$\tan \theta = \frac{a}{g} \Rightarrow \theta = \tan^{-1}\left(\frac{a}{g}\right)$$

Ex.26 A pulley with two blocks system is attached to the ceiling of a lift moving upward with an acceleration a_0 . Find the deformation in the spring.



Sol. Non-Inertial Frame

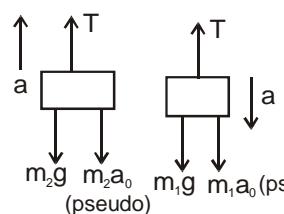

Let relative to the centre of pulley, m_1 accelerates downward with a and m_2 accelerates upwards with a . Applying Newton's 2nd law.

$$\begin{aligned} m_1a + m_1a_0 - T &= m_1a & \dots (i) \\ T - m_2g - m_2a_0 &= m_2a & \dots (ii) \end{aligned}$$


On adding (iv) and (v) we get

$$a = \left(\frac{m_1 - m_2}{m_1 + m_2} \right) (g + a_0) \quad \dots \text{(iii)}$$


Substituting a in equation (i)

$$\text{We get } T = \frac{2m_1 m_2 (g + a_0)}{m_1 + m_2} \quad \therefore x = \frac{F}{k} = \frac{2T}{k} = \frac{4m_1 m_2 (g + a_0)}{(m_1 + m_2)k}$$

Ex.27 All the surfaces shown in figure are assumed to be frictionless. The block of mass m slides on the prism which in turn slides backward on the horizontal surface. Find the acceleration of the smaller block with respect to the prism.

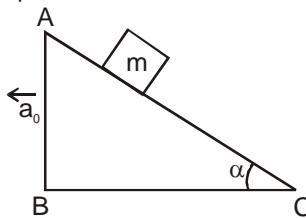

Sol. Let the acceleration of the prism be a_0 in the backward direction. Consider the motion of the smaller block from the frame of the prism. The forces on the block are (figure)

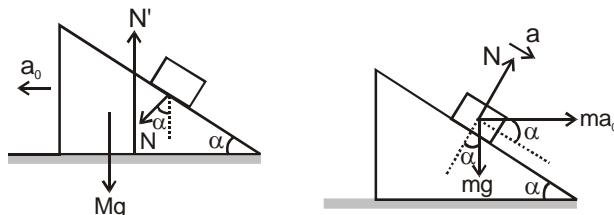

- (i) N normal force
- (ii) mg downward (gravity),
- (iii) ma_0 forward (Pseudo Force)

The block slides down the plane. Components of the forces parallel to the incline give

$$ma_0 \cos \alpha + mg \sin \alpha = ma$$

$$\text{or, } a = a_0 \cos \alpha + g \sin \alpha \quad \dots \text{(i)}$$

Components of the forces perpendicular to the incline give

$$N + ma_0 \sin \alpha = mg \cos \alpha \quad \dots \text{(ii)}$$

Now consider the motion of the prism from the ground frame. No pseudo force is needed as the frame used is inertial. The forces are (figure)

- (i) Mg downward
- (ii) N normal to the incline (by the block)
- (iii) N' upward (by the horizontal surface)

Horizontal components give,

$$N \sin \alpha = Ma_0 \quad \text{or} \quad N = Ma_0 / \sin \alpha, \quad \dots \text{(iii)}$$

Putting in (ii)

$$\frac{Ma_0}{\sin \alpha} + ma_0 \sin \alpha = mg \cos \alpha$$

$$\text{or, } a_0 = \frac{mg \sin \alpha \cos \alpha}{M + m \sin^2 \alpha}$$

$$\text{From (i) } a = \frac{mg \sin \alpha \cos^2 \alpha}{M + m \sin^2 \alpha} + g \sin \alpha = \frac{(M+m)g \sin \alpha}{M + m \sin^2 \alpha}$$

8. WEIGHING MACHINES :


A weighing machine does not measure the weight but measures the force exerted by object on its upper surface or we can say weighing machine measure normal force on the man.

8.1 Motion in a lift :


- (A) If the lift is unaccelerated ($v = 0$ or constant)
In this case no pseudo force act on the man

In this case the F.B.D. of the man
 $N = mg$

In this case machine read the
actual weight



- (B) If the lift is accelerated upward.
(where $a = \text{constant}$)

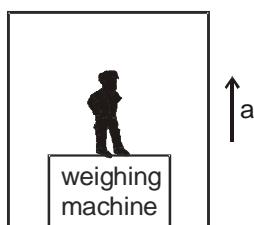


F.B.D of man with respect to lift
So weighing machine read


$$N = m(g + a)$$

Apparent weight

$N >$ Actual weight (mg)

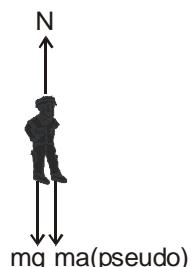

- (c) If the lift is accelerated downward.




F.B.D of man with respect to lift

So weighing machine read

$$N = m(g - a)$$

Apparent weight

$N <$ Actual weight (mg)

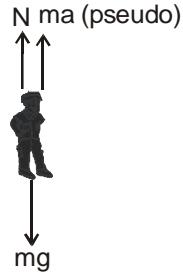

Note :

- (i) If $a = g \Rightarrow N = 0$

Thus in a freely falling lift, the man will experience a state of weightlessness

- (ii) If the lift is accelerated downwards such that $a > g$: So the man will be accelerated upward and will stay at the ceiling of the lift.

(iii) Apparent weight is greater than or less than actual weight only depends on the direction and magnitude of acceleration. Magnitude and direction of velocity doesn't play any role in apparent weight.

EXERCISE - I


(A) NEWTON'S LAW OF MOTION

1. A man getting down a running bus, falls forward because-
- due to inertia of rest, road is left behind and man reaches forward
 - due to inertia of motion upper part of body continues to be in motion in forward direction while feet come to rest as soon as they touch the road
 - he leans forward as a matter of habit
 - of the combined effect of all the three factors stated in (A), (B) and (C)


2 You are on a friction less horizontal plane. How can you get off if no horizontal force is exerted by pushing against the surface ?

- by jumping
- by spitting or sneezing
- by rolling your body on the surface
- by running on the plane


3. The forces acting on an object are shown in the fig. If the body moves horizontally at a constant speed of 5 m/s, then the values of the forces P and S are, respectively-

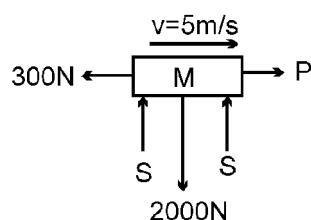

- (A) 0 N, 0 N (B) 300 N, 200 N
 (C) 300 N, 1000 N (D) 2000 N, 300 N
4. At a given instant, A is moving with velocity of 5 m/s upwards. What is velocity of B at the time




- (A) 15 m/s↓ (B) 15 m/s↑ (C) 5 m/s ↓ (D) 5 m/s ↑
5. Find the velocity of the hanging block if the velocities of the free ends of the rope are as indicated in the figure.

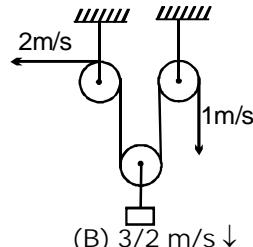


- (A) 3/2 m/s ↑ (B) 3/2 m/s ↓
 (C) 1/2 m/s ↑ (D) 1/2 m/s ↓

6. In the figure shown the velocity of different blocks is shown. The velocity of C is

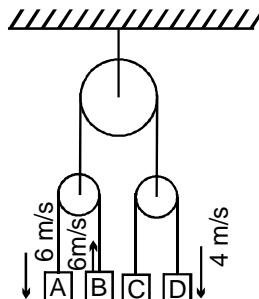


- (A) 6 m/s (B) 4 m/s
 (C) 0 m/s (D) none of these

7. A body of mass 5 kg is suspended by the strings making angles 60° and 30° with the horizontal -

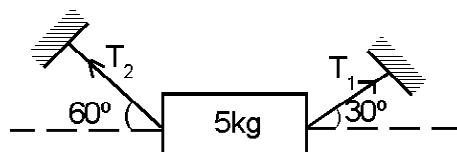


- (a) $T_1 = 25 \text{ N}$ (b) $T_2 = 25 \text{ N}$
 (c) $T_1 = 25\sqrt{3} \text{ N}$ (d) $T_2 = 25\sqrt{3} \text{ N}$
 (A) a, b (B) a, d
 (C) c, d (D) b, c

8. Find velocity of block 'B' at the instant shown in figure.

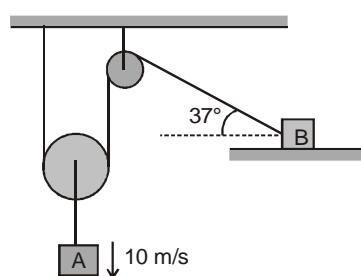


- (A) 25 m/s (B) 20 m/s
 (C) 22 m/s (D) 30 m/s

9. In the arrangement shown in fig. the ends P and Q of an unstretchable string move downwards with uniform speed U. Pulleys A and B are fixed. Mass M moves upwards with a speed.

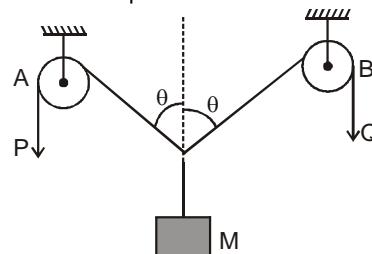


- (A) $2U \cos \theta$ (B) $U \cos \theta$
 (C) $\frac{2U}{\cos \theta}$ (D) $\frac{U}{\cos \theta}$

10. The velocity of end 'A' of rigid rod placed between two smooth vertical walls moves with velocity 'u' along vertical direction. Find out the velocity of end 'B' of that rod, rod always remains in contact with the vertical walls.

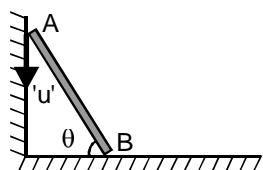


- (A) $u \tan 2\theta$
 (B) $u \cot \theta$
 (C) $u \tan \theta$
 (D) $2u \tan \theta$

11. The 50 kg homogeneous smooth sphere rests on the 30° incline A and bears against the smooth vertical wall B. Calculate the contact forces at A and B.




- (A) $N_B = \frac{1000}{\sqrt{3}} N$, $N_A = \frac{500}{\sqrt{3}} N$
 (B) $N_A = \frac{1000}{\sqrt{3}} N$, $N_B = \frac{500}{\sqrt{3}} N$
 (C) $N_A = \frac{100}{\sqrt{3}} N$, $N_B = \frac{500}{\sqrt{3}} N$
 (D) $N_A = \frac{1000}{\sqrt{3}} N$, $N_B = \frac{50}{\sqrt{3}} N$

12. Find out the reading of the weighing machine in the following cases.

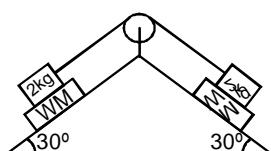


- (A) $10\sqrt{3}$ (B) $10\sqrt{2}$ (C) $20\sqrt{3}$ (D) $30\sqrt{3}$

13. A mass M is suspended by a rope from a rigid support at A as shown in figure. Another rope is tied at the end B, and it is pulled horizontally with a force F. If the rope AB makes an angle θ with the vertical in equilibrium, then the tension in the string AB is :

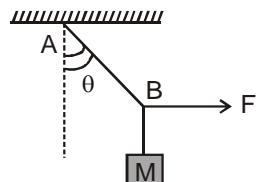


- (A) $F \sin \theta$ (B) $F/\sin \theta$ (C) $F \cos \theta$ (D) $F/\cos \theta$

14. Three block are connected as shown, on a horizontal frictionless table and pulled to the right with a force $T_3 = 60 \text{ N}$. If $m_1 = 10 \text{ kg}$, $m_2 = 20 \text{ kg}$ and $m_3 = 30 \text{ kg}$, the tension T_2 is -

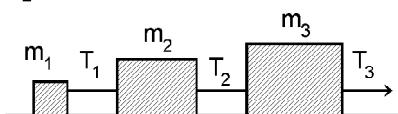


- (A) 10 N (B) 20 N
 (C) 30 N (D) 60 N

15. Three blocks A, B and C are suspended as shown in the figure. Mass of each blocks A and C is m. If system is in equilibrium and mass of B is M, then :

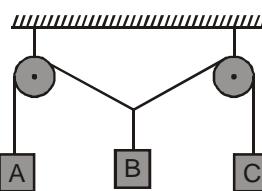


- (A) $M = 2m$ (B) $M < 2m$ (C) $M > 2m$ (D) $M = m$
 16. A weight can be hung in any of the following four ways by string of same type. In which case is the string most likely to break?

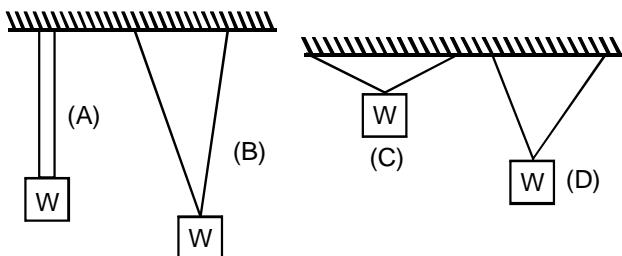

- (A) A (B) B (C) C (D) D

17. A force-time graph for a linear motion is shown in figure where the segments are circular. The linear momentum gained between zero and 8 seconds in -

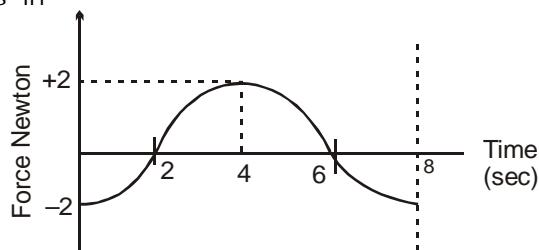

- (A) $-2\pi \text{ N.s}$ (B) 0 N.s
 (C) $4\pi \text{ N.s}$ (D) $-6\pi \text{ N.s}$

18. A particle moves in the xy plane under the action of a force F such that the value of its linear momentum (P) at any time t is, $P_x = 2 \cos t$, $P_y = 2 \sin t$. The angle θ between P and F at that time t will be -


- (A) 0° (B) 30° (C) 90° (D) 180°

19. A stunt man jumps his car over a crater as shown (neglect air resistance)
- during the whole flight the driver experiences weightlessness
 - during the whole flight the driver never experiences weightlessness
 - during the whole flight the driver experiences weightlessness only at the highest point




- (D) the apparent weight increases during upward journey

20. A particle of mass 50 gram moves on a straight line. The variation of speed with time is shown in figure. find the force acting on the particle at $t = 2, 4$ and 6 seconds.

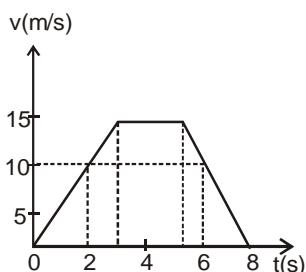


- 0.25 N along motion, zero, 0.25 opposite to motion
- 0.25 N along motion, zero, 0.25 along to motion
- 0.25 N opposite motion, zero, 0.25 along to motion
- 0.25 N opposite motion, zero, 0.25 opposite to motion

21. Two blocks are in contact on a frictionless table. One has mass m and the other $2m$. A force F is applied on $2m$ as shown in the figure. Now the same force F is applied from the right on m . In the two cases respectively, the ratio force of contact between the two blocks will be :

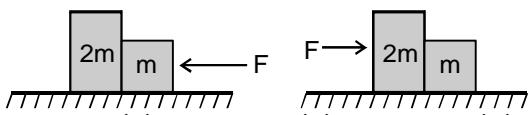

- same
 - $1 : 2$
 - $2 : 1$
 - $1 : 3$
22. A body of mass 8 kg is hanging another body of mass 12 kg. The combination is being pulled by a string with an acceleration of 2.2 m s^{-2} . The tension T_1 and T_2 will be respectively : (use $g = 9.8 \text{ m/s}^2$)

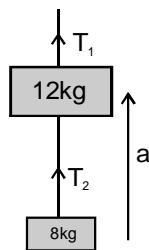


- 200 N, 80 N
- 220 N, 90 N
- 240 N, 96 N
- 260 N, 96 N

23. A rope of mass 5 kg is moving vertically in vertical position with an upwards force of 100 N acting at the upper end and a downwards force of 70 N acting at

- the lower end. The tension at midpoint of the rope is
- 100 N
 - 85 N
 - 75 N
 - 105 N
24. A particle of small mass m is joined to a very heavy body by a light string passing over a light pulley. Both bodies are free to move. The total downward force in the pulley is


- mg
- $2 mg$
- $4 mg$
- can not be determined

25. The pulley arrangements shown in figure are identical the mass of the rope being negligible. In case I, the mass m is lifted by attaching a mass $2m$ to the other end of the rope. In case II, the mass m is lifted by pulling the other end of the rope with constant downward force $F = 2mg$, where g is acceleration due to gravity. The acceleration of mass in case I is

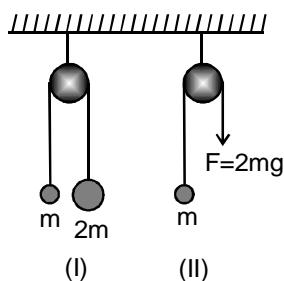

- zero
- more than that in case II
- less than that in case II
- equal to that in case II


26. Two masses M_1 and M_2 are attached to the ends of a light string which passes over a massless pulley attached to the top of a double inclined smooth plane of angles of inclination α and β . The tension in the string is :

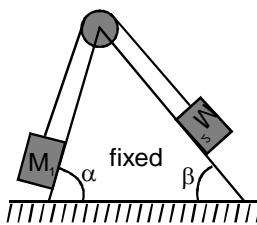

- $\frac{M_2(\sin\beta)g}{M_1+M_2}$
- $\frac{M_1(\sin\alpha)g}{M_1+M_2}$
- $\frac{M_1M_2(\sin\beta+\sin\alpha)g}{M_1+M_2}$
- zero


27. Two masses are hanging vertically over a frictionless pulley. The acceleration of the two masses is-

- $\frac{m_1}{m_2}g$
- $\frac{m_2}{m_1}g$
- $\left(\frac{m_2-m_1}{m_1+m_2}\right)g$
- $\left(\frac{m_1+m_2}{m_2-m_1}\right)g$

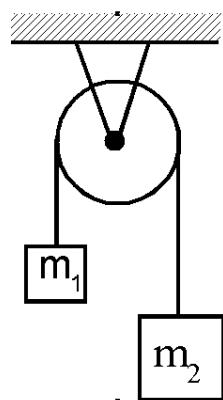


28. Three equal weights A, B, C of mass 2 kg each are hanging on a string passing over a fixed frictionless pulley as shown in the fig. The tension in the string connecting weights B and C is-

- (A) zero
- (B) 13 Newton
- (C) 3.3 Newton
- (D) 19.6 Newton




29. In the arrangement shown in figure, pulleys are massless and frictionless and threads are inextensible. The Block of mass m_1 will remain at rest, if

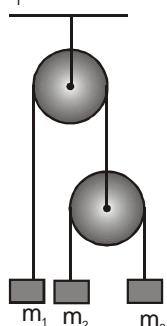

- (A) $\frac{1}{m_1} = \frac{1}{m_2} + \frac{1}{m_3}$
- (B) $m_1 = m_2 + m_3$
- (C) $\frac{4}{m_1} = \frac{1}{m_2} + \frac{1}{m_3}$
- (D) $\frac{1}{m_3} = \frac{2}{m_2} + \frac{3}{m_1}$


30 Two objects A and B of masses m_A and m_B are attached by strings as shown in fig. If they are given upward acceleration, then the ratio of tension $T_1 : T_2$ is -

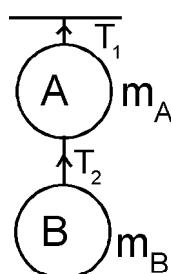


- (A) $(m_A + m_B)/m_B$
- (B) $(m_A + m_B)/m_A$
- (C) $\frac{m_A + m_B}{m_A - m_B}$
- (D) $\frac{m_A - m_B}{m_A + m_B}$

31. In the figure a smooth pulley of negligible weight is suspended by a spring balance. Weights of 1kg and 5 kg are attached to the opposite ends of a string passing over the pulley and move with acceleration because of gravity. During the motion, the spring balance reads a weight of -

- (A) 6 kg
- (B) less than 6 kg
- (C) more than 6 kg
- (D) may be more or less than 6 kg

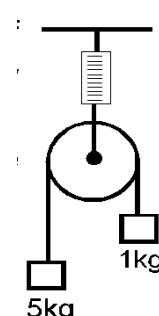


32. Both the blocks shown here are of mass m and are moving with constant velocity in direction shown in a resistive medium which exerts equal constant force on both blocks in direction opposite to the velocity. The tension in the string connecting both of them will be (Neglect friction)

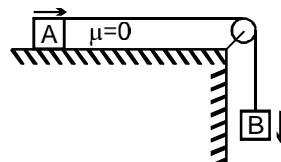

- (A) mg
- (B) $mg/2$
- (C) $mg/3$
- (D) $mg/4$

33. A monkey of mass 20 kg is holding a vertical rope. The rope can break when a mass of 25 kg is suspended from it. What is the maximum acceleration with which the monkey can climb up along the rope?


- (A) 7 ms^{-2}
 - (B) 10 ms^{-2}
 - (C) 5 ms^{-2}
 - (D) 2.5 ms^{-2}
34. Find the acceleration of 3 kg mass when acceleration of 2 kg mass is 2 ms^{-2} as shown in figure.



- (A) 3 ms^{-2}
- (B) 2 ms^{-2}
- (C) 0.5 ms^{-2}
- (D) zero

35. In the figure at the free end a force F is applied to keep the suspended mass of 18 kg at rest. The value of F is-

- (A) 180 N
- (B) 90 N
- (C) 60 N
- (D) 30 N




36. If the tension in the cable supporting an elevator is equal to the weight of the elevator, the elevator may be -

- (a) going up with increasing speed
 - (b) going down with increasing speed
 - (c) going up with uniform speed
 - (d) going down with uniform speed
- (A) a, d
 - (B) a, b, c
 - (C) c, d
 - (D) a, b


37. As an inclined plane is made slowly horizontal by reducing the value of angle θ with horizontal. The component of weight parallel to the plane of a block resting on the inclined plane -

- (A) decreases
- (B) remains same
- (C) increases
- (D) increases if the plane is smooth

38. A trolley is accelerating down an incline of angle θ with acceleration $g \sin \theta$. Which of the following is correct. (α is the constant angle made by the string with vertical)

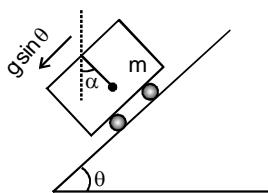

- (A) $\alpha = \theta$
 - (B) $\alpha = 0^\circ$
 - (C) Tension in the string, $T = mg$
 - (D) Tension in the string, $T = mg \sec \theta$
39. A block of mass m resting on a wedge of angle θ as shown in the figure. The wedge is given an acceleration a . What is the minimum value of a so that the mass m falls freely?

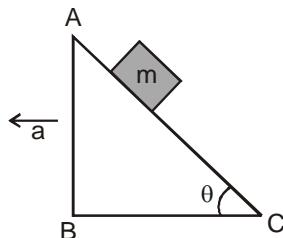

- (A) g
- (B) $g \cos \theta$
- (C) $g \cot \theta$
- (D) $g \tan \theta$

(FRICTION)

40. A block is placed on a rough floor and a horizontal force F is applied on it. The force of friction f by the floor on the block is measured for different values of F and a graph is plotted between them -

- (a) The graph is a straight line of slope 45°
 - (b) The graph is straight line parallel to the F axis
 - (c) The graph is a straight line of slope 45° for small F and a straight line parallel to the F -axis for large F .
 - (d) There is small kink on the graph
- (A) c, d
 - (B) a, d
 - (C) a, b
 - (D) a, c

41. Mark the correct statements about the friction between two bodies -

- (a) static friction is always greater than the kinetic friction
- (b) coefficient of static friction is always greater than the coefficient of kinetic friction
- (c) limiting friction is always greater than the kinetic friction
- (d) limiting friction is never less than static friction

- (A) b, c, d
- (B) a, b, c
- (C) a, c, d
- (D) a, b, d

42. A block A kept on an inclined surface just begins to slide if the inclination is 30° . The block is replaced by another block B and it is found that it just begins to slide if the inclination is 40° .


- (A) mass of A > mass of B
- (B) mass of A < mass of B
- (C) mass of A = mass of B
- (D) all the three are possible

43. Two cars of unequal masses use similar tyres. If they are moving at the same initial speed, the minimum stopping distance -

- (A) is smaller for the heavier car
- (B) is smaller for the lighter car
- (C) is same for both cars
- (D) depends on the volume of the car

(FRICTION)

44. A monkey of mass m is climbing a rope hanging from the roof with acceleration a . The coefficient of static friction between the body of the monkey and the rope is μ . Find the direction and value of friction force on the monkey.




- (A) Upward, $F = m(g + a)$
- (B) downward, $F = m(g + a)$
- (C) Upward, $F = mg$
- (D) downward, $F = mg$

45. A body is placed on a rough inclined plane of inclination θ . As the angle θ is increased from 0° to 90° the contact force between the block and the plane

- (A) remains constant
- (B) first remains constant then decreases
- (C) first decreases then increases
- (D) first increases then decreases

46 A wooden block of mass m resting on a rough horizontal table (coefficient of friction = μ) is pulled by a force F as shown in figure. The acceleration of the block moving horizontally is :

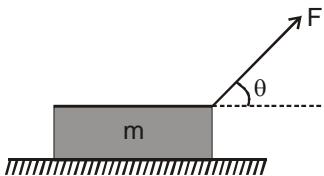

- (A) $\frac{F \cos \theta}{m}$ (B) $\frac{\mu F \sin \theta}{M}$
 (C) $\frac{F}{m}(\cos \theta + \mu \sin \theta) - \mu g$ (D) none

47. A chain is lying on a rough table with a fraction $1/n$ of its length hanging down from the edge of the table. If it is just on the point of sliding down from the table, then the coefficient of friction between the table and the chain is -

- (A) $\frac{1}{n}$ (B) $\frac{1}{(n-1)}$
 (C) $\frac{1}{(n+1)}$ (D) $\frac{n-1}{(n+1)}$

48. A body of mass m moves with a velocity v on a surface whose friction coefficient is μ . If the body covers a distance s then v will be :

- (A) $\sqrt{2\mu gs}$ (B) $\sqrt{\mu gs}$ (C) $\sqrt{\mu gs/2}$ (D) $\sqrt{3\mu gs}$

49. A block of mass 2kg rests on a rough inclined plane making an angle of 30° with the horizontal. The coefficient of static friction between the block and the plane is 0.7. The frictional force on the block is -

- (A) 0.7×9.8 Newton
 (B) 9.8 Newton
 (C) $0.7 \times 9.8\sqrt{3}$ Newton
 (D) $9.8 \times \sqrt{3}$ Newton

50. A box 'A' is lying on the horizontal floor of the compartment of a train running along horizontal rails from left to right. At time 't', it decelerates. Then the reaction R by the floor on the box is given best by

- (A)
 (B)
 (C)
 (D)


51. For the equilibrium of a body on an inclined plane of inclination 45° . The coefficient of static friction will be

- (A) greater than one (B) less than one
 (C) zero (D) less than zero

52. Starting from rest a body slides down a 45° inclined plane in twice the time it takes to slide down the same distance in the absence of friction. The coefficient of friction between the body and the inclined plane is :

- (A) 0.75 (B) 0.33 (C) 0.25 (D) 0.80
 53. A block of mass M rests on a rough horizontal surface as shown. Coefficient of friction between the block and the surface is μ . A force $F = Mg$ acting at angle θ with the vertical side of the block pulls it in which of the following cases the block can be pulled along the surface ?

- (A) $\tan \theta \geq \mu$?
 (B) $\tan (\theta/2) \geq \mu$
 (C) $\cot \theta \geq \mu$
 (D) $\cot (\theta/2) \geq \mu$

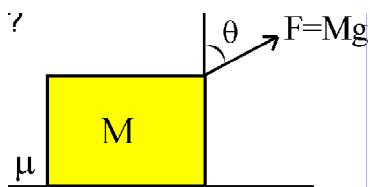

54. A block moves down a smooth inclined plane of inclination θ . Its velocity on reaching the bottom is v . If it slides down a rough inclined plane of some inclination, its velocity on reaching the bottom is v/n , where n is a number greater than 0. The coefficient of friction is given by -

- (A) $\mu = \tan \theta \sqrt{1 - \frac{1}{n^2}}$
 (B) $\mu = \cot \theta \sqrt{1 - \frac{1}{n^2}}$
 (C) $\mu = \tan \theta \sqrt{1 - \frac{1}{n^{1/2}}}$
 (D) $\mu = \cot \theta \sqrt{1 - \frac{1}{n^{1/2}}}$


55. A block of mass 5 kg and surface area 2 m^2 just begins to slide down an inclined plane when the angle of inclination is 30° . Keeping mass same, the surface area of the block is doubled. The angle at which this starts sliding down is :

- (A) 30° (B) 60° (C) 15° (D) none


EXERCISE - II

(A) NEWTON'S LAW OF MOTION
(SINGLE CORRECT)


1. The pulleys in the diagram are all smooth and light. The acceleration of A is upwards and the acceleration of C is f downwards. The acceleration of B is




- (A) $\frac{1}{2}(f-a)$ up (B) $\frac{1}{2}(a+f)$ down
 (C) $\frac{1}{2}(a+f)$ up (D) $\frac{1}{2}(a-f)$ up
 2. If acceleration of A is 2 m/s^2 to left and acceleration of B is 1 m/s^2 to left, then acceleration of C is -

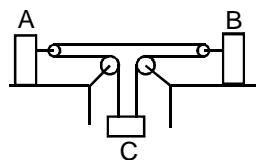

- (A) 1 m/s^2 upwards (B) 1 m/s^2 downwards
 (C) 2 m/s^2 downwards (D) 2 m/s^2 upwards
 3. If block A has a velocity of 0.6 m/s to the right, determine the velocity of block B.

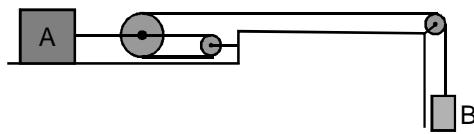


- (A) 1.8 m/s in downward direction
 (B) 1.8 m/s in upward direction
 (C) 0.6 m/s in downward direction
 (D) 0.6 m/s in upward direction
 4. Block B moves to the right with a constant velocity v_0 . The velocity of body A relative to B is :

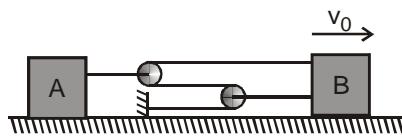


- (A) $\frac{v_0}{2}$, towards left (B) $\frac{v_0}{2}$, towards right
 (C) $\frac{3v_0}{2}$, towards left (D) $\frac{3v_0}{2}$, towards right

5. Find the acceleration of C w.r.t. ground.

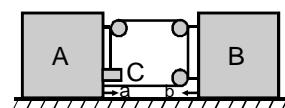


- (A) $a\hat{i} - (2a+2b)\hat{j}$ (B) $a\hat{i} - (2a+b)\hat{j}$
 (C) $a\hat{i} - (a+2b)\hat{j}$ (D) $b\hat{i} - (2a+2b)\hat{j}$

6. Find the acceleration of B.

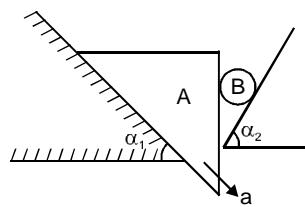


- (A) $\frac{a \cos \alpha_1}{\cos \alpha_2}$ (B) $\frac{a \sin \alpha_1}{\cos \alpha_2}$ (C) $\frac{a \cos \alpha_2}{\cos \alpha_1}$ (D) $\frac{\cos \alpha_1}{\cos \alpha_2}$

7. A spherical ball of mass $m = 5 \text{ kg}$ rests between two planes which make angles of 30° and 45° respectively with the horizontal. The system is in equilibrium. Find the normal forces exerted on the ball by each of the planes. The planes are smooth.



- (A) $N_{45} = 96.59 \text{ N}$, $N_{30} = 136.6 \text{ N}$
 (B) $N_{30} = 96.59 \text{ N}$, $N_{45} = 136.6 \text{ N}$
 (C) $N_{45} = 136.6 \text{ N}$, $N_{30} = 96.56 \text{ N}$
 (D) none of these

- Question No. 8 to 9 (2 questions)
 In the figure the tension in the diagonal string is 60 N .

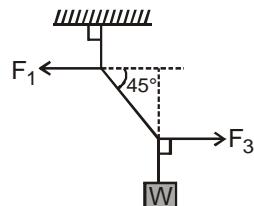


8. Find the magnitude of the horizontal force \vec{F}_1 and \vec{F}_2 that must be applied to hold the system in the position shown.

- (A) $\frac{60}{\sqrt{3}} \text{ N}$ (B) $\frac{20}{\sqrt{2}} \text{ N}$ (C) $\frac{40}{\sqrt{2}} \text{ N}$ (D) $\frac{60}{\sqrt{2}} \text{ N}$

9. In the above questions what is the weight of the suspended block ?


- (A) $\frac{60}{\sqrt{2}} \text{ N}$ (B) $\frac{40}{\sqrt{2}} \text{ N}$ (C) $\frac{60}{\sqrt{3}} \text{ N}$ (D) $\frac{50}{\sqrt{2}} \text{ N}$

10. Objects A and B each of mass m are connected by light inextensible cord. They are constrained to move on a frictionless ring in a vertical plane as shown in figure. The objects are released from rest at the positions shown. The tension in the cord just after release will be




- (A) $mg\sqrt{2}$ (B) $\frac{mg}{\sqrt{2}}$ (C) $\frac{mg}{2}$ (D) $\frac{mg}{4}$

11. Two masses m and M are attached to the strings as shown in the figure. If the system is in equilibrium, then

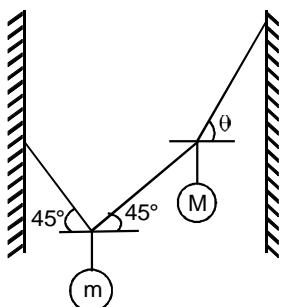

- (A) $\tan\theta = 1 + \frac{2M}{m}$ (B) $\tan\theta = 1 + \frac{2m}{M}$
 (C) $\cot\theta = 1 + \frac{2M}{m}$ (D) $\cot\theta = 1 + \frac{2m}{M}$


12. A flexible chain of weight W hangs between two fixed points A & B which are at the same horizontal level. The inclination of the chain with the horizontal at both the points of support is θ . What is the tension of the chain at the mid point ?

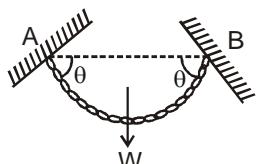

- (A) $\frac{W}{2} \cdot \text{cosec}\theta$ (B) $\frac{W}{2} \cdot \tan\theta$
 (C) $\frac{W}{2} \cdot \cot\theta$ (D) none

Question No. 13 to 15 (3 questions)

- A particle of mass m is constrained to move on x -axis. A force F acts on the particle. F always points toward the position labeled E. For example, when the particle is to the left of E, F points to the right. The magnitude of F is constant except at point E where it is zero.




The system is horizontal. F is the net force acting on the particle. The particle is displaced a distance A towards left from the equilibrium position E and released from rest at $t = 0$

13. What is the period of the motion ?

- (A) $4\left(\sqrt{\frac{2Am}{F}}\right)$ (B) $2\left(\sqrt{\frac{2Am}{F}}\right)$
 (C) $\left(\sqrt{\frac{2Am}{F}}\right)$ (D) None


14. Velocity-time graph of the particle is

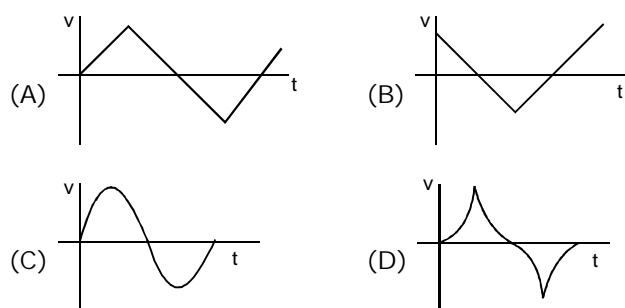

15. Find minimum time it will take to reach from $x = -\frac{A}{2}$ to 0.

- (A) $\frac{3}{2}\sqrt{\frac{mA}{F}}(\sqrt{2}-1)$ (B) $\sqrt{\frac{mA}{F}}(\sqrt{2}-1)$
 (C) $2\sqrt{\frac{mA}{F}}(\sqrt{2}-1)$ (D) none


16. A constant force F is applied in horizontal direction as shown. Contact force between M and m is N and between m and M' is N' then

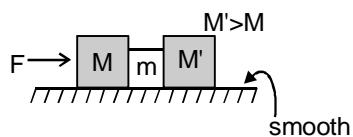

- (A) N or N' equal (B) N > N'
 (C) N' > N (D) cannot be determined

Question No. 17 to 19 (3 questions)

- A block of mass 1kg is suspended by a string of mass 1 kg, length 1m as shown in figure. ($g = 10 \text{ m/s}^2$) Calculate :



17. The tension in string at its lowest point.

- (A) 10 N (B) 15 N (C) 20 N (D) 25 N


18. The tension in string at its mid-point

(A) 10 N (B) 15 N (C) 20 N (D) 25 N

19. Force exerted by support on string.

(A) 10 N (B) 15 N (C) 20 N (D) 25 N

20. Two blocks, each having mass M , rest on frictionless surfaces as shown in the figure. If the pulleys are light and frictionless, and M on the incline is allowed to move down, then the tension in the string will be




(A) $\frac{2}{3}Mg \sin \theta$

(B) $\frac{3}{2}Mg \sin \theta$

(C) $\frac{Mg \sin \theta}{2}$

(D) $2 Mg \sin \theta$

21. Calculate the acceleration of the block B in the above figure, assuming the surfaces and the pulleys P_1 and P_2 are all smooth and pulleys and string and light

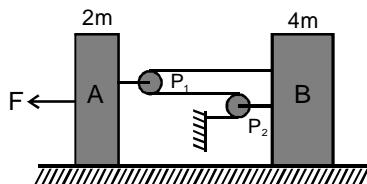


(A) $a = \frac{3F}{17m} \text{ m/s}^2$

(B) $a = \frac{2F}{17m} \text{ m/s}^2$

(C) $a = \frac{3F}{15m} \text{ m/s}^2$

(D) $a = \frac{3F}{12m} \text{ m/s}^2$

22. In previous Question surface is replaced by block C of mass m as shown in figure. Find the acceleration of block B.

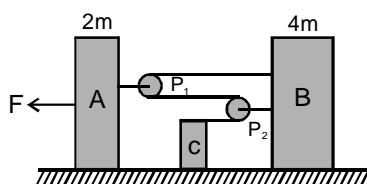


(A) $a = \frac{3F}{20m} \text{ m/s}^2$

(B) $a = \frac{3F}{21m} \text{ m/s}^2$

(C) $a = \frac{2F}{21m} \text{ m/s}^2$

(D) $a = \frac{3F}{18m} \text{ m/s}^2$

23. In the arrangement shown in the fig, the block of mass $m = 2 \text{ kg}$ lies on the wedge on mass $M = 8 \text{ kg}$. Find the initial acceleration of the wedge if the surfaces are smooth and pulley & strings are massless.




(A) $a = \frac{30\sqrt{3}}{23} \text{ m/s}^2$

(B) $a = \frac{20\sqrt{3}}{23} \text{ m/s}^2$

(C) $a = \frac{30\sqrt{2}}{23} \text{ m/s}^2$


(D) none of these

24. Block of 3 kg is initially in equilibrium and is hanging by two identical springs A and B as shown in figures. If spring A is cut from lower point at $t = 0$ then, find acceleration of block in ms^{-2} at $t = 0$.




(A) 5 (B) 10 (C) 15 (D) 0

25. Two masses of 10 kg and 20 kg respectively are connected by a massless spring as shown in figure. A force of 200 N acts on the 20 kg mass at the instant when the 10 kg mass has an acceleration of 12 ms^{-2} towards right, the acceleration of the 20 kg mass is :



(A) 2 ms^{-2} (B) 4 ms^{-2} (C) 10 ms^{-2} (D) 20 ms^{-2}

26. Two blocks are connected by a spring. The combination is suspended, at rest, from a string attached to the ceiling, as shown in the figure. The string breaks suddenly. Immediately after the string breaks, what is the initial downward acceleration of the upper block of mass $2m$?

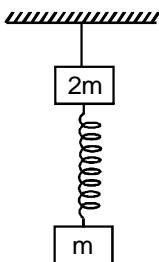

(A) 0

(B) $3g/2$


(C) g

(D) $2g$

27. A man of mass 60 kg is standing on a weighing machine placed in a lift moving with velocity 'v' and acceleration 'a' as shown in figure. Calculate the reading of weighing machine in following situation:

$$(g = 10 \text{ m/s}^2)$$


- | | | |
|------------------------------|---------------------------------|------------------------|
| (i) $a = 0$,
(A) 600 N | $v = 0$
(B) 500 N | (C) 450 N
(D) 700 N |
| (ii) $a = 0$,
(A) 600 N | $v = 2\text{m/s}$
(B) 500 N | (C) 450 N
(D) 700 N |
| (iii) $a = 0$,
(A) 450 N | $v = -2\text{m/s}$
(B) 500 N | (C) 600 N
(D) 700 N |



- | | | |
|--|---------------------------------|------------------------|
| (iv) $a = 2\text{m/s}^2$,
(A) 600 N | $v = 0$
(B) 500 N | (C) 450 N
(D) 720 N |
| (v) $a = -2\text{m/s}^2$,
(A) 600 N | $v = 0$
(B) 480 N | (C) 450 N
(D) 700 N |
| (vi) $a = 2\text{m/s}^2$,
(A) 600 N | $v = 2\text{m/s}$
(B) 480 N | (C) 450 N
(D) 720 N |
| (vii) $a = 2\text{m/s}^2$,
(A) 600 N | $v = -2\text{m/s}$
(B) 720 N | (C) 450 N
(D) 700 N |
| (viii) $a = -2\text{m/s}^2$,
(A) 600 N | $v = -2\text{m/s}$
(B) 480 N | (C) 450 N
(D) 700 N |

28. What will be the reading of spring balance in the figure shown in following situations. ($g = 10 \text{ m/s}^2$)

- | | | |
|---|-----------------------|-----------|
| (i) $a = 0$, $v = 0$
(A) 100 N | (B) 80 N
(C) 120 N | (D) 150 N |
| (ii) $a = 0$, $v = 2\text{m/s}$
(A) 100 N | (B) 80 N
(C) 120 N | (D) 150 N |
| (iii) $a = 0$, $v = -2\text{m/s}$
(A) 100 N | (B) 80 N
(C) 120 N | (D) 150 N |



- | | | |
|---|-----------------------|-----------|
| (iv) $a = 2\text{m/s}^2$, $v = 0$
(A) 100 N | (B) 80 N
(C) 120 N | (D) 150 N |
| (v) $a = -2\text{m/s}^2$, $v = 0$
(A) 100 N | (B) 80 N
(C) 120 N | (D) 150 N |
| (vi) $a = 2\text{m/s}^2$, $v = 2\text{m/s}$
(A) 100 N | (B) 80 N
(C) 120 N | (D) 150 N |
| (vii) $a = 2\text{m/s}^2$, $v = -2\text{m/s}$
(A) 100 N | (B) 80 N
(C) 120 N | (D) 150 N |
| (viii) $a = -2\text{m/s}^2$, $v = -2\text{m/s}$
(A) 100 N | (B) 80 N
(C) 120 N | (D) 150 N |

Question No. 29 to 31 (3 questions)

An object of mass 2 kg is placed at rest in a frame (S_1) moving with velocity $10\hat{i} + 5\hat{j}$ m/s and having acceleration $5\hat{i} + 10\hat{j}\text{m/s}^2$. The object is also seen by an observer standing in a frame (S_2) moving with velocity $5\hat{i} + 10\hat{j}$ m/s

29. Calculate 'Pseudo force' acting on object. Which frame is responsible for this force.

- | |
|---|
| (A) $F = -10\hat{i} - 20\hat{j}$ due to acceleration of frame S_1 |
| (B) $F = -20\hat{i} - 20\hat{j}$ due to acceleration of frame S_1 |
| (C) $F = -10\hat{i} - 30\hat{j}$ due to acceleration of frame S_1 |
| (D) none of these |


30. Calculate net force acting on object with respect to S_2 frame.

- | | |
|---------------------------------|---------------------------------|
| (A) $F = 20\hat{i} + 20\hat{j}$ | (B) $F = 10\hat{i} + 20\hat{j}$ |
| (C) $F = 5\hat{i} + 20\hat{j}$ | (D) $F = 10\hat{i} + 5\hat{j}$ |

31. Calculate net force acting on object with respect of S_1 frame.


- | | |
|-------|-------------------|
| (A) 0 | (B) 1 |
| (C) 2 | (D) none of these |

32. In the figure the reading of the spring balanced will be : [$g = 10 \text{ m/s}^2$]

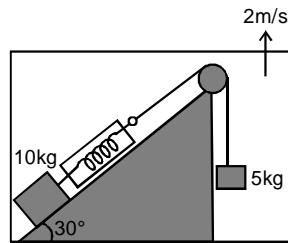

- | | | | |
|----------|----------|----------|----------|
| (A) 50 N | (B) 40 N | (C) 60 N | (D) 70 N |
|----------|----------|----------|----------|

33. A pendulum of mass m hangs from a support fixed to a trolley. The direction of the string when the trolley rolls up of plane of inclination α with acceleration a_0 is (String and bob remain fixed with respect to trolley)




$$(A) \theta = \tan^{-1}\alpha \quad (B) \theta = \tan^{-1}\left(\frac{a_0}{g}\right)$$


$$(C) \theta = \tan^{-1}\left(\frac{g}{a_0}\right) \quad (D) \theta = \tan^{-1}\left(\frac{a_0 + g\sin\alpha}{g\cos\alpha}\right)$$

(MULTIPLE CORRECT)


34. A student calculates the acceleration of m_1 in figure shown as $a_1 = \frac{(m_1 - m_2)g}{m_1 + m_2}$. Which assumption is not required to do this calculation.



- (A) pulley is frictionless (B) string is massless
 (C) pulley is massless (D) string is inextensible
 35. Which graph shows best the velocity-time graph for an object launched vertically into the air when air resistance is given by $|D| = bv$? The dashed line shows the velocity graph if there were no air resistance.

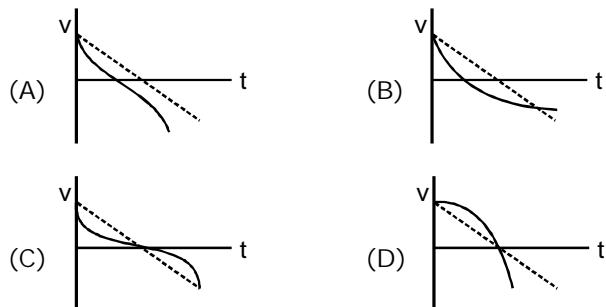

36. Two men of unequal masses hold on to the two sections of a light rope passing over a smooth light pulley. Which of the following are possible?



- (A) The lighter man is stationary while the heavier man slides with some acceleration
 (B) The heavier man is stationary while the lighter man climbs with some acceleration
 (C) The two men slide with the same acceleration in the same direction
 (D) The two men move with accelerations of the same magnitude in opposite directions

37. Adjoining figure shows a force of 40 N acting at 30° to the horizontal on a body of mass 5 kg resting on a smooth horizontal surface. Assuming that the acceleration of free-fall is 10 ms^{-2} , which of the following statements A, B, C, D, E is (are) correct?




- [1] The horizontal force acting on the body is 20 N
 [2] The weight of the 5 kg mass acts vertically downwards

- [3] The net vertical force acting on the body is 30 N
 (A) 1, 2, 3 (B) 1, 2 (C) 2 only (D) 1 only

38. For ordinary terrestrial experiments, which of the following observers below are inertial.


- (A) a child revolving in a "giant wheel".
 (B) a driver in a sports car moving with a constant high speed of 200 km/h on a straight road.
 (C) the pilot of an aeroplane which is taking off.
 (D) a cyclist negotiating a sharp turn.

39. In the system shown in the figure $m_1 > m_2$. System is held at rest by thread BC. Just after the thread BC is burnt :

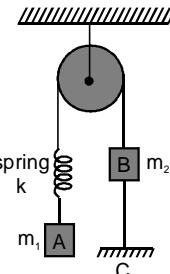


- (A) acceleration of m_2 will be upwards
 (B) magnitude of acceleration of both blocks will be equal to $\left(\frac{m_1 - m_2}{m_1 + m_2}\right)g$
 (C) acceleration of m_1 will be equal to zero
 (D) magnitude of acceleration of two blocks will be non-zero and unequal.

40. A particle is resting on a smooth horizontal floor. At $t = 0$, a horizontal force starts acting on it. Magnitude of the force increases with time according to law $F = \alpha \cdot t$, where α is a constant. For the figure shown which of the following statements is/are correct ?




- (A) Curve 1 shows acceleration against time
 (B) Curve 2 shows velocity against time
 (C) Curve 2 shows velocity against acceleration
 (D) none of these

41. Two blocks A and B of equal mass m are connected through a massless string and arranged as shown in figure. Friction is absent everywhere. When the system is released from rest.

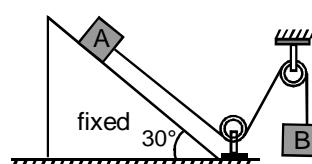

- (A) tension in string is $\frac{mg}{2}$
 (B) tension in string is $\frac{mg}{4}$
 (C) acceleration of A is $g/2$
 (D) acceleration of A is $\frac{3}{4}g$

42. Figure shows the displacement of a particle going along the x-axis as a function of time :




- (A) the force acting on the particle is zero in the region AB
 (B) the force acting on the particle is zero in the region BC
 (C) the force acting on the particle is zero in the region CD
 (D) the force is zero nowhere.

43. A force of magnitude F_1 acts on a particle so as to accelerate it from rest to a velocity v . The force F_1 is then replaced by another force of magnitude F_2 which decelerates it to rest.


- (A) F_1 must be equal to F_2
 (B) F_1 may be equal to F_2
 (C) F_1 must be unequal to F_2
 (D) None of these

44. In the figure, the blocks A, B and C of mass m each have acceleration a_1 , a_2 and a_3 respectively. F_1 and F_2 are external forces of magnitudes $2mg$ and mg respectively.

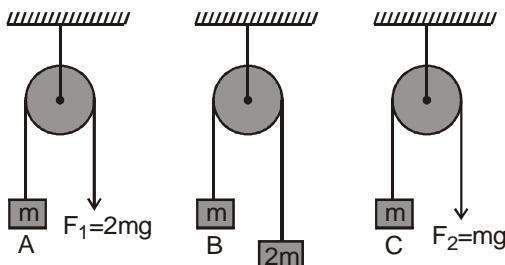


- (A) $a_1 = a_2 = a_3$ (B) $a_1 > a_2 > a_3$
 (C) $a_1 = a_2$, $a_2 > a_3$ (D) $a_1 > a_2$, $a_2 = a_3$

45. A rope is stretched between two boats at rest. A sailor in the first boat pulls the rope with a constant force of 100 N. First boat with the sailor has a mass of 250 kg whereas mass of second boat is double of that mass. If the initial distance between the boats was 100 m, the time taken for two boats to meet each other is -

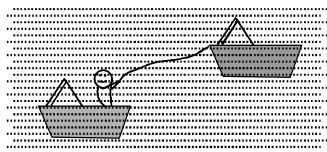

- (A) 13.8 s (B) 18.3 s (C) 3.18 s (D) 31.8 s
46. A chain of length l is placed on a smooth spherical surface of radius r with one of its ends fixed at the top of the surface. Length of chain is assumed to be $l < \frac{\pi r}{2}$. Acceleration of each element of chain when upper end is released is -



- (A) $\frac{\ell g}{r} \left(1 - \cos \frac{r}{\ell}\right)$
 (B) $\frac{rg}{\ell} \left(1 - \cos \frac{r}{\ell}\right)$
 (C) $\frac{\ell g}{r} \left(1 - \sin \frac{\ell}{r}\right)$
 (D) $\frac{rg}{\ell} \left(1 - \sin \frac{r}{\ell}\right)$


47. Five persons A, B, C, D & E are pulling a cart of mass 100 kg on a smooth surface and cart is moving with acceleration 3 m/s^2 in east direction. When person 'A' stops pulling, it moves with acceleration 1 m/s^2 in the west direction. When person 'B' stops pulling, it moves with acceleration 24 m/s^2 in the north direction. The magnitude of acceleration of the cart when only A & B pull the cart keeping their directions same as the old directions, is :

- (A) 26 m/s^2 (B) $3\sqrt{71} \text{ m/s}^2$
 (C) 25 m/s^2 (D) 30 m/s^2


(B) FRICTION

(SINGLE CORRECT)


48. Find the direction of friction forces on each block and the ground (Assume all surfaces are rough and all velocities are with respect to ground).

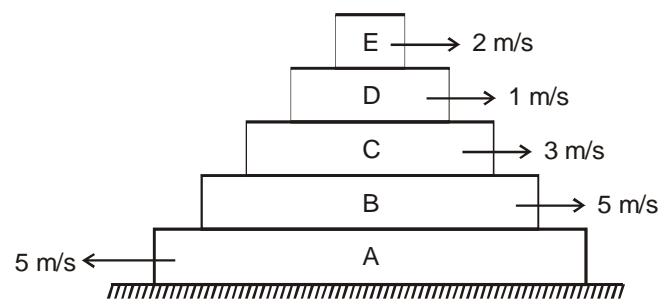

49. In the following figure, find the direction of friction on the blocks and ground

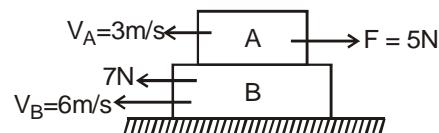


50. A force $\vec{F} = \hat{i} + 4\hat{j}$ acts on block shown. The force of friction acting on the block is

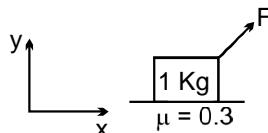


- (A) $-\hat{i}$ (B) $-1.8\hat{i}$ (C) $-2.4\hat{i}$ (D) $-3\hat{i}$
- www.edunova.ac.in

51. If force F is increasing with time and at $t=0$, $F=0$ where will slipping first start?

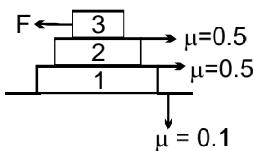


- (A) between 3 kg and 2 kg
 (B) between 2 kg and 1 kg
 (C) between 1 kg and ground
 (D) both (A) and (B)

52. In the arrangement shown in the figure, mass of the block B and A is $2m$ and m respectively. Surface between B and floor is smooth. The block B is connected to the block C by means of a string pulley system. If the whole system is released, then find the minimum value of mass of block C so that block A remains stationary w.r.t. B. Coefficient of friction between A and B is μ .

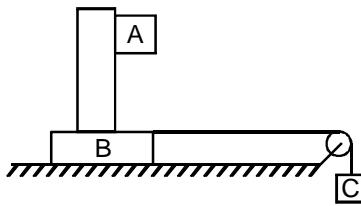

- (A) $\frac{m}{\mu}$ (B) $\frac{2m+1}{\mu+1}$ (C) $\frac{3m}{\mu-1}$ (D) $\frac{6m}{\mu+1}$

53. Two masses A and B of 10 kg and 5 kg respectively are connected with a string passing over a frictionless pulley fixed at the corner of a table as shown in figure. The coefficient of friction of A with the table is 0.2 . The minimum mass of C that may be placed on A to prevent it from moving is equal to :




- (A) 15 kg (B) 10 kg (C) 5 kg (D) zero

54. If the coefficient of friction between an insect and bowl is μ and the radius of the bowl, is r , the maximum height to which the insect can crawl in the bowl is :


- (A) $\frac{r}{\sqrt{1+\mu^2}}$ (B) $r \left[1 - \frac{1}{\sqrt{1+\mu^2}} \right]$
 (C) $r\sqrt{1+\mu^2}$ (D) $r\sqrt{1+\mu^2} - 1$

55. With what minimum velocity should block be projected from left end A towards end B such that it reaches the other end B of conveyer belt moving with constant velocity v . Friction coefficient between block and belt is μ .

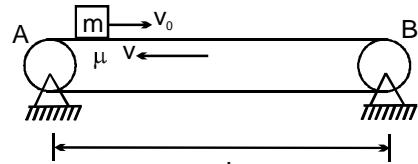

- (A) $\sqrt{\mu g L}$ (B) $\sqrt{2\mu g L}$ (C) $\sqrt{3\mu g L}$ (D) $2\sqrt{\mu g L}$

56. A block of mass m lying on a rough horizontal plane is acted upon by a horizontal force P and another force Q inclined at an angle θ to the vertical. The minimum value of coefficient of friction between the block and the surface for which the block will remain in equilibrium is :

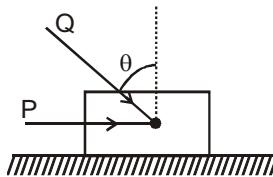

- (A) $\frac{P + Q \sin \theta}{mg + Q \cos \theta}$ (B) $\frac{P \cos \theta + Q}{mg - Q \sin \theta}$
 (C) $\frac{P + Q \cos \theta}{mg + Q \sin \theta}$ (D) $\frac{P \sin \theta - Q}{mg - Q \cos \theta}$

57. A small mass slides down an inclined plane of inclination θ with the horizontal. The co-efficient of friction is $\mu = \mu_0 x$ where x is the distance through which the mass slides down and μ_0 , a constant. Then the distance covered by the mass before it stops is :

- (A) $\frac{2}{\mu_0} \tan \theta$ (B) $\frac{4}{\mu_0} \tan \theta$ (C) $\frac{1}{2\mu_0} \tan \theta$ (D) $\frac{1}{\mu_0} \tan \theta$

58. In the above question the speed of the mass when travelled half the maximum distance is


- (A) $\sqrt{\frac{gt \tan \theta \sin \theta}{\mu_0}}$ (B) $\sqrt{\frac{gt \tan \theta \sin \theta}{2\mu_0}}$
 (C) $\sqrt{\frac{gt \tan \theta \sin \theta}{8\mu_0}}$ (D) none of these

59. A body is moving down a long inclined plane of slope 37° . The coefficient of friction between the body and plane varies as $\mu = 0.3 x$, where x is distance travelled down the plane. The body will have maximum

speed. ($\sin 37^\circ = \frac{3}{5}$ and $g = 10 \text{ m/s}^2$)


- (A) at $x = 1.16 \text{ m}$ (B) at $x = 2\text{ m}$
 (C) at bottom of plane (D) at $x = 2.5 \text{ m}$

60. Block B of mass 100 kg rests on a rough surface of friction coefficient $\mu = 1/3$. A rope is tied to block B as shown in figure. The maximum acceleration with which boy A of 25 kg can climb on rope without making block move is




- (A) $\frac{4g}{3}$ (B) $\frac{g}{3}$ (C) $\frac{g}{2}$ (D) $\frac{3g}{4}$

61. Two blocks of masses m_1 and m_2 are connected with a massless unstretched spring and placed over a plank moving with an acceleration 'a' as shown in figure. the coefficient of friction between the blocks and platform is μ .



- (A) spring will be stretched if $a > \mu g$
 (B) spring will be compressed if $a \leq \mu g$
 (C) spring will neither be compressed nor be stretched for $a \leq \mu g$
 (D) spring will be in its natural length under all conditions.


62. A block placed on a rough inclined plane of inclination ($\theta = 30^\circ$) can just be pushed upwards by applying a force "F" as shown. If the angle of inclination of the inclined plane is increased to ($\theta = 60^\circ$), the same block can just be prevented from sliding down by application of a force of same magnitude. The coefficient of friction between the block and the inclined plane is

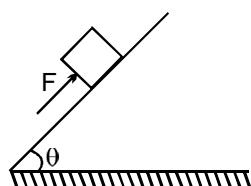

- (A) $\frac{\sqrt{3}+1}{\sqrt{3}-1}$
 (B) $\frac{2\sqrt{3}-1}{\sqrt{3}+1}$
 (C) $\frac{\sqrt{3}-1}{\sqrt{3}+1}$
 (D) none of these

63. A fixed wedge with both surfaces inclined at 45° to the horizontal as shown in the figure. A particle P of mass m is held on the smooth plane by a light string which passes over a smooth pulley A and attached to a particle Q of mass $3m$ which rests on the rough plane. The system is released from rest. Given that

the acceleration of each particle is of magnitude $\frac{g}{5\sqrt{2}}$ then

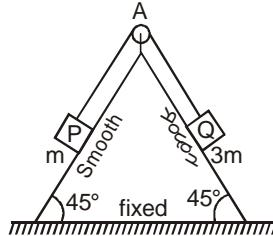

- (a) the tension in the string is :

- (A) mg (B) $\frac{6mg}{5\sqrt{2}}$ (C) $\frac{mg}{2}$ (D) $\frac{mg}{4}$



(b) In the above question the coefficient of friction between Q and the rough plane is :

- (A) $\frac{4}{5}$ (B) $\frac{1}{5}$ (C) $\frac{3}{5}$ (D) $\frac{2}{5}$

(c) In the above question the magnitude and direction of the force exerted by the string on the pulley is :


- (A) $\frac{6mg}{5}$ downward (B) $\frac{6mg}{5}$ upward
 (C) $\frac{mg}{5}$ downward (D) $\frac{mg}{4}$ downward

64. A force $F = t$ is applied to block A as shown in figure. The force is applied at $t = 0$ seconds when the system was at rest and string is just straight without tension. Which of the following graphs gives the friction force between B and horizontal surface as a function of time 't'.

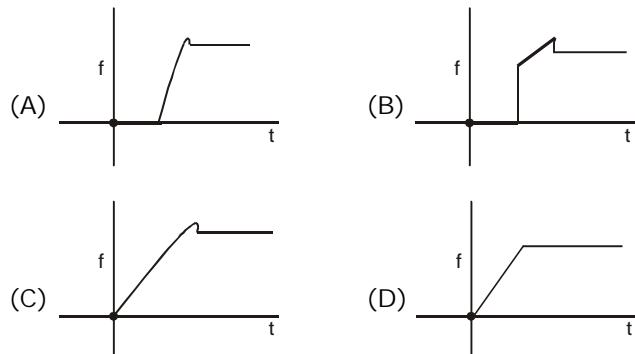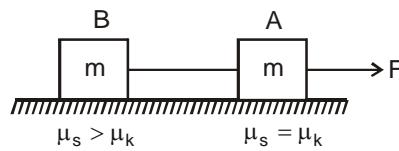

For 65. to 69 refer given figure (5 questions)

65. When $F = 2\text{N}$, the frictional force between 5 kg block and ground is

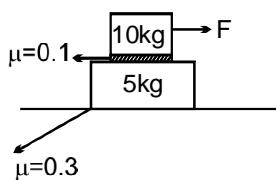

- (A) 2 N (B) 0 (C) 8 N (D) 10 N

66. When $F = 2\text{N}$, the frictional force between 10 kg block and 5 kg block is

- (A) 2 N (B) 15 N (C) 10 N (D) None

67. The maximum "F" which will not cause motion of any of the blocks

- (A) 10 N (B) 15 N
(C) data insufficient (D) None





68. The maximum acceleration of 5 kg block

- (A) 1 m/s^2 (B) 3 m/s^2 (C) 0 (D) None

69. The acceleration of 10 kg block when $F = 30 \text{ N}$


- (A) 2 m/s^2 (B) 3 m/s^2 (C) 1 m/s^2 (D) None

70. A truck starting from rest moves with an acceleration of 5 m/s^2 for 1 sec and then moves with constant velocity. The velocity w.r.t. ground v/s time graph for block in truck is (Assume that block does not fall off the truck)

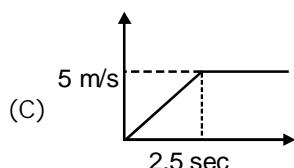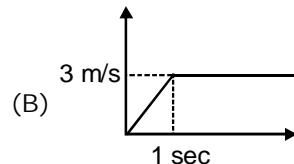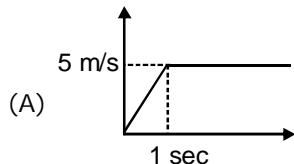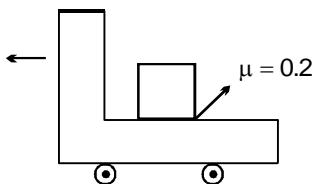

(D) None of these

71. A board is balanced on a rough horizontal semicircular log. Equilibrium is obtained with the help of addition of a weight to one of the ends of the board when the board makes an angle θ with the horizontal. Coefficient of friction between the log and the board is



- (A) $\tan \theta$ (B) $\cos \theta$ (C) $\cot \theta$ (D) $\sin \theta$

72. A stationary body of mass m is slowly lowered onto a massive platform of mass M ($M \gg m$) moving at a speed $V_0 = 4 \text{ m/s}$ as shown in fig. How far will the body slide along the platform ($\mu = 0.2$ and $g = 10 \text{ m/s}^2$)?




- (A) 4 m (B) 6 m (C) 12 m (D) 8 m
(MULTIPLE CORRECT)

73. A block of mass 2.5 kg is kept on a rough horizontal surface. It is found that the block does not slide if a horizontal force less than 15 N is applied to it. Also it is found that it takes 5 second to slide throughout the first 10 m if a horizontal force of 15 N is applied and the block is gently pushed to start the motion. Taking $g = 10 \text{ m/s}^2$, then

- (A) $\mu_s = 0.60$ (B) $\mu_k = 0.52$
(C) $\mu_k = 0.60$ (D) $\mu_s = 0.52$

74. The coefficient of friction between 4 kg and 5 kg blocks is 0.2 and between 5 kg block and ground is 0.1 respectively. Choose the correct statements




- (A) Minimum force needed to cause system to move is 17 N
(B) When force is 4 N static friction at all surfaces is 4 N to keep system at rest.
(C) Maximum acceleration of 4 kg block is 2 m/s^2
(D) Slipping between 4 kg and 5 kg blocks start when F is 17 N

75. In a tug-of-war contest, two men pull on a horizontal rope from opposite sides. The winner will be the man who

- (A) exerts greater force on the rope
(B) exerts greater force on the ground
(C) exerts a force on the rope which is greater than the tension in the rope
(D) makes a smaller angle with the vertical


76. A man pulls a block heavier than himself with a light horizontal rope. The coefficient of friction is the same between the man and the ground, and between the block and the ground.



- (A) The block will not move unless the man also moves
(B) The man can move even when the block is stationary
(C) If both move, the acceleration of the man is greater than the acceleration of the block
(D) None of the above assertions is correct

Question No. 77 to 78 (2 questions)

In figure, two blocks M and m are tied together with an inextensible and light string. The mass M is placed on a rough horizontal surface with coefficient of friction μ and the mass m is hanging vertically against a smooth vertical wall. The pulley is frictionless.

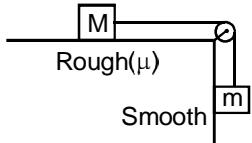

77. Choose the correct statement(s)


- (A) The system will accelerate for any value of m
- (B) The system will accelerate only when $m > M$
- (C) The system will accelerate only when $m > \mu M$
- (D) Nothing can be said

78. Choose the correct statement(s) related to the tension T in the string

- (A) When $m < \mu M$, $T = mg$
- (B) When $m < \mu M$, $T = Mg$
- (C) When $m > \mu M$, $\mu Mg < T < mg$
- (D) When $m > \mu M$, $mg < T < \mu Mg$

Question No. 79 to 81 (3 questions)

Imagine a situation in which the horizontal surface of block M_0 is smooth and its vertical surface is rough with a coefficient of friction μ .

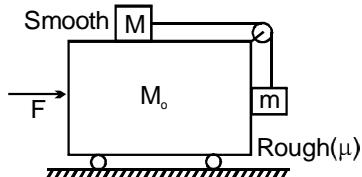


79. Identify the correct statement(s)

- (A) If $F=0$, the blocks cannot remain stationary
- (B) For one unique value of F, the blocks M and m remain stationary with respect to M_0
- (C) The limiting friction between m and M_0 is independent of F
- (D) There exist a value of F at which friction force is equal to zero.


80. In above problem, choose the correct value(s) of F which the blocks M and m remain stationary with respect to M_0

- (A) $(M_0 + M + m) \frac{g}{\mu}$
- (B) $\frac{m(M_0 + M + m)g}{M - \mu m}$
- (C) $(M_0 + M + m) \frac{mg}{M}$
- (D) none of these

81. Consider a special situation in which both the faces of the block M_0 are smooth, as shown in adjoining figure. Mark out the correct statement(s)

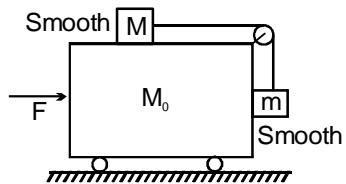


- (A) If $F = 0$, the blocks cannot remain stationary
 - (B) For one unique value of F, the blocks M and m remain stationary with respect to block M_0
 - (C) There exists a range of F for which blocks M and m remain stationary with respect to block M_0
 - (D) Since there is no friction, therefore, blocks M and m cannot be in equilibrium with respect to M_0
82. The value(s) of mass m for which the 100 kg block remains in static equilibrium is

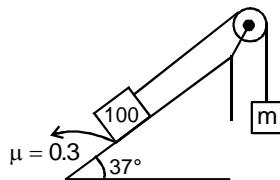

- (A) 35 kg
 - (B) 37 kg
 - (C) 83 kg
 - (D) 85 kg
83. The contact force exerted by one body on another body is equal to the normal force between the bodies. It can be said that :

- (A) the surface must be frictionless
- (B) the force of friction between the bodies is zero
- (C) the magnitude of normal force equals that of friction
- (D) It is possible that the bodies are rough and they do not slip on each other.

84. Car is accelerating with acceleration = 20 m/s^2 . A box that is placed inside the car, of mass $m = 10 \text{ kg}$ is put in contact with the vertical wall as shown. The friction coefficient between the box and the wall is $\mu = 0.6$.




- (A) The acceleration of the box will be 20 m/sec^2
- (B) The friction force acting on the box will be 100 N
- (C) The contact force between the vertical wall and the box will be $100\sqrt{5}$ N
- (D) The net contact force between the vertical wall and the box is only of electromagnetic in nature.


EXERCISE-III

LEVEL - I


1. Two masses A and B, lie on a frictionless table. They are attached to either end of a light rope which passes around a horizontal movable pulley of negligible mass. Find the acceleration of each mass $M_A = 1 \text{ kg}$, $M_B = 2 \text{ kg}$, $M_C = 4 \text{ kg}$. The pulley P_2 is vertical.

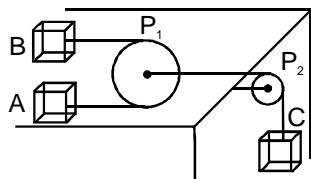

2. Block A of mass $m/2$ is connected to one end of a light rope which passes over a pulley as shown in the figure. Man of mass m climbs the other end of rope with a relative acceleration of $g/6$ with respect to rope find acceleration of block A and tension in the rope.




3. To Paint the side of a building, painter normally hoists himself up by pulling on the rope A as in figure. The painter and platform together weigh 200 N. The rope B can withstand 300 N. Find

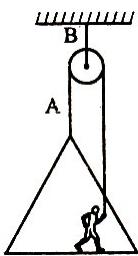


- (a) the maximum acceleration of the painter.
- (b) tension in rope A
- (i) when painter is at rest
- (ii) when painter moves up with an acceleration 2 m/s^2 .


4. An inclined plane makes an angle 30° with the horizontal. A groove OA = 5 m cut in the plane makes an angle 30° with OX. A short smooth cylinder is free to slide down the influence of gravity. Find the time taken by the cylinder to reach from A to O. ($g = 10 \text{ m/s}^2$)

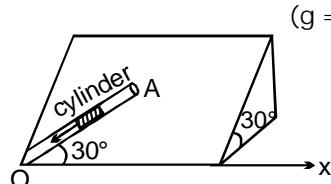


5. Same spring is attached with 2 kg, 3 kg and 1 kg blocks in three different cases as shown in figure. If x_1 , x_2 and x_3 be the extensions in the spring in these three cases then find the ratio of their extensions.

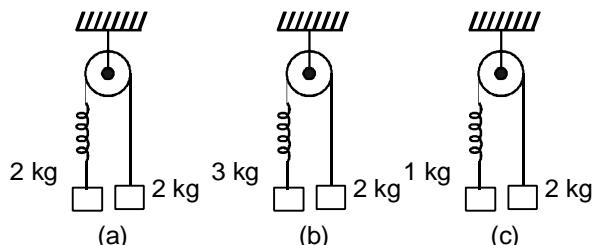


6. Find the reading of spring balance as shown in figure. Assume that mass M is in equilibrium. (All surfaces are smooth)

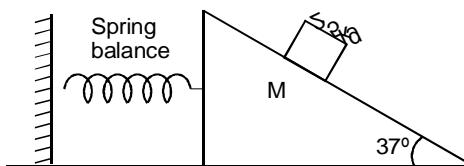


7. At what value of m_1 will 8 kg mass be at rest.

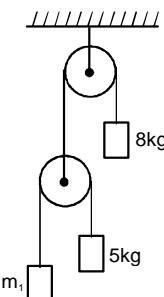


8. What force must man exert on rope to keep platform in equilibrium?




9. Inclined plane is moved towards right with an acceleration of 5 ms^{-2} as shown in figure. Find force in newton which block of mass 5 kg exerts on the incline plane. (All surfaces are smooth)

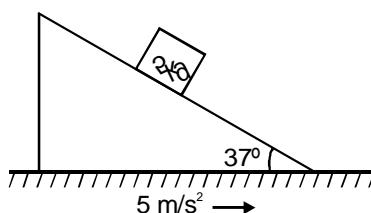


10. Find force in newton which mass A exerts on mass B if B is moving towards right with 3 ms^{-2} . Also find mass of A. (All surfaces are smooth)

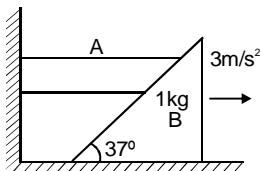


11. Force F is applied on upper pulley. If $F = 30t$ where t is time in seconds. Find the time when m_1 loses contact with floor.

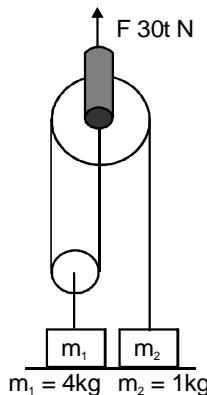


12. The 40 kg block is moving to the right with a speed of 1.5 m/s when it is acted upon by forces F_1 & F_2 . These forces vary in the manner shown in the graph. Find the velocity of the block after $t = 12$ s Neglect friction and masses of the pulleys and cords.

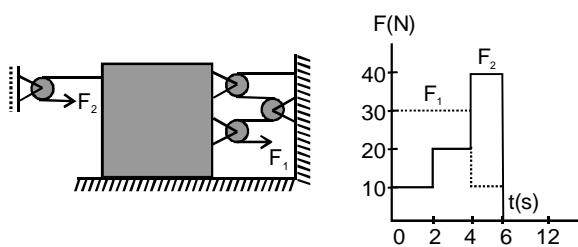

13. The vertical displacement of block A in meter is given by $y = t^2/4$ where t is in second. Calculate the downward acceleration a_B of block B.




14. An object of mass m is suspended in equilibrium using a string of length l and a spring having spring constant K ($< 2 mg/l$) and unstretched length $l/2$.




- (a) Find the tension in the string
(b) What happens if $K > 2 mg/l$?

15. Three monkeys A, B, and C with masses of 10, 15 & 8 kg respectively are climbing up & down the rope suspended from D. at the instant represented, A is descending the rope with an acceleration of 2 m/s^2 & C is pulling himself up with an acceleration of 1.5 m/s^2 . Monkeys B is climbing up with a constant speed of 0.8 m/s . Treat the rope and monkeys as a complete system & calculate the tension T in the rope at D. ($g = 10 \text{ m/s}^2$)

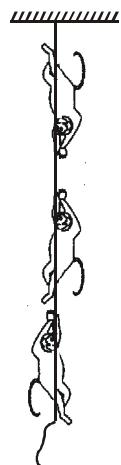

16. A person of mass m is standing on a platform of mass M and wants to raise this platform. Massless pulleys are configured in two different ways as shown. We would like to know which configuration makes it easier to raise the platform. Answer the following questions in terms of m, M, a and constant as appropriate. [Note : Assume the rope is also massless and does not stretch.]

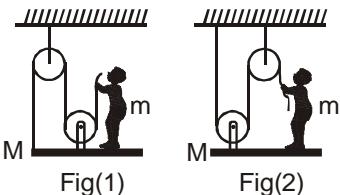

Fig(1) Fig(2)


- (a) For configuration (1) find the force, F, the person must exert straight up in order to accelerate the platform + person system with an acceleration a. Include a freebody diagram in your solution.
(b) What force does the platform exert on the person when the acceleration of the system is a? Include a freebody diagram in your solution.
(c) If platform is massless, $M = 0$, and he wants to raise it with a constant velocity find F. Does this configuration offer a mechanical advantage ? (That is, is $F < mg$?)
(d) Now repeat the above for configuration (2). First, find the force, F, the person must exert straight down in order to accelerate the platform+ person system with an upward acceleration a. Include a freebody diagram in your solution.
(e) Now, what force does the platform exert on the person when the acceleration of the system is a? Include a freebody diagram in your solution.
(f) Again, if the platform is massless, $M = 0$, and he wants to raise it with a constant velocity find F. Does this configuration offer a mechanical advantage ? (That is, is $F < mg$?)

(B) FRICTION


17. Give the acceleration of blocks :

(A) $\mu_s = 0.5$ $\mu_k = 0.4$ $5\text{kg} \rightarrow 40\text{N}$


(B) $\mu_s = 0.5$ $\mu_k = 0.4$ 10kg 37°

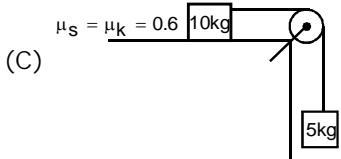

18. Determine the coefficient of friction (μ), so that rope of mass m and length l does not slide down.




19. A wooden block A of mass M is placed on a frictionless horizontal surface. On top of A, another lead block B also of mass M is placed. A horizontal force of magnitude F is applied to B. Force F is increased continuously from zero. Then draw the graph between A and F. [$\mu_k < \mu_s$]




20. A rope so lies on a table that part of it lays over. The rope begins to slide when the length of hanging part is 25 % of entire length. The co-efficient of friction between rope and table is :

21. A worker wishes to pile a cone of sand into a circular area in his yard. The radius of the circle is r, and no sand is to spill onto the surrounding area. If μ is the static coefficient of friction between each layer of sand along the slope and the sand, the greatest volume of sand that can be stored in this manner is :

22. A block of mass 15 kg is resting on a rough inclined plane as shown in figure. The block is tied up by a horizontal string which has a tension of 50 N. The coefficient of friction between the surfaces of contact is ($g = 10 \text{ m/s}^2$)




23. In the figure, what should be mass m so that block A slide up with a constant velocity.

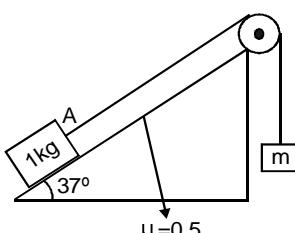


24. A block of mass 1 kg is horizontally thrown with a velocity of 10 m/s on a stationary long plank of mass 2 kg whose surface has $\mu = 0.5$. Plank rests on frictionless surface. Find the time when m_1 comes to rest w.r.t. plank.

25. Block M slides down on frictionless incline as shown. Find the minimum friction coefficient so that m does not slide with respect to M.




26. The coefficient of static and kinetic friction between the two blocks and also between the lower block and the ground are $\mu_s = 0.6$ and $\mu_k = 0.4$. Find the value of tension T applied on the lower block at which the upper block begins to slip relative to lower block.

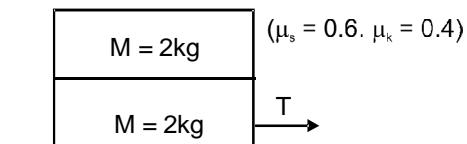

27. A thin rod of length 1 m is fixed in a vertical position inside a train, which is moving horizontally with constant acceleration 4 m/s^2 . A bead can slide on the rod, and friction coefficient between them is $1/2$. If the bead is released from rest at the top of the rod, find the time when it will reach at the bottom.


28. A body of mass 2kg rests on a horizontal plane having coefficient of friction $\mu = 0.5$. At $t = 0$ a horizontal force \bar{F} is applied that varies with time $F = 2t$. The time constant t_0 at which motion starts and distance moved in $t = 2t_0$ second will be _____ and _____ respectively.

29. Find the acceleration of the blocks and magnitude & direction of frictional force between block A and table, if block A is pulled towards left with a force of 50N.

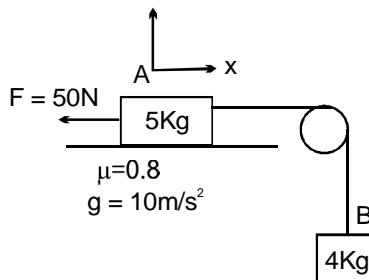


30. A block A of mass 2kg rests on another block B of mass 8kg which rests on a horizontal floor. The coefficient of friction between A and B is 0.2 while that between B and floor is 0.5. When a horizontal force F of 25N is applied on the block B, the force of friction between A and B is _____.

31. Coefficient of friction between 5 kg and 10 kg block is 0.5. If friction between them is 20N. What is the value of force being applied on 5 kg. The floor is frictionless.




LEVEL - II

1. The diagram shows particles A and B, of masses 0.2 kg and m kg respectively, connected by a light inextensible string which passes over a fixed smooth peg. The system is released from rest, with B at a height of 0.25m above the floor. B descends, hitting the floor 0.5s later. All resistances to motion may be ignored.

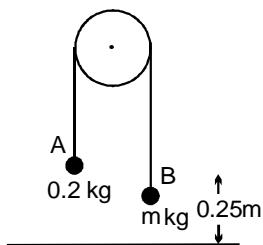


- (a) Find the acceleration of B as it descends.
- (b) Find the tension in the string while B is descending and find also the value of m.
- (c) When B hits the floor it comes to rest immediately, and the string becomes slack. Find the length of time for which B remains at rest on the ground before being jerked into motion again.


2. An ornament for a courtyard at a word's fair is to be made up of four identical, frictionless metal sphere, each weighing $2\sqrt{6}$ Newton. The spheres are to be arranged as shown, with three resting on a horizontal surface and touching each other; the fourth is to rest freely on the other three. The bottom three are kept from separating by spot welds at the points of contact with each other. Allowing for a factor of safety of 3N, how much tension must the spot welds withstand.

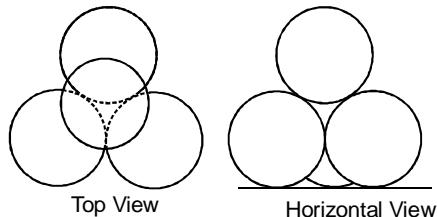


3. A 1kg block 'B' rests as shown on a bracket 'A' of same mass. Constant forces $F_1 = 20 \text{ N}$ and $F_2 = 8\text{N}$ start to act at time $t = 0$ when the distance of block B from pulley is 50 cm. Time when block B reaches the pulley is _____.

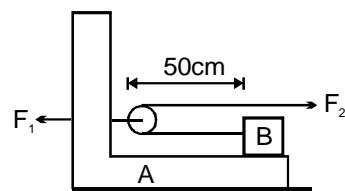

4. Two men of masses m_1 and m_2 hold on the opposite ends of a rope passing over a frictionless pulley. The mass m_1 climbs up the rope with an acceleration of 1.2 m/s^2 relative to the rope. The man m_2 climbs up the rope with an acceleration of 2.0 m/s^2 relative to the rope. Find the tension in the rope if $m_1 = 40 \text{ kg}$ and $m_2 = 60 \text{ kg}$. Also find the time after which they will be at same horizontal level if they start from rest and are initially separated by 5m.




5. In figure shown, pulleys are ideal $m_1 > 2 m_2$. Initially the system is in equilibrium and string connecting m_2 to rigid support below is cut. Find the initial acceleration of m_2 ?



6. The system shown adjacent is in equilibrium. Find the acceleration of the blocks A, B & C all of equal masses m at the instant when
(Assume springs to be ideal)

(a) The spring between ceiling & A is cut.

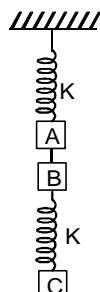


(b) The string (inextensible) between A & B is cut.

(c) The spring between B & C is cut.


Also find the tension in the string when the system is at rest and in the above 3 cases.

7. In the system shown. Find the initial acceleration of the wedge of mass $5M$. The pulleys are ideal and the cords are inextensible. (there is no friction anywhere).



8. A smooth right circular cone of semi vertical angle $\alpha = \tan^{-1}(5/12)$ is at rest on a horizontal plane. A rubber ring of mass 2.5 kg which requires a force of 15N for an extension of 10cm is placed on the cone. Find the increase in the radius of the ring in equilibrium.

9. A block of mass m lies on wedge of mass M as shown in figure. Answer following parts separately.
(a) With what minimum acceleration must the wedge be moved towards right horizontally so that block m falls freely.




(b) Find the minimum friction coefficient required between wedge M and ground so that it does not move while block m slips down on it.

10. A car begins to move at time $t = 0$ and then accelerates along a straight track with a speed given by $V(t) = 2t^2 \text{ ms}^{-1}$ for $0 \leq t \leq 2$. After the end of acceleration, the car continues to move at a constant speed. A small block initially at rest on the floor of the car begins to slip at $t = 1\text{ sec.}$ and stops slipping at $t = 3\text{ sec.}$ Find the coefficient of static and kinetic friction between the block and the floor.

11. In the figure shown,

- For what maximum value of force F can all these blocks move together.
- Find the value of force F at which sliding starts at other rough surfaces

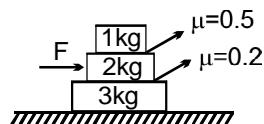



- Find acceleration of all blocks, nature and value of friction force of force $F = 18\text{ N}$.

EXERCISE-IV

SECTION - A

- When forces F_1, F_2, F_3 are acting on a particle of mass m such that F_2 and F_3 are mutually perpendicular, then the particle remains stationary. If the force F_1 is now removed then the acceleration of the particle is [AI EEE 2002]
(A) F_1/m (B) F_2F_3/mF_1 (C) $(F_2-F_3)/m$ (D) F_2/m
 - A spring balance is attached to the ceiling of a lift. A man hangs his bag on the spring and the spring reads 49 N, when the lift is stationary. If the lift moves downward with an acceleration of 5 m/s^2 , the reading of the spring balance will be [AI EEE 2003]
(A) 24 N (B) 74 N (C) 15 N (D) 49 N
 - Three forces start acting simultaneously on a particle moving with velocity \vec{v} . These forces are represented in magnitude and direction by the three sides of a triangle ABC (as shown). The particle will now move with velocity [AI EEE 2003]





- (A) 20 N (B) 50 N (C) 100 N (D) 2 N

5. A marble block of mass 2 kg lying on ice when given a velocity of 6 m/s is stopped by friction in 10 s. then the coefficient of friction is [AI EEE 2003]
 (A) 0.02 (B) 0.03 (C) 0.06 (D) 0.01


6. A block of mass M is pulled along a horizontal frictionless surface by a rope of mass m. If a force P is applied at the free end of the rope, the force exerted by the rope on the block is [AI EEE 2003]

(A) $\frac{Pm}{M+m}$ (B) $\frac{Pm}{M-m}$ (C) P (D) $\frac{PM}{M+m}$

7. A light spring balance hangs from the hook of the other light spring balance and a block of mass M kg hangs from the former one. Then the true statement about scale reading is [AI EEE 2003]
(A) Both the scales read M kg each
(B) The scale of the lower one reads M kg and of upper one zero
(C) The reading of the two scales can be anything but sum of the reading will be M kg
(D) Both the scales read $M/2$ kg

8. A rocket with a lift-off mass 3.5×10^4 kg is blasted upwards with an initial acceleration of 10 m/s^2 . Then the initial thrust of the blast is [AI EEE 2003]
(A) $3.5 \times 10^5 \text{ N}$ (B) $7.0 \times 10^5 \text{ N}$ (C) $14.0 \times 10^5 \text{ N}$ (D) $1.75 \times 10^5 \text{ N}$

9. A machine gun fires a bullet of mass 40 gm with a speed 1200 m/s. The man holding it can exert a maximum force of 144 N on the gun. How many bullets can be fire per second at the most? [AI EEE-2004]
(A) one (B) four (C) two (D) three



- (A) 0.2 m/s^2 (B) 9.8 m/s^2 (C) 5 m/s^2 (D) 4.8 m/s^2

13. A particle is acted upon by a force of constant magnitude which is always perpendicular to the velocity of the particle, the motion of the particle takes place in a plane. It follows that [AI EEE 2004]

(A) Its velocity is constant (B) Its acceleration is constant
 (C) Its kinetic energy is constant (D) It moves in a straight line

14. The upper half of an inclined plane with inclination f is perfectly smooth while the lower half is rough. A body starting from rest at the top will again come to rest at the bottom, if coefficient of friction for the lower half is given by [AI EEE-2005]

(A) $2 \tan f$ (B) $\tan f$ (C) $2 \sin f$ (D) $2 \cos f$

15. An annular ring with inner and outer radii R_1 and R_2 is rolling without slipping with a uniform angular speed. The ratio of the forces experienced by the two particles situated on the inner and outer parts of the ring, F_1/F_2 , is [AI EEE 2005]

(A) $\frac{R_2}{R_1}$ (B) $\left(\frac{R_1}{R_2}\right)^2$ (C) 1 (D) $\frac{R_1}{R_2}$

16. A smooth block is released at rest on a 45° incline and then slides a distance d . The time taken to slide is n times as much to slide on rough incline than on a smooth incline. The coefficient of friction is [AIIEEE 2005]

(A) $\mu_k = 1 - \frac{1}{n^2}$ (B) $\mu_k = \sqrt{1 - \frac{1}{n^2}}$ (C) $\mu_s = 1 - \frac{1}{n^2}$ (D) $\mu_s = \sqrt{1 - \frac{1}{n^2}}$

17. A block is kept on a frictionless inclined surface with angle of inclination α . The incline is given an acceleration a to keep the block stationary. Then a is equal to [AIIEEE 2005]


(A) $g/\tan \alpha$ (B) $g \cos \alpha$ (C) g (D) $g \tan \alpha$

18. A particle of mass 0.3 kg is subjected to a force $F = -kx$ with $k = 15 \text{ N/m}$. What will be its initial acceleration if it starts from a point 20 cm away from the origin? [AIIEEE 2005]


(A) 3 m/s^2 (B) 15 m/s^2 (C) 5 m/s^2 (D) 10 m/s^2

19. Consider a car moving on a straight road with a speed of 100 m/s. The minimum distance at which car can be stopped is $[\mu_k = 0.5]$ [AI EEE 2005]
 (A) 800 m (B) 1000 m (C) 100 m (D) 400 m
20. A player caught a cricket ball of mass 150 g moving at a rate of 20 m/s. If the catching process is completed in 0.1 s, the force of the blow exerted by the ball on the hand of the player is equal to [AI EEE 2006]
 (A) 300 N (B) 150 N (C) 3 N (D) 30 N
21. A ball of mass 0.2 kg is thrown vertically upwards by applying a force by hand. If the hand moves 0.2 m while applying the force and the ball goes up to 2 m height further, find the magnitude of the force. Consider $g = 10 \text{ m/s}^2$ [AI EEE 2006]
 (A) 22 N (B) 4 N (C) 16 N (D) 20 N
22. A block of mass 'm' is connected to another block of mass 'M' by a spring (massless) of spring constant 'k'. The blocks are kept on a smooth horizontal plane. Initially the blocks are at rest and the spring is unstretched. Then a constant force 'F' starts acting on the block of mass 'M' to pull it. Find the force on the block of mass 'm' [AI EEE-2007]
 (A) $\frac{MF}{(m+M)}$ (B) $\frac{mF}{M}$ (C) $\frac{(M+m)F}{m}$ (D) $\frac{mF}{(m+F)}$

23. The figure shows the position-time ($x - t$) graph of one-dimensional motion of a body of mass 0.4 kg. The magnitude of each impulse is [AI EEE-2010]

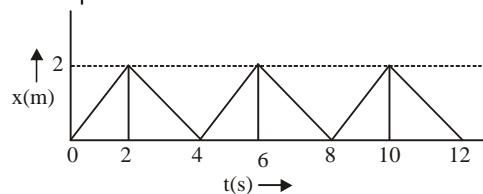

- (A) 0.2 Ns (B) 0.4 Ns (C) 0.8 Ns (D) 1.6 Ns
 24. Two fixed frictionless inclined planes making an angle 30° and 60° with the vertical are shown in the figure. Two blocks A and B are placed on the two planes. What is the relative vertical acceleration of A with respect to B? [AI EEE 2010]

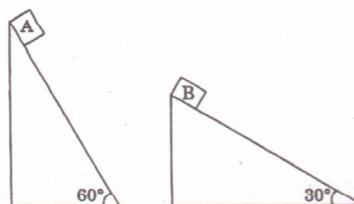


- (A) 4.9 ms^{-2} in horizontal direction (B) 9.8 ms^{-2} in vertical direction
 (C) Zero (D) 4.9 ms^{-2} in vertical direction
 25. For a particle in uniform circular motion the acceleration \vec{a} at a point P(R, θ) on the circle of radius R is (here θ is measured from the x-axis) [AI EEE 2010]

$$(A) -\frac{v^2}{R} \cos \theta \hat{i} + \frac{v^2}{R} \sin \theta \hat{j} \quad (B) -\frac{v^2}{R} \sin \theta \hat{i} + \frac{v^2}{R} \cos \theta \hat{j} \quad (C) -\frac{v^2}{R} \cos \theta \hat{i} - \frac{v^2}{R} \sin \theta \hat{j} \quad (D) \frac{v^2}{R} \hat{i} + \frac{v^2}{R} \hat{j}$$

26. The minimum force required to start pushing a body up a rough (frictional coefficient m) inclined plane is F_1 while the minimum force needed to prevent it from sliding down is F_2 . If the inclined plane makes an angle θ from the horizontal such that $\tan \theta = 2m$, the ratio F_1/F_2 is [AI EEE-2011]
 (A) 2 (B) 3 (C) 4 (D) 1

27. A particle of mass m is at rest at the origin at time $t = 0$. It is subjected to a force $F(t) = F_0 e^{-bt}$ in the x -direction. Its speed $u(t)$ is depicted by which of the following curves?


[AI EEE-2012]

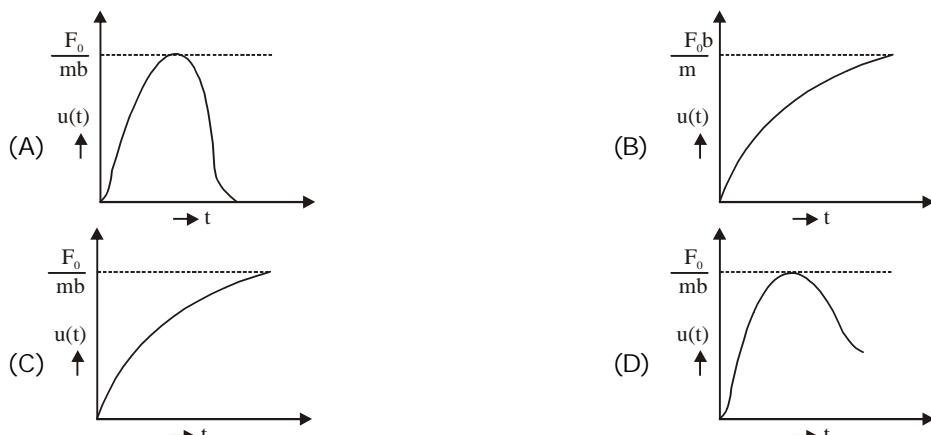


28. The minimum force required to start pushing a body up a rough (frictional coefficient μ) inclined plane is F_1 while the minimum force needed to prevent it from sliding down is F_2 . If the inclined plane makes an angle θ from the horizontal such that $\tan \theta = 2\mu$ then the ratio F_1/F_2 is [AI EEE 2012]

(A) 3 (B) 4 (C) 1 (D) 2

29. A block is placed on a rough horizontal plane. A time dependent horizontal force $F = kt$ acts on the block, where k is a positive constant. The acceleration-time graph of the block is [AI EEE 2013]

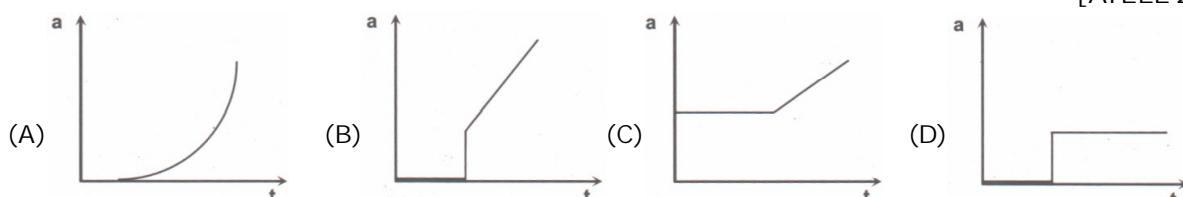

30. Two blocks of masses m and M are connected by means of a metal wire of cross sectional area A passing over a frictionless fixed pulley as shown in the figure. The system is then released. If $M = 2m$, then the stress produced in the wire is [AI EEE 2013]

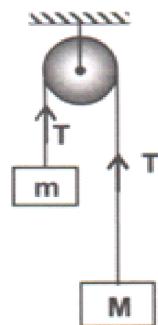


(A) $\frac{2mg}{3A}$ (B) $\frac{4mg}{3A}$ (C) $\frac{mg}{A}$ (D) $\frac{3mg}{4A}$


31. A body starts from rest on a long inclined plane of slope 45° . The coefficient of friction between the body and the plane varies as $\mu = 0.3x$, where x is the distance travelled down the plane. The body will have maximum speed (for $g = 10 \text{ m/s}^2$) when $x =$ [AI EEE 2013]

(A) 9.8 m (B) 12 m (C) 12 m (D) 3.33 m

32. Two blocks of mass $M_1 = 20 \text{ kg}$ and $M_2 = 12 \text{ kg}$ are connected by a metal rod of mass 8 kg. the system is pulled vertically up by applying a force of 480 N as shown. The tension at the mid-point of the rod is [AIIEEE 2013]



- (A) 144 N (B) 96 N (C) 240 N (D) 192 N
33. A uniform sphere of weight W and radius 5 cms is being held by a string as shown in the figure. The tension in the string will be [AIIEEE 2014]



- (A) $12\frac{W}{3}$ (B) $5\frac{W}{12}$ (C) $13\frac{W}{5}$ (D) $13\frac{W}{12}$
34. A heavy box is to be dragged along a rough horizontal floor. To do so, person A pushes it at an angle 30° from the horizontal and requires a minimum force F_A , while person B pulls the box at an angle 60° from the horizontal and needs minimum force F_B . If the coefficient of friction between the box and the floor is $\frac{\sqrt{3}}{5}$, the ratio $\frac{F_A}{F_B}$ is [AIIEEE 2014]

(A) $\sqrt{3}$ (B) $\frac{5}{\sqrt{3}}$ (C) $\sqrt{\frac{3}{2}}$ (D) $\frac{2}{\sqrt{3}}$

35. A block of mass m is placed on a surface with a vertical cross section given by $y = x^3/6$. If the coefficient of friction is 0.5, the maximum height above the ground at which the block can be placed without slipping is [AIIEEE 2014]

(A) $\frac{1}{3}m$ (B) $\frac{1}{2}m$ (C) $\frac{1}{6}m$ (D) $\frac{2}{3}m$


36. A body of mass 5 kg under the action of constant force $\vec{F} = F_x \hat{i} + F_y \hat{j}$ has velocity at $t = 0$ s as $\vec{v} = (6\hat{i} - 2\hat{j}) \text{ m/s}$ and at $t = 10$ s as $\vec{v} = +6\hat{j} \text{ m/s}$. The force \vec{F} is [AIIEEE 2014]

(A) $\left(\frac{3\hat{i}}{5} - \frac{4\hat{j}}{5}\right) \text{ N}$ (B) $\left(-3\hat{i} + 4\hat{j}\right) \text{ N}$ (C) $\left(3\hat{i} - 4\hat{j}\right) \text{ N}$ (D) $\left(-\frac{3\hat{i}}{5} + \frac{4\hat{j}}{5}\right) \text{ N}$

37. A block of mass 4 kg is placed on another block B of mass 5 kg, and the block B rests on a smooth horizontal table. If the maximum force that can be applied on A so that both the blocks move together is 12 N, the maximum force that can be applied on B for the blocks to move together will be [AIIEEE 2014]


(A) 15 N (B) 25 N (C) 27 N (D) 48 N

38. Given in the figure are two blocks A and B of weight 20 N and 100 N respectively. These are being pressed against a wall by a force F as shown. If the coefficient of friction between the blocks is 0.1 and between block B and the wall is 0.15, the frictional force applied by the wall on block B is [AIIEEE 2015]



(A) 80 N (B) 120 N (C) 150 N (D) 100 N

39. A point particle of mass m , moves along the uniformly rough track PQR as shown in the figure. The coefficient of friction, between the particle and the rough track equals μ . The particle is released, from rest, from the point P and it comes to rest at a point R. The energies, lost by the ball, over the parts, PQ and QR, of the track, are equal to each other, and no energy is lost when particle changes direction from PQ to QR. The values of the coefficient of friction μ and the distance $x (=QR)$, are, respectively close to [AI EEE 2016]

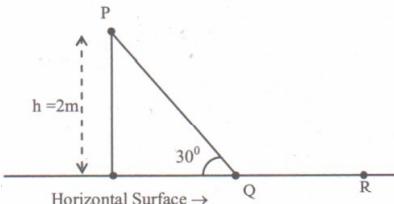

- (A) 0.2 and 3.5 m (B) 0.29 and 3.5 m (C) 0.29 and 6.5 m (D) 0.2 and 6.5 m
40. A body of mass $m = 10^{-2}$ kg is moving in a medium and experiences a frictional force $F = -kv^2$. Its initial speed is $v_0 = 10 \text{ ms}^{-1}$. If, after 10 s, its energy is $\frac{1}{8}mv_0^2$, the value of k will be [AI EEE 2017]

(A) $10^{-1} \text{ kg m}^{-1} \text{s}^{-1}$ (B) $10^{-3} \text{ kg m}^{-1}$ (C) $10^{-3} \text{ kg s}^{-1}$ (D) $10^{-4} \text{ kg m}^{-1}$


SECTION - B

Fill in the Blank

1. A block of mass 1 kg lies on a horizontal surface in a truck. The coefficient of static friction between the block and the surface is 0.6. If the acceleration of the truck is 5 m/s^2 , the frictional force acting on the block is _____ Newtons. [IIT JEE 1984]

True / False


1. Two identical trains are moving on rails along the equator on the earth in opposite directions with the same speed. They will exert the same pressure on the rails. [IIT JEE 1985]
2. Pulley arrangements shown in the figure are identical. Mass of rope is negligible. In figure (a) mass 'm' is lifted up by attaching a mass '2m' to the other end of the rope. In figure (b) 'm' is lifted by pulling the other end of the rope with a constant downwards force $F = 2mg$. The acceleration of 'm' is same in both cases. [IIT JEE 1984]

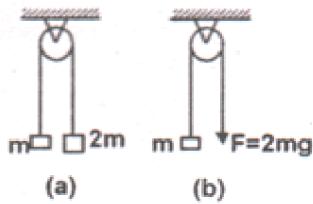

3. A simple pendulum with a bob of mass m swings with an angular amplitude of 40° . When its angular displacement is 20° , the tension in the string is greater than $mg \cos 20^\circ$. [IIT JEE 1984]
4. When a person walks on a rough surface, the frictional force exerted by the surface on the person is opposite to the direction of his motion. [IIT JEE 1981]

MCQ-Single Correct

1. A block of mass $m_1 = 1\text{kg}$ another mass $m_2 = 2\text{kg}$, are placed together (see figure) on an inclined plane with angle of inclination θ . Various values of θ are given in List I. The coefficient of friction between the block m_1 and the plane is always zero. The coefficient of static and dynamic friction between the block m_2 and the plane are equal to $\mu = 0.3$. In List II expressions for the friction on the block m_2 are given. Match the correct expression of the friction in List II with the angles given in List I, and choose the correct option. The acceleration due to gravity is denoted by g . [Useful information: $\tan(5.5^\circ) \approx 0.1$; $\tan(11.5^\circ) \approx 0.2$; $\tan(16.5^\circ) \approx 0.3$] [IIT JEE 2014]

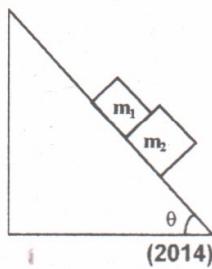


List I

- P. $\theta = 5^\circ$
 Q. $\theta = 10^\circ$
 R. $\theta = 15^\circ$
 S. $\theta = 20^\circ$



Code:

- (A) P-1, Q-1, R-1, S-3 (B) P-2, Q-2, R-2, S-3 (C) P-2, Q-2, R-2, S-4 (D) P-2, Q-2, R-3, S-3
 2. A ball of mass (m) 0.5 kg is attached to the end of a string having length (L) 0.5 m. The ball is rotated on a horizontal circular path about vertical axis. The maximum tension that the string can bear is 324 N. The maximum possible value of angular velocity of ball (in radian/s) is [IIT JEE 2011]




- (A) 9 (B) 18 (C) 27 (D) 36

3. A block of mass m is on an inclined plane of angle θ . The coefficient of friction between the block and the plane is μ and $\tan\theta > \mu$. The block is held stationary by applying a force P parallel to the plane. The direction of force pointing up the plane is taken to be positive. As P is varied from $P_1 = mg(\sin\theta - \mu\cos\theta)$ to $P_2 = mg(\sin\theta + \mu\cos\theta)$, the frictional force f versus P graph will look like [IIT JEE 2010]

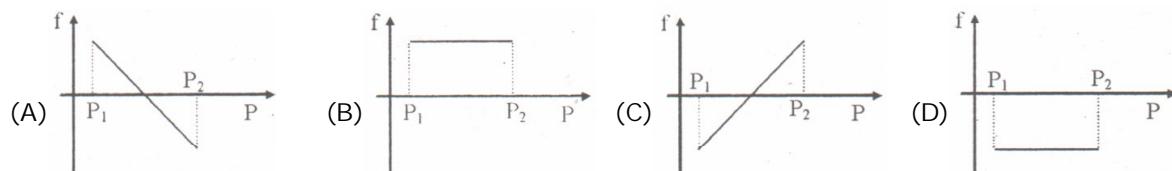

4. A block of mass $2k$ gk is free to move along the x-axis. It is at rest and from $t = 0$ onwards it is subjected to a time-dependent force $F(t)$ in the x-direction. The force $F(t)$ varies with t as shown in the figure. The kinetic energy of the block after 4.5 seconds, is [IIT JEE 2010]

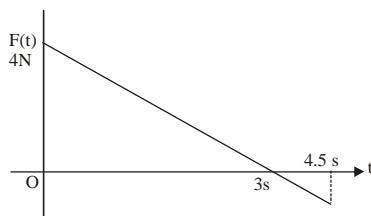

- (A) 4.50 J (B) 7.50 J (C) 5.06 J (D) 14.06 J


5. A piece of wire is bent in the shape of a parabola $y = kx^2$ (y-axis vertical) with a bead of mass m on it. The bead can slide on the wire without friction. It stays at the lowest point of the parabola when the wire is at rest. The wire is now accelerated parallel to the x-axis with a constant acceleration a. The distance of the new equilibrium position of the bead, where the bead can stay at rest with respect to the wire, from the y-axis is [IIT JEE 2009]

- (A) $\frac{a}{gk}$ (B) $\frac{a}{2gk}$ (C) $\frac{2a}{gk}$ (D) $\frac{a}{4gk}$

6. A particle moves in the X-Y plane under the influence of a force such that its linear momentum is $\vec{p}(t) = A[\hat{i}\cos(kt) - \hat{j}\sin(kt)]$, where A and k are constants. The angle between the force and the momentum is [IIT JEE 2007]

- (A) 0° (B) 30° (C) 45° (D) 90°

7. Two particle of mass m each are tied at the ends of a light string of length $2a$. The whole system is kept on a frictionless horizontal surface with the string held tight so that each mass is at a distance ' a ' from the center P (as shown in the figure). Now, the mid-point of the string is pulled vertically upwards with a small but constant force F . As a result, the particles move towards each other on the surface. The magnitude of acceleration, when the separation between them becomes $2x$ is [IIT JEE 2007]



(A) $\frac{F}{2m} \frac{a}{\sqrt{a^2 - x^2}}$

(B) $\frac{F}{2m} \frac{x}{\sqrt{a^2 - x^2}}$

(C) $\frac{F}{2m} \frac{x}{a}$

(D) $\frac{F}{2m} \frac{\sqrt{a^2 - x^2}}{x}$

8. Two blocks A and B of masses $2m$ and m , respectively, are connected by a massless and inextensible string. The whole system is suspended by a massless spring as shown in the figure. The magnitudes of acceleration of A and B, immediately after the string is cut, are respectively [IIT JEE 2006]




(A) $g, g/2$

(B) $g/2, g$

(C) g, g

(D) $g/2, g/2$

9. In figure, a cubical block is held stationary against a rough wall by applying a force F , then the incorrect statement among the following is [IIT JEE 2005]

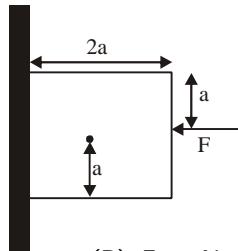


(A) friction force $f = mg$

(C) F does not apply any torque


(B) $F = N$, N is normal reaction

(D) N does not apply any torque

10. A particle is placed at the origin and a force $F = kx$ is acting on it, where K is a positive constant. If $U(0) = 0$, the graph of $U(x)$ versus x will be: (where U is the potential energy function) [IIT JEE 2004]

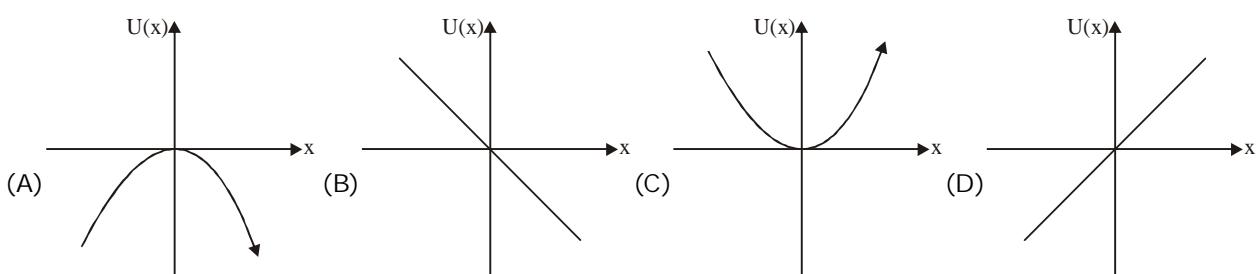

11. A block P of mass m is placed on a frictionless horizontal surface. Another block Q of same mass is kept on P and connected to the wall with the help of a spring of spring constant k as shown in the figure. μ_s is the coefficient of friction between P and Q. The blocks move together performing SHM of amplitude A. The maximum value of the friction force between P and Q is [IIT JEE (Screening) 2004]

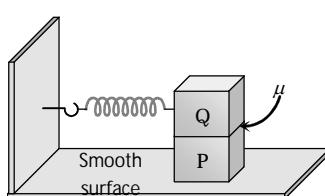


(A) KA

(B) $\frac{kA}{2}$


(C) Zero

(D) $m_s mg$

12. A block of mass $\sqrt{3}$ kg is resting on a horizontal plane (coefficient of static friction $\mu = 1/2\sqrt{3}$). A force \vec{F} is applied to the block as shown in the figure. The minimum magnitude of \vec{F} for which the block begins to slide is ($g = 10 \text{ m/s}^2$) [IIT JEE 2003]




13. What is the maximum value of the force F such that the block shown in the arrangement, does not move [IIT JEE Screening 2003]

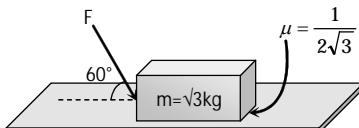


14. An insect crawls up a hemispherical surface very slowly. (see the figure). The coefficient of friction between the surface and the insect is $1/3$. If the line joining the centre of the hemispherical surface to the insect makes an angle α with the vertical, the maximum possible value of α is given by
 [IIT JEE 2001]



15. The pulleys and strings shown in the figure are smooth and of negligible mass. For the system to remain in equilibrium, the angle θ should be [IIT JEE 2001]



16. A string of negligible mass going over a clamped pulley of mass m supports a block of mass M as shown in the figure. The force on the pulley by the clamp is given by [IIT JEE 2001]




- (A) $\sqrt{2}Mg$ (B) $\sqrt{2}mg$ (C) $\sqrt{(M+m)^2 + m^2}g$ (D) $\sqrt{(M+m)^2 + M^2}g$

17. A long horizontal rod has a bead which can slide along its length, and initially placed at a distance L from one end A of the rod. The rod is set in angular motion about A with constant angular acceleration α . If the coefficient of friction between the rod and the bead is μ . and gravity is neglected, then the time after which the bead starts slipping is [IIT, IEE, 2000]

18. A block of mass 0.1 kg is held against a wall by applying a horizontal force of 5N on the block.


- If the coefficient of friction between the block and the wall is 0.5, the magnitude of the frictional force acting on the block is [IIT JEE 1994]

19. A particle P is sliding down a frictionless hemispherical bowl. It passes the point A at $t = 0$. At this instant of time, the horizontal component of its velocity is v . A bead Q of the same mass as P is ejected from A at $t = 0$ along the horizontal string AB, with the speed v . Friction between the bead and the string may be neglected. Let t_p and t_q be the respective times taken by P and Q to reach the point B. Then [IIT JEE 1993]



- (A) $t_p < t_q$ (B) $t_p = t_q$ (C) $t_p > t_q$ (D) $t_p / t_q = \frac{\text{length of arc } ACD}{\text{length of cord } AB}$

20. A car is moving in circular horizontal track of radius 10 m with a constant speed of 10 m/s. A plumb bob is suspended from the roof of the car by a light rigid rod of length 1.0 m. The angle made by the rod with track is [IIT JEE 1992]
 (A) Zero (B) 30° (C) 45° (D) 60°
21. In the arrangement shown in the figure, the ends P and Q of an unstretchable string move downwards with uniform speed U. Pulley A and B are fixed. Mass M moves upwards with a speed [IIT JEE 1982]




- (A) $2U\cos\theta$ (B) $U/\cos\theta$ (C) $2U/\cos\theta$ (D) $U\cos\theta$
22. A block of mass 2 kg rests on a rough inclined plane making an angle of 30° with the horizontal. The coefficient of static friction between the block and the plane is 0.7. The frictional force on the block is [IIT JEE 1980]
 (A) 9.8N (B) $0.7 \times 9.8 \times \sqrt{3}N$ (C) $9.8 \times \sqrt{3}N$ (D) $0.7 \times 9.8N$
23. A ship of mass 3×10^7 kg initially at rest is pulled by a force of 5×10^4 N through a distance of 3 m. Assuming, that the resistance due to water is negligible, the speed of the ship is [IIT JEE 1980]
 (A) 1.5 m/s (B) 60 m/s (C) 0.1 m/s (D) 5 m/s

Assertion-Reasoning

1. Statement-1: It is easier to pull a heavy object than to push it on a level ground. [IIT JEE 2007]
 and
 Statement-2: The magnitude of frictional force depends on the nature of the two surfaces in contact.
 (A) Statement-1 is True, Statement-2 is True; Statement-2 is a correct explanation for Statement-1
 (B) Statement-1 is True, Statement-2 is True; Statement-2 is NOT a correct explanation for Statement-1
 (C) Statement-1 is True, Statement-2 is False
 (D) Statement-1 is False, Statement-2 is True
2. Statement-1: A cloth covers a table. Some dishes are kept on it. The cloth can be pulled out without dislodging the dishes from the table. [IIT JEE 2007]
 and
 Statement-2: For every action there is an equal and opposite reaction.
 (A) Statement-1 is True, Statement-2 is True; Statement-2 is a correct explanation for Statement-1
 (B) Statement-1 is True, Statement-2 is True; Statement-2 is NOT a correct explanation for Statement-1
 (C) Statement-1 is True, Statement-2 is False
 (D) Statement-1 is False, Statement-2 is True

MCQ- Multi Correct

1. A small block of mass of 0.1 kg lies on a fixed inclined plane PQ which makes an angle θ with the horizontal. A horizontal force of 1 N acts on the block through its centre of mass as shown in the figure. The block remains stationary if (take $g = 10 \text{ m/s}^2$) [IIT JEE 2012]

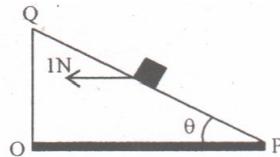


- (A) $\theta = 45^\circ$
 (B) $\theta > 45^\circ$ and a frictional force acts on the block towards P
 (C) $\theta > 45^\circ$ and a frictional force acts on the block towards Q
 (D) $\theta < 45^\circ$ and a frictional force acts on the block towards Q
2. A particle is acted upon by a force of constant magnitude. Which is always perpendicular to the velocity of the particle? The motion of the particle takes place in a plane. It follows that that [IIT JEE 1987]

- (A) Its velocity is constant
 (B) Its acceleration is constant
 (C) Its kinetic energy is constant
 (D) It moves in a circular path
3. A simple pendulum of length L and mass M is oscillating in a plane about a vertical line between angular limits $-\phi$ and $+\phi$. For an angular displacement θ ($|\theta| < \phi$), the tension in the string and the velocity of the bob are T and V respectively. The following relations hold good under the above conditions [IIT JEE 1986]


- (A) $T \cos \theta = Mg$
 (B) $T - Mg \cos \theta = MV^2 / L$
 (C) The magnitude of the tangential acceleration of the bob $|a_T| = g \sin \theta$
 (D) $T = Mg \cos \theta$
4. A reference frame attached to the earth [IIT JEE 1986]
 (A) Is an inertial frame by definition
 (B) Cannot be an inertial frame because the earth is revolving around the sun
 (C) Is an inertial frame because Newton's laws are applicable in this frame
 (D) Cannot be an inertial frame because the earth is rotating about its own axis

Subjective


1. A block is moving on an inclined plane making an angle 45° with the horizontal and the coefficient of friction is μ . The force required to just push it up the inclined plane is 3 times the force required to just prevent it from sliding down. If we define $N = 10\mu$, then N is [IIT JEE 2011]
2. A circular disc with a groove along its diameter is placed horizontally. A block of mass 1 kg is placed as shown. The co-efficient of friction between the block and all surfaces of groove in contact is $\mu = 2/5$. The disc has an acceleration of 25 m/s^2 . Find the acceleration of the block with respect to disc. [IIT JEE 2006]




3. Two identical blocks A and B are placed on a rough inclined plane of inclination 45° . The coefficient of friction between block A and incline is 0.2 and that of between B and incline is 0.3. The initial separation between the two blocks is $\sqrt{2} \text{ m}$. The two blocks are released from rest, then find (a) the time after which front faces of both blocks come in same line and (b) the distance moved by each block for attaining above position [IIT JEE 2004]




4. In the figure masses m_1 , m_2 and M are 20 kg, 5 kg and 50 kg respectively. The coefficient of friction between M and ground is zero. The coefficient of friction between m_1 and M and that between m_2 and ground is 0.3. The pulleys and the string are massless. The string is perfectly horizontal between P_1 and m_1 and also between P_2 and m_2 . The string is perfectly vertical between P_1 and P_2 . An external horizontal force F is applied to the mass M . Take $g = 10 \text{ m/s}^2$. [IIT JEE 2000]
- Draw a free body diagram for mass M , clearly showing all the forces.
 - Let the magnitude of the force of friction between m_1 and M be f_1 and that between m_2 and ground be f_2 . For a particular F it is found that $f_1 = 2f_2$. Find f_1 and f_2 . Write down equations of motion of all the masses. Find F , tension in the string and accelerations of the masses.



5. A particle of mass 10^{-2} kg is moving along the positive x axis under the influence of a force $F(x) = -k(1/2x^2)$, where $k = 10^{-2} \text{ Nm}^2$. At time $t = 0$ it is at $x = 1.0 \text{ m}$ and its velocity is $v = 0$. [IIT JEE 1998]
- Find the velocity when it reaches $x = 0.50 \text{ m}$
 - Find the time at which it reaches $x = 0.25 \text{ m}$
6. Two blocks of mass $m_1 = 10 \text{ kg}$ and $m_2 = 5 \text{ kg}$ connected to each other by a massless inextensible string of length 0.3 m, are placed along a diameter of a turn table. The coefficient of friction between the table and m_1 is 0.5, while there is no friction between m_2 and the table. The table is rotating with an angular velocity of 10 rad/s about a vertical axis passing through its centre O. The masses are placed along the diameter of the table on either side of the centre O such that the mass m_1 is at a distance of 0.124 m from O. The masses are observed to be at rest with respect to an observer on the turn table. [IIT JEE 1997]
- Calculate the frictional force on m_1 .
 - What should be the minimum angular speed of the turn table so that the masses will slip from this position?
 - How should the masses be placed with the string remaining taut, so that there is no frictional force acting on the mass m_1 ?
7. Block A of mass m and block B of mass 2 m are placed on fixed triangular wedge by means of a massless, inextensible string and a frictionless pulley as shown in fig. The wedge is inclined at 45° to the horizontal on both sides. The coefficient of friction between block A and the wedge is $2/3$ and that between block B and the wedge is $1/3$. If the system of A and B is released from rest then find [IIT JEE 1997]



- The acceleration of A
 - Tension in the string
 - The magnitude and direction of the force of friction acting on A
8. A smooth semicircular wire-track of radius R is fixed in a vertical plane. One end of a massless spring of natural length $3R/4$ is attached to the lowest point O of the wire-track. A small ring of mass m , which can slide on the track, is attached to the other end of the spring. The ring is held stationary at point P such that the spring makes an angle of 60° with the vertical. The spring constant $K = mg/R$. Consider the instant when the ring is released, and (i) draw the free body diagram of the ring, (ii) determine the tangential acceleration of the ring and the normal reaction [IIT JEE 1996]




9. A hemispherical bowl of radius $r = 0.1 \text{ m}$ is rotating about its own axis (which is vertical), with an angular velocity ω . A particle of mass 10^{-2} kg on the frictionless inner surface of the bowl is also rotating with the same ω . The particle is at a height h from the bottom of the bowl. [IIT JEE 1993]


- (i) Obtain the relation between h and ω . What is the minimum value of ω needed, in order to have a non-zero value of h ?
(ii) It is desired to measure g (acceleration due to gravity) using this set-up, by measuring h accurately. Assuming that r and ω are known precisely, and that the least count in the measurement of h is 10^{-4} m, what is the minimum possible error Δg in the measured value of g ?
10. Two blocks of masses 2.9 kg and 1.9 kg are suspended from a rigid support S by two inextensible wires, each of length 1m, see in figure. The upper wire has negligible mass and the lower wire has a uniform mass of 0.2 kg/m. The whole system of blocks, wires and support have an upward acceleration of 0.2 m/s^2 , acceleration due to gravity is 9.8 m/s^2 . [IIT JEE 1989]




- (a) Find the tension at the mid-point of the lower wire
(b) Find the tension at the mid-point of the upper wire
11. A particle of mass m rests on a horizontal floor with which it has a coefficient of static friction μ . It is desired to make the body move by applying the minimum possible force F . Find the magnitude of F and the direction in which it has to be applied. [IIT JEE 1987]
12. Two blocks A and B are connected to each other by a string and a spring; the string passes over a frictionless pulley as shown in the figure. Block B slides over the horizontal top surface of a stationary block C and the block A slides along the vertical side of C, both with the same uniform speed. The coefficient of friction between the surfaces of blocks is 0.2. Force constant of the spring is 1960 newtons/m. If mass of block A is 2 kg., calculate the mass of block B and the energy stored in the spring. [IIT JEE 1982]



13. Masses M_1 , M_2 and M_3 are connected by strings of negligible mass which pass over massless and frictionless pulleys P_1 and P_2 as shown in the figure. The masses move such that the portion of the string between P_1 and P_2 is parallel to the inclined plane and the portion of the string between P_2 and M_3 is horizontal. The masses M_2 and M_3 are 4.0 kg each and the coefficient of kinetic friction between the masses and the surfaces is 0.25. The inclined plane makes an angle of 37° with the horizontal. If the mass M_1 moves downwards with a uniform velocity find
(i) The mass of M_1
(ii) The tension in the horizontal portion of the string. ($g = 9.8 \text{ m/s}^2$ and $\sin 37^\circ \approx 3/5$)

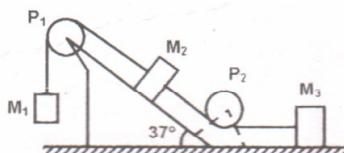

14. In the figure (a) and (b) AC, DG and GF are fixed inclined planes, $BC = EF = x$ and $AB = DE = y$. A small block of mass M is released from the point A. It slides down AC and reaches C with a speed V_c . The same block is released from rest from the point D. It slides down DGF and reaches the point F with speed V_F . The coefficients of kinetic friction between the block and both the surfaces AC and DGF are μ . Calculate V_c and V_F . [IIT JEE 1980]

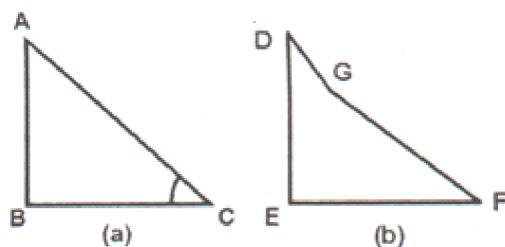

EXERCISE-I

(A) NEWTON'S LAW OF MOTION

- | | | | | | | | | | | | | | |
|-----|---|-----|---|-----|---|-----|---|-----|---|-----|---|-----|---|
| 1. | B | 2. | B | 3. | C | 4. | A | 5. | A | 6. | B | 7. | B |
| 8. | A | 9. | D | 10. | C | 11. | B | 12. | A | 13. | B | 14. | C |
| 15. | B | 16. | C | 17. | B | 18. | C | 19. | A | 20. | A | 21. | B |
| 22. | C | 23. | B | 24. | C | 25. | C | 26. | C | 27. | C | 28. | B |
| 29. | C | 30. | A | 31. | B | 32. | B | 33. | D | 34. | B | 35. | B |
| 36. | C | 37. | A | 38. | A | 39. | C | 40. | A | 41. | A | 42. | D |
| 43. | C | 44. | A | 45. | B | 46. | C | 47. | B | 48. | A | 49. | B |
| 50. | C | 51. | A | 52. | A | 53. | D | 54. | A | 55. | A | | |

EXERCISE-II

NLM

(SINGLE CORRECT)


- | | | | | | | | | | | | | | |
|-----|-------|-----|--------|-----|-------|-----|------|-----|-----|-----|------|-----|---|
| 1. | A | 2. | A | 3. | A | 4. | B | 5. | A | 6. | A | 7. | A |
| 8. | D | 9. | A | 10. | B | 11. | A | 12. | C | 13. | A | 14. | A |
| 15. | B | 16. | B | 17. | A | 18. | B | 19. | C | 20. | C | 21. | A |
| 22. | B | 23. | A | 24. | A | 25. | B | 26. | B | | | | |
| 27. | (i) | A | (ii) | A | (iii) | C | (iv) | D | (v) | B | (vi) | D | |
| | (vii) | B | (viii) | B | | | | | | | | | |
| 28. | (i) | A | (ii) | A | (iii) | A | (iv) | C | (v) | B | (vi) | C | |
| | (vii) | C | (viii) | B | | | | | | | | | |
| 29. | A | 30. | B | 31. | A | 32. | C | 33. | D | | | | |

(MULTIPLE CORRECT)

- | | | | | | | | | | | | | | |
|-----|-----|-----|-------|-----|-------|-----|---|-----|---|-----|-----|-----|-------|
| 34. | C | 35. | B | 36. | A,B,D | 37. | C | 38. | B | 39. | A,C | 40. | A,B,C |
| 41. | B,D | 42. | A,B,C | 43. | B | 44. | B | 45. | B | 46. | B | 47. | C |

FRICTION

(SINGLE CORRECT)

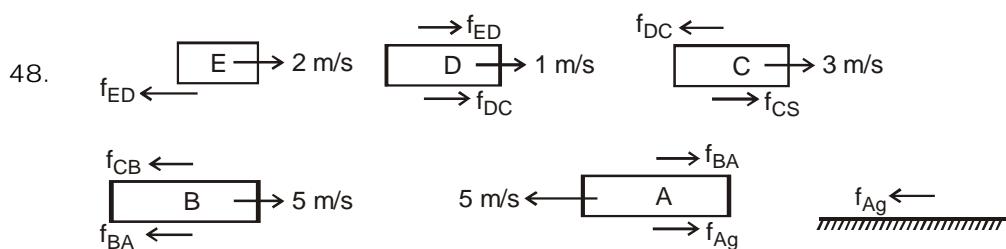

49. 
50. A 51. C 52. C 53. A
54. B 55. B 56. A 57. A 58. A 59. D 60. B
61. D 62. C 63. (a) B (b) D (c) A 64. A 65. A 66. A
67. A 68. C 69. A 70. C 71. A 72. A
73. A,B 74. C 75. B 76. A,B,C 77. C 78. A,C
79. A,D 80. B,C 81. A,B 82. B,C 83. B,D 84. A,B,C,D

EXERCISE - III

LEVEL - I


(A) NEWTON'S LAW OF MOTION

1. $\frac{4g}{5}, \frac{2g}{5}, \frac{3g}{5}$ 2. $a = \frac{4g}{9}, T = \frac{13mg}{18}$ 3. (a) 5m/s^2 , (b) (i) 100N, (ii) 120N
4. 2 sec 5. $x_2 > x_1 > x_3$ $x_1 : x_2 : x_3 : 15 : 18 : 10$ 6. 12 N 7. $10/3 \text{ kg}$
8. 300 N 9. 55 10. 5N, $16/31 \text{ kg}$ 11. 2sec 12. 12 m/s
13. $a_B = 4\text{m/s}^2 (\uparrow)$ 14. (a) $T = mg - \frac{kI}{2}$, (b) length of spring will less than ' l ' and $T = 0$ in the string.
15. 322 N

16. (a) $T = \frac{(m+M)(a+g)}{2}$, (b) $N = m(a + g) + T$, (c) $T = \frac{mg}{2}$, (d) $T = \frac{(m+M)(a+g)}{3}$
 (e) $N = m(a + g) - T$, (f) $T = \frac{mg}{3}$

(B) FRICTION

17. (A) 4m/s^2 , (B) 1.2 m/s^2 , (C) 0 18. $\mu = 2$

19. 
20. 0.33 21. $\frac{1}{3} \mu \pi r^3$ 22. 1/2 23. 1kg
24. $4/3 \text{ sec}$ 25. $3/4$ 26. 40 N 27. 1/2 sec 28. 5 sec, $125/6 \text{ m}$
29. $10\hat{i}$ 30. 0 31. 30 N

LEVEL - II

1. (a) 2 ms^{-2} , (b) 2.4 N 0.3 (c) 0.2 s 2. 2 N 3. 0.5 sec 4. 556.8 N , 1.47 sec

5. $\left(\frac{m_1 - 2m_2}{2m_2}\right)g$ 6. (a) $a_A = \frac{3g \downarrow}{2} = a_B; a_C = 0; T = mg/2$ (b) $a_A = 2g \uparrow; a_B = 2g \downarrow; a_C = 0, T = 0$

(c) $a_A = a_B = g/2 \uparrow; T = \frac{3mg}{2}; T = 2mg$ 7. $2g/23$ 8. $\Delta r = \frac{mg \cot \alpha}{4\pi^2 k}, 1\text{cm}$

9. (a) $a = g \cot \theta$, (b) $\mu_{\min} = \frac{m \sin \theta \cos \theta}{m \cos^2 \theta + M}$ 10. $\mu_s = 0.4, \mu_k = 0.3$

11. 12 N, 21 N, $4 \text{ m/s}^2, 2 \text{ m/s}^2, 4 \text{ N}, 6 \text{ N}$

EXERCISE-IV

SECTION-A

1	(A)	2	(A)	3	(D)	4	(D)	5	(C)	6	(D)	7	(A)	8	(A)	9	(D)	10	(D)
11	(B)	12	(A)	13	(C)	14	(A)	15	(D)	16	(A)	17	(D)	18	(D)	19	(B)	20	(D)
21	(D)	22	(D)	23	(C)	24	(D)	25	(C)	26	(B)	27	(C)	28	(A)	29	(B)	30	(B)
31	(D)	32	(D)	33	(D)	34	(D)	35	(C)	36	(B)	37	(C)	38	(B)	39	(B)	40	(D)

SECTION-B

Fill in the Blank

1 (5N)

True/False

1 (False) 2 (False) 3 (True) 4 (False)

MCQ-Single Correct

1 (d)	2 (d)	3 (a)	4 (c)	5 (b)	6 (d)	7 (b)	8 (b)	9 (d)	10 (a)
11 (b)	12. (a)	13 (a)	14 (a)	15 (c)	16 (d)	17 (a)	18 (b)	19 (a)	20 (c)
21 (b)	22 (a)	23 (c)							

Assertion-Reasoning

1 (b) 2 (b)

MCQ-Multi Correct

1 (a,c) 2 (c,d) 3 (b,c) 4 (b,d)

Subjective

1 (5) 2 (10 m/s^2) 3 ($2 \text{ sec}, 7\sqrt{2}\text{m}, 8\sqrt{2}\text{m}$)

4 ($f_1 = 30\text{N}, f_2 = 15\text{N}, F = 60\text{N}, T = 18\text{N}, a_1 = a_2 = a = 0.6 \text{ m/s}^2$) 5 ($-1 \text{ m/sec}, t = \left(\frac{\pi}{3} + \frac{\sqrt{3}}{4}\right) \text{ sec}$)

6 ($36\text{N}, 11.75 \text{ rad/s}, 0.1, 0.2\text{m}$) 7 ((i) $a = 0$ (ii) $2\sqrt{2} \frac{mg}{3}$ (iii) $\frac{mg}{3\sqrt{2}}$ (downwards)) 8 ($(5\sqrt{3}/8)g, (3/8)mg$)

9 ((i) $h = R - \frac{g}{W^2}$ W > $\sqrt{\frac{g}{R}} = 9.89 \text{ rad/sec}$ (ii) $\pm 9.8 \times 10^{-3} \text{ m/s}^2$) 10 (20N, 50.0 Newton)

11 ($\frac{\mu mg}{\sqrt{1+\mu^2}}, \tan^{-1} \mu$) 12 (0.098 J) 13 ((i)4.2 kg(ii)9.8 N) 14 ($V_F = \sqrt{2g(y-\mu x)}$)