


Feather RP2040


<https://www.adafruit.com/product/4884>



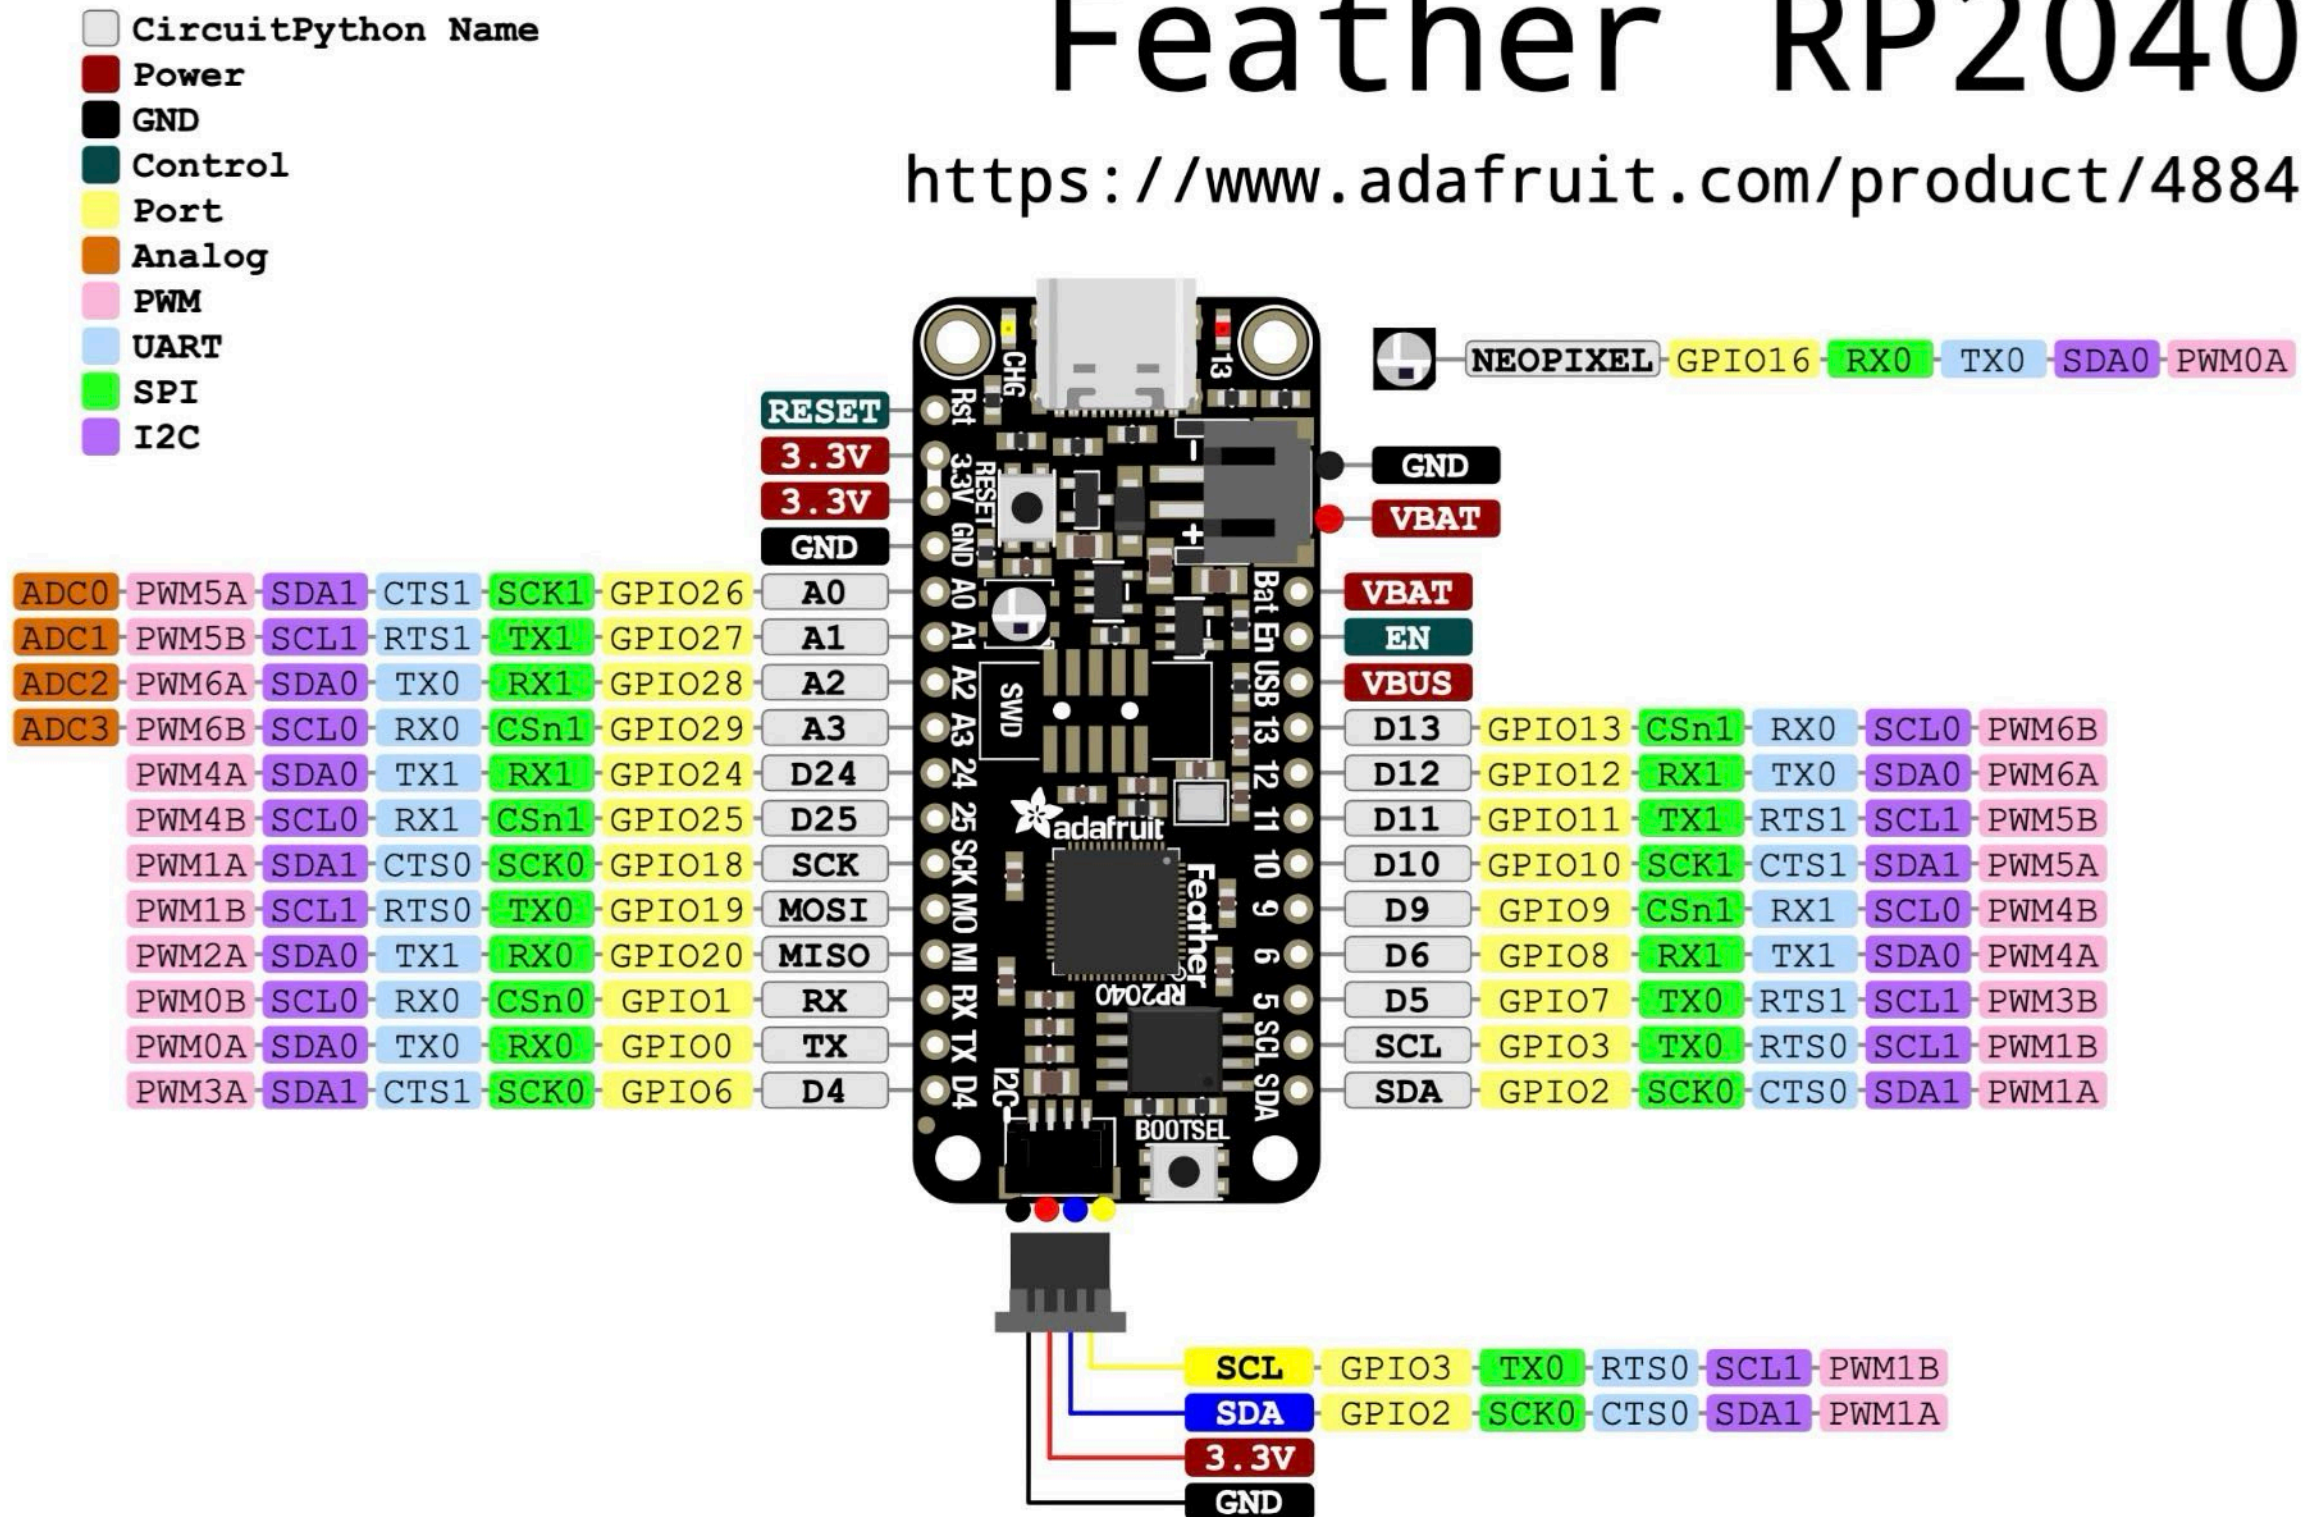

Raspberry Pi Pico Pinout

For **Raspberry Pi Pico 1** and **Raspberry Pi Pico 2**

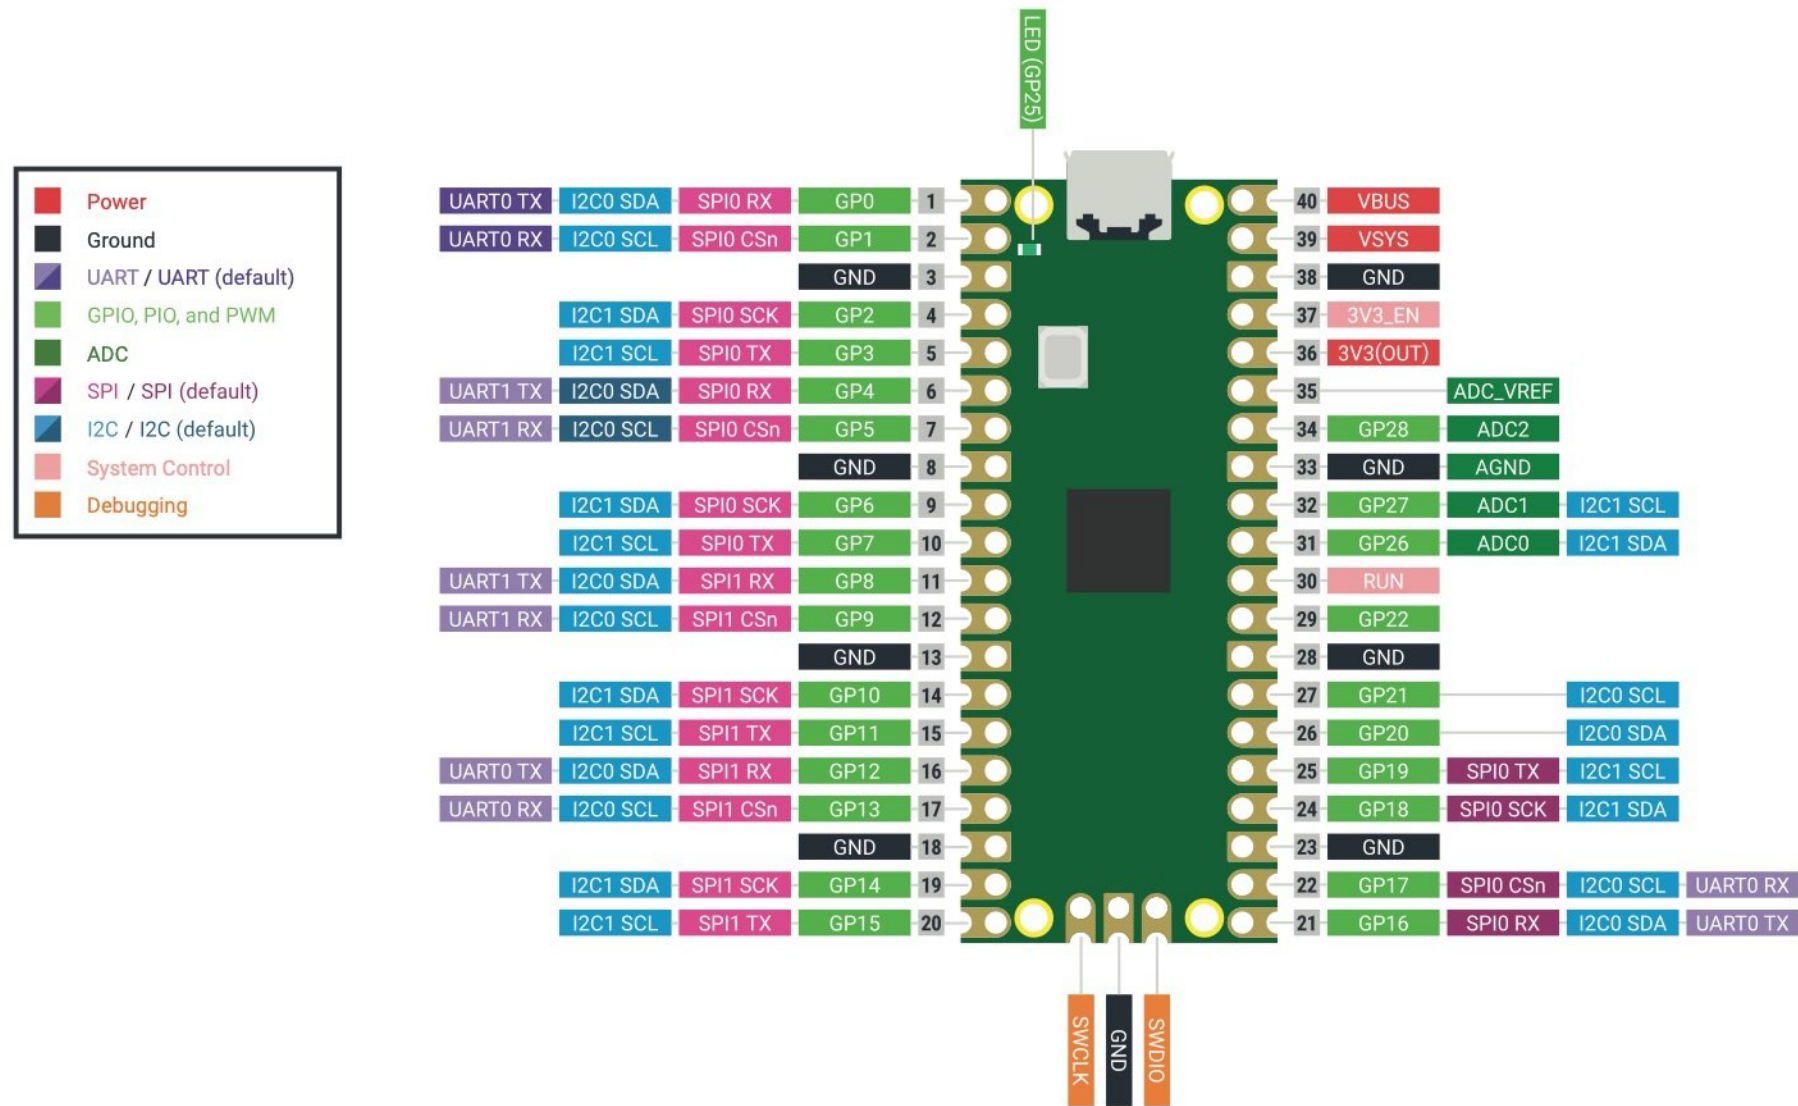

Raspberry Pi Pico W Pinout

RP2040

Power

Ground

UART / UART (default)

GPIO, PIO, and PWM

ADC

SPI / SPI (default)


I2C / I2C (default)

System Control

Debugging



Infineon 43439

GPIO

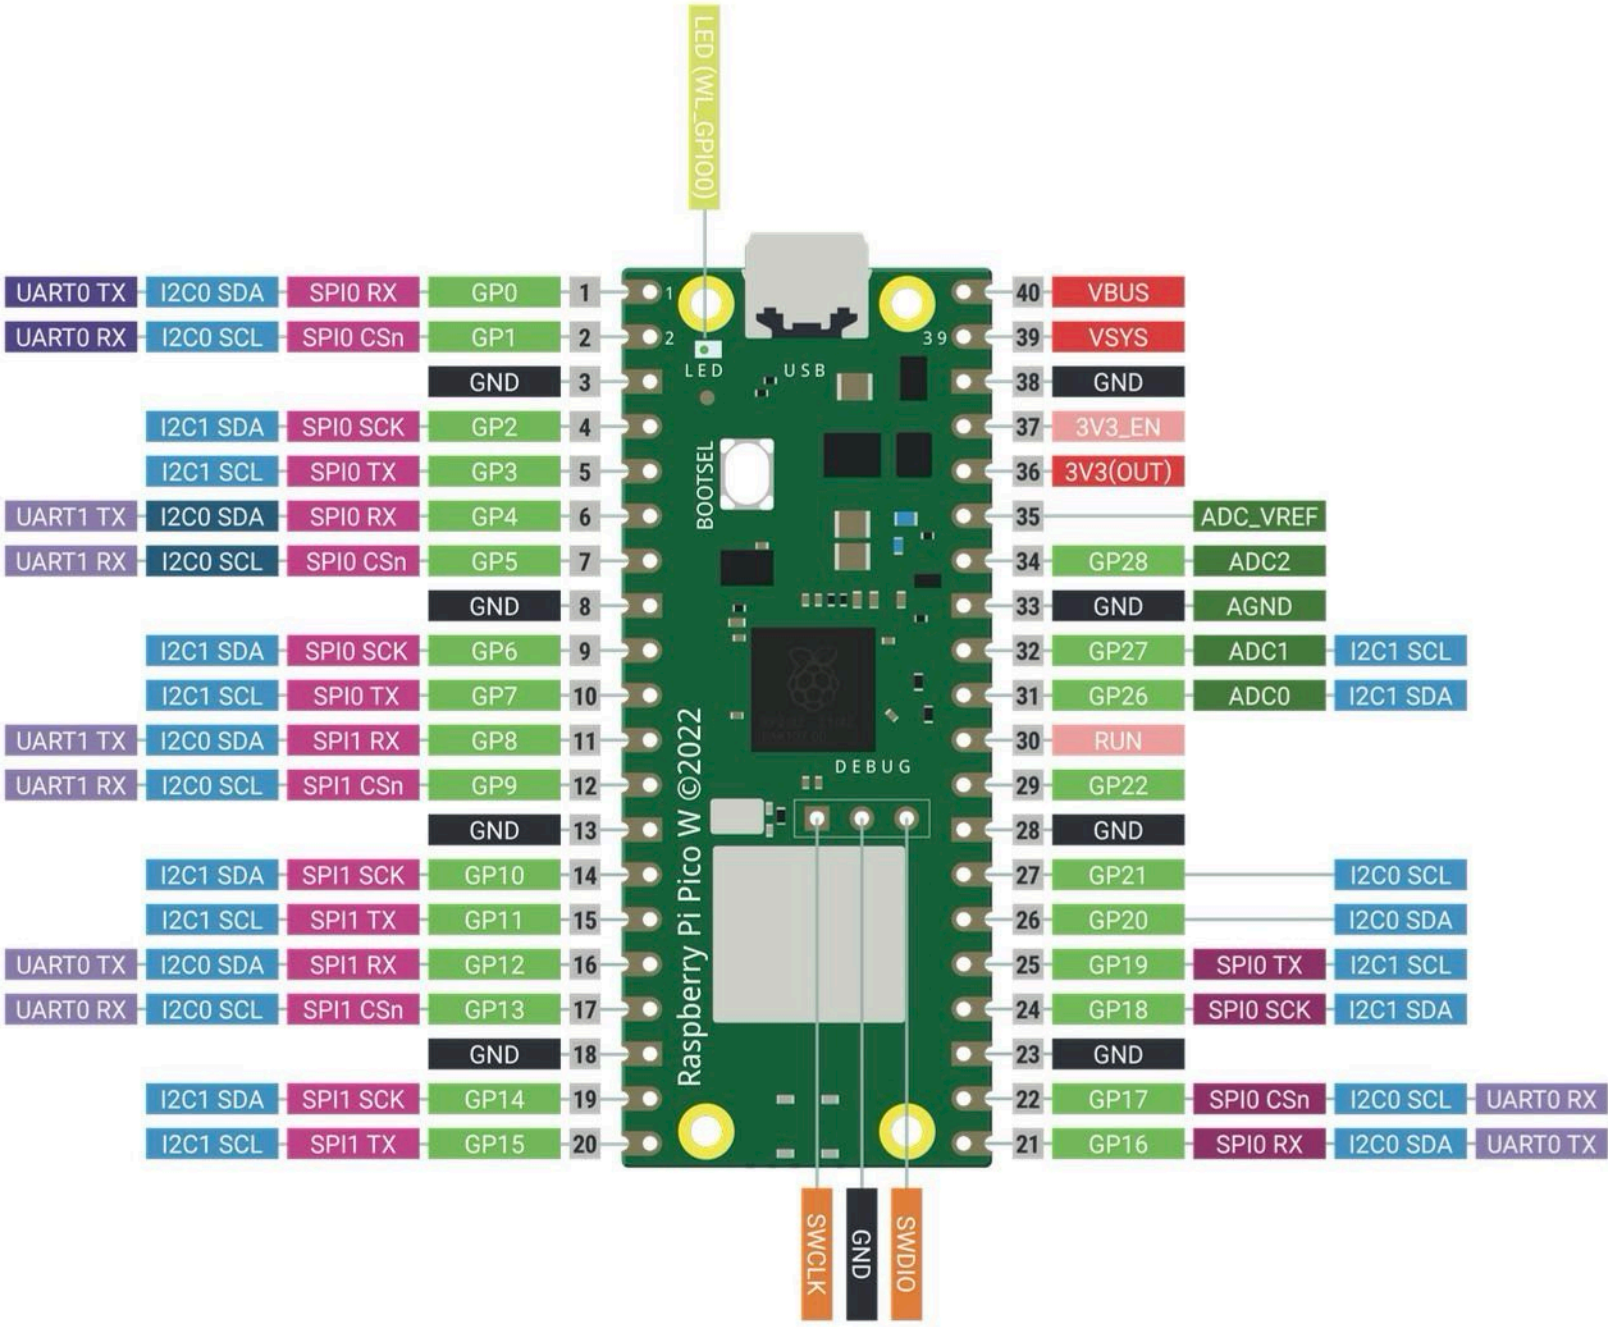


Pro Micro RP2040

DEV-17717

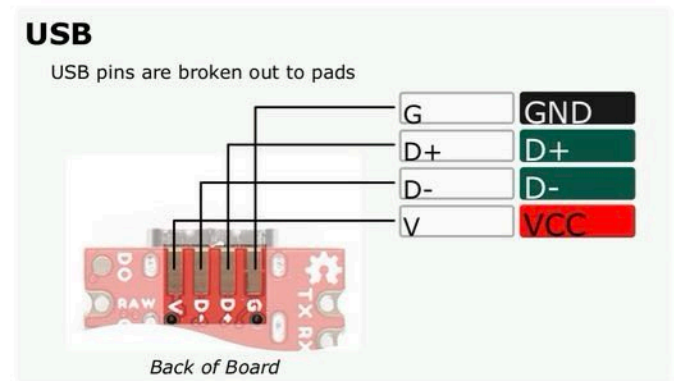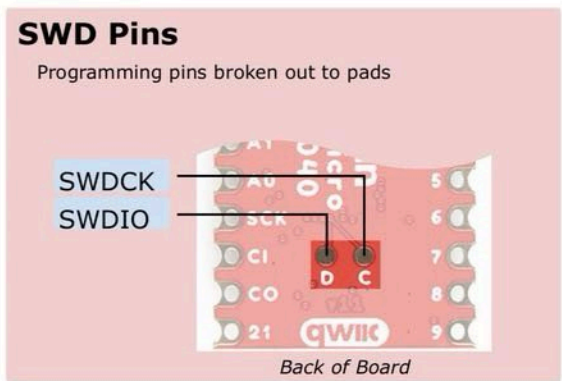

Name	ADC
Power	I ² C
GND	SPI
Control	USB
GPIO	SWD
Serial UART	

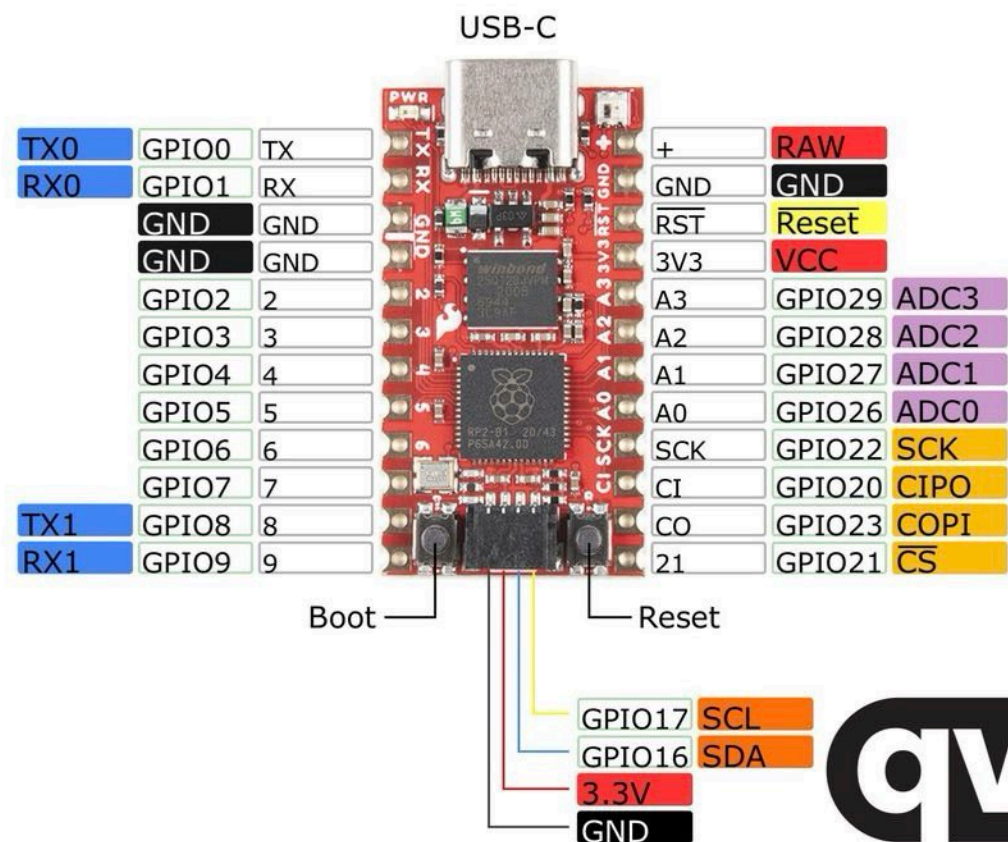

Power
"RAW" Pin: 5V Max at ~600mA
USB: 5V at ~500mA (default), dependent on USB Port
"3V3" Pin: Regulated 3.3V
I/O Logic Levels: 3.3V


USB
USB 1.1 Device/Host

LEDs
Power: Red
WS2812: Addressable RGB [GPIO25]

RP2040
Absolute maximum VCC: 3.3V
32-bit Dual ARM Cortex M0+ (up to 133MHz)
ROM: 16kB (fixed at time of silicon is manufactured)
Internal SRAM: 264kB
ADC: 12-bit
PWM: 16-bit

W25Q128JVPIM
External Flash Program Memory: 16MB


Notes
- The pins on the RP2040 can be muxed! For more information on the multiplexed pins, check out "section 1.4.3 GPIO Functions" of the RP2040 datasheet.

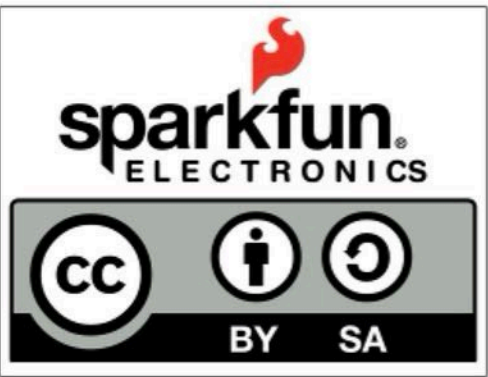

- CircuitPython Name
- Power
- GND
- Port
- Analog
- PWM
- UART
- SPI
- I2C

QT Py RP2040

<https://www.adafruit.com/product/4900>

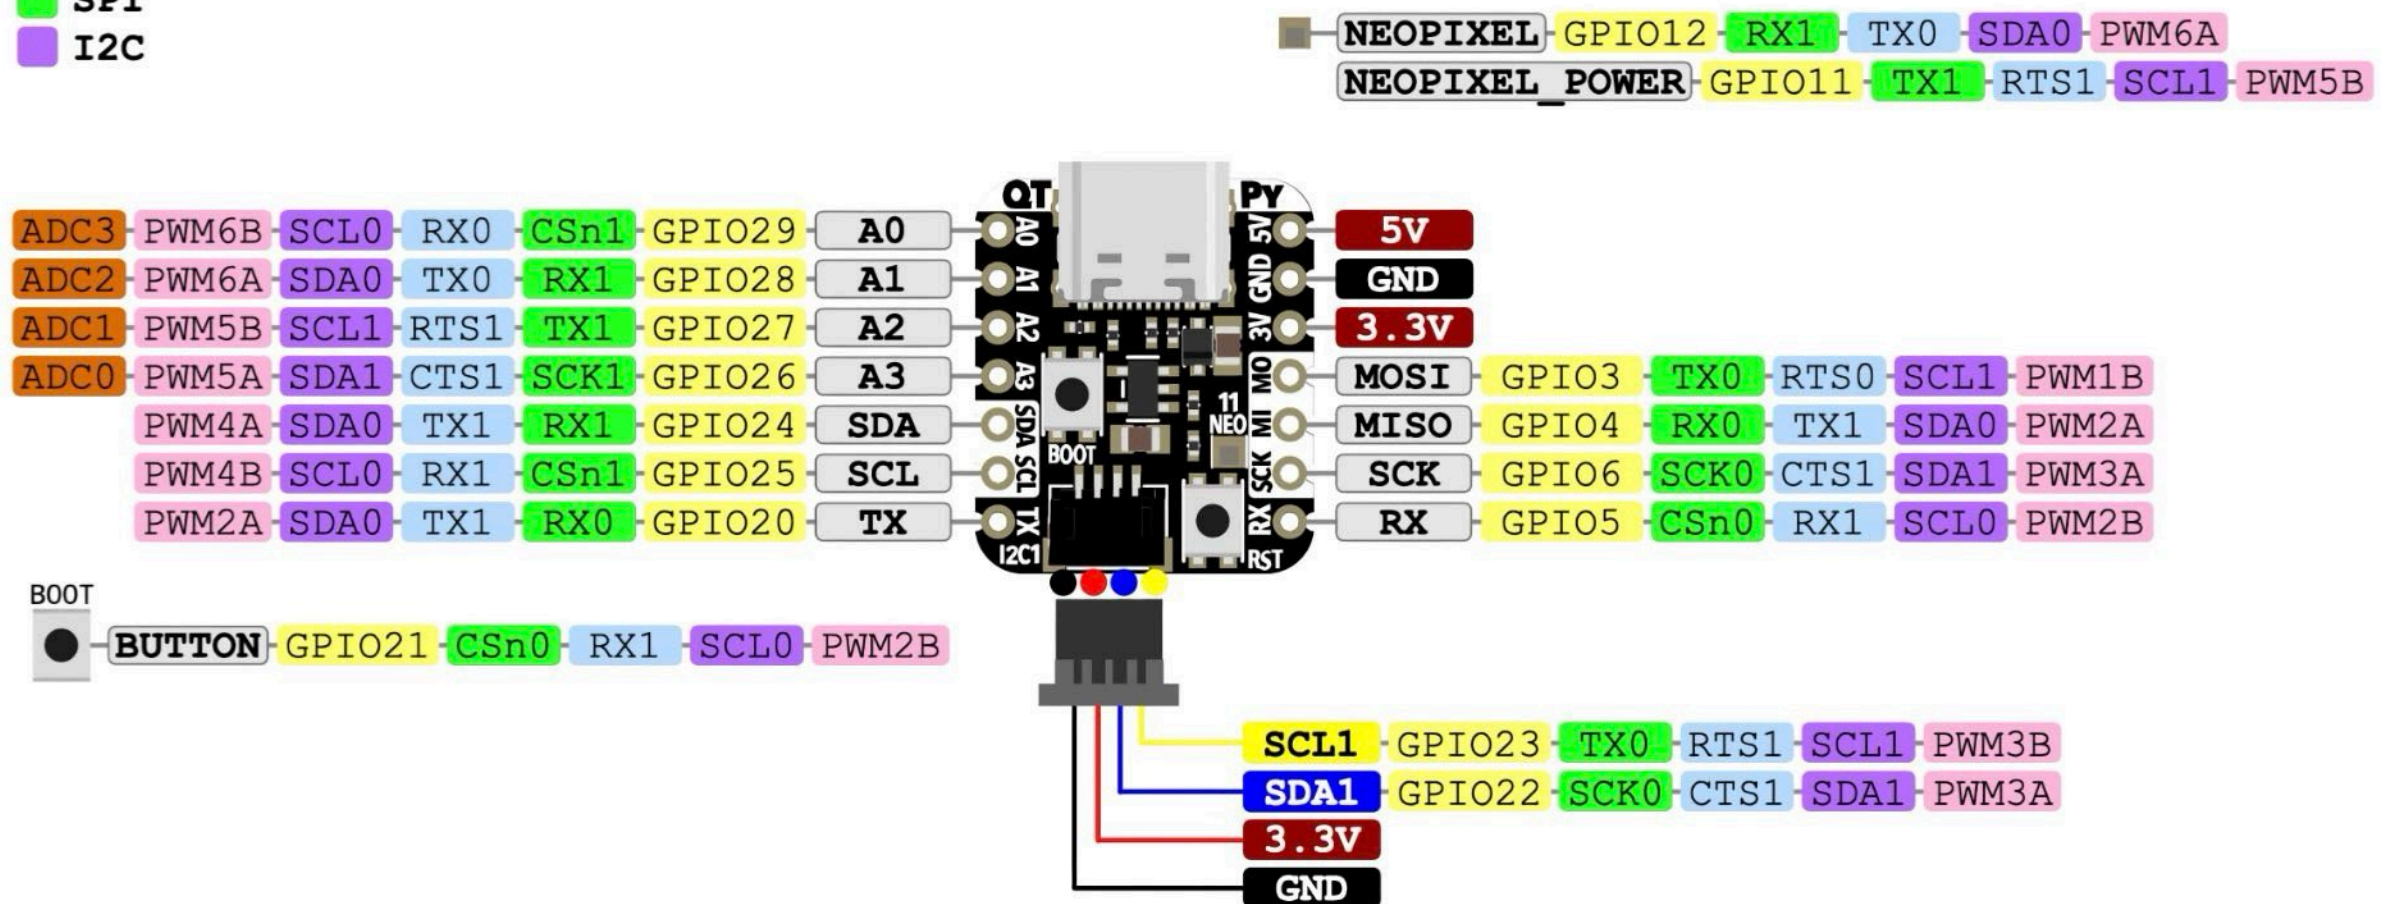

Pimoroni Tiny 2040

18x21.3mm

8MByte Flash

USB-C

RGB LED

Reset Button


User/Boot Button

16 pins+debug

GP0-7 ideal for PIO

Input: 3V-5.5V

Pins and Dims

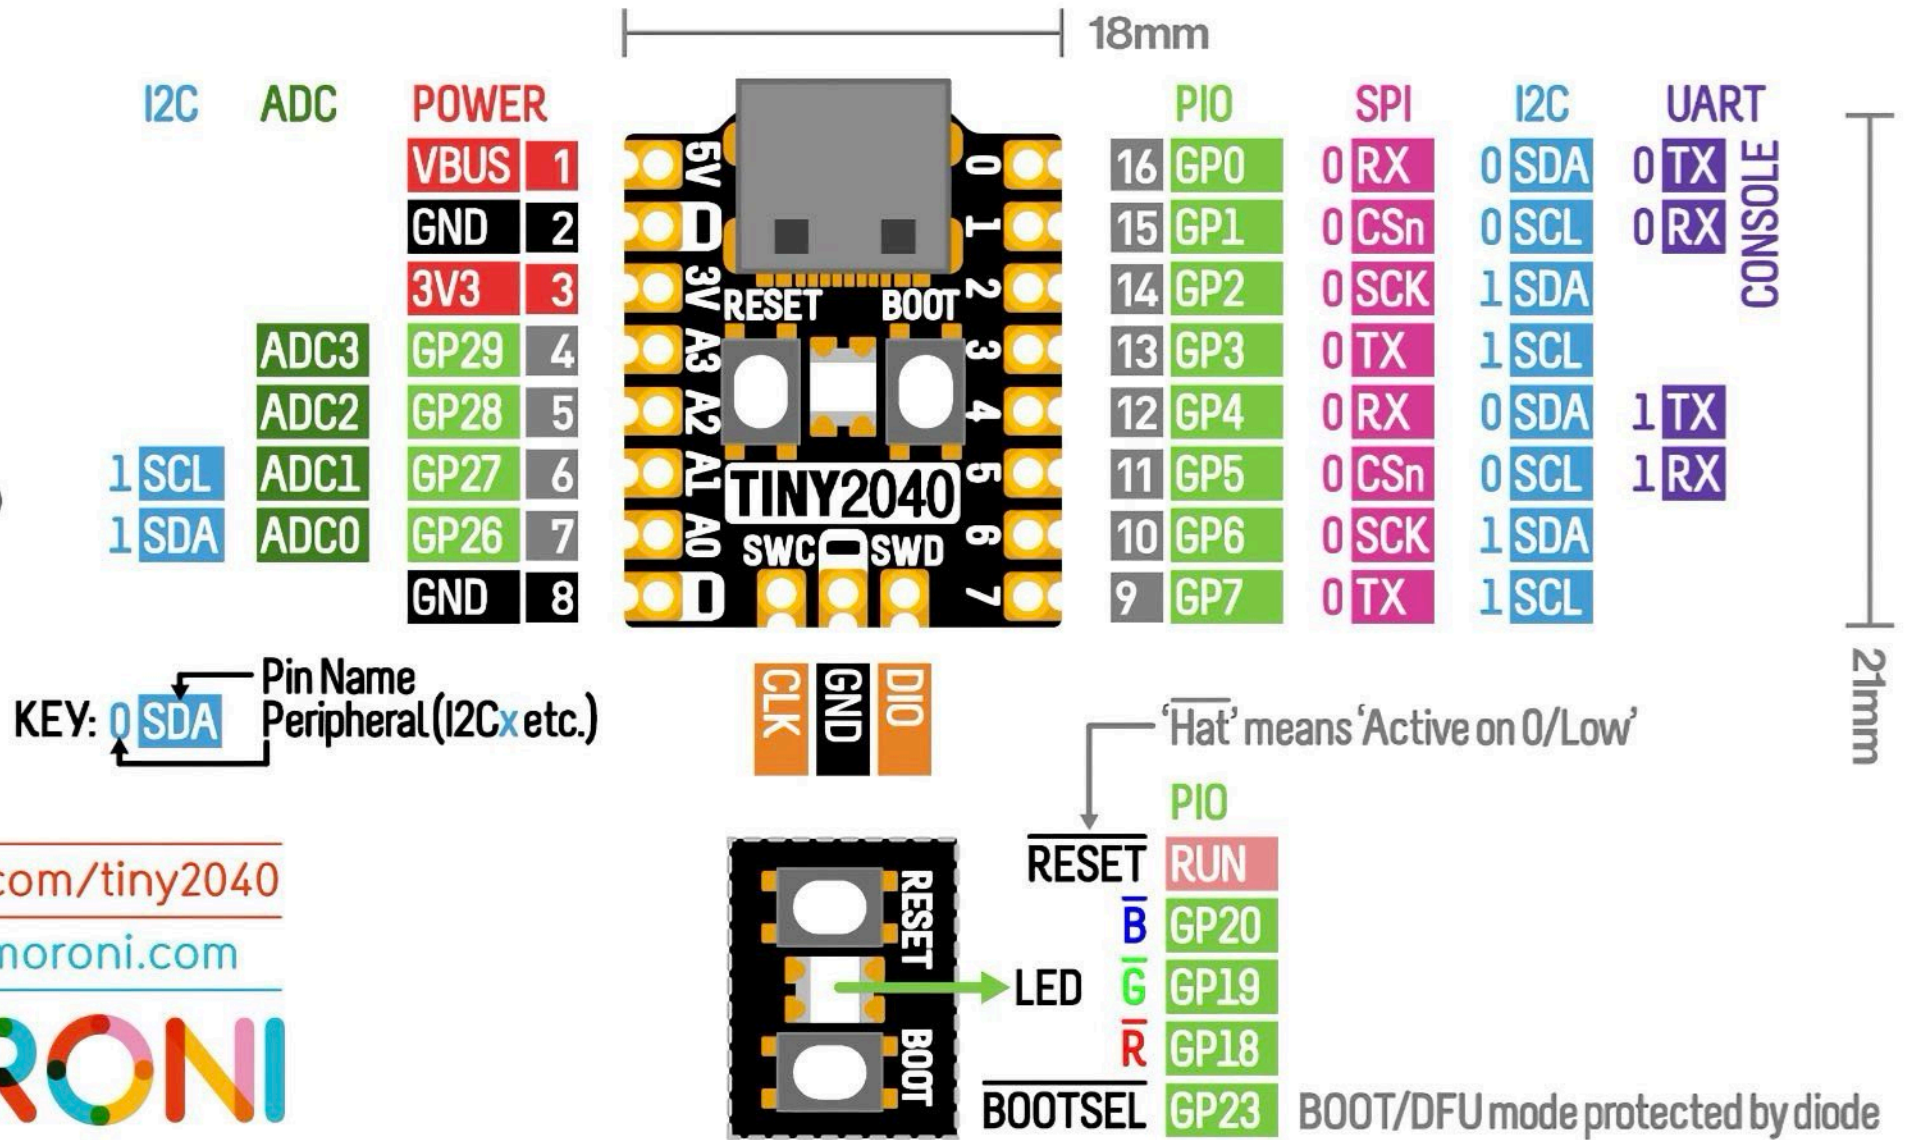


<https://pimoroni.com/tiny2040>

<https://forums.pimoroni.com>



Adafruit QT2040 Trinkey

<https://www.adafruit.com/product/5056>

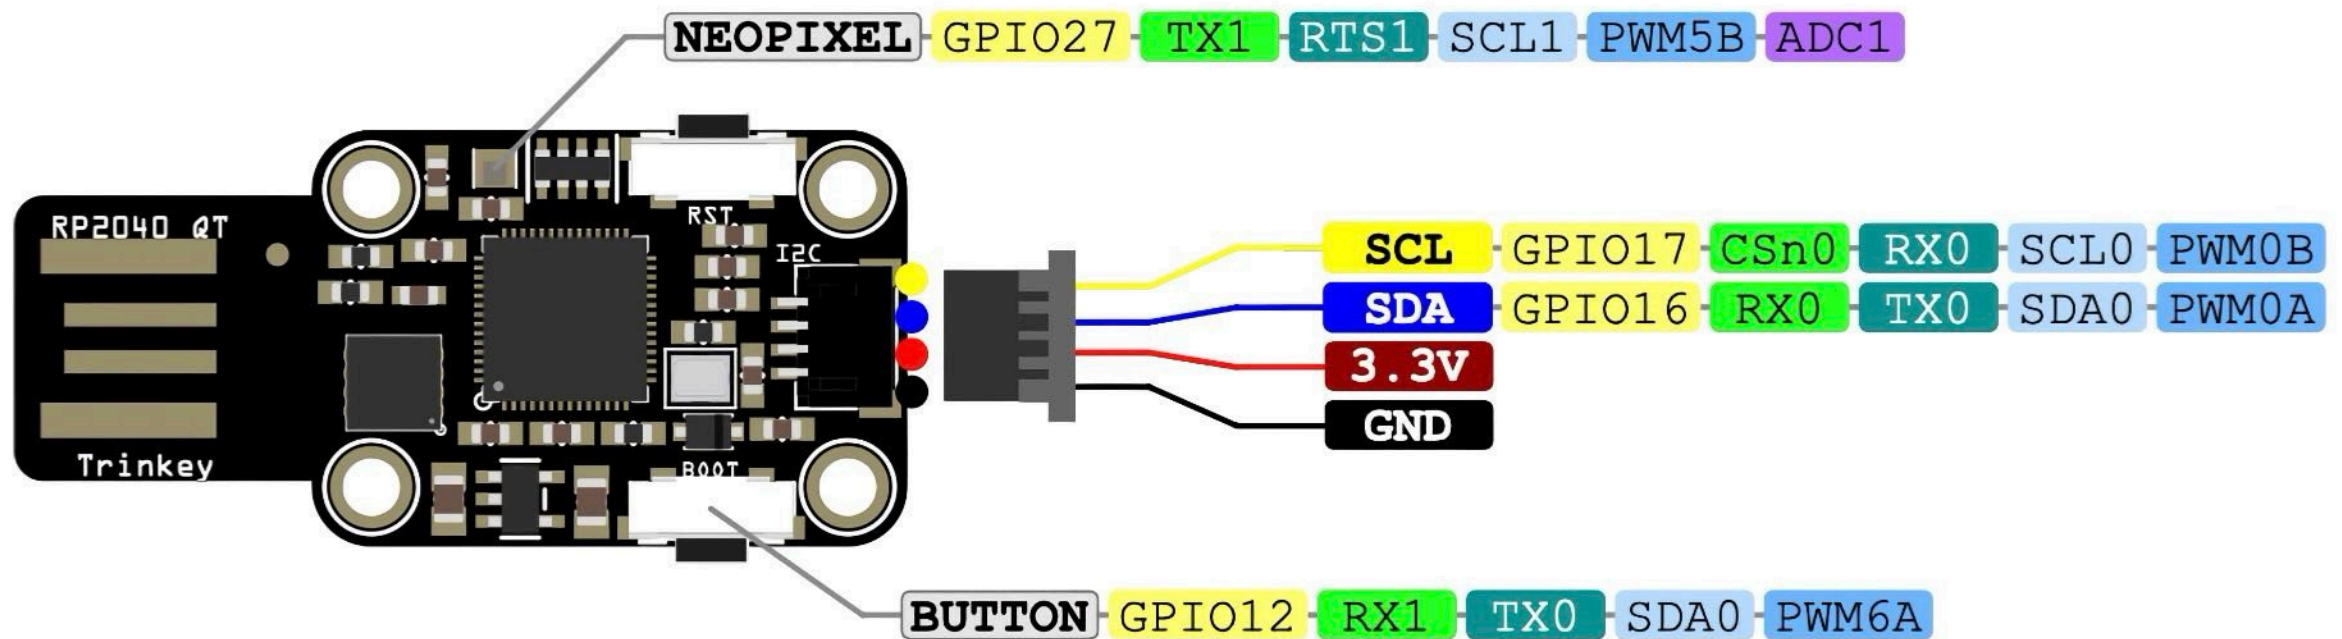


- Power
- GND
- CircuitPython Name
- GPIO
- SPI
- UART
- I2C
- PWM
- ADC

The Raspberry Pi RP2040 is a dual ARM Cortex-M0+ running at up to 133MHz with 264kB on-chip SRAM and built in USB. Flash memory is provided by external QSPI chip. All GPIO is 3.3V in/out max unless otherwise stated.


Pimoroni Pico Plus 2

Board Width 21.0mm

Pins and Dims

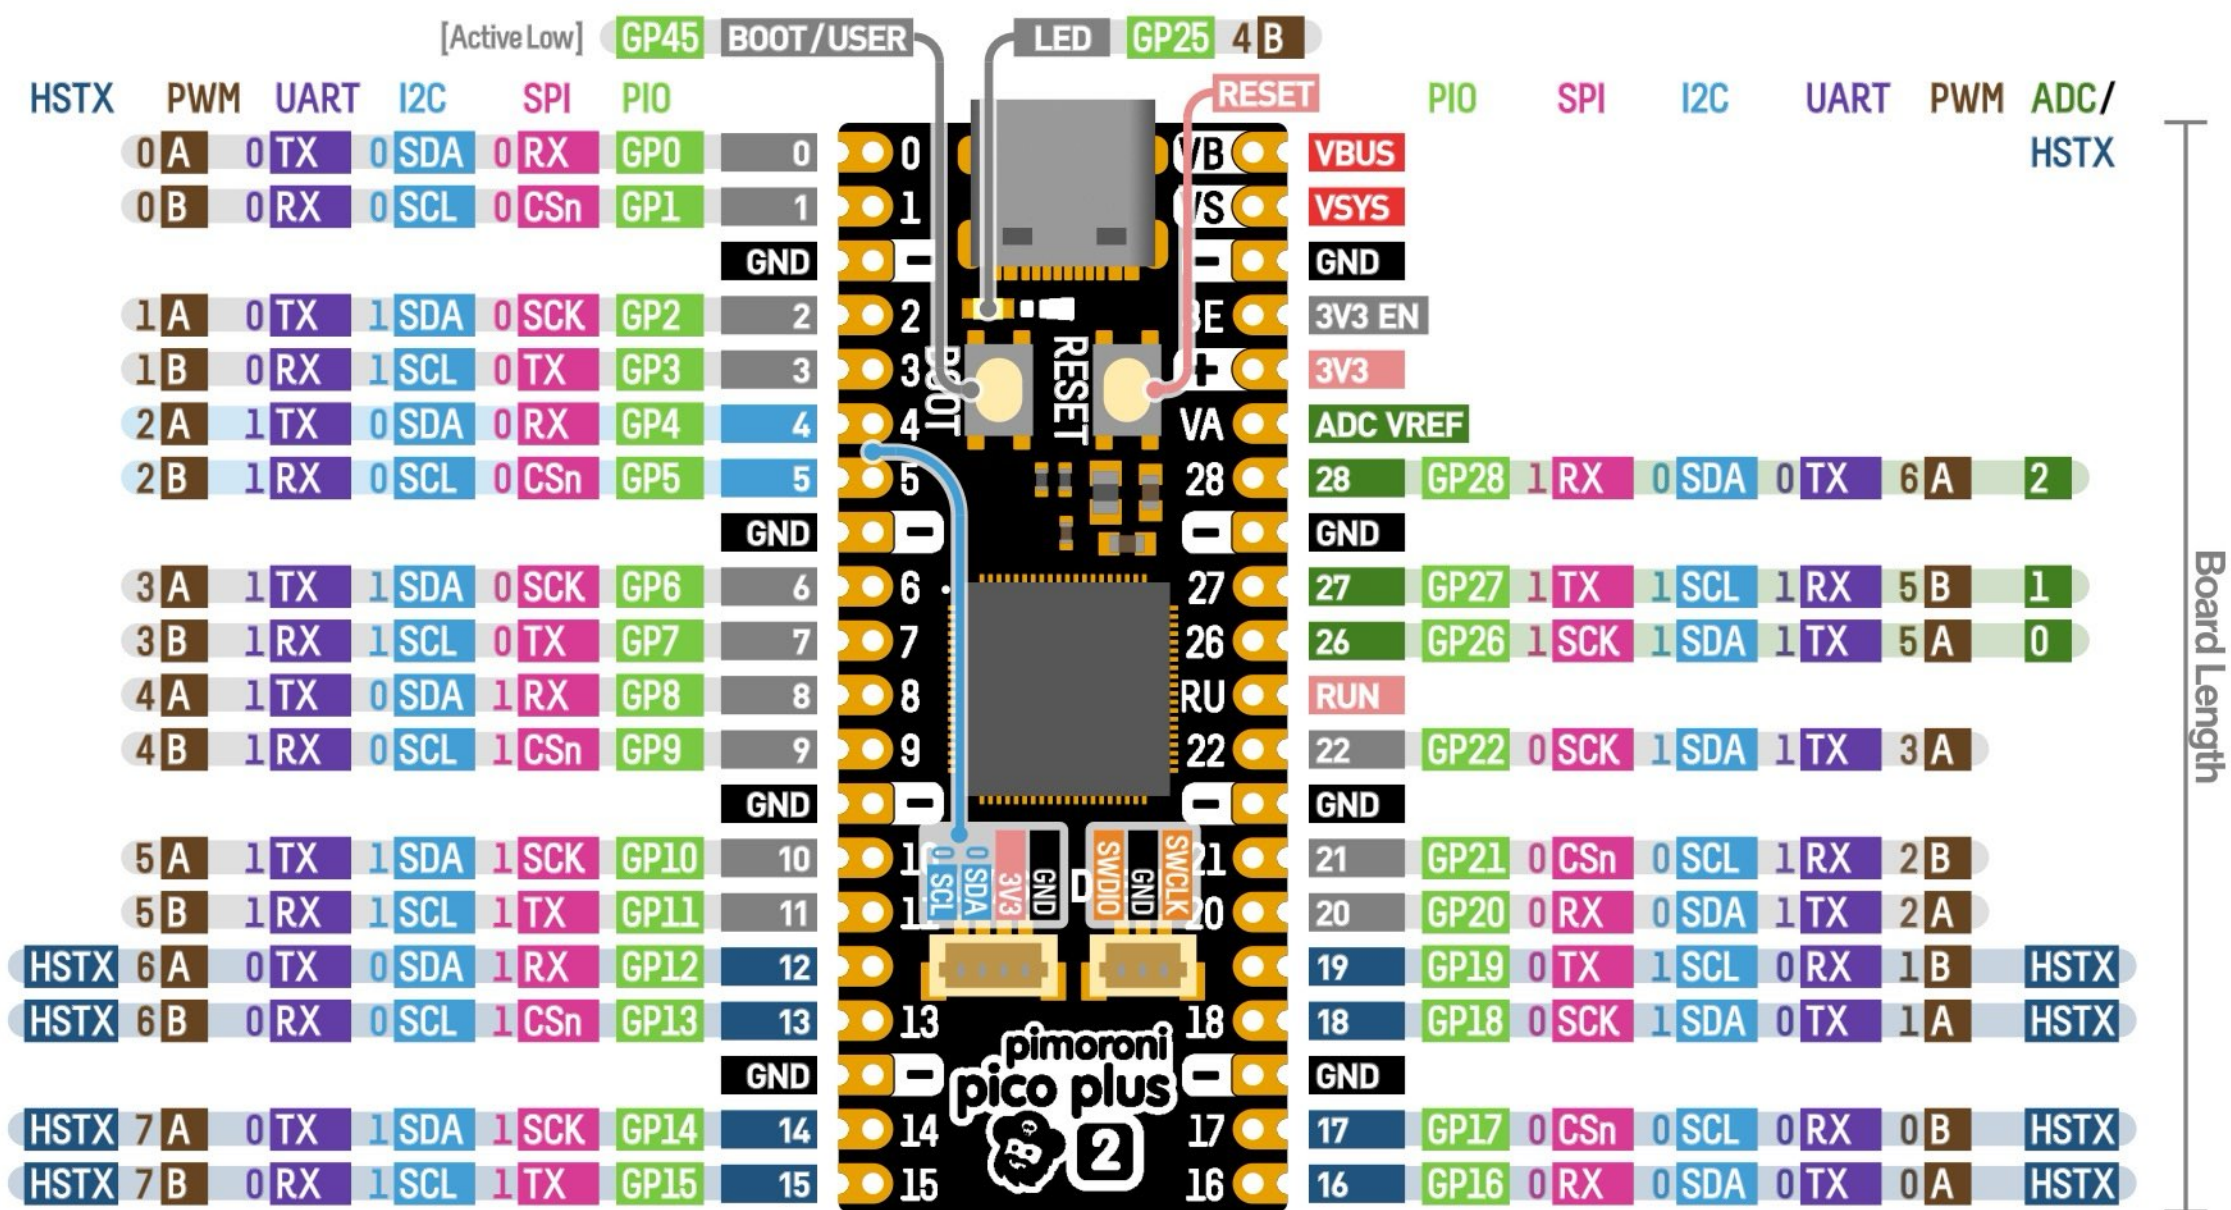

- 51x21mm
- RP2350B with 16MB Flash
- 8MB PSRAM
- USB-C
- Mono LED
- Reset & User/Boot Button
- 40 pins
- QW/ST, SP/CE & Debug Connectors
- Input: 3V-5.5V

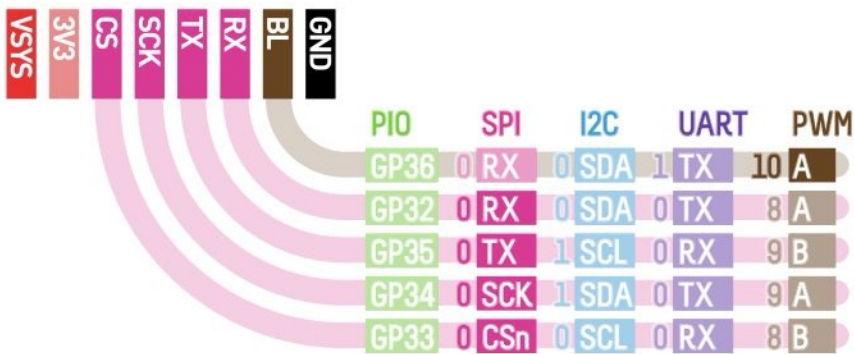

KEY: 0 SDA Function Name Peripheral(I2Cx etc.)