Ex no : 10 a
DATE : 15/10/24


INTERNET WORKING WITH ROUTERS IN CISCO PACKET TRACER

AIM :


To design and configure a simple internetwork using a router in Cisco Packet Tracer Simulator.


PROCEDURE :

1) Open Cisco Packet Tracer and create a network topology
2) Add 1 Router & 2 PCs.
3) Connect PC0 to Router 0 & PC1 to Router 0 using a Copper Straight Through cable
4) Open Router 0 → CLI & enter :
   enable
   configure terminal
5) Configure first router interface
6) Configure the second router interface.
7) Configure PC0 using Desktop → IP Configuration.
8) Configure PC1
9) Switch to Simulation Mode
10) Select Add Simple PDU and click PC0 as the source and PC1 as the destination
11) We Capture / Forward to trace the packet

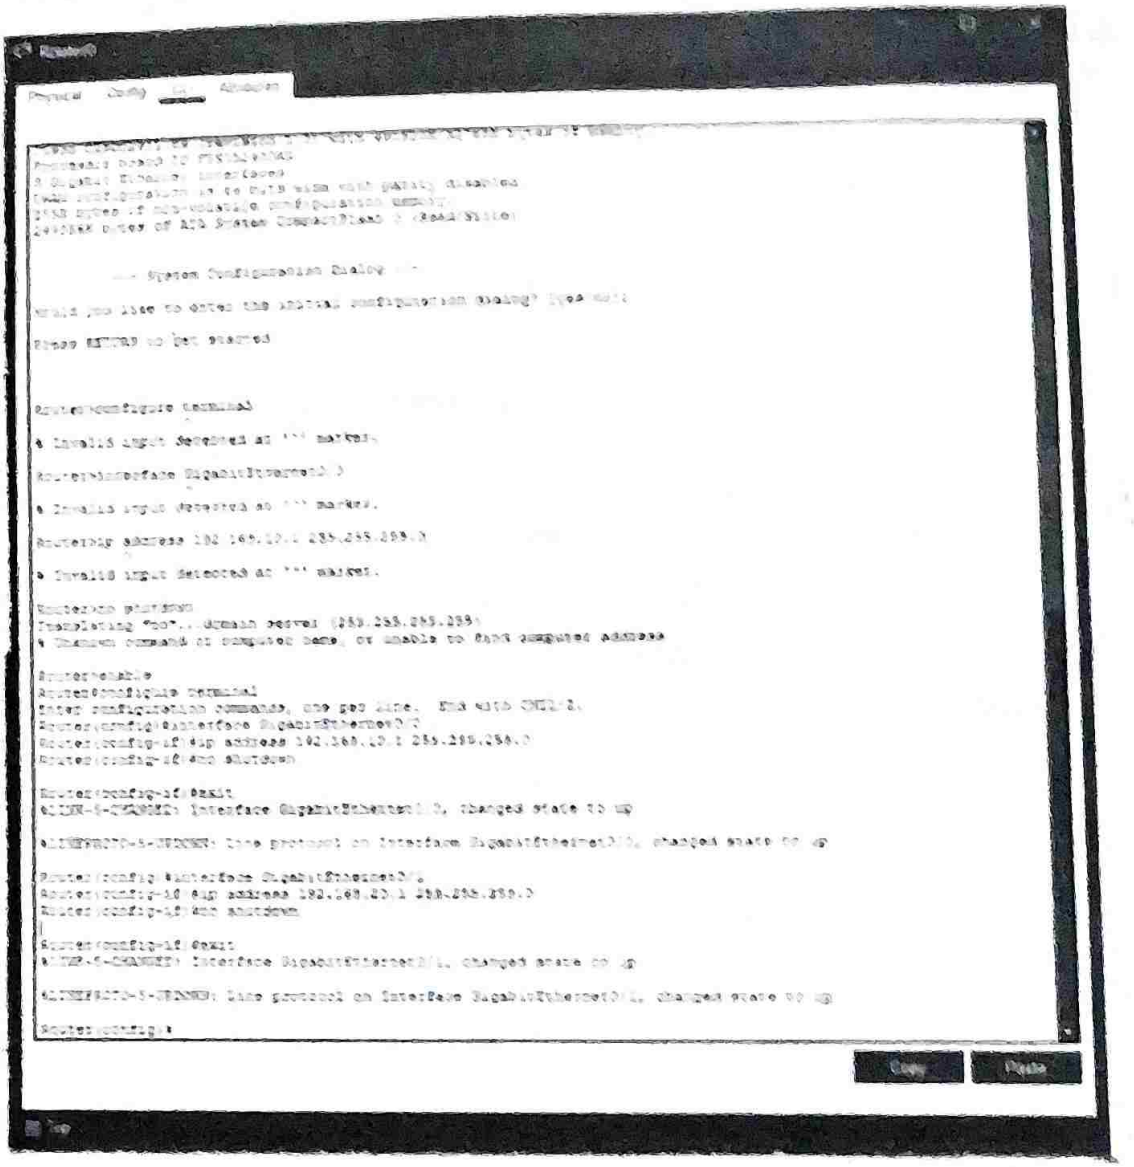
Physical
Config
CLI
Attributes
Router(config)#interface GigabitEthernet0/1
Router(config-if)#ip address 192.168.10.1 255.255.255.0
Router(config-if)#no shutdown
Router(config-if)#exit
Router(config)#interface GigabitEthernet0/1
Router(config-if)#ip address 192.168.20.1 255.255.255.0
Router(config-if)#no shutdown
Router(config-if)#exit
Router(config)#
Copy
Paste
Top

87P

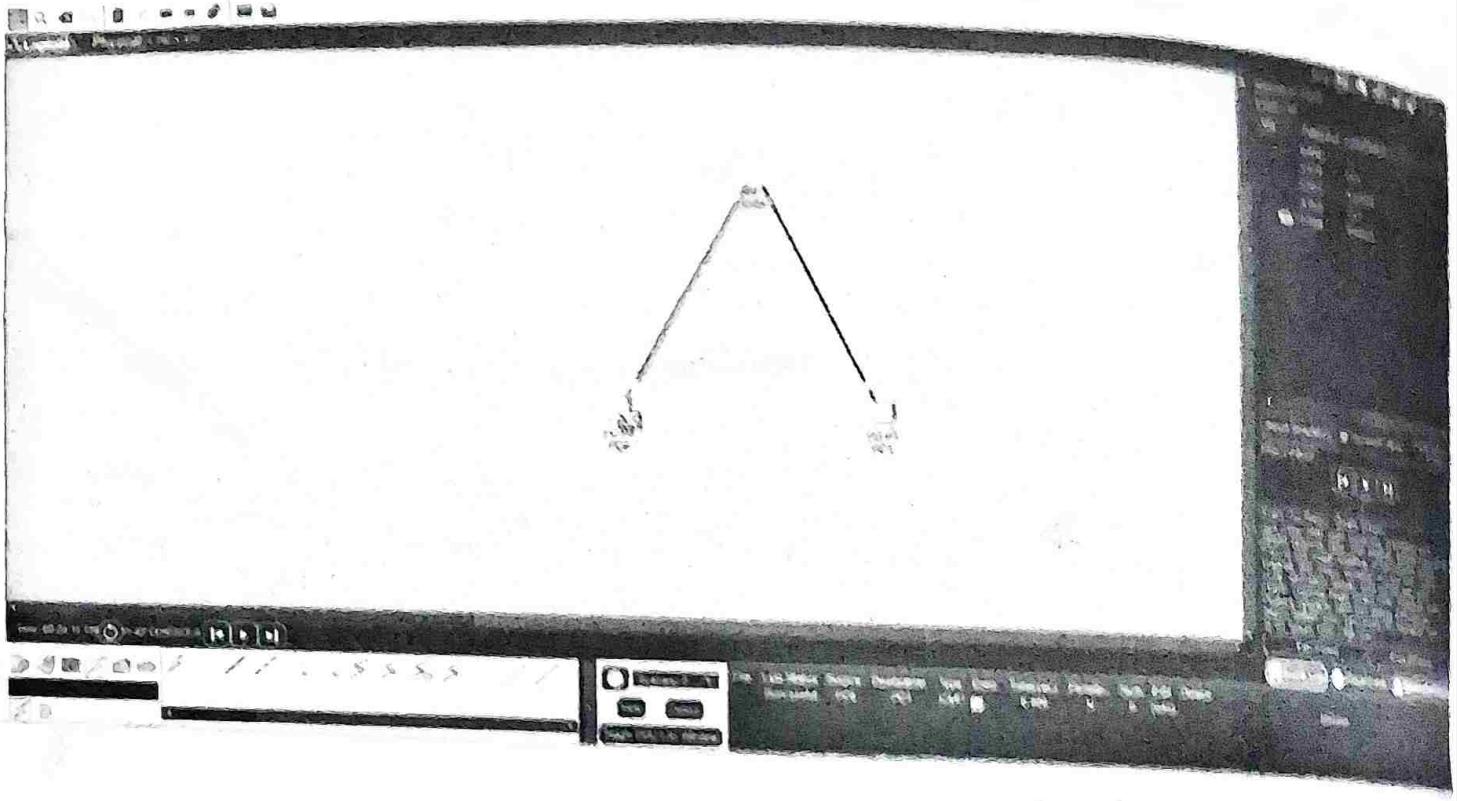

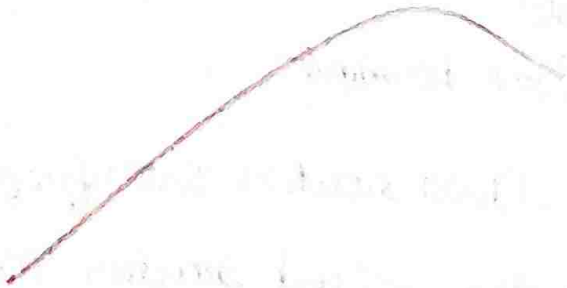

12) Observe the packet path.

PC 0 → Router 0 → PC 1

13) Continue the simulation & observe the acknowledgement:

PC 1 → Router 0 → PC 0.

14) Verify the successful status & tick mark on PC 0, confirming the communication between two networks was successful.

RESULT:

Thus, a simple internetwork was successfully designed & configured using a router in Cisco Packet Tracer.