Two-stage false-alarm gate (Stage A + Stage B)

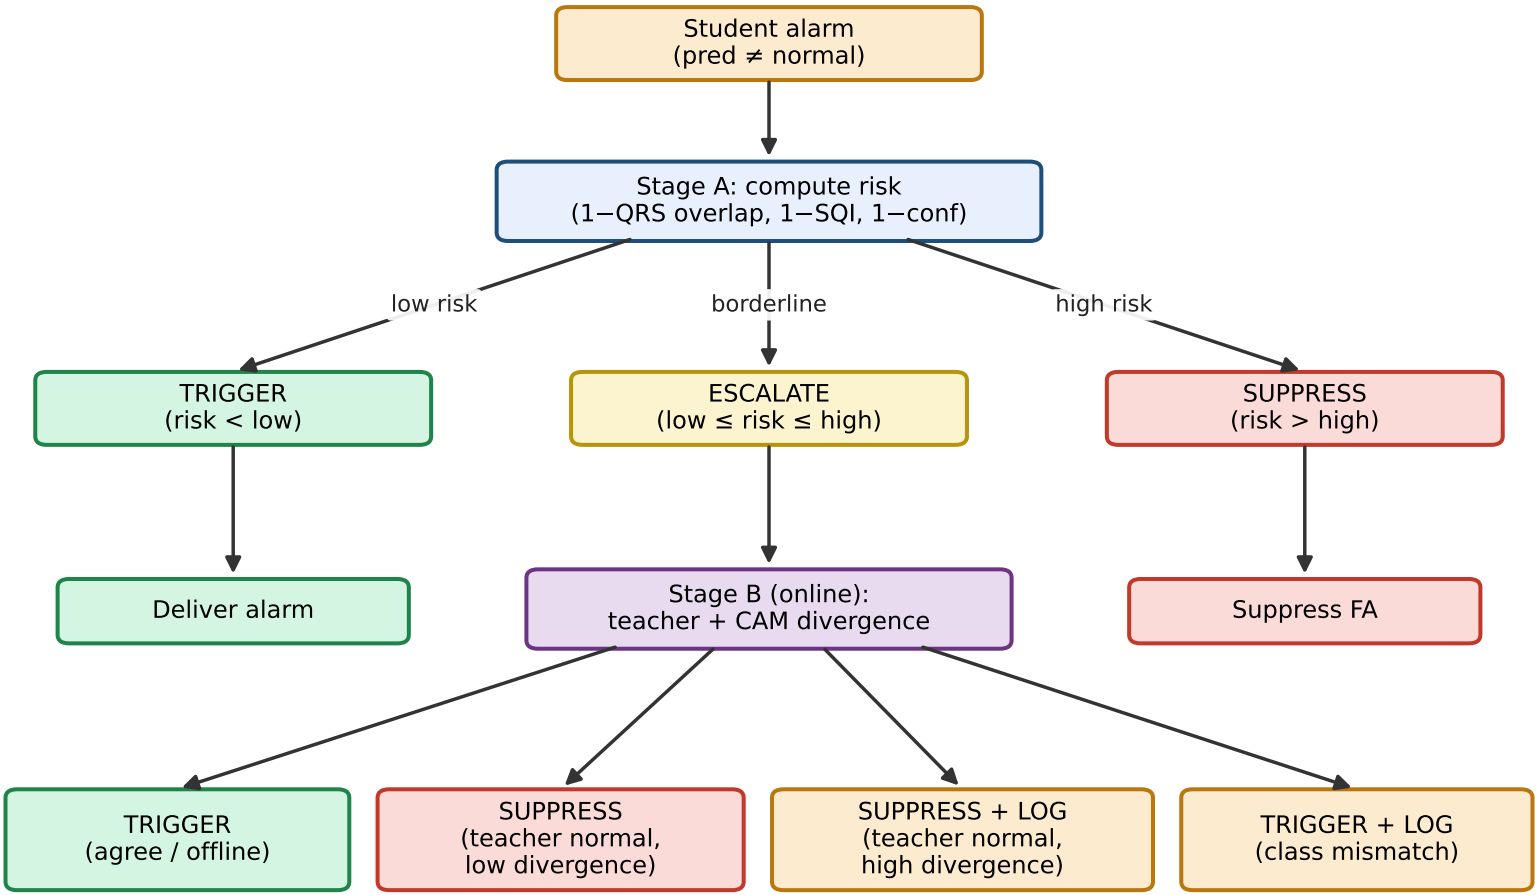

Offline fail-safe: ESCALATE → TRIGGER when connectivity is unavailable