


TYGON® and VERSILON™ chemical hoses

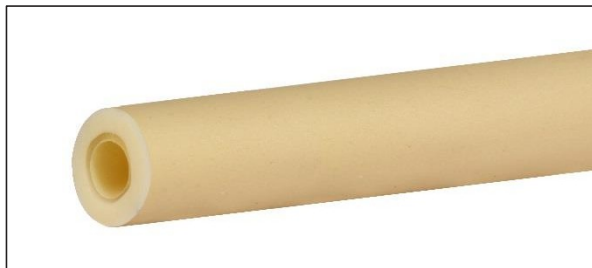

TYGON® CHEMICAL

Chemical and peristaltic pump hose Material:

polyolefin / TPE (Norprene®)

thermoplastic elastomer)

Operating temp: -60°C to+ 74°C

Brittleness temperature: - 60°C

Hardness: 61° Shore (A)

Density: 0.98 g/cm³

A creamy, flexible chemical hose with a multi-layer construction specifically designed to combine chemical resistance with long life in a peristaltic pump. Smooth inner layer with very good chemical resistance, plasticiser-free, resistant to acids, bases, salts, alcohols and ketones, with low absorption and adsorption of water-based liquids. The outer layer of thermoplastic elastomer (Norprene®) provides excellent properties and long service life in peristaltic pump operation. The hose meets hygiene and food contact requirements: US FDA 21 CFR 177.1520 and is resistant to most cleaning agents and disinfectants. Sterilisation by steam, ethylene oxide or radiation. Ideal for dispensing soaps and detergents, laundry and dishwashing detergents. Used for the production and dispensing of a wide variety of chemicals in all areas of industry. Full hose reel length 15m.

index	internal diameter [mm]	external diameter [mm]	wall thickness [mm]	operating pressure* 23°C / 71°C [bar]	vacuum 23°C / 71°C [mm Hg]	bend radius [mm]
VE-AD300007	3,2	6,4	1,6	2,28 / 0,97	760 / 760	12,7
VE-AD300012	4,8	8	1,6	2 / 0,69	760 / 760	25,4
VE-AD300017	6,4	9,6	1,6	1,38 / 0,55	760 / 381	31,8
VE-AD300027	9,6	12,7	1,6	0,97 / 0,34	635 / 127	50,8
VE-AD300038	12,7	19,1	3,2	1,1 / 0,55	760 / 635	57,2

* - working pressure determined in relation to burst pressure with a safety factor of 1:5

