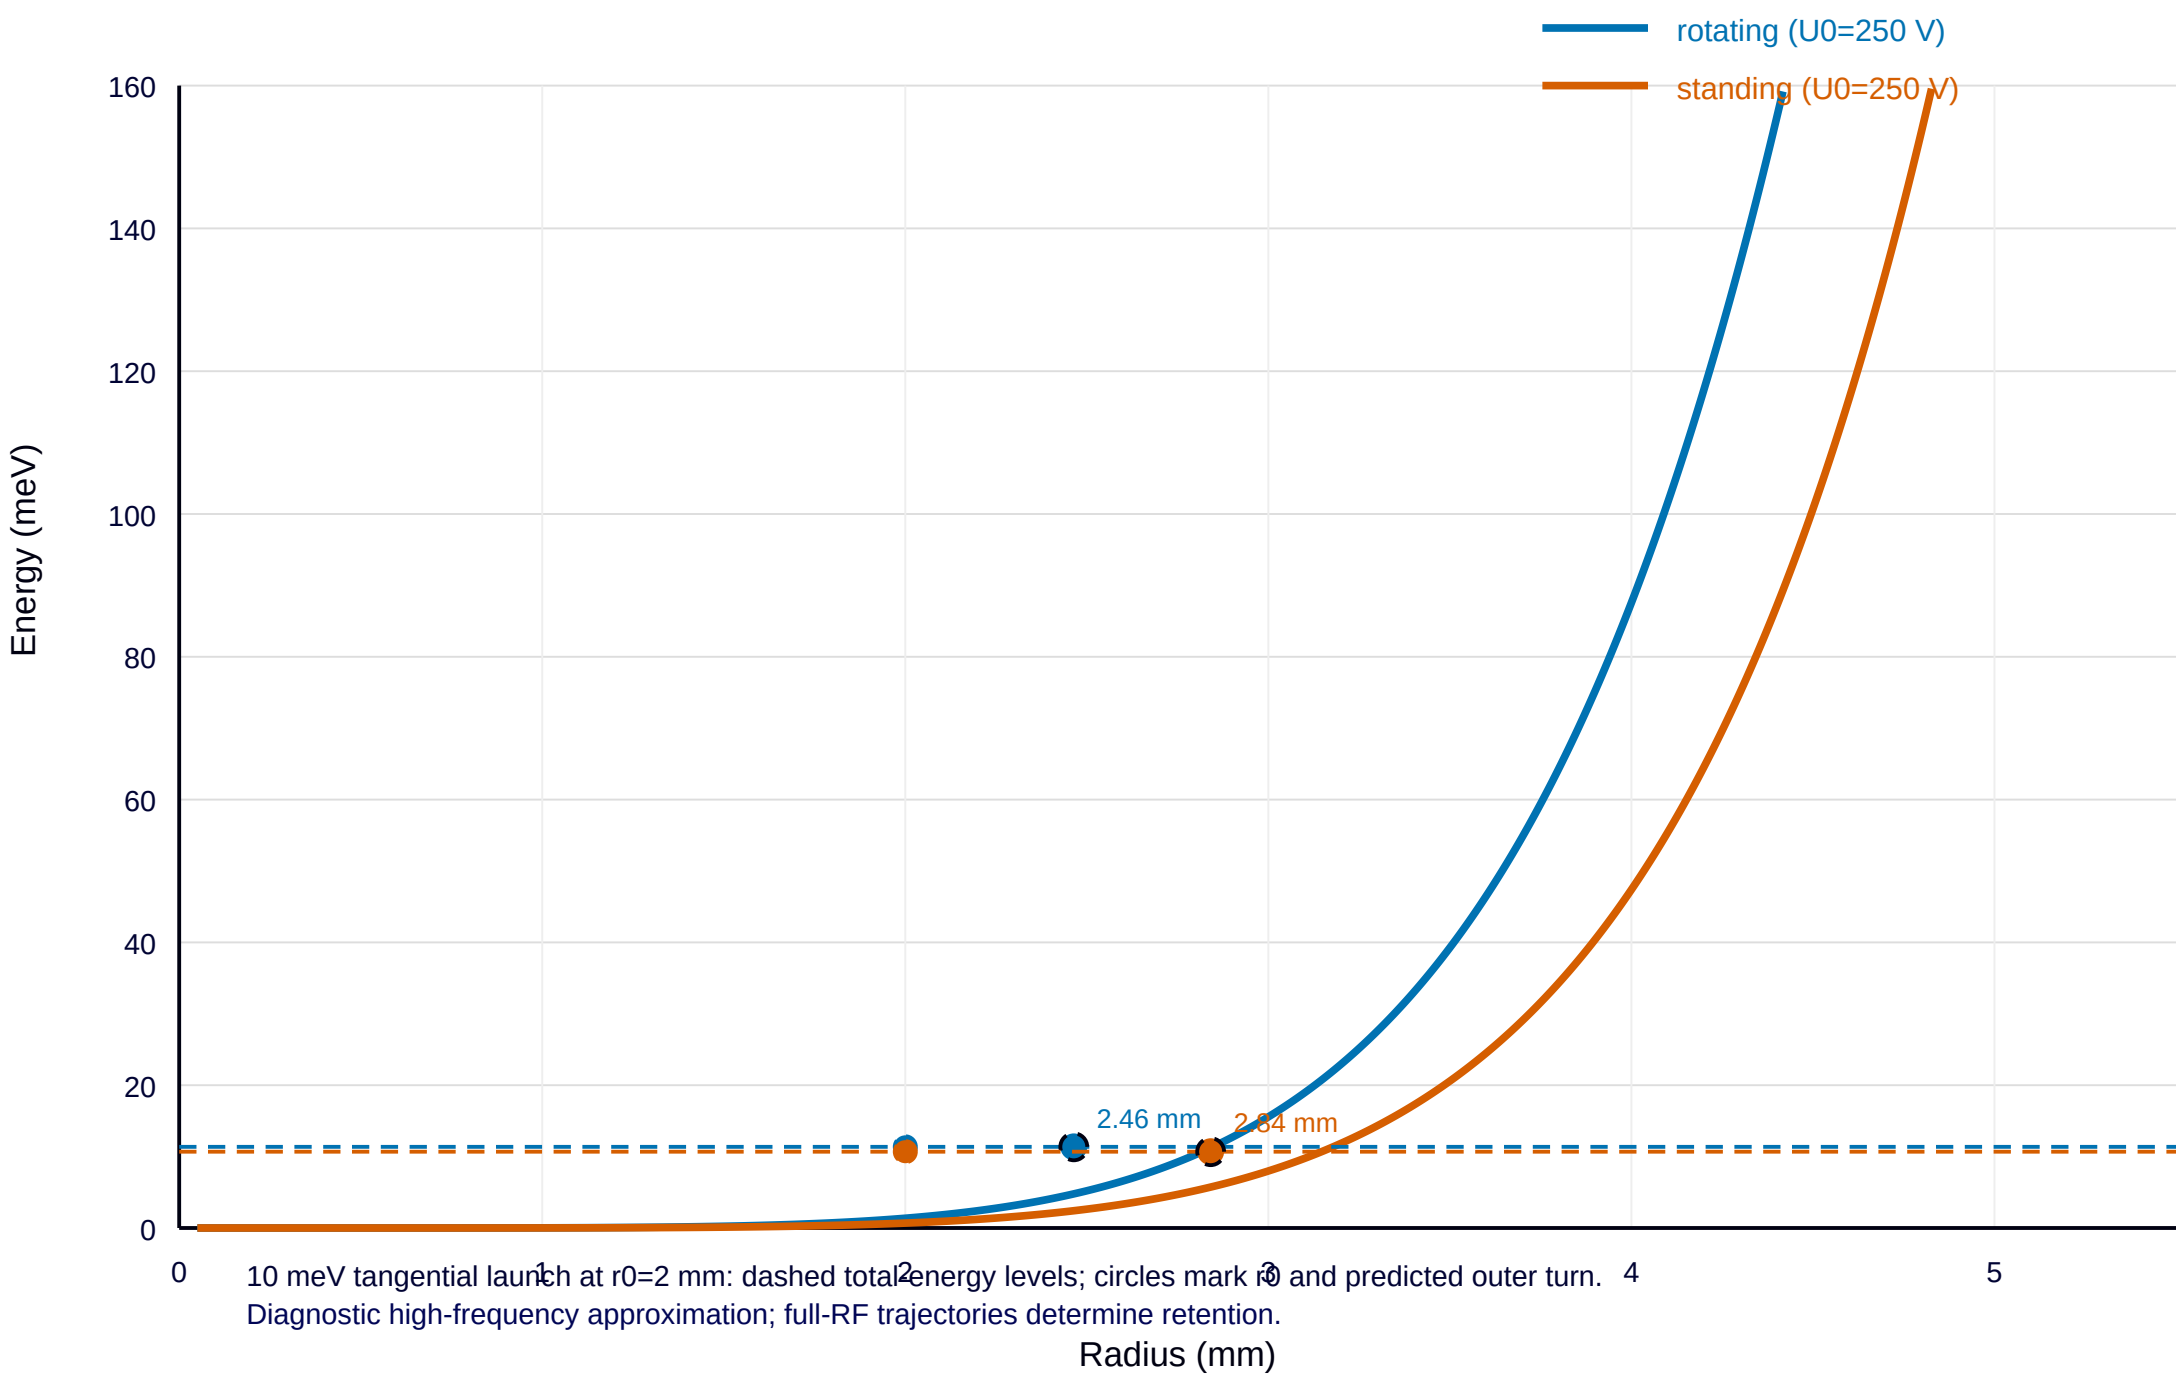
Leading pseudopotential and launch energy — 100 kTh, 250 V, 100 kHz
rotating (U0=250 V)
standing (U0=250 V)
Energy (meV)
160
140
120
100
80
60
40
20
0
0
1
2
3
4
5
2.46 mm
2.84 mm
Radius (mm)
10 meV tangential launch at r0=2 mm: dashed total-energy levels; circles mark r0 and predicted outer turn.
Diagnostic high-frequency approximation; full-RF trajectories determine retention.