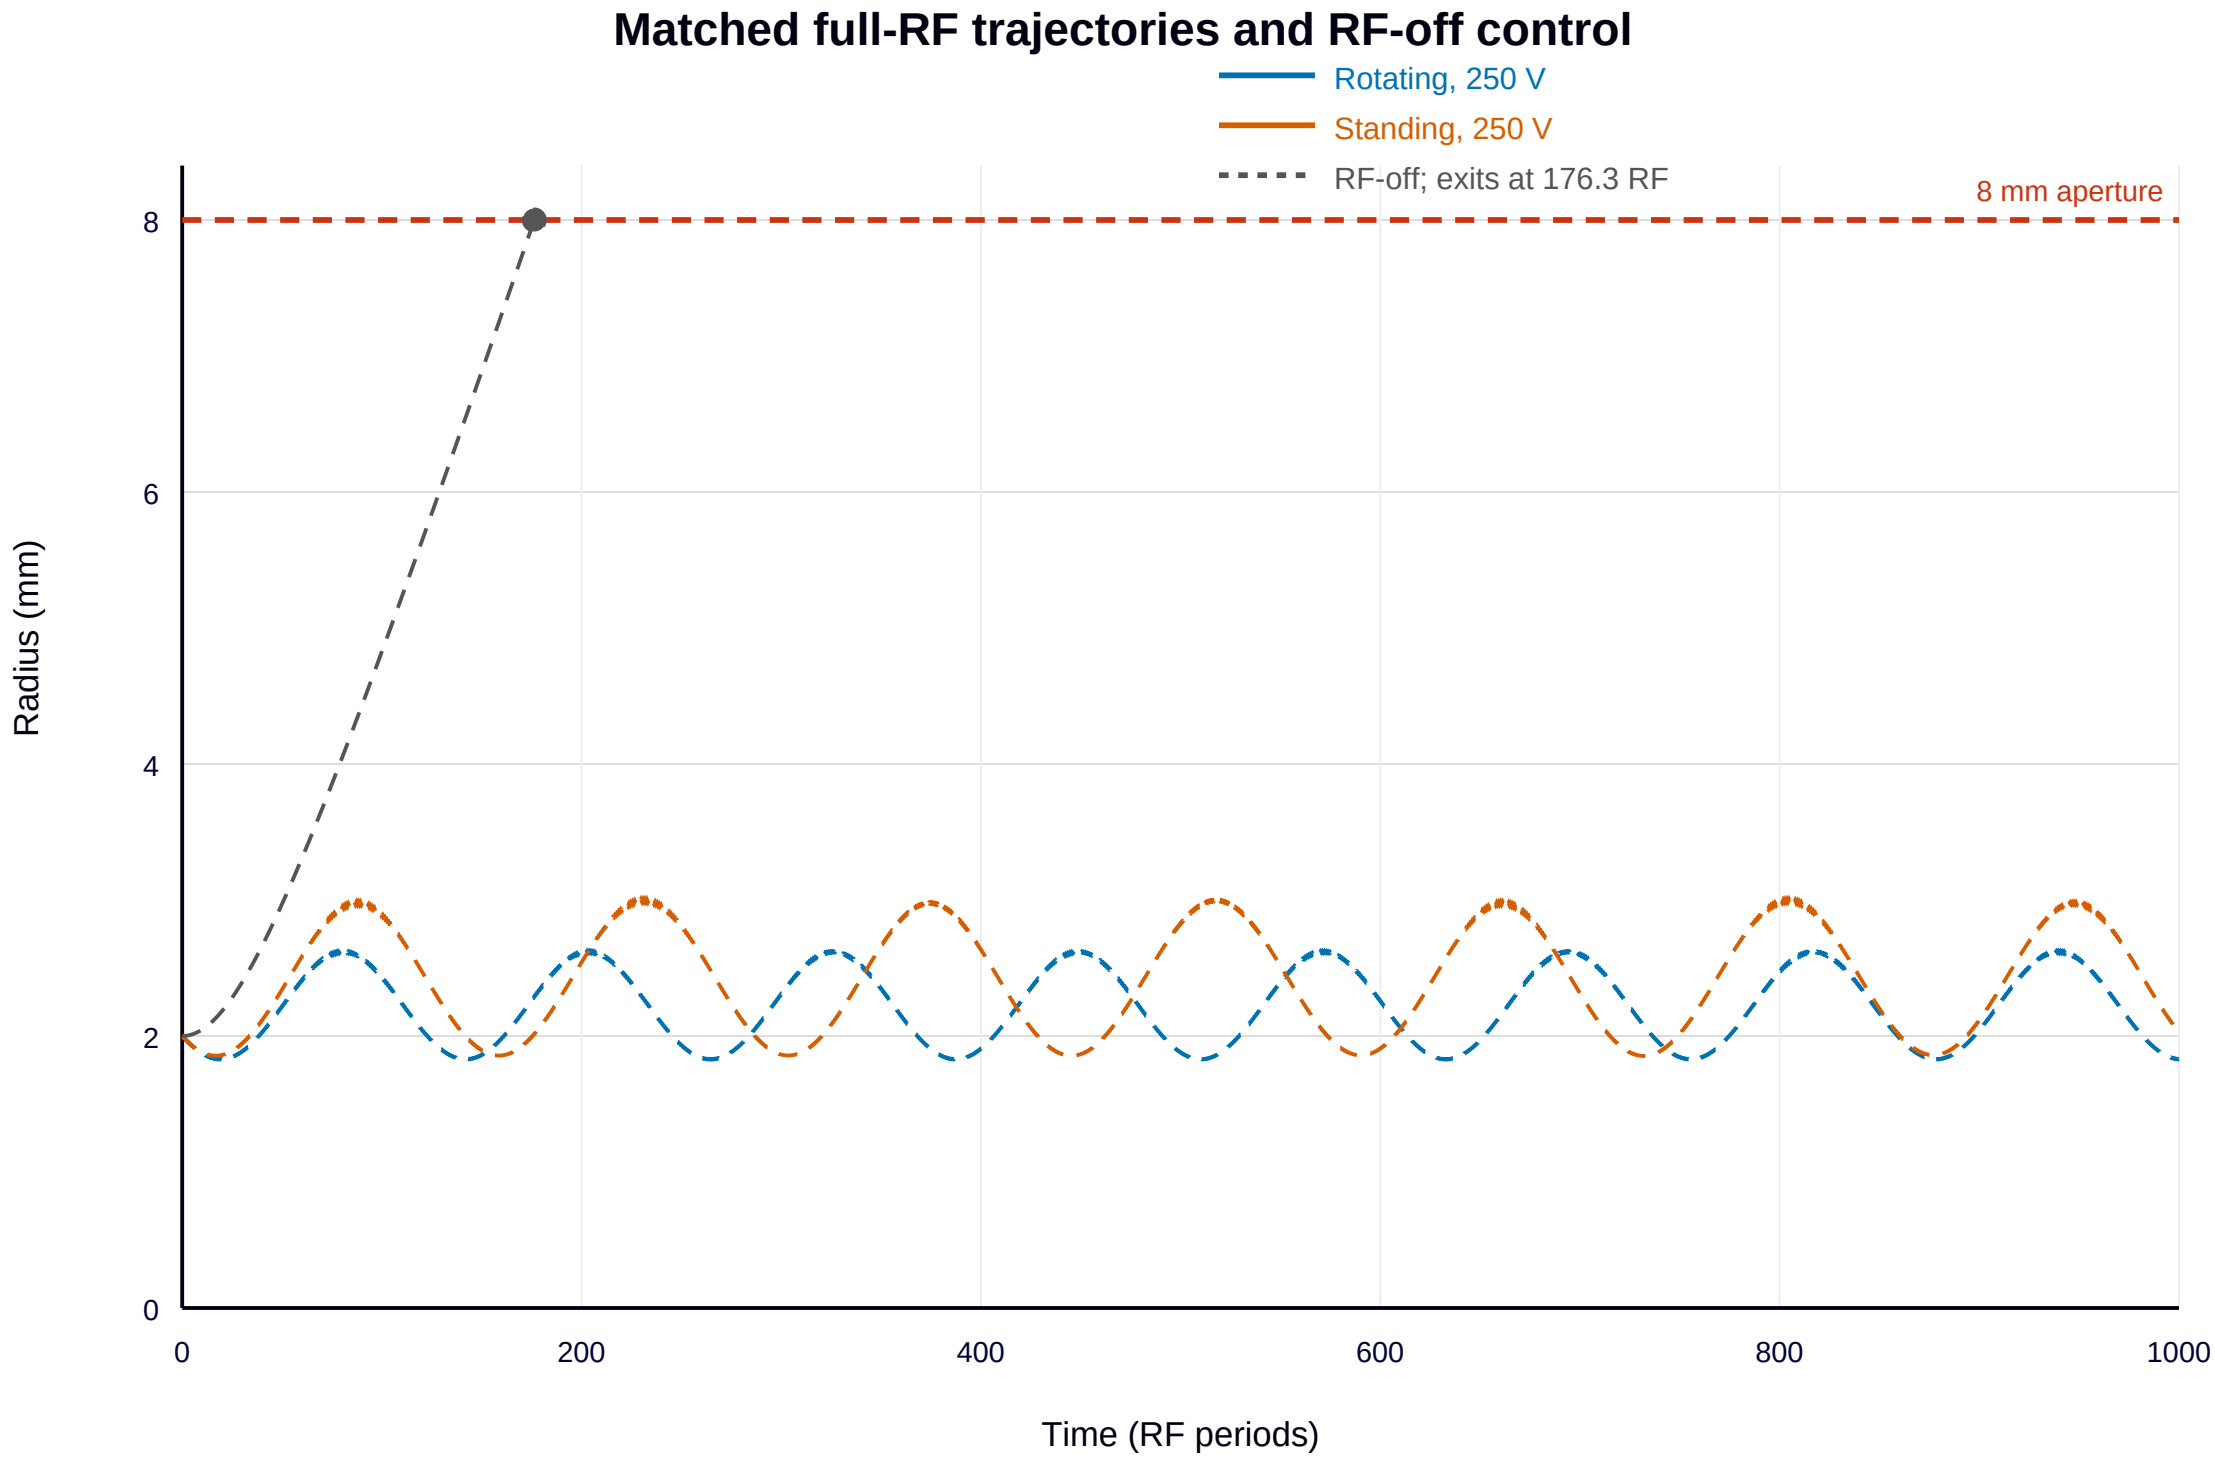

Matched full-RF trajectories and RF-off control
Rotating, 250 V
Standing, 250 V
RF-off; exits at 176.3 RF
8 mm aperture
Radius (mm)
0
2
4
6
8
0
200
400
600
800
1000
Time (RF periods)