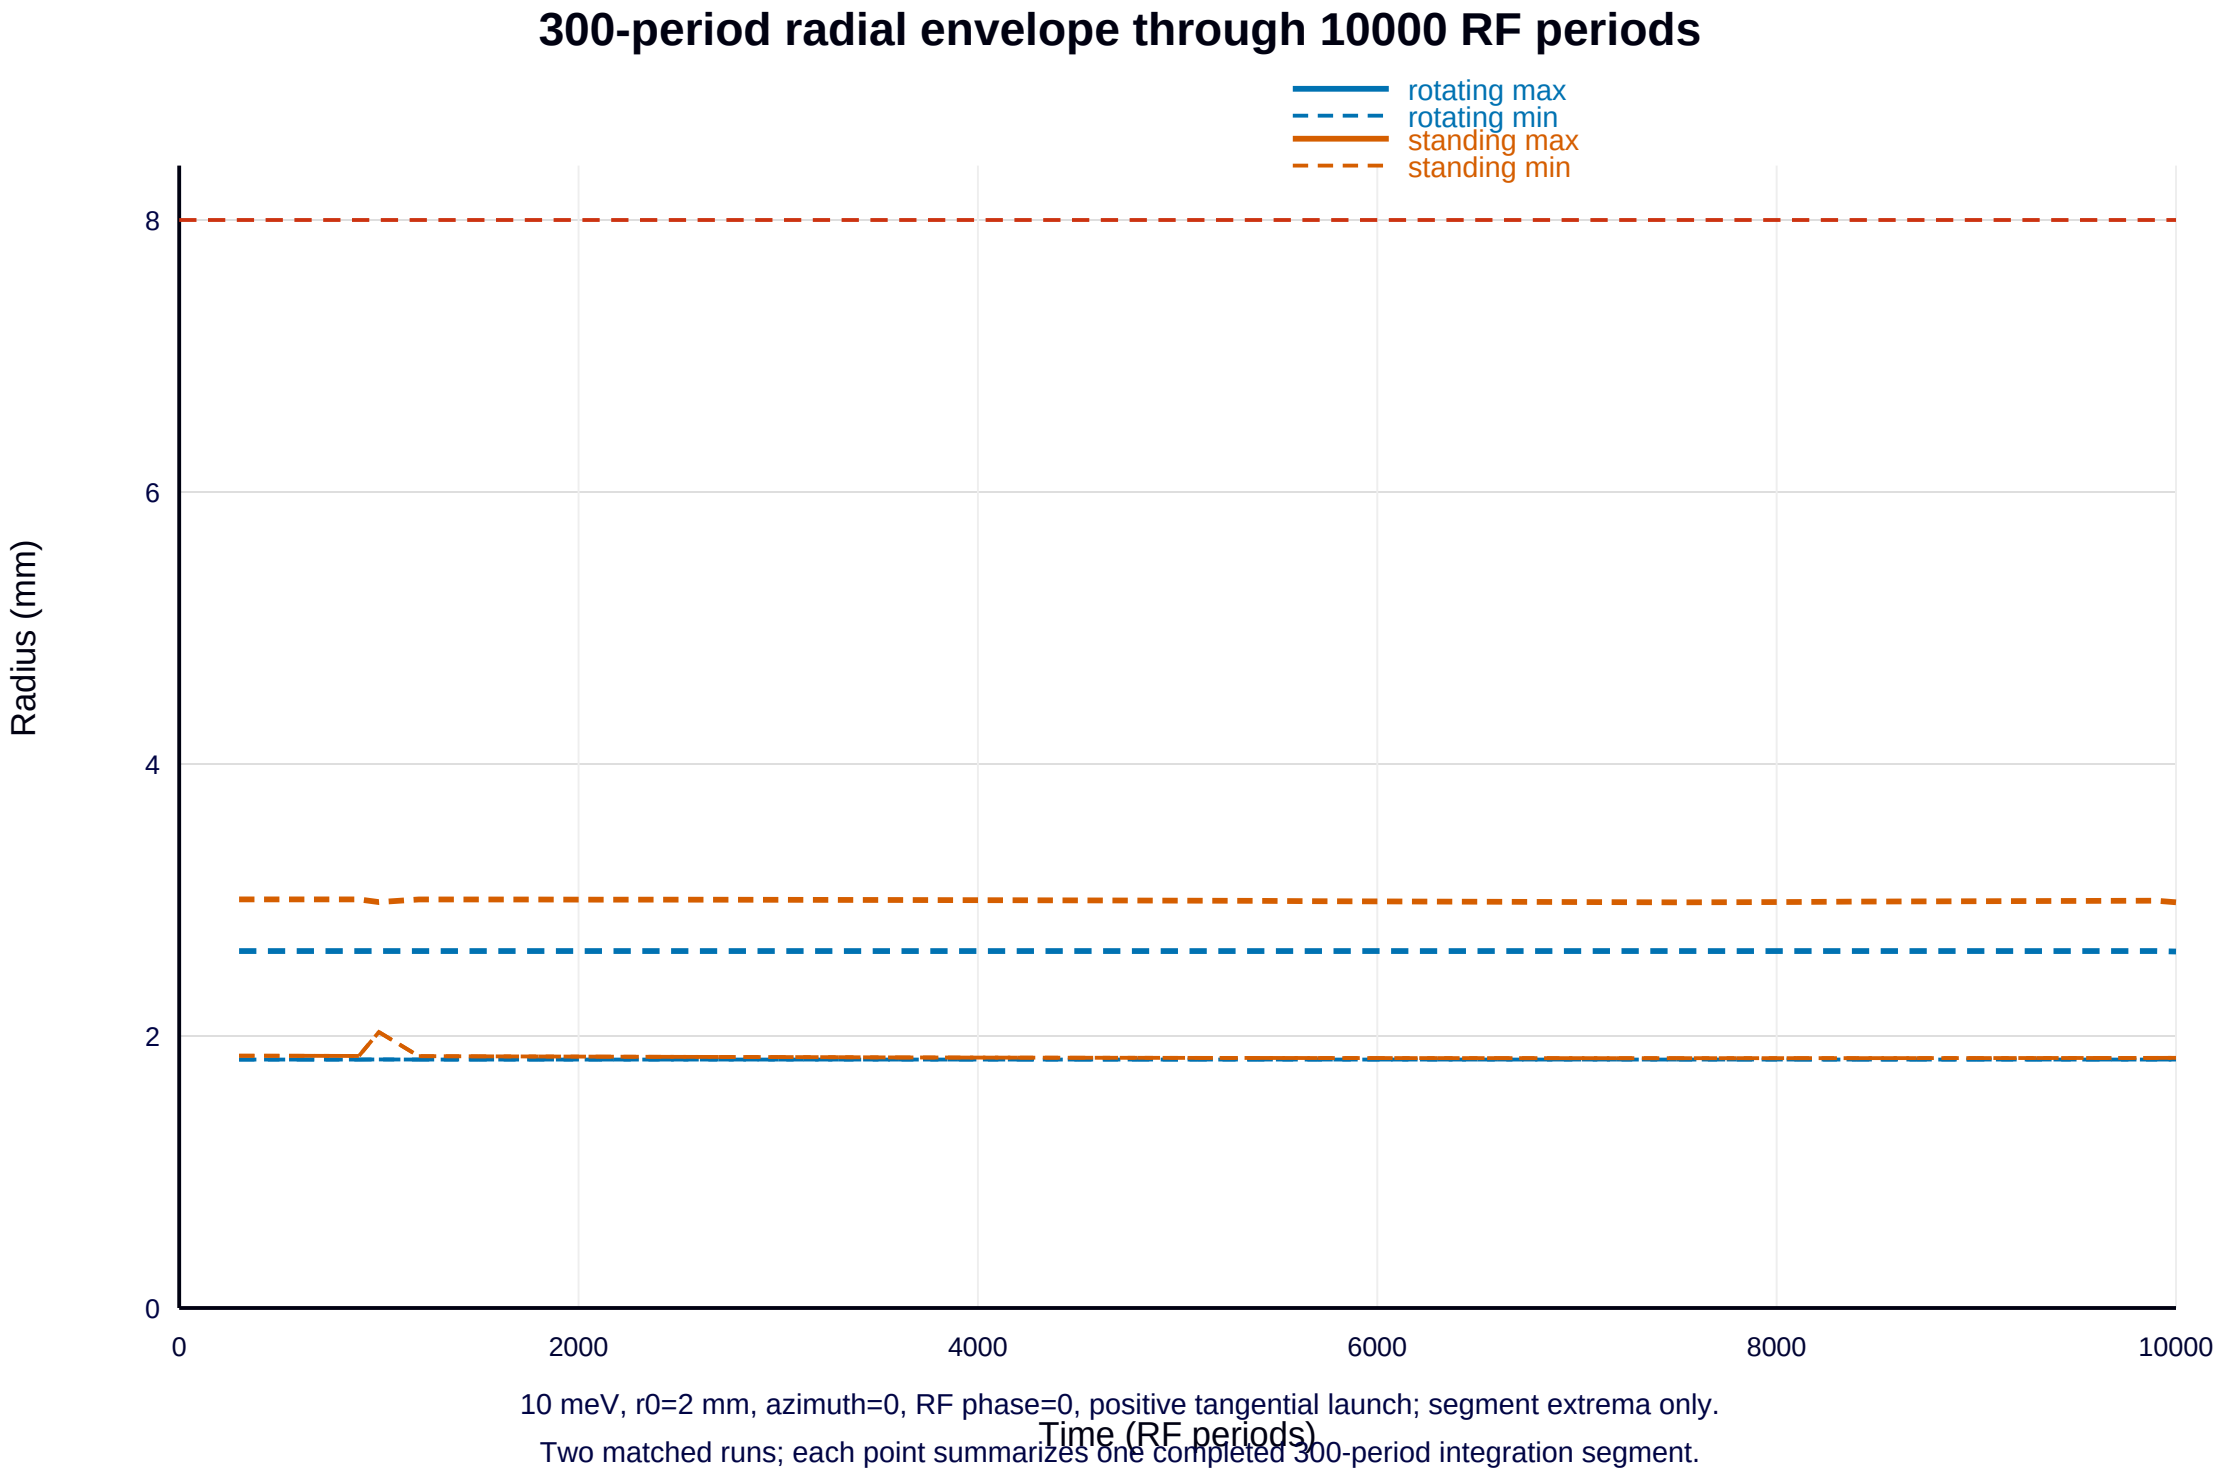
300-period radial envelope through 10000 RF periods
rotating max
rotating min
standing max
standing min
Radius (mm)
0
2
4
6
8
0
2000
4000
6000
8000
10000
Time (RF periods)
10 meV, r0=2 mm, azimuth=0, RF phase=0, positive tangential launch; segment extrema only.
Two matched runs; each point summarizes one completed 300-period integration segment.