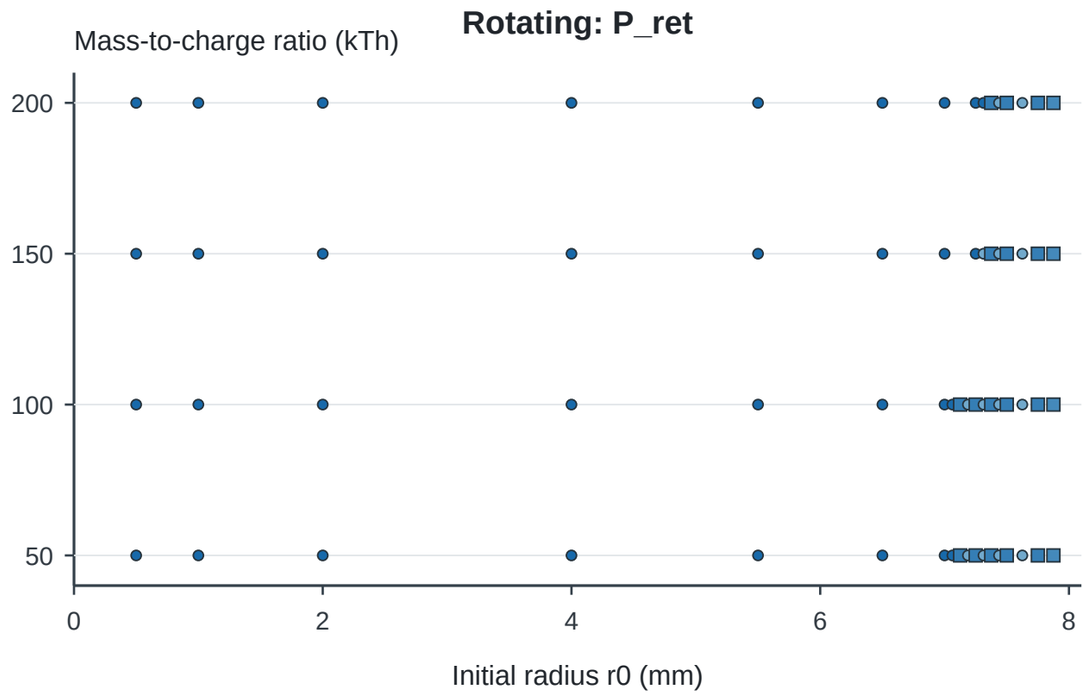

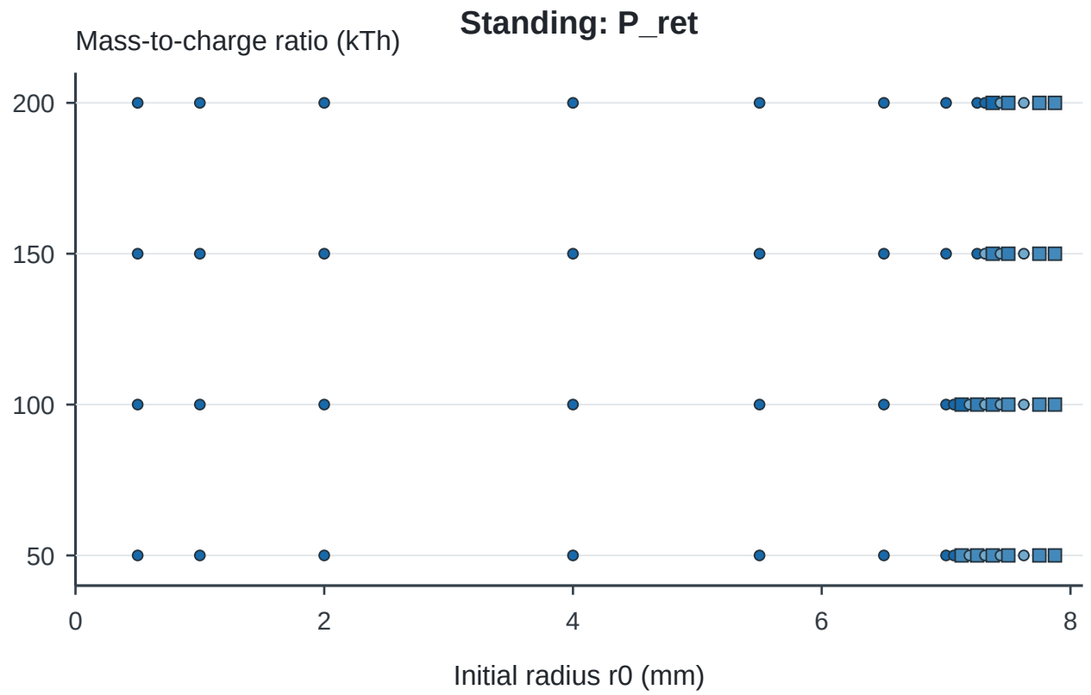

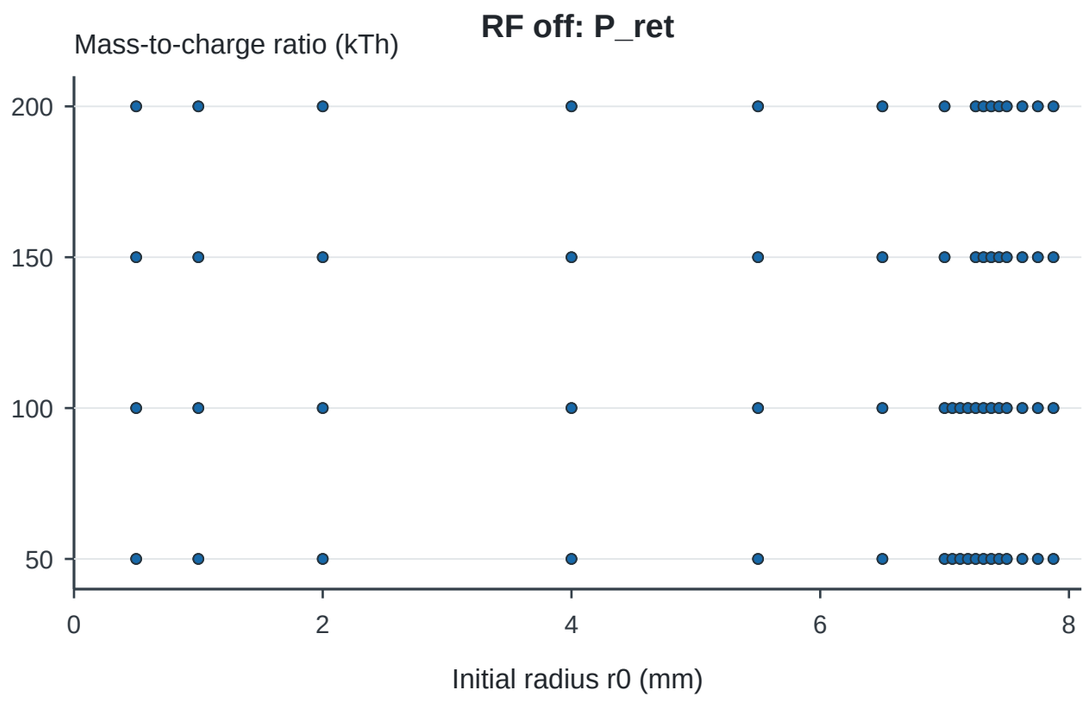

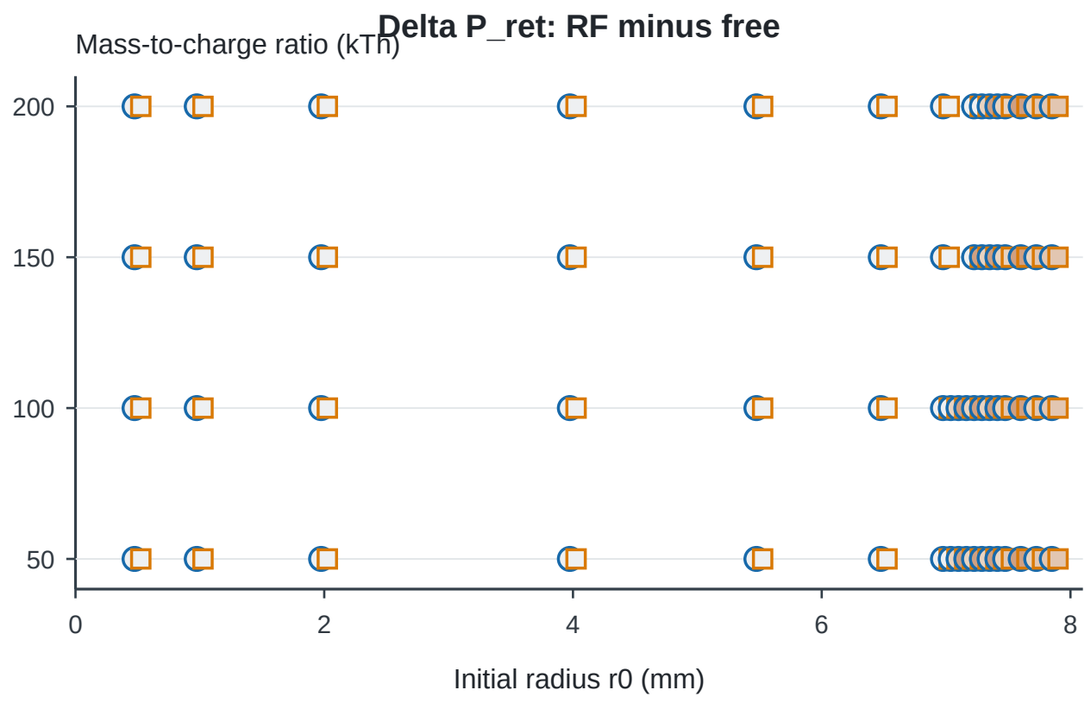

Delta shade: -1 to 0; symbols: circles / squares identify RF model in Delta panel.

Retention panels: circle n=4, square n=24; in Delta panel marks are offset +/-0.07 mm only for display.

Zero-speed RF-off starts are stationary; any RF escape is field-induced loss, not confinement gain.