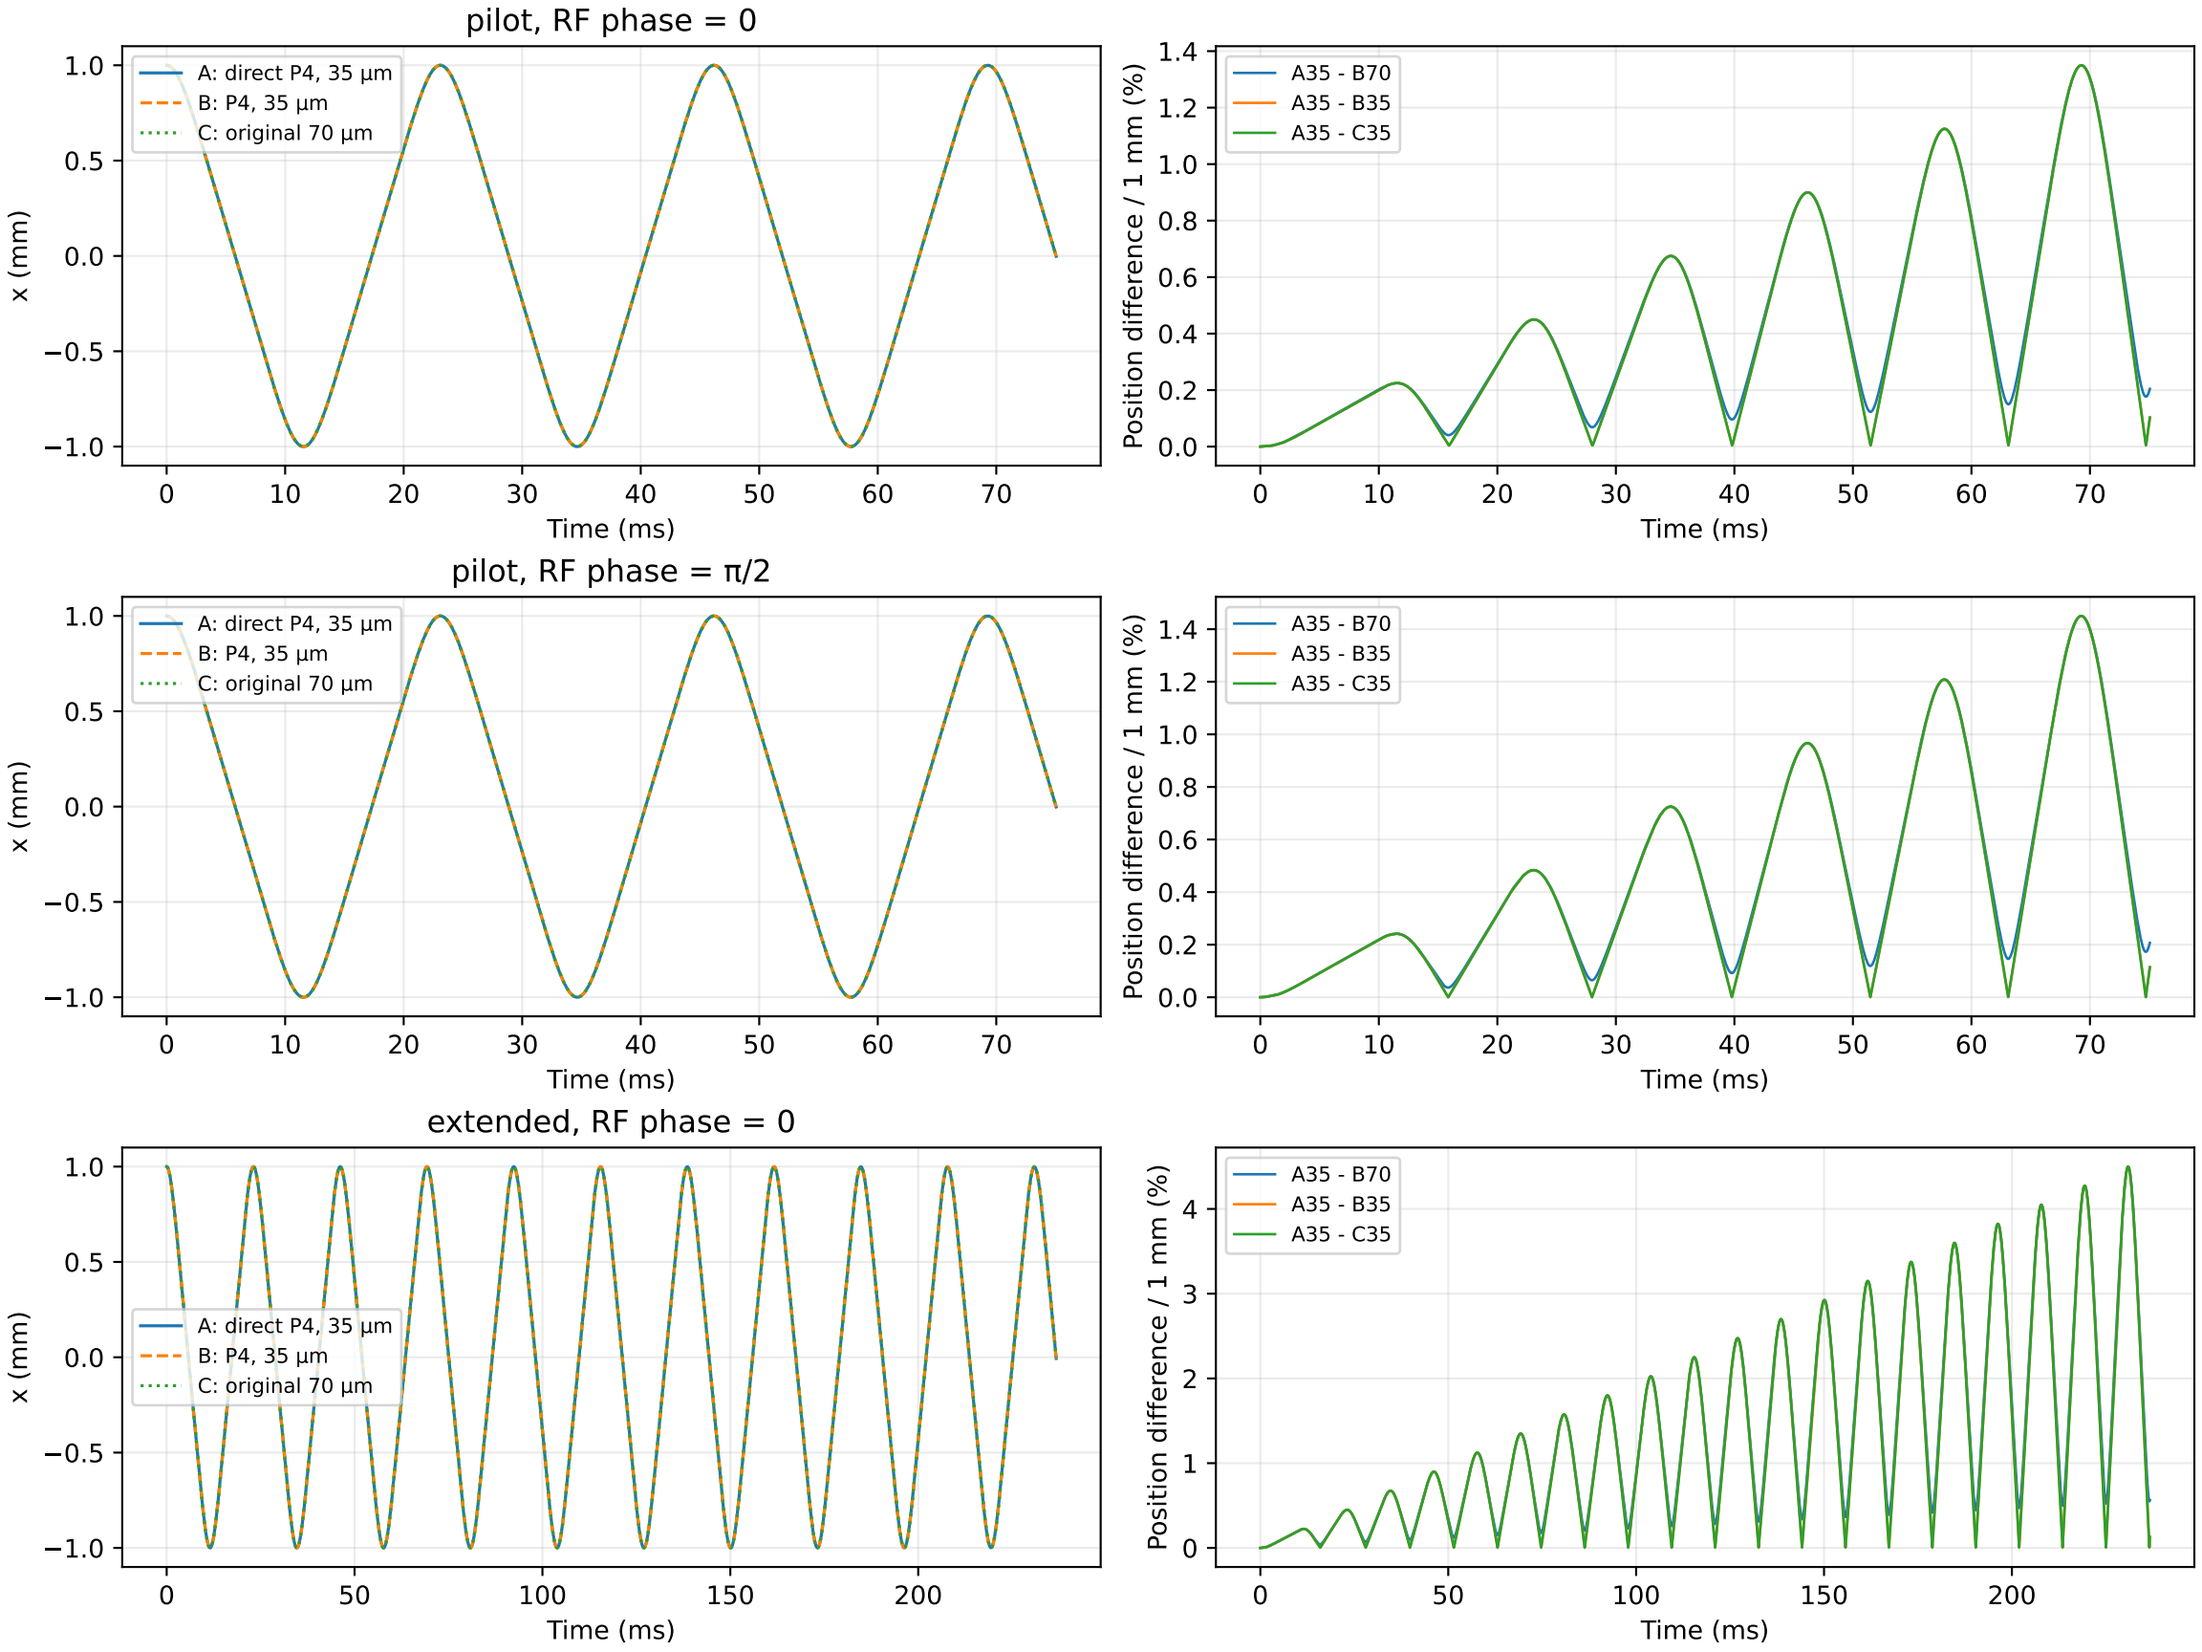
pilot, RF phase = 0
A: direct P4, 35 µm
B: P4, 35 µm
C: original 70 µm
x (mm)
Time (ms)
A35 - B70
A35 - B35
A35 - C35
Position difference / 1 mm (%)
pilot, RF phase = π/2
extended, RF phase = 0